

# TEST REPORT

Product Name:	Gaming Headset
FCC ID:	2BFECOW810
Trademark:	N/A
Model Number:	OW810, F3A, WF12, WF13, WF15, WF16, WF17, WF18
Prepared For:	Dongguan Fenghui Electronic Technology Co., Ltd
Address:	Room 201, No. 8 Yongda Road, Shipai Town, Dongguan City, Guangdong Province, China
Manufacturer:	Dongguan Fenghui Electronic Technology Co., Ltd
Address:	Room 201, No. 8 Yongda Road, Shipai Town, Dongguan City, Guangdong Province, China
Prepared By:	Shenzhen CTB Testing Technology Co., Ltd.
Address:	1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date:	Jan. 19, 2024
Sample tested Date:	Jan. 19, 2024 to Jan. 29, 2024
Issue Date:	Jan. 29, 2024
Report No.:	CTB240127061RFX
Test Standards	FCC Part15.249 ANSI C63.10:2013
Test Results	PASS
Remark:	This is 2.4GHz radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

## TABLE OF CONTENT

	Page
Test Report Declaration	
1. VERSION .....	3
2. TEST SUMMARY .....	4
3. MEASUREMENT UNCERTAINTY .....	5
4. PRODUCT INFORMATION AND TEST SETUP .....	6
4.1 Product Information .....	6
4.2 Test Setup Configuration .....	6
4.3 Support Equipment .....	6
4.4 Channel List .....	7
4.5 Test Mode .....	7
4.6 Test Environment .....	7
5. TEST FACILITY AND TEST INSTRUMENT USED .....	8
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
6. AC POWER LINE CONDUCTED EMISSION .....	10
6.1 Block Diagram Of Test Setup .....	10
6.2 Limit .....	10
6.3 Test procedure .....	10
6.4 Test Result .....	12
7. RADIATED SPURIOUS EMISSION .....	14
7.1 Block Diagram Of Test Setup .....	14
7.2 Limit .....	14
7.3 Test procedure .....	15
7.4 Test Result .....	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS .....	21
8.1 Block Diagram Of Test Setup .....	21
8.2 Limit .....	21
8.3 Test procedure .....	22
8.4 Test Result .....	23
9. BANDWIDTH TEST .....	24
9.1 Block Diagram Of Test Setup .....	24
9.2 Limit .....	24
9.3 Test procedure .....	24
9.4 Test Result .....	24
10. ANTENNA REQUIREMENT .....	26
11. EUT TEST SETUP PHOTOGRAPHS .....	27

(Note: N/A means not applicable)

**1. VERSION**

Report No.	Issue Date	Description	Approved
CTB240127061RFX	Jan. 29, 2024	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.215	20dB Bandwidth	PASS	
15.249	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1x10-7
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	OW810, F3A, WF12, WF13, WF15, WF16, WF17, WF18
Model Description:	All the model are the same circuit and RF module, only different for model name. Test sample model: OW810
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK
Antenna installation:	PCB antenna
Antenna Gain:	2.098dBi
Ratings:	DC 5V charging from adapter Battery DC 3.7V

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series	Note
1	Adapter	JIYIN	JY-05100C	/	/

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)						
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461	/	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting GFSK	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Micowave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Micowave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

#### Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

#### Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

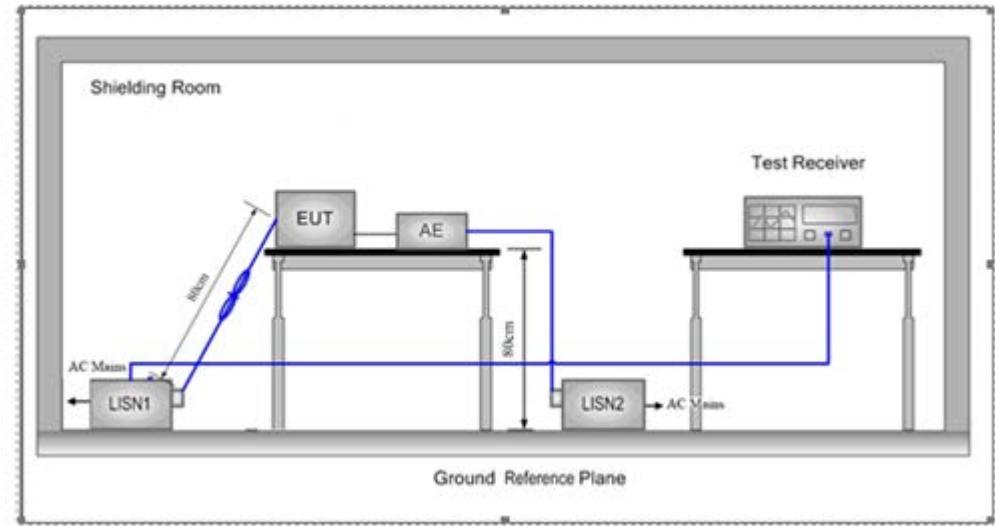

### 6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

## 6.4 Test Result

## L: Worst case-GFSK(low channel)

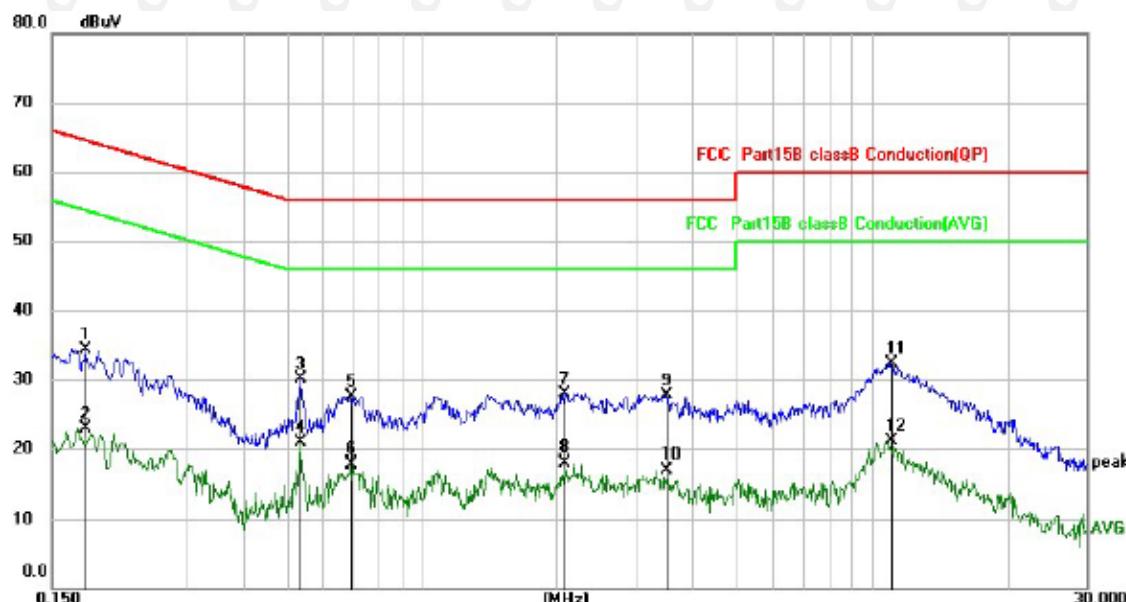


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
1		0.1779	24.31	9.95	34.26	64.58	-30.32 QP
2		0.1779	12.94	9.95	22.89	54.58	-31.69 AVG
3		0.5350	20.11	10.00	30.11	56.00	-25.89 QP
4	*	0.5350	10.83	10.00	20.83	46.00	-25.17 AVG
5		0.6939	17.56	10.02	27.58	56.00	-28.42 QP
6		0.6939	7.96	10.02	17.98	46.00	-28.02 AVG
7		2.0779	17.86	10.10	27.96	56.00	-28.04 QP
8		2.0779	8.03	10.10	18.13	46.00	-27.87 AVG
9		3.5019	17.48	10.24	27.72	56.00	-28.28 QP
10		3.5019	6.92	10.24	17.16	46.00	-28.84 AVG
11		11.0138	21.77	10.61	32.38	60.00	-27.62 QP
12		11.0138	10.57	10.61	21.18	50.00	-28.82 AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

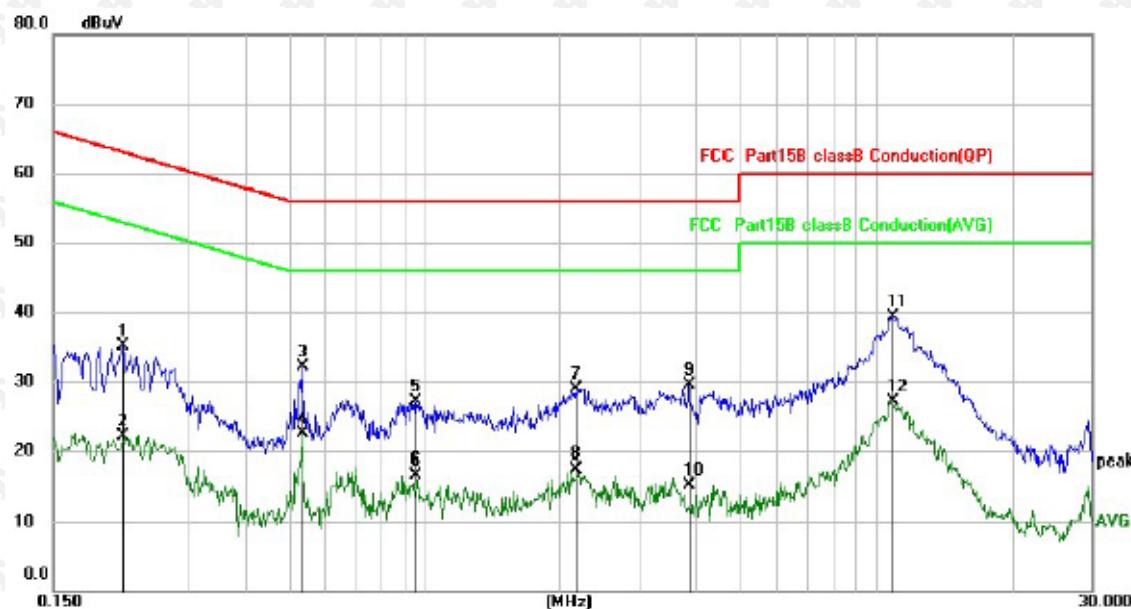

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		dBuV	dB	dBuV	dBuV	dB	
1	0.2139	25.08	9.95	35.03	63.05	-28.02	QP
2	0.2139	12.08	9.95	22.03	53.05	-31.02	Avg
3	0.5350	22.12	10.00	32.12	56.00	-23.88	QP
4	0.5350	12.50	10.00	22.50	46.00	-23.50	Avg
5	0.9578	17.09	10.01	27.10	56.00	-28.90	QP
6	0.9578	6.75	10.01	16.76	46.00	-29.24	Avg
7	2.1739	18.85	10.11	28.96	56.00	-27.04	QP
8	2.1739	7.37	10.11	17.48	46.00	-28.52	Avg
9	3.8620	19.32	10.27	29.59	56.00	-26.41	QP
10	3.8620	5.06	10.27	15.33	46.00	-30.67	Avg
11 *	10.8939	28.60	10.61	39.21	60.00	-20.79	QP
12	10.8939	16.43	10.61	27.04	50.00	-22.96	Avg

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

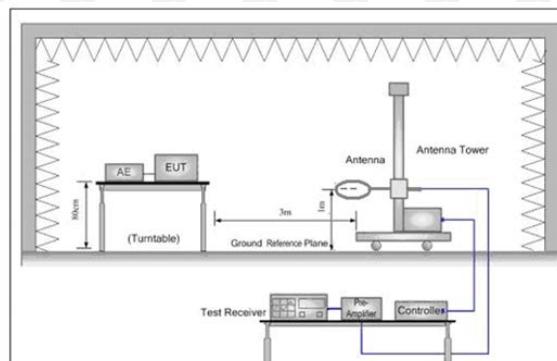


Figure 1. Below 30MHz


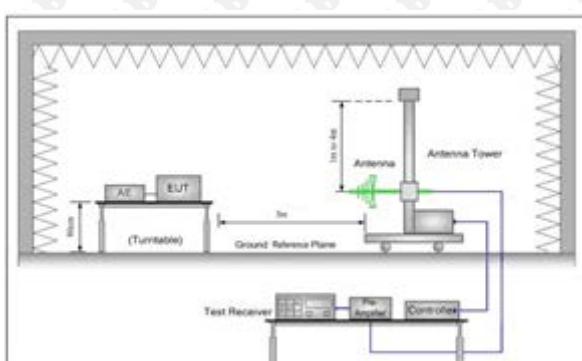


Figure 2. 30MHz to 1GHz

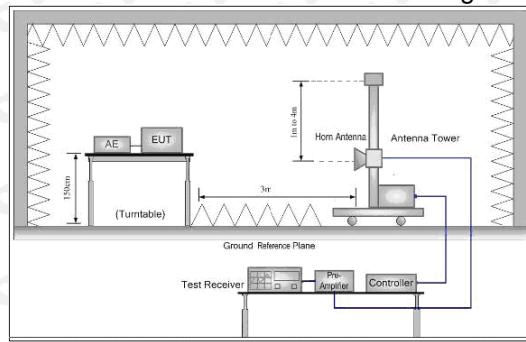

### 7.2 Limit

#### Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

#### 7.4 Test Result

Below 1GHz Test Results:


Antenna polarity: H



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.2765	33.83	-15.82	18.01	40.00	-21.99	QP
2	114.9169	37.44	-17.84	19.60	43.50	-23.90	QP
3	163.1818	36.81	-14.79	22.02	43.50	-21.48	QP
4	196.5098	40.40	-18.06	22.34	43.50	-21.16	QP
5	287.9904	32.98	-15.25	17.73	46.00	-28.27	QP
6 *	446.4141	40.43	-11.43	29.00	46.00	-17.00	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

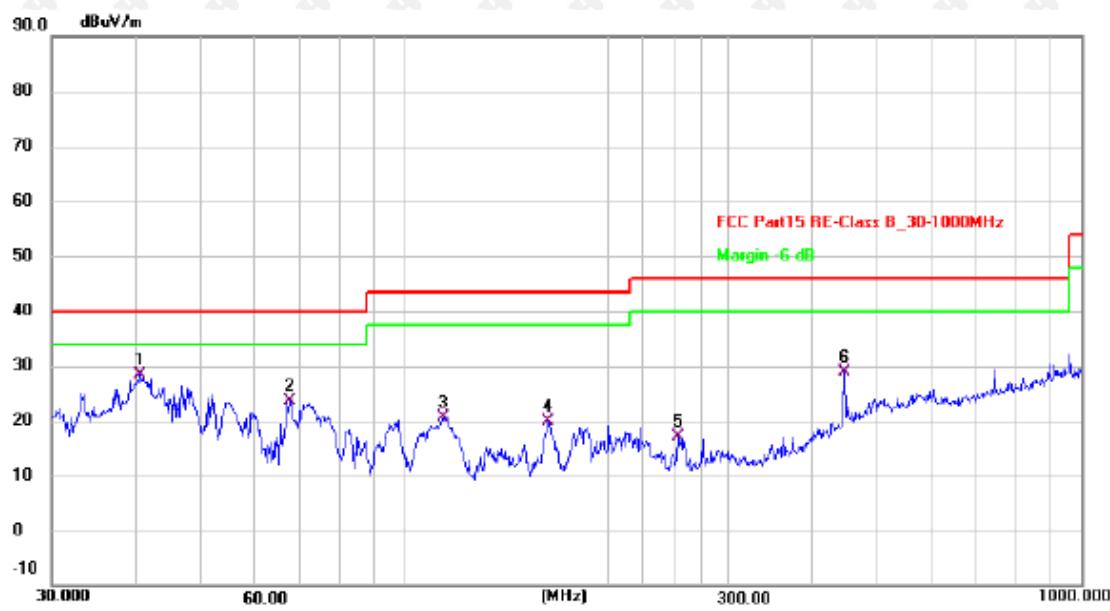

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	40.5591	40.04	-11.74	28.30	40.00	-11.70	QP
2	67.4382	39.39	-15.66	23.73	40.00	-16.27	QP
3	113.7143	37.90	-17.19	20.71	43.50	-22.79	QP
4	162.6106	33.68	-13.86	19.82	43.50	-23.68	QP
5	252.9482	31.39	-14.17	17.22	46.00	-28.78	QP
6	446.4141	33.87	-4.94	28.93	46.00	-17.07	QP

Remark: Factor = Cable loss + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2402	102.94	-5.84	97.10	114	-16.90	peak
2402	94.00	-5.84	88.16	94	-5.84	AVG
4804	57.43	-3.64	53.79	74	-20.21	peak
4804	48.66	-3.64	45.02	54	-8.98	AVG
7206	59.43	-0.95	58.48	74	-15.52	peak
7206	48.04	-0.95	47.09	54	-6.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2402	101.92	-5.84	96.08	114	-17.92	peak
2402	93.04	-5.84	87.20	94	-6.80	AVG
4804	56.70	-3.64	53.06	74	-20.94	peak
4804	47.40	-3.64	43.76	54	-10.24	AVG
7206	60.58	-0.95	59.63	74	-14.37	peak
7206	50.92	-0.95	49.97	54	-4.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2441	99.85	-5.71	94.14	114	-19.86	peak
2441	93.08	-5.71	87.37	94	-6.63	AVG
4882	54.25	-3.51	50.74	74	-23.26	peak
4882	45.14	-3.51	41.63	54	-12.37	AVG
7323	56.14	-0.82	55.32	74	-18.68	peak
7323	46.49	-0.82	45.67	54	-8.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2441	100.17	-5.71	94.46	114	-19.54	peak
2441	92.10	-5.71	86.39	94	-7.61	AVG
4882	54.43	-3.51	50.92	74	-23.08	peak
4882	45.06	-3.51	41.55	54	-12.45	AVG
7323	57.64	-0.82	56.82	74	-17.18	peak
7323	47.74	-0.82	46.92	54	-7.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## CH High (2480MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2480	100.04	-5.65	94.39	114	-19.61	
2480	91.98	-5.65	86.33	94	-7.67	AVG
4960	56.00	-3.43	52.57	74	-21.43	peak
4960	46.40	-3.43	42.97	54	-11.03	AVG
7440	55.68	-0.75	54.93	74	-19.07	peak
7440	45.95	-0.75	45.20	54	-8.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2480	98.65	-5.65	93.00	114	-21.00	
2480	92.52	-5.65	86.87	94	-7.13	AVG
4960	54.36	-3.43	50.93	74	-23.07	peak
4960	46.81	-3.43	43.38	54	-10.62	AVG
7440	56.80	-0.75	56.05	74	-17.95	peak
7440	46.79	-0.75	46.04	54	-7.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Remark:

- (1) Measuring frequencies from 9KHz to the 25 GHz.
- (2) All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

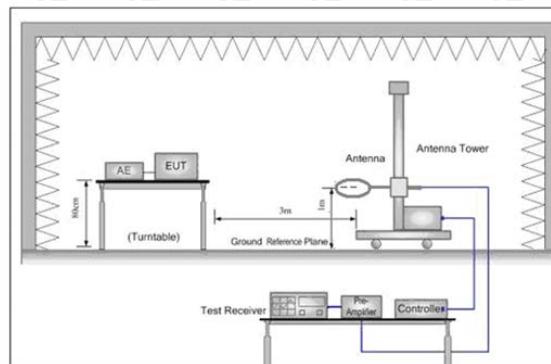


Figure 1. Below 30MHz


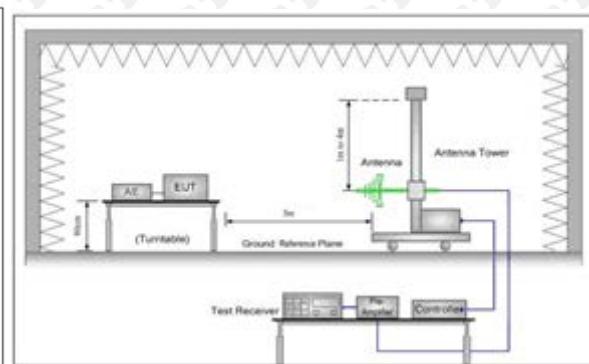


Figure 2. 30MHz to 1GHz

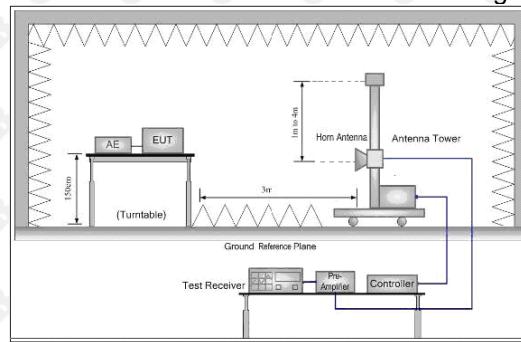

### 8.2 Limit

#### Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 8.3 Test procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Frequency	Detector	RBW	VBW	Remark
2310MHz-2400MHz	peak	1MHz	3MHz	peak
2483.5MHz-2500MHz	peak	1MHz	3MHz	peak

## 8.4 Test Result

CH Low:

Horizontal:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.2488	27.39	-4.31	23.08	54	-30.92	peak
2	2343.7167	31.51	-4.29	27.22	54	-26.78	peak
3	2378.1403	30.09	-4.45	25.64	54	-28.36	peak
4	2389.8121	26.17	-4.93	21.24	54	-32.76	peak
5	2439.7576	28.36	-3.92	24.44	54	-29.56	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.0566	29.83	-4.27	25.57	54	-28.43	peak
2	2343.6629	31.52	-4.35	27.18	54	-26.82	peak
3	2378.0914	27.66	-4.46	23.20	54	-30.80	peak
4	2389.9304	29.53	-4.96	24.57	54	-29.43	peak
5	2439.7575	27.50	-3.99	23.51	54	-30.49	peak

CH High:

Horizontal:


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.1416	31.51	-4.32	27.19	54	-26.81	peak
2	2488.8186	32.04	-4.28	27.75	54	-26.25	peak
3	2490.2618	33.71	-4.44	29.27	54	-24.73	peak
4	2493.3528	32.53	-4.95	27.58	54	-26.42	peak
5	2495.8873	27.83	-3.92	23.92	54	-30.08	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.7714	30.75	-4.27	26.48	54	-27.52	peak
2	2488.9363	30.25	-4.35	25.89	54	-28.11	peak
3	2490.0855	31.85	-4.47	27.39	54	-26.61	peak
4	2493.5771	33.53	-4.97	28.56	54	-25.44	peak
5	2496.117	26.44	-3.97	22.46	54	-31.54	peak

## 9. BANDWIDTH TEST

### 9.1 Block Diagram Of Test Setup

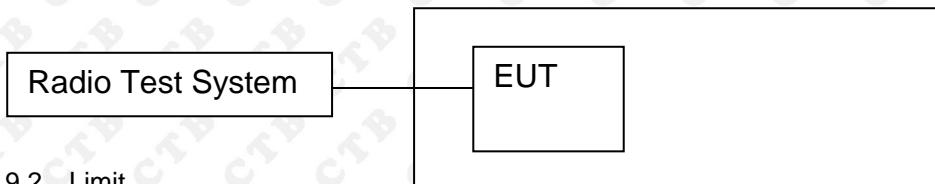

### 9.2 Limit

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.249	Bandwidth	2402-2483.5	PASS

### 9.3 Test procedure



1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### 9.4 Test Result

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.369	PASS
	Mid channel	1.369	PASS
	High channel	1.368	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

## Test Graph:

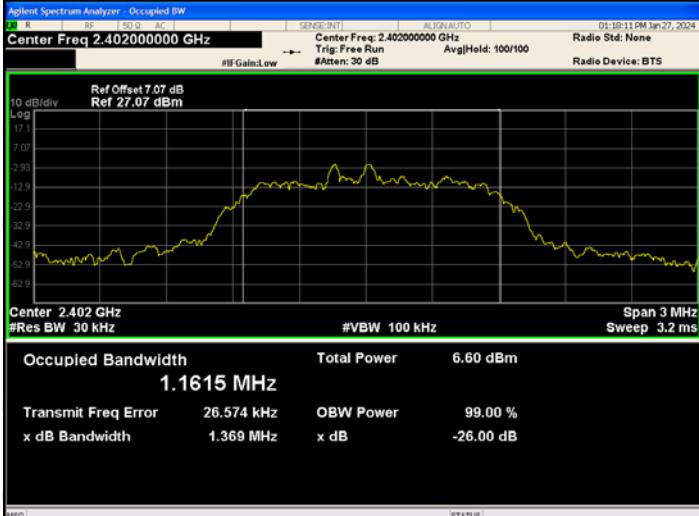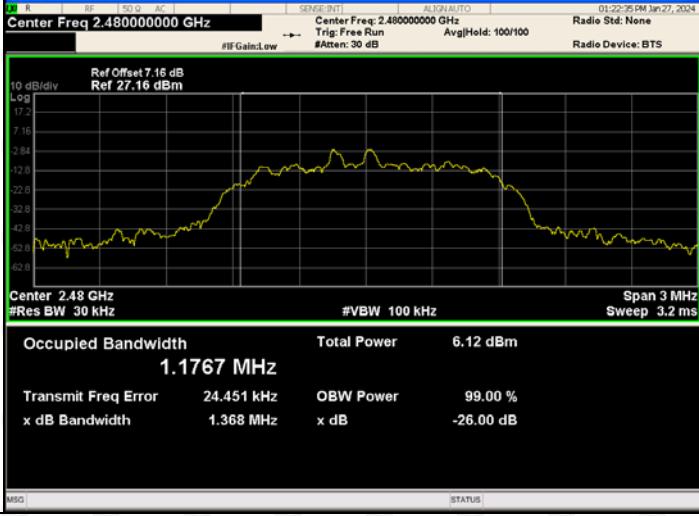GFSK Low channel	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 7.07 dB Ref 27.07 dBm 10 dB/div Log Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1615 MHz Total Power 6.60 dBm Transmit Freq Error 26.574 kHz OBW Power 99.00 % x dB Bandwidth 1.369 MHz x dB -26.00 dB</p>
GFSK Mid channel	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 7.13 dB Ref 27.13 dBm 10 dB/div Log Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1679 MHz Total Power 6.59 dBm Transmit Freq Error 19.250 kHz OBW Power 99.00 % x dB Bandwidth 1.369 MHz x dB -26.00 dB</p>
GFSK High channel	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 7.16 dB Ref 27.16 dBm 10 dB/div Log Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1767 MHz Total Power 6.12 dBm Transmit Freq Error 24.451 kHz OBW Power 99.00 % x dB Bandwidth 1.368 MHz x dB -26.00 dB</p>

## 10. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:


The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **EUT Antenna:**

The antenna is PCB antenna. The best case gain of the antenna is 2.098dBi.

## 11. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

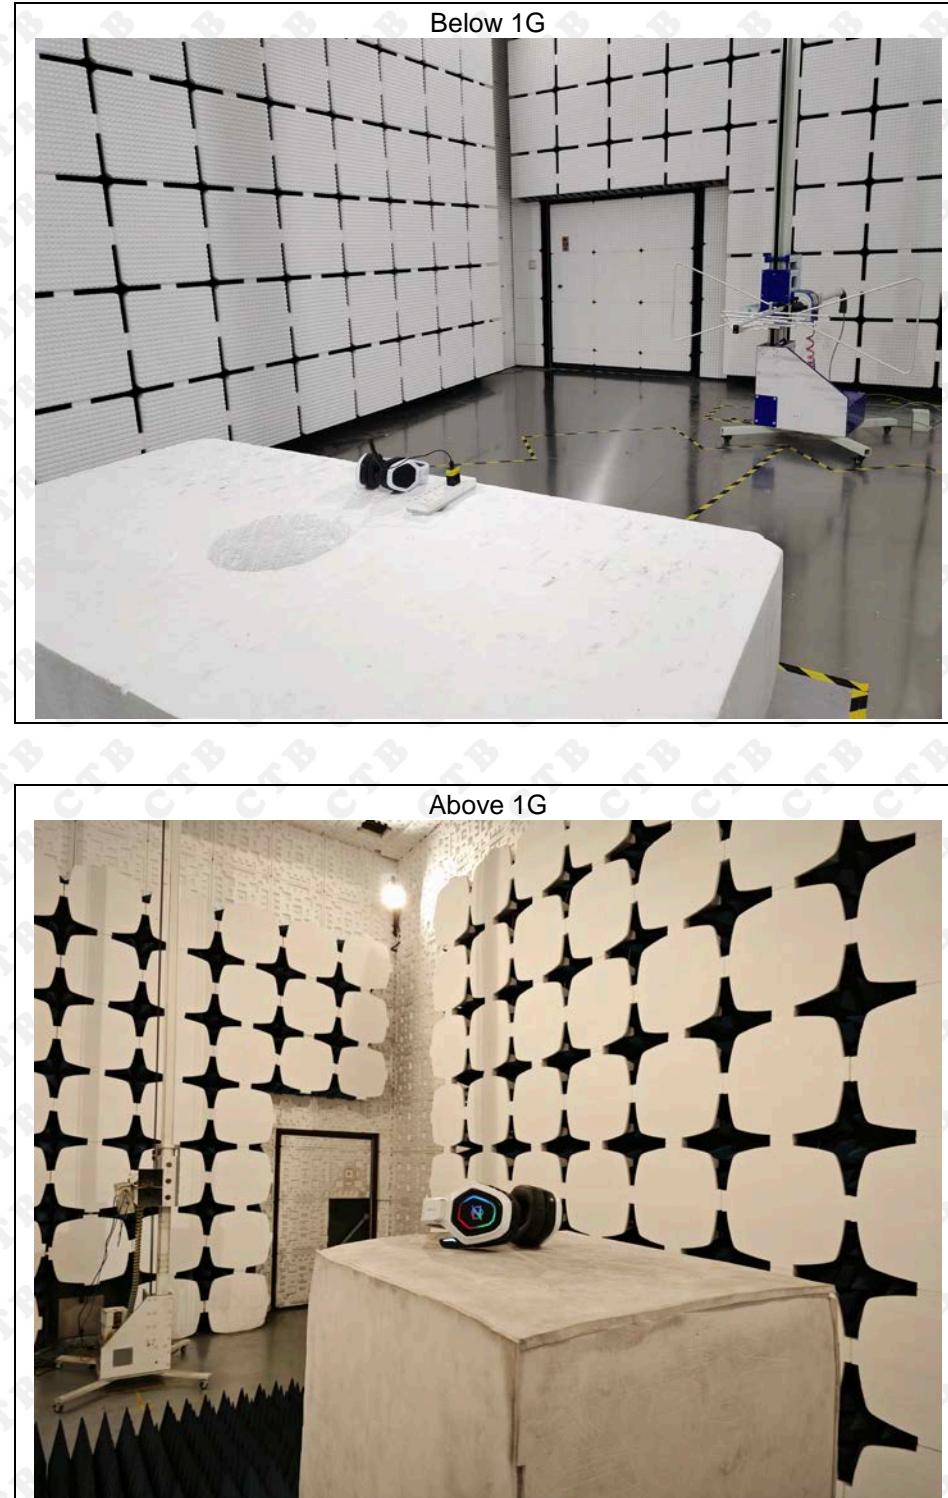

## Conducted emissions



\*\*\*\*\* END OF REPORT \*\*\*\*\*