



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: FOURSTAR GROUP USA INC

Address: 925 GRANT ST., AKRON, OH, 44311-2437, USA

FCC ID: 2BGA762101047YE

Product Name: WALKIE TALKIES

**Standard(s): 47 CFR Part 15, Subpart C(15.235)
ANSI C63.10-2020**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: 2503R37571E-00B

Date Of Issue: 2025/5/27

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China

Tel: +86-769-83085888

www.ccttt.com.cn

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY.....	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 AC LINE CONDUCTED EMISSIONS.....	10
3.1.1 Applicable Standard.....	10
3.1.2 EUT Setup.....	11
3.1.3 EMI Test Receiver Setup	11
3.1.4 Test Procedure	12
3.1.5 Corrected Amplitude & Margin Calculation.....	12
3.2 RADIATED EMISSIONS	13
3.2.1 Applicable Standard.....	13
3.2.2 EUT Setup.....	13
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	14
3.2.4 Test Procedure	14
3.2.5 Corrected Amplitude & Margin Calculation.....	14
3.3 20 DB EMISSION BANDWIDTH	15
3.3.1 Applicable Standard.....	15
3.3.2 EUT Setup.....	15
3.3.3 Test Procedure	16
3.4 ANTENNA REQUIREMENT.....	17
3.4.1 Applicable Standard.....	17
3.4.2 Judgment.....	17
4. Test DATA AND RESULTS	18
4.1 AC LINE CONDUCTED EMISSIONS.....	18
4.2 RADIATED EMISSIONS AND BAND EDGES.....	19
4.3 20 DB EMISSION BANDWIDTH:	29
5. RF EXPOSURE EVALUATION	31
5.1.1 APPLICABLE STANDARD.....	31
5.1.2 PROCEDURE.....	31
5.1.3 MEASUREMENT RESULT	31
6. EUT PHOTOGRAPHS	32

7. TEST SETUP PHOTOGRAPHS33

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2503R37571E-00B	Original Report	2025/5/27

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	WALKIE TALKIES
EUT Model:	62101047YE
Operation Frequency:	49.82~49.90MHz
Maximum Field Strength@3m:	65.48 dB μ V/m
Rated Input Voltage:	DC 1.5V *3AAA from battery
Sample Number:	307Z-1
EUT Received Date:	2025/3/24
EUT Received Status:	Good

Antenna Information Detail ▲ :

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Helix	50	49.82~49.90MHz	Unknown
The Method of §15.203 Compliance: <input checked="" type="checkbox"/> Antenna must be permanently attached to the unit. <input type="checkbox"/> Antenna must use a unique type of connector to attach to the EUT. <input type="checkbox"/> Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

Accessory Information:

No Accessory.

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	No
The engineering mode was provided by manufacturer ▲. The maximum power was configured default setting.	

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Nanfu	Battery*3	LR6	CR20241212

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

1.2.4 Block Diagram of Test Setup

Spurious emissions:

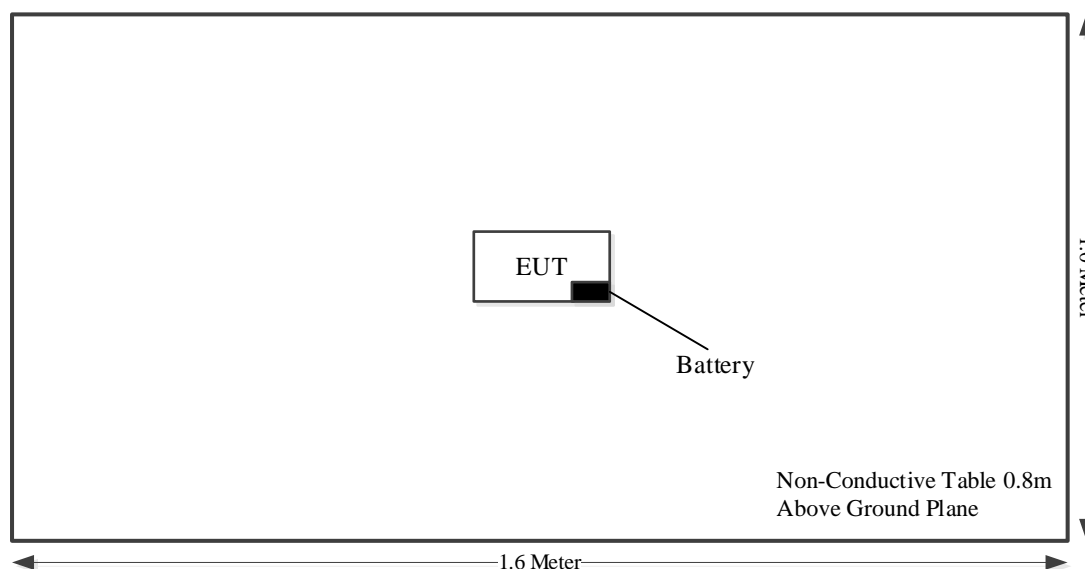

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Not Applicable
§15.235(a)& 15.235(b)&15.209	Radiated Emissions and Band Edges	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant
§1.1307	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

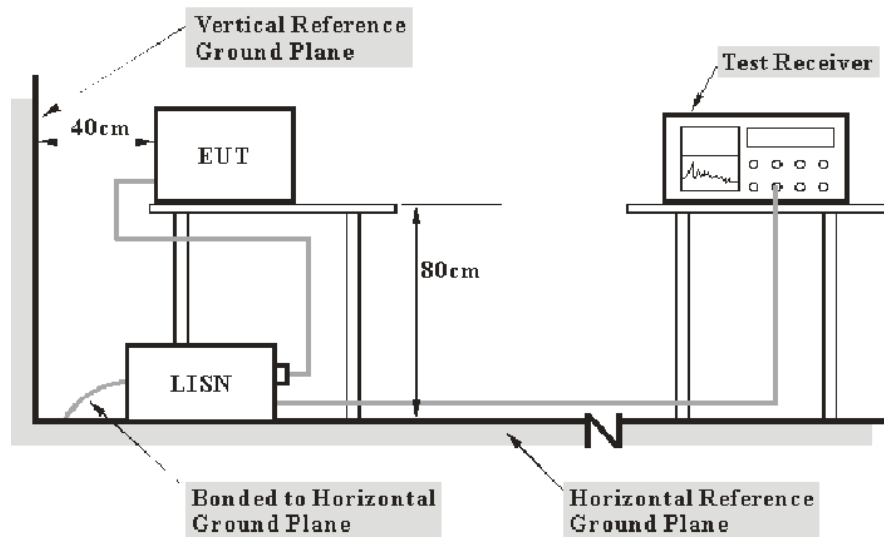

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiated Emissions

3.2.1 Applicable Standard

FCC 15.235(a)


The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

FCC 15.235(b)


The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in §15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in §15.209. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

3.2.2 EUT Setup

9kHz-30MHz:

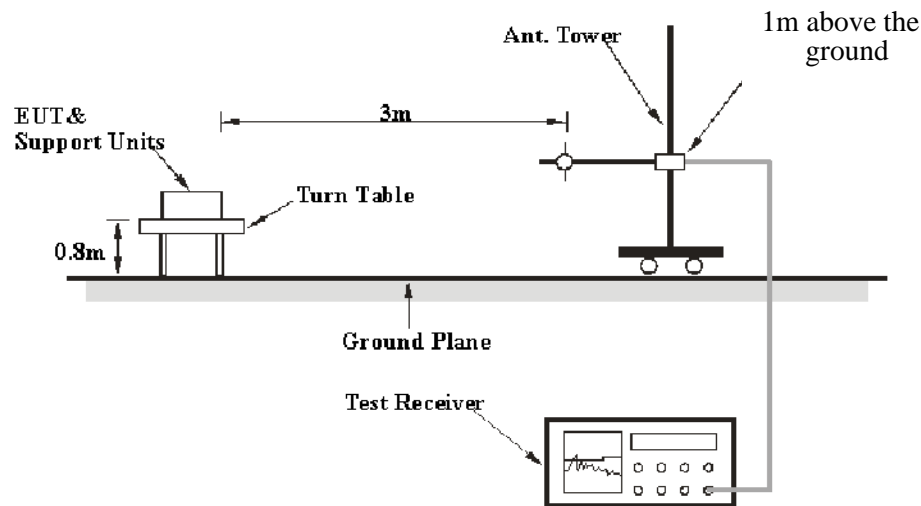

30MHz-1GHz:

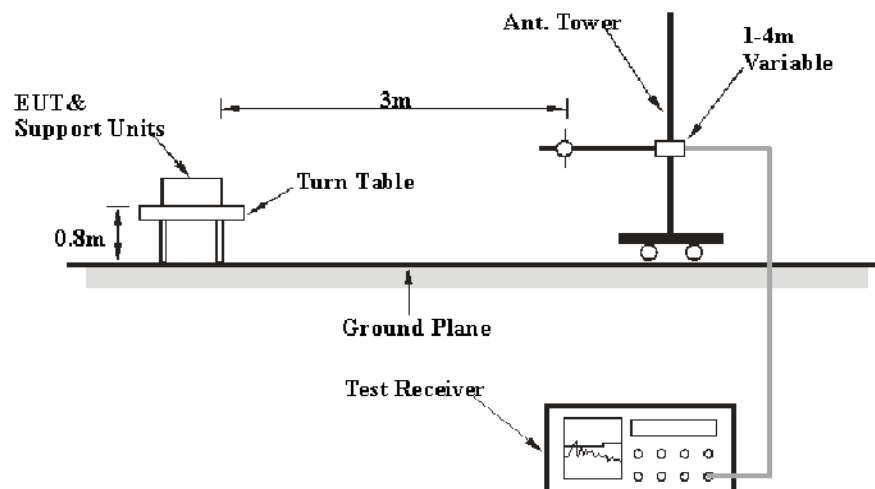

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC Part 15.235(a) & 15.235 (b) limits.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 1000MHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	/	Peak	PK
	/	/	200 Hz	Quasi Peak/ Average	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	/	Peak	PK
	/	/	9 kHz	Quasi Peak/ Average	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	/	Peak	PK
	/	/	120 kHz	Quasi Peak	QP

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9–90 kHz, 110–490 kHz, employing an average detector.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Emission Bandwidth

3.3.1 Applicable Standard

FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

3.3.2 EUT Setup

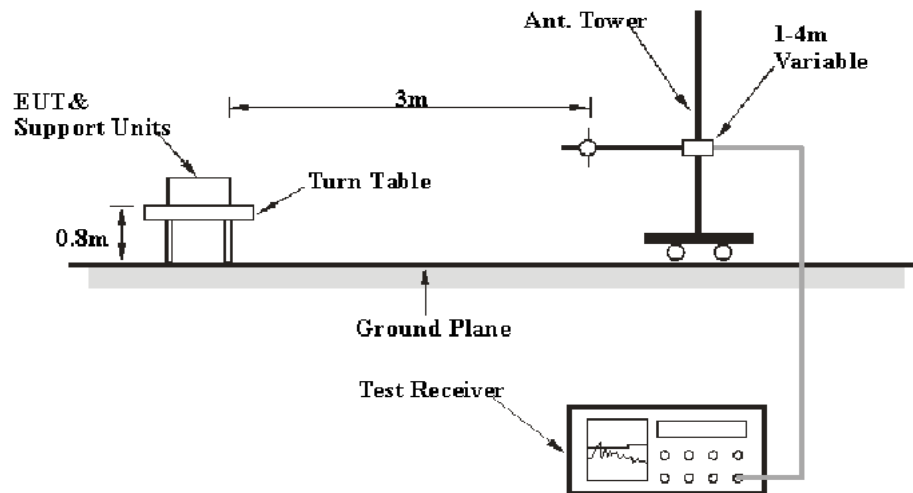

3.3.3 Test Procedure

According to ANSI C63.10-2020 Section 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be at least three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max-hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The dBc bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The dBc bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Antenna Requirement

3.4.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

3.4.2 Judgment

Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Not Applicable, the device was powered by battery only.

4.2 Radiated Emissions and Band Edges

Sample Number:	307Z-1	Test Date:	2025/4/8~2025/5/26
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Roinin Fu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~25.4	Relative Humidity: (%)	54~56	ATM Pressure: (kPa)	100.9~101
----------------------	-----------	---------------------------	-------	---------------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
BACL	Loop Antenna	1313-1A	3110611	2023/12/4	2026/12/3
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0300-01	2025/1/10	2026/1/9
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0500-01	2025/1/10	2026/1/9
R&S	EMI Test Receiver	ESR3	102724	2025/2/14	2026/2/13
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2024/12/3	2025/12/2
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2024/12/3	2025/12/2
XQY	Coaxial Cable	XQY-CMR400UF-NJ-NJ-7M	24056379	2024/6/11	2025/6/10
Sonoma	Amplifier	310N	186165	2024/12/3	2025/12/2
Audix	Test Software	E3	191218 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


Fundamental: 49.86 MHz

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector					
49.86	61.59	PK	H	-16.30	45.29	100.00	55.45
49.86	81.78	PK	V	-16.30	65.48	100.00	37.80

Note:


The test result of peak was less than the limit of average, so just peak value was recorded.

Project No.: 2503R37571E-RF
Tester: Roinin Fu
Condition: RBW:0.3 kHz VBW:1 kHz SWT:0.1 sec
Polarization: Parallel
Note: Transmitting

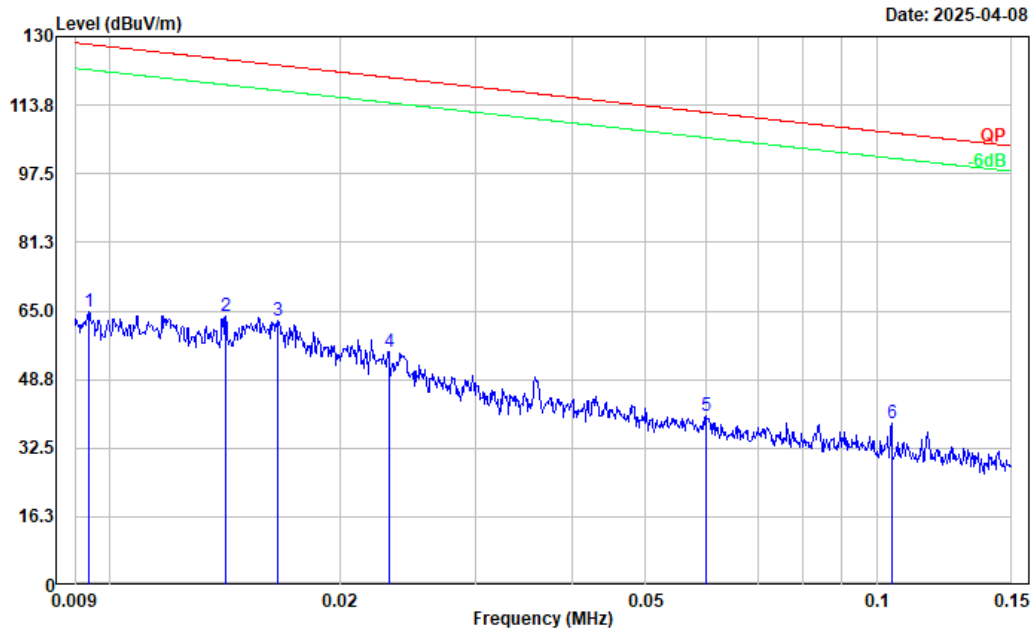


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.009	29.65	35.23	64.88	128.15	63.27	Peak
2	0.014	31.32	32.40	63.72	124.59	60.87	Peak
3	0.017	31.41	31.22	62.63	123.22	60.59	Peak
4	0.023	27.45	28.02	55.47	120.33	64.86	Peak
5	0.060	20.98	19.08	40.06	112.05	71.99	Peak
6	0.105	23.94	14.43	38.37	107.21	68.84	Peak

Project No.: 2503R37571E-RF
Tester: Roinin Fu
Condition: RBW:10 kHz VBW:30 kHz SWT:0.1 sec
Polarization: Parallel
Note: Transmitting

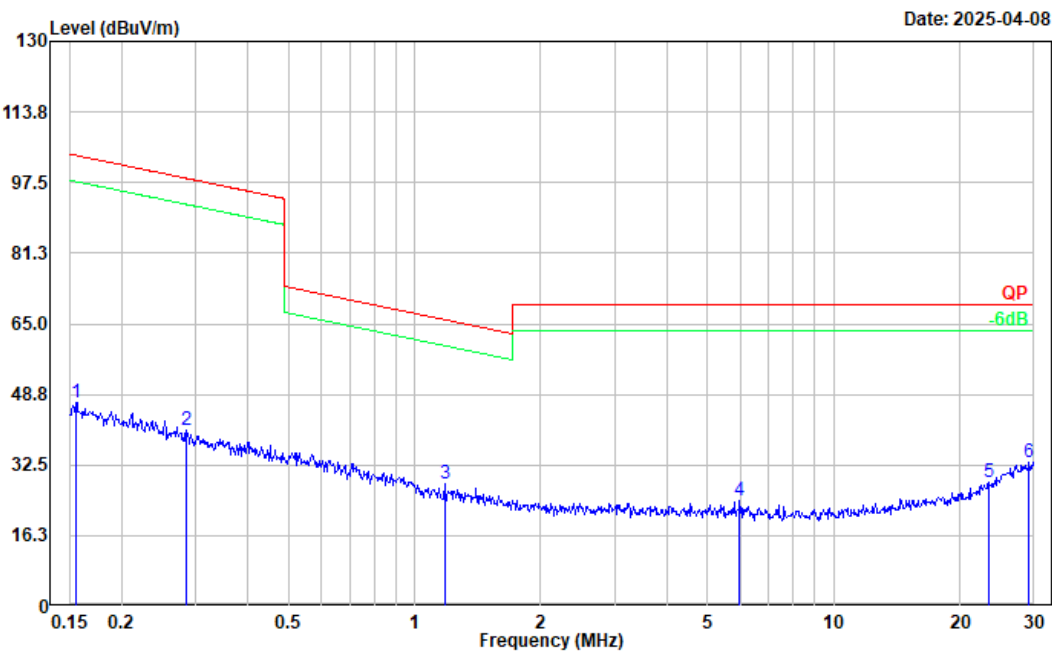


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.156	34.91	12.06	46.97	103.76	56.79	Peak
2	0.286	34.64	6.01	40.65	98.47	57.82	Peak
3	1.178	32.89	-4.83	28.06	66.02	37.96	Peak
4	5.961	33.04	-8.90	24.14	69.54	45.40	Peak
5	23.387	36.62	-8.23	28.39	69.54	41.15	Peak
6	29.216	40.30	-7.20	33.10	69.54	36.44	Peak

Project No.: 2503R37571E-RF
Tester: Roinin Fu
Condition: RBW:0.3 kHz VBW:1 kHz SWT:0.1 sec
Polarization: Perpendicular
Note: Transmitting

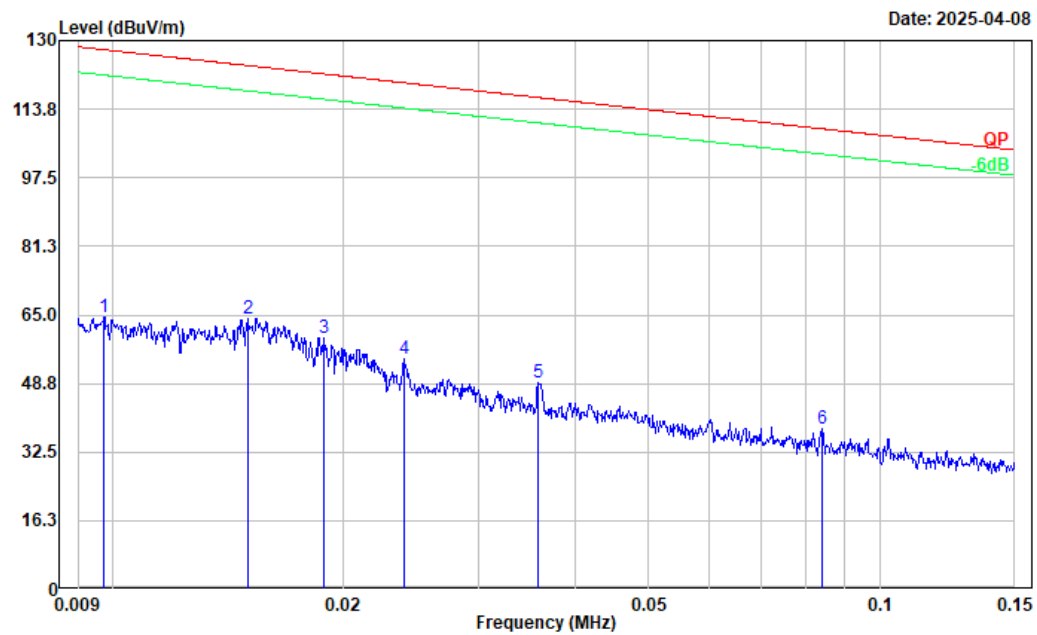


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.010	29.72	34.78	64.50	127.84	63.34	Peak
2	0.015	32.22	32.00	64.22	124.10	59.88	Peak
3	0.019	29.57	30.10	59.67	122.09	62.42	Peak
4	0.024	26.89	27.60	54.49	120.02	65.53	Peak
5	0.036	25.57	23.40	48.97	116.50	67.53	Peak
6	0.084	22.16	15.99	38.15	109.09	70.94	Peak

Project No.: 2503R37571E-RF
Tester: Roinin Fu
Condition: RBW:10 kHz VBW:30 kHz SWT:0.1 sec
Polarization: Perpendicular
Note: Transmitting

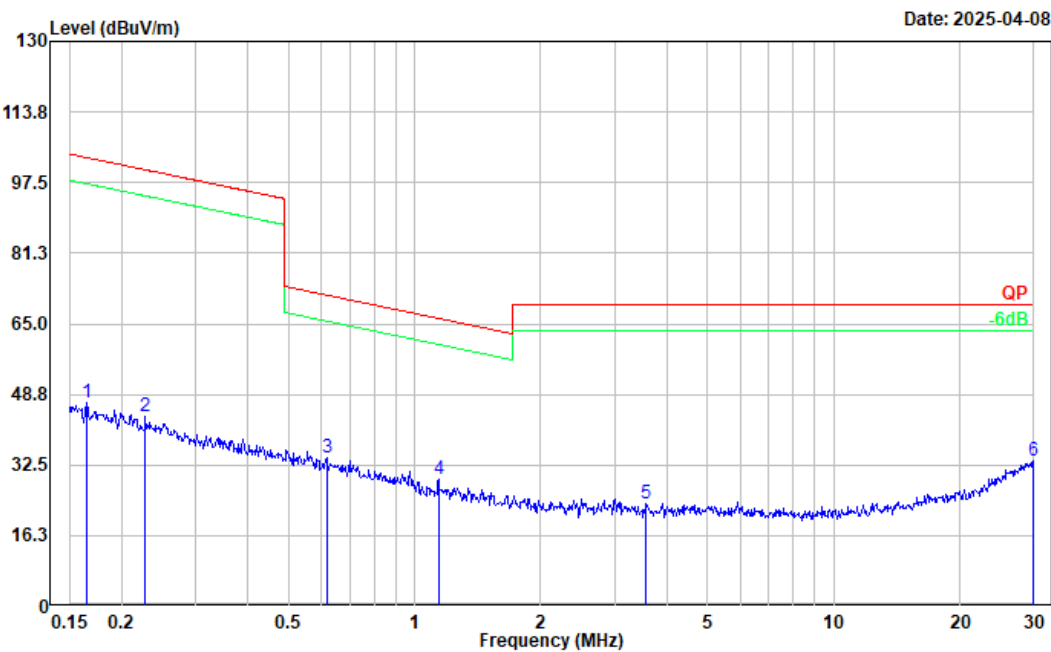


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.165	35.12	11.63	46.75	103.25	56.50	Peak
2	0.228	34.88	8.71	43.59	100.45	56.86	Peak
3	0.617	34.45	-0.39	34.06	71.75	37.69	Peak
4	1.141	33.98	-4.70	29.28	66.30	37.02	Peak
5	3.565	32.27	-8.62	23.65	69.54	45.89	Peak
6	29.841	40.39	-7.09	33.30	69.54	36.24	Peak

Project No.: 2503R37571E-RF
 Tester: Roinin Fu
 Condition: RBW:0.3 kHz VBW:1 kHz SWT:0.1 sec
 Polarization: Ground-parallel
 Note: Transmitting

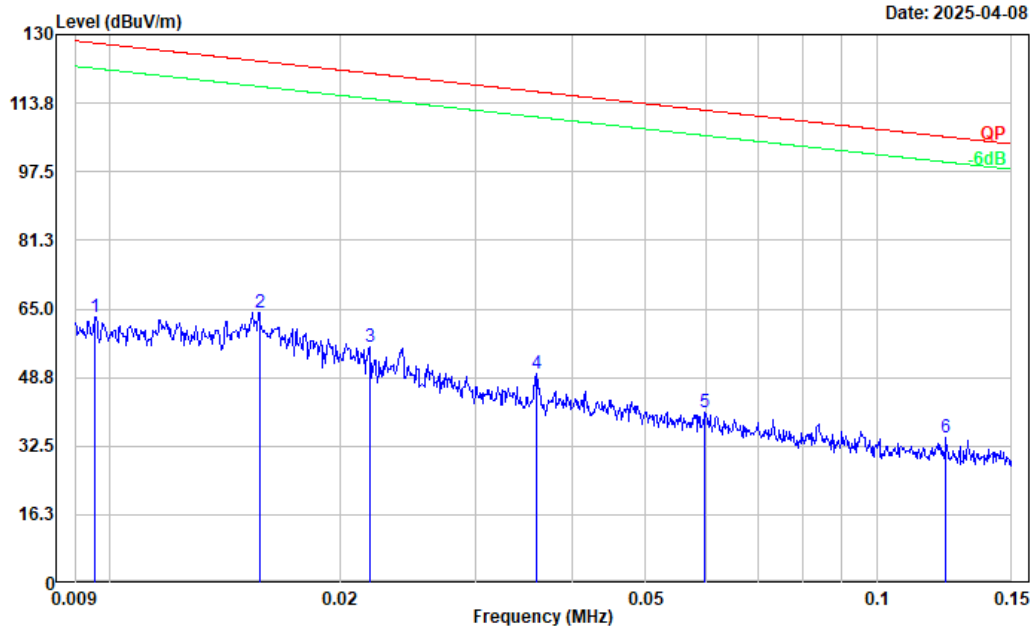


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.010	28.17	34.99	63.16	127.98	64.82	Peak
2	0.016	32.59	31.66	64.25	123.71	59.46	Peak
3	0.022	27.21	28.64	55.85	120.82	64.97	Peak
4	0.036	26.18	23.37	49.55	116.47	66.92	Peak
5	0.060	21.50	19.10	40.60	112.07	71.47	Peak
6	0.123	21.06	13.57	34.63	105.79	71.16	Peak

Project No.: 2503R37571E-RF
Tester: Roinin Fu
Condition: RBW:10 kHz VBW:30 kHz SWT:0.1 sec
Polarization: Ground-parallel
Note: Transmitting

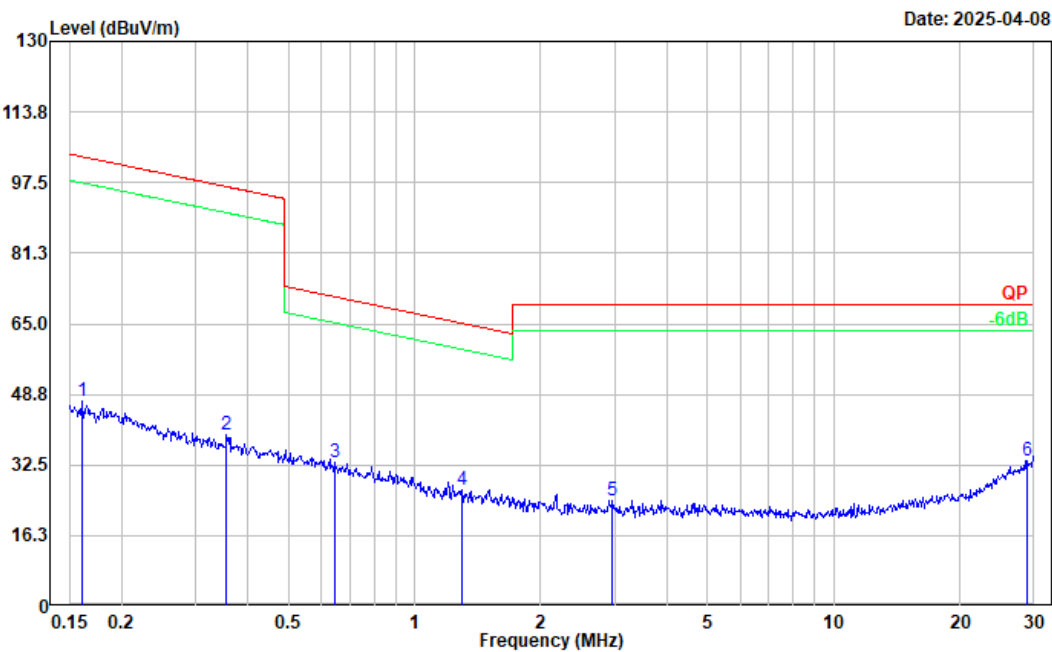


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.161	35.24	11.83	47.07	103.48	56.41	Peak
2	0.356	35.16	4.14	39.30	96.58	57.28	Peak
3	0.644	33.89	-0.70	33.19	71.38	38.19	Peak
4	1.296	32.01	-5.25	26.76	65.17	38.41	Peak
5	2.962	32.76	-8.28	24.48	69.54	45.06	Peak
6	28.908	40.83	-7.24	33.59	69.54	35.95	Peak

Project No.: 2503R37571E-RF
Tester: Roinin Fu
Condition: RBW:100 kHz VBW:300 kHz SWT:0.1 sec
Polarization: horizontal
Note: Transmitting

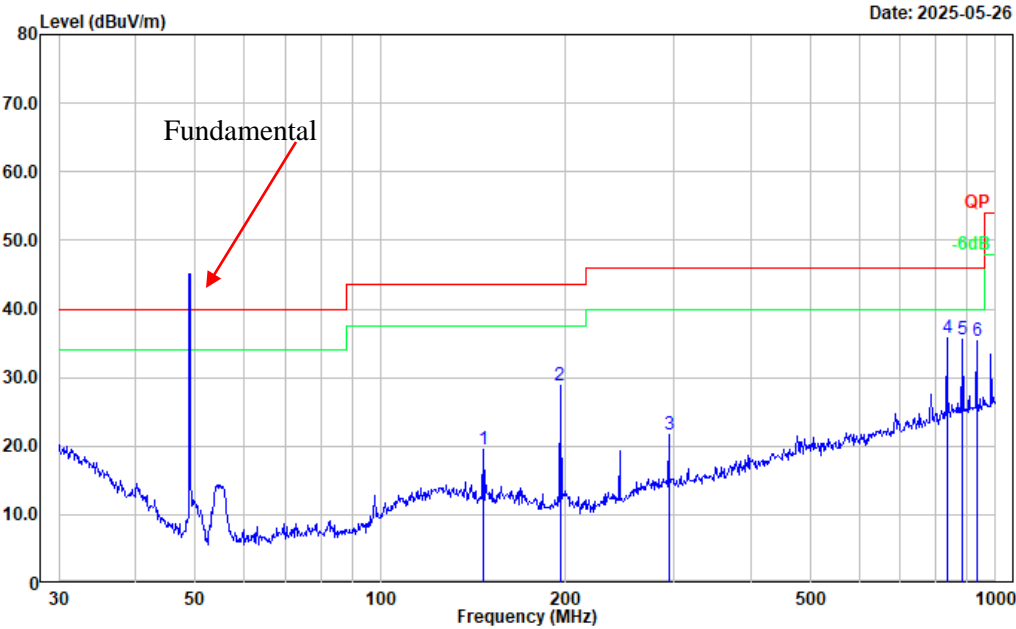

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	146.888	31.71	-12.15	19.56	43.50	23.94	Peak
2	195.822	42.09	-13.29	28.80	43.50	14.70	Peak
3	294.114	32.24	-10.54	21.70	46.00	24.30	Peak
4	833.317	36.84	-1.06	35.78	46.00	10.22	Peak
5	884.503	36.07	-0.53	35.54	46.00	10.46	Peak
6	932.272	34.87	0.42	35.29	46.00	10.71	Peak


Project No.: 2503R37571E-RF
Tester: Roinin Fu
Condition: RBW:100 kHz VBW:300 kHz SWT:0.1 sec
Polarization: vertical
Note: Transmitting

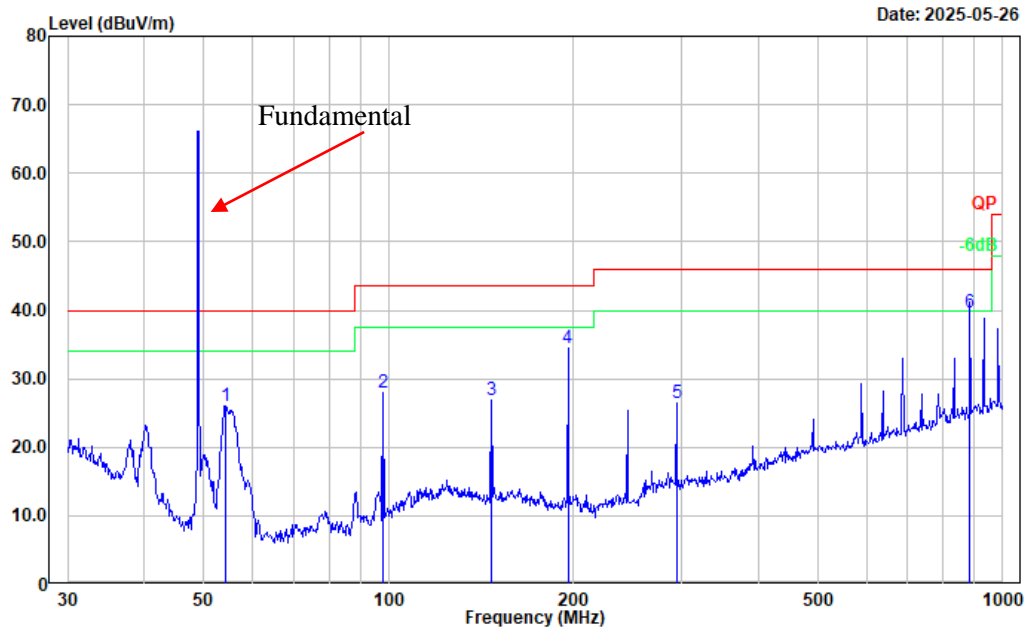


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	54.261	43.71	-17.67	26.04	40.00	13.96	Peak
2	97.798	43.21	-15.14	28.07	43.50	15.43	Peak
3	146.888	39.14	-12.15	26.99	43.50	16.51	Peak
4	195.822	47.81	-13.29	34.52	43.50	8.98	Peak
5	294.114	36.98	-10.54	26.44	46.00	19.56	Peak
6	884.503	40.12	-0.53	39.59	46.00	6.41	QP

Band Edge

Left

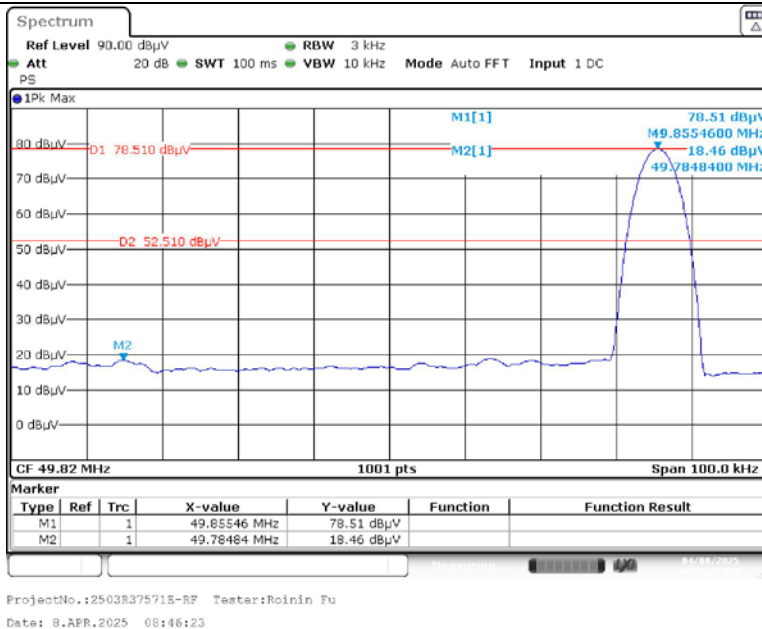

Right

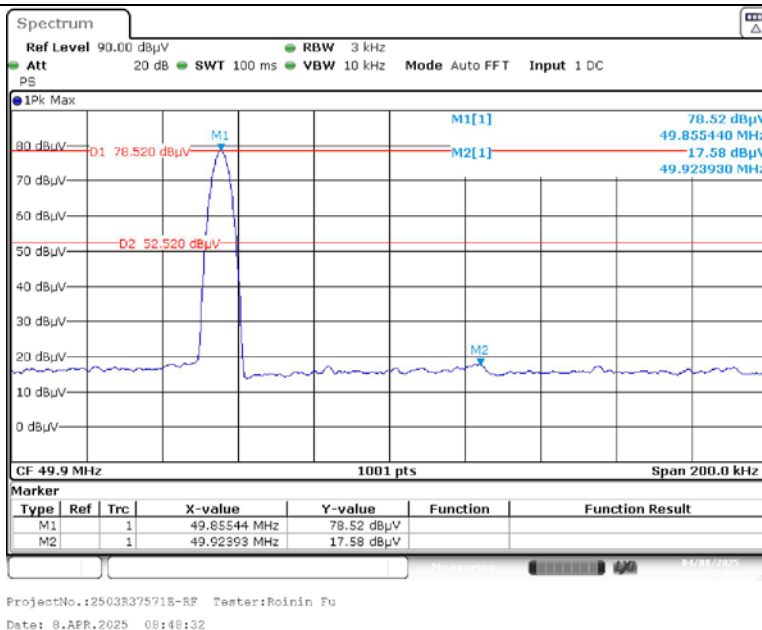

4.3 20 dB Emission Bandwidth:

Sample Number:	307Z-1	Test Date:	2025/5/27
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Roinin Fu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100.8
----------------------	------	---------------------------	----	---------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
R&S	EMI Test Receiver	ESR3	102724	2025/2/14	2026/2/13
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2024/12/3	2025/12/2
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2024/12/3	2025/12/2
XQY	Coaxial Cable	XQY-CMR400UF-NJ-NJ- 7M	24056379	2024/6/11	2025/6/10
Sonoma	Amplifier	310N	186165	2024/12/3	2025/12/2

** **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (MHz)	FL (MHz)	FH (MHz)	20dB Bandwidth (kHz)	Permitted Frequency Range (MHz)
49.86	49.852128	49.855365	3.237	49.82-49.90

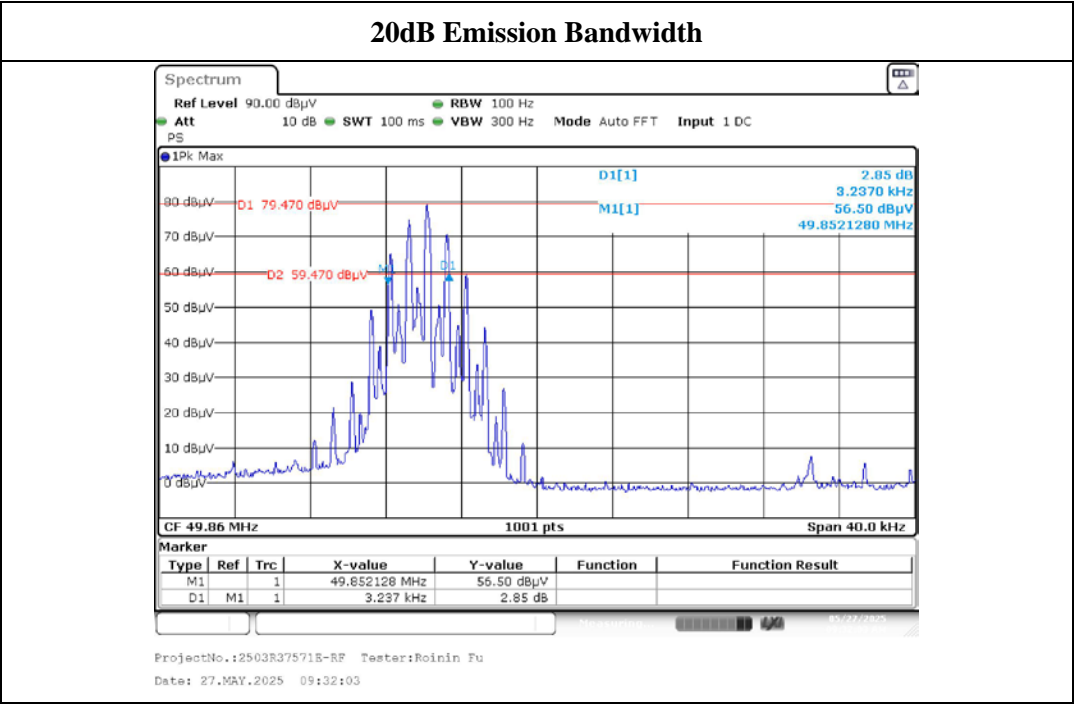

5. RF EXPOSURE EVALUATION

5.1.1 Applicable Standard

FCC §1.1307(b)(3)(i)(A)

a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

5.1.2 Procedure

According to 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.2- 1-mW Test Exemption:

Per §1.1307(b)(3)(i)(A), a single RF source is *exempt RF device* (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

5.1.3 Measurement Result

Frequency (MHz)	Maximum EIRP (dBm)	Maximum ERP		1-mW Test Exemption
		dBm	mW	
49.86	-29.72	-31.87	0.00065	Compliant

Note:

1. Chose the maximum power to do exemption analysis.
2. This device maximum E-Field level is 65.48 dB μ V/m at 3m, so the EIRP power is -29.72dBm.
3. Pout EIRP(dBm)=Field Strength of Fundamental(dBuV/m)-95.2, for d = 3 m
4. ERP(dBm) = EIRP(dBm)-2.15

Result: Compliant. RF Exposure is exemption.

6. EUT PHOTOGRAPHS

Please refer to the attachment 2503R37571E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2503R37571E-RF-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2503R37571E-00B-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====