



11.8. APPENDIX H: BAND EDGE(HOPPING)

Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
1-DH5	2402	Ant1	Hopping	-47.53	-20	Pass
	2480			-47.08	-20	Pass
2-DH5	2402	Ant1	Hopping	-50.53	-20	Pass
	2480			-50.44	-20	Pass
3-DH5	2402	Ant1	Hopping	-50.29	-20	Pass
	2480			-48.75	-20	Pass

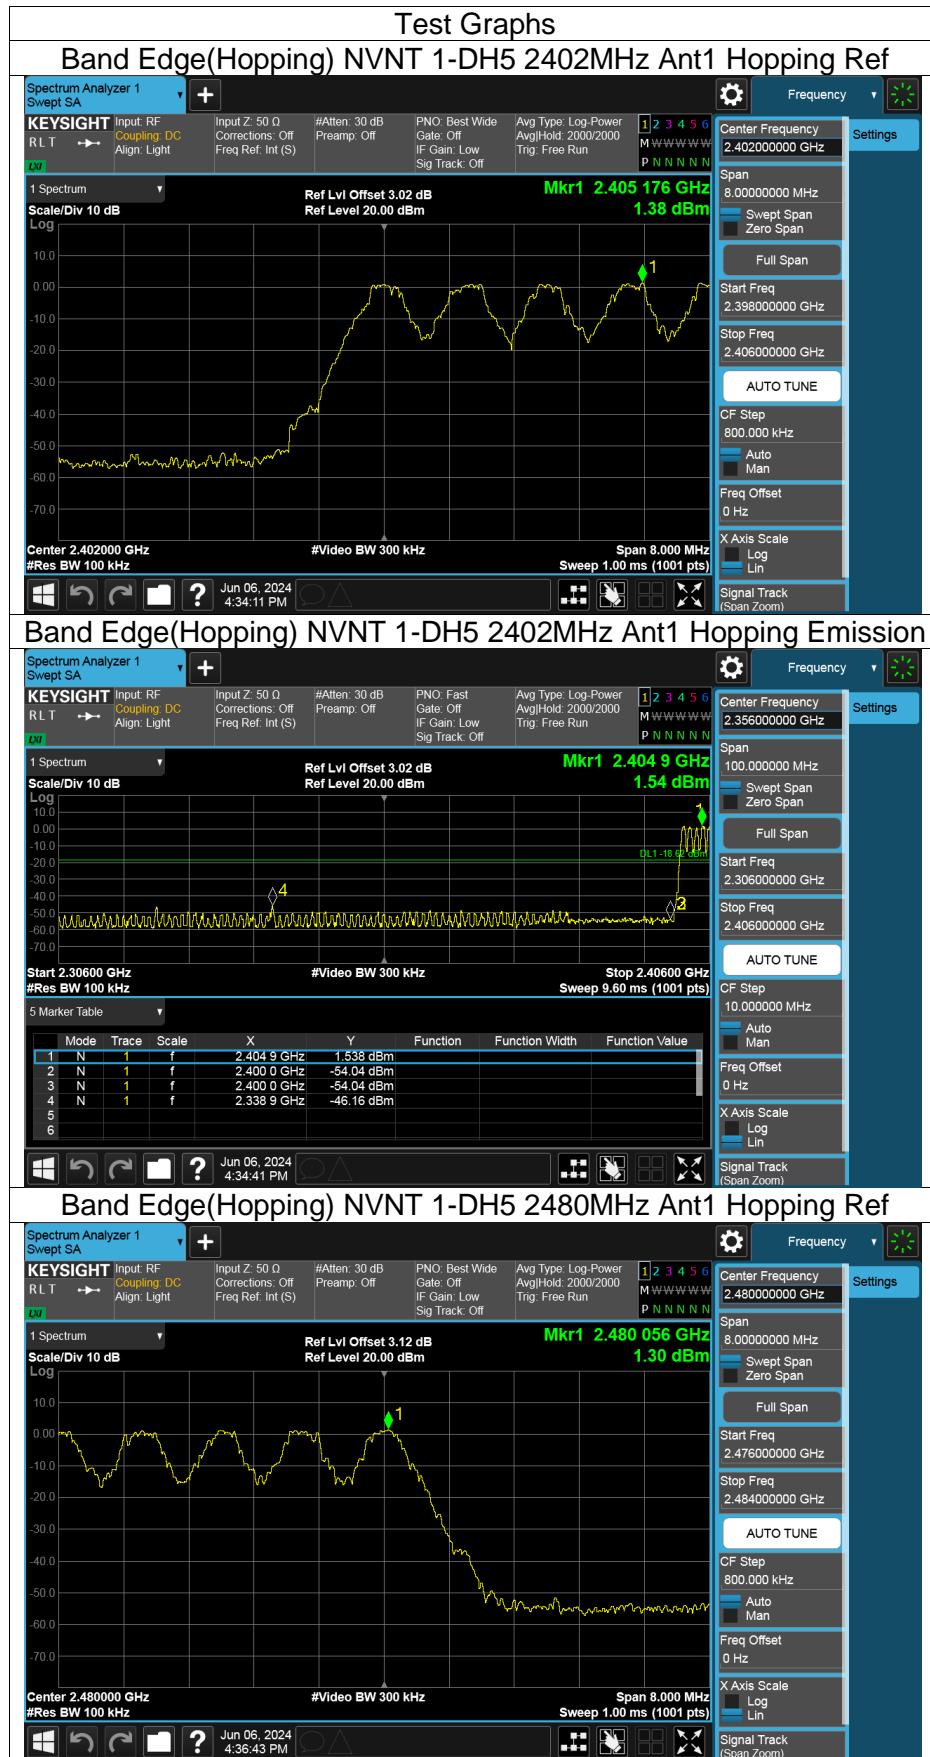


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

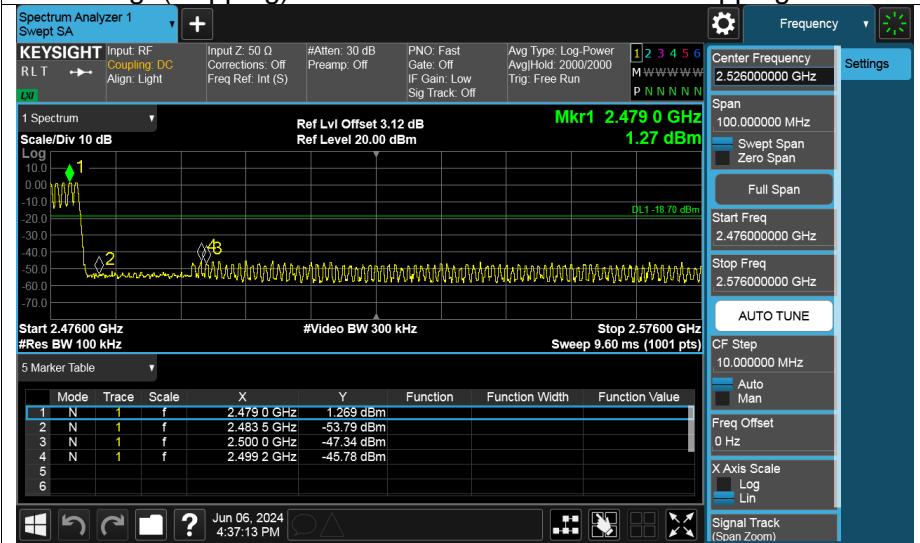



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

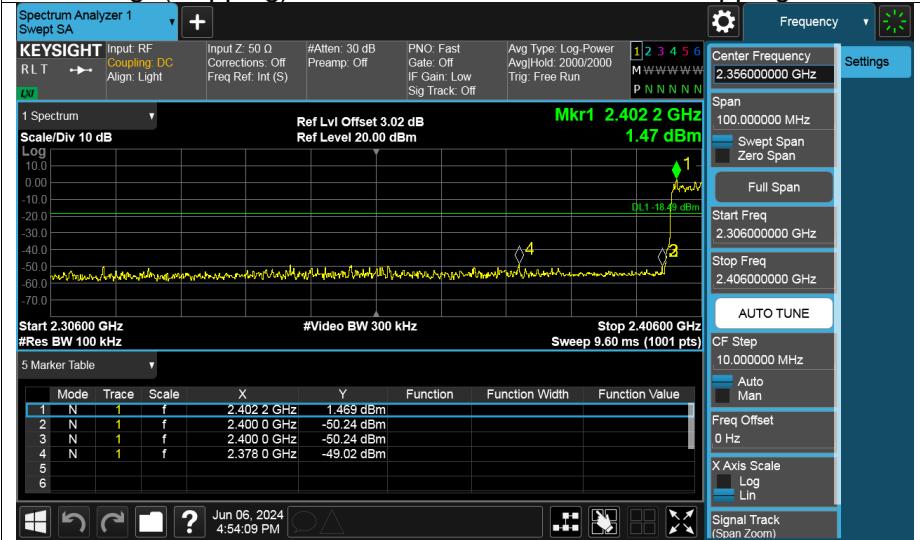

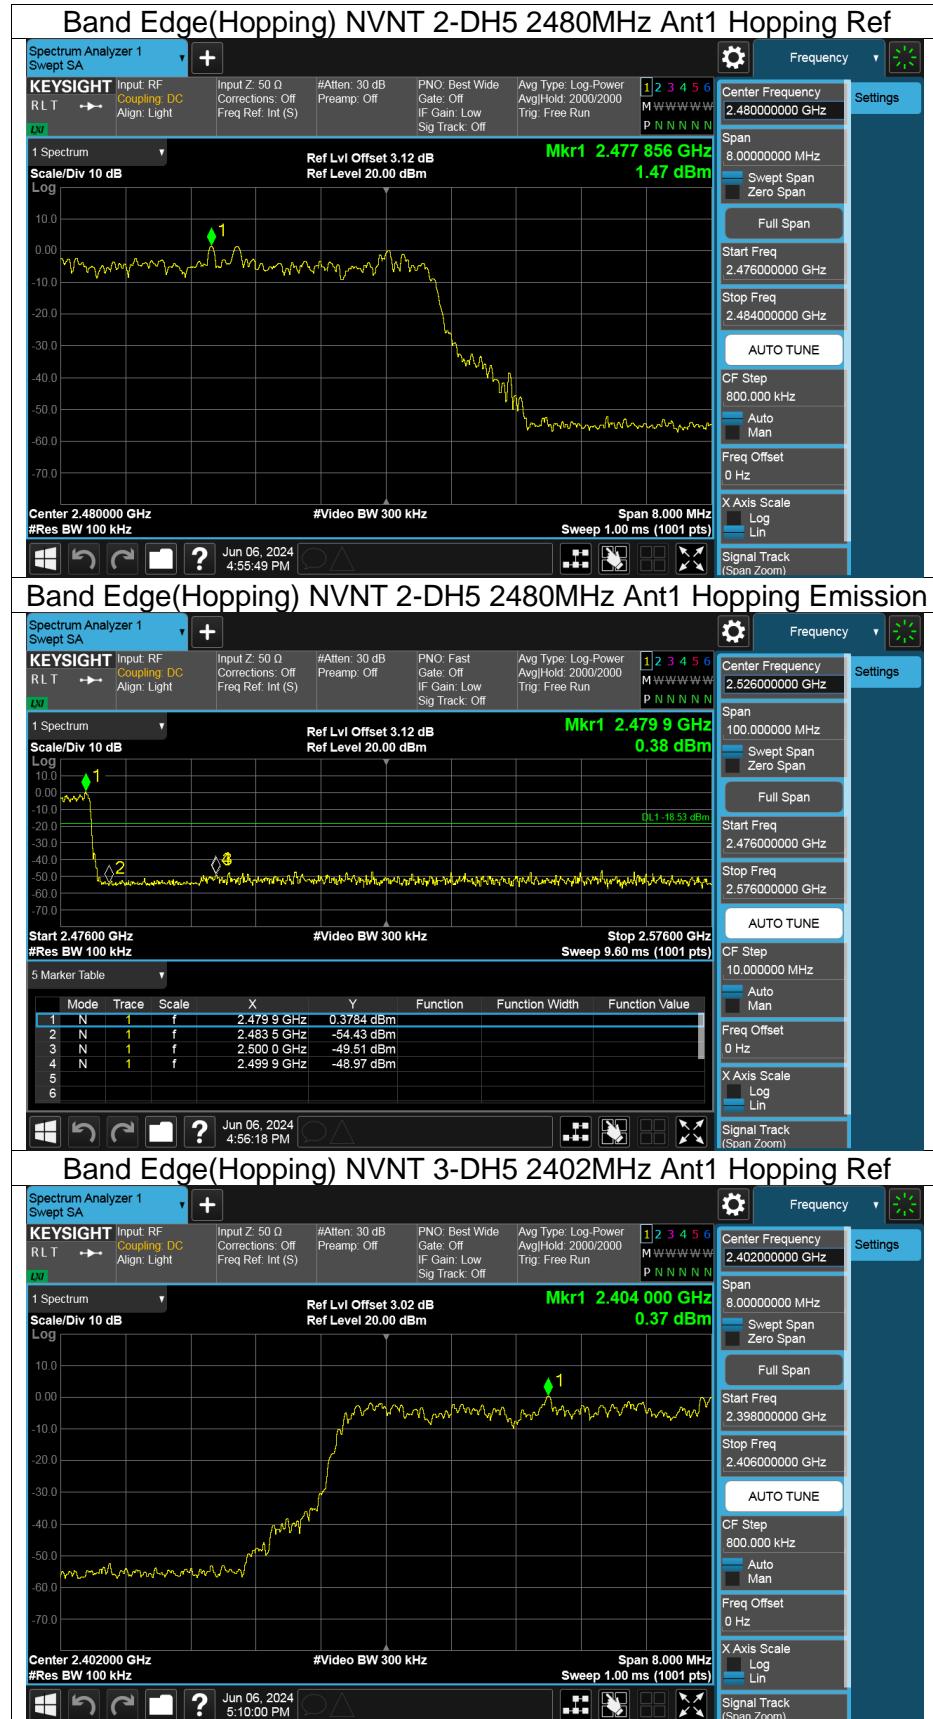


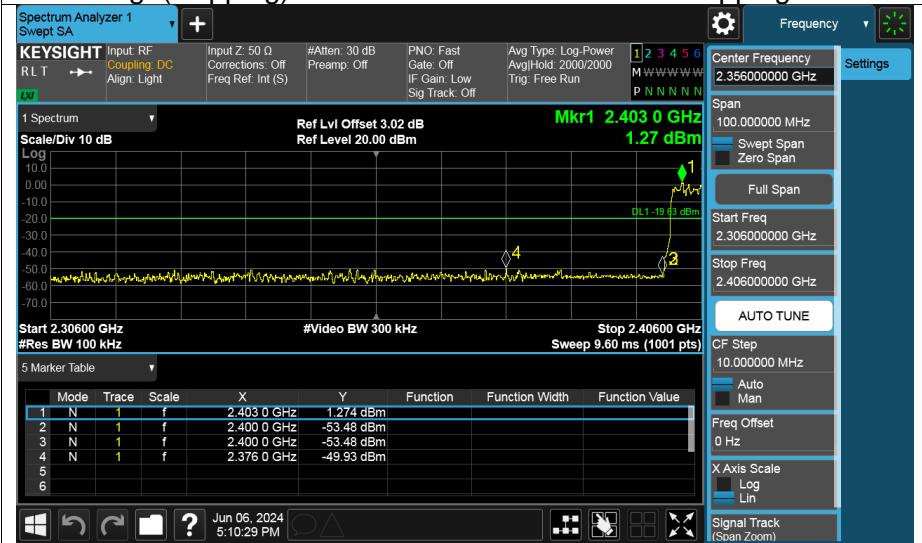Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

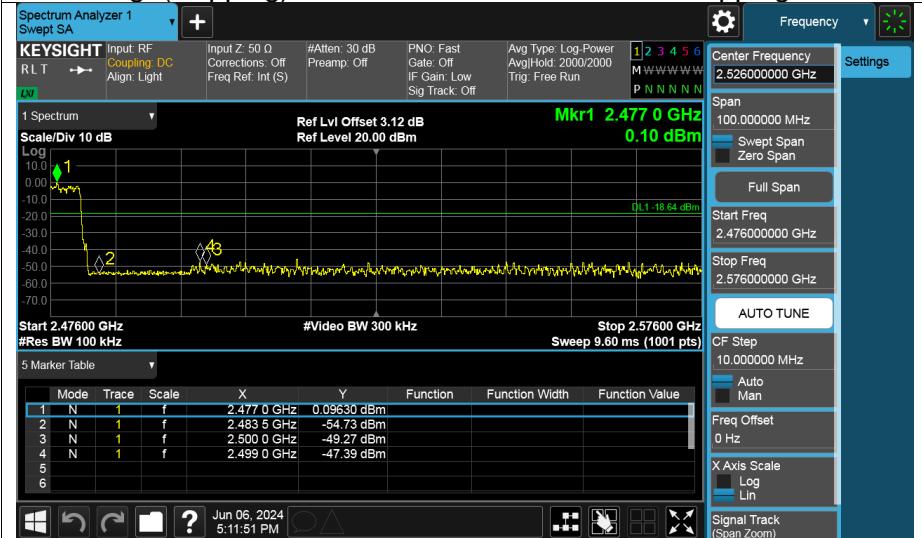Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref


Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission


11.9. APPENDIX I: CONDUCTED RF SPURIOUS EMISSION

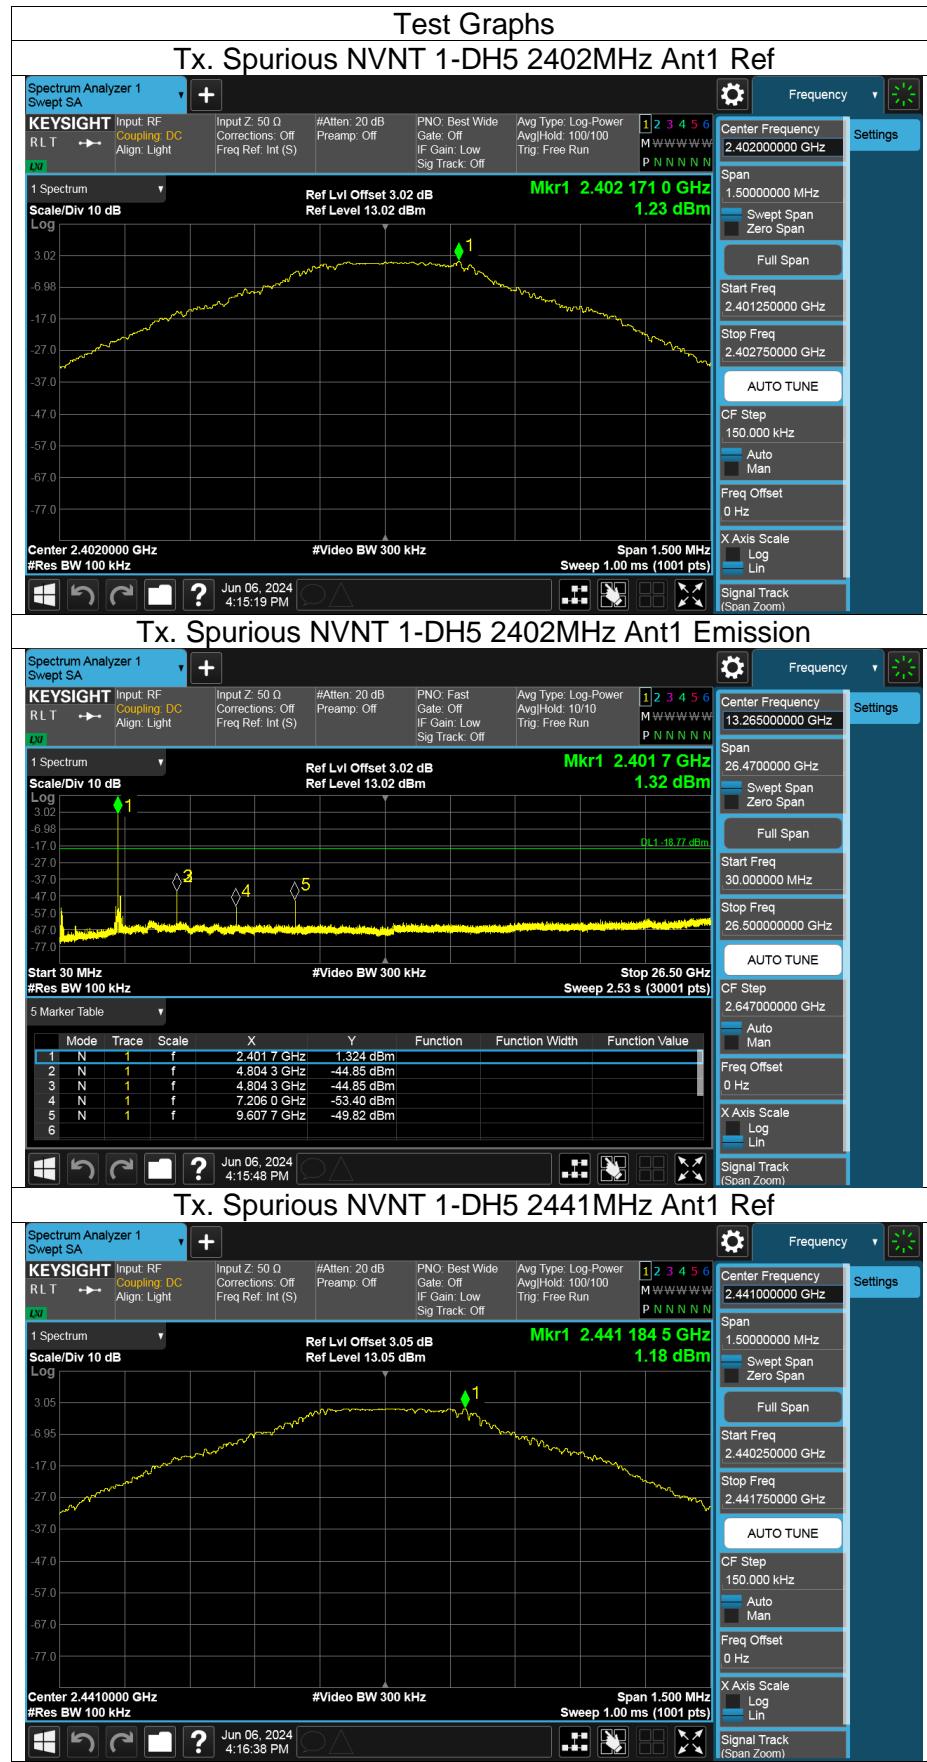
Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
1-DH5	2402	Ant1	-46.08	-20	Pass
	2441		-45.01	-20	Pass
	2480		-44.16	-20	Pass
2-DH5	2402	Ant1	-45.25	-20	Pass
	2441		-46.74	-20	Pass
	2480		-44.95	-20	Pass
3-DH5	2402	Ant1	-43.74	-20	Pass
	2441		-48.01	-20	Pass
	2480		-47.36	-20	Pass





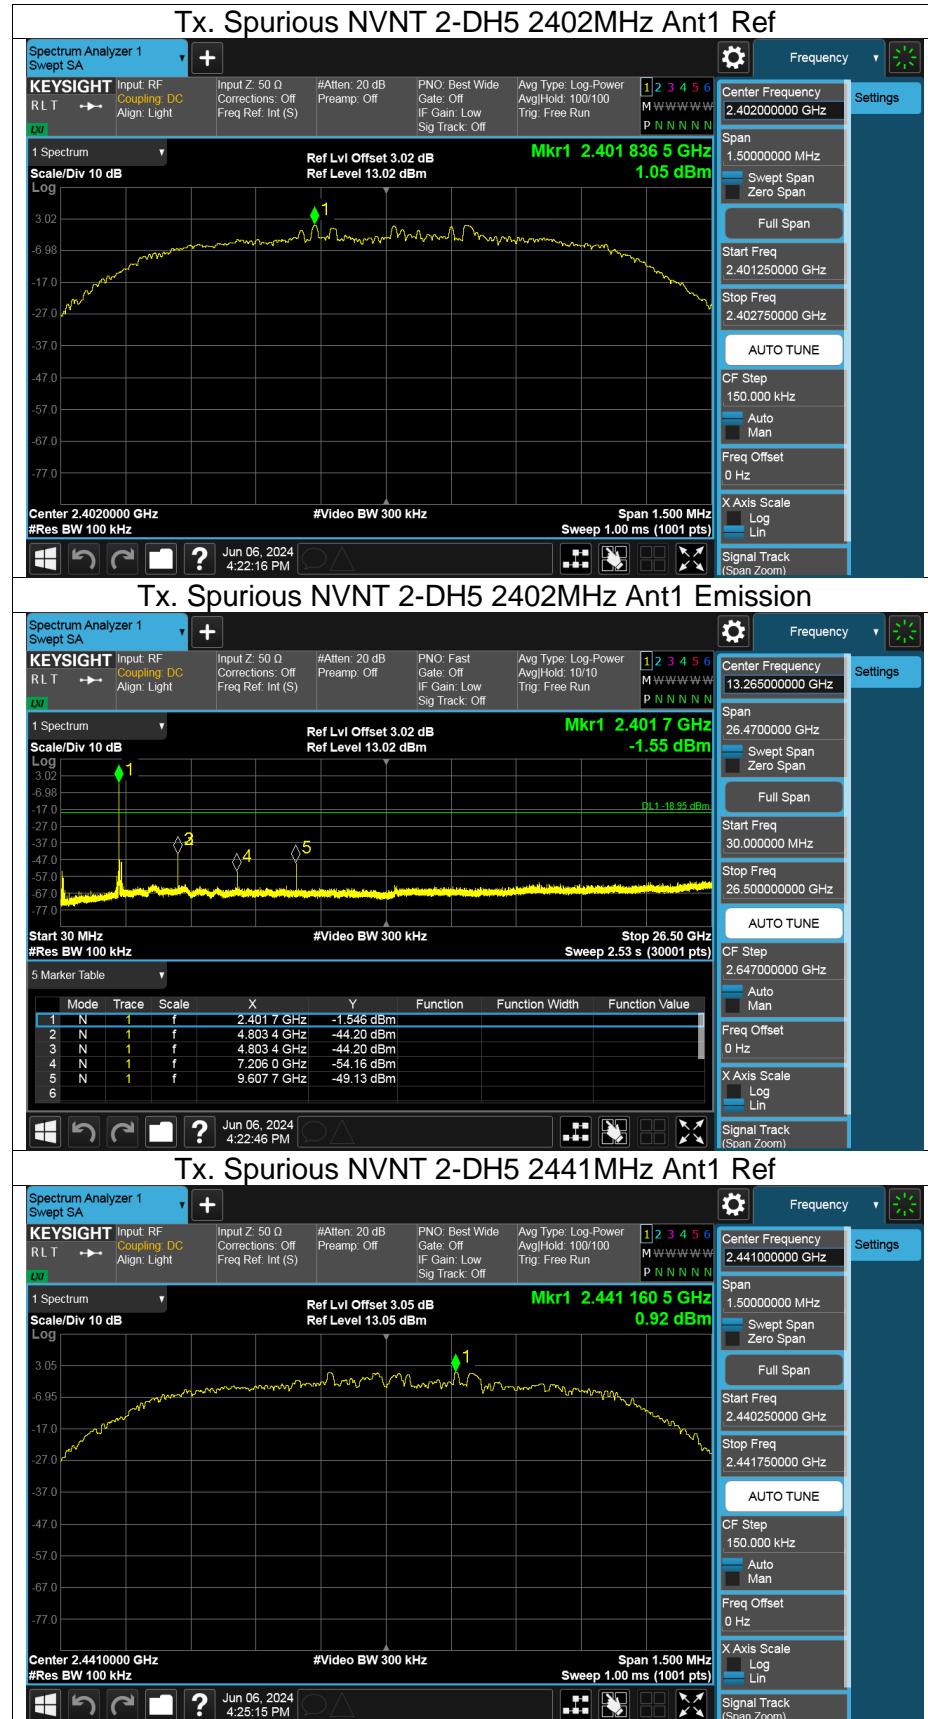



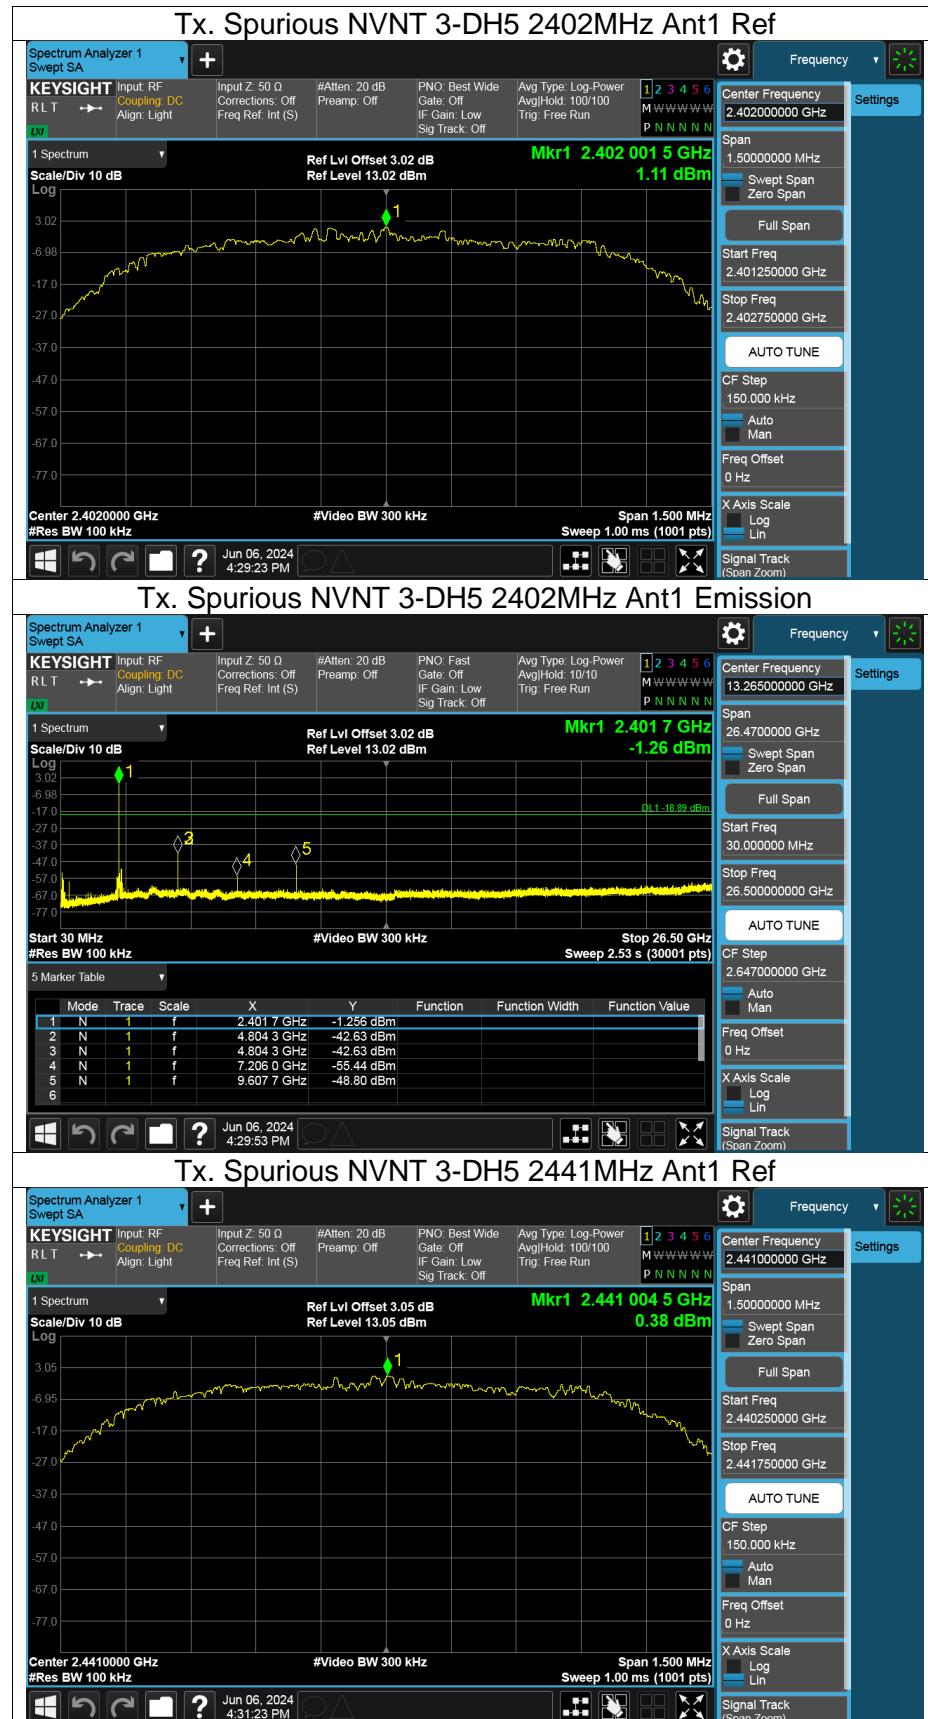



11.10. APPENDIX J: DUTY CYCLE

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
1-DH5	2.88	3.75	0.7680	76.80	1.15	0.35	1
2-DH5	2.89	3.75	0.7707	77.07	1.13	0.35	1
3-DH5	2.89	3.75	0.7707	77.07	1.13	0.35	1


Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

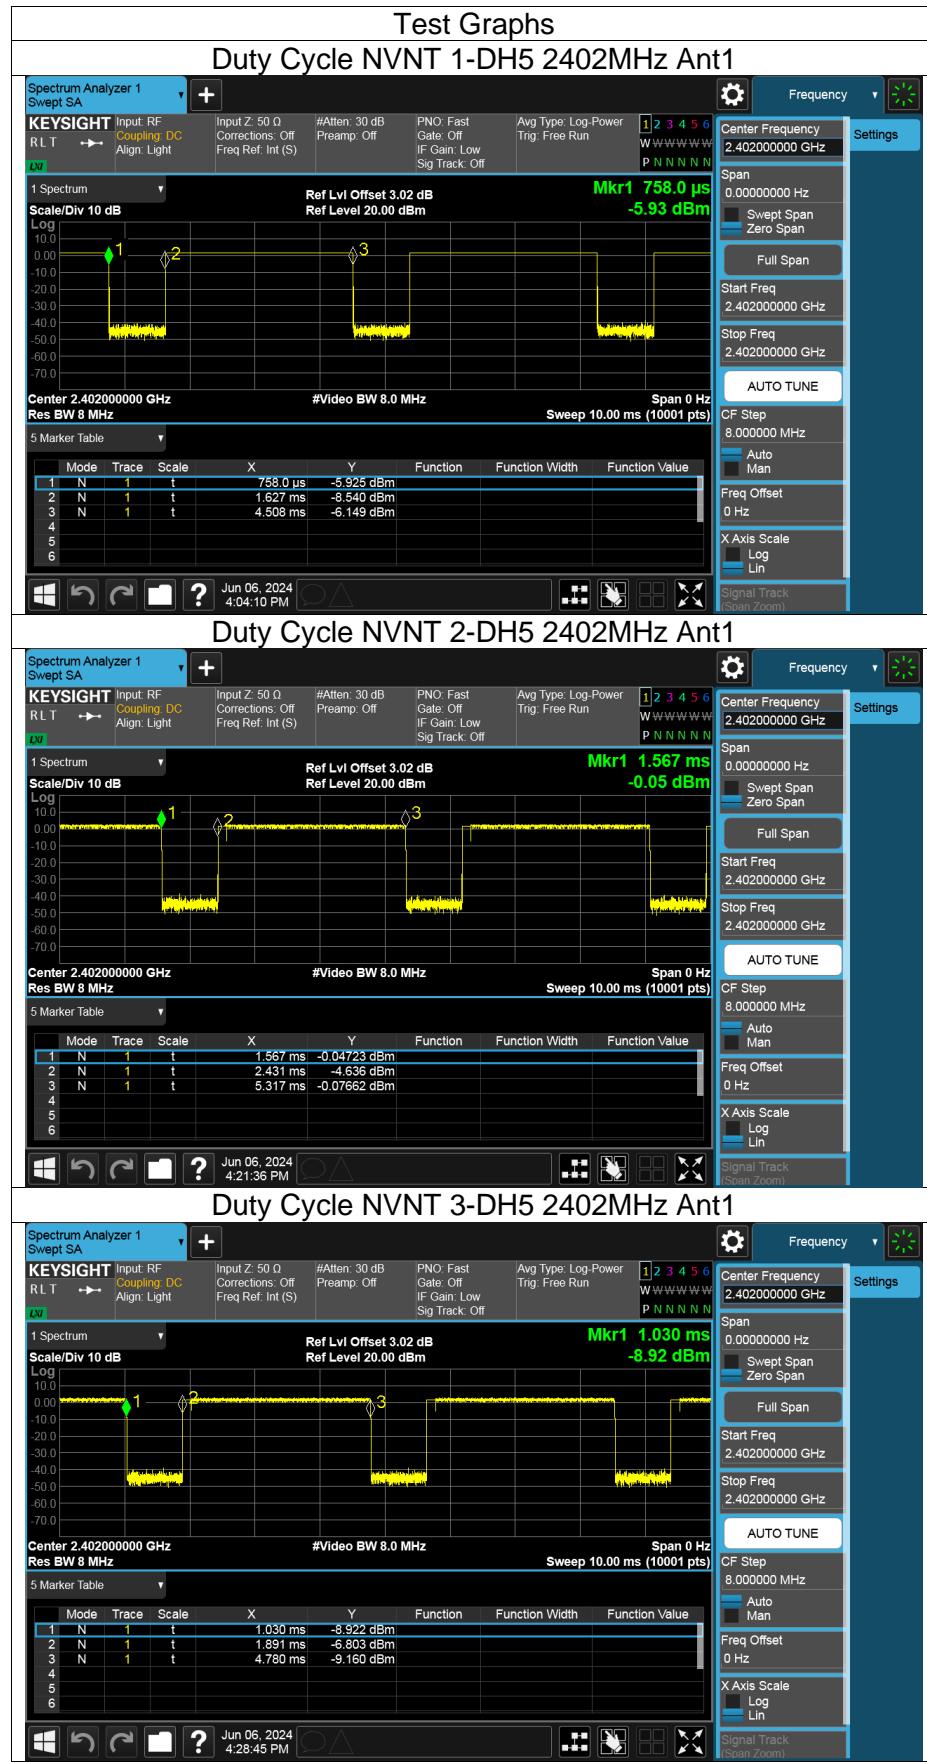

END OF REPORT