



Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

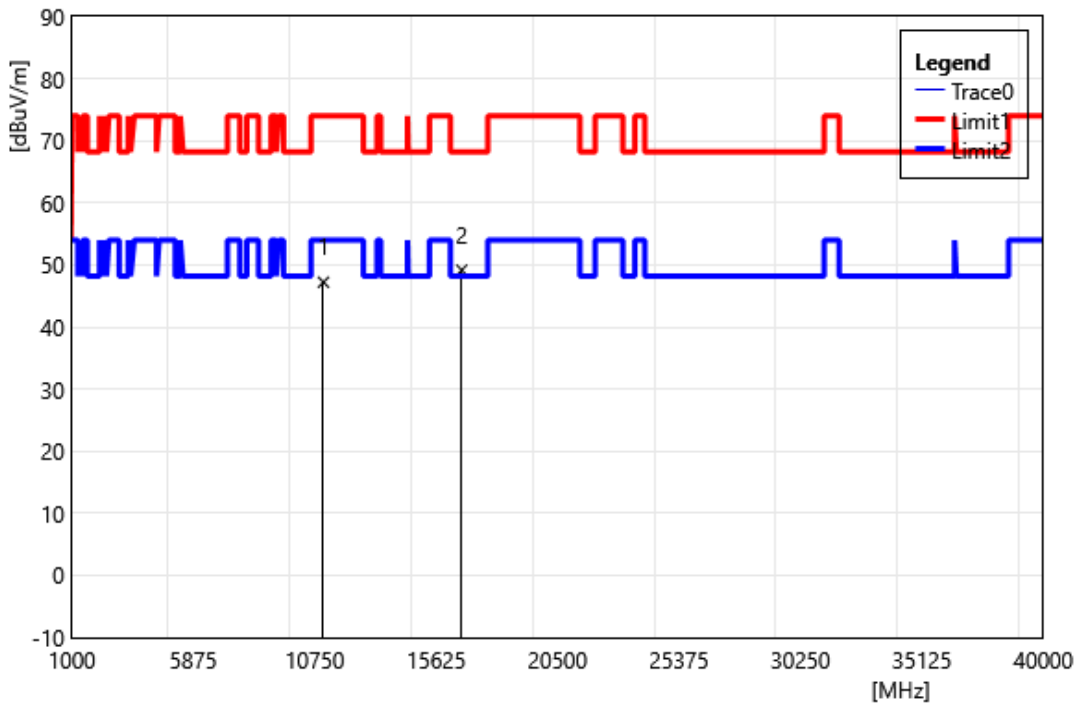


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	35.15	12.07	47.23	74.00	-26.78	PEAK
2	16650.00	34.08	15.08	49.16	68.20	-19.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

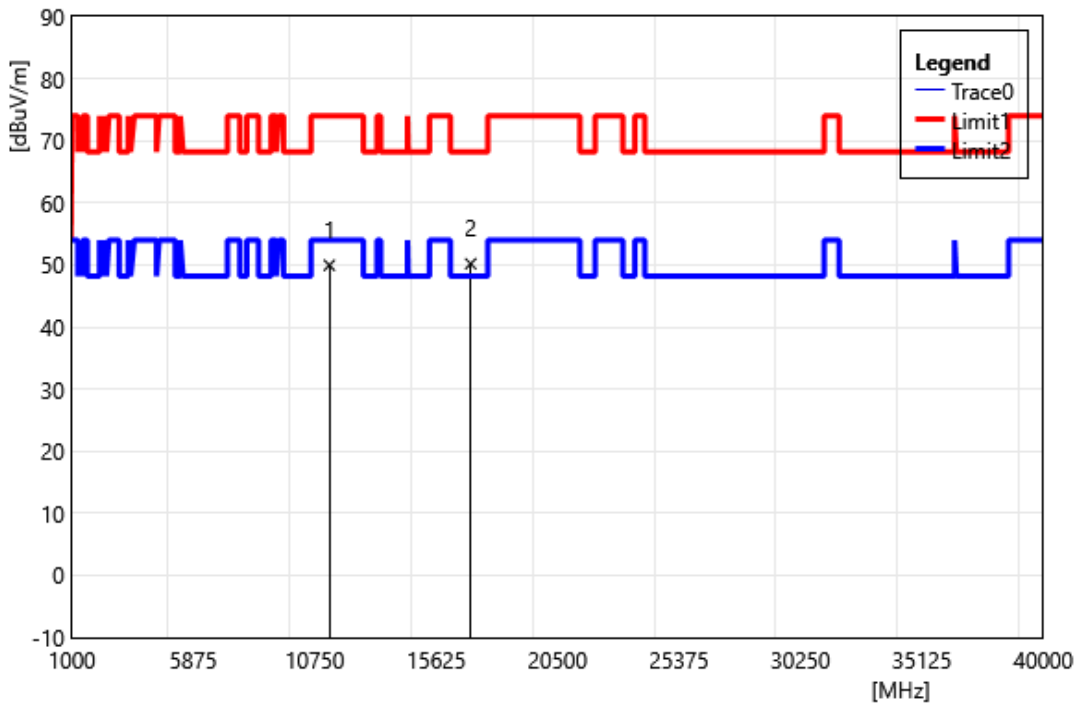


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	37.91	12.05	49.96	74.00	-24.04	PEAK
2	17010.00	33.40	16.79	50.19	68.20	-18.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

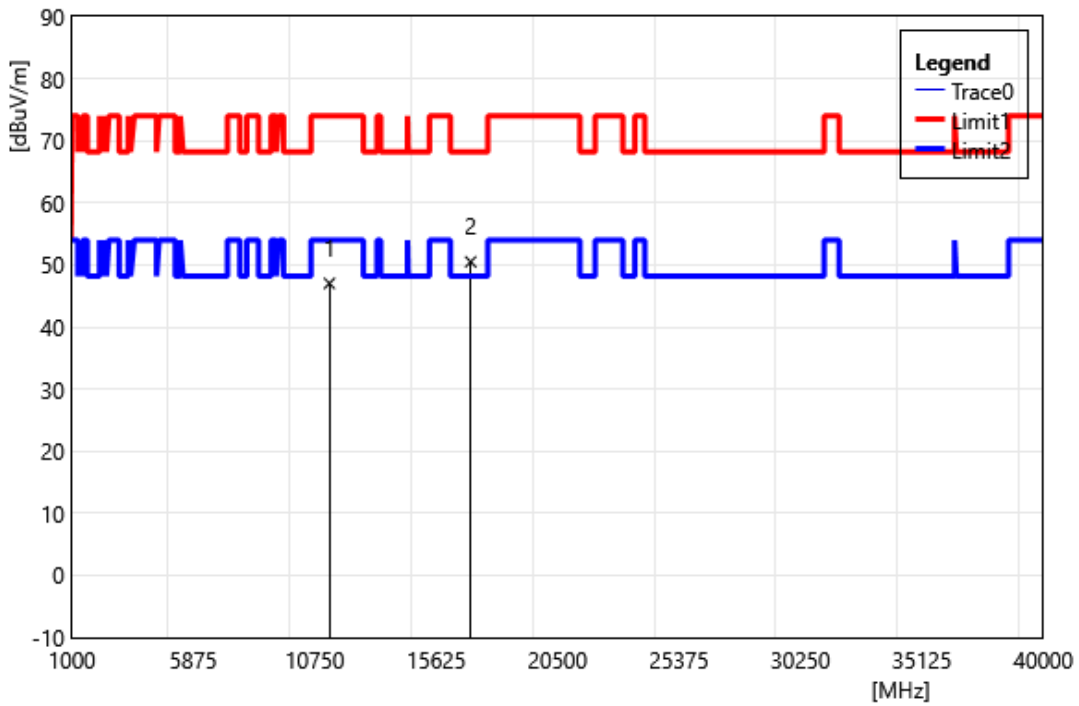


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	34.97	12.05	47.02	74.00	-26.98	PEAK
2	17010.00	33.71	16.79	50.50	68.20	-17.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

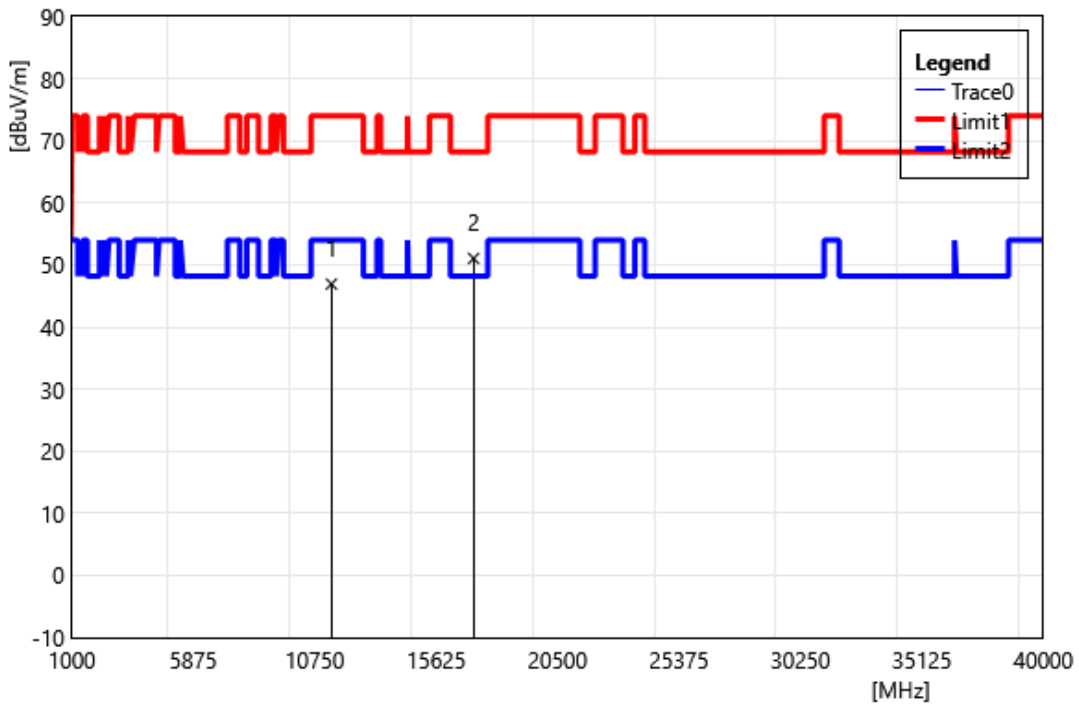


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	34.60	12.31	46.91	74.00	-27.09	PEAK
2	17130.00	33.46	17.60	51.06	68.20	-17.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

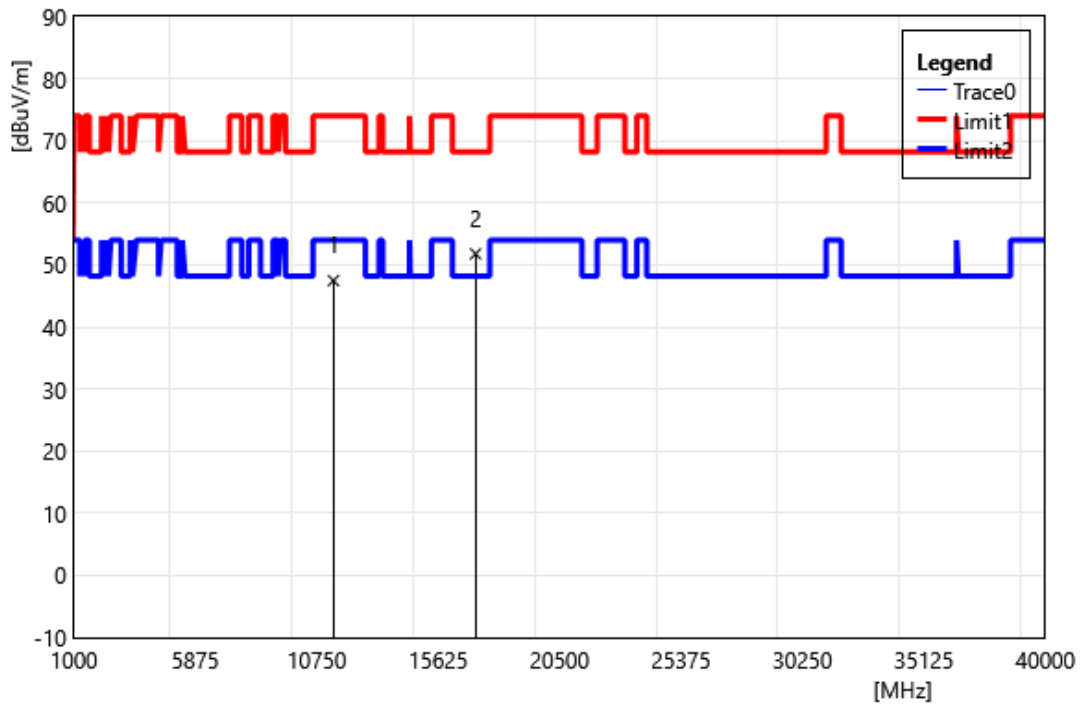


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	35.17	12.31	47.48	74.00	-26.52	PEAK
2	17130.00	34.19	17.60	51.79	68.20	-16.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

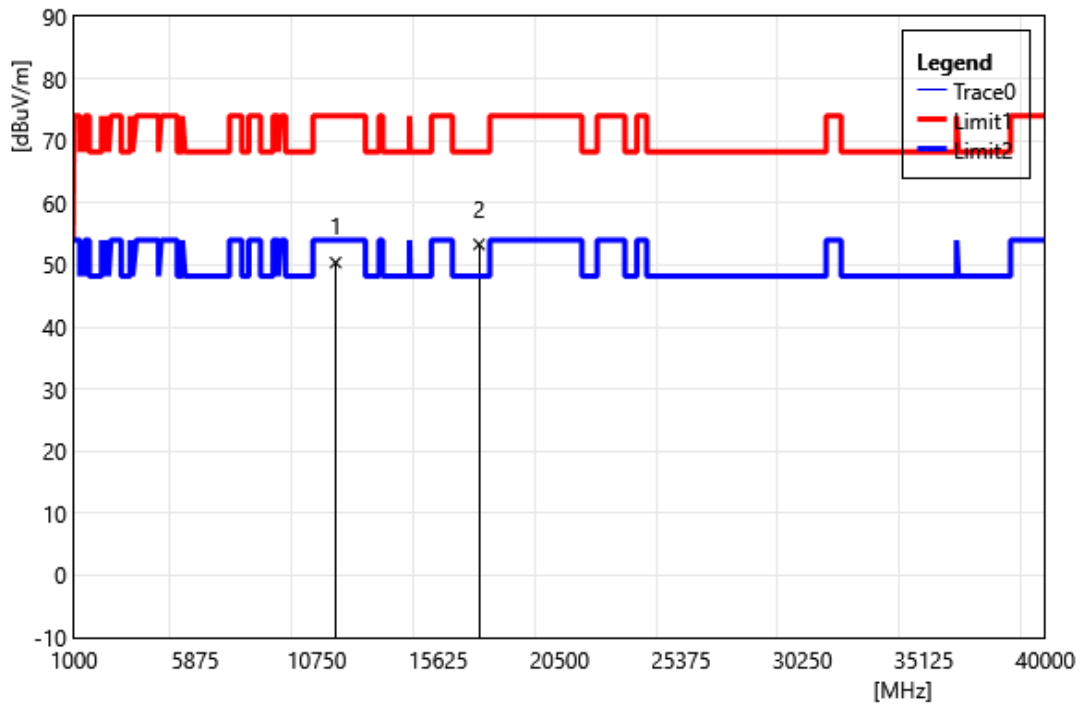


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	37.73	12.66	50.39	74.00	-23.61	PEAK
2	17265.00	34.58	18.73	53.31	68.20	-14.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

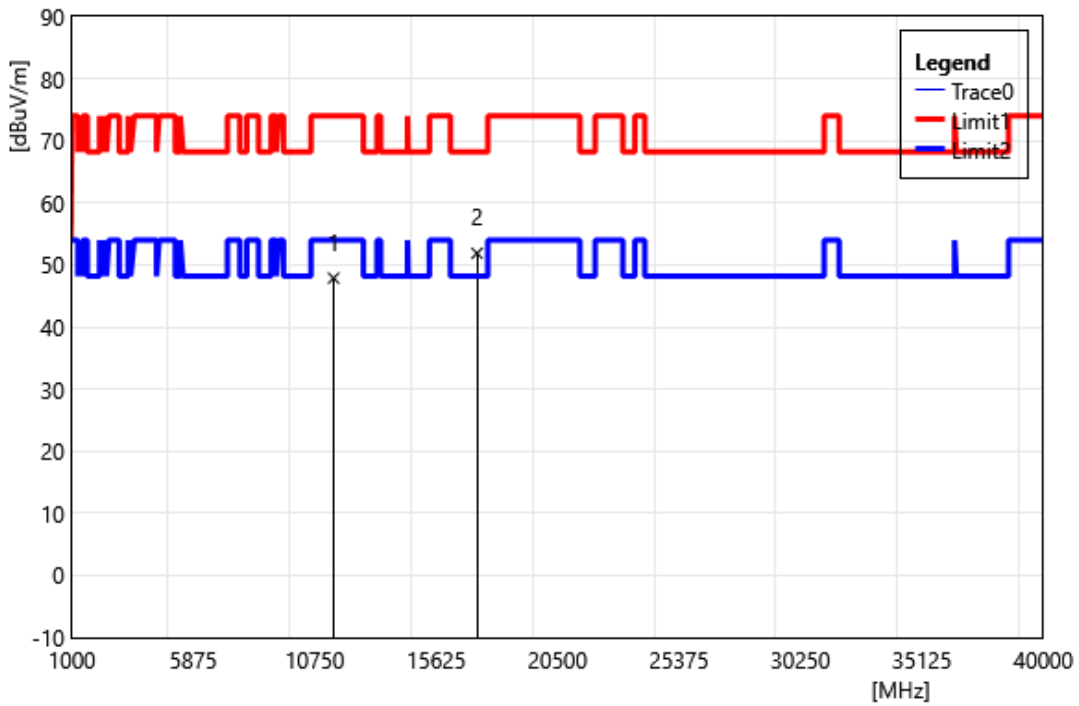


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	35.22	12.66	47.88	74.00	-26.12	PEAK
2	17265.00	33.16	18.73	51.89	68.20	-16.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

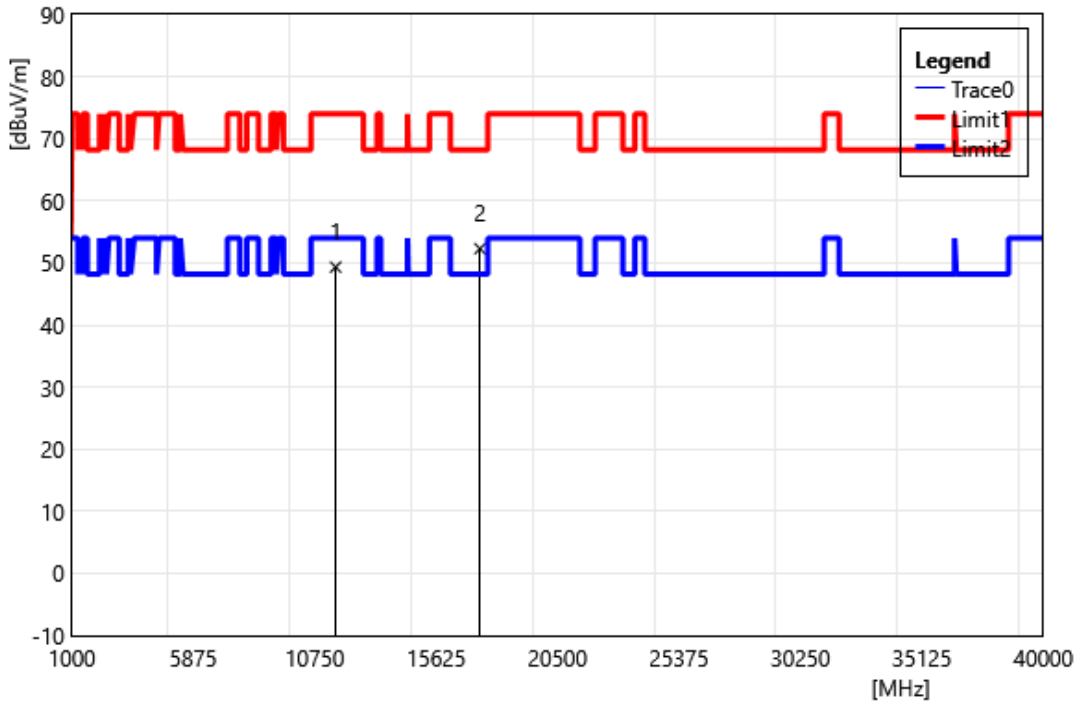


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	36.99	12.34	49.33	74.00	-24.67	PEAK
2	17385.00	32.79	19.52	52.31	68.20	-15.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

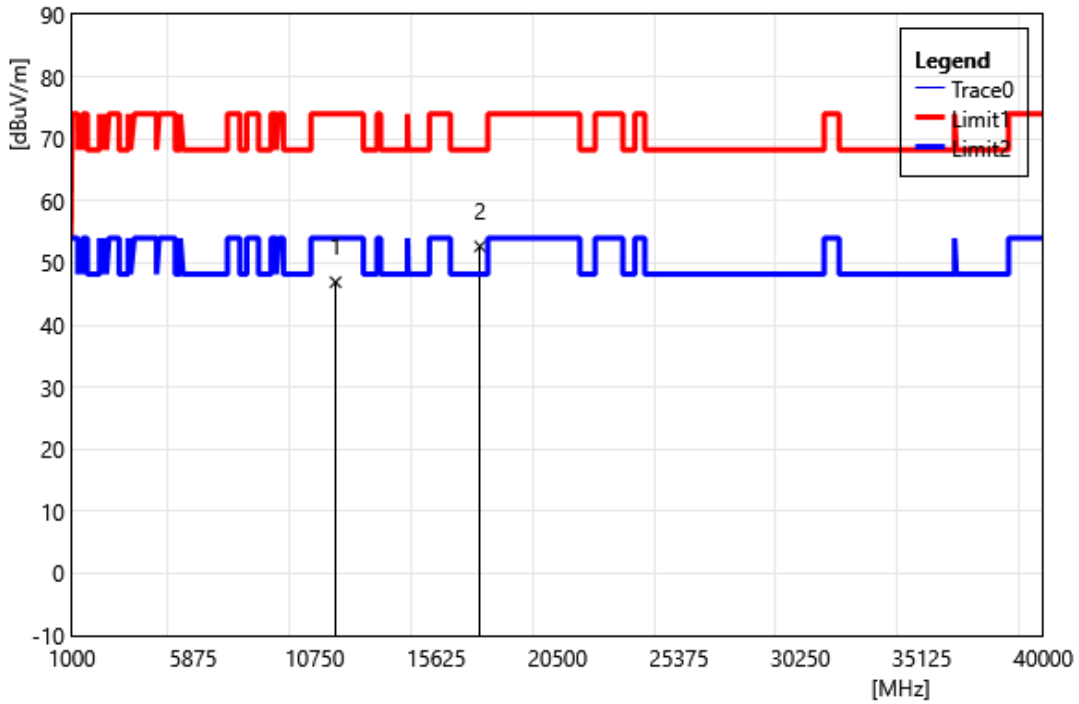


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	34.57	12.34	46.91	74.00	-27.09	PEAK
2	17385.00	33.14	19.52	52.66	68.20	-15.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

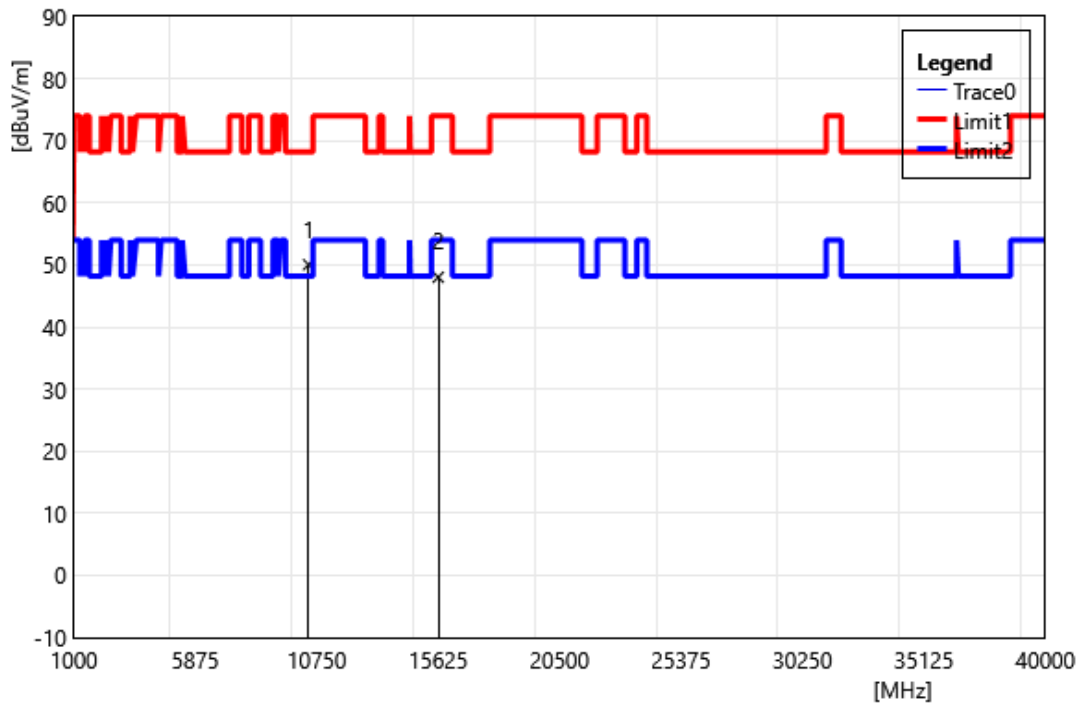


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	38.62	11.42	50.04	68.20	-18.16	PEAK
2	15630.00	34.10	13.92	48.02	74.00	-25.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

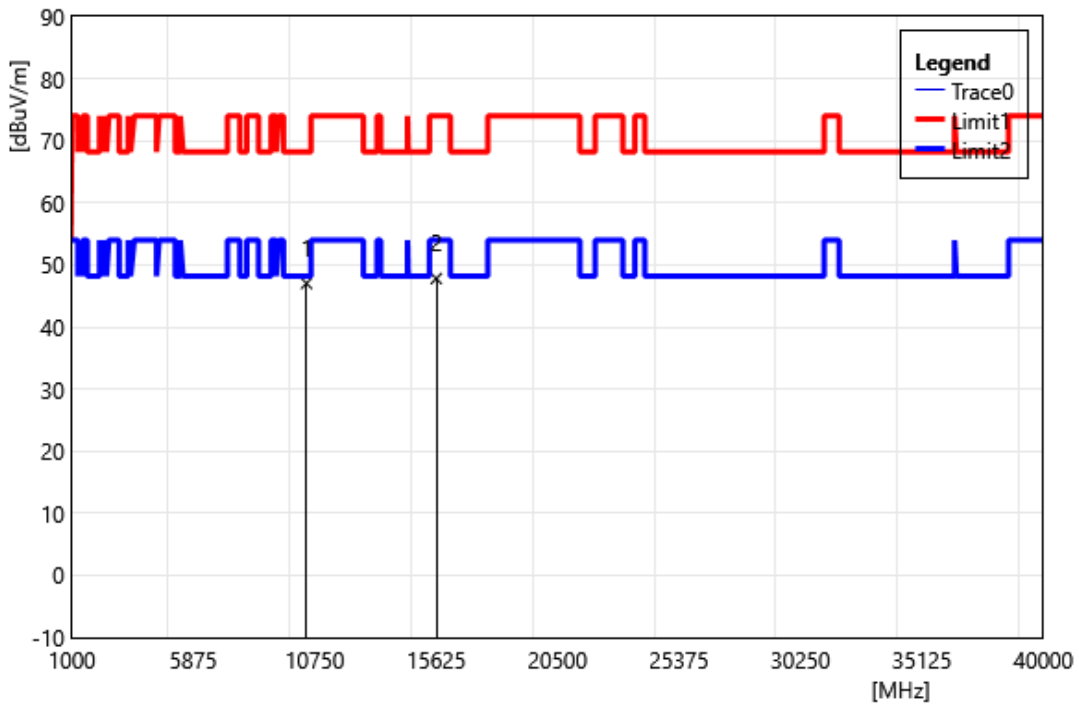


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	35.61	11.42	47.03	68.20	-21.17	PEAK
2	15630.00	33.90	13.92	47.82	74.00	-26.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

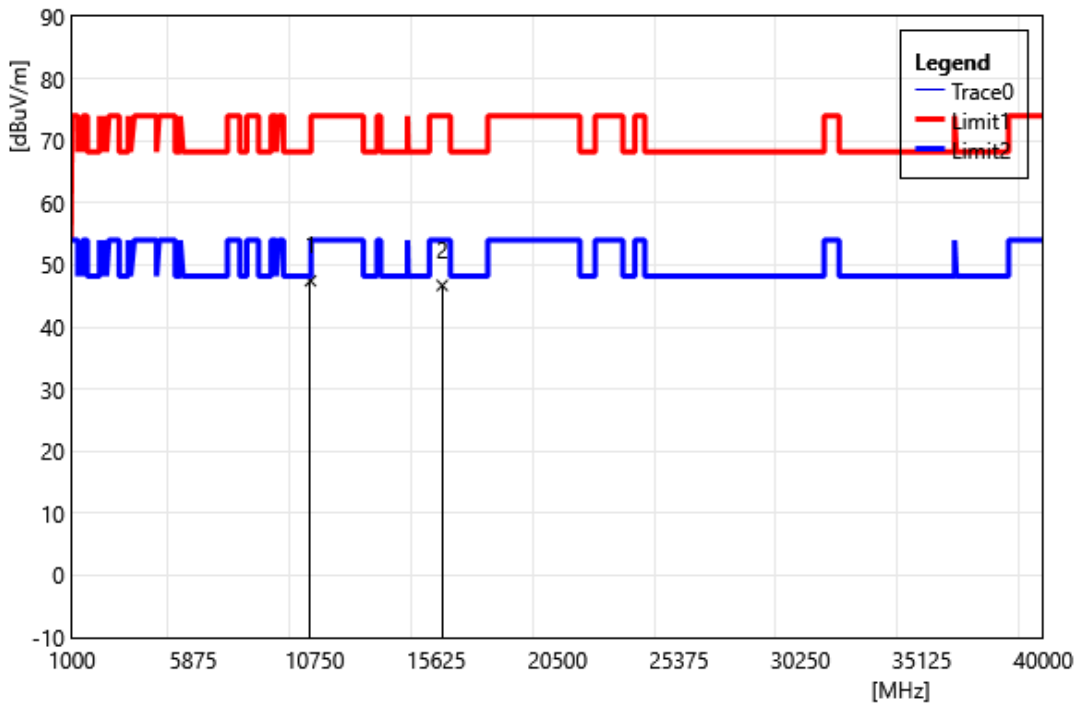


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.89	11.55	47.44	68.20	-20.76	PEAK
2	15870.00	33.22	13.50	46.72	74.00	-27.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

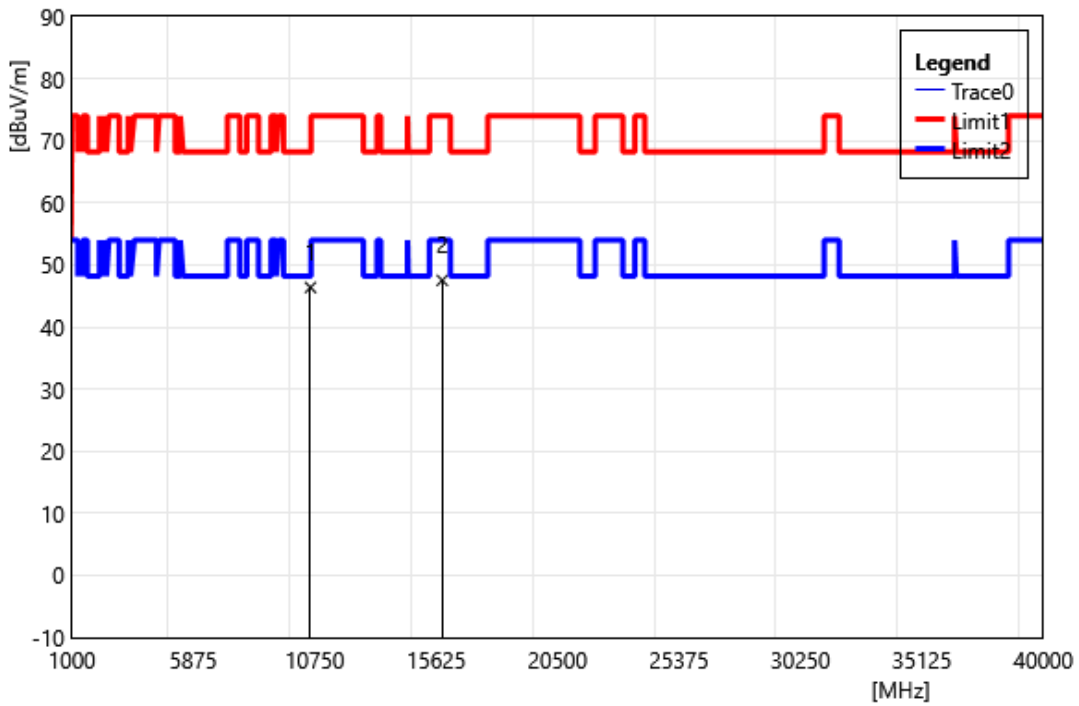


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	34.83	11.55	46.38	68.20	-21.82	PEAK
2	15870.00	34.01	13.50	47.51	74.00	-26.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

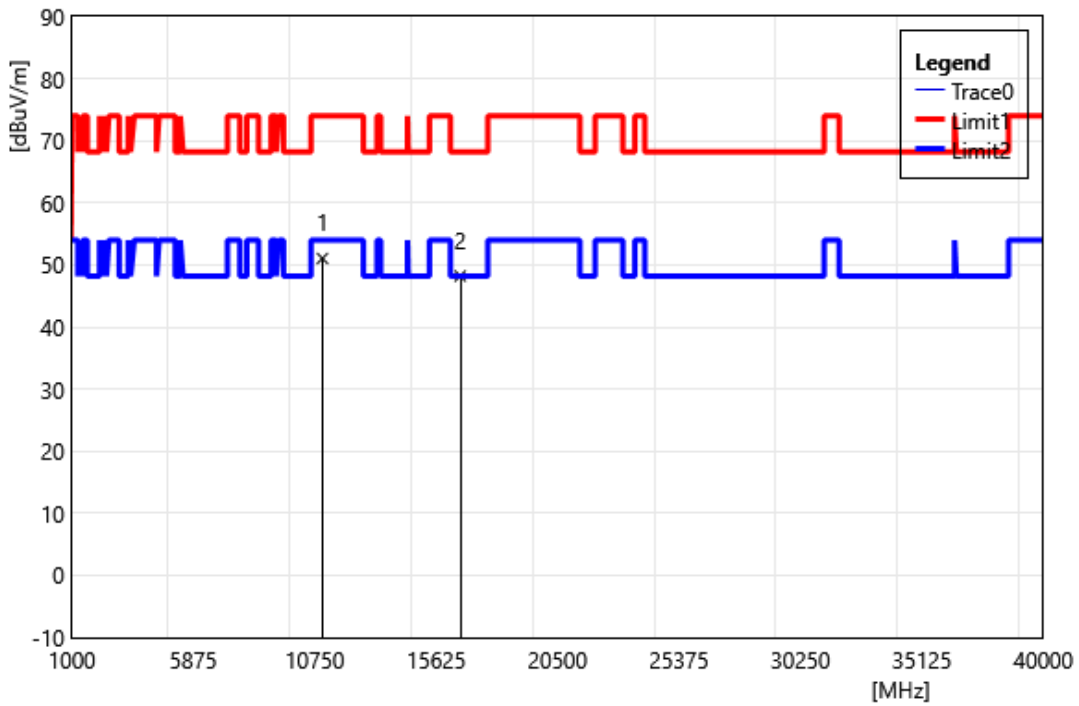


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	39.08	11.96	51.04	74.00	-22.96	PEAK
2	16590.00	33.42	14.80	48.22	68.20	-19.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

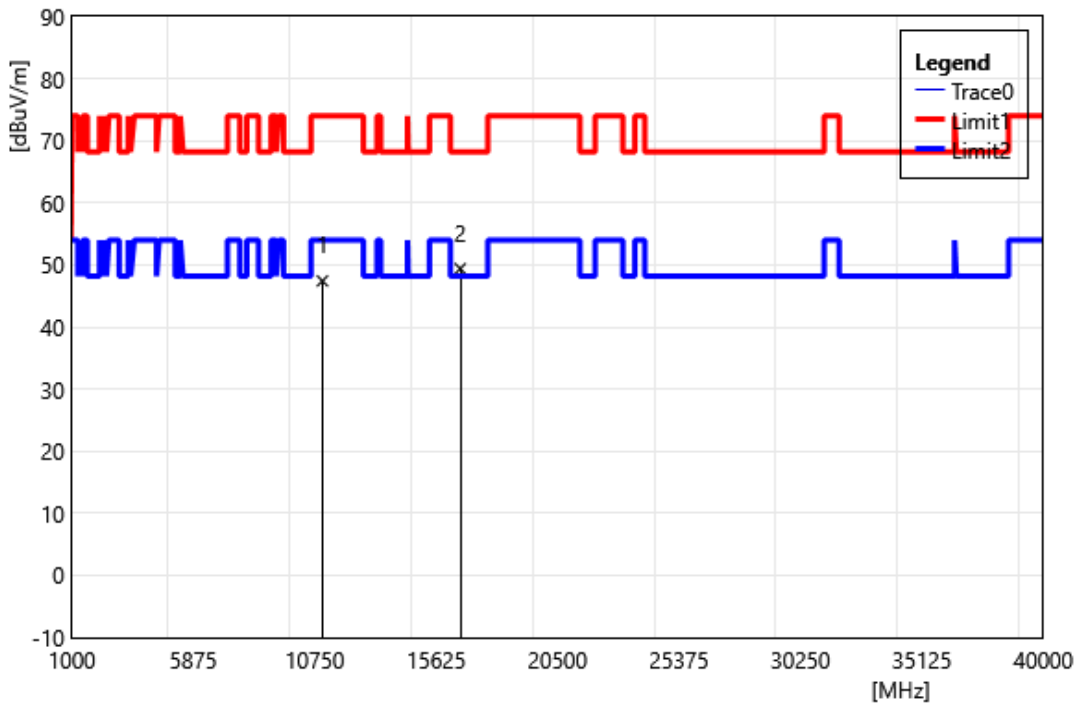


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	35.47	11.96	47.43	74.00	-26.57	PEAK
2	16590.00	34.60	14.80	49.40	68.20	-18.80	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

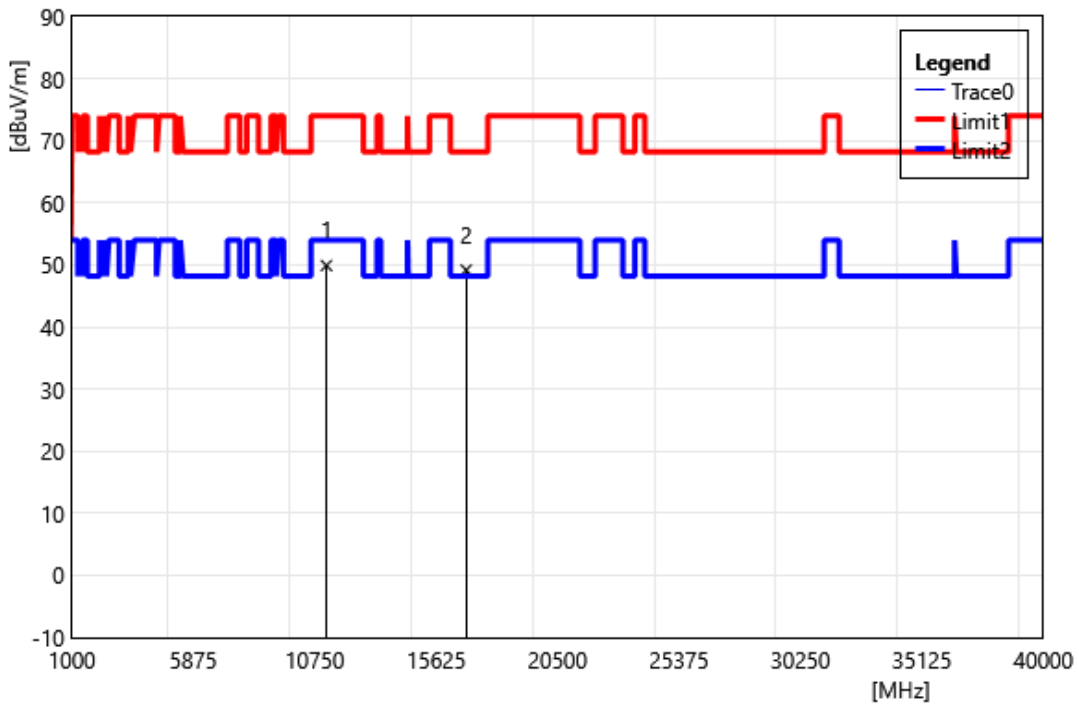


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	38.04	11.87	49.91	74.00	-24.09	PEAK
2	16830.00	33.07	16.11	49.18	68.20	-19.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

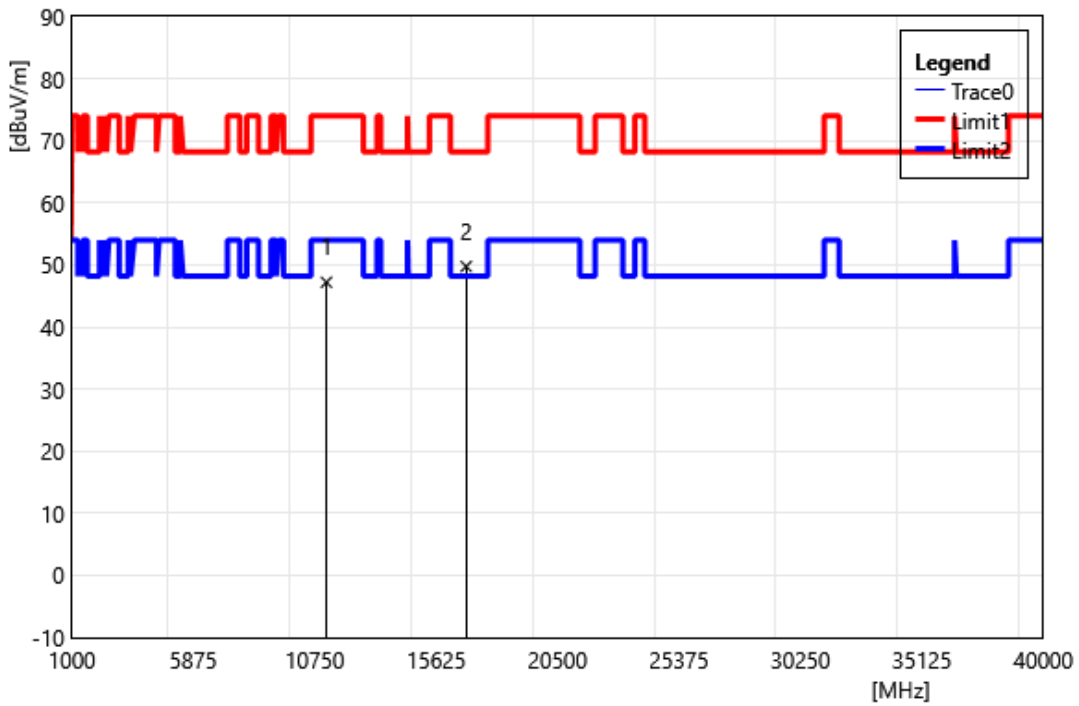


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.35	11.87	47.22	74.00	-26.78	PEAK
2	16830.00	33.65	16.11	49.76	68.20	-18.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

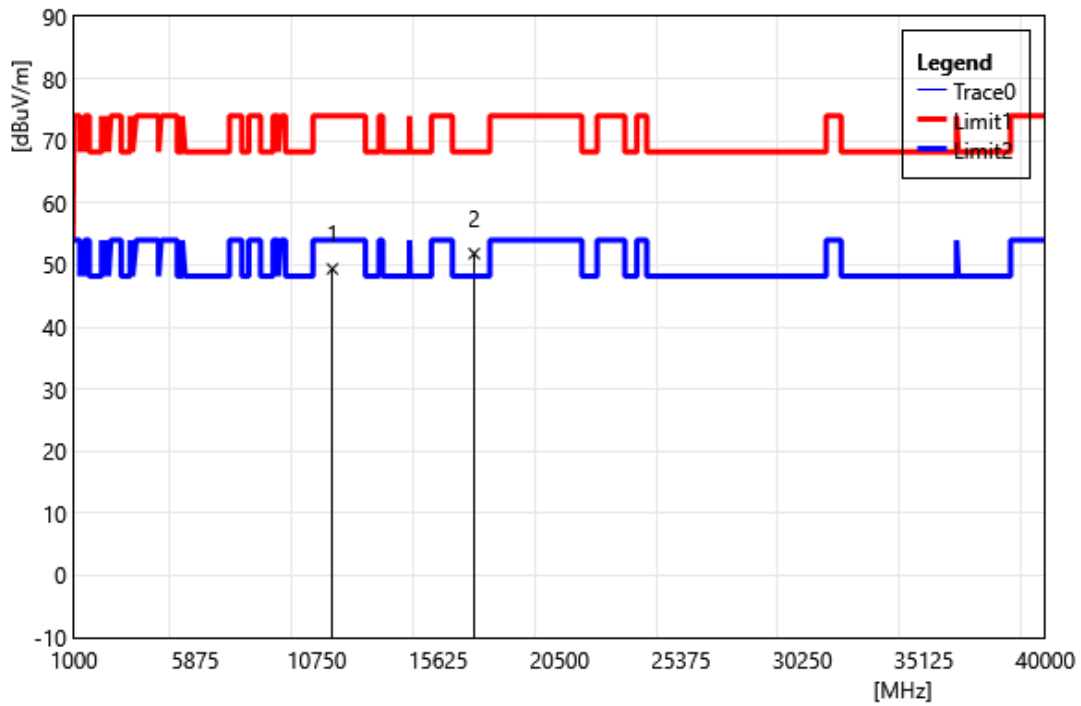


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	37.21	12.16	49.37	74.00	-24.63	PEAK
2	17070.00	34.65	17.18	51.83	68.20	-16.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

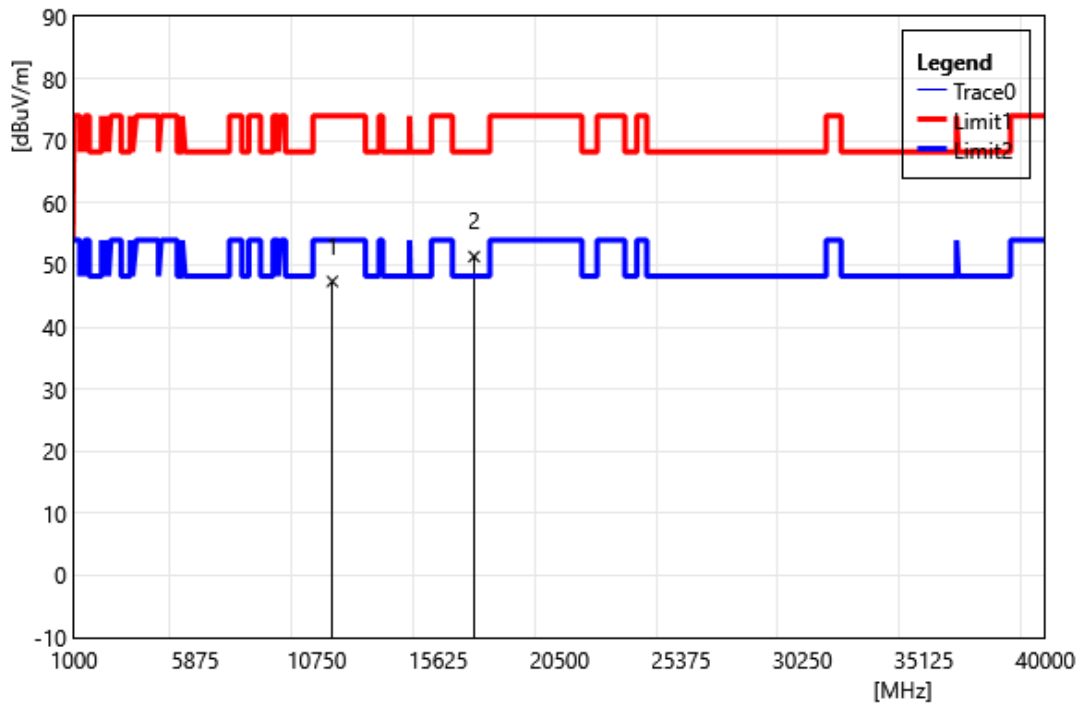


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	35.18	12.16	47.34	74.00	-26.66	PEAK
2	17070.00	34.17	17.18	51.35	68.20	-16.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

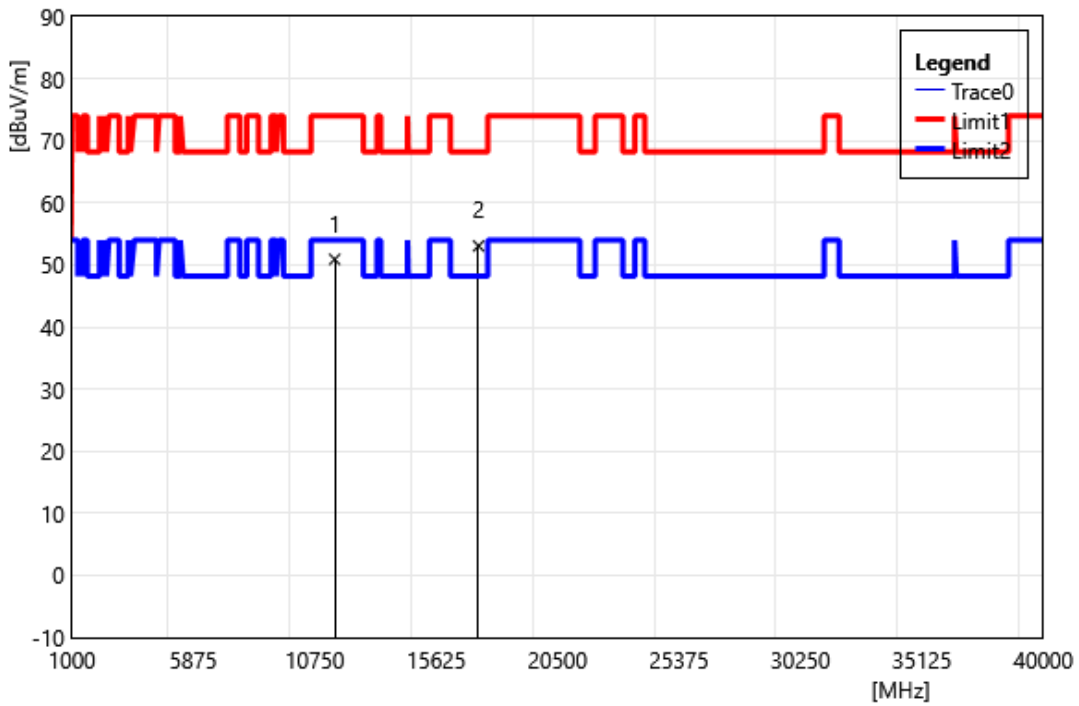


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	38.42	12.50	50.92	74.00	-23.08	PEAK
2	17325.00	33.87	19.19	53.06	68.20	-15.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

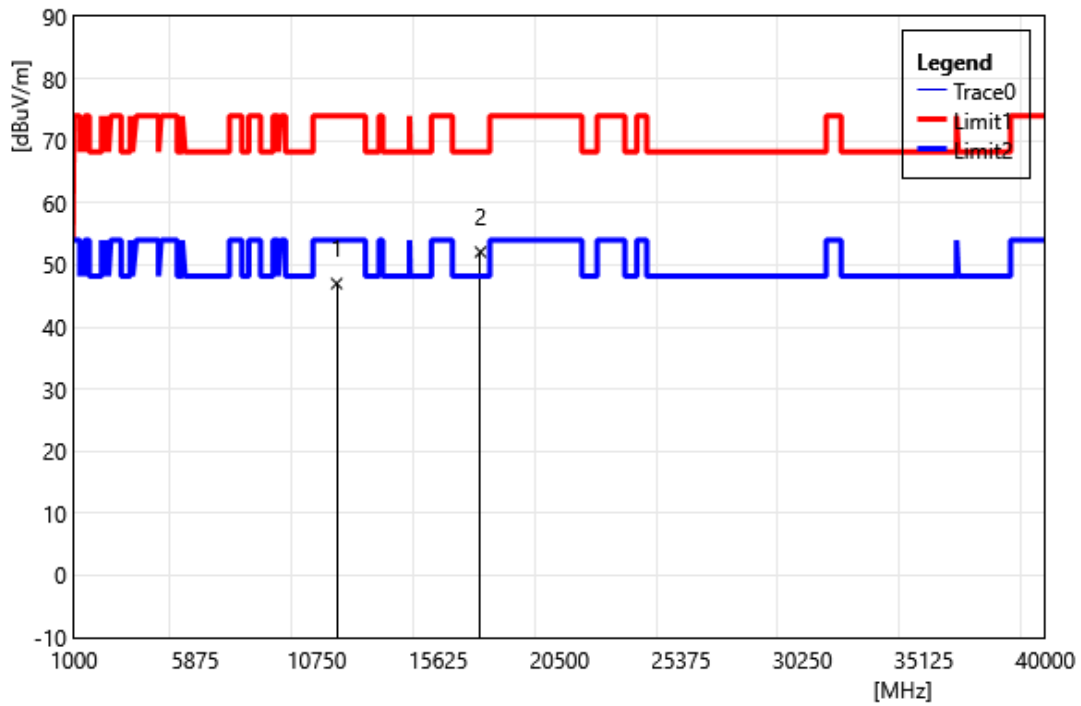


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	34.52	12.50	47.02	74.00	-26.98	PEAK
2	17325.00	32.90	19.19	52.09	68.20	-16.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

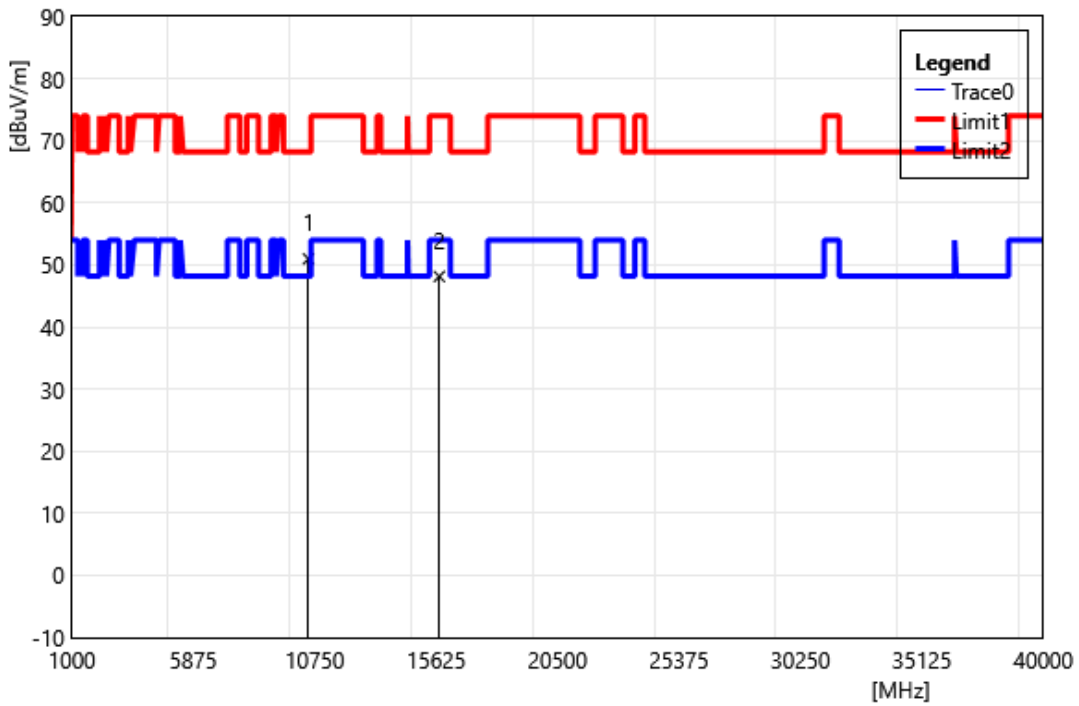


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	39.38	11.60	50.98	68.20	-17.22	PEAK
2	15750.00	34.37	13.78	48.15	74.00	-25.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

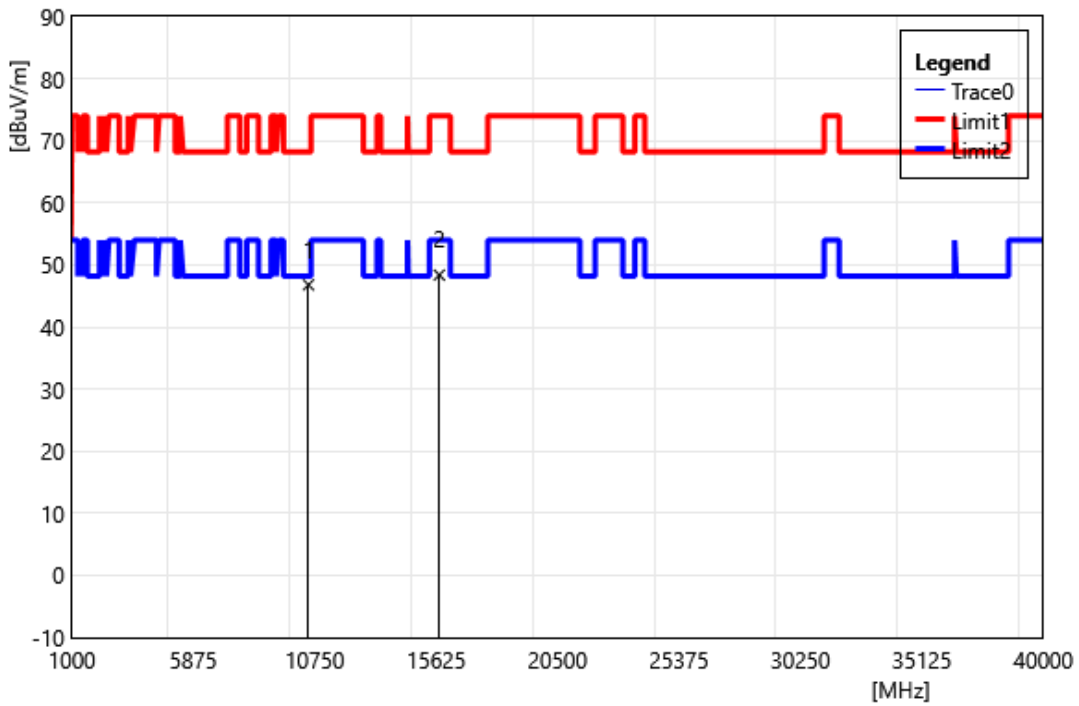


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	35.20	11.60	46.80	68.20	-21.40	PEAK
2	15750.00	34.61	13.78	48.39	74.00	-25.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

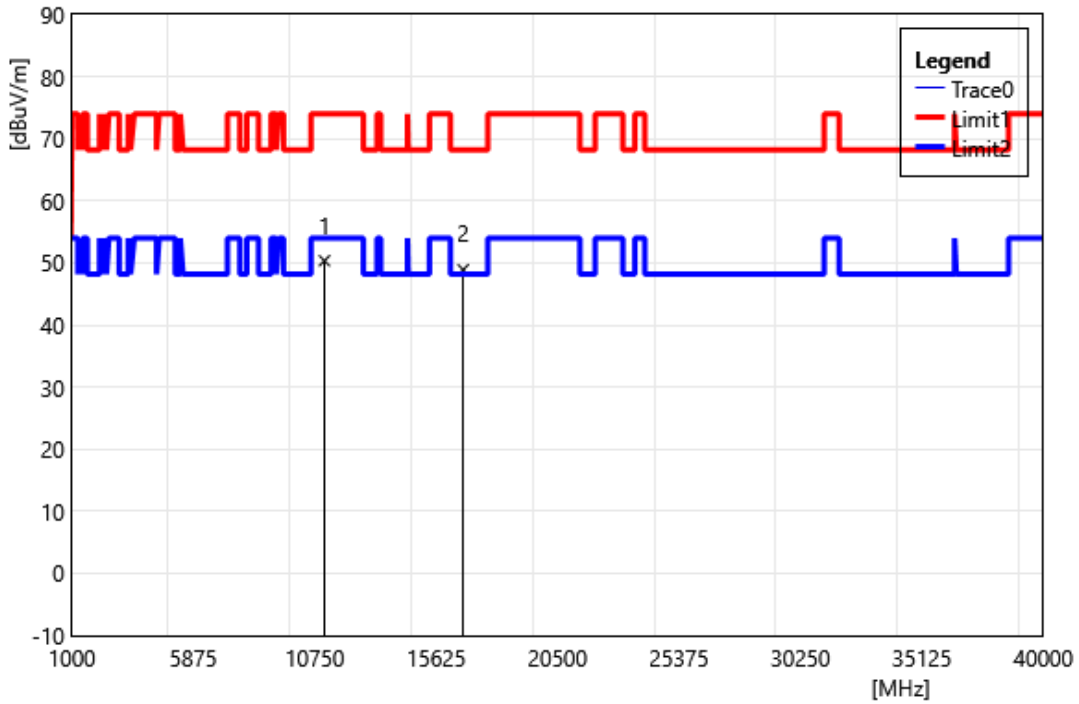

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	38.38	11.98	50.36	74.00	-23.64	PEAK
2	16710.00	33.54	15.36	48.91	68.20	-19.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

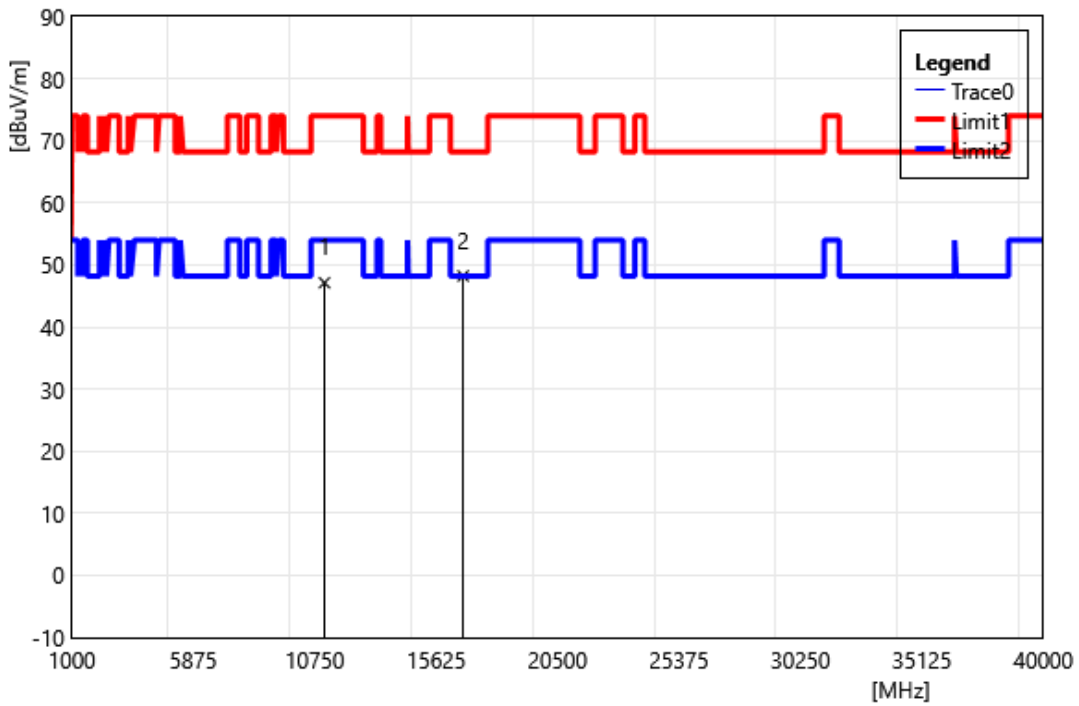


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	35.16	11.98	47.14	74.00	-26.86	PEAK
2	16710.00	32.87	15.36	48.23	68.20	-19.97	PEAK

Beamforming on


Below 1 GHz

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700 MHz		
Polarization:	Vertical		
Remark:			

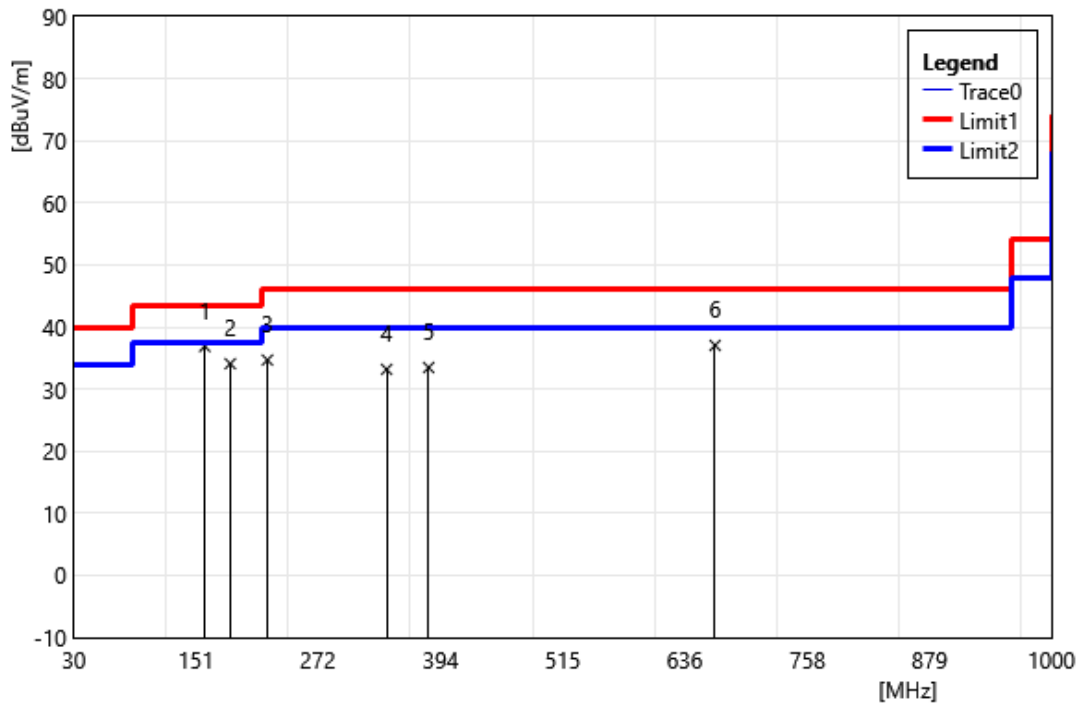

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	159.98	43.42	-6.52	36.90	43.50	-6.60	QP
2	185.20	42.46	-8.36	34.10	43.50	-9.40	QP
3	222.06	43.11	-8.41	34.70	46.00	-11.30	QP
4	340.40	38.08	-4.89	33.19	46.00	-12.81	QP
5	382.11	37.44	-3.95	33.49	46.00	-12.51	QP
6	666.32	35.90	1.14	37.04	46.00	-8.96	QP

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Horizontal		
Remark:			

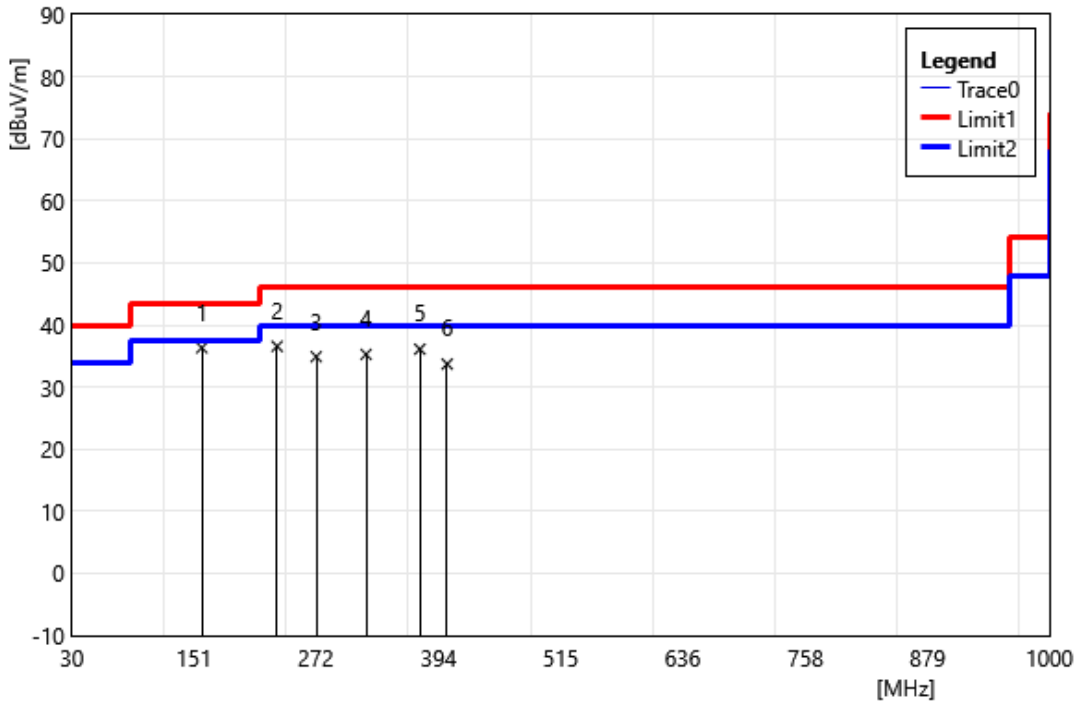


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	159.01	42.90	-6.56	36.34	43.50	-7.17	QP
2	233.70	44.28	-7.70	36.58	46.00	-9.43	QP
3	272.50	41.16	-6.26	34.90	46.00	-11.10	QP
4	321.97	40.67	-5.39	35.28	46.00	-10.72	QP
5	375.32	40.24	-4.12	36.12	46.00	-9.88	QP
6	402.48	37.43	-3.70	33.73	46.00	-12.28	QP

Harmonic


Above 1 GHz

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

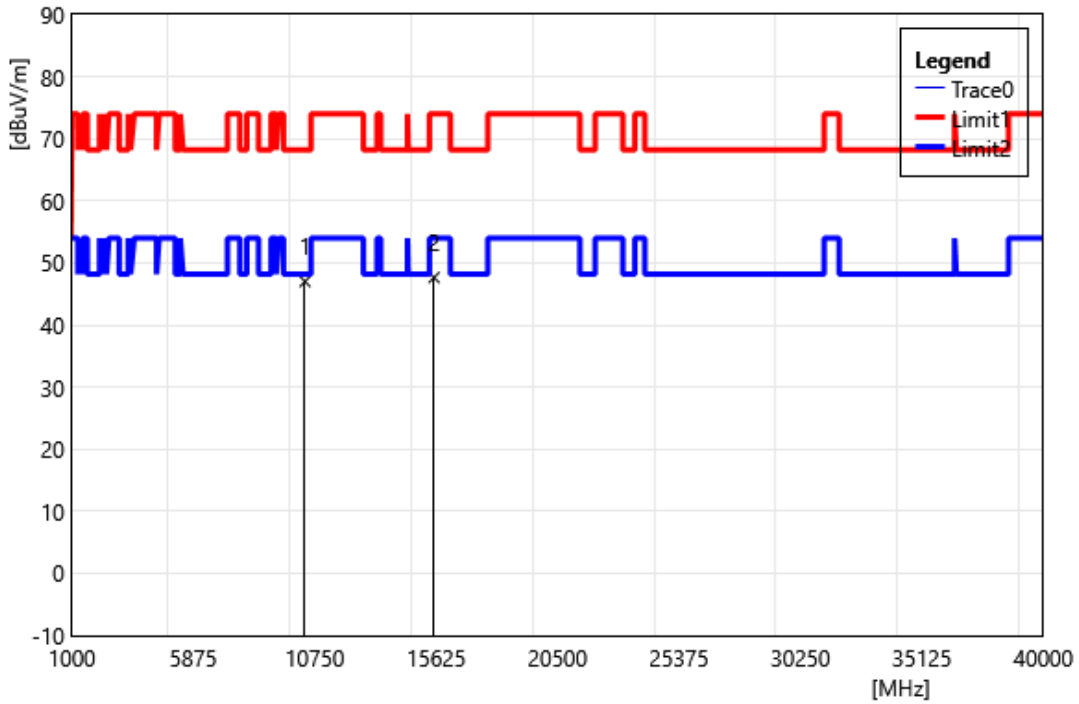


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10360.00	35.86	11.17	47.03	68.20	-21.17	PEAK
2	15540.00	33.57	14.09	47.66	74.00	-26.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

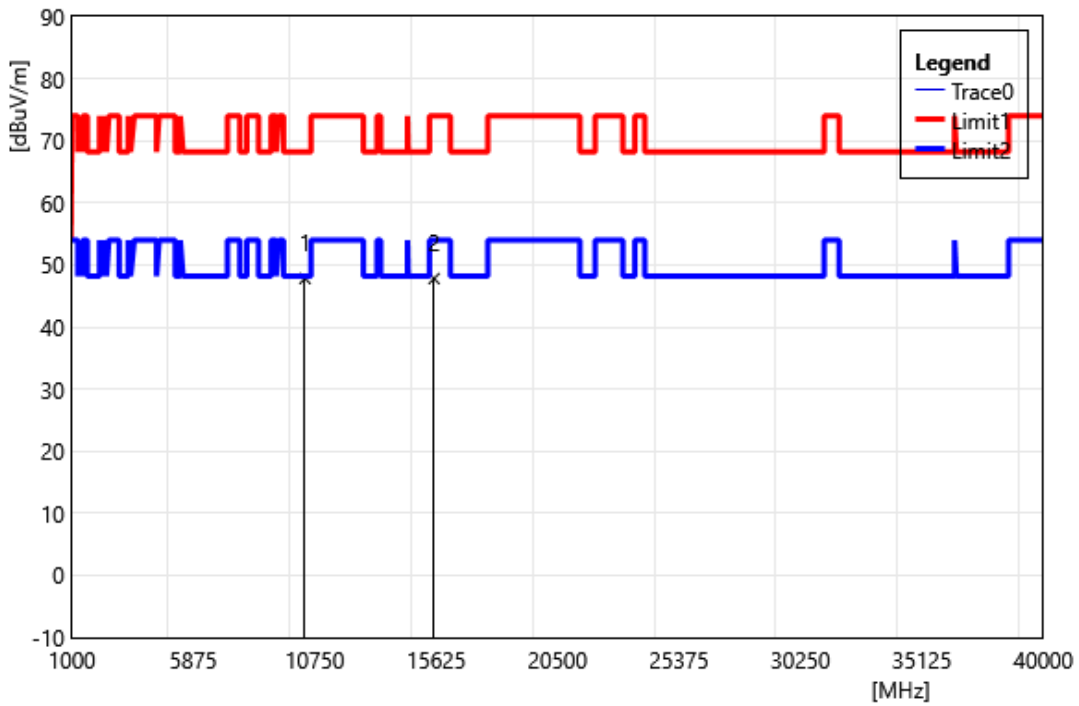


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10360.00	36.66	11.17	47.83	68.20	-20.37	PEAK
2	15540.00	33.72	14.09	47.81	74.00	-26.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

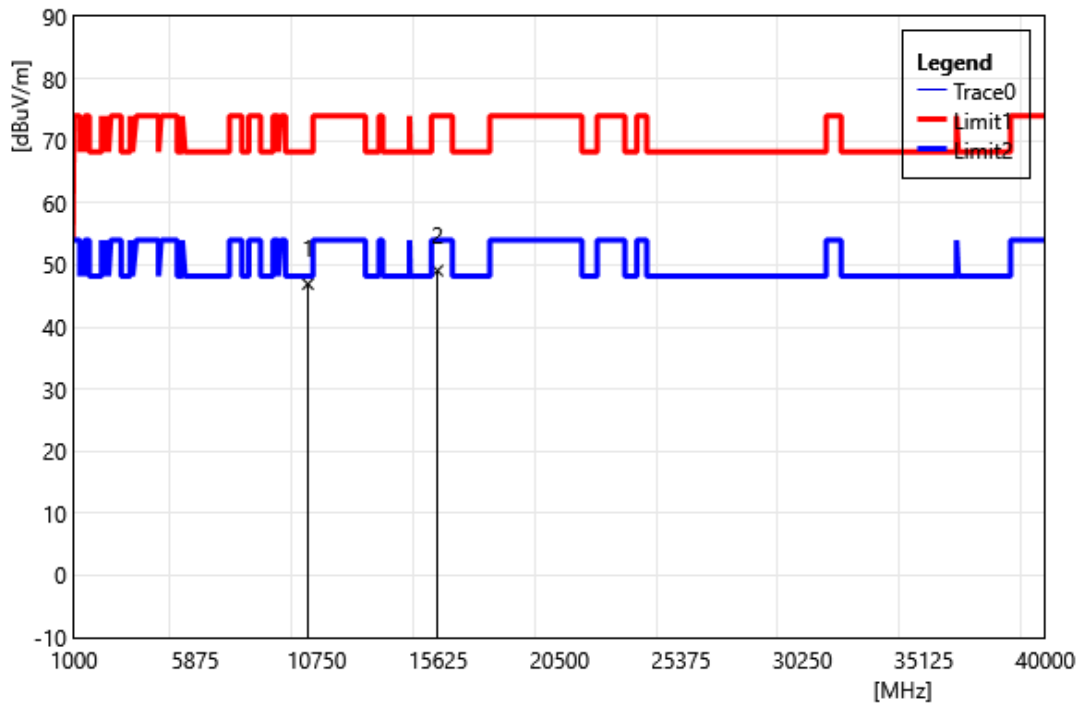


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	35.54	11.38	46.93	68.20	-21.28	PEAK
2	15600.00	35.14	13.96	49.10	74.00	-24.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

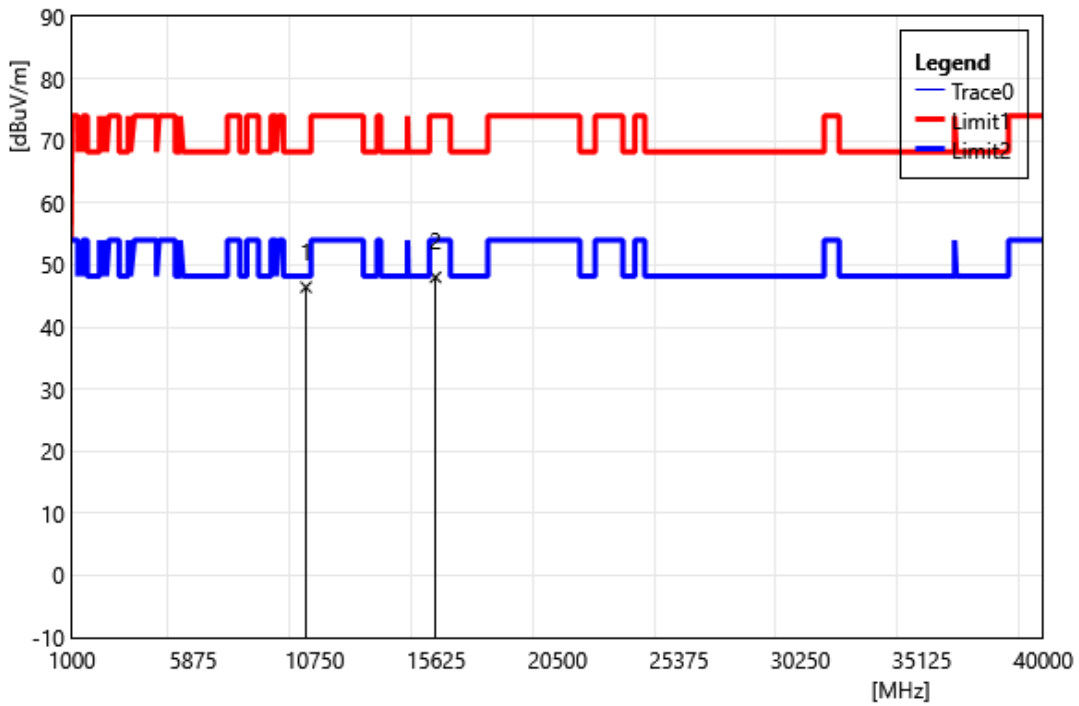


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	35.04	11.38	46.42	68.20	-21.78	PEAK
2	15600.00	34.07	13.96	48.02	74.00	-25.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

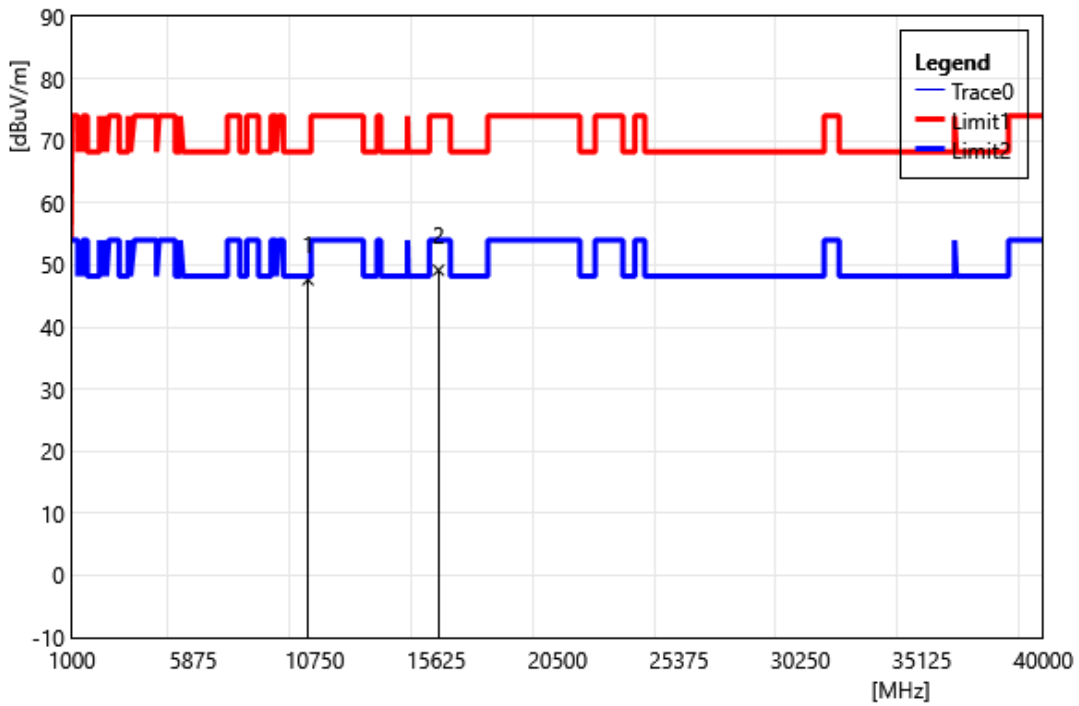


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	36.06	11.56	47.62	68.20	-20.58	PEAK
2	15720.00	35.34	13.82	49.16	74.00	-24.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

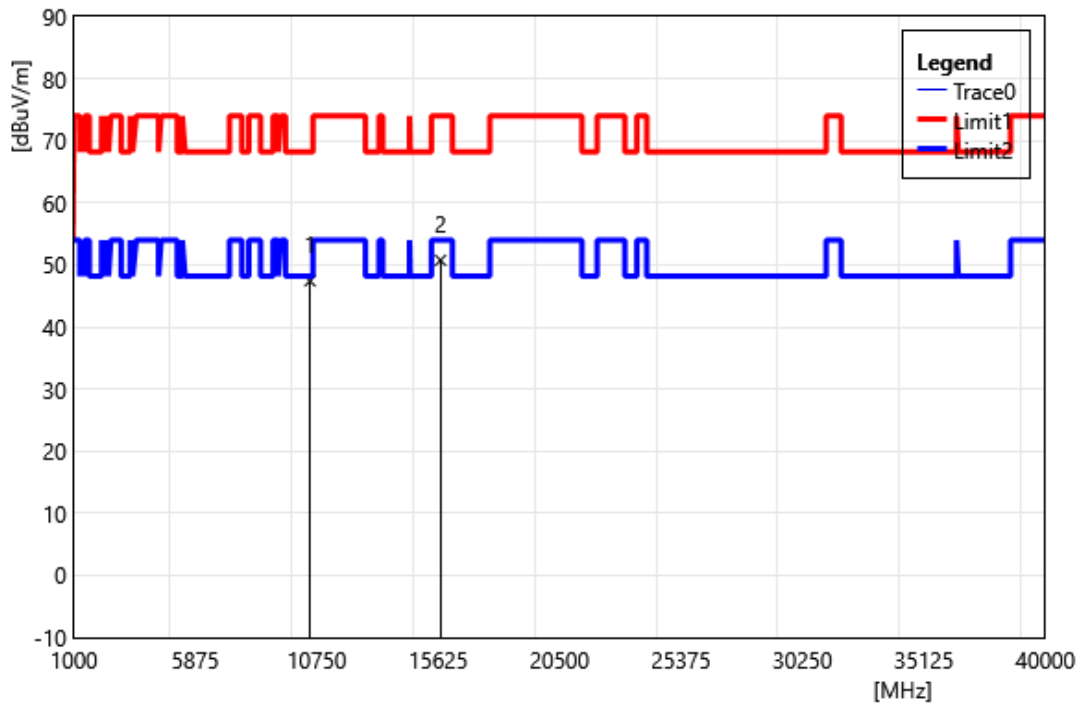


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	35.88	11.56	47.44	68.20	-20.76	PEAK
2	15720.00	36.93	13.82	50.75	74.00	-23.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

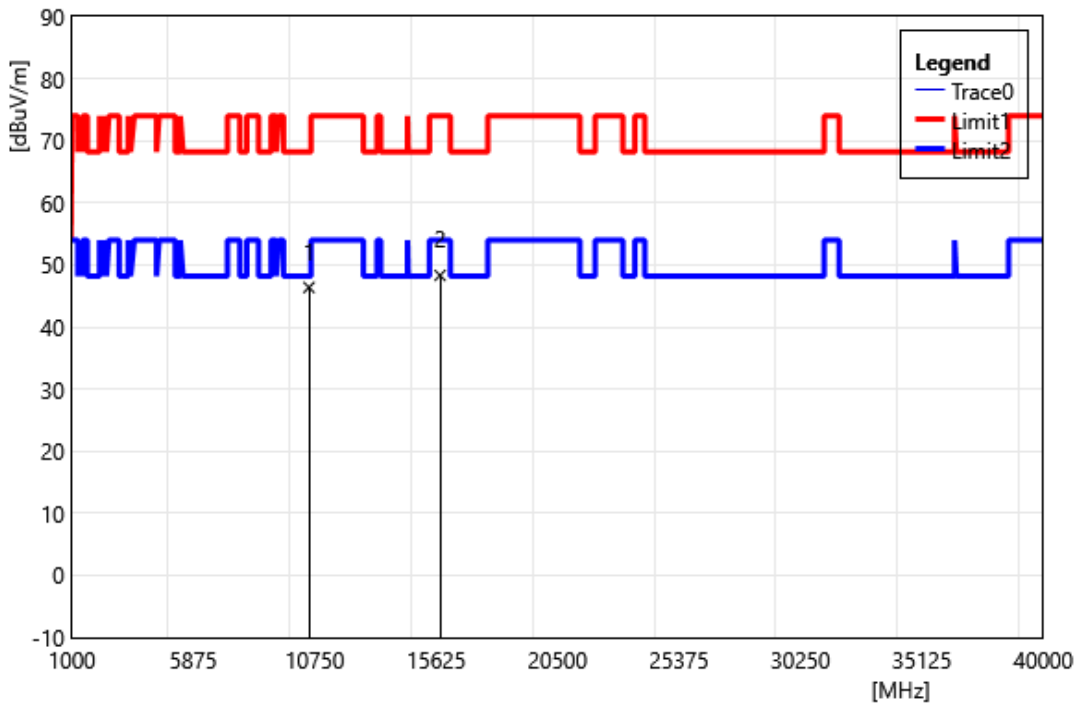


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10520.00	34.79	11.59	46.38	68.20	-21.82	PEAK
2	15780.00	34.57	13.75	48.32	74.00	-25.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

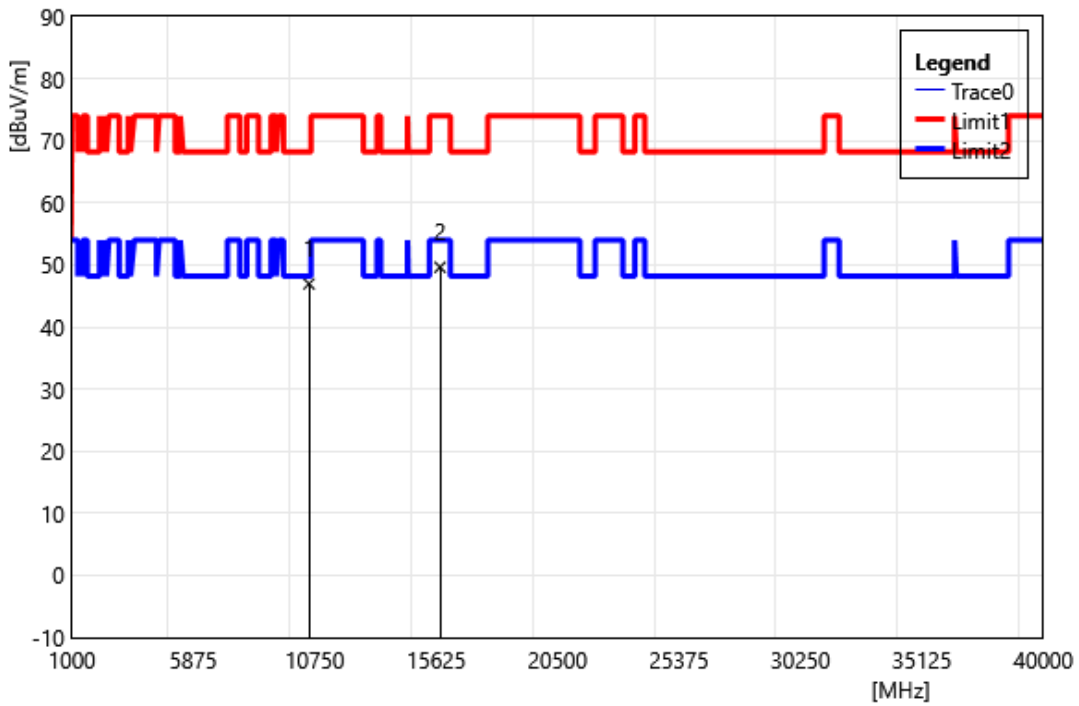


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10520.00	35.37	11.59	46.96	68.20	-21.24	PEAK
2	15780.00	35.89	13.75	49.64	74.00	-24.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

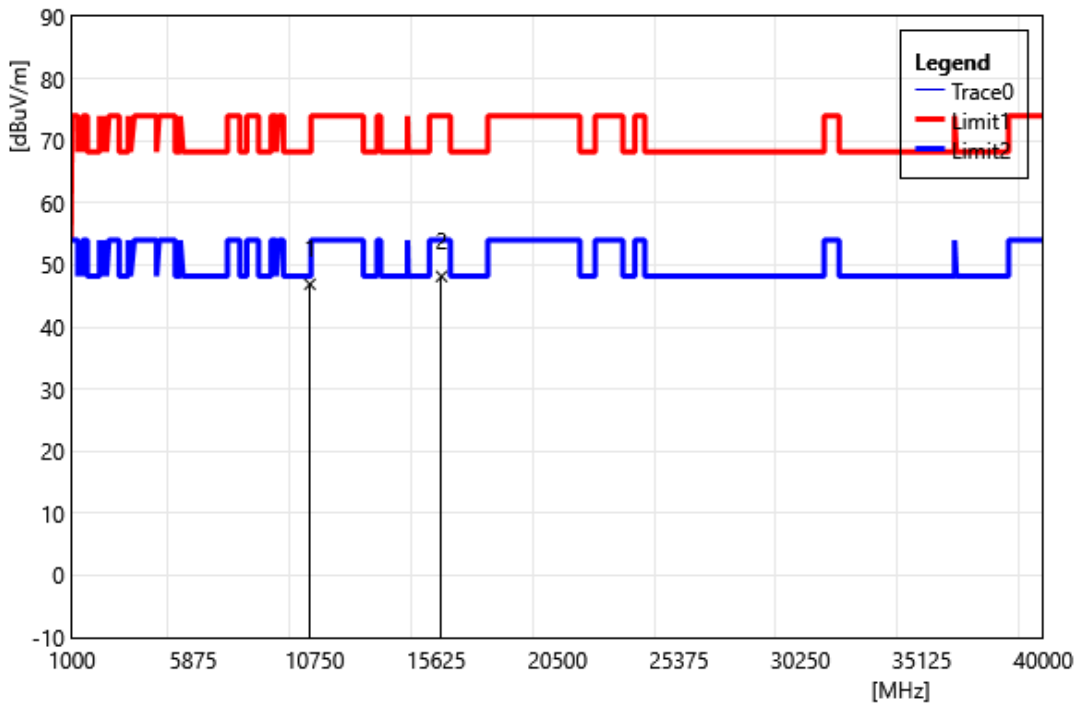


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10560.00	35.34	11.56	46.90	68.20	-21.30	PEAK
2	15840.00	34.55	13.60	48.15	74.00	-25.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

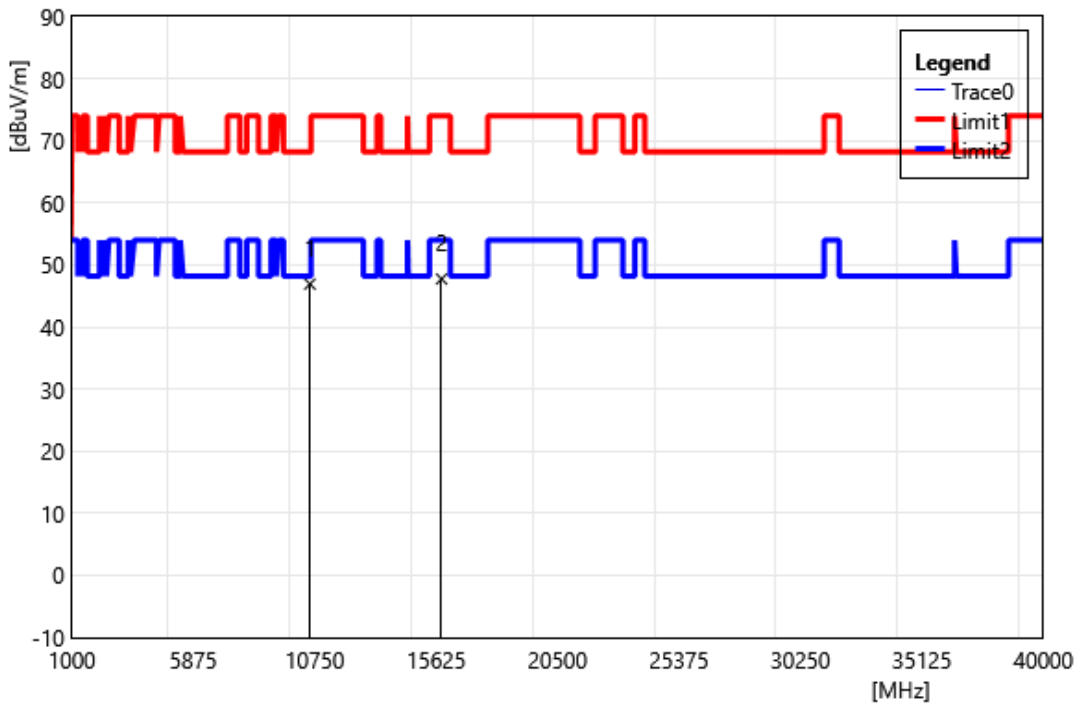


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10560.00	35.36	11.56	46.92	68.20	-21.28	PEAK
2	15840.00	34.14	13.60	47.74	74.00	-26.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

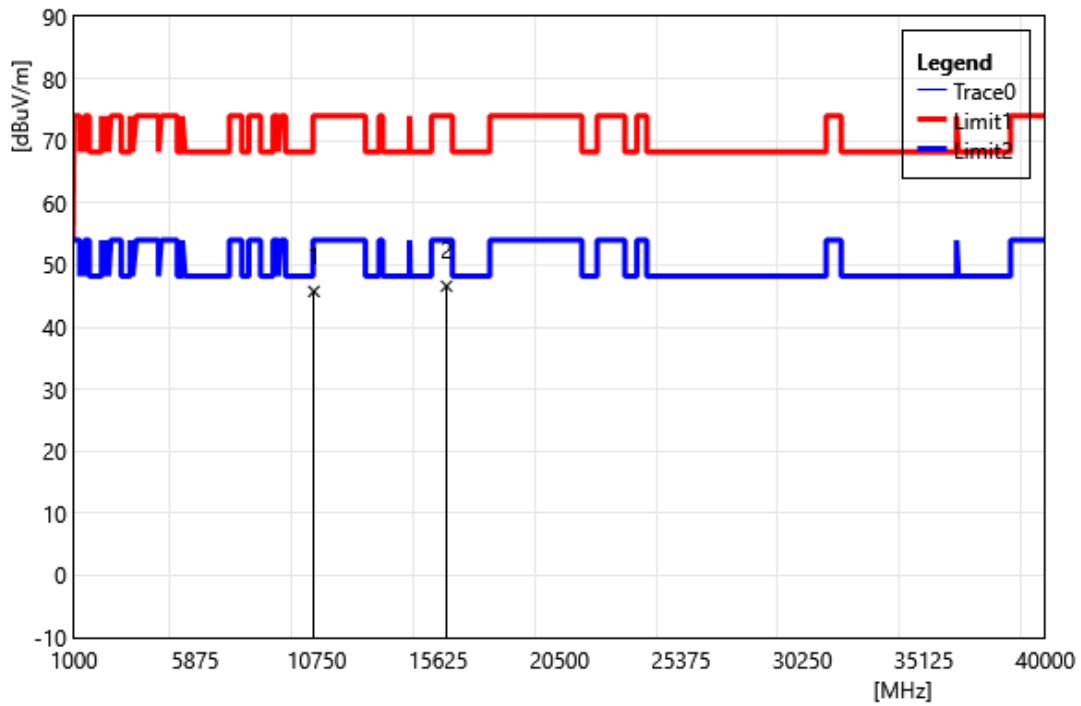


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10640.00	34.19	11.55	45.74	74.00	-28.26	PEAK
2	15960.00	33.36	13.22	46.58	74.00	-27.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

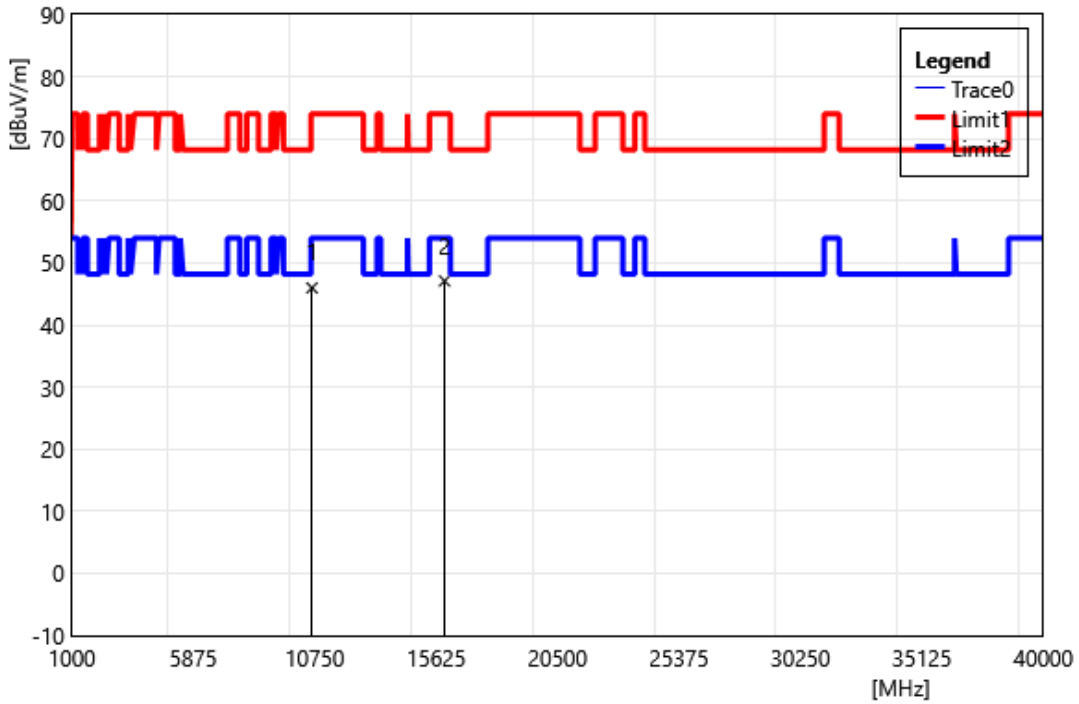


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10640.00	34.44	11.55	45.99	74.00	-28.01	PEAK
2	15960.00	33.88	13.22	47.10	74.00	-26.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500 MHz		
Polarization:	Vertical		
Remark:			

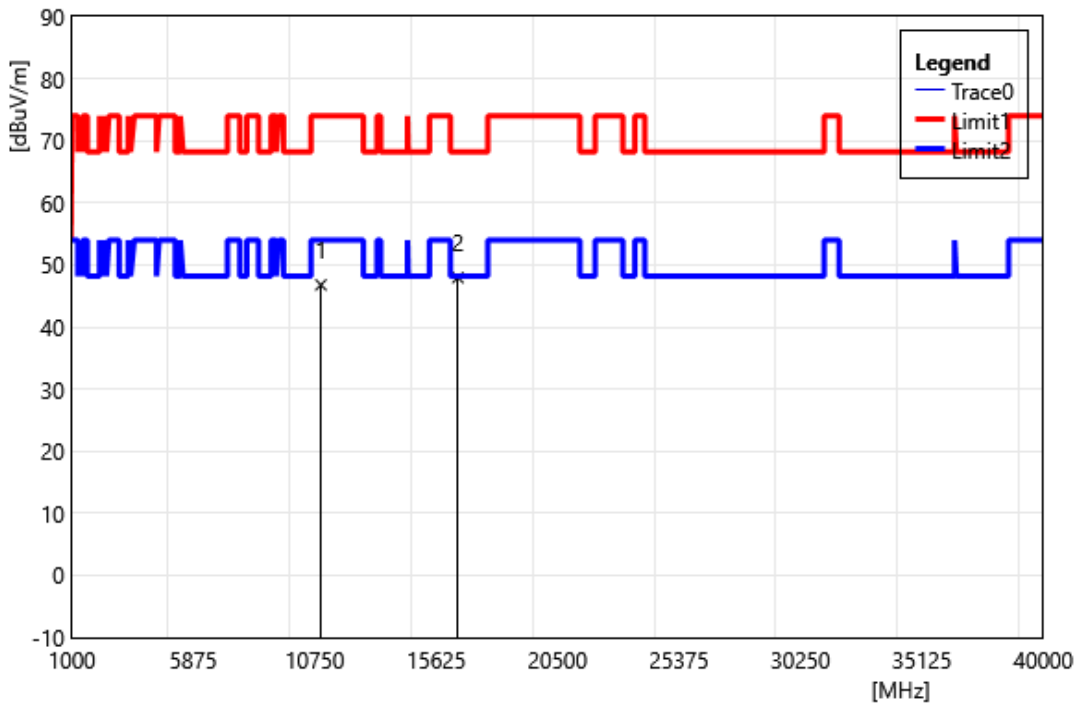


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	35.00	11.79	46.79	74.00	-27.21	PEAK
2	16500.00	33.65	14.31	47.96	68.20	-20.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

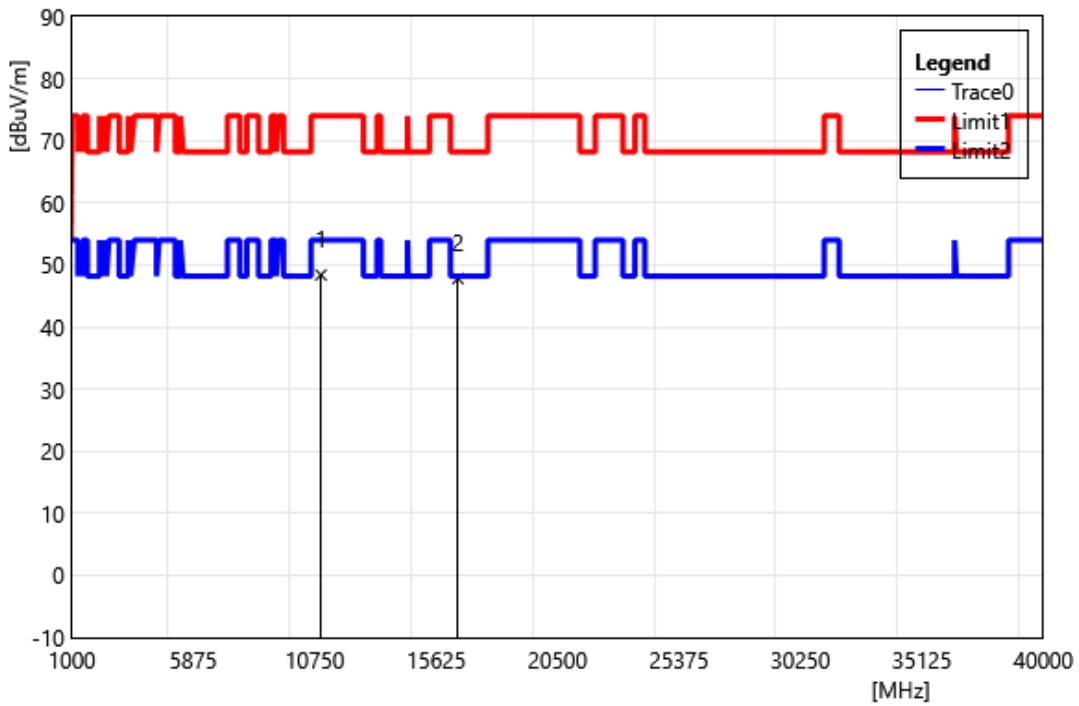


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	36.59	11.79	48.38	74.00	-25.62	PEAK
2	16500.00	33.52	14.31	47.83	68.20	-20.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

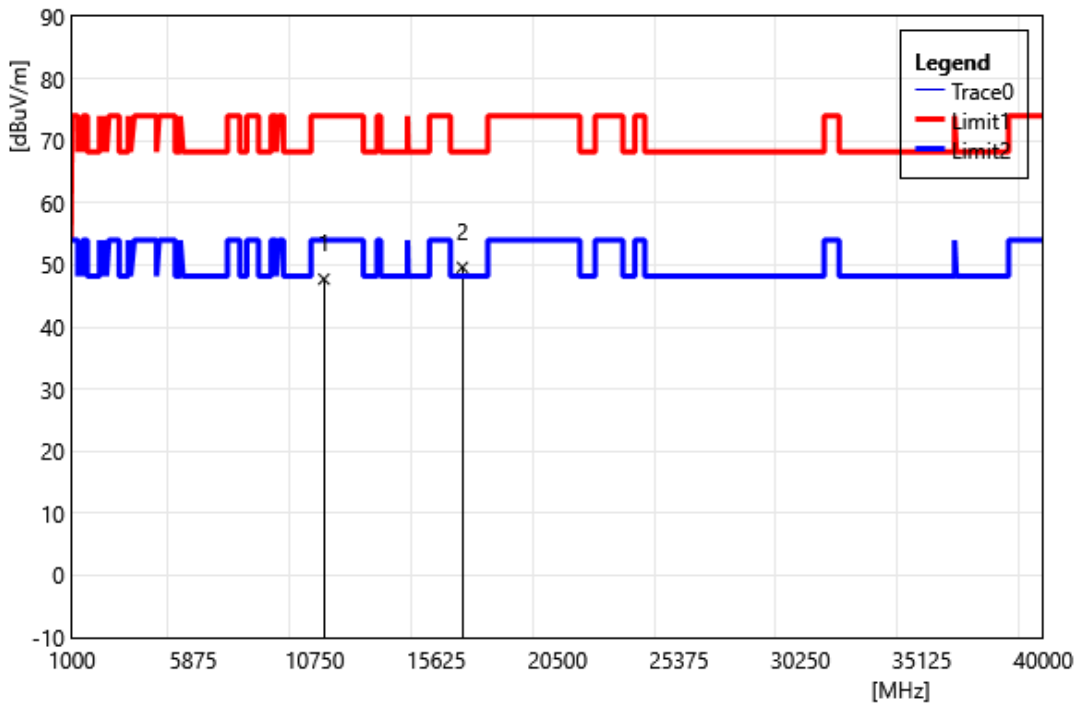


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	35.68	12.03	47.71	74.00	-26.29	PEAK
2	16680.00	34.41	15.21	49.62	68.20	-18.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

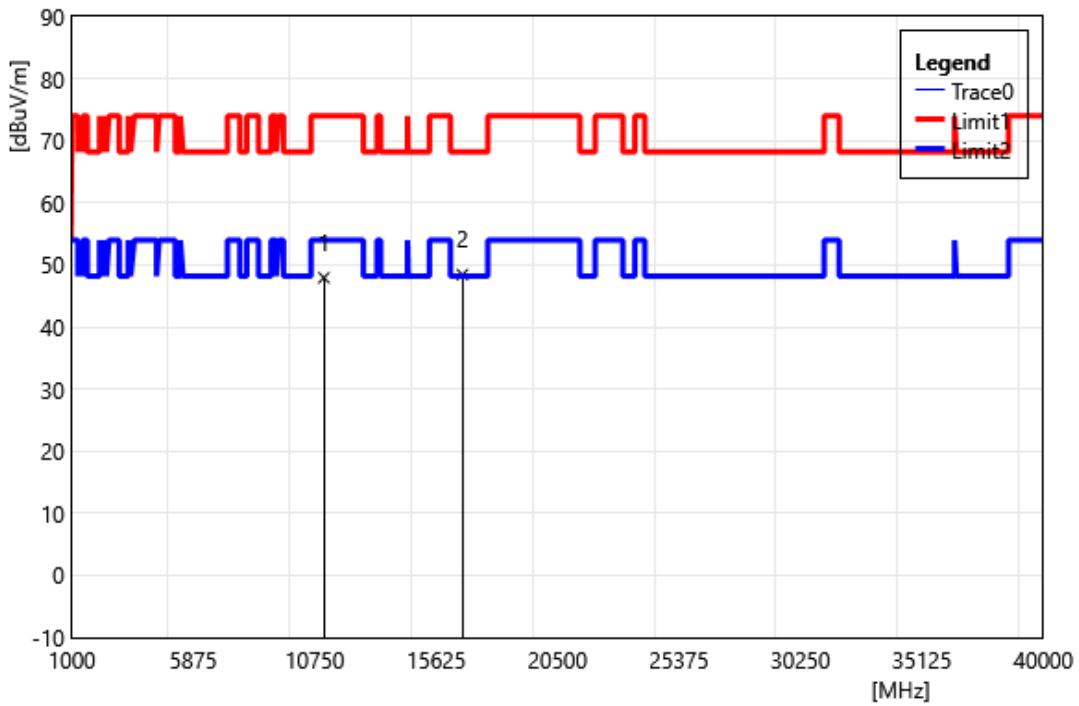


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	35.91	12.03	47.94	74.00	-26.06	PEAK
2	16680.00	33.23	15.21	48.44	68.20	-19.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

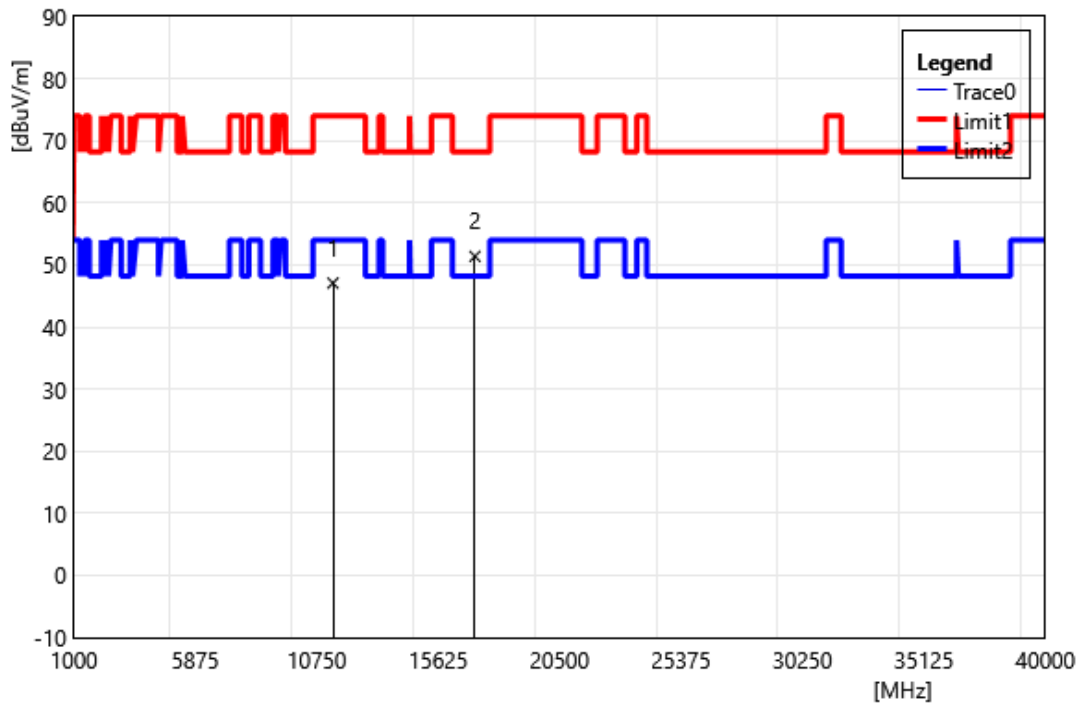


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	34.87	12.21	47.08	74.00	-26.92	PEAK
2	17100.00	34.02	17.37	51.39	68.20	-16.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700 MHz		
Polarization:	Horizontal		
Remark:			

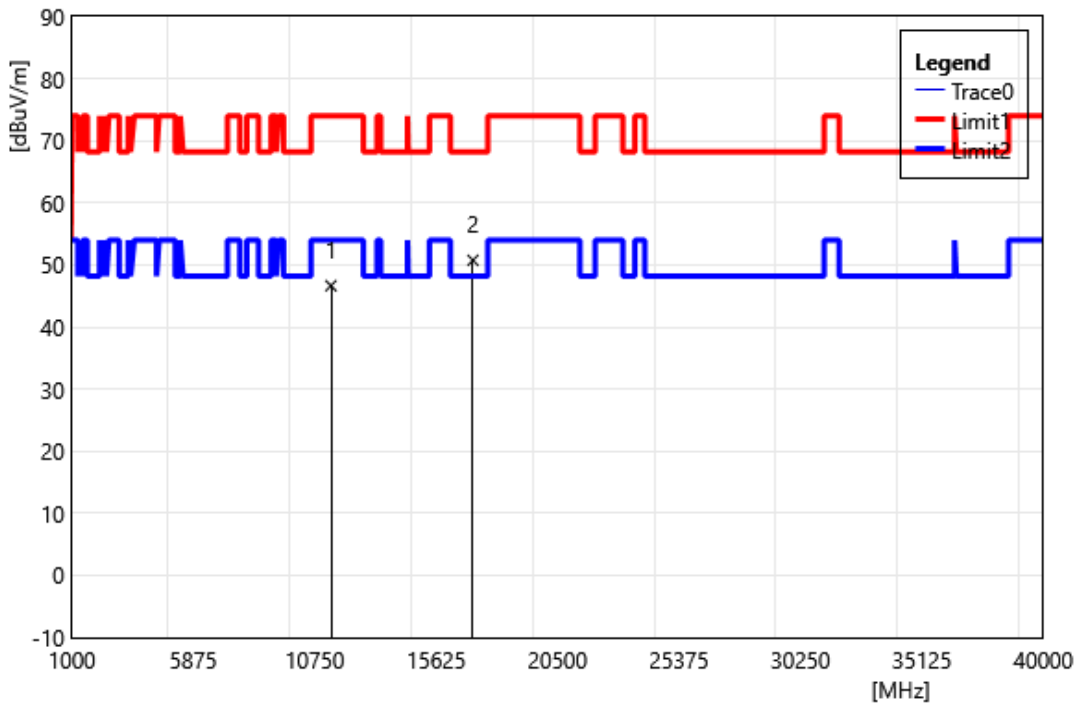


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	34.45	12.21	46.66	74.00	-27.34	PEAK
2	17100.00	33.38	17.37	50.76	68.20	-17.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

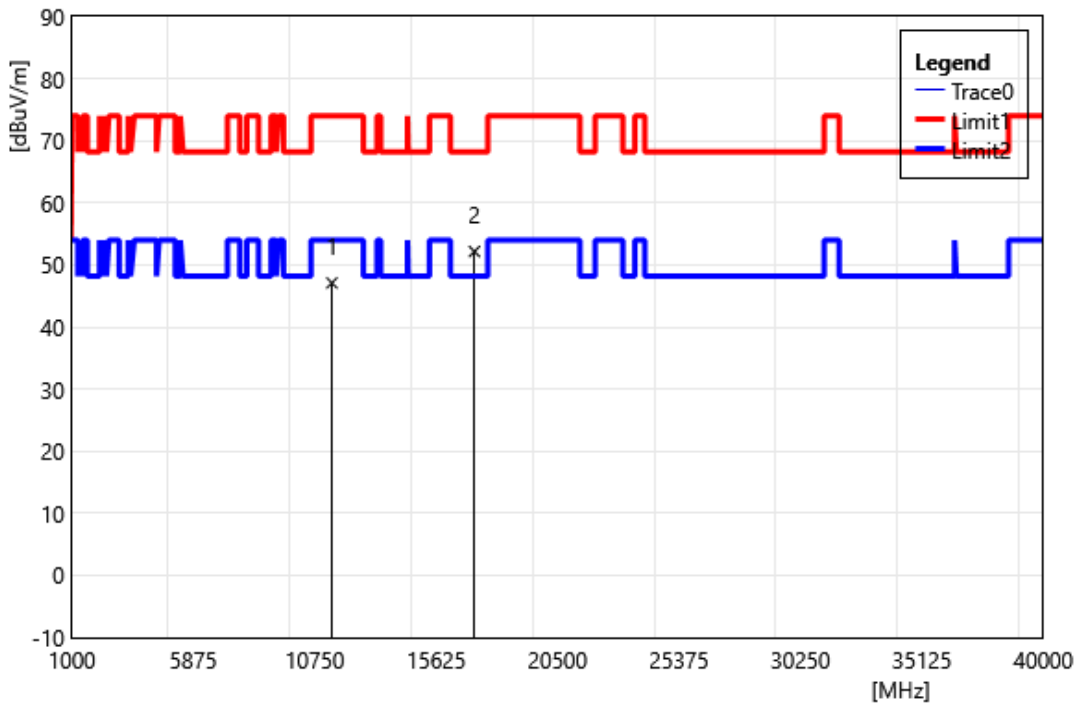


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	34.69	12.41	47.10	74.00	-26.90	PEAK
2	17160.00	34.35	17.82	52.17	68.20	-16.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

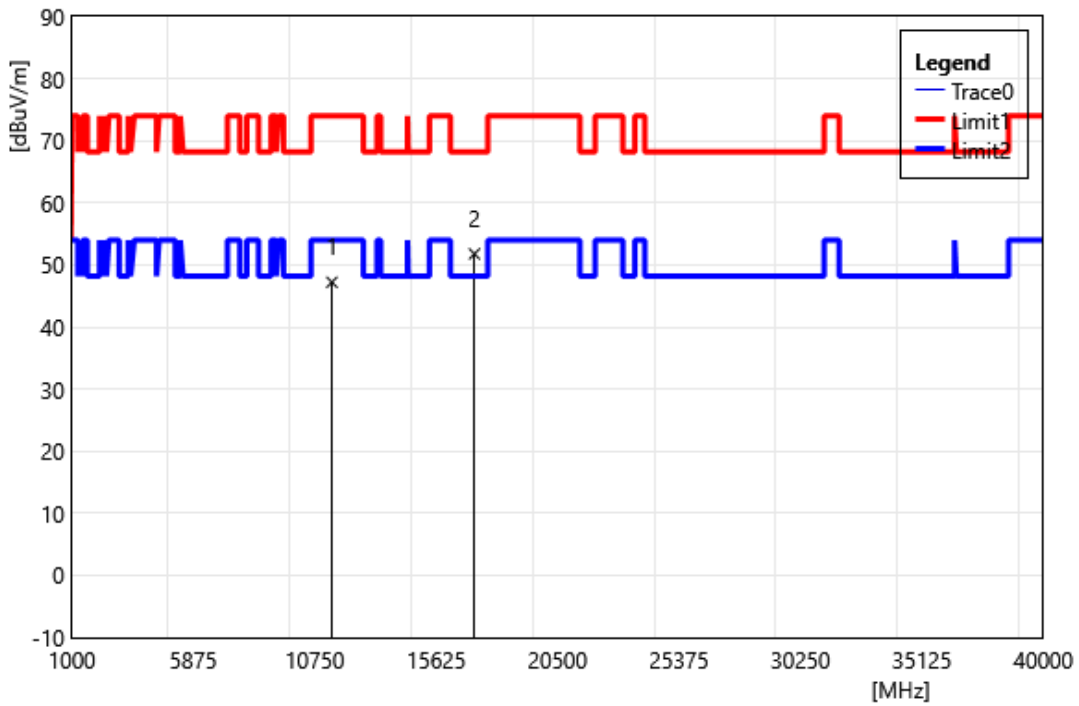


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	34.80	12.41	47.21	74.00	-26.79	PEAK
2	17160.00	33.97	17.82	51.79	68.20	-16.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

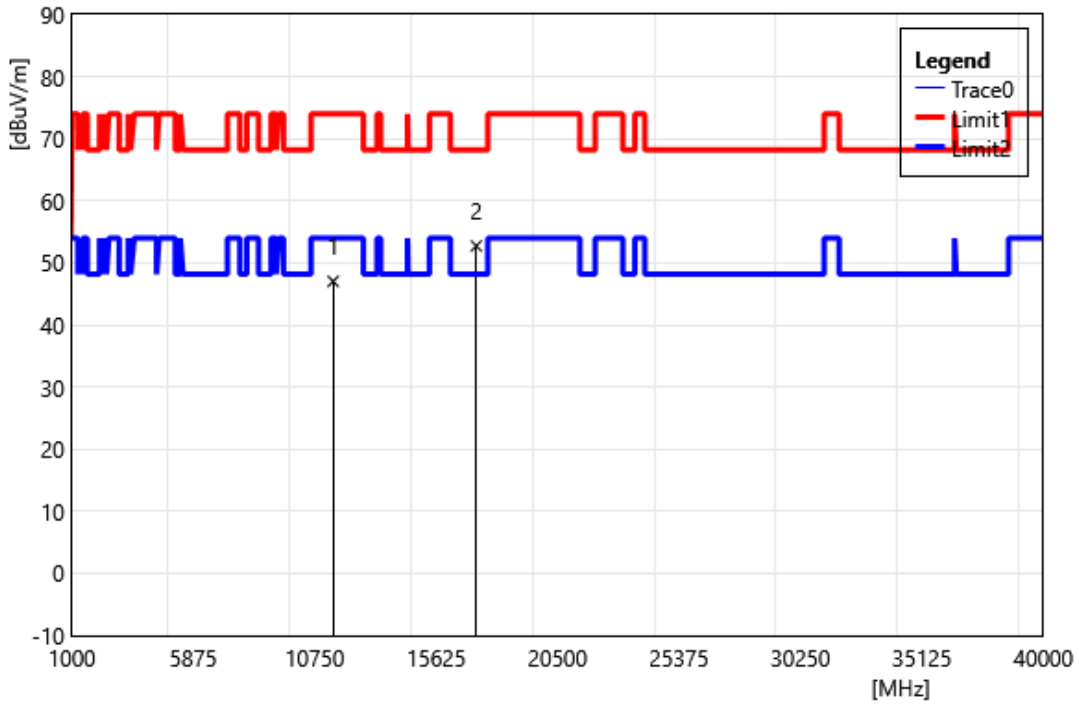


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	34.39	12.65	47.04	74.00	-26.96	PEAK
2	17235.00	34.29	18.45	52.74	68.20	-15.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

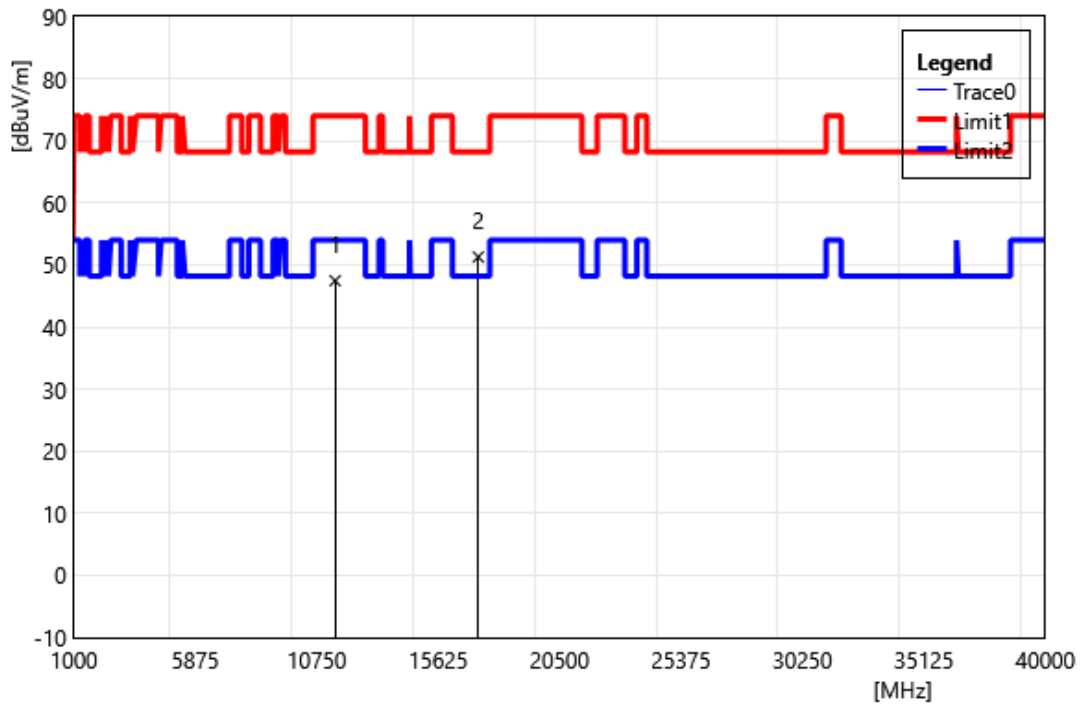


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	34.82	12.65	47.47	74.00	-26.53	PEAK
2	17235.00	32.84	18.45	51.29	68.20	-16.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5785		
	MHz		
Polarization:	Vertical		
Remark:			

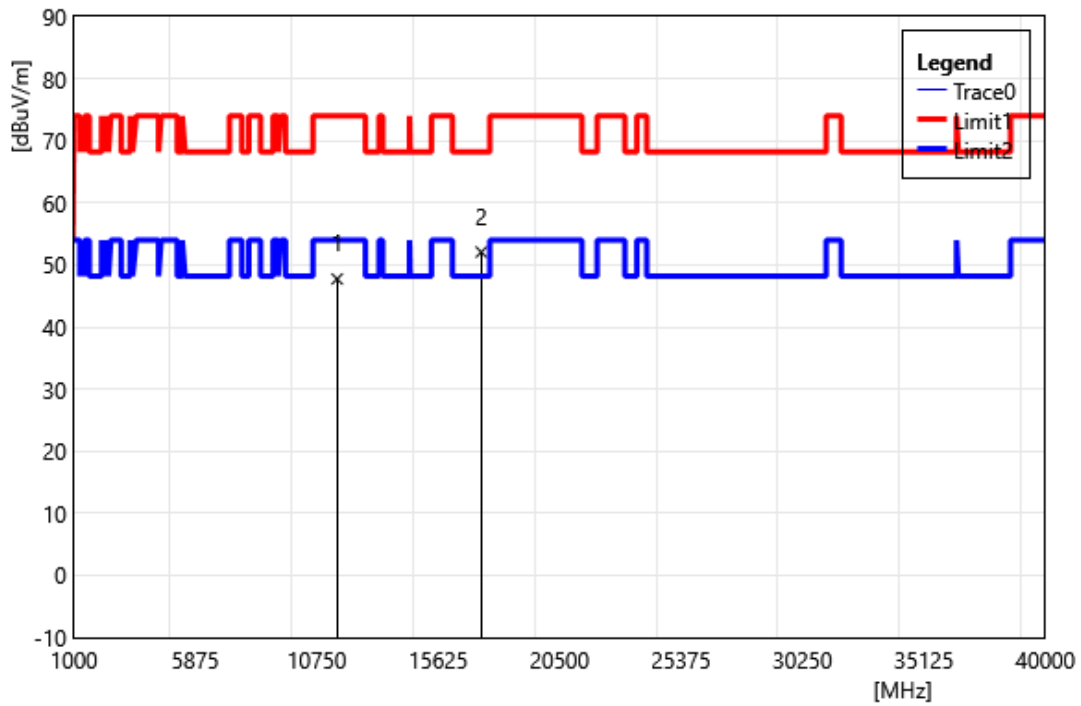


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	35.33	12.42	47.75	74.00	-26.25	PEAK
2	17355.00	32.73	19.36	52.09	68.20	-16.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5785		
	MHz		
Polarization:	Horizontal		
Remark:			

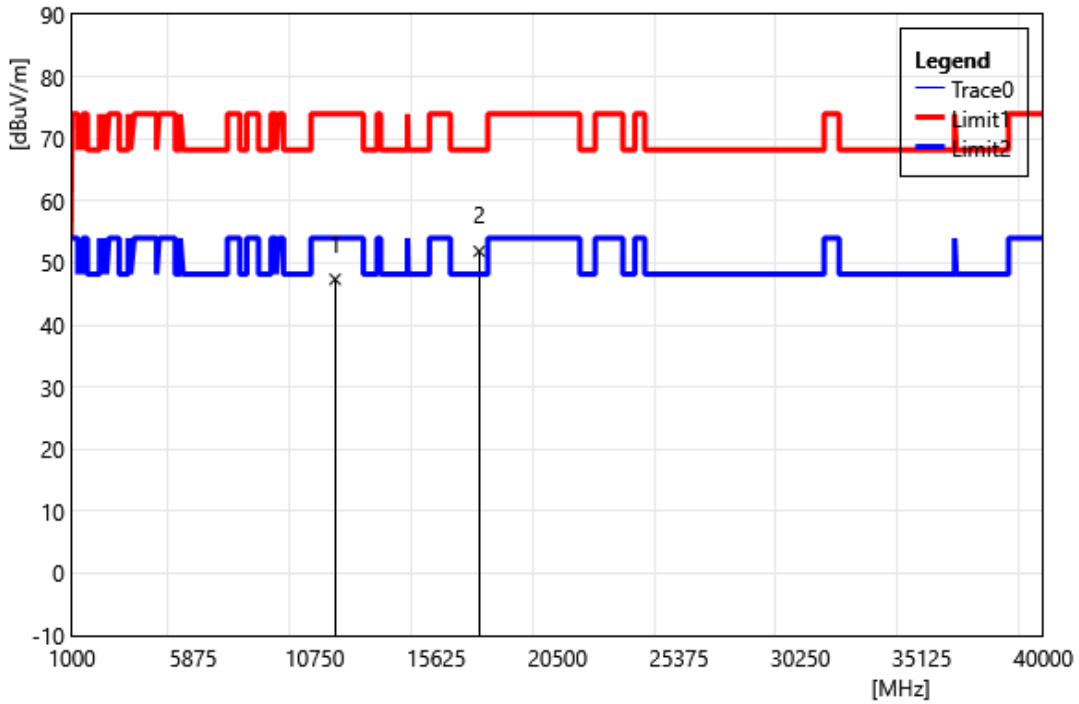


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	34.95	12.42	47.37	74.00	-26.63	PEAK
2	17355.00	32.52	19.36	51.88	68.20	-16.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

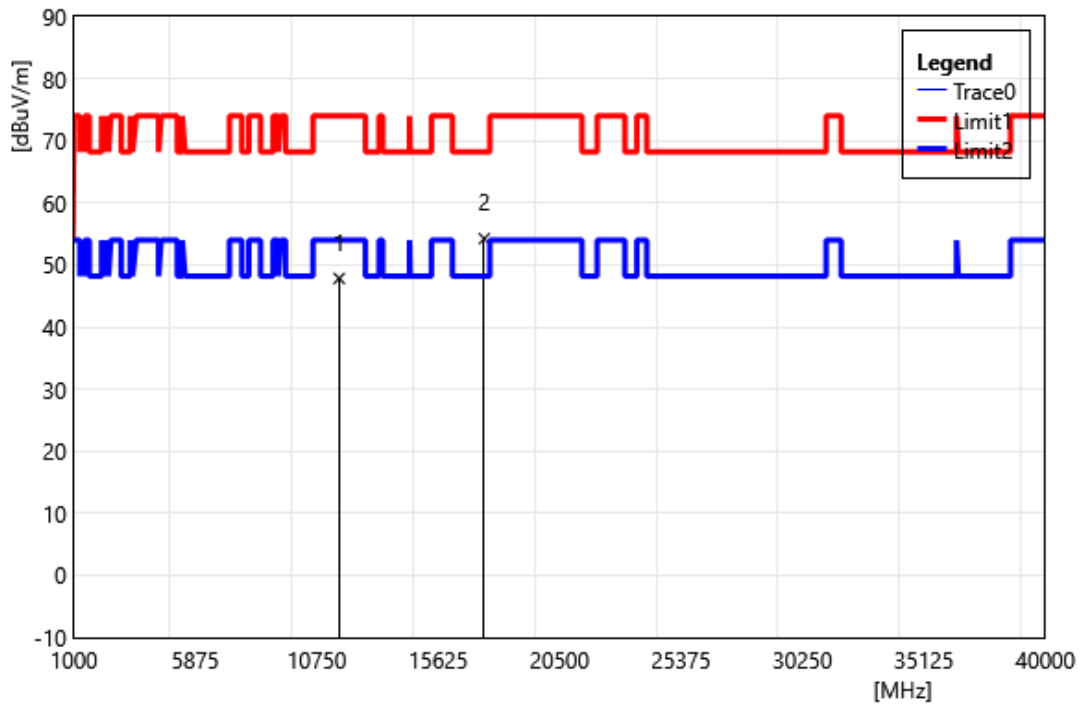


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.68	12.16	47.84	74.00	-26.16	PEAK
2	17475.00	33.94	20.31	54.25	68.20	-13.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

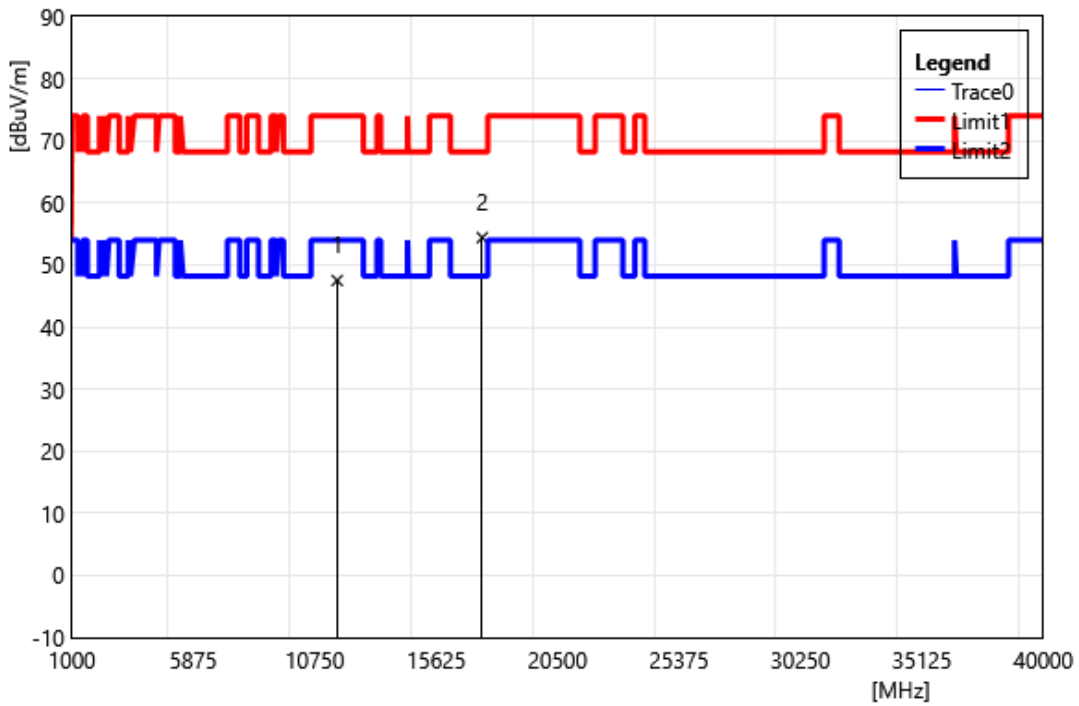


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.34	12.16	47.50	74.00	-26.50	PEAK
2	17475.00	34.09	20.31	54.40	68.20	-13.80	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

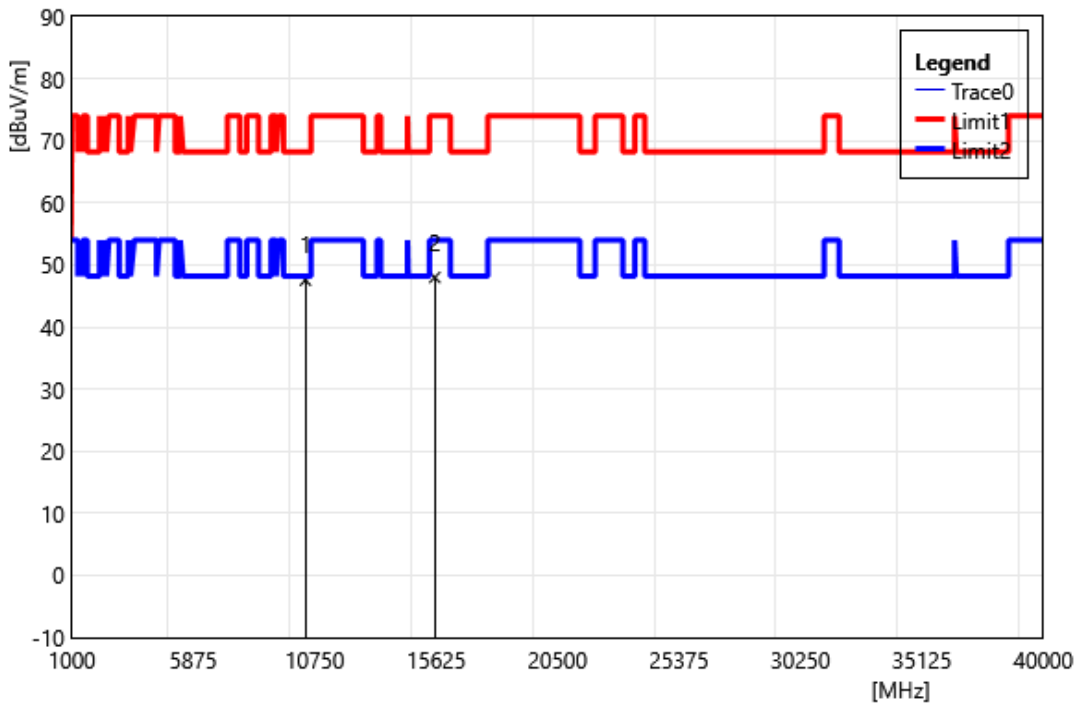


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	36.28	11.28	47.56	68.20	-20.64	PEAK
2	15570.00	33.97	14.02	47.99	74.00	-26.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

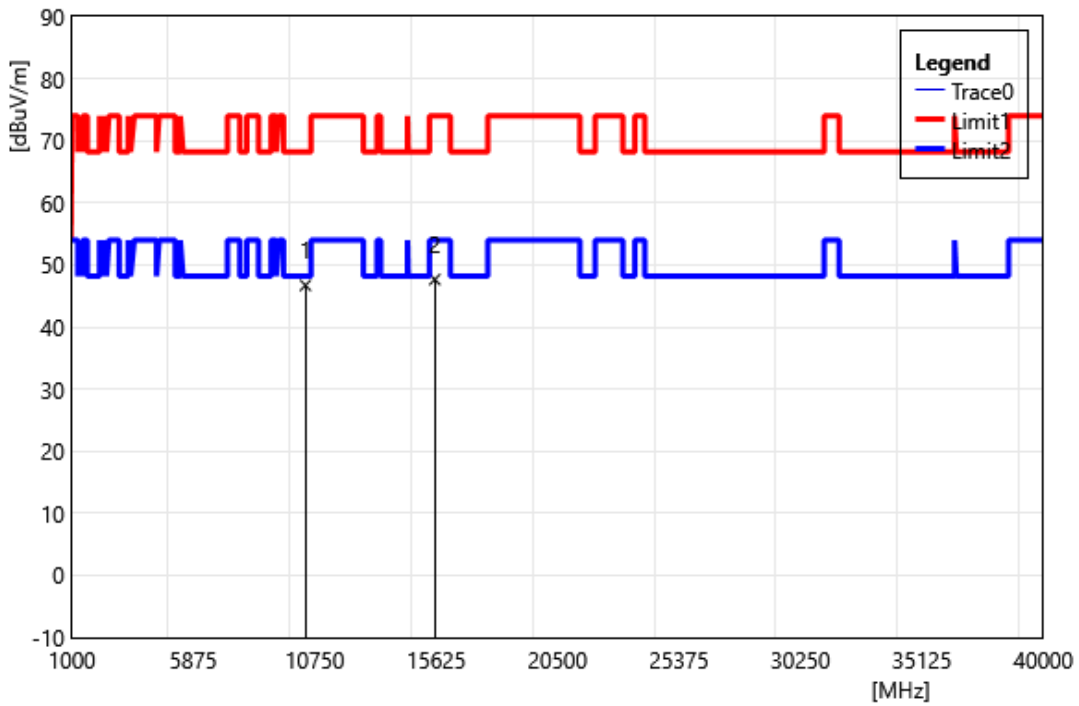


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	35.44	11.28	46.72	68.20	-21.48	PEAK
2	15570.00	33.64	14.02	47.66	74.00	-26.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

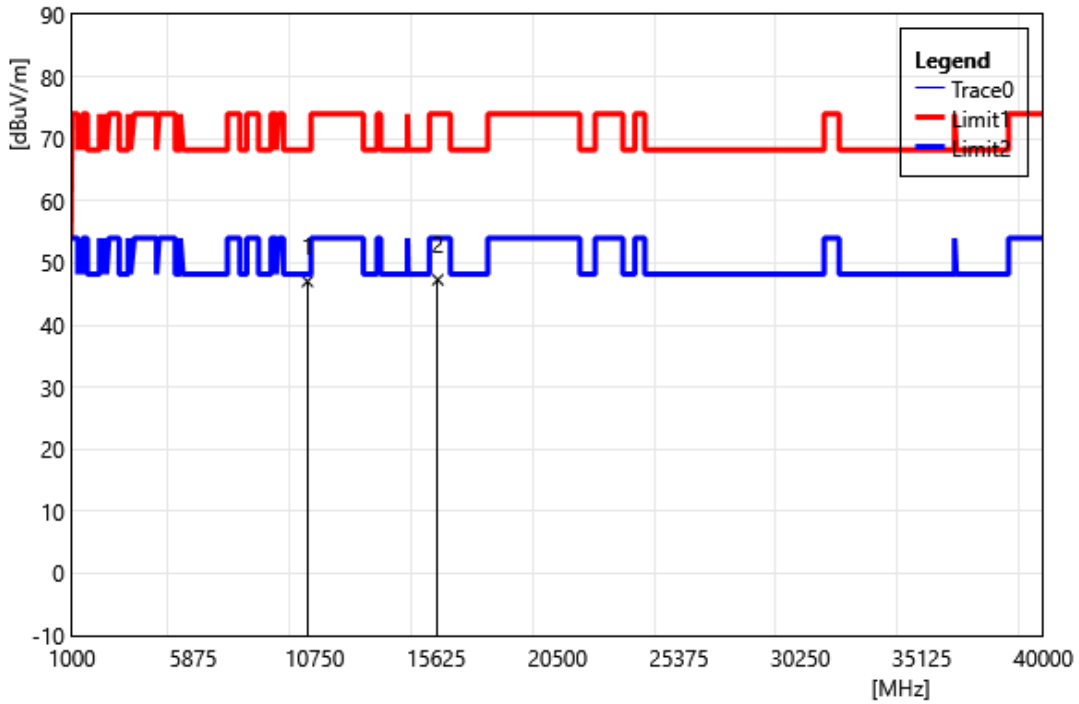


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	35.52	11.51	47.03	68.20	-21.17	PEAK
2	15690.00	33.44	13.85	47.29	74.00	-26.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

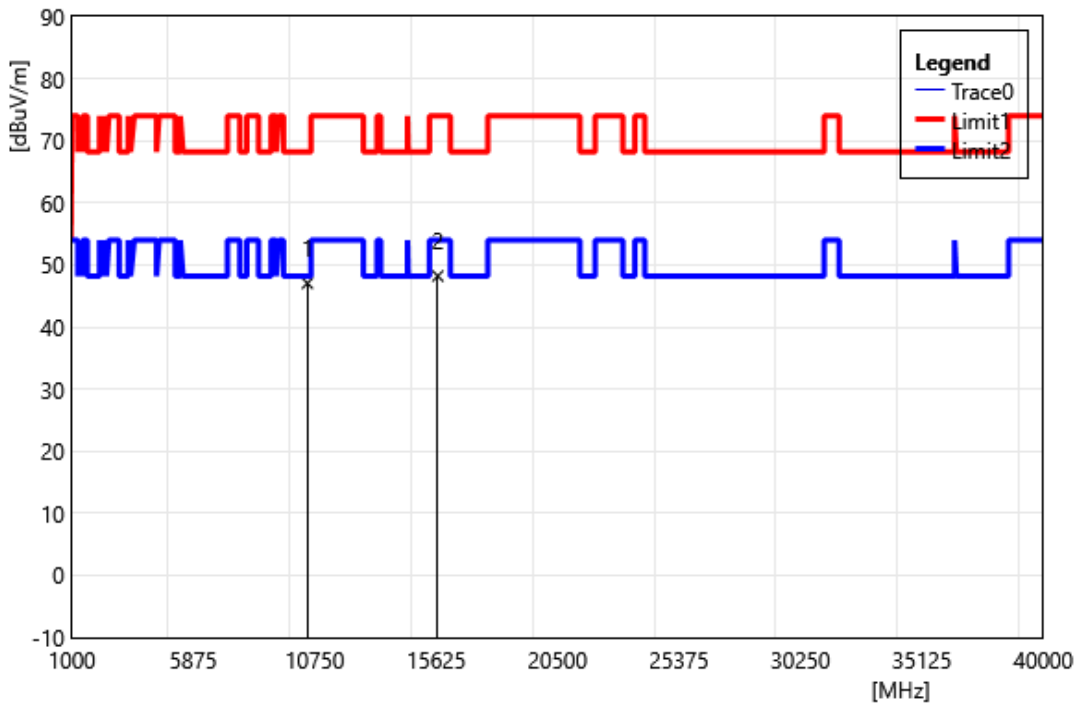


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	35.55	11.51	47.06	68.20	-21.14	PEAK
2	15690.00	34.36	13.85	48.21	74.00	-25.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

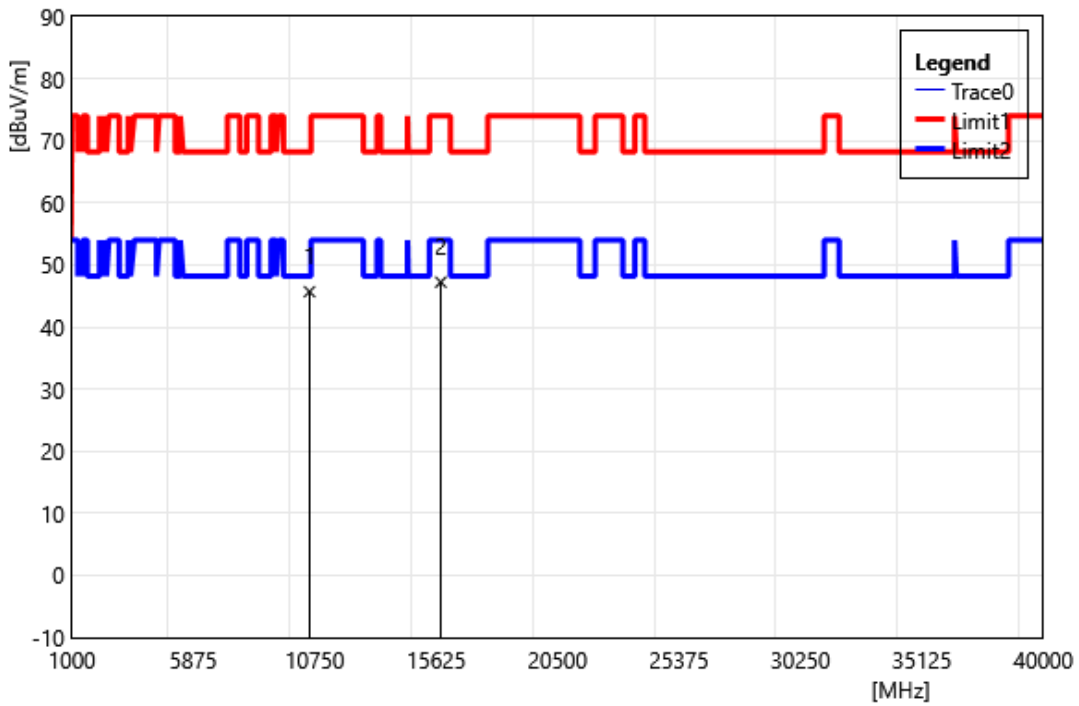


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	34.11	11.58	45.69	68.20	-22.51	PEAK
2	15810.00	33.54	13.69	47.23	74.00	-26.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

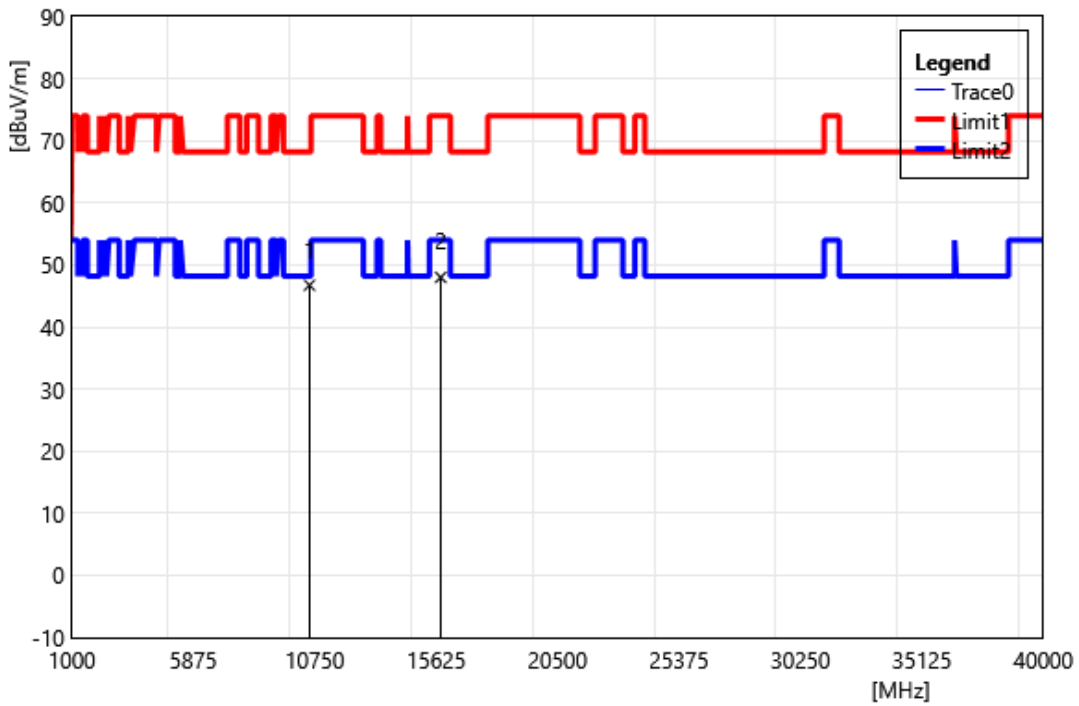


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	35.15	11.58	46.73	68.20	-21.47	PEAK
2	15810.00	34.32	13.69	48.01	74.00	-25.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

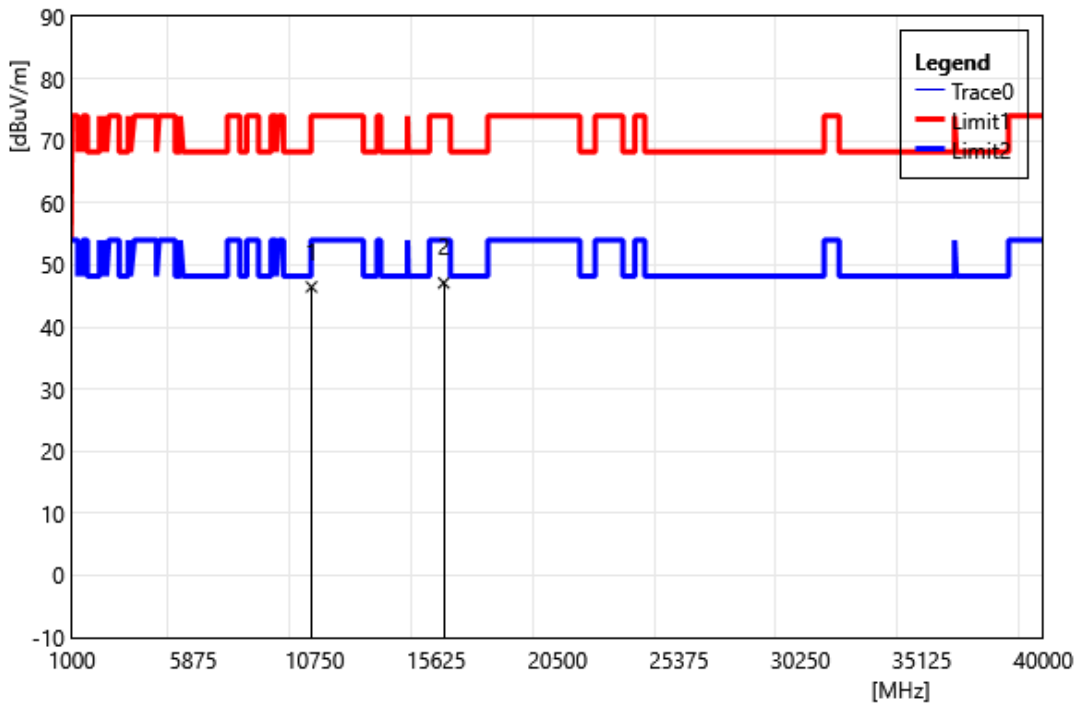


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	34.91	11.55	46.46	74.00	-27.54	PEAK
2	15930.00	33.80	13.31	47.11	74.00	-26.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

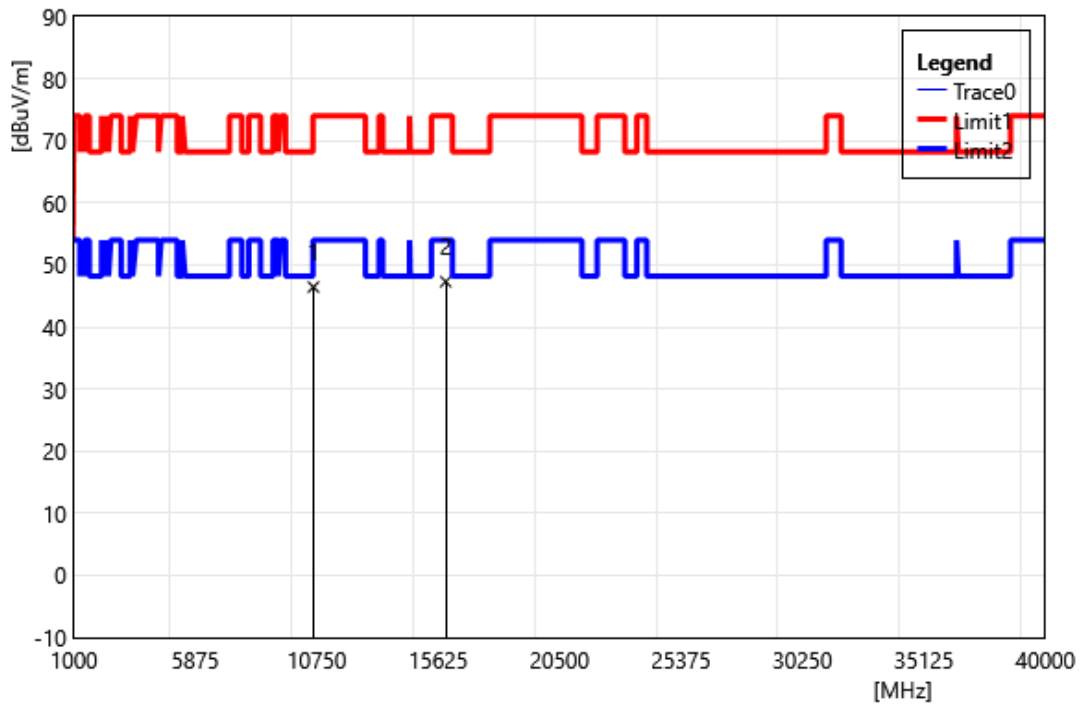


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	34.89	11.55	46.44	74.00	-27.56	PEAK
2	15930.00	34.00	13.31	47.31	74.00	-26.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

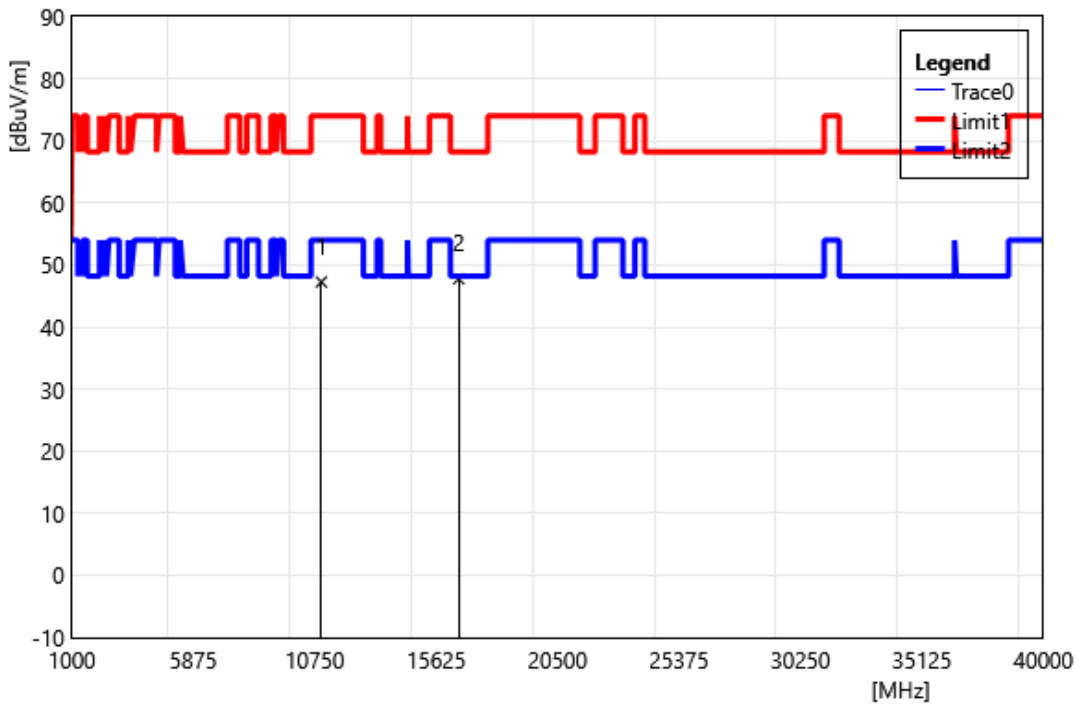


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	35.41	11.85	47.26	74.00	-26.74	PEAK
2	16530.00	33.29	14.47	47.76	68.20	-20.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

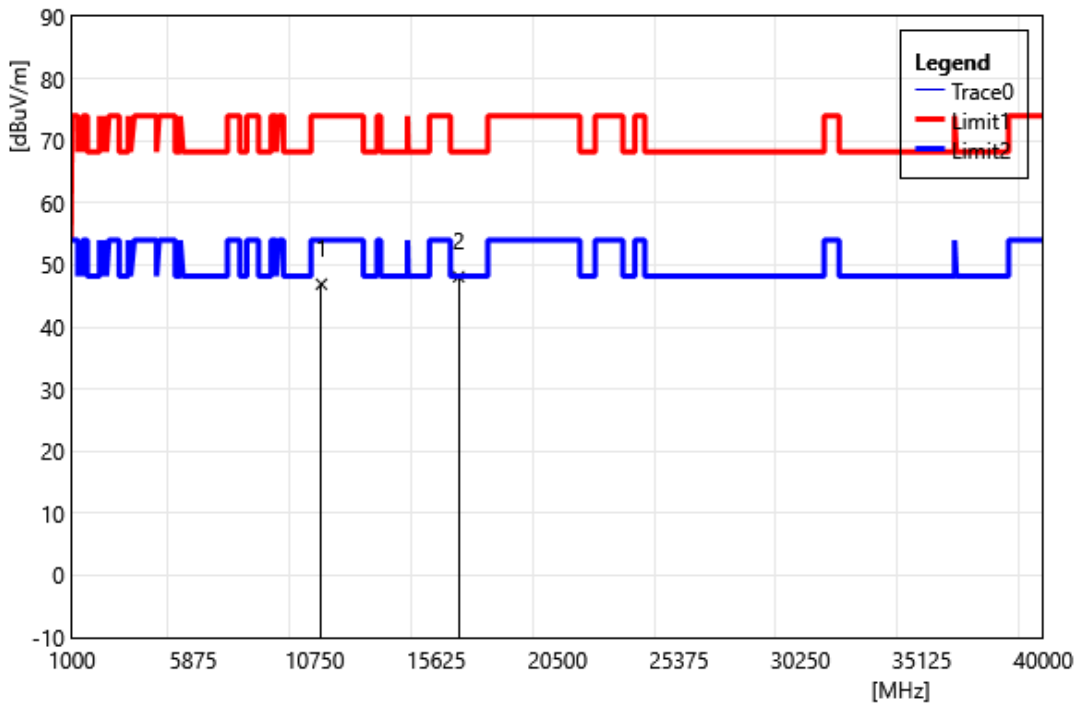


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	35.05	11.85	46.90	74.00	-27.10	PEAK
2	16530.00	33.64	14.47	48.11	68.20	-20.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

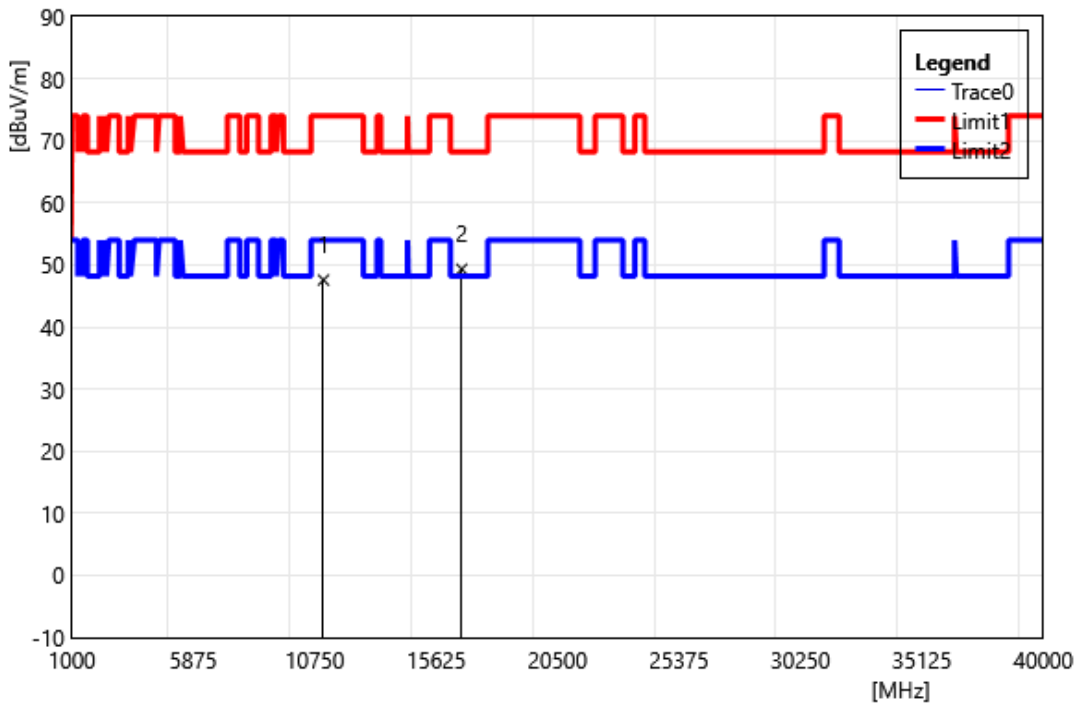


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	35.51	12.07	47.58	74.00	-26.42	PEAK
2	16650.00	34.24	15.08	49.32	68.20	-18.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

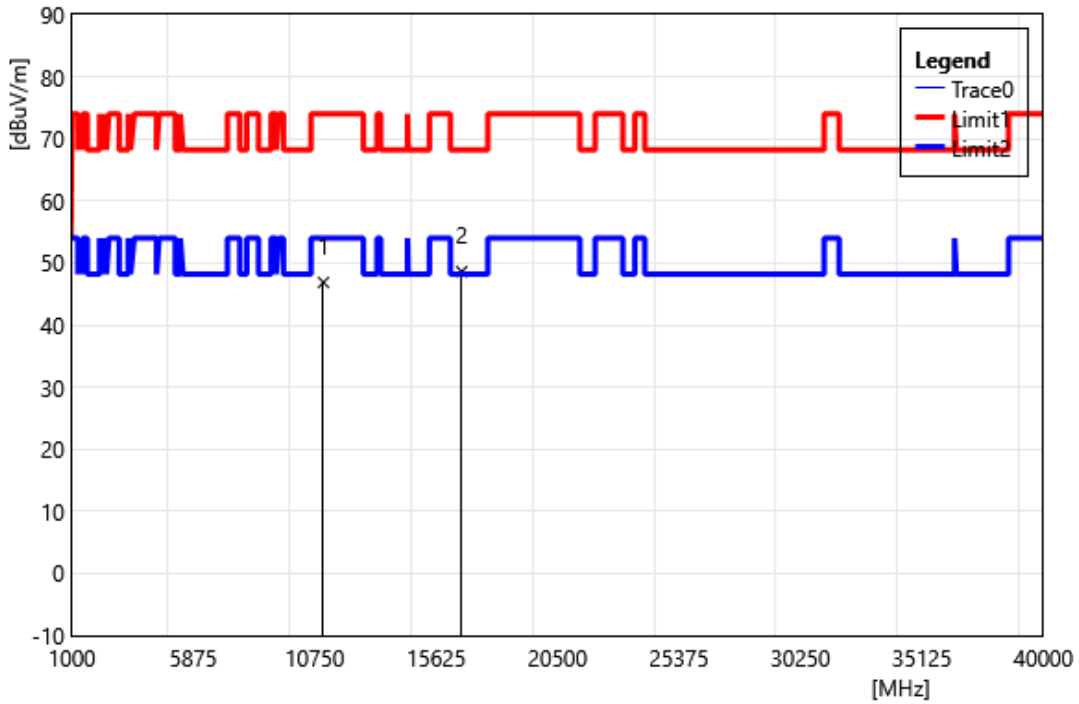


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	34.79	12.07	46.86	74.00	-27.14	PEAK
2	16650.00	33.52	15.08	48.60	68.20	-19.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

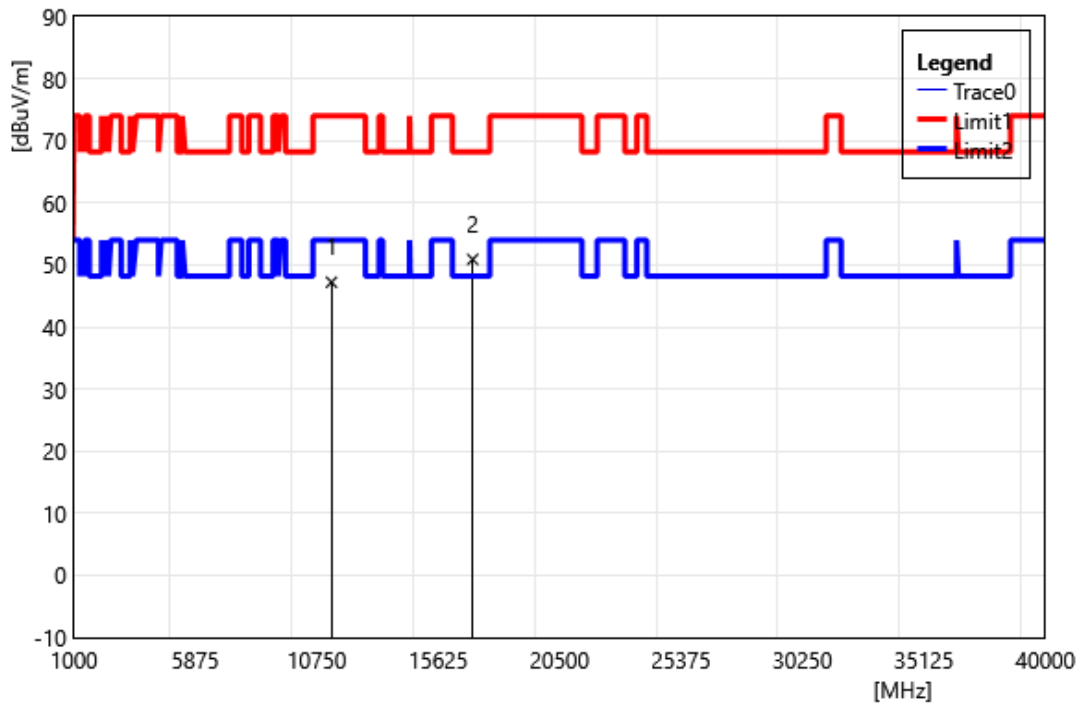


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	35.17	12.05	47.22	74.00	-26.78	PEAK
2	17010.00	34.10	16.79	50.89	68.20	-17.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

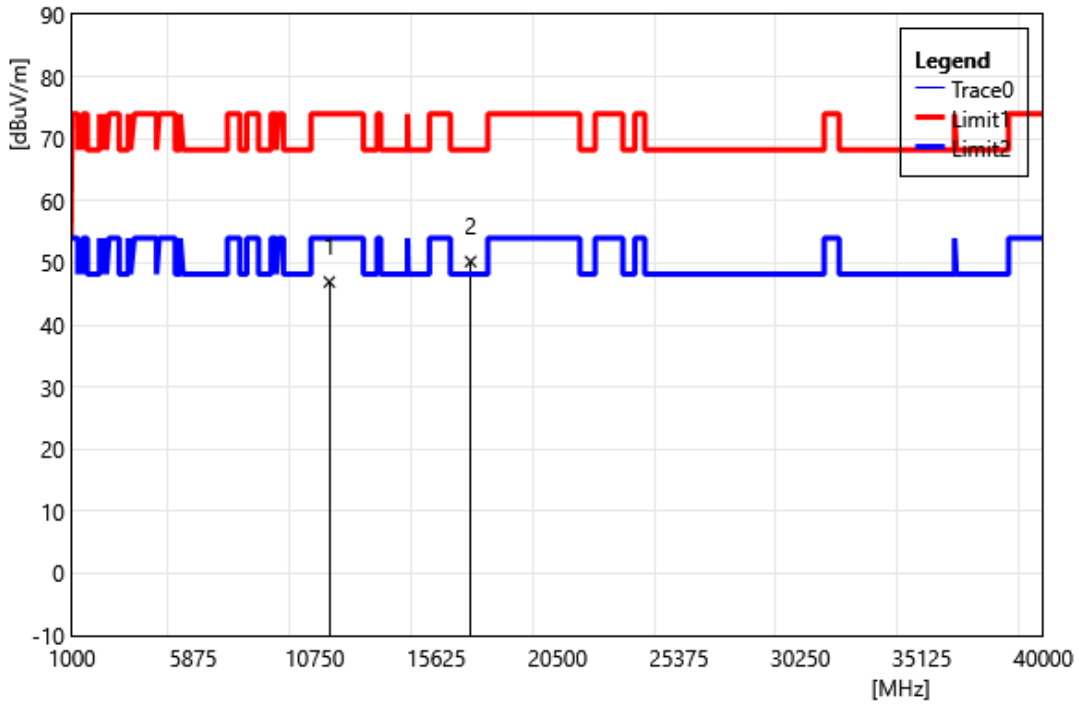


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	34.89	12.05	46.94	74.00	-27.06	PEAK
2	17010.00	33.43	16.79	50.22	68.20	-17.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

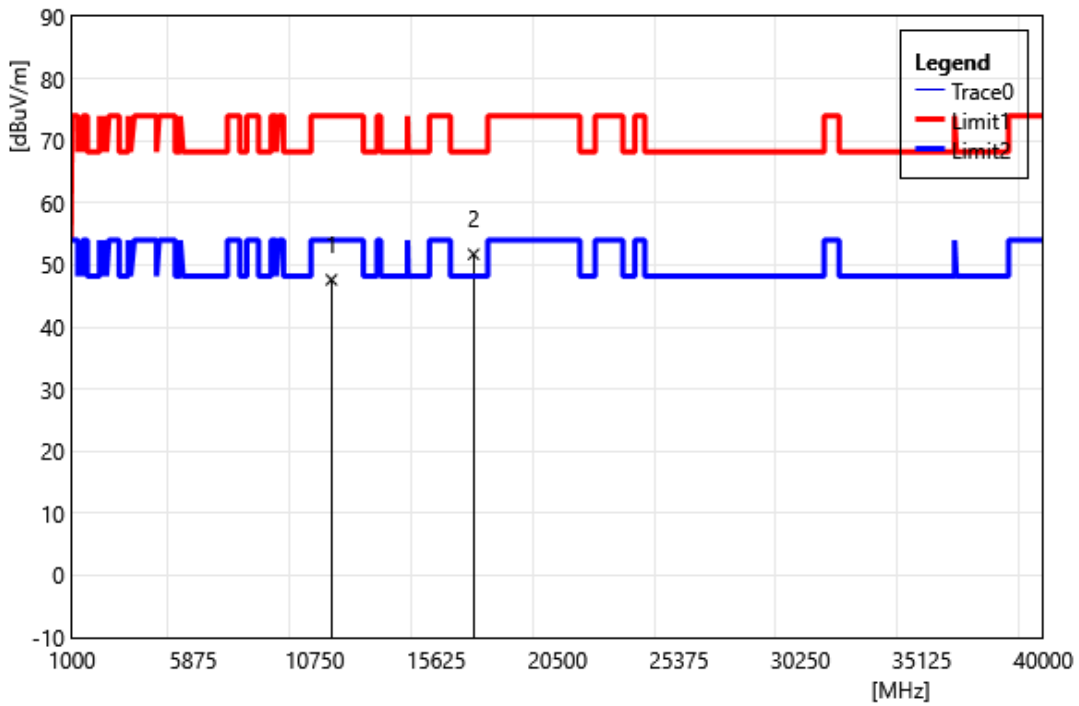


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	35.30	12.31	47.61	74.00	-26.39	PEAK
2	17130.00	34.14	17.60	51.74	68.20	-16.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

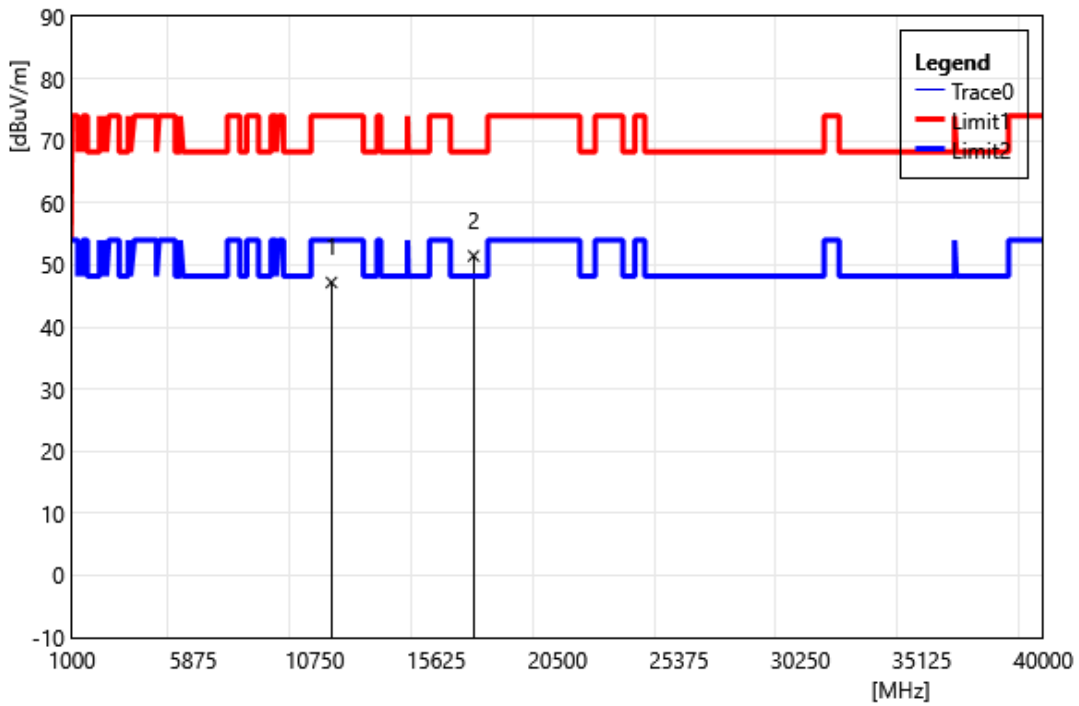


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	34.87	12.31	47.18	74.00	-26.82	PEAK
2	17130.00	33.86	17.60	51.46	68.20	-16.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

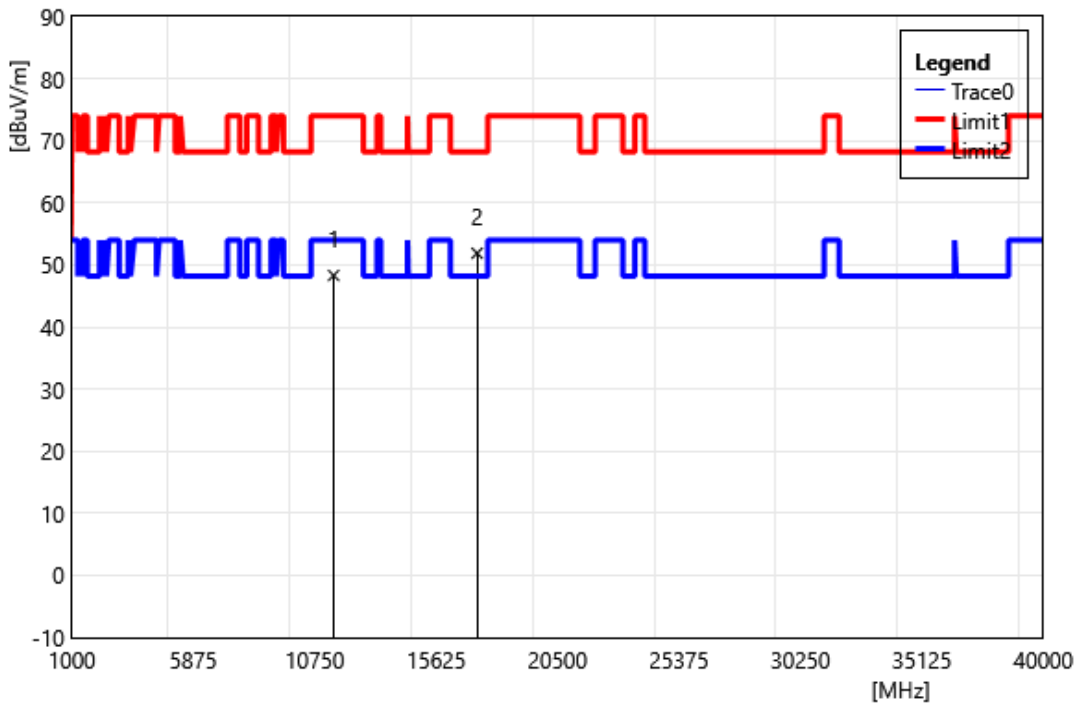


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	35.65	12.66	48.31	74.00	-25.69	PEAK
2	17265.00	33.16	18.73	51.89	68.20	-16.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

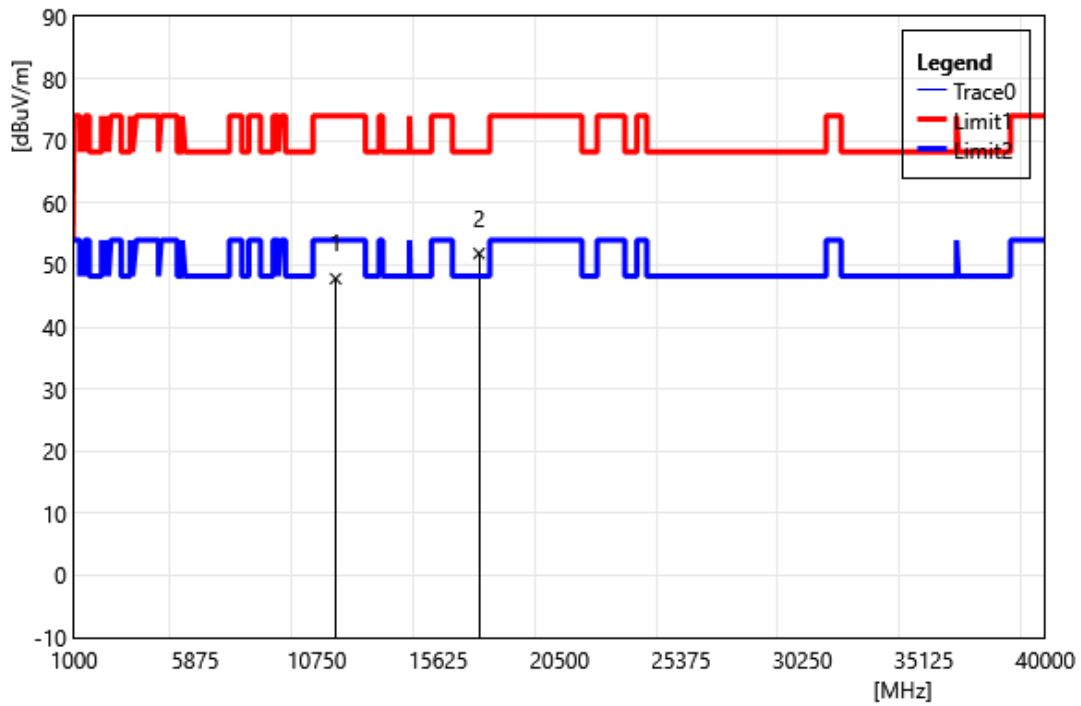


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	35.13	12.66	47.79	74.00	-26.21	PEAK
2	17265.00	33.12	18.73	51.85	68.20	-16.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

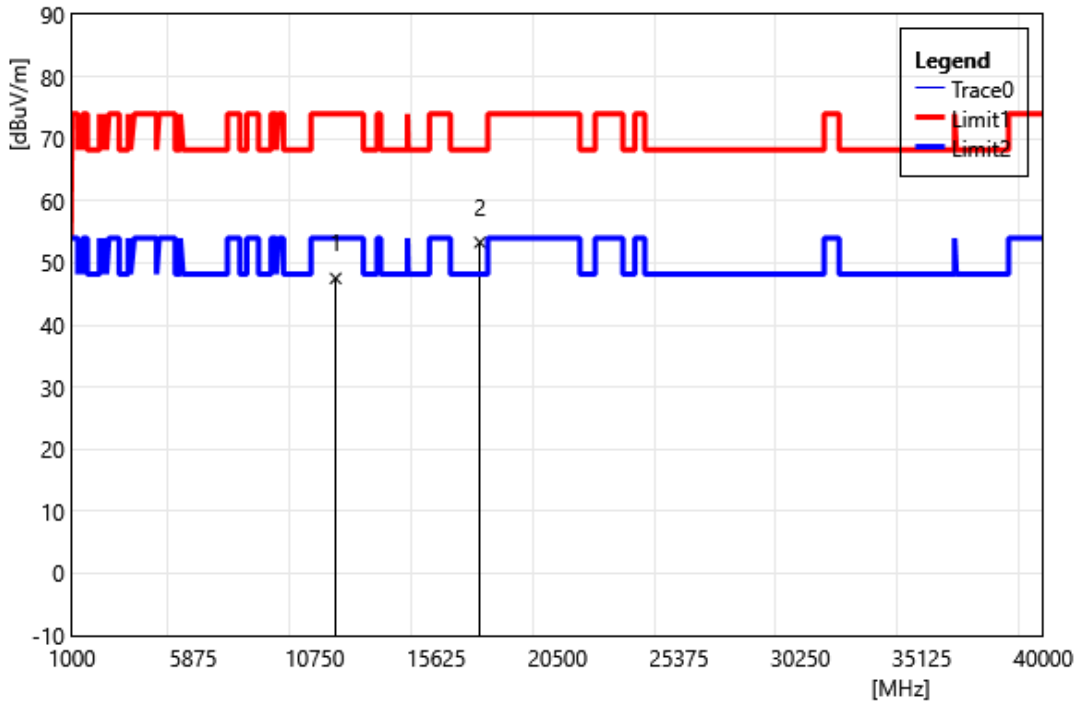


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	35.17	12.34	47.51	74.00	-26.49	PEAK
2	17385.00	33.79	19.52	53.31	68.20	-14.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

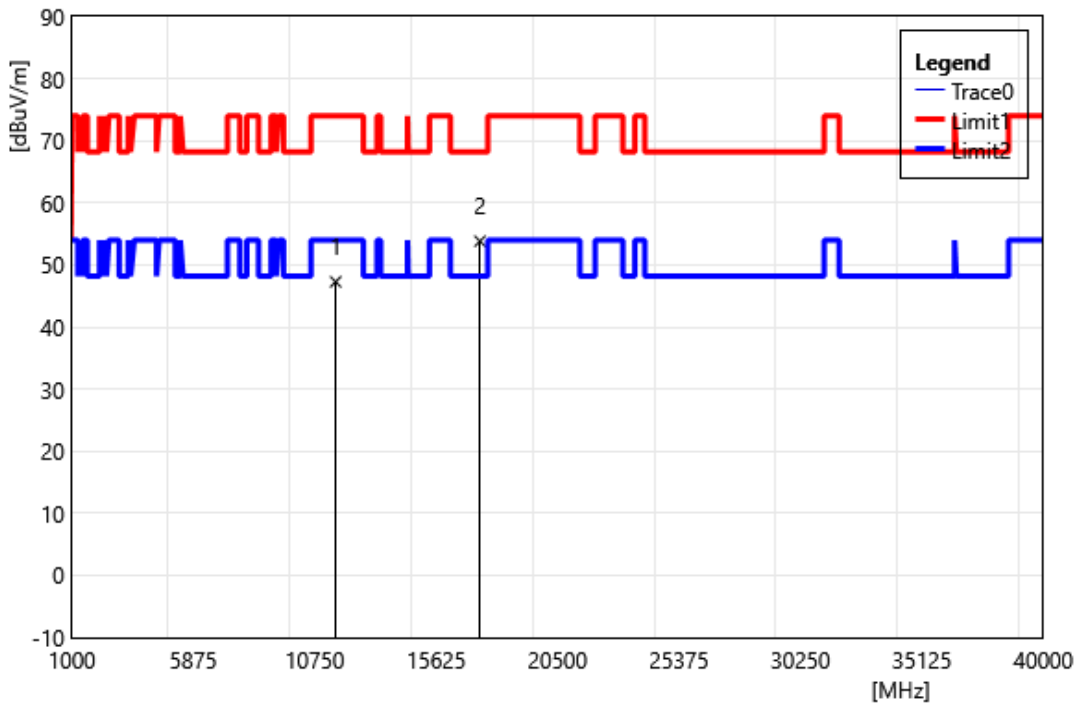


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	34.95	12.34	47.29	74.00	-26.71	PEAK
2	17385.00	34.31	19.52	53.83	68.20	-14.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

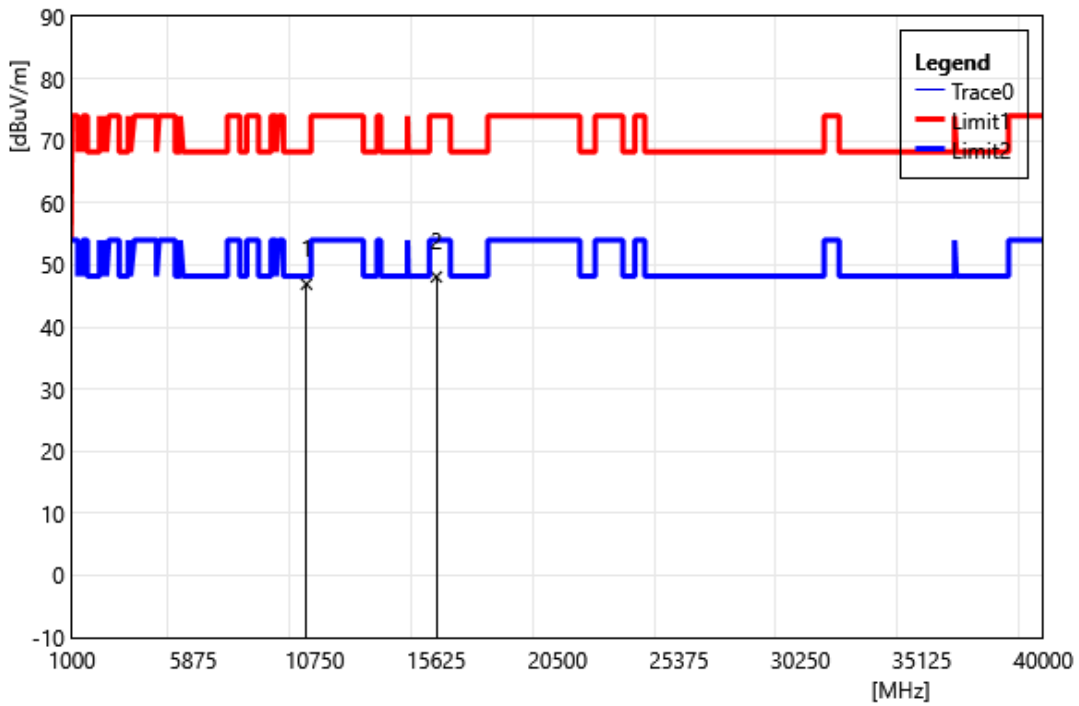


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	35.49	11.42	46.91	68.20	-21.29	PEAK
2	15630.00	34.16	13.92	48.08	74.00	-25.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

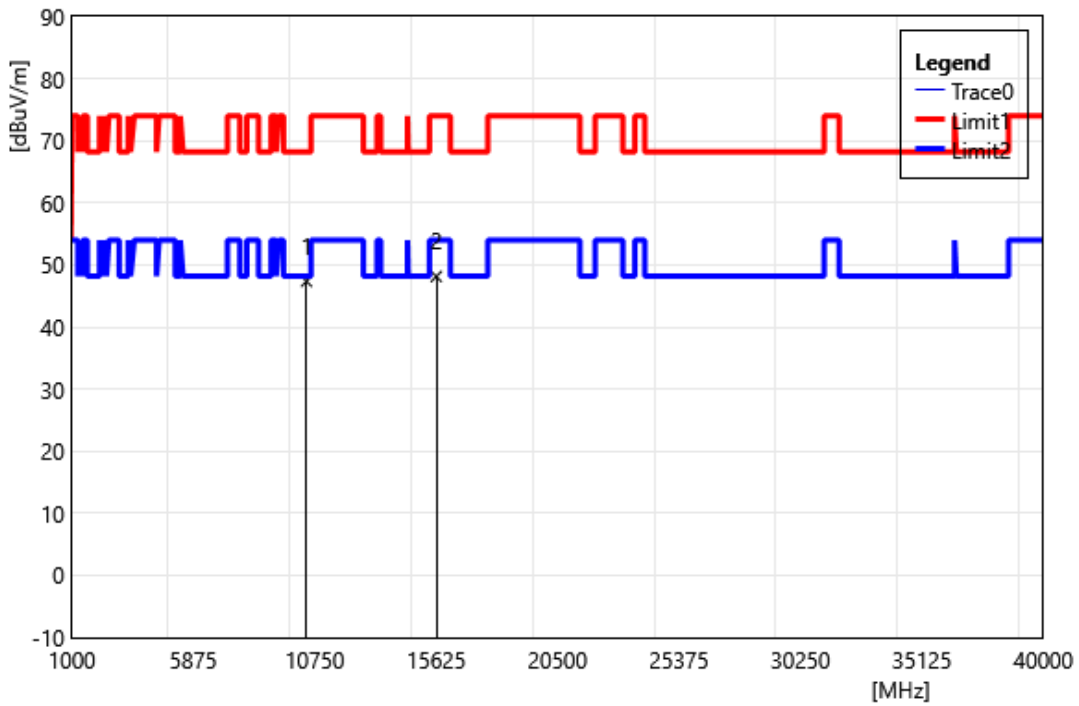


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	35.97	11.42	47.39	68.20	-20.81	PEAK
2	15630.00	34.22	13.92	48.14	74.00	-25.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

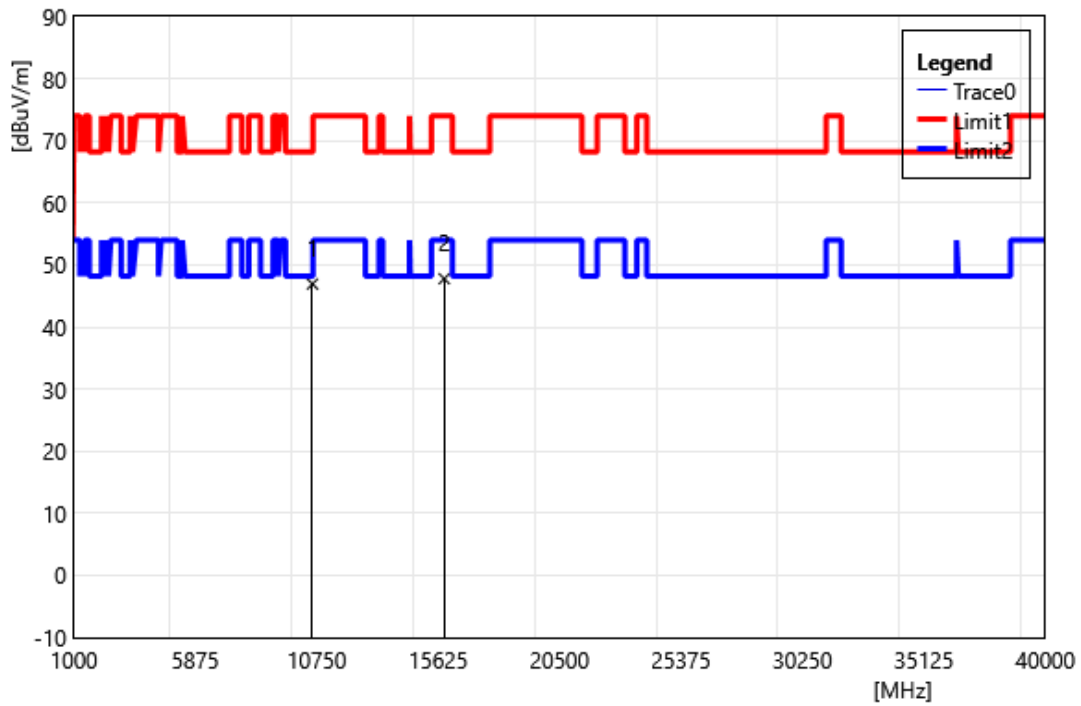


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.38	11.55	46.93	68.20	-21.27	PEAK
2	15870.00	34.29	13.50	47.79	74.00	-26.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

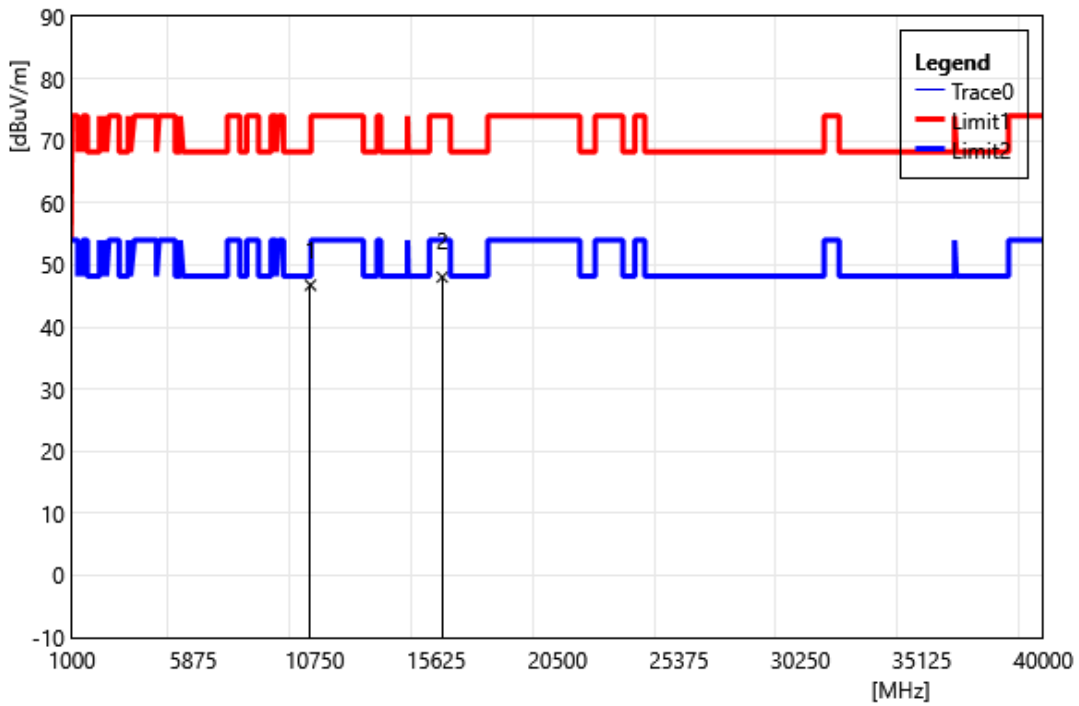


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.20	11.55	46.75	68.20	-21.45	PEAK
2	15870.00	34.55	13.50	48.05	74.00	-25.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

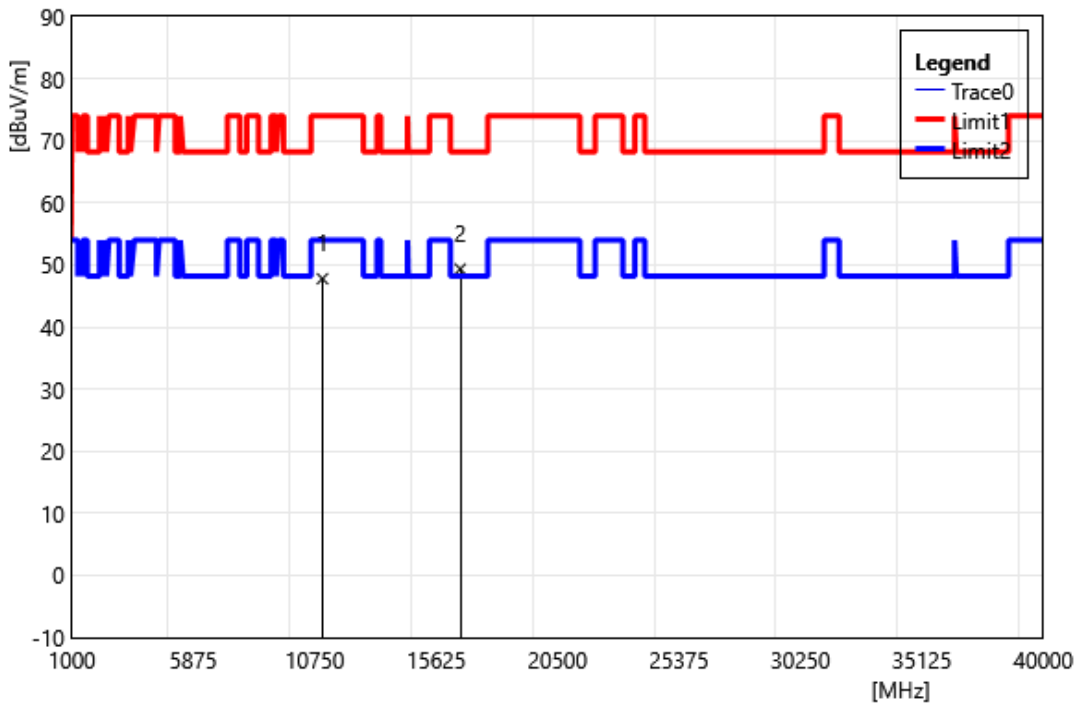


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	35.82	11.96	47.78	74.00	-26.22	PEAK
2	16590.00	34.53	14.80	49.33	68.20	-18.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

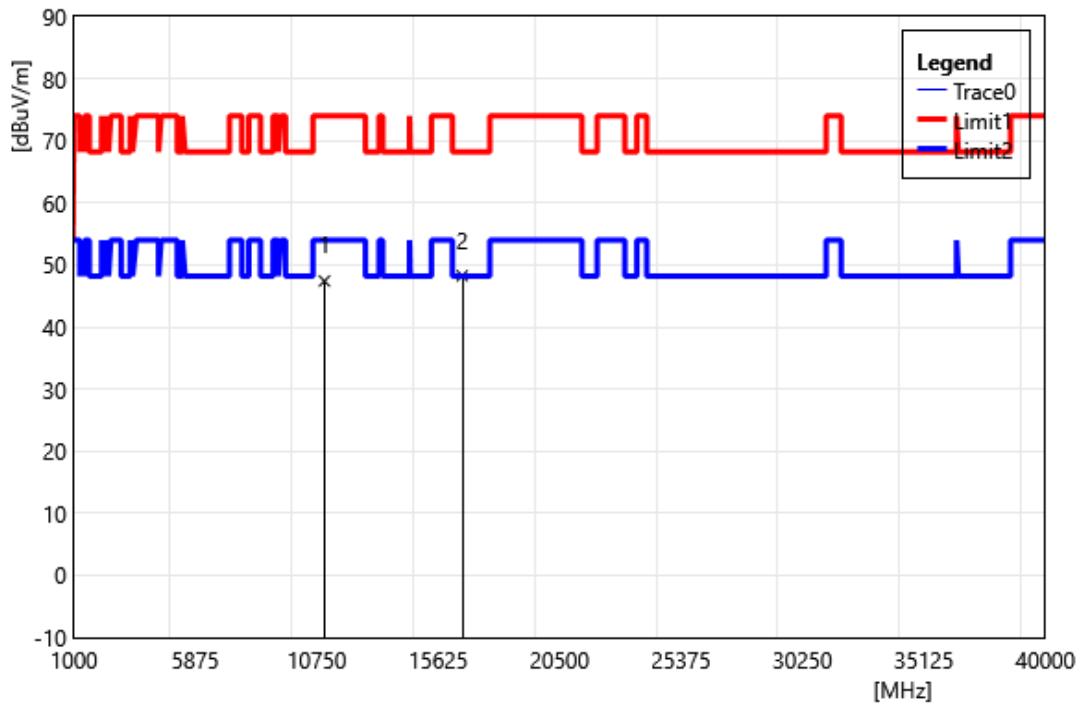


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	35.46	11.96	47.42	74.00	-26.58	PEAK
2	16590.00	33.46	14.80	48.26	68.20	-19.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

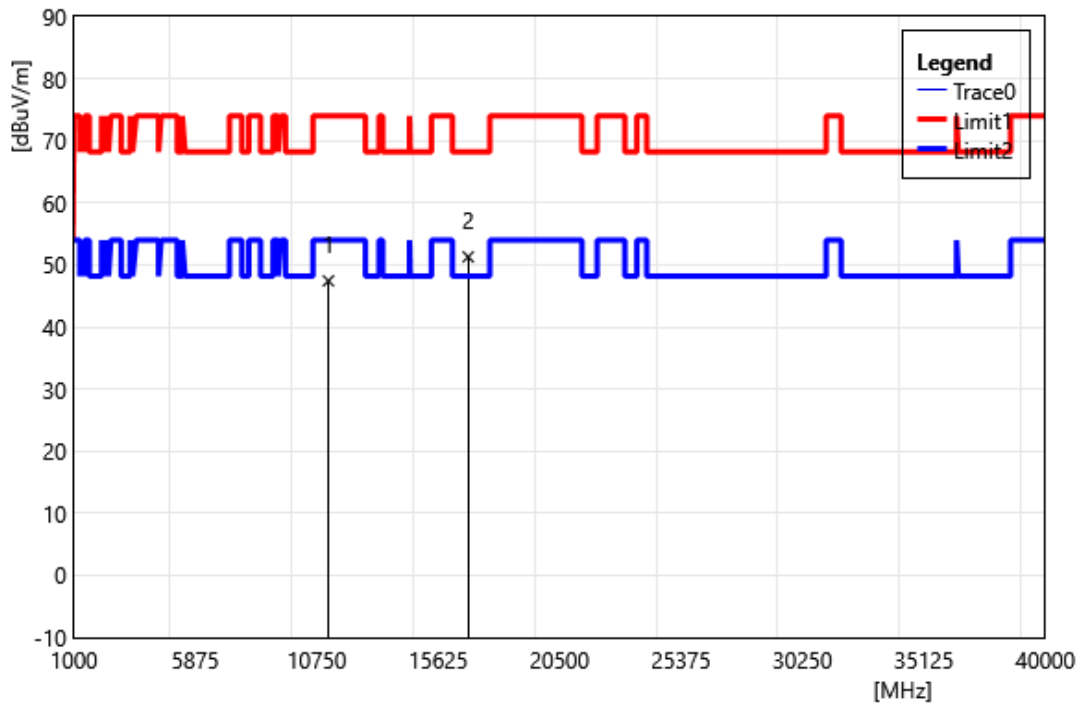


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.56	11.87	47.43	74.00	-26.57	PEAK
2	16830.00	35.20	16.11	51.31	68.20	-16.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

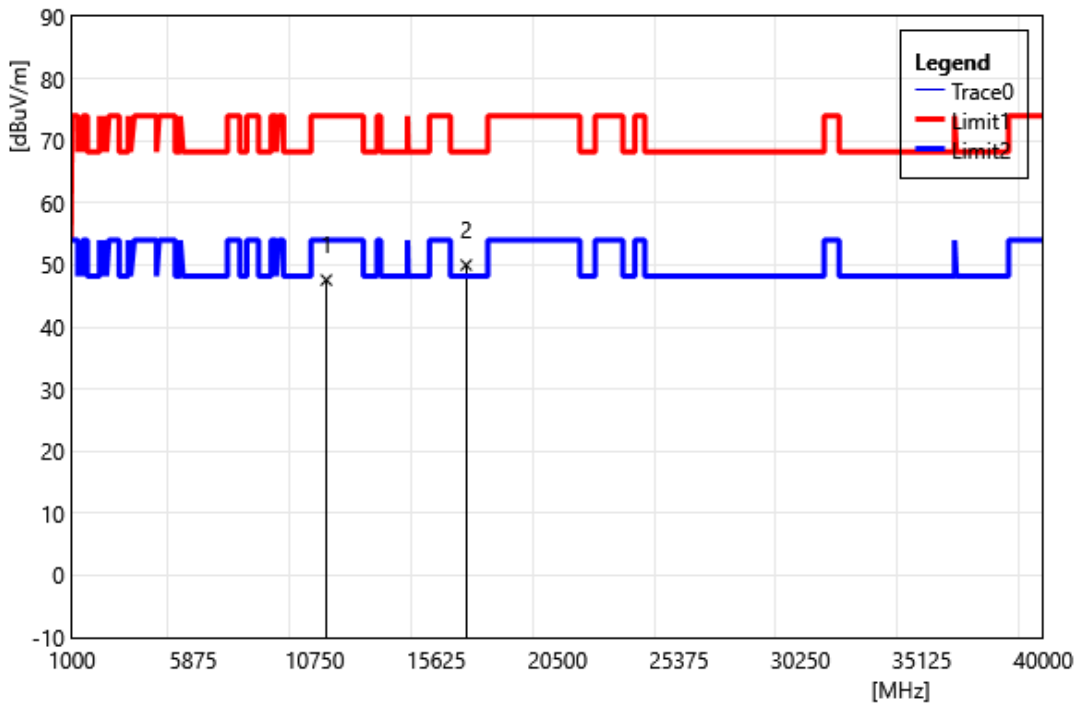


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.71	11.87	47.58	74.00	-26.42	PEAK
2	16830.00	33.87	16.11	49.98	68.20	-18.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

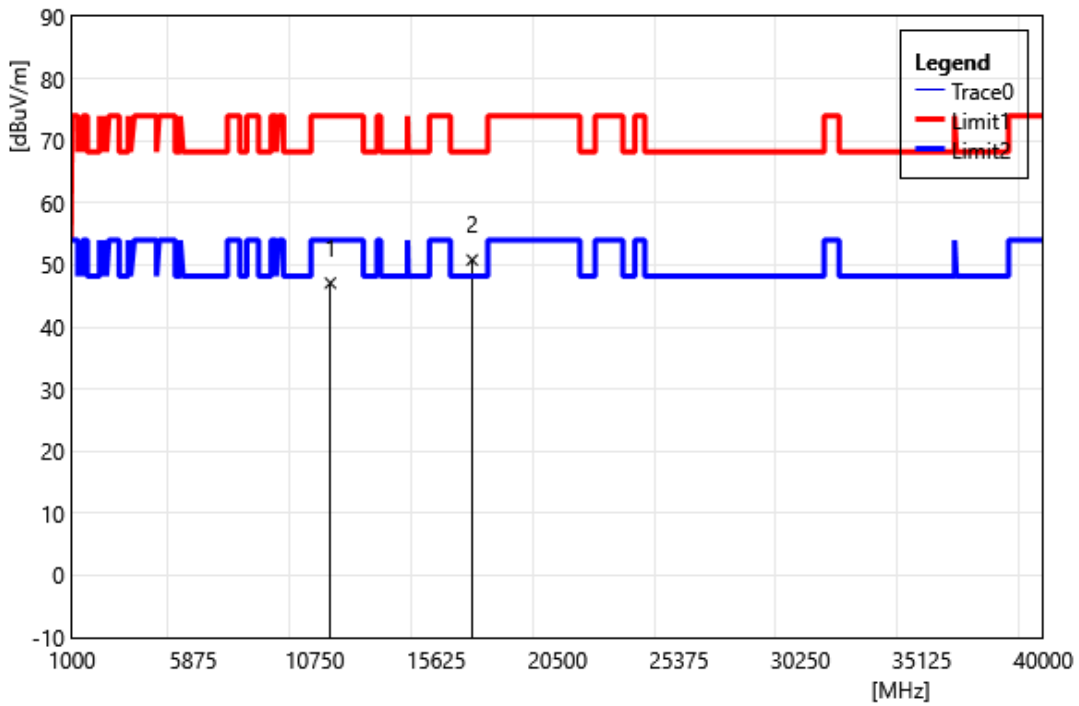


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	34.93	12.16	47.09	74.00	-26.91	PEAK
2	17070.00	33.62	17.18	50.80	68.20	-17.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

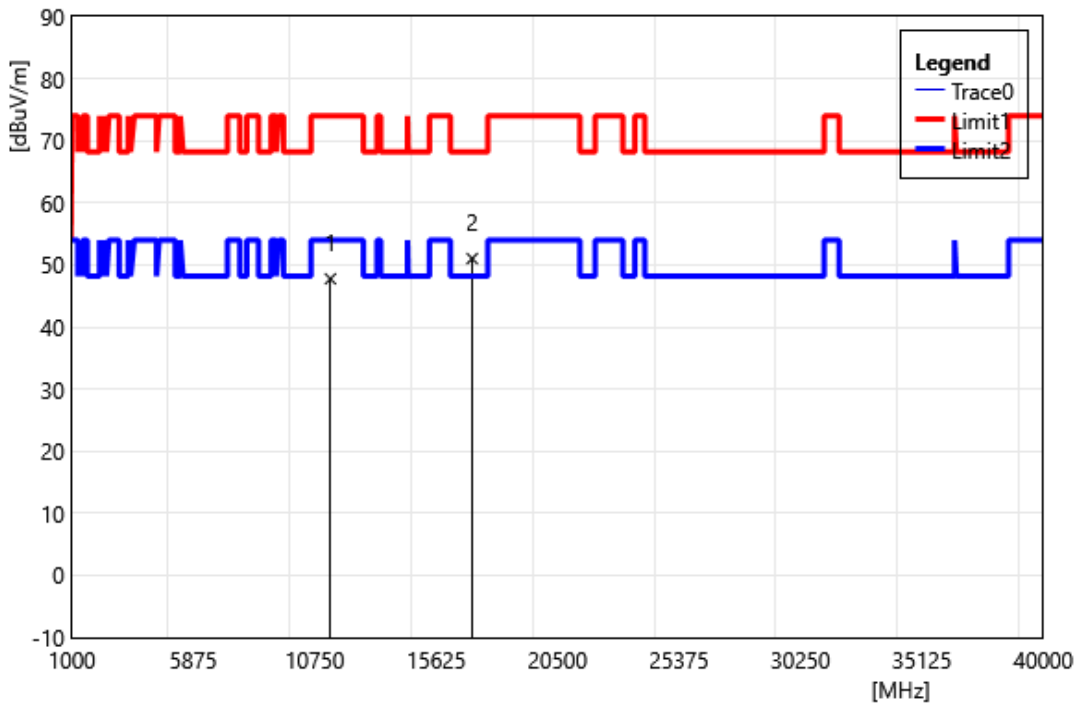


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	35.62	12.16	47.78	74.00	-26.22	PEAK
2	17070.00	33.85	17.18	51.03	68.20	-17.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

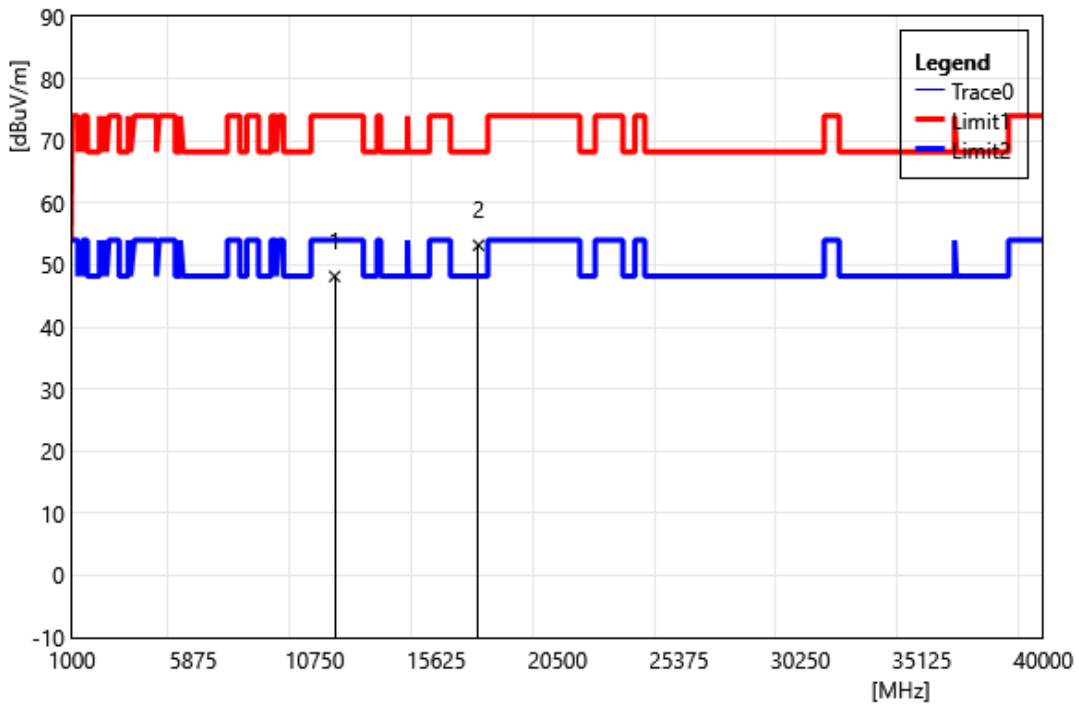


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	35.66	12.50	48.16	74.00	-25.84	PEAK
2	17325.00	33.98	19.19	53.17	68.20	-15.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

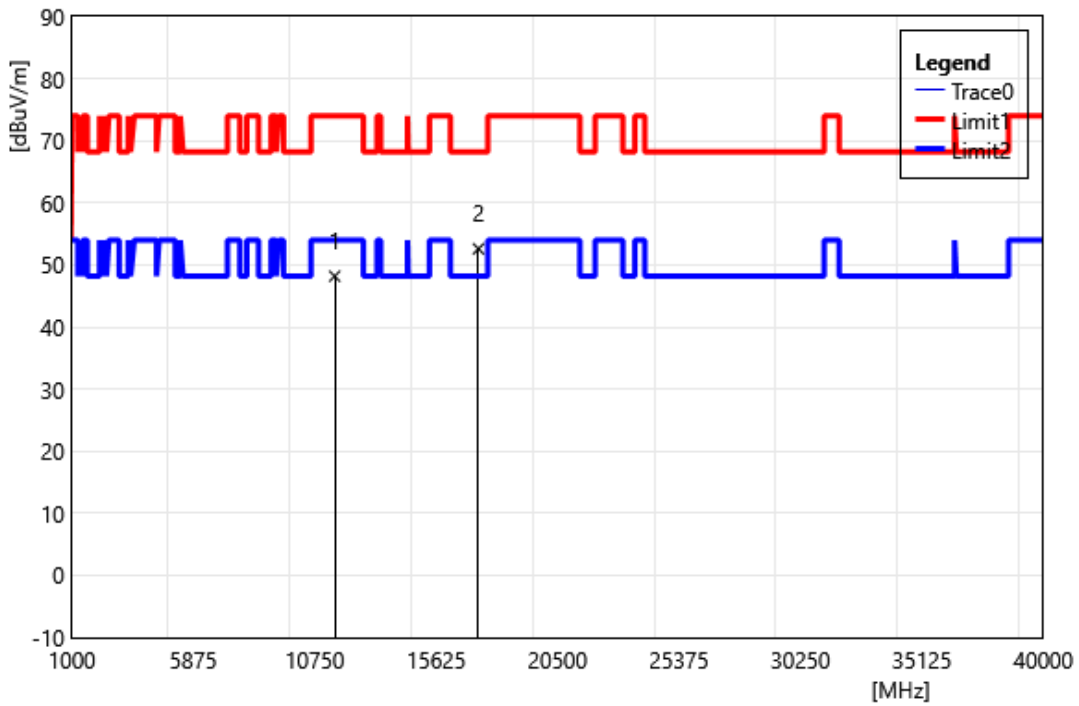


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	35.69	12.50	48.19	74.00	-25.81	PEAK
2	17325.00	33.41	19.19	52.60	68.20	-15.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

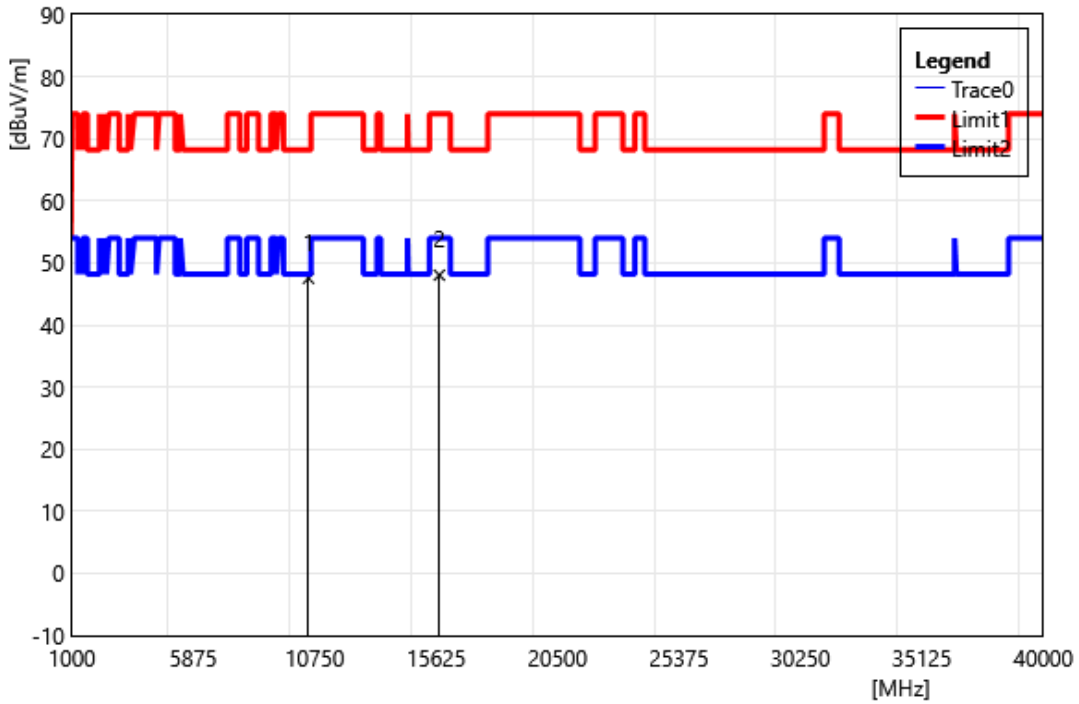


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	35.92	11.60	47.53	68.20	-20.68	PEAK
2	15750.00	34.26	13.78	48.04	74.00	-25.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

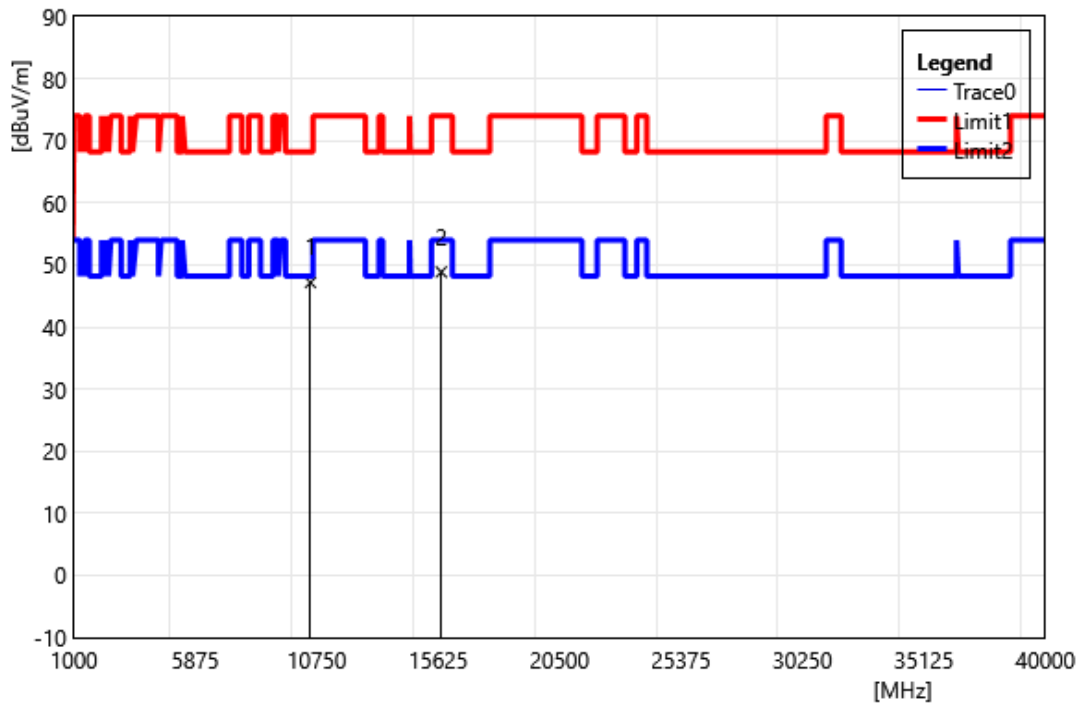


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	35.58	11.60	47.18	68.20	-21.02	PEAK
2	15750.00	35.10	13.78	48.88	74.00	-25.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

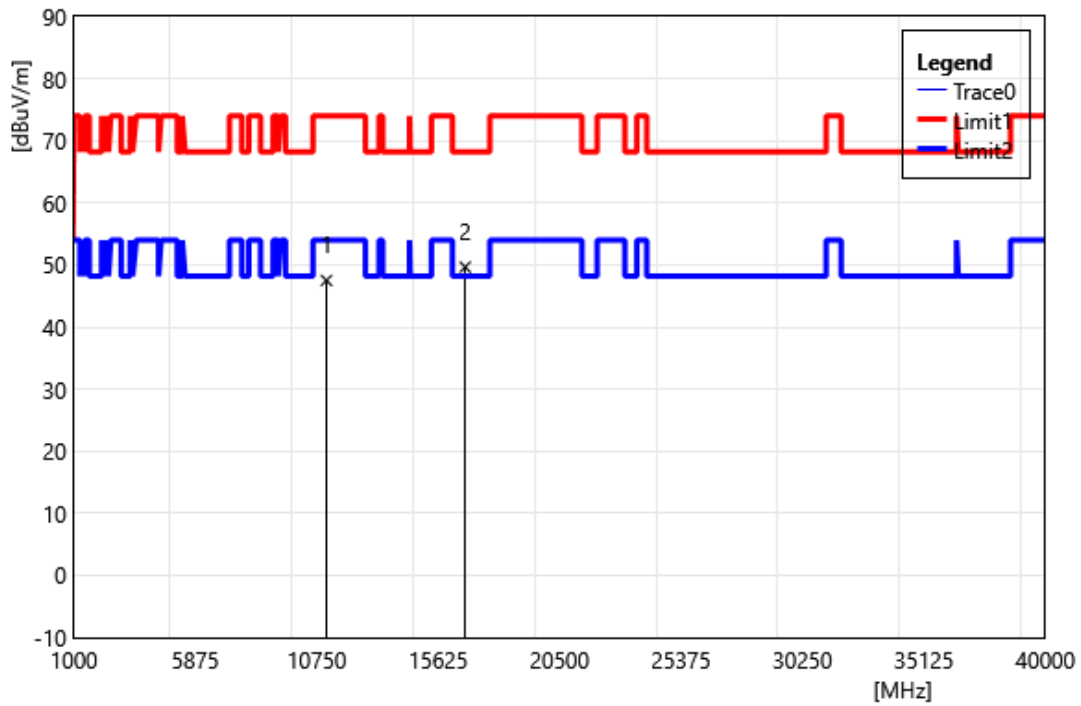


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	35.53	11.98	47.51	74.00	-26.49	PEAK
2	16710.00	34.31	15.36	49.67	68.20	-18.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

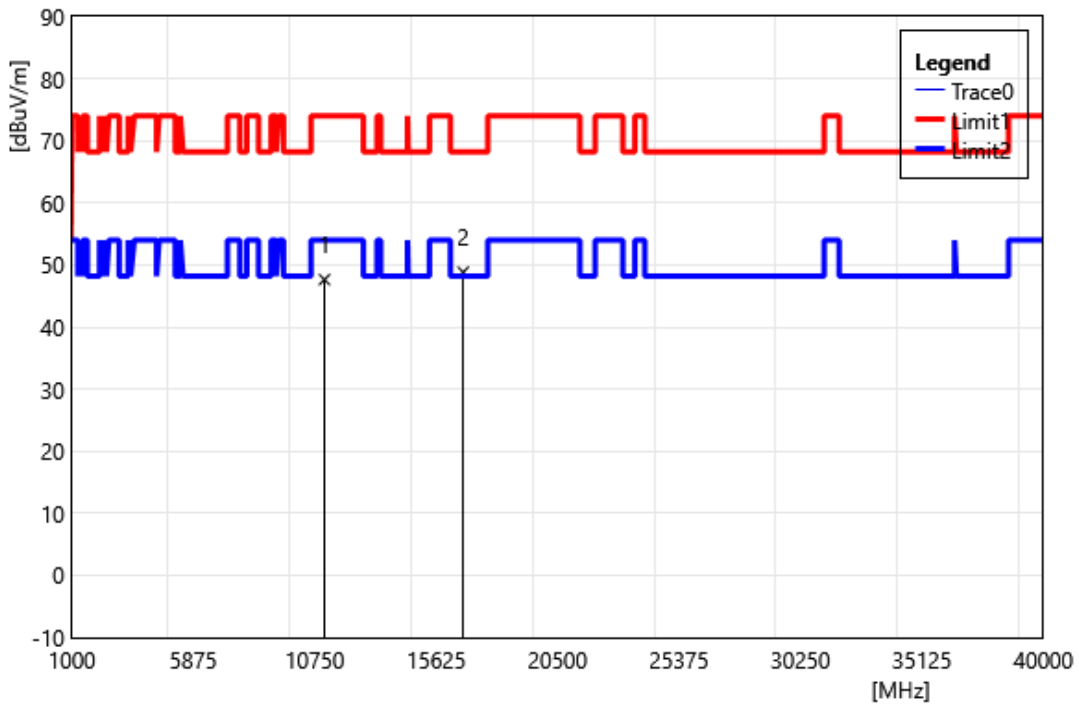


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	35.66	11.98	47.64	74.00	-26.36	PEAK
2	16710.00	33.47	15.36	48.83	68.20	-19.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

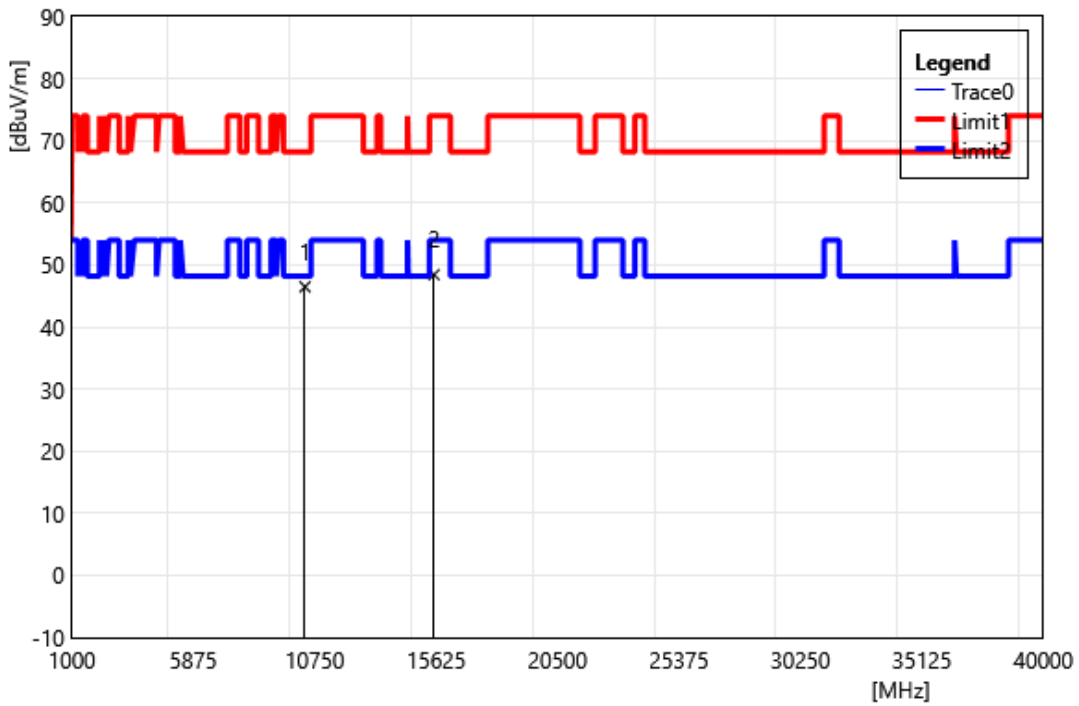


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10360.00	35.31	11.17	46.48	68.20	-21.72	PEAK
2	15540.00	34.35	14.09	48.44	74.00	-25.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

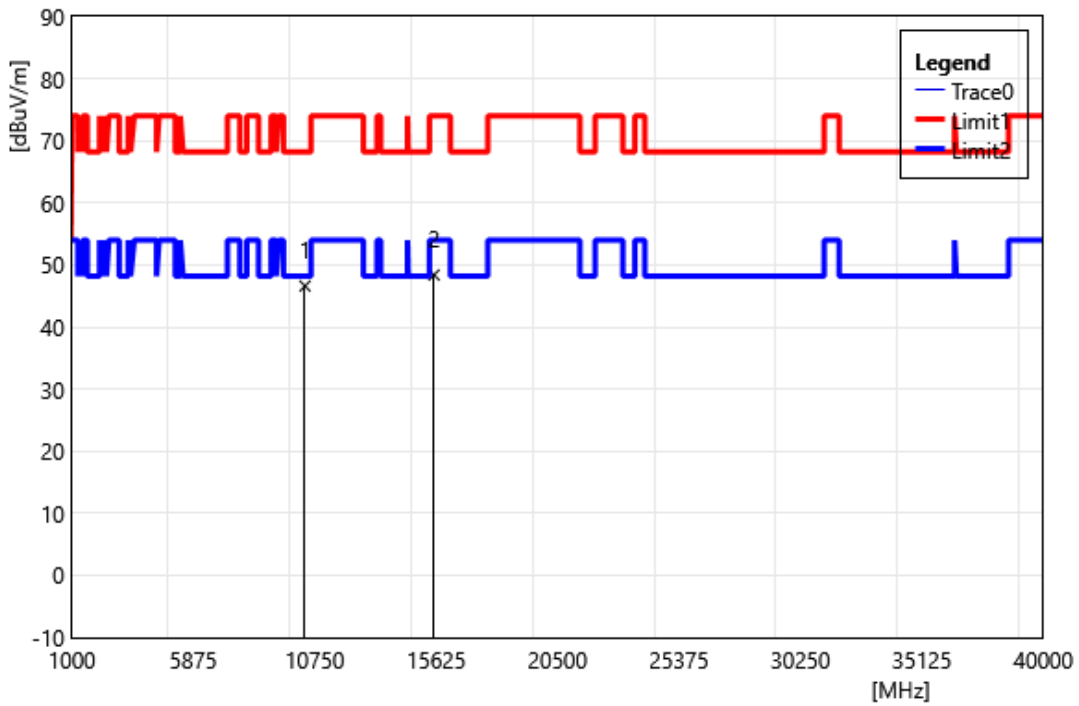


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10360.00	35.45	11.17	46.62	68.20	-21.58	PEAK
2	15540.00	34.30	14.09	48.39	74.00	-25.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

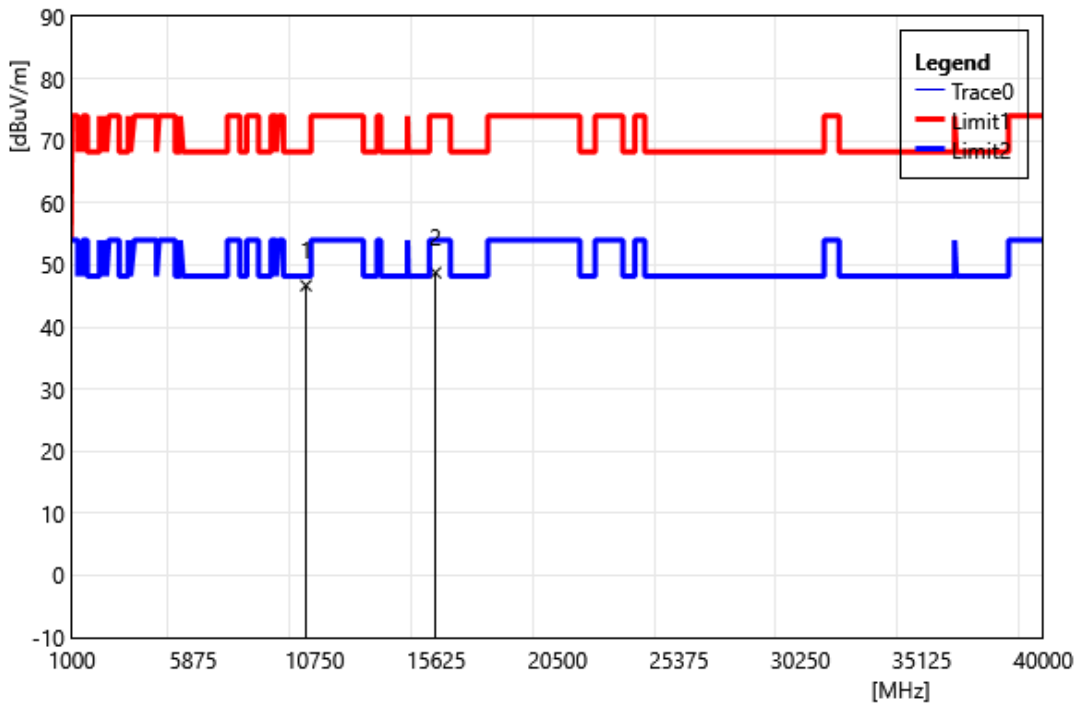


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	35.30	11.38	46.68	68.20	-21.52	PEAK
2	15600.00	34.79	13.96	48.75	74.00	-25.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

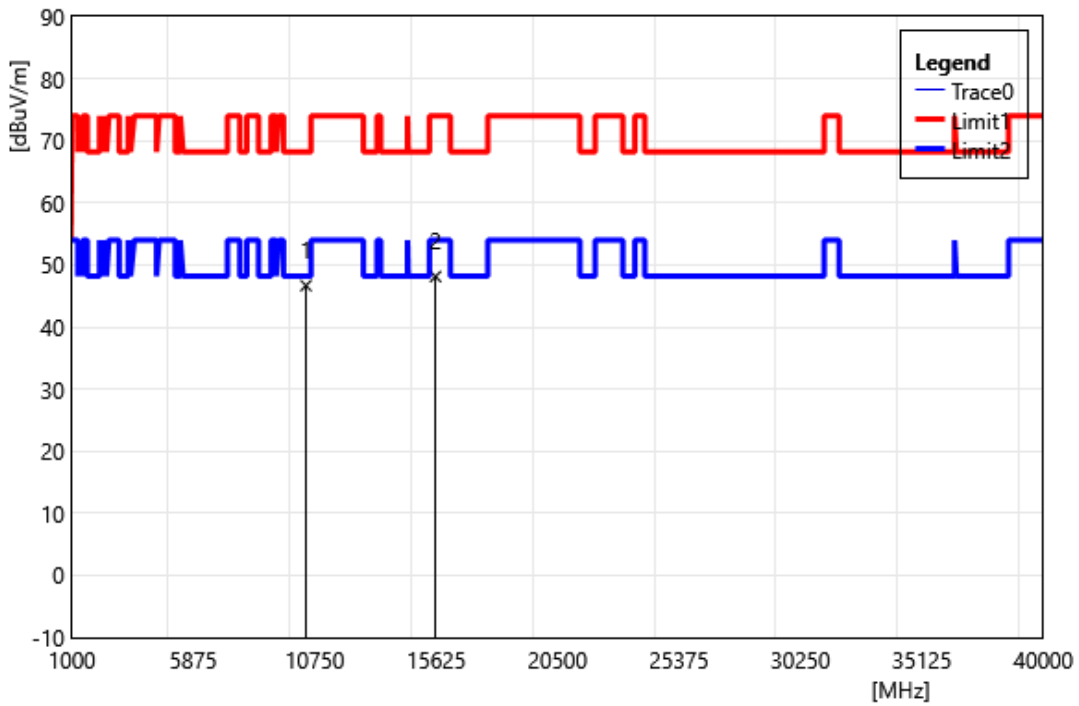


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	35.29	11.38	46.67	68.20	-21.53	PEAK
2	15600.00	34.18	13.96	48.13	74.00	-25.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

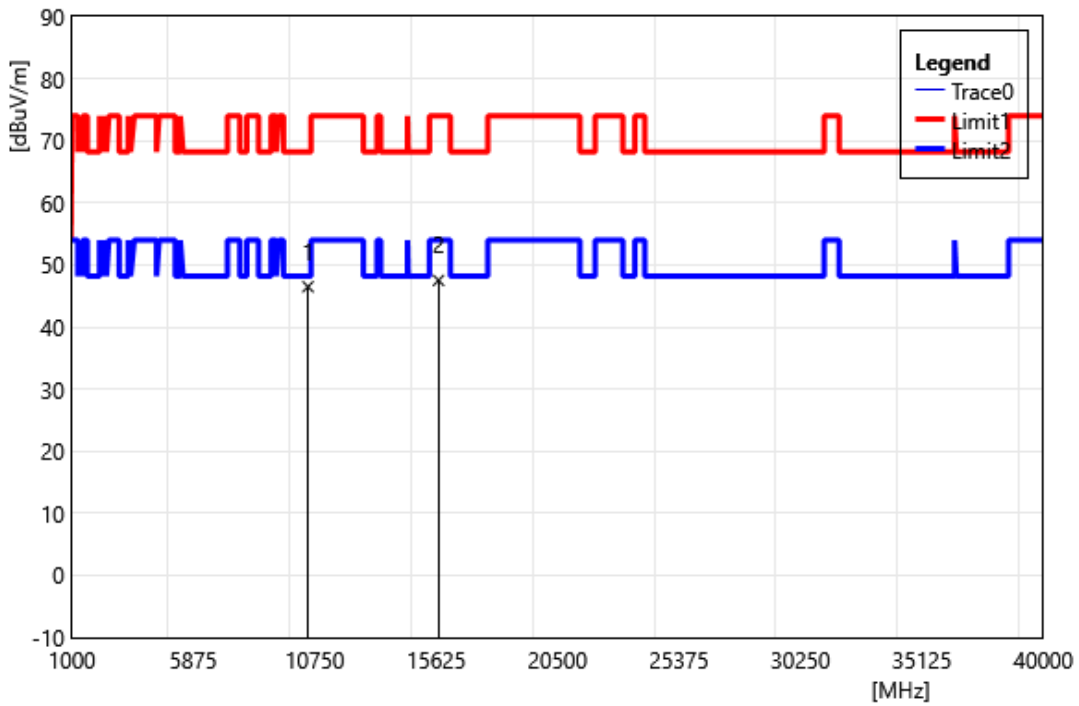


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	34.93	11.56	46.49	68.20	-21.71	PEAK
2	15720.00	33.69	13.82	47.51	74.00	-26.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

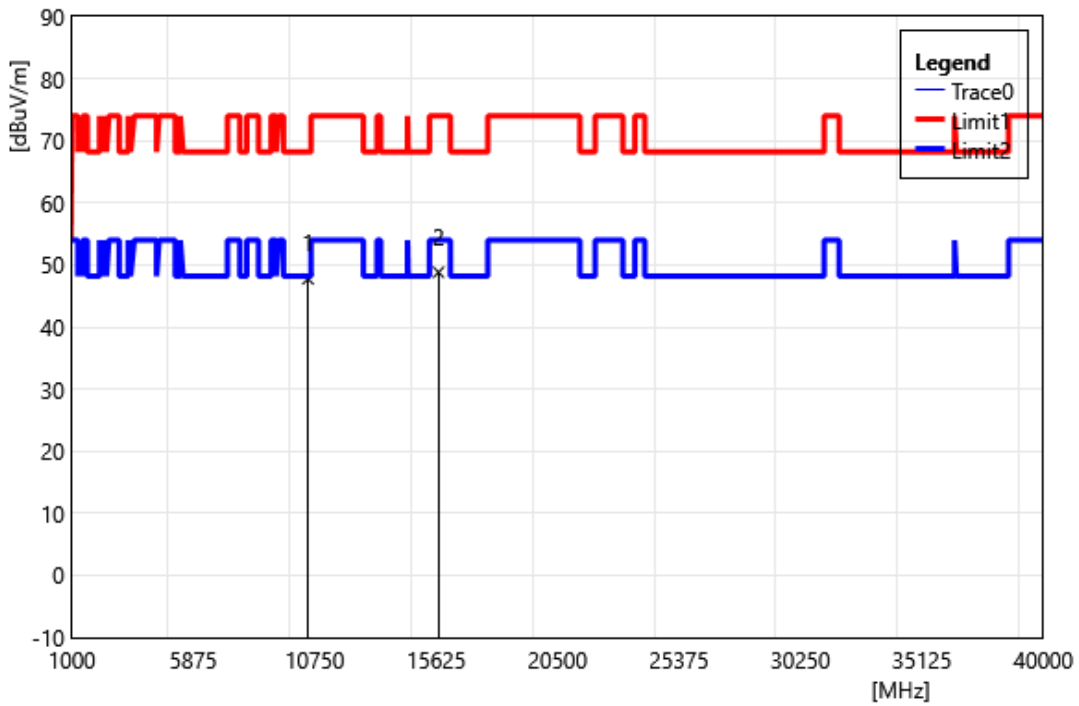


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	36.19	11.56	47.75	68.20	-20.45	PEAK
2	15720.00	35.02	13.82	48.84	74.00	-25.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

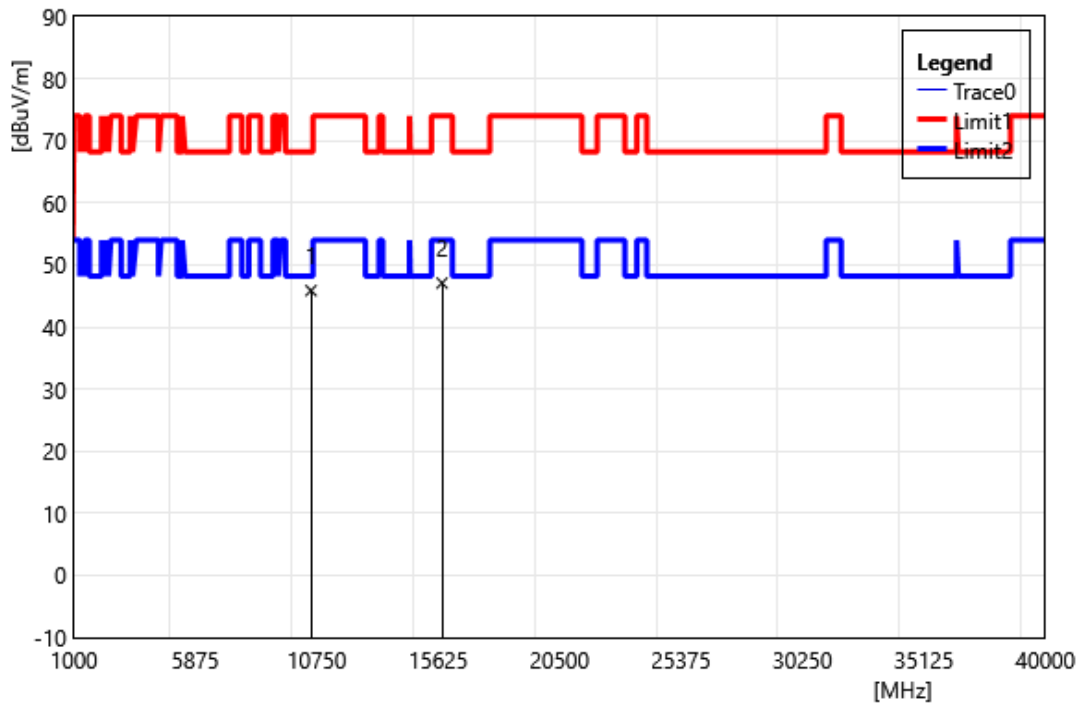


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10520.00	34.28	11.59	45.87	68.20	-22.33	PEAK
2	15780.00	33.34	13.75	47.09	74.00	-26.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

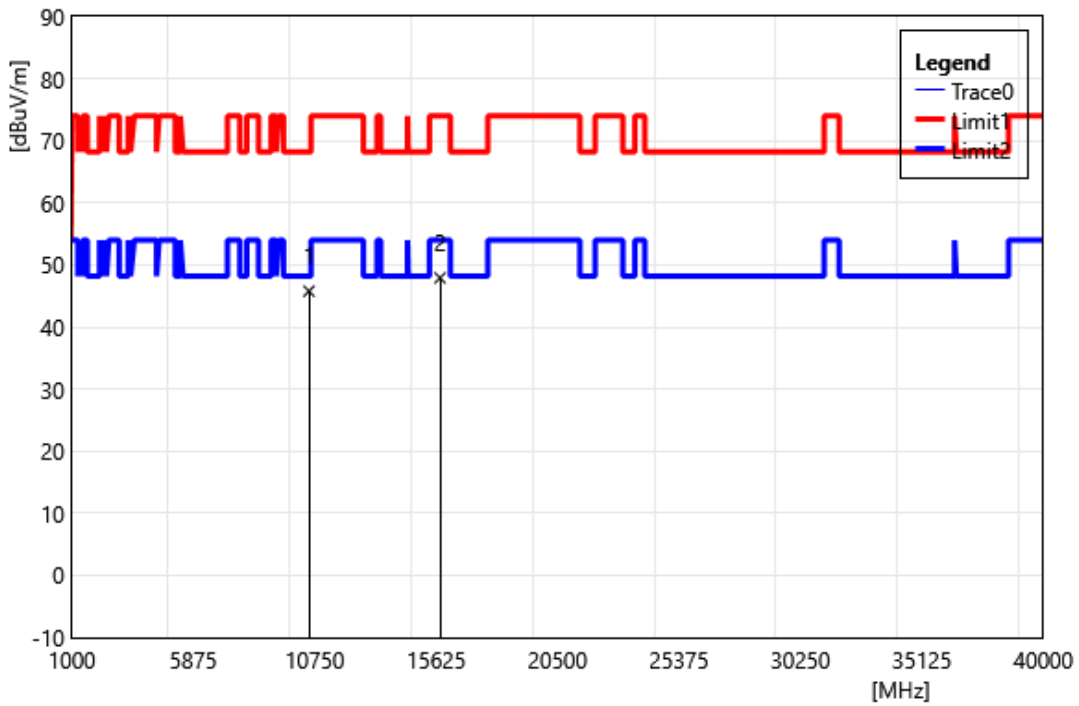


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10520.00	34.19	11.59	45.78	68.20	-22.42	PEAK
2	15780.00	34.17	13.75	47.92	74.00	-26.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

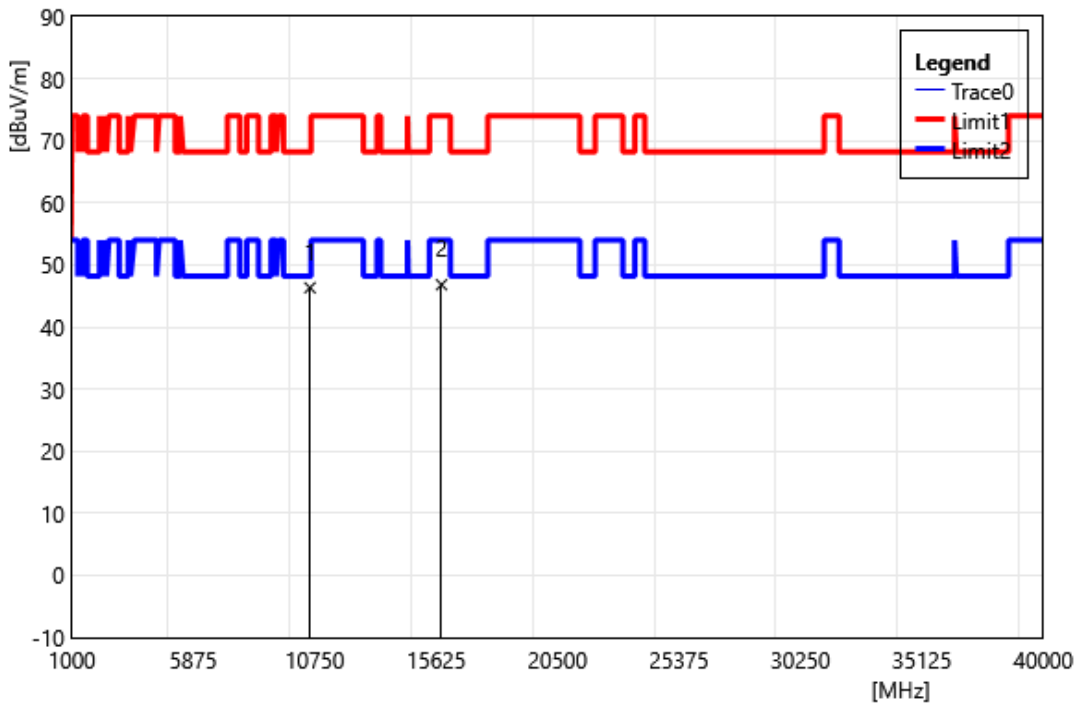


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10560.00	34.77	11.56	46.33	68.20	-21.87	PEAK
2	15840.00	33.23	13.60	46.83	74.00	-27.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

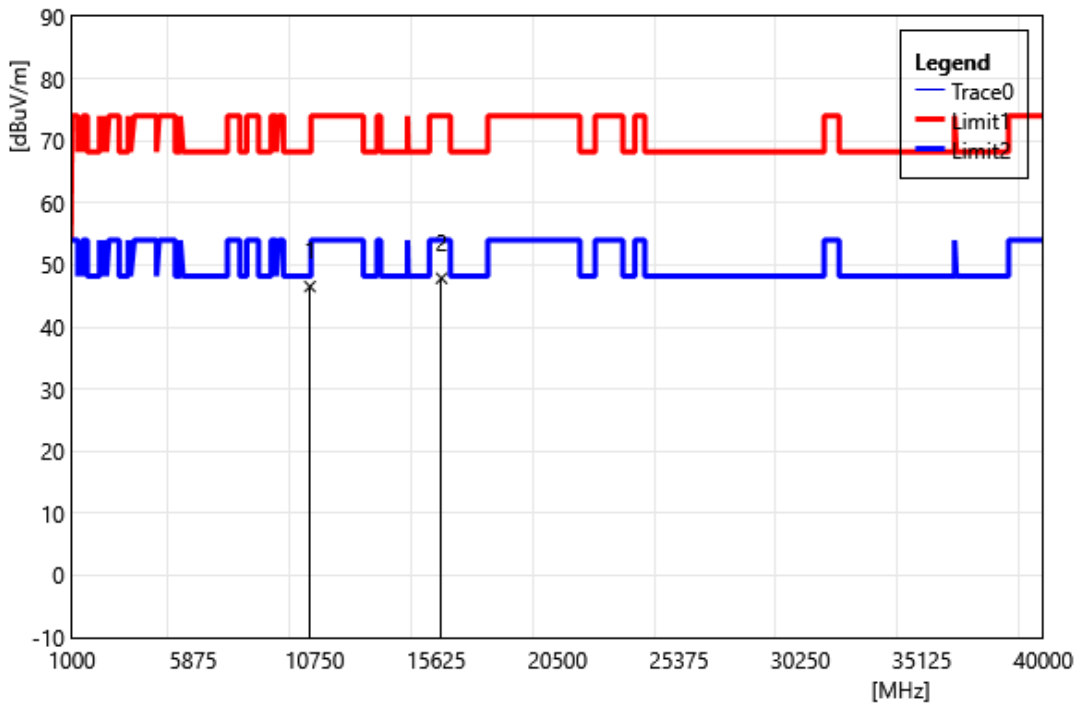


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10560.00	34.97	11.56	46.53	68.20	-21.67	PEAK
2	15840.00	34.25	13.60	47.85	74.00	-26.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

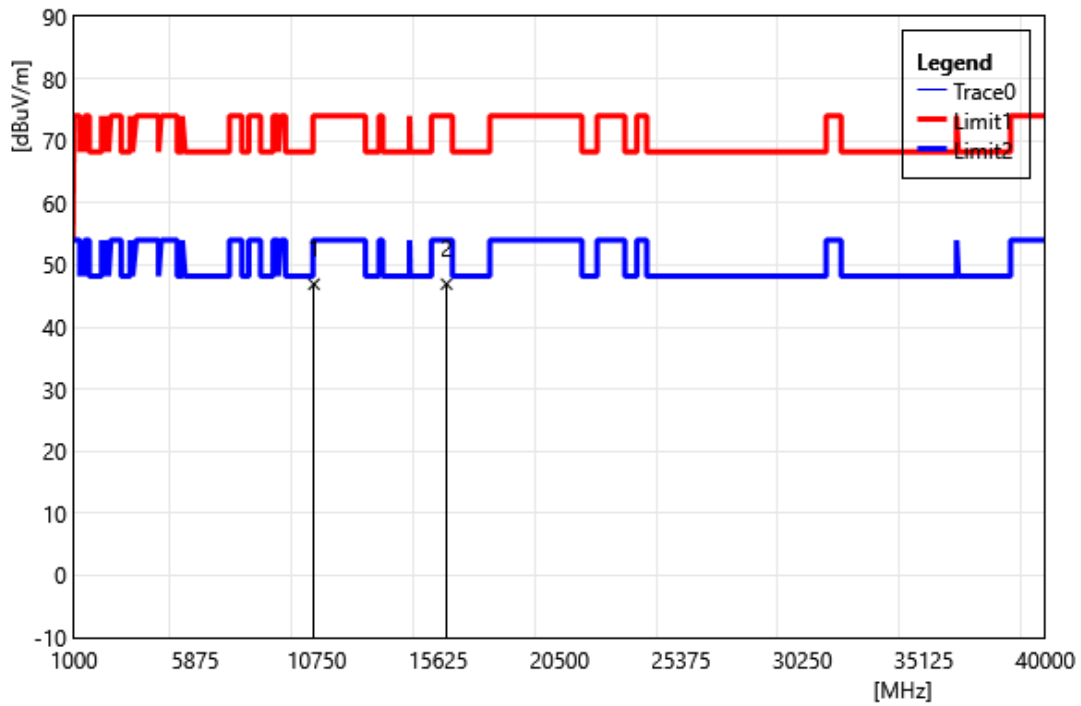


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10640.00	35.35	11.55	46.90	74.00	-27.10	PEAK
2	15960.00	33.70	13.22	46.92	74.00	-27.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

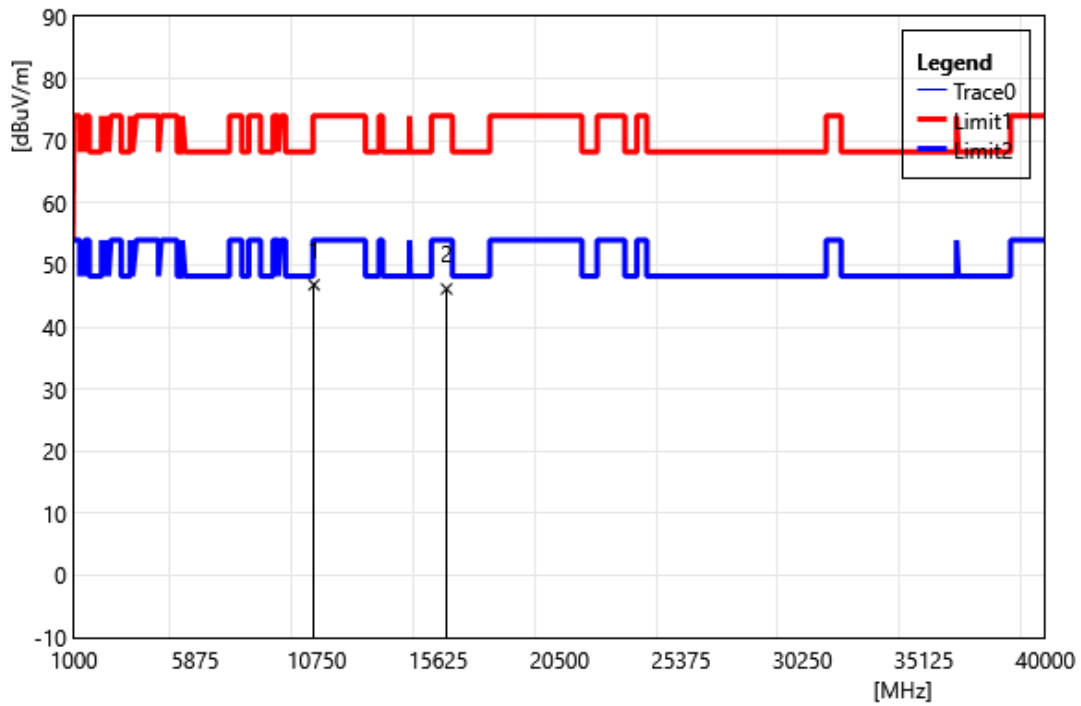


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10640.00	35.25	11.55	46.80	74.00	-27.20	PEAK
2	15960.00	32.91	13.22	46.13	74.00	-27.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500 MHz		
Polarization:	Vertical		
Remark:			

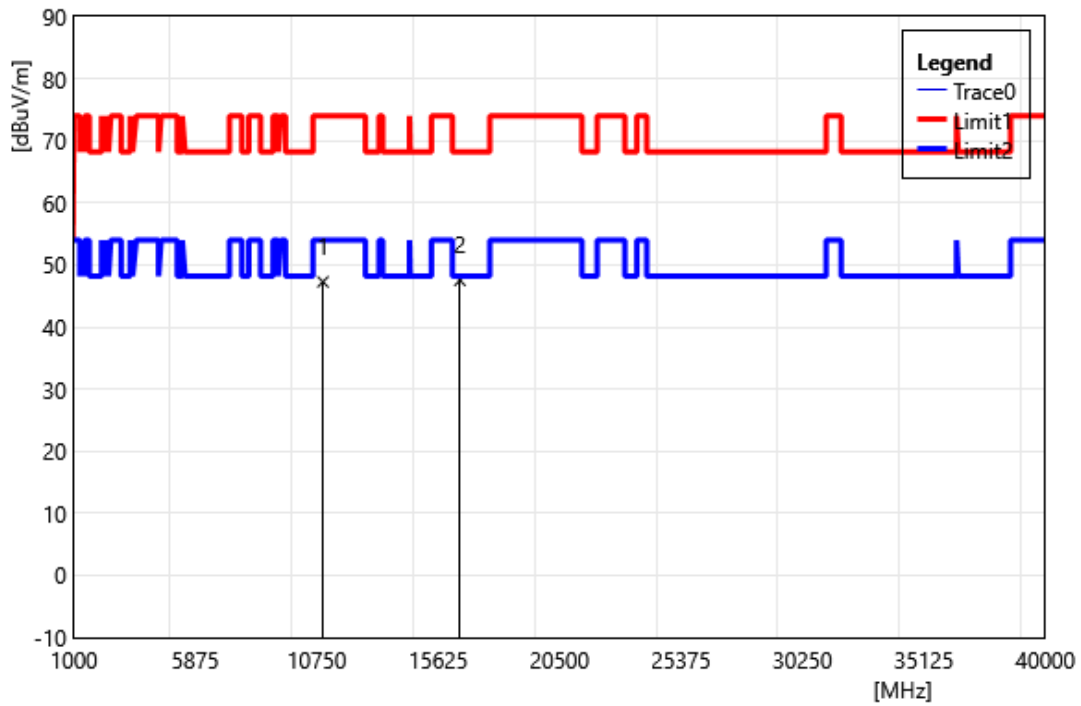


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	35.49	11.79	47.28	74.00	-26.72	PEAK
2	16500.00	33.20	14.31	47.51	68.20	-20.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

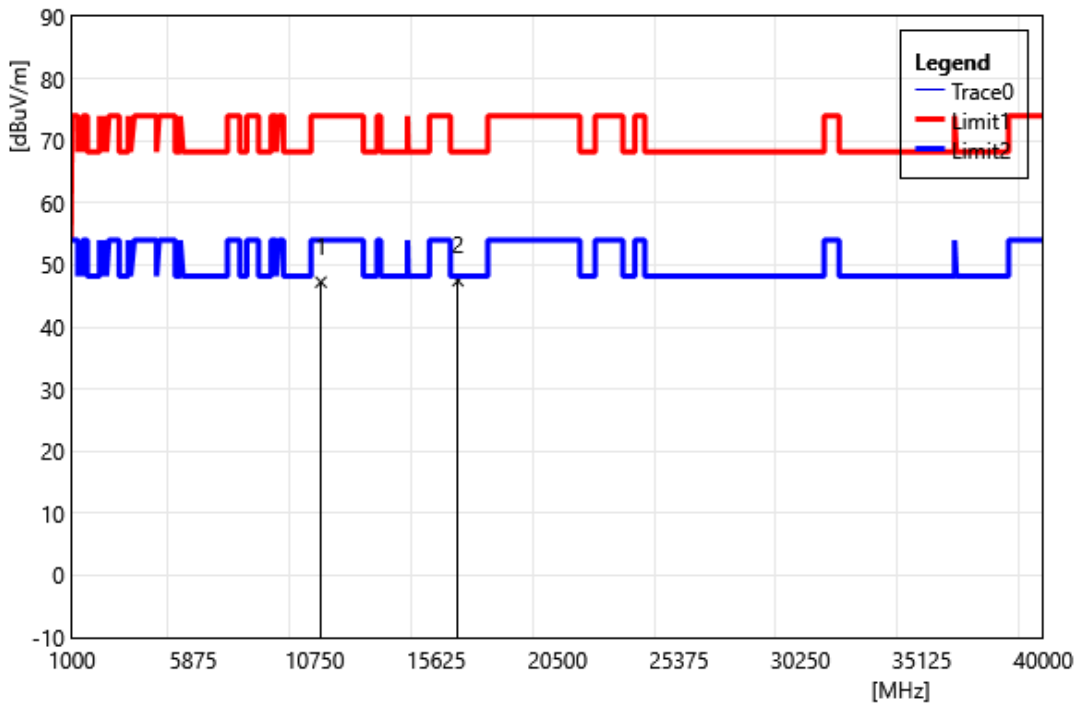


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	35.44	11.79	47.23	74.00	-26.77	PEAK
2	16500.00	33.14	14.31	47.45	68.20	-20.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

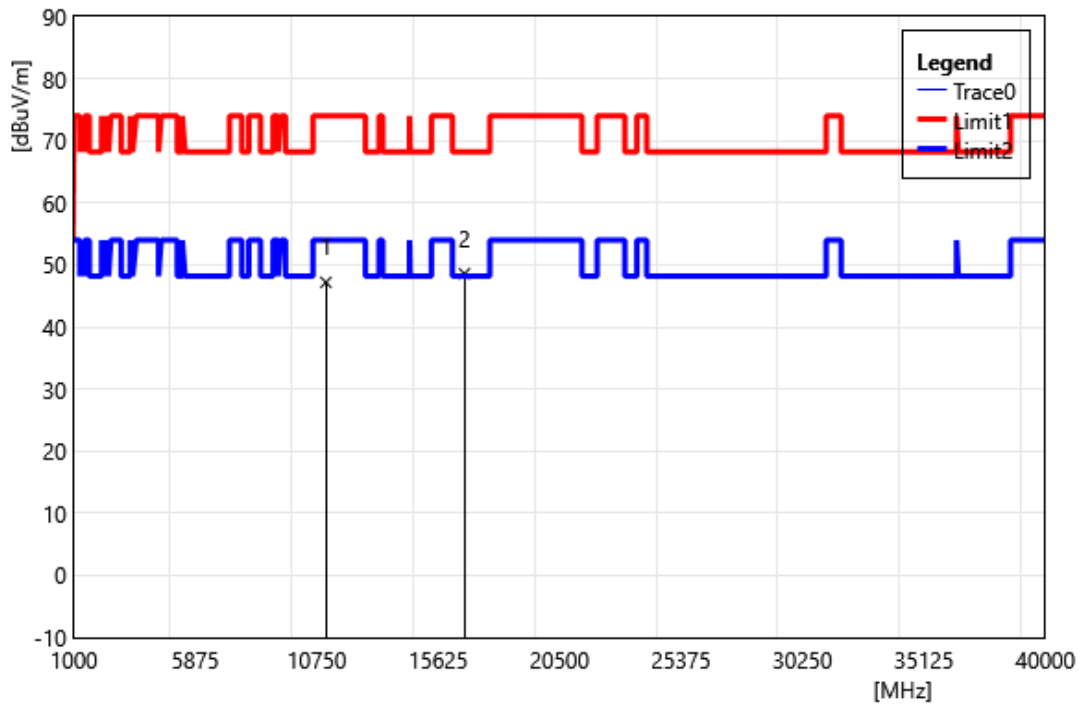


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	35.18	12.03	47.21	74.00	-26.79	PEAK
2	16680.00	33.37	15.21	48.58	68.20	-19.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

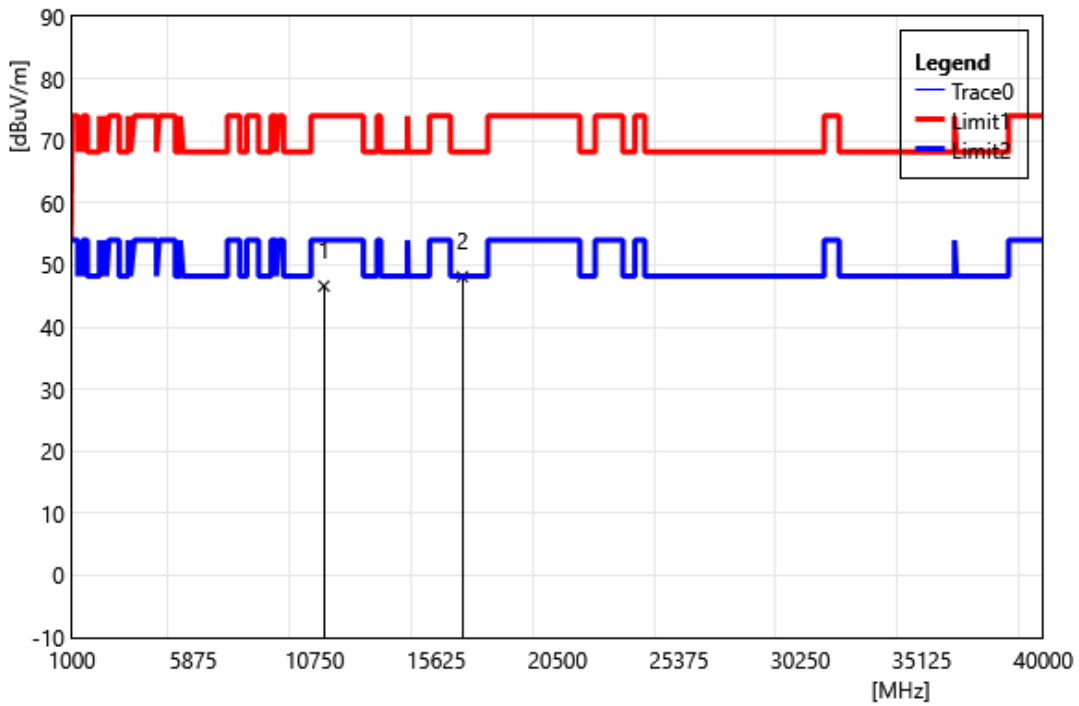


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	34.57	12.03	46.60	74.00	-27.40	PEAK
2	16680.00	32.90	15.21	48.11	68.20	-20.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

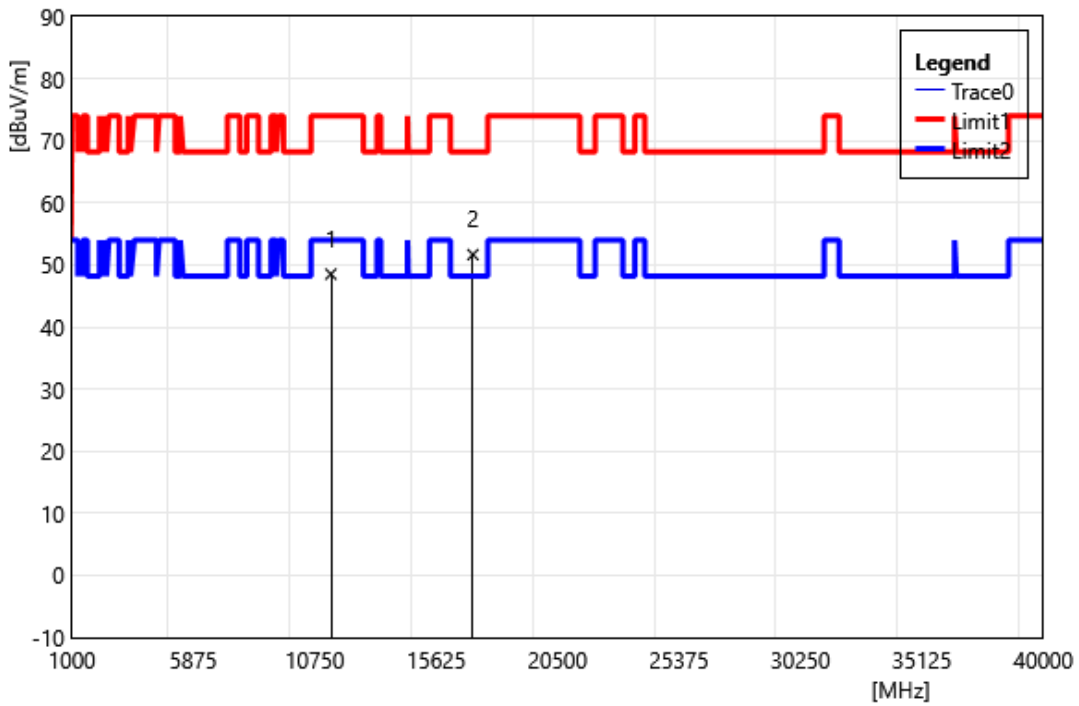


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	36.31	12.21	48.53	74.00	-25.47	PEAK
2	17100.00	34.29	17.37	51.67	68.20	-16.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Horizontal		
Remark:			

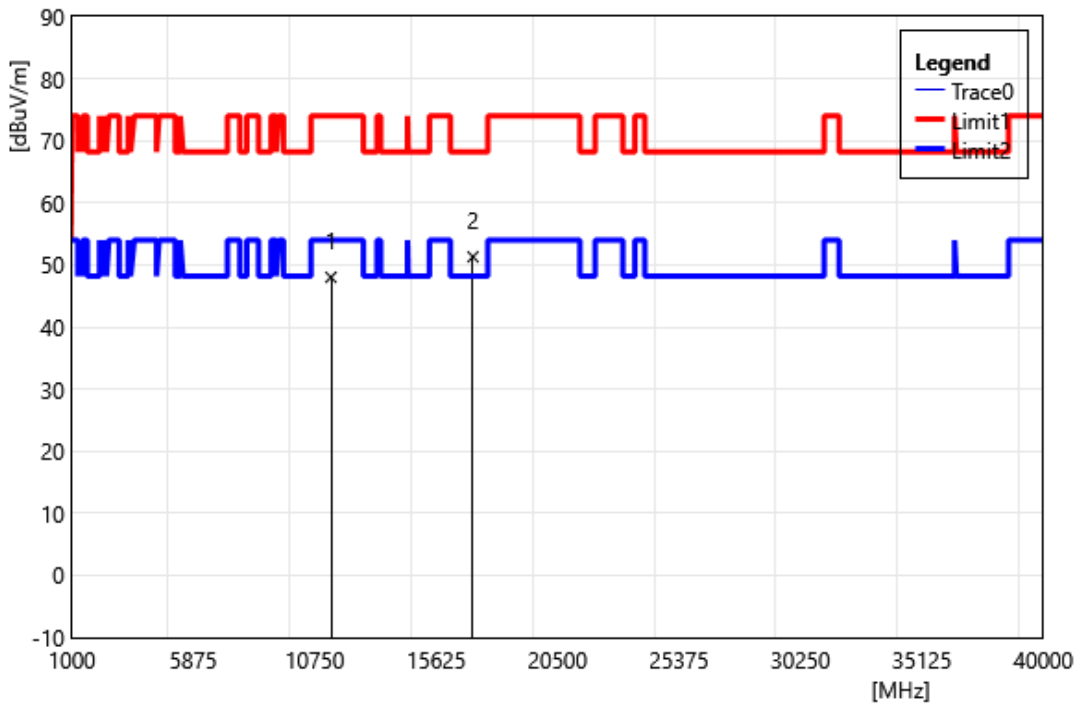


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	35.80	12.21	48.02	74.00	-25.98	PEAK
2	17100.00	33.94	17.37	51.32	68.20	-16.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

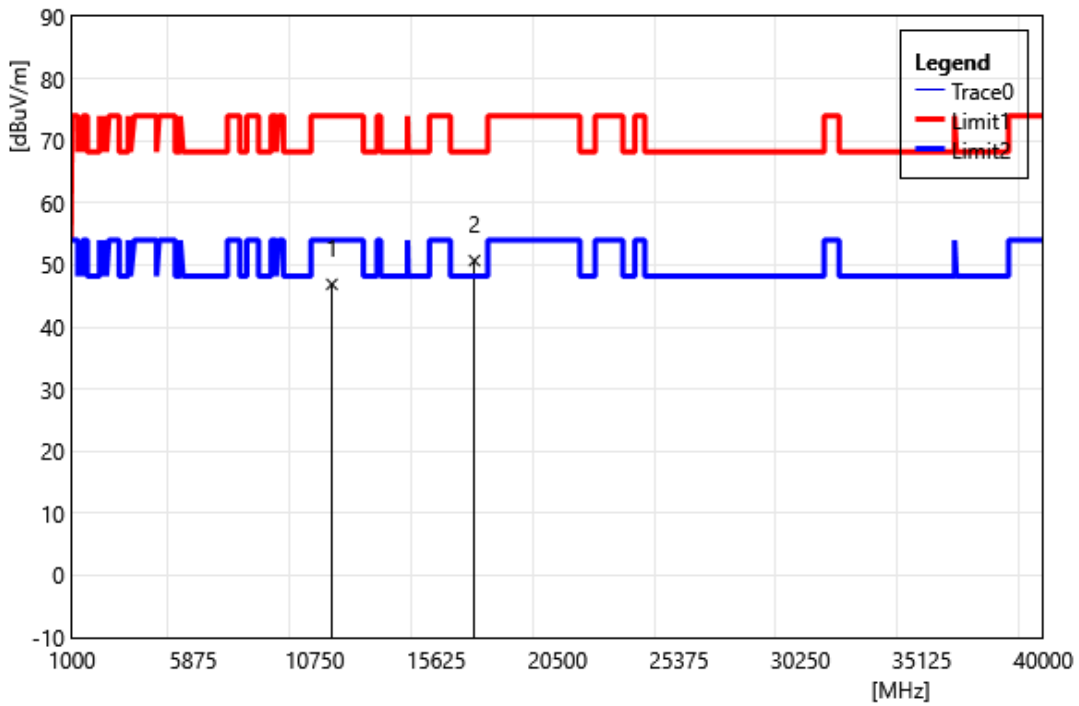


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	34.47	12.41	46.88	74.00	-27.12	PEAK
2	17160.00	32.89	17.82	50.71	68.20	-17.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

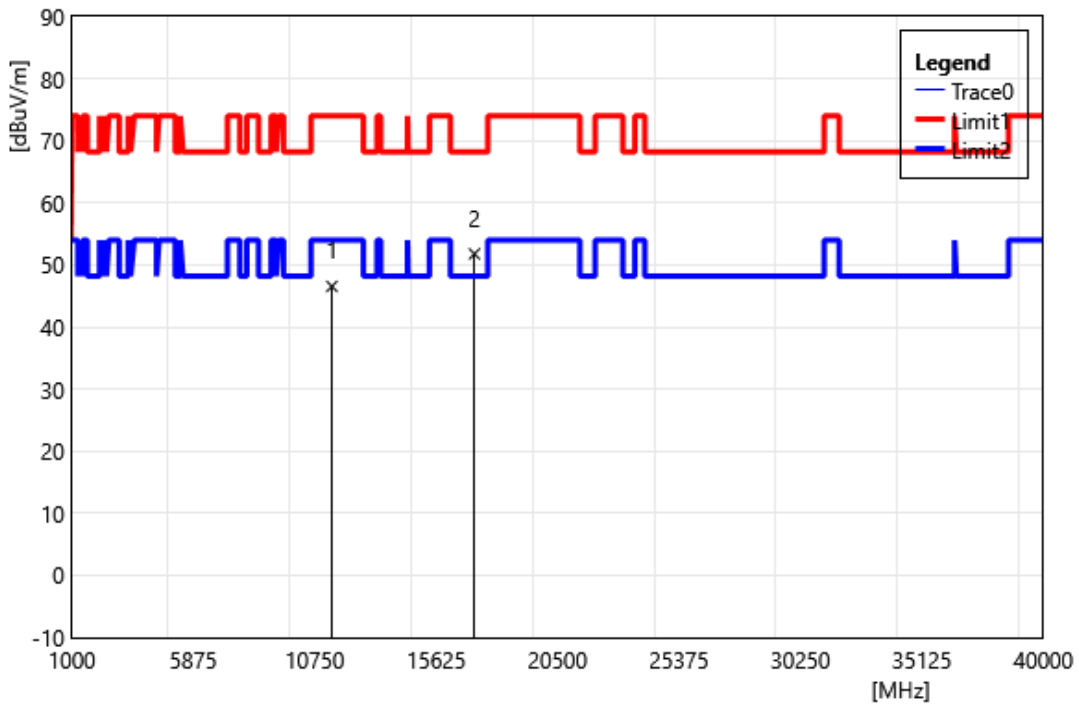


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	34.14	12.41	46.55	74.00	-27.45	PEAK
2	17160.00	33.97	17.82	51.79	68.20	-16.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

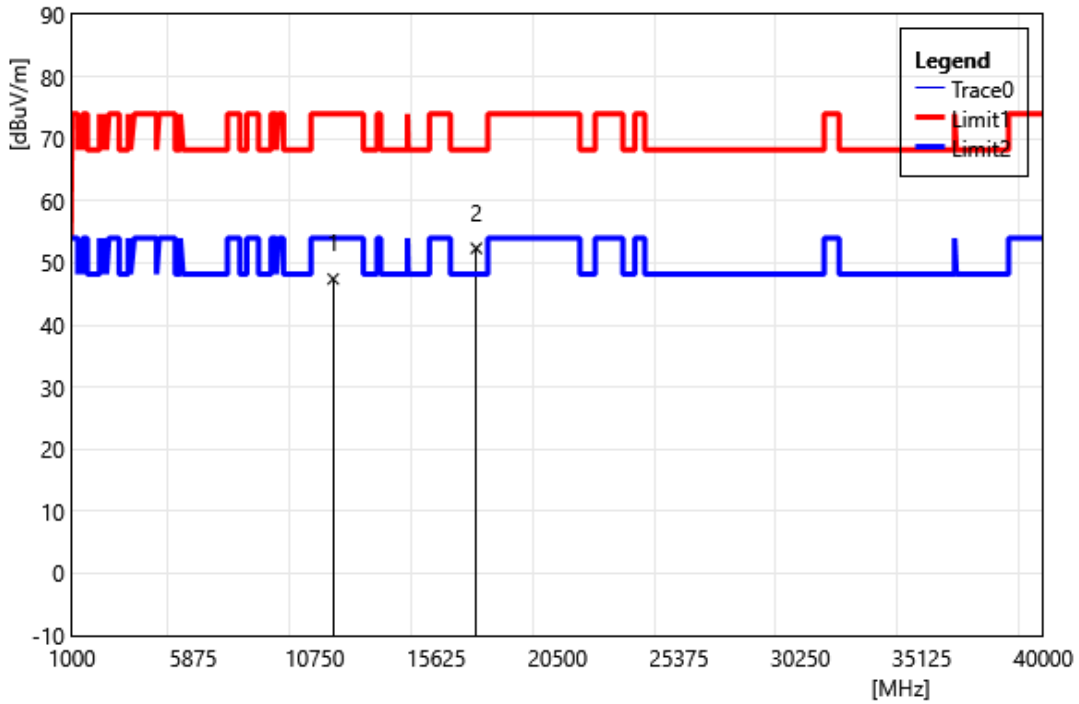


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	34.77	12.65	47.42	74.00	-26.58	PEAK
2	17235.00	33.91	18.45	52.36	68.20	-15.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

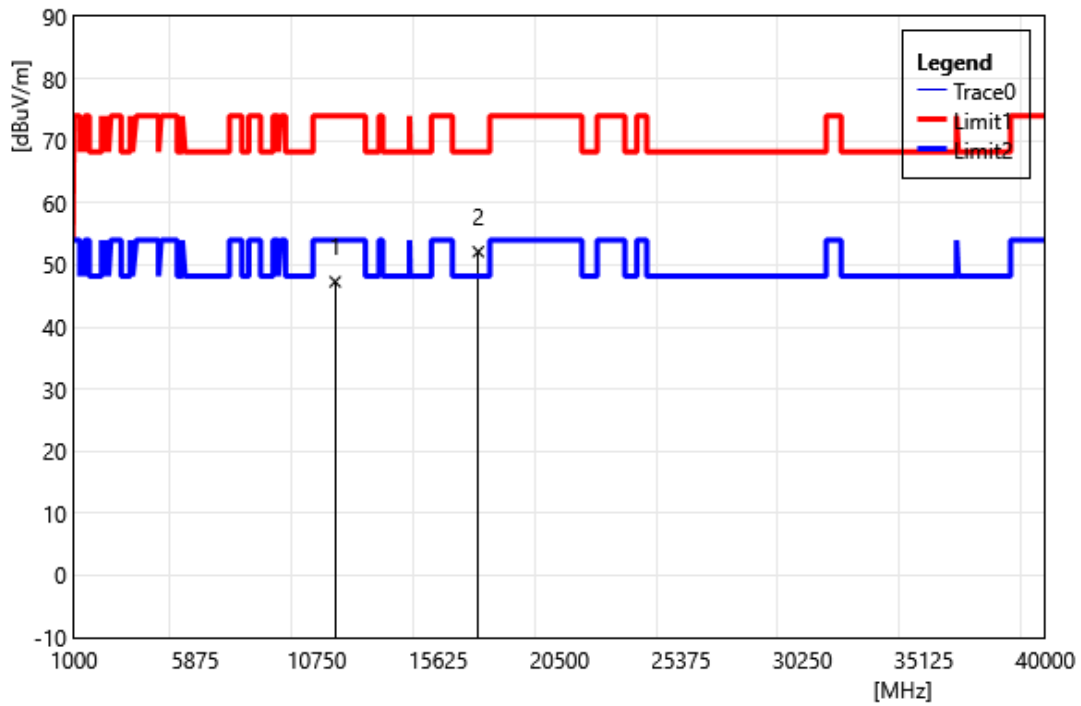


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	34.65	12.65	47.30	74.00	-26.70	PEAK
2	17235.00	33.68	18.45	52.13	68.20	-16.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5785		
	MHz		
Polarization:	Vertical		
Remark:			

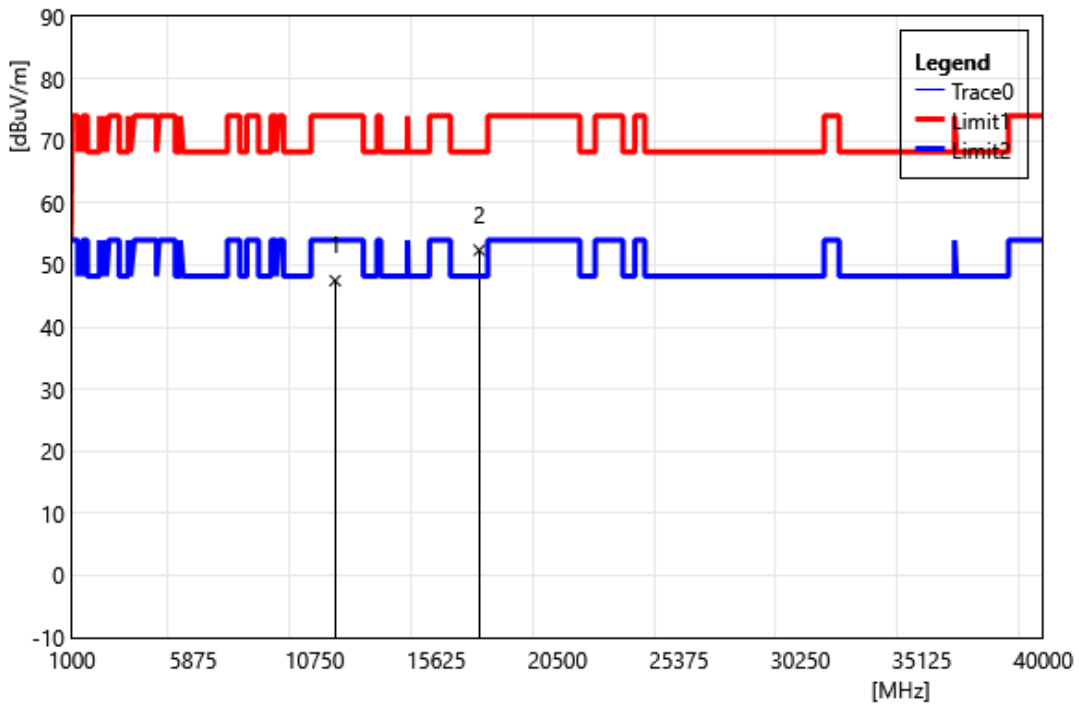


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	35.06	12.42	47.48	74.00	-26.53	PEAK
2	17355.00	33.02	19.36	52.38	68.20	-15.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5785		
	MHz		
Polarization:	Horizontal		
Remark:			

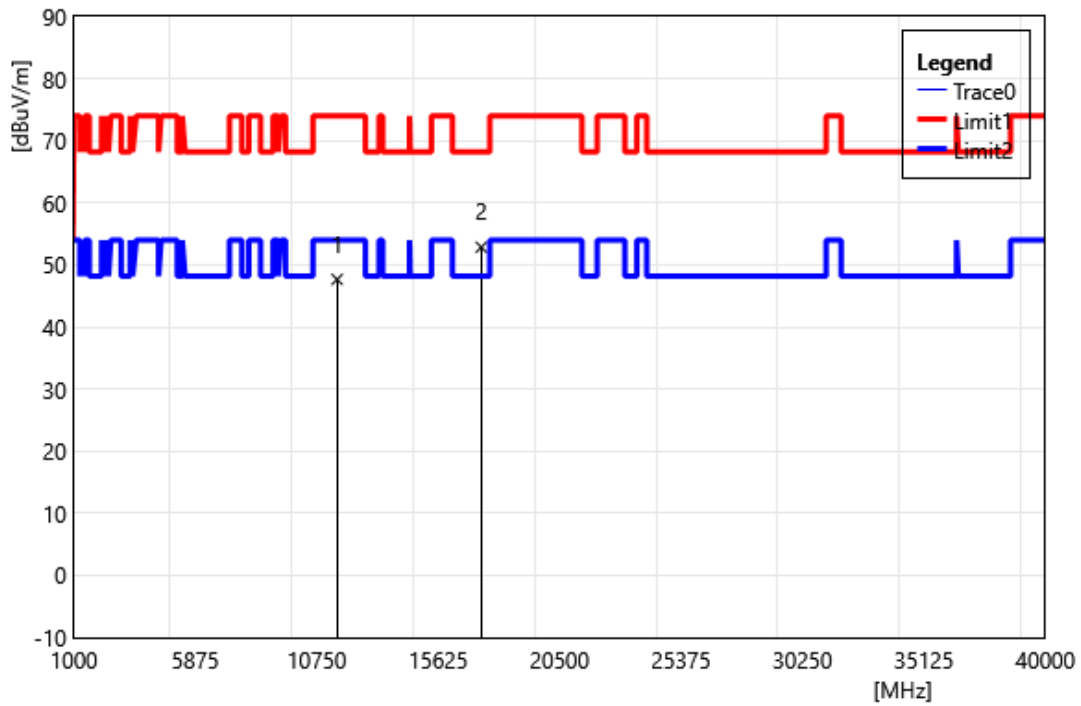


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	35.26	12.42	47.68	74.00	-26.32	PEAK
2	17355.00	33.50	19.36	52.86	68.20	-15.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

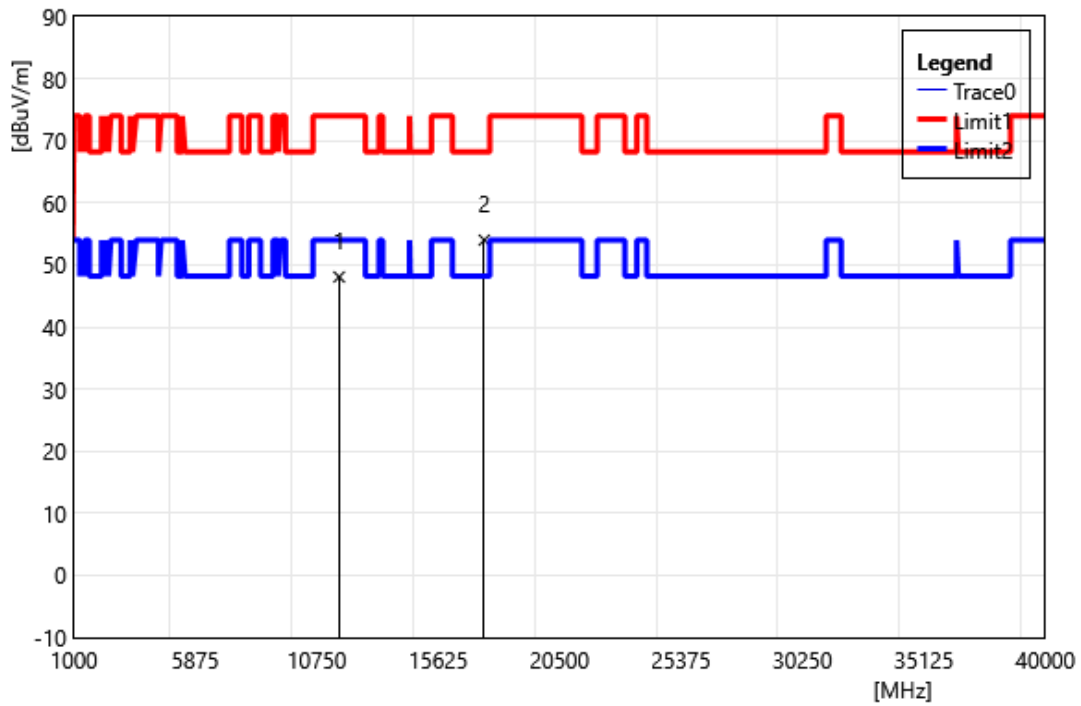


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.92	12.16	48.08	74.00	-25.92	PEAK
2	17475.00	33.69	20.31	54.00	68.20	-14.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

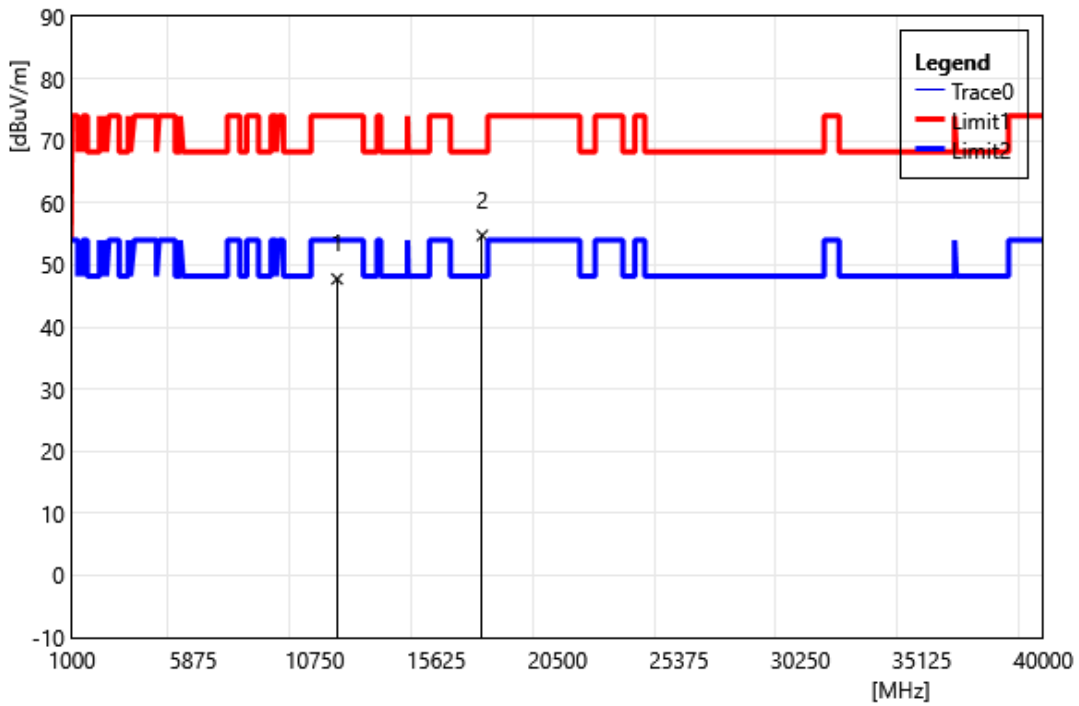


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.59	12.16	47.75	74.00	-26.25	PEAK
2	17475.00	34.45	20.31	54.76	68.20	-13.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

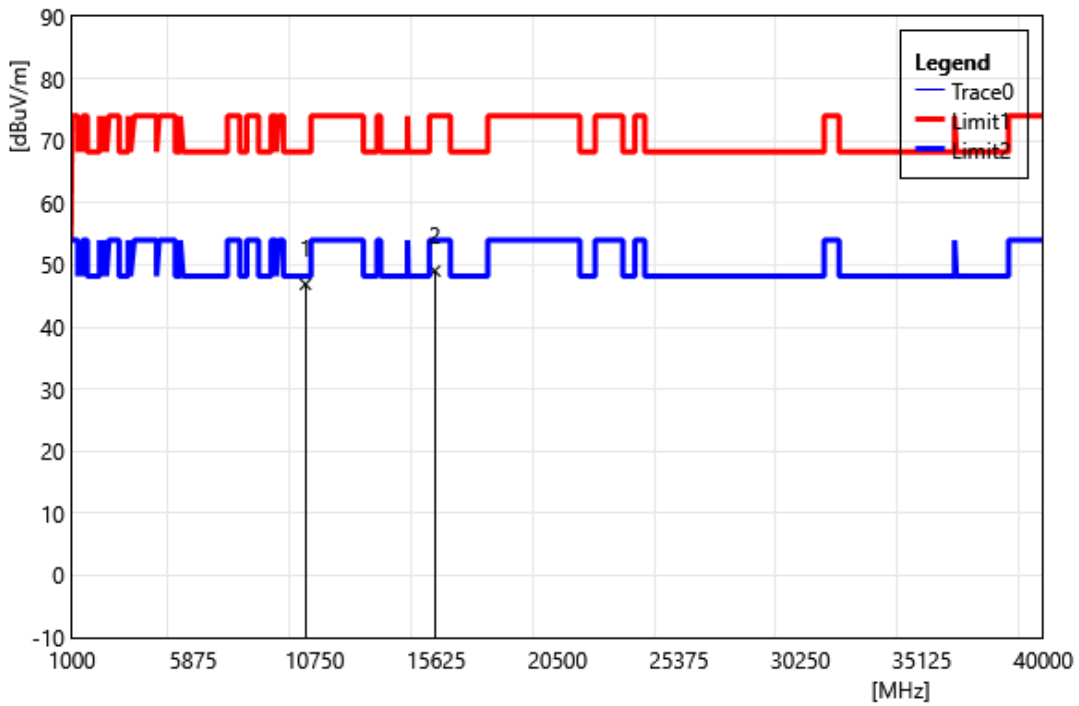


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	35.61	11.28	46.89	68.20	-21.31	PEAK
2	15570.00	35.02	14.02	49.04	74.00	-24.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

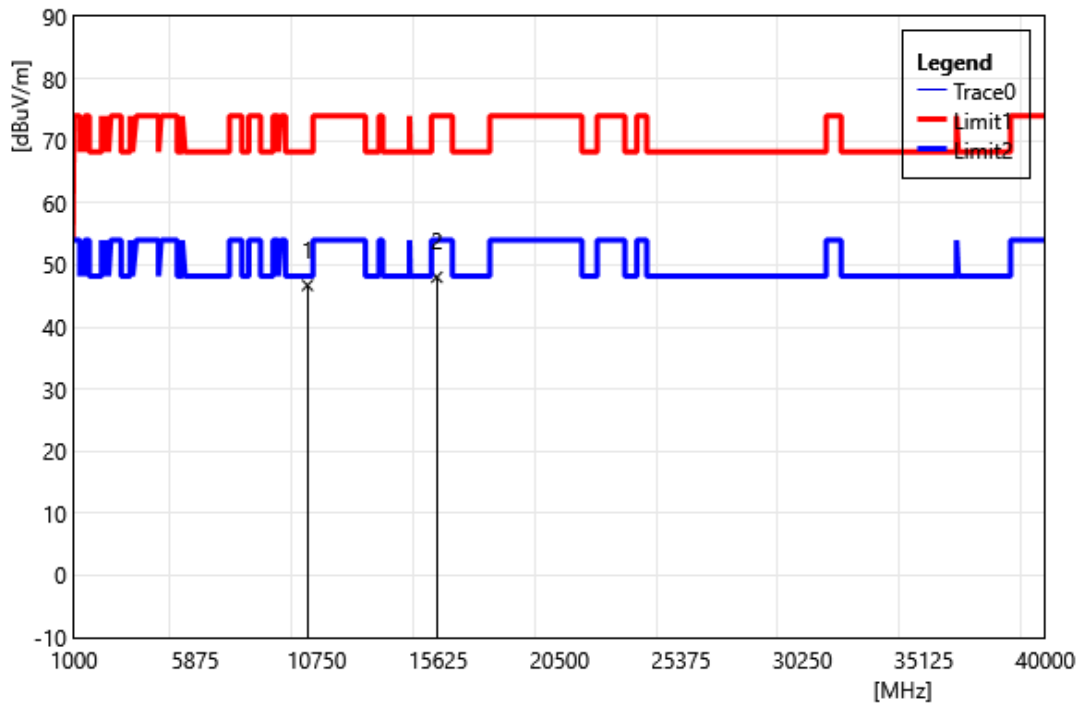


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	35.44	11.28	46.72	68.20	-21.48	PEAK
2	15570.00	34.01	14.02	48.03	74.00	-25.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

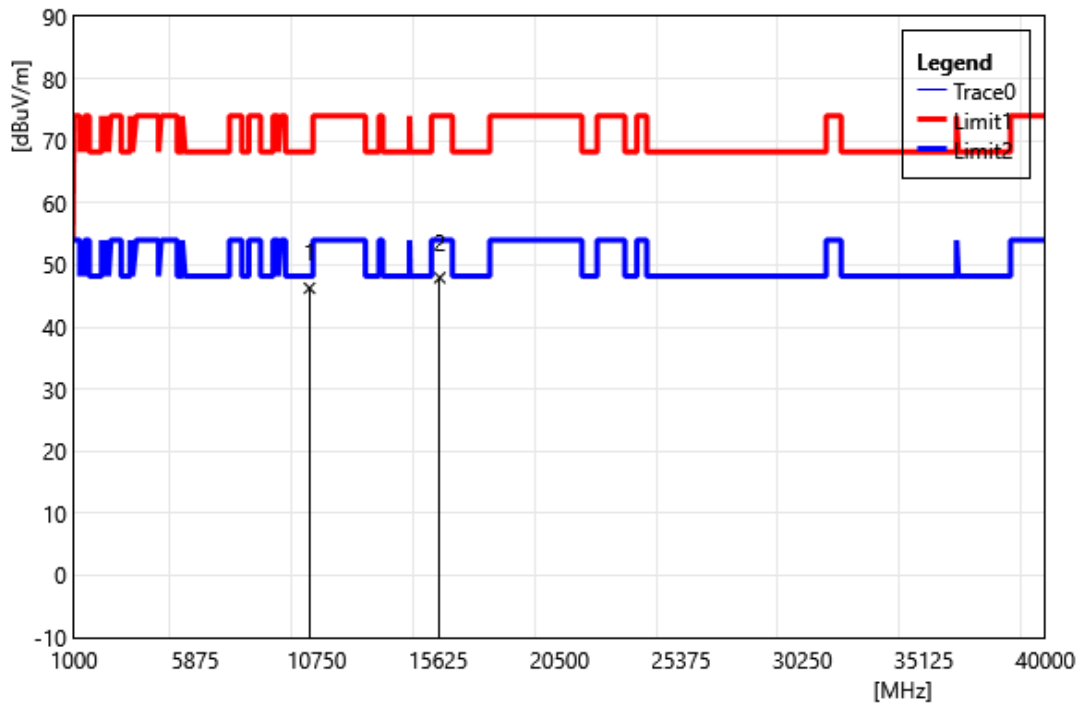


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	34.75	11.51	46.26	68.20	-21.94	PEAK
2	15690.00	34.08	13.85	47.93	74.00	-26.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230 MHz		
Polarization:	Horizontal		
Remark:			

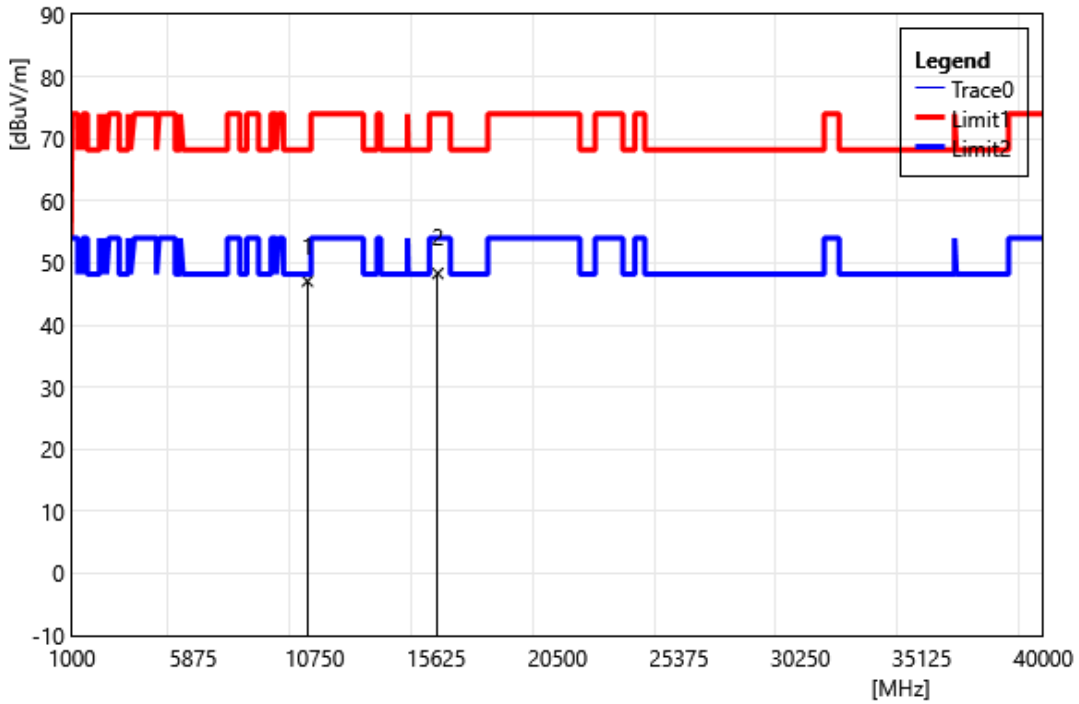


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	35.55	11.51	47.06	68.20	-21.14	PEAK
2	15690.00	34.47	13.85	48.32	74.00	-25.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

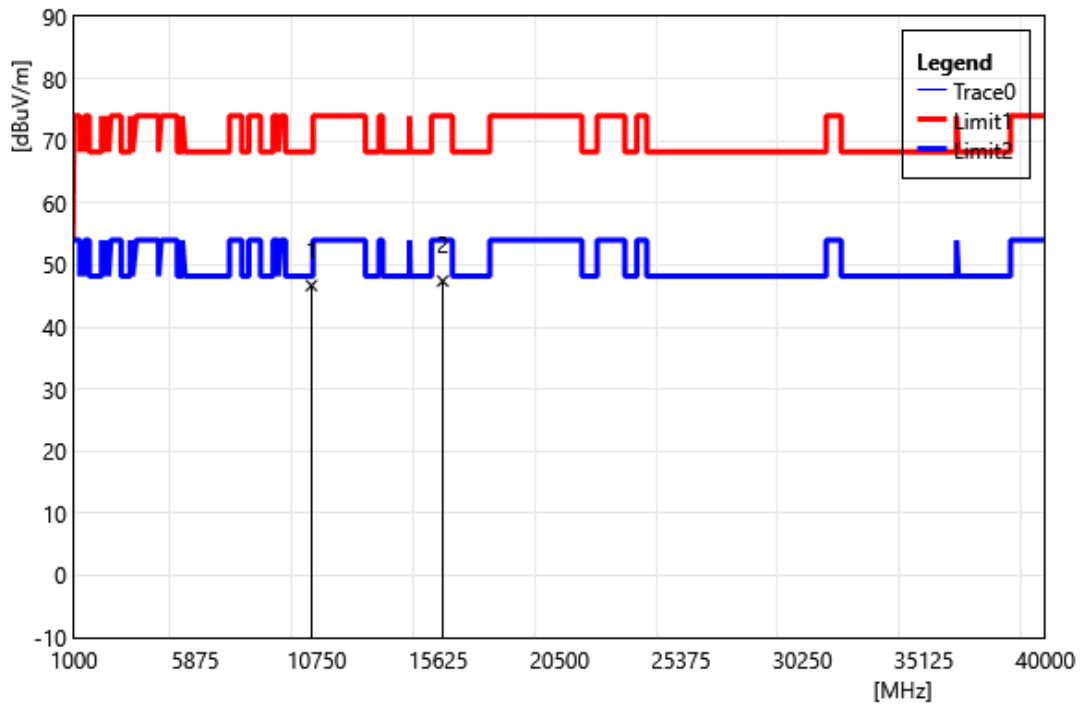


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	35.10	11.58	46.68	68.20	-21.52	PEAK
2	15810.00	33.72	13.69	47.41	74.00	-26.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

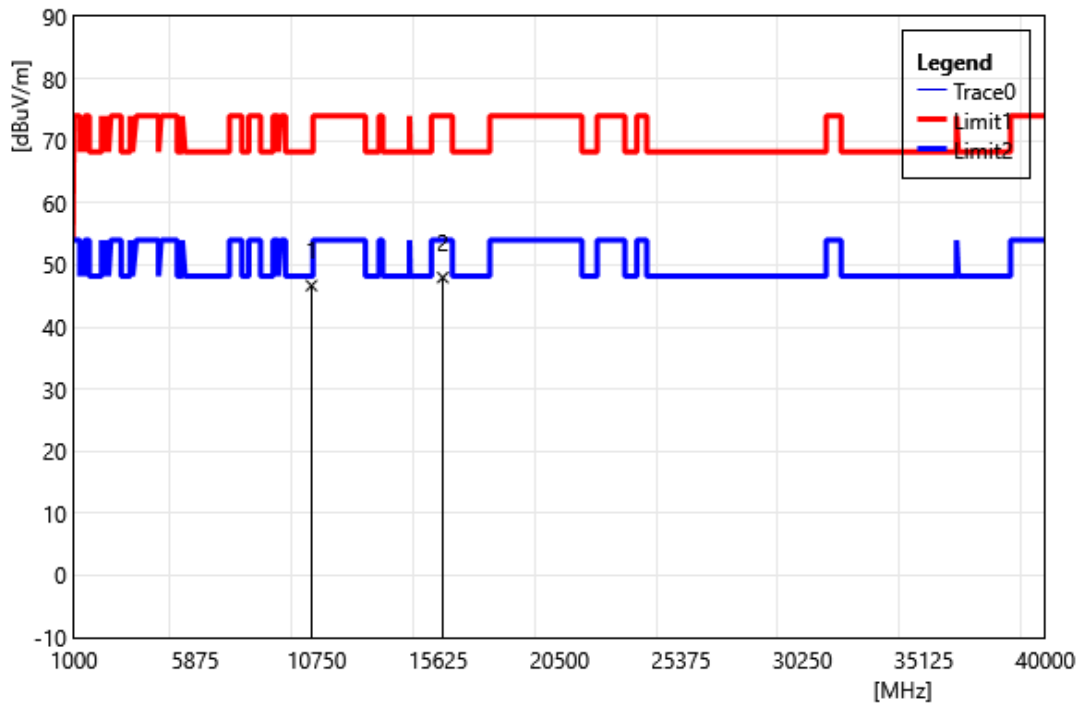


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	35.10	11.58	46.68	68.20	-21.52	PEAK
2	15810.00	34.29	13.69	47.98	74.00	-26.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

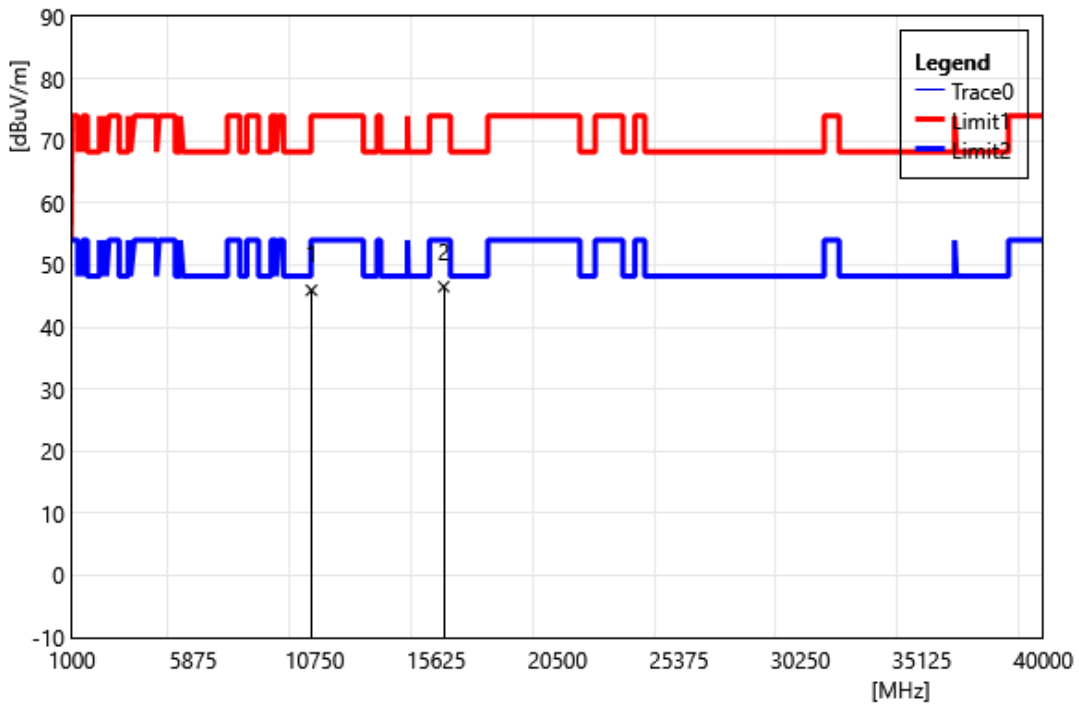


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	34.37	11.55	45.92	74.00	-28.08	PEAK
2	15930.00	33.19	13.31	46.50	74.00	-27.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

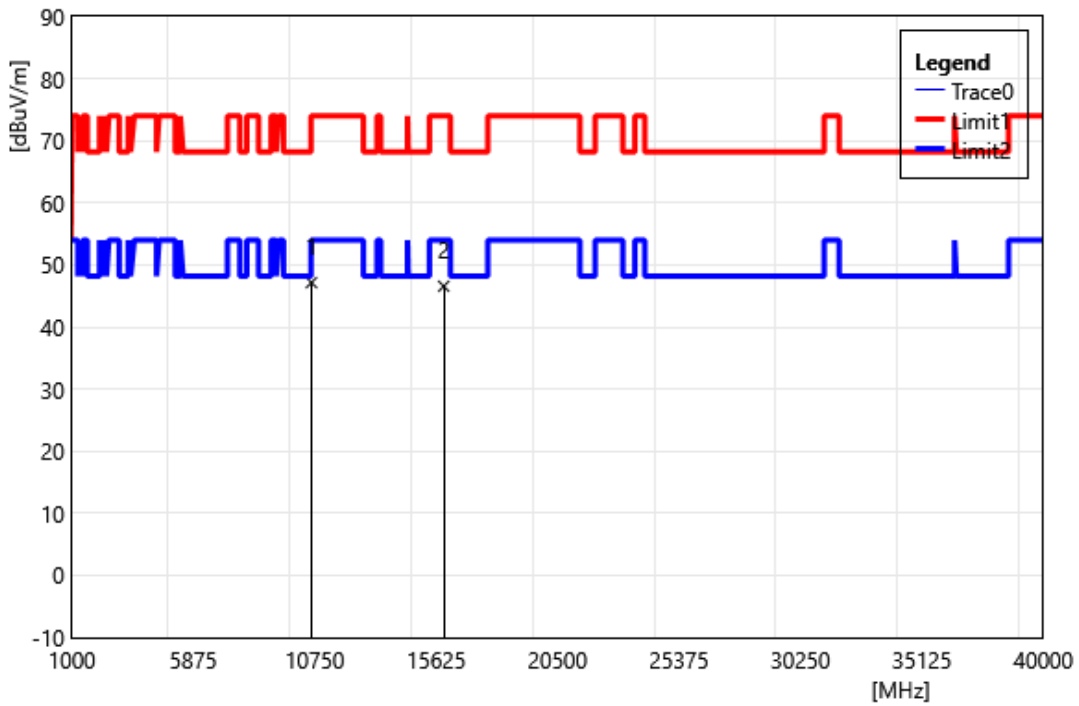


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	35.61	11.55	47.16	74.00	-26.84	PEAK
2	15930.00	33.28	13.31	46.59	74.00	-27.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

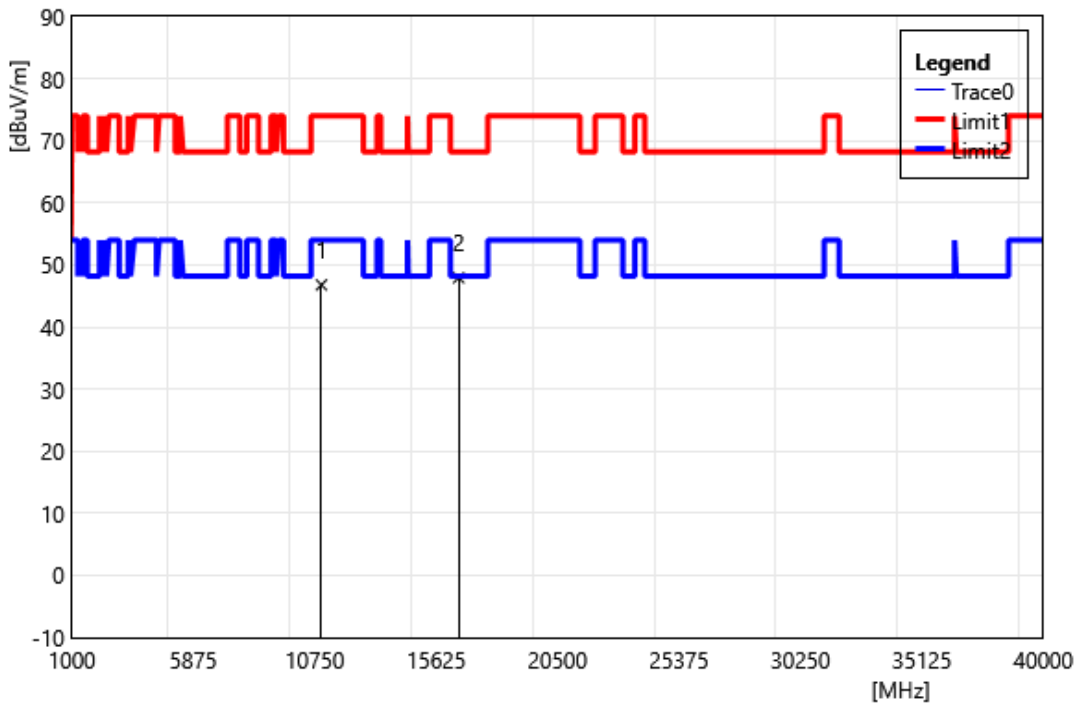


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	34.93	11.85	46.78	74.00	-27.22	PEAK
2	16530.00	33.47	14.47	47.94	68.20	-20.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

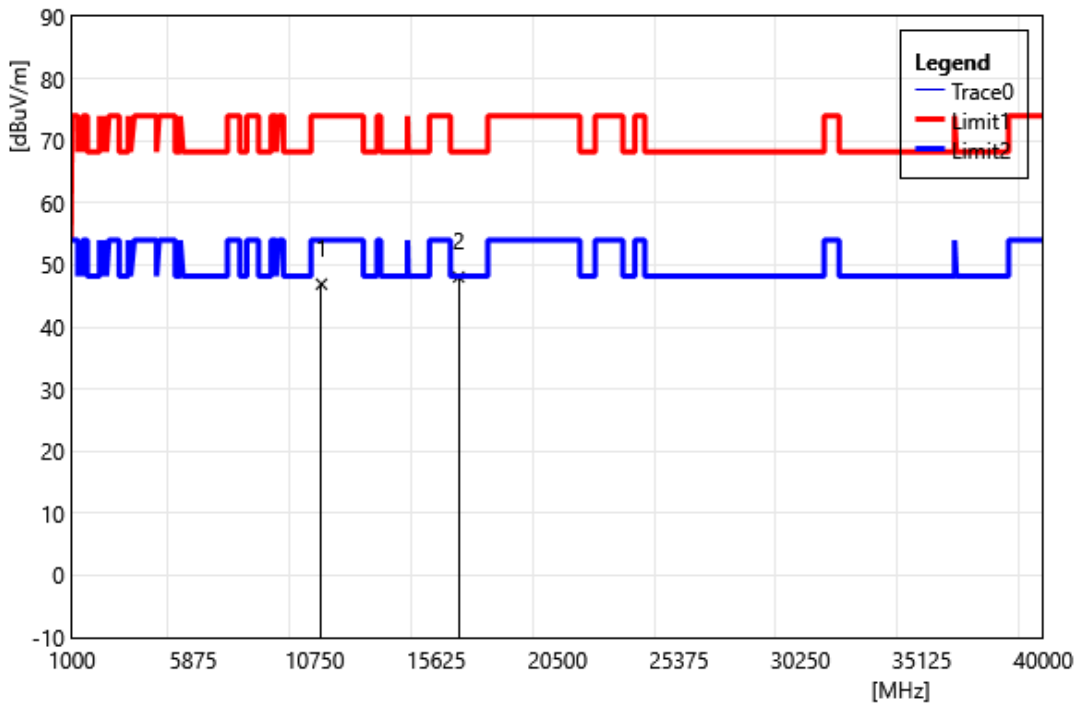


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	35.06	11.85	46.91	74.00	-27.09	PEAK
2	16530.00	33.59	14.47	48.06	68.20	-20.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

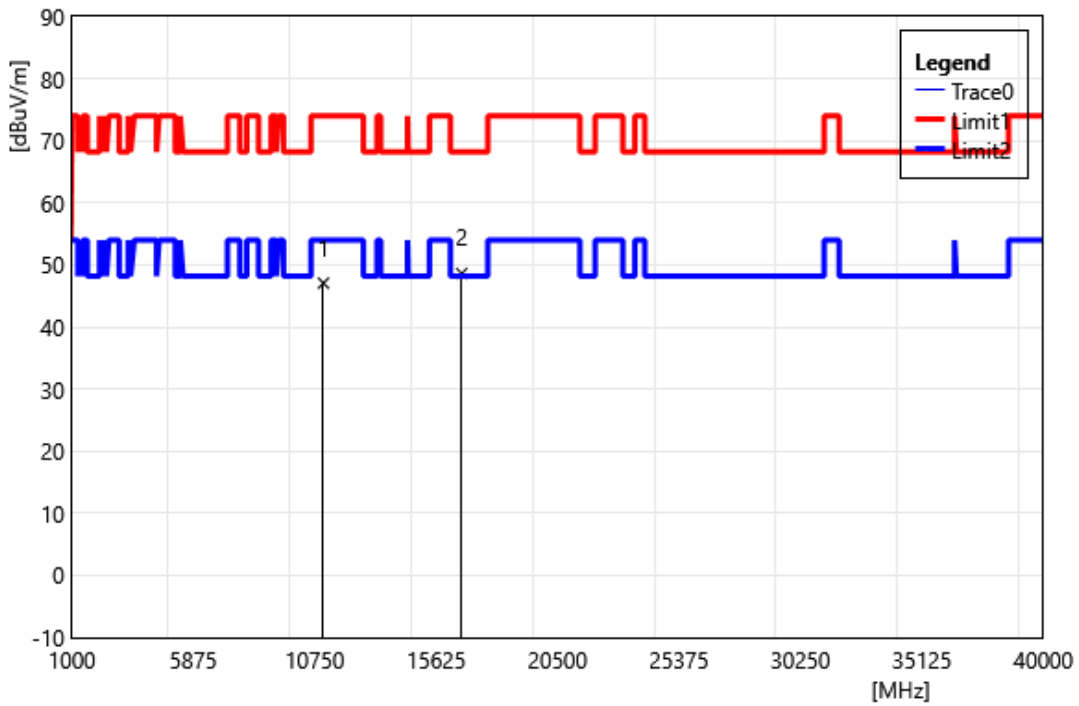


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	35.00	12.07	47.08	74.00	-26.92	PEAK
2	16650.00	33.55	15.08	48.63	68.20	-19.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

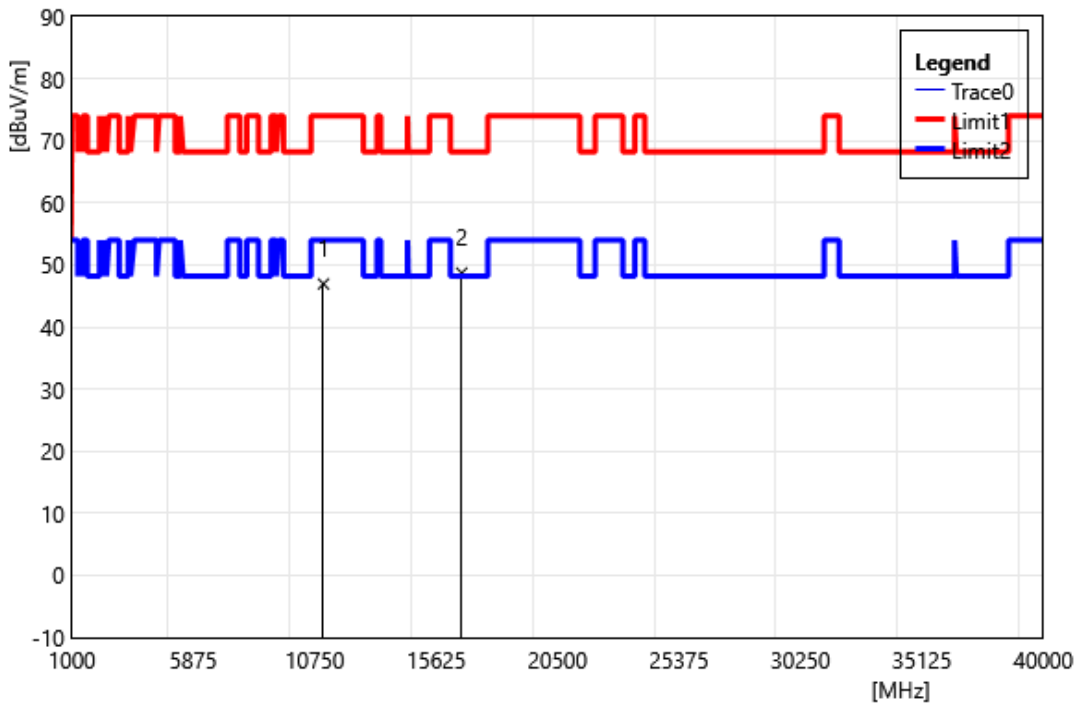


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	34.88	12.07	46.95	74.00	-27.05	PEAK
2	16650.00	33.62	15.08	48.70	68.20	-19.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

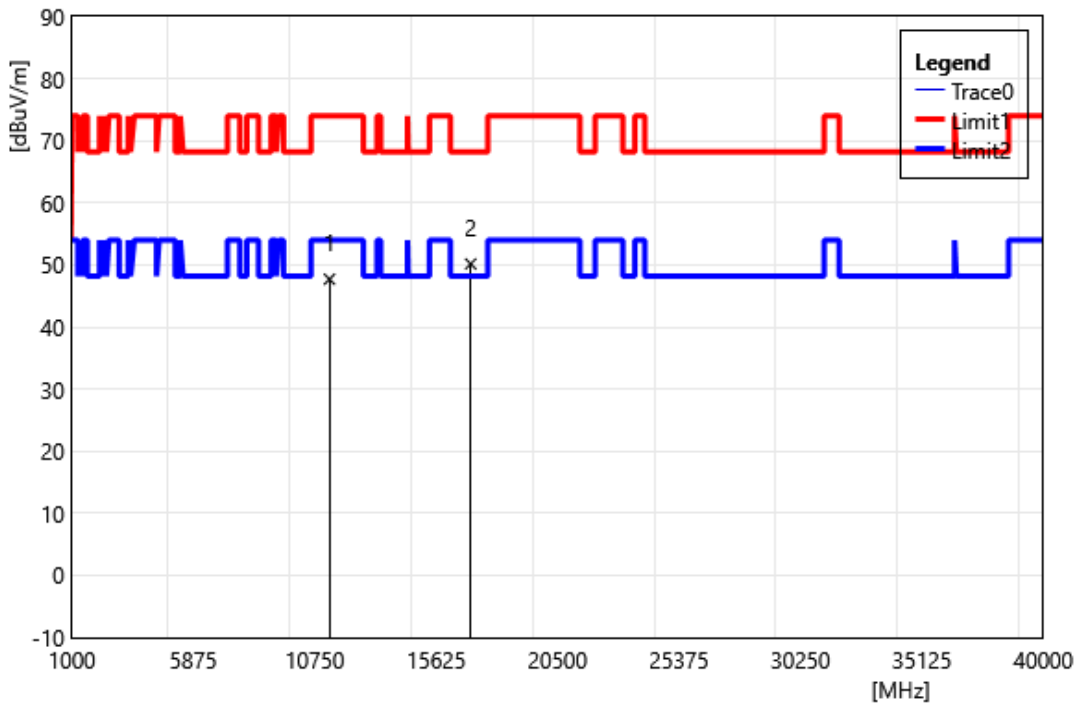


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	35.66	12.05	47.71	74.00	-26.29	PEAK
2	17010.00	33.38	16.79	50.17	68.20	-18.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

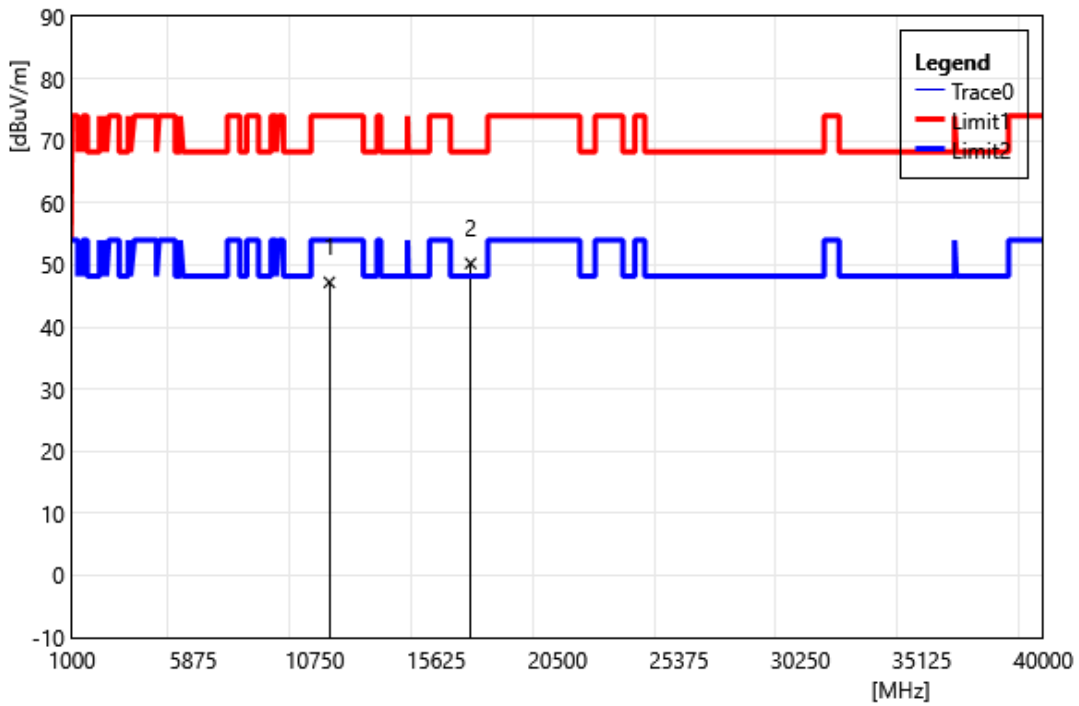


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	35.16	12.05	47.21	74.00	-26.79	PEAK
2	17010.00	33.46	16.79	50.25	68.20	-17.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

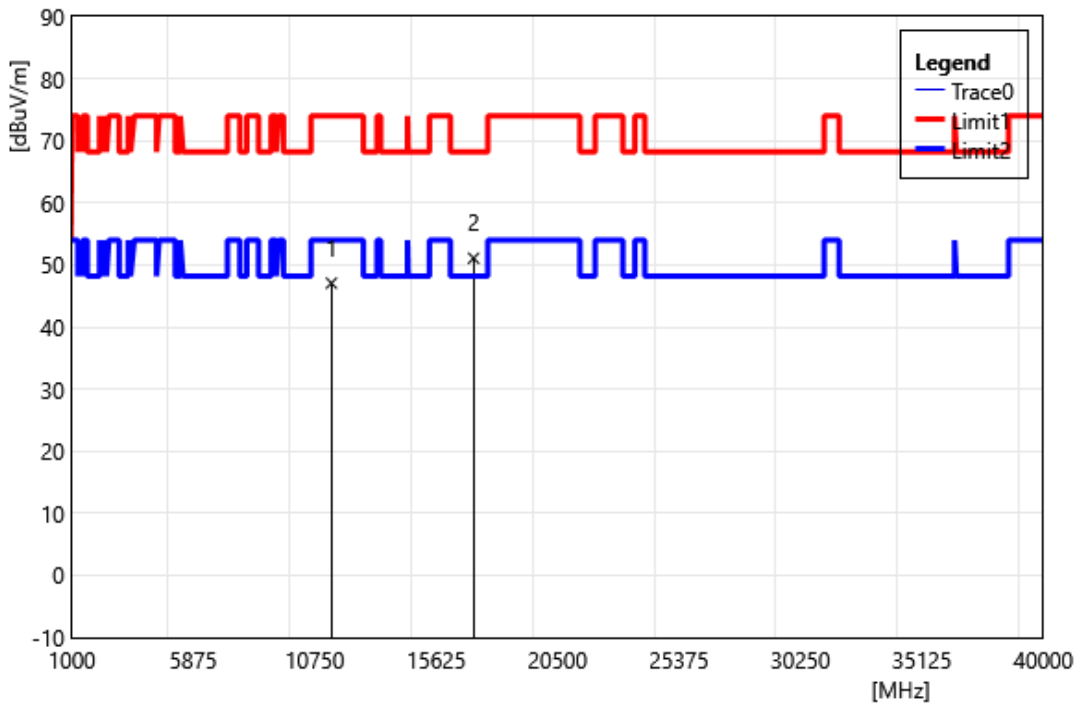


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	34.75	12.31	47.06	74.00	-26.94	PEAK
2	17130.00	33.49	17.60	51.09	68.20	-17.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

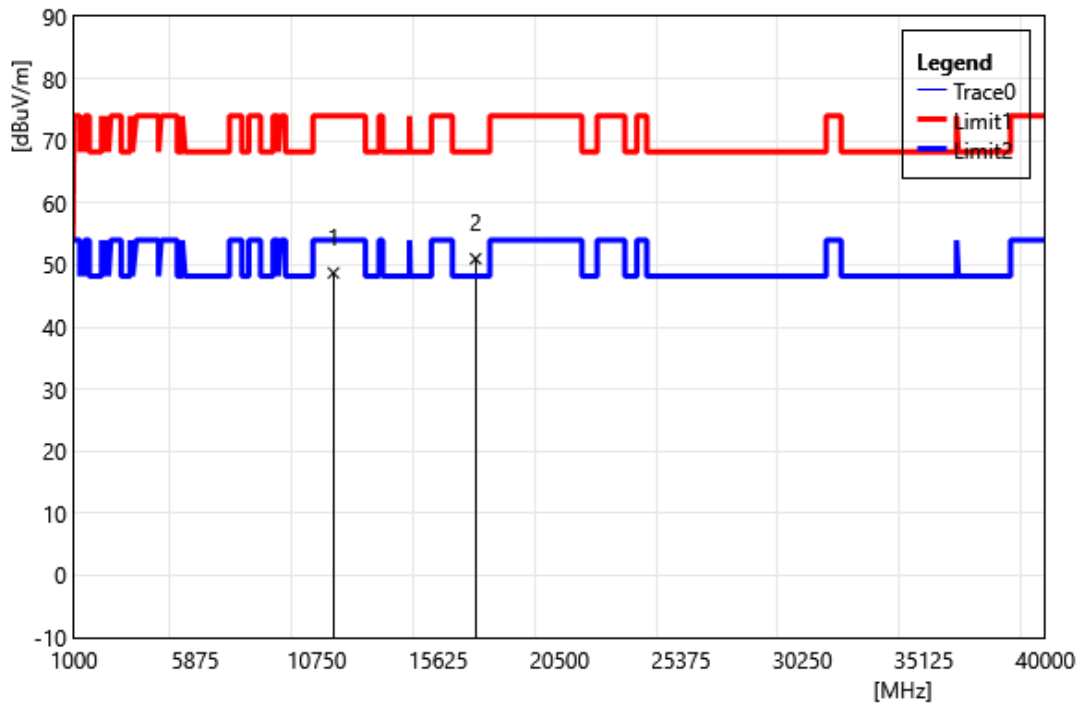


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	36.41	12.31	48.72	74.00	-25.28	PEAK
2	17130.00	33.40	17.60	51.00	68.20	-17.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

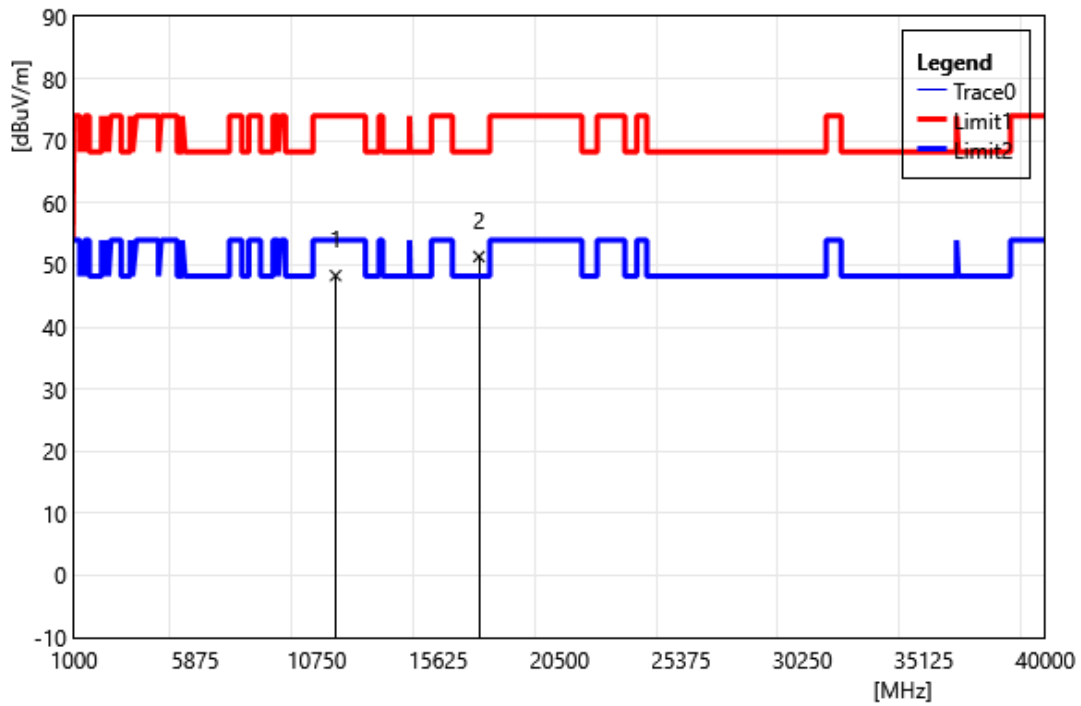


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	35.64	12.66	48.30	74.00	-25.70	PEAK
2	17265.00	32.62	18.73	51.35	68.20	-16.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

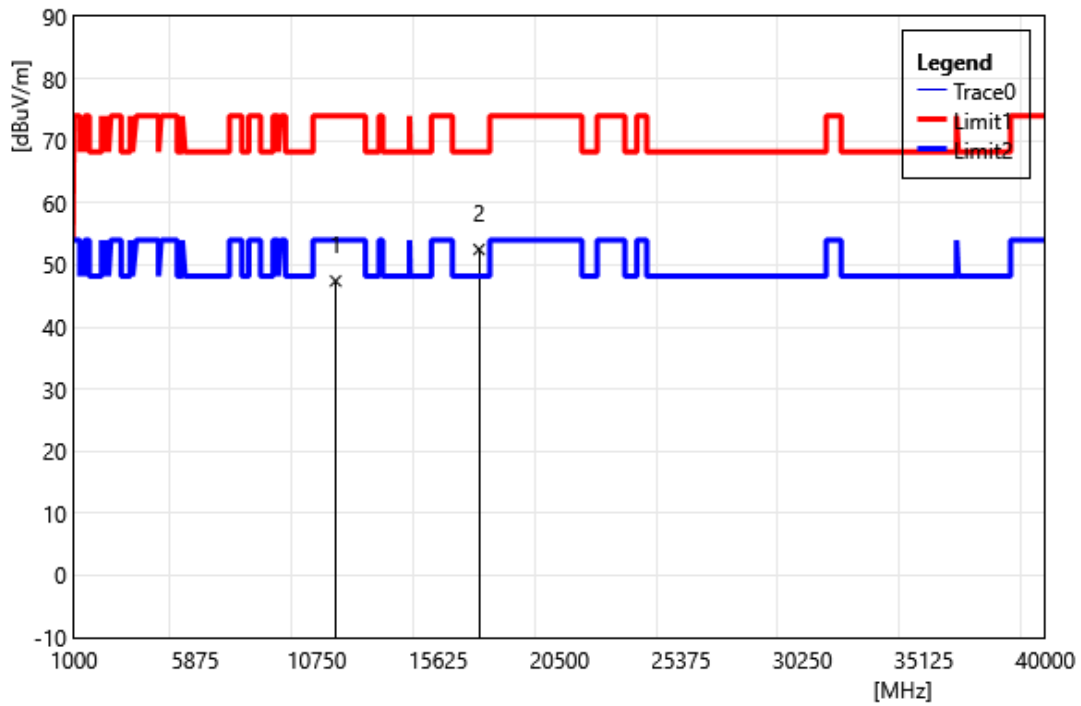


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	34.75	12.66	47.41	74.00	-26.59	PEAK
2	17265.00	33.77	18.73	52.50	68.20	-15.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

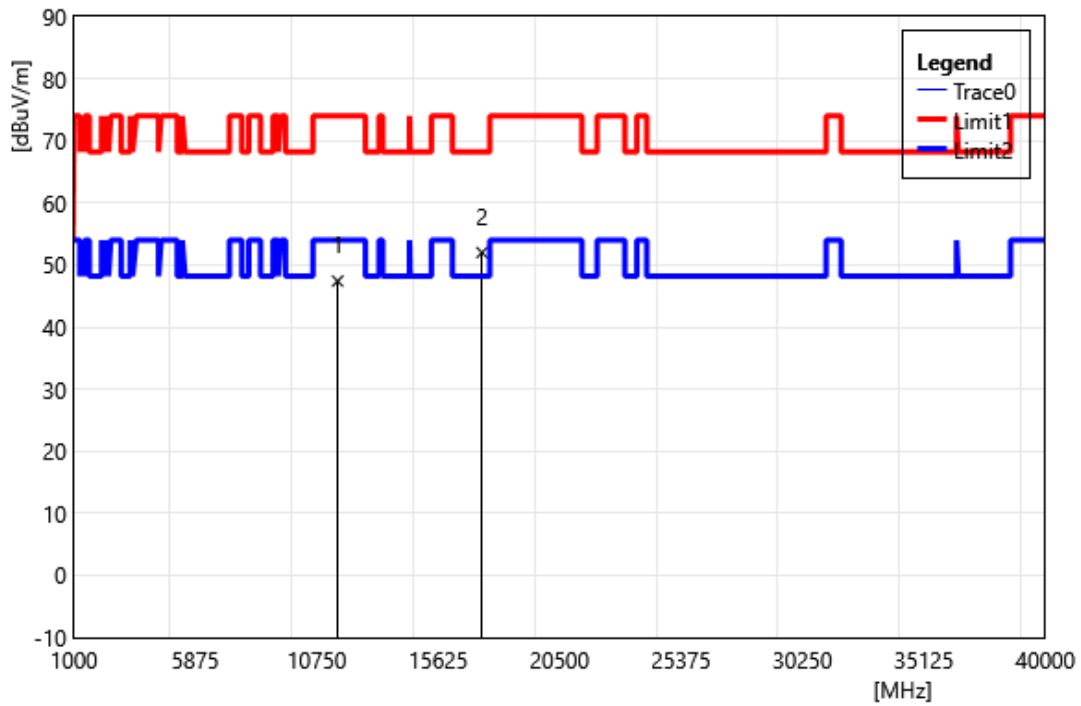


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	35.06	12.34	47.40	74.00	-26.60	PEAK
2	17385.00	32.50	19.52	52.02	68.20	-16.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

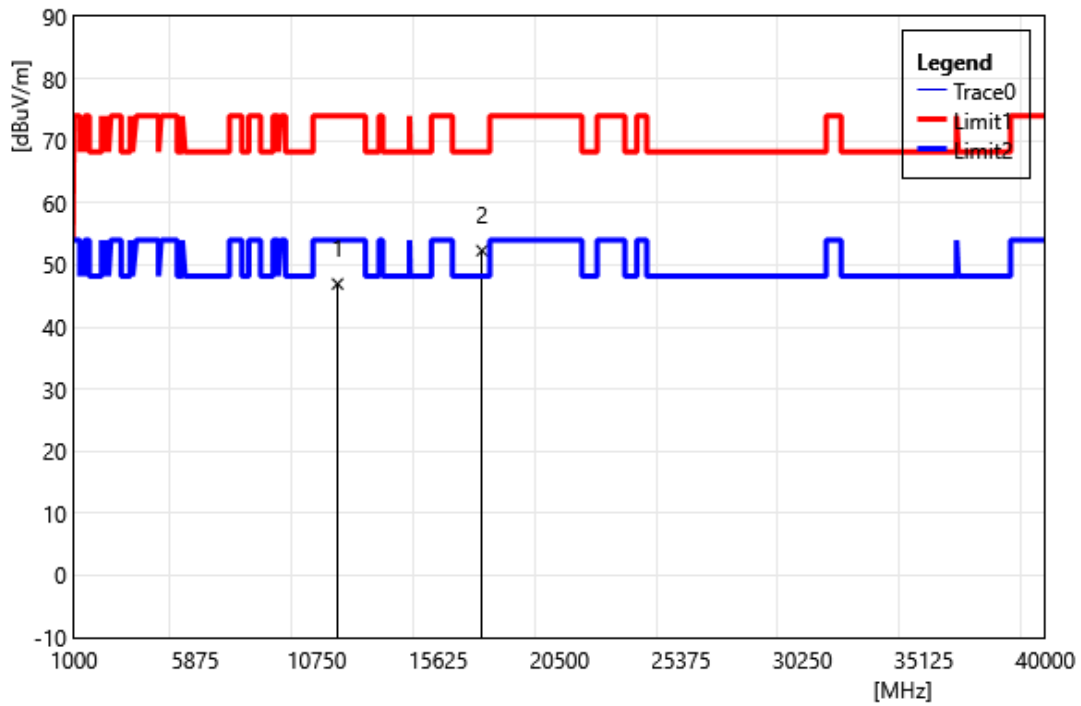


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	34.61	12.34	46.95	74.00	-27.05	PEAK
2	17385.00	32.79	19.52	52.31	68.20	-15.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

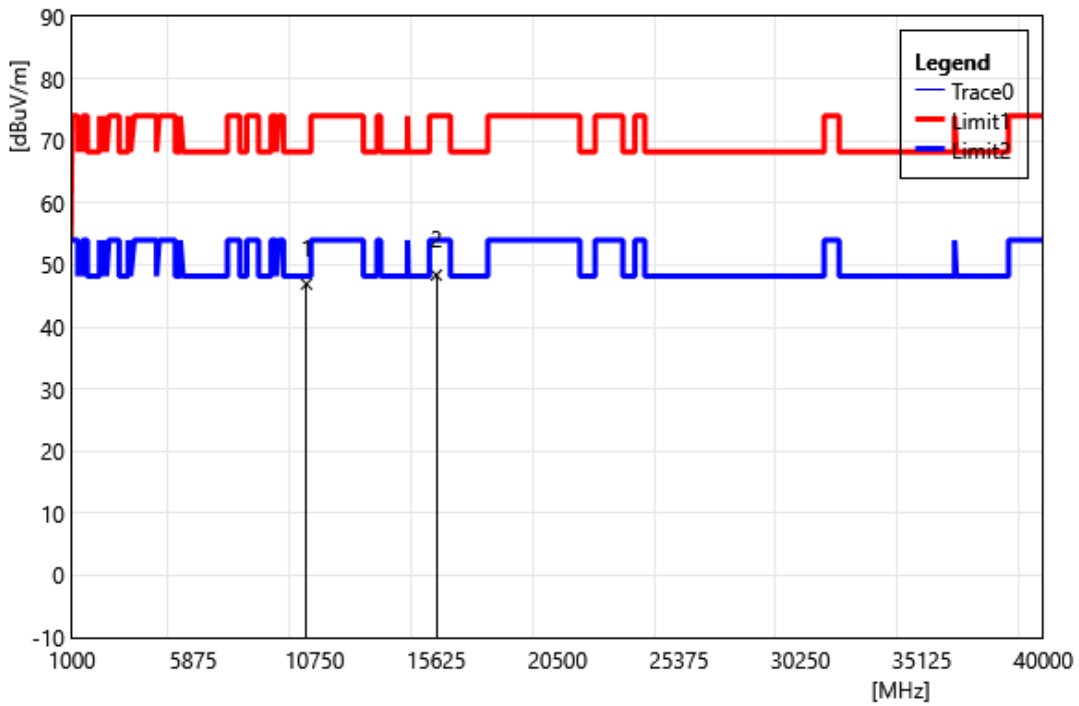


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	35.50	11.42	46.92	68.20	-21.28	PEAK
2	15630.00	34.45	13.92	48.37	74.00	-25.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

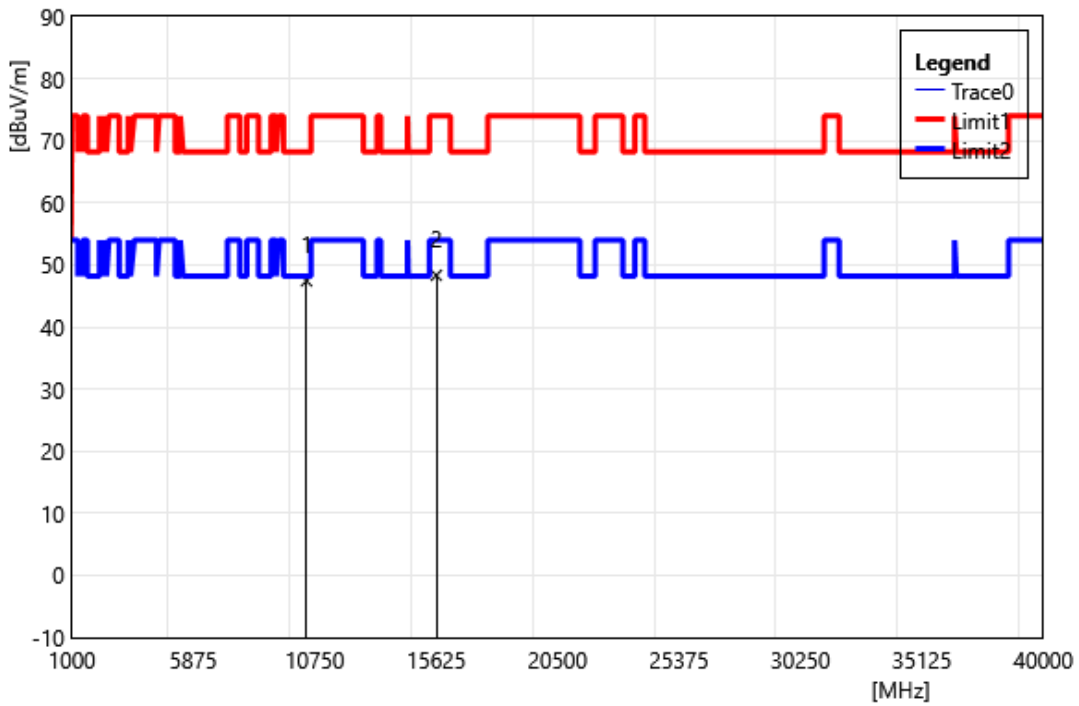


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	36.02	11.42	47.44	68.20	-20.76	PEAK
2	15630.00	34.41	13.92	48.33	74.00	-25.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

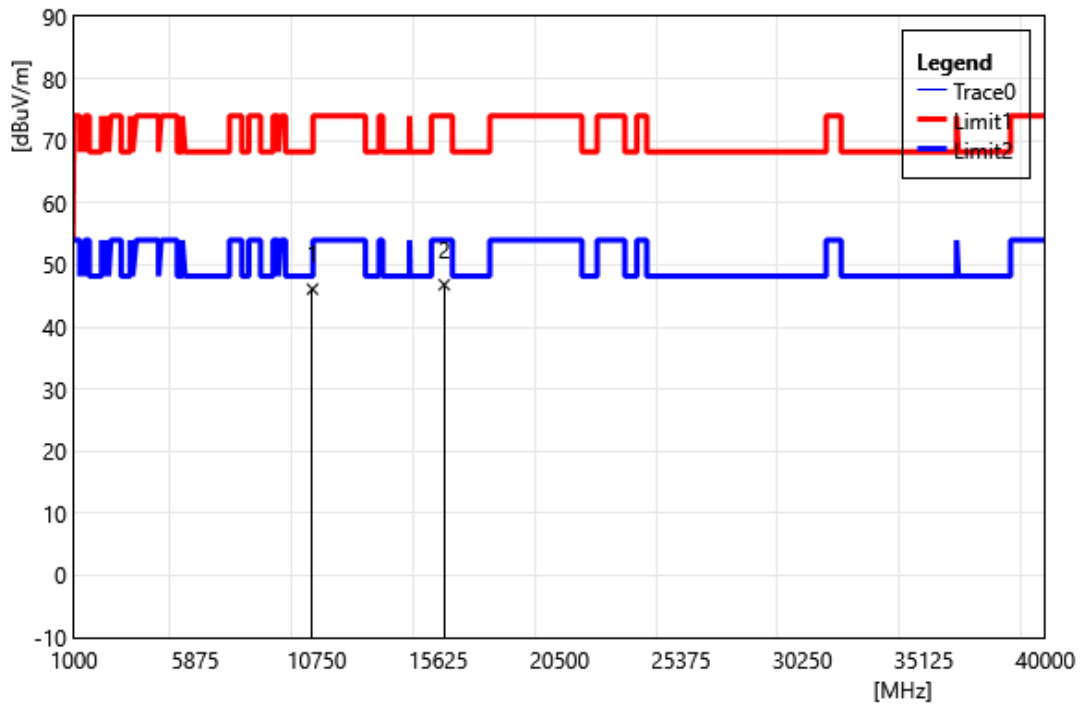


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	34.54	11.55	46.09	68.20	-22.11	PEAK
2	15870.00	33.30	13.50	46.80	74.00	-27.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

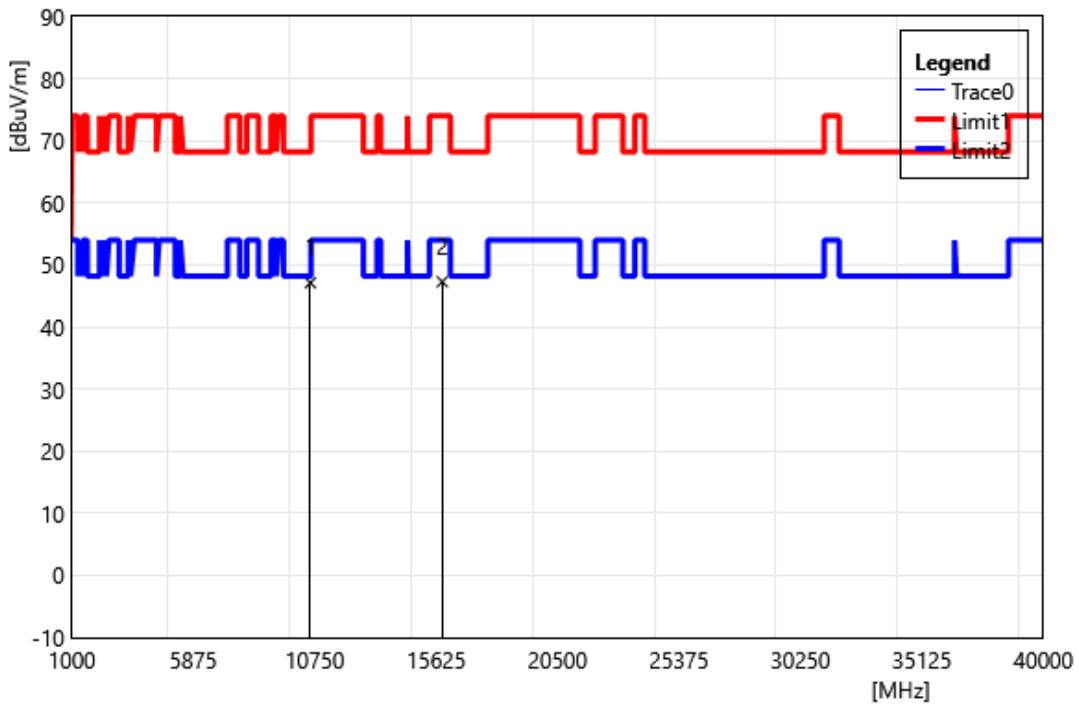


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.58	11.55	47.13	68.20	-21.07	PEAK
2	15870.00	33.80	13.50	47.30	74.00	-26.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

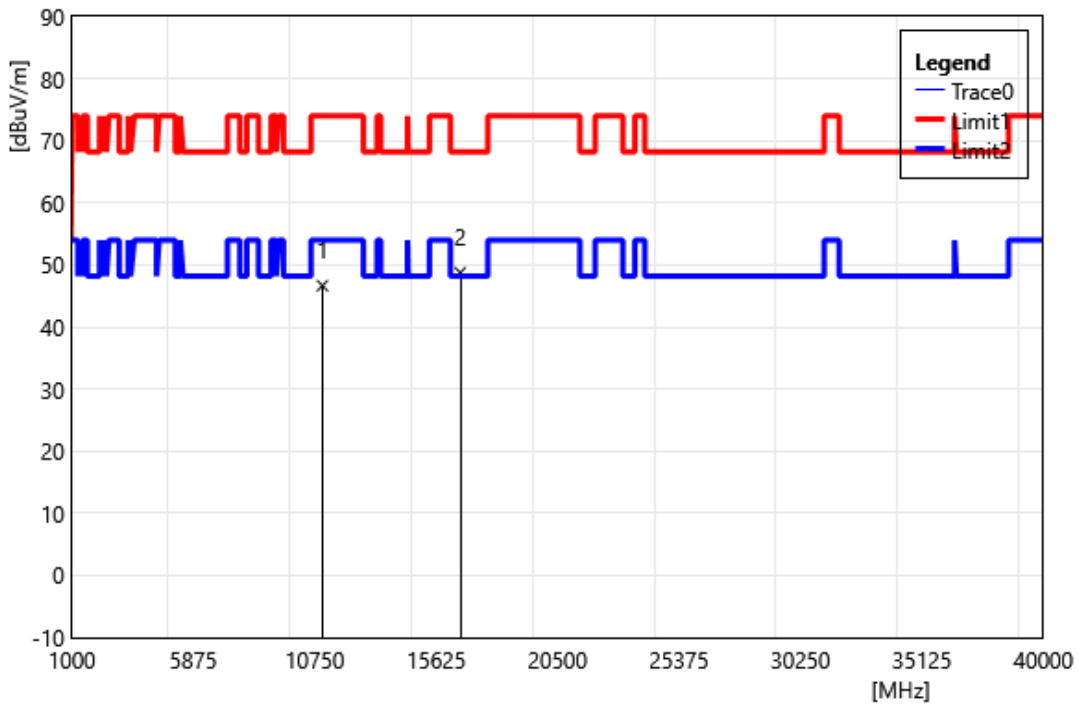


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	34.70	11.96	46.66	74.00	-27.34	PEAK
2	16590.00	33.95	14.80	48.75	68.20	-19.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

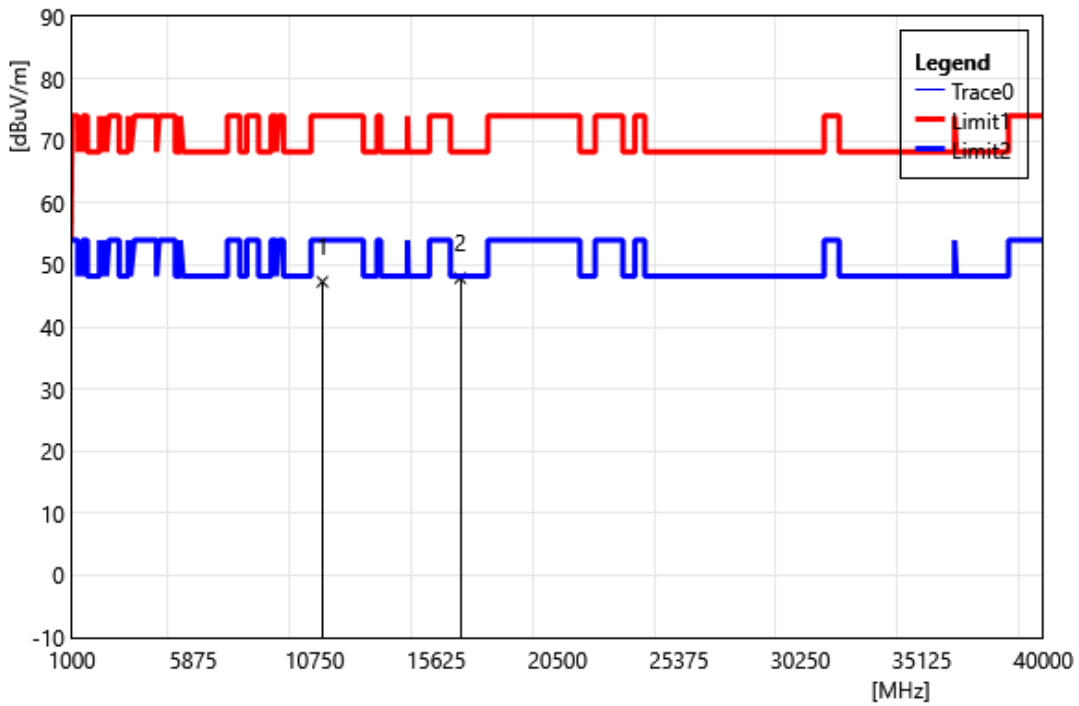


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	35.33	11.96	47.29	74.00	-26.71	PEAK
2	16590.00	33.09	14.80	47.89	68.20	-20.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

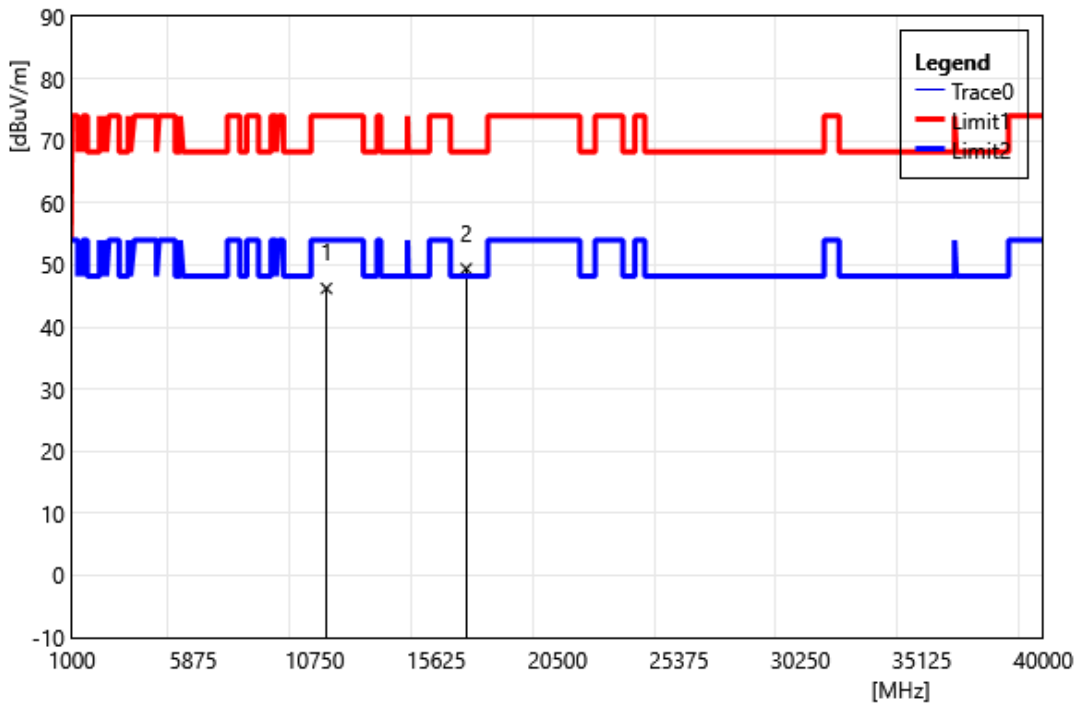


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	34.36	11.87	46.23	74.00	-27.77	PEAK
2	16830.00	33.28	16.11	49.39	68.20	-18.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

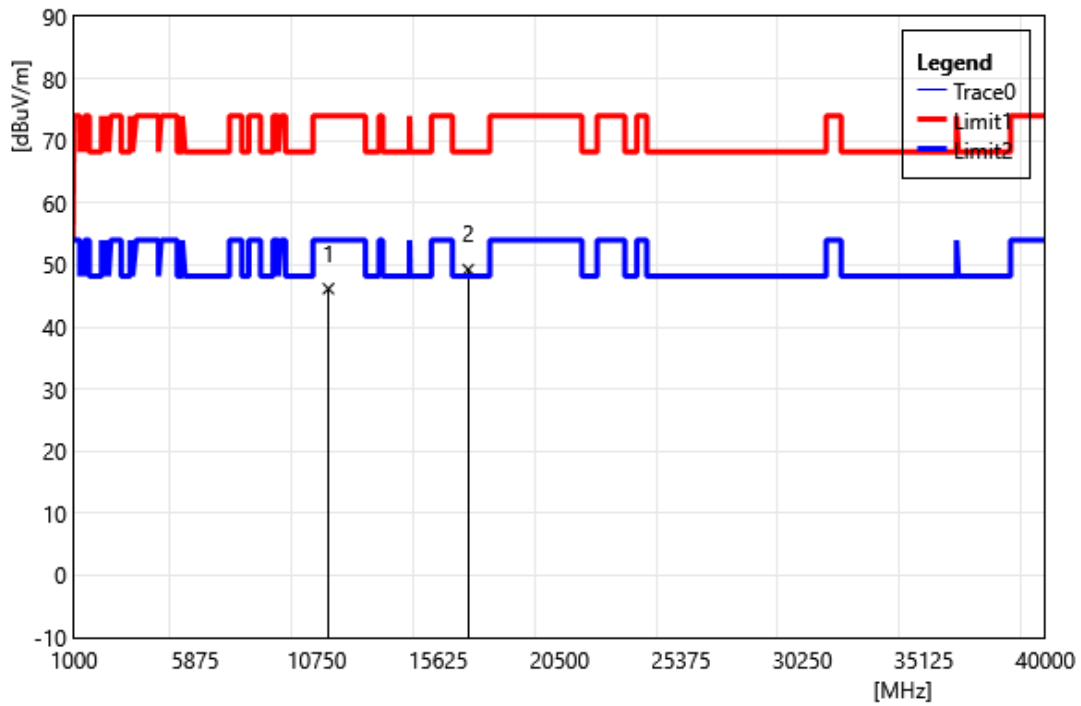


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	34.30	11.87	46.17	74.00	-27.83	PEAK
2	16830.00	33.16	16.11	49.27	68.20	-18.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

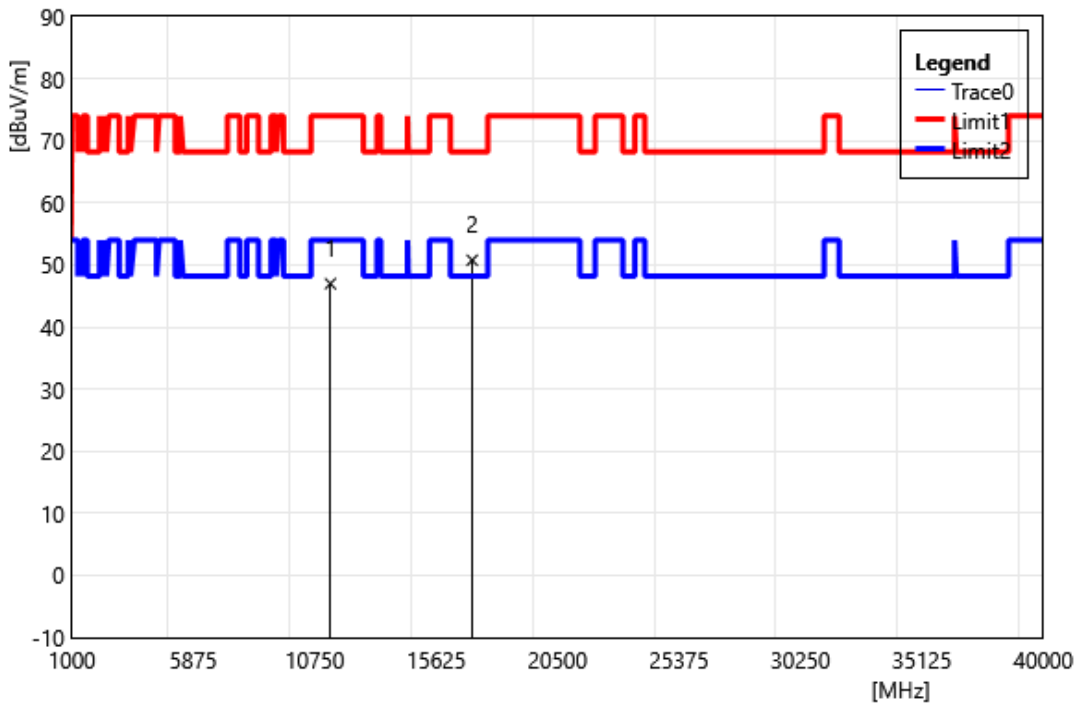


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	34.82	12.16	46.98	74.00	-27.02	PEAK
2	17070.00	33.59	17.18	50.77	68.20	-17.43	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

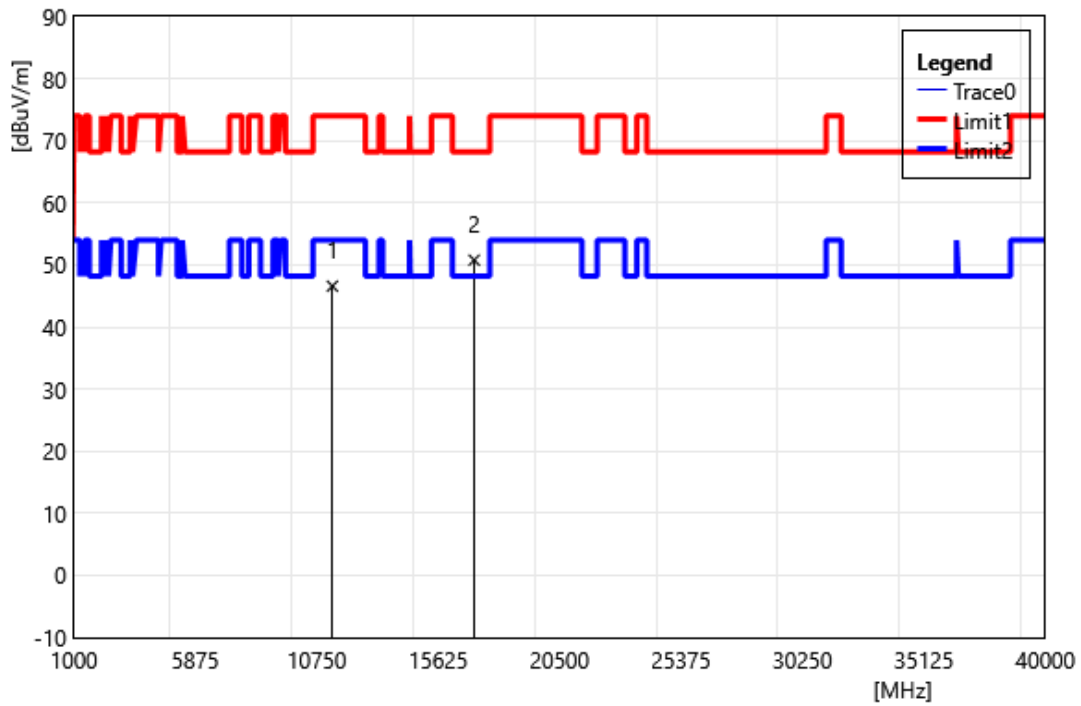


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	34.43	12.16	46.59	74.00	-27.41	PEAK
2	17070.00	33.60	17.18	50.78	68.20	-17.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

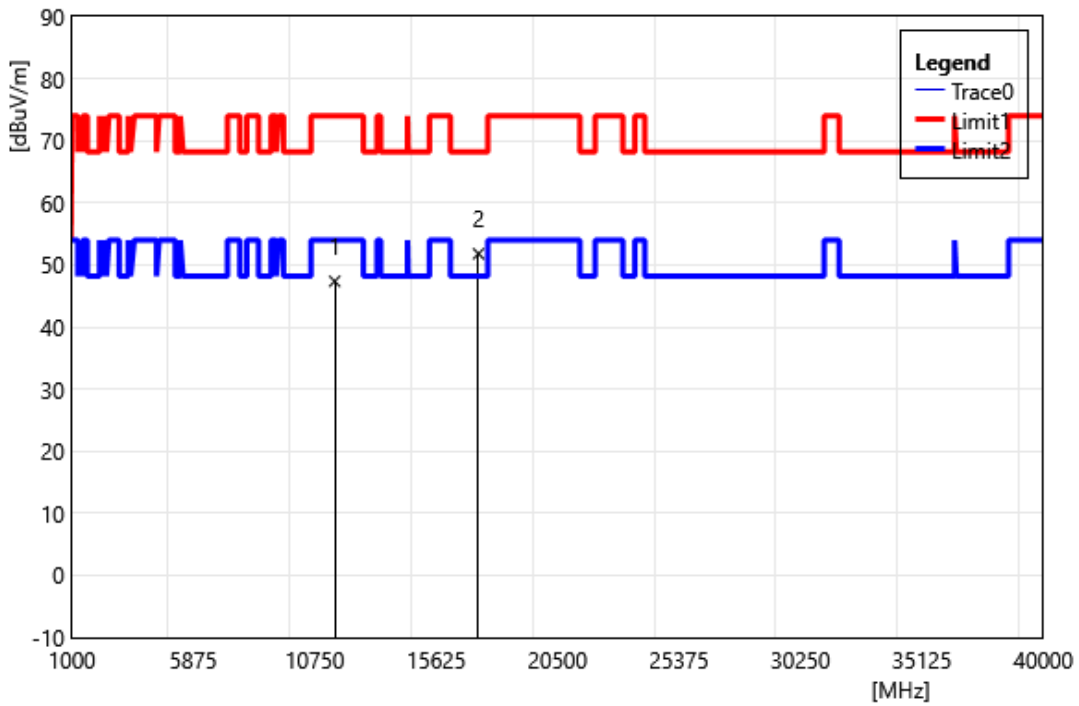


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	34.87	12.50	47.37	74.00	-26.63	PEAK
2	17325.00	32.62	19.19	51.81	68.20	-16.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

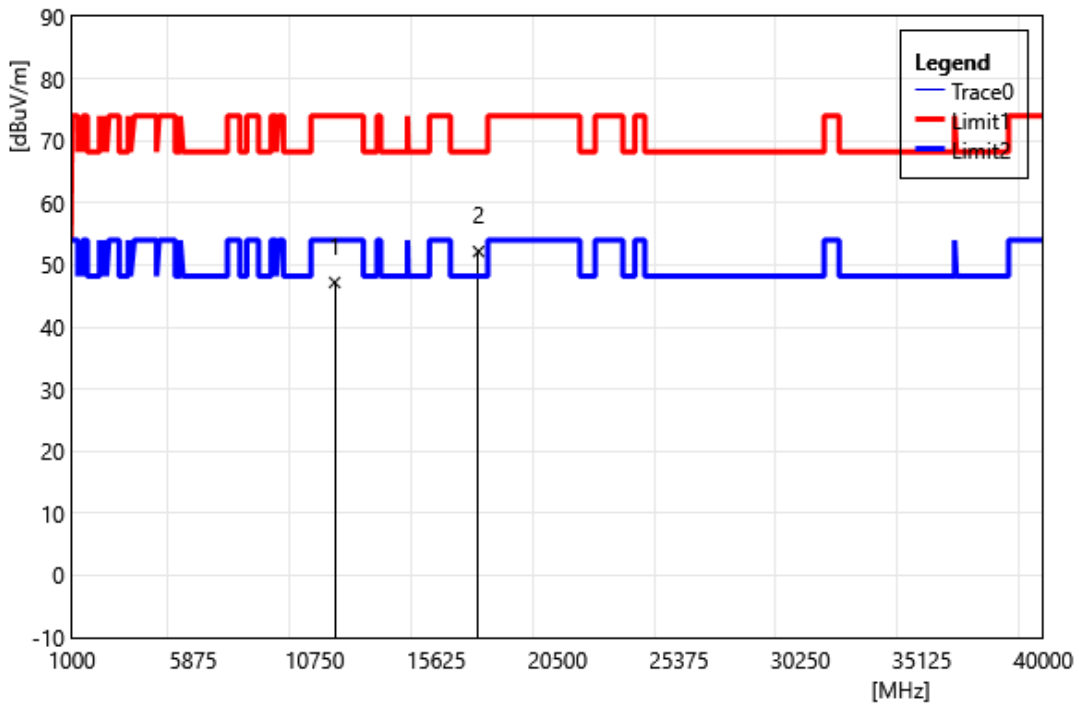


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	34.68	12.50	47.18	74.00	-26.82	PEAK
2	17325.00	32.98	19.19	52.17	68.20	-16.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

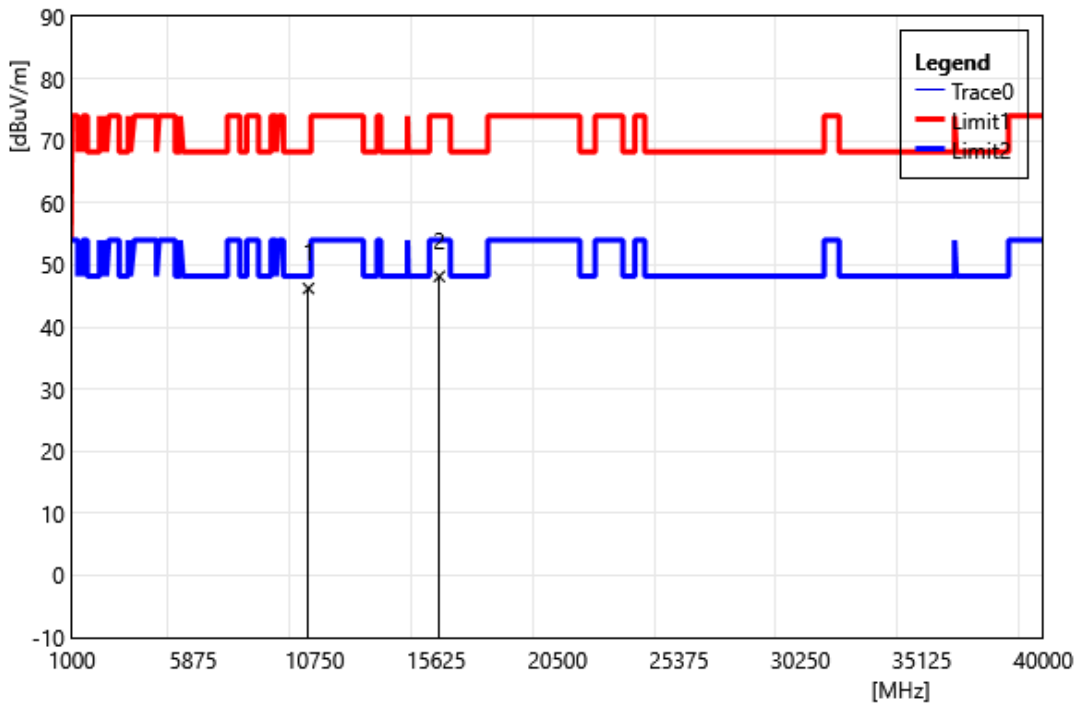


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	34.62	11.60	46.22	68.20	-21.98	PEAK
2	15750.00	34.37	13.78	48.15	74.00	-25.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

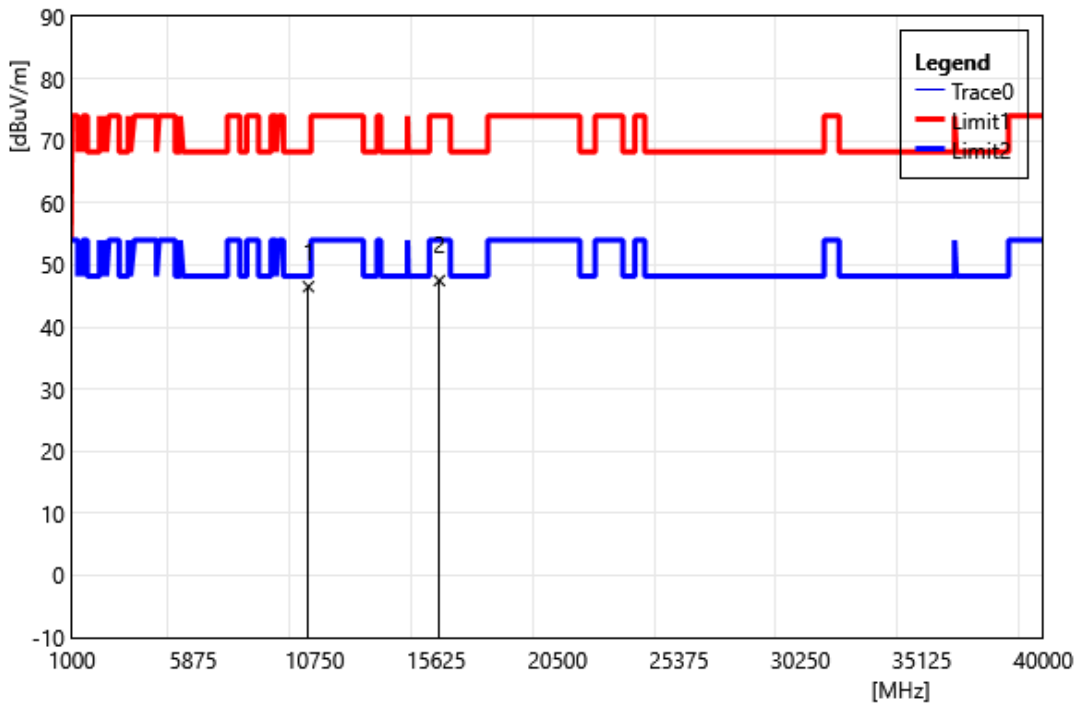


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	34.90	11.60	46.50	68.20	-21.70	PEAK
2	15750.00	33.71	13.78	47.49	74.00	-26.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHzz		
Polarization:	Vertical		
Remark:			

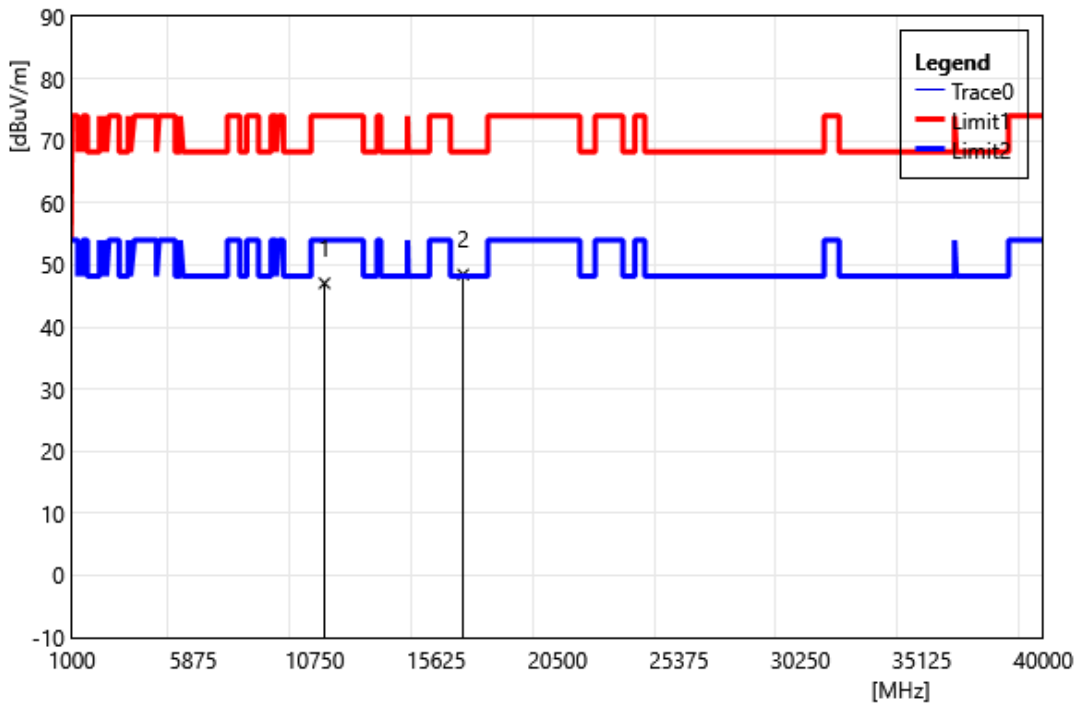


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	35.08	11.98	47.06	74.00	-26.94	PEAK
2	16710.00	33.09	15.36	48.45	68.20	-19.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

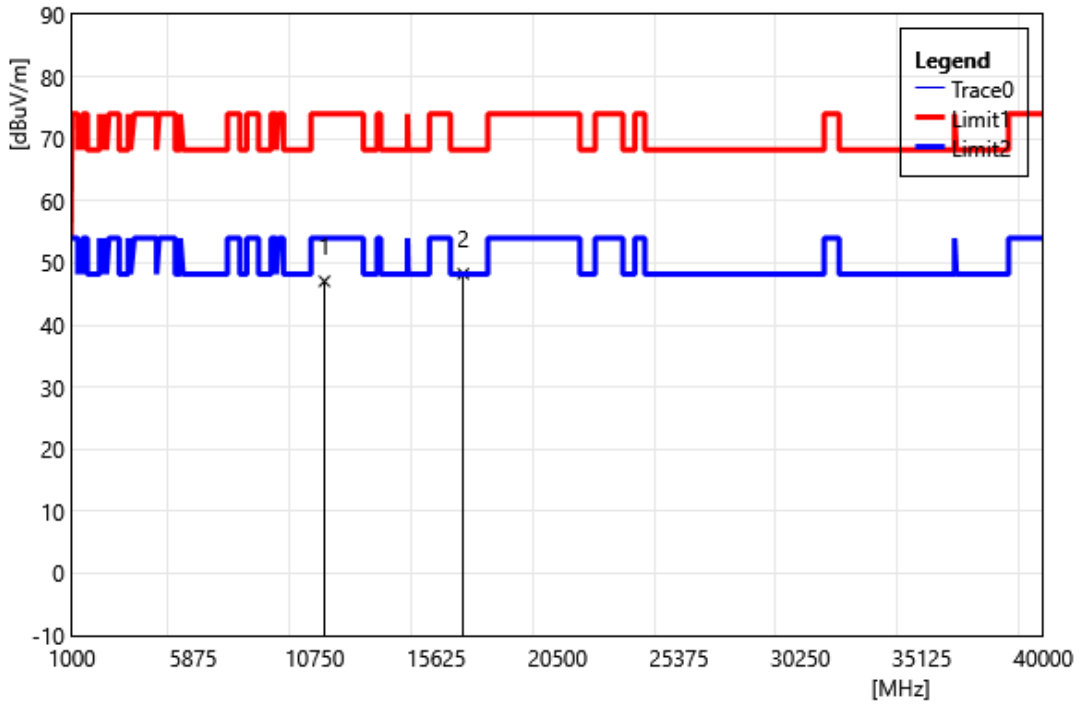


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	35.06	11.98	47.04	74.00	-26.96	PEAK
2	16710.00	32.89	15.36	48.25	68.20	-19.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	2.4G+5G+6G+BLE		
Polarization:	Vertical		
Remark:			

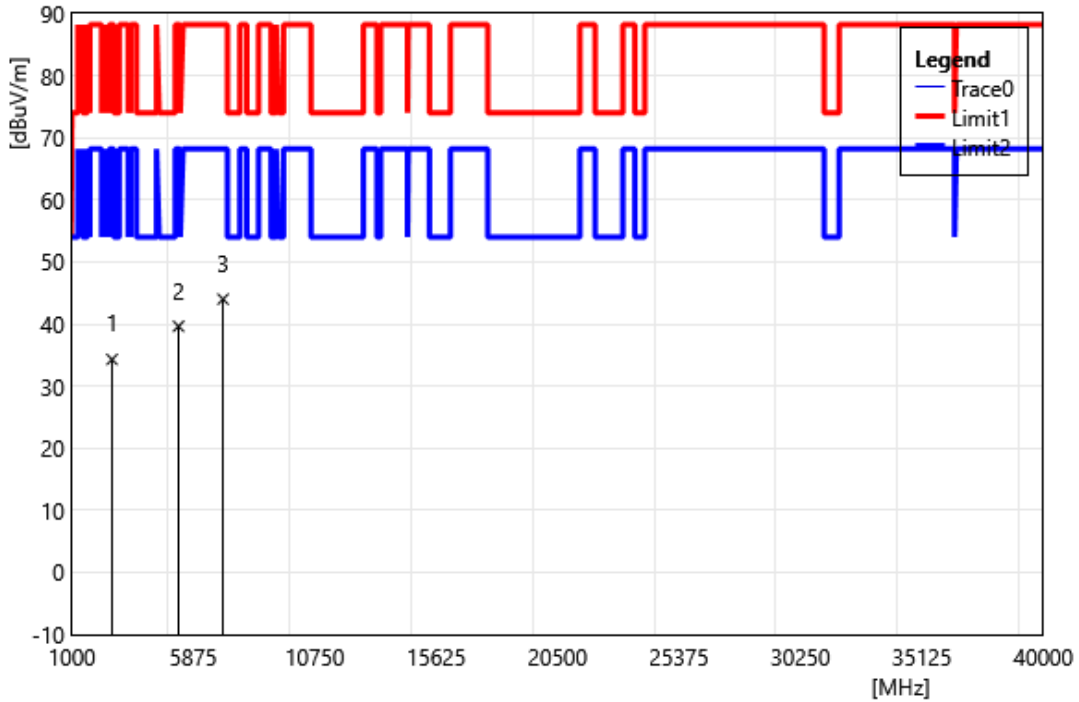

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2615.00	41.81	-7.50	34.31	88.20	-53.89	PEAK
2	5284.00	41.24	-1.60	39.64	88.20	-48.56	PEAK
3	7069.00	39.36	4.65	44.01	88.20	-44.19	PEAK


Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	2.4G+5G+6G+BLE		
Polarization:	Horizontal		
Remark:			

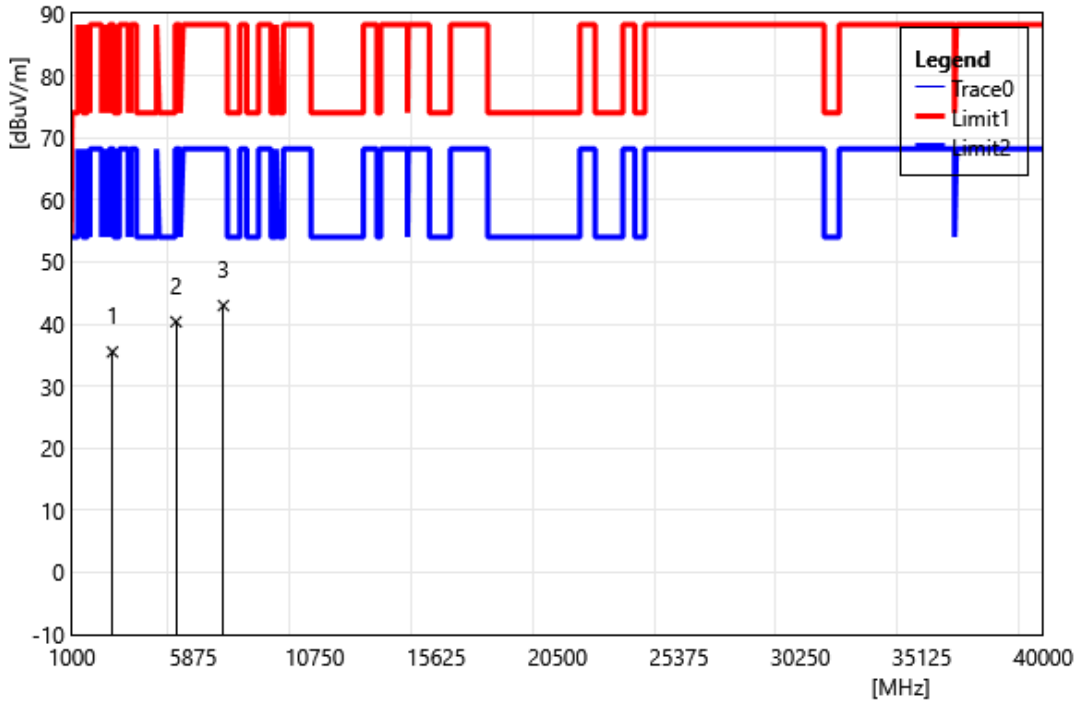

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2632.00	42.92	-7.41	35.51	88.20	-52.69	PEAK
2	5182.00	41.44	-1.07	40.37	88.20	-47.83	PEAK
3	7086.00	38.17	4.80	42.97	88.20	-45.23	PEAK


1X1- Band Edge

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

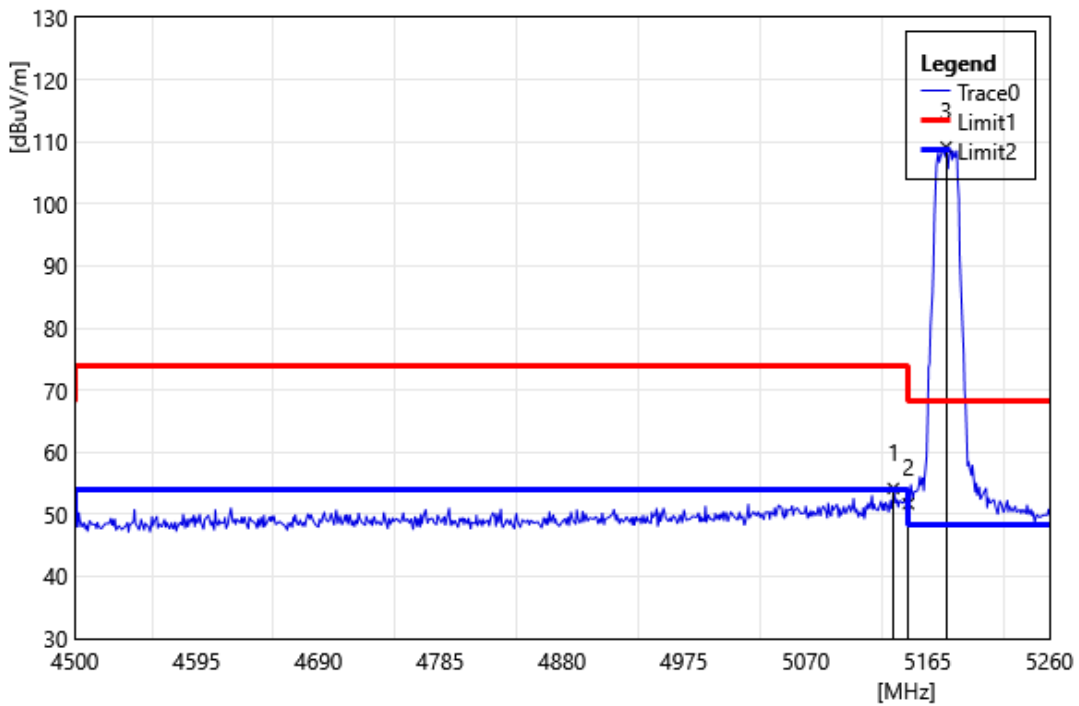


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5138.40	55.06	-0.90	54.16	74.00	-19.84	PEAK
2	5150.00	52.62	-0.91	51.71	74.00	-22.29	PEAK
3	5179.44	110.19	-1.05	109.14	68.20	40.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

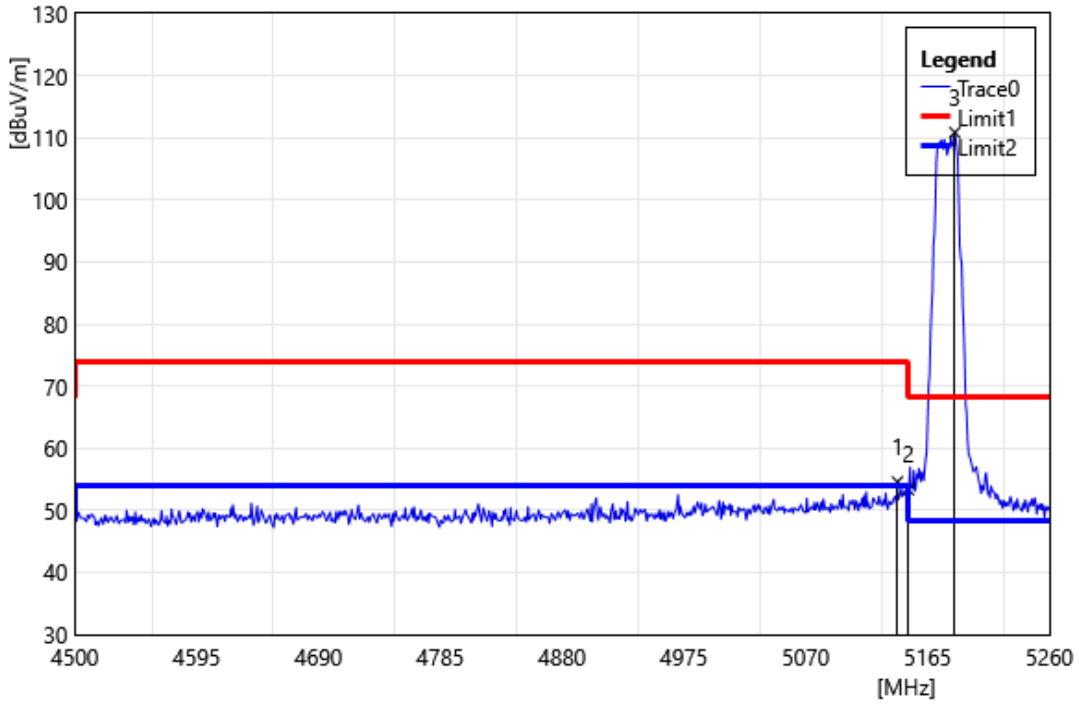


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5141.44	55.48	-0.90	54.58	74.00	-19.42	PEAK
2	5150.00	54.25	-0.91	53.34	74.00	-20.66	PEAK
3	5186.28	111.94	-1.09	110.86	68.20	42.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.47
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

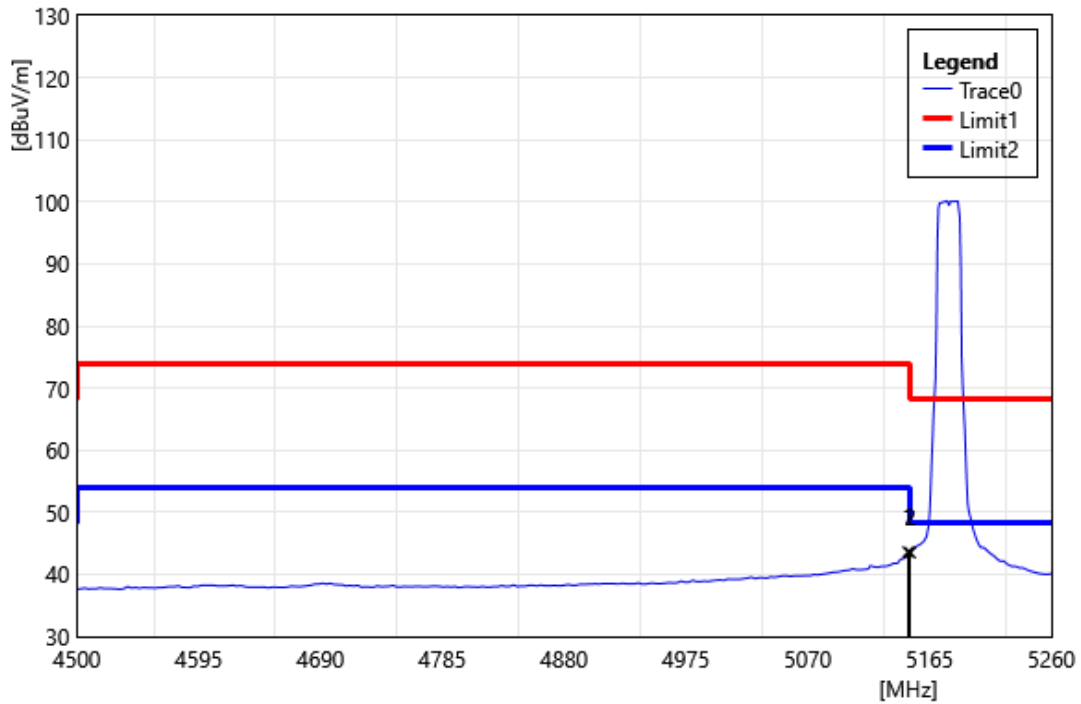


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	44.51	-0.91	43.60	54.00	-10.40	AVG
2	5150.00	44.42	-0.91	43.51	54.00	-10.49	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

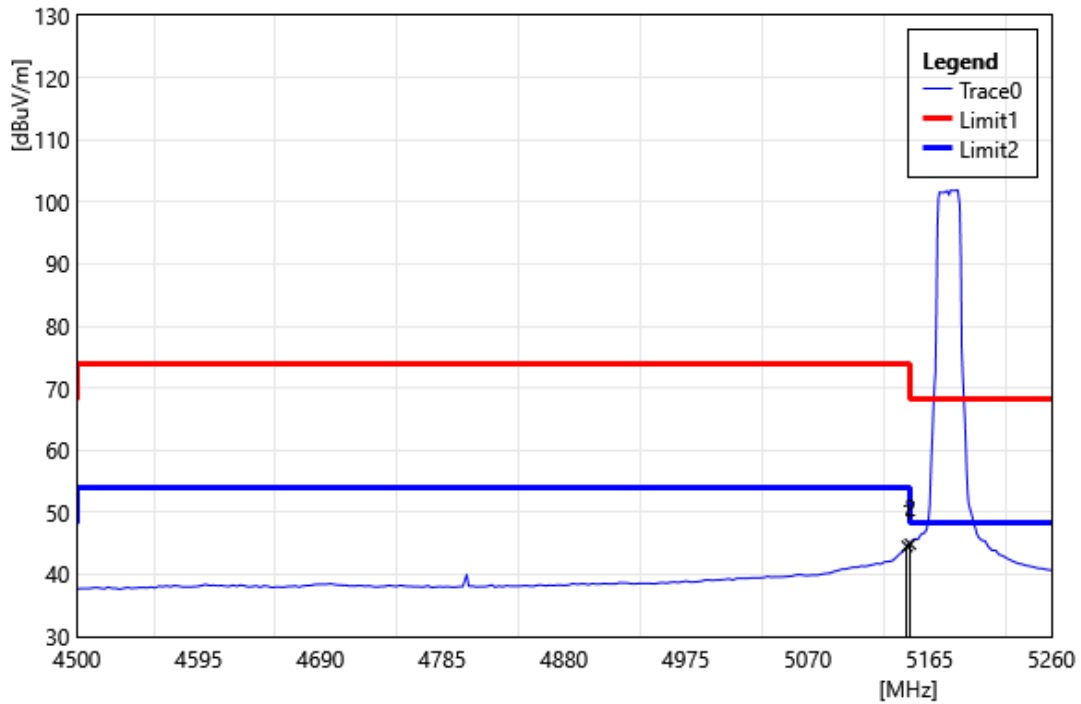


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	45.44	-0.91	44.53	54.00	-9.47	AVG
2	5150.00	45.79	-0.91	44.88	54.00	-9.12	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5200 MHz		
Polarization:	Vertical		
Remark:			

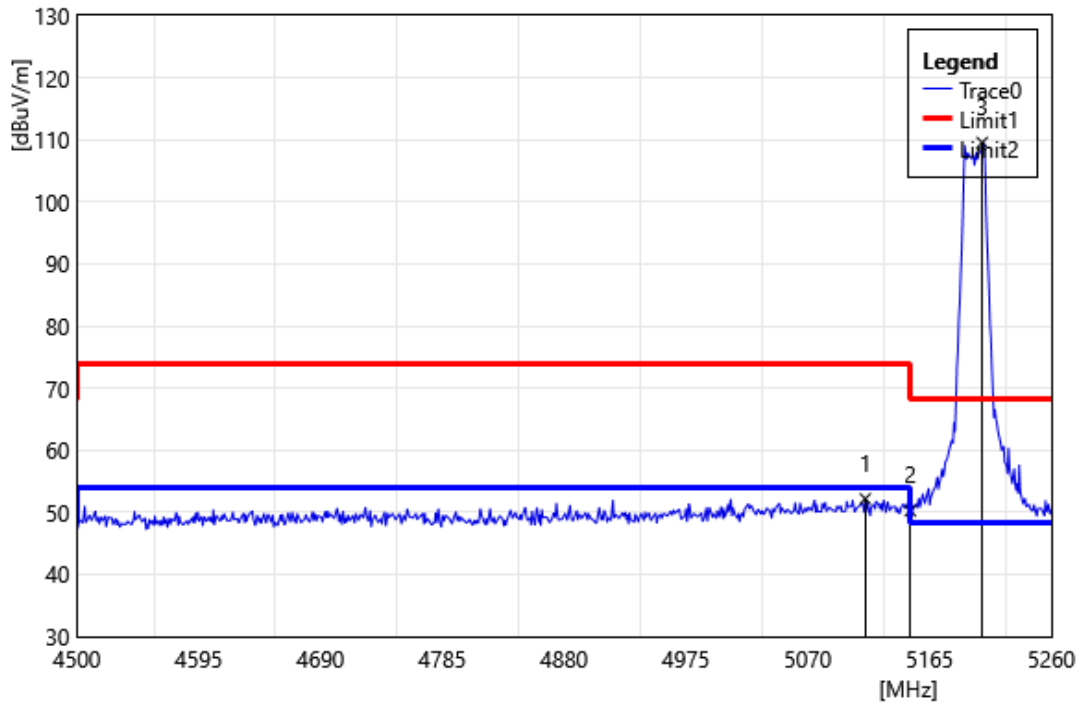


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5114.84	53.07	-0.88	52.19	74.00	-21.81	PEAK
2	5150.00	51.14	-0.91	50.24	74.00	-23.76	PEAK
3	5206.04	110.77	-1.20	109.57	68.20	41.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5200 MHz		
Polarization:	Horizontal		
Remark:			

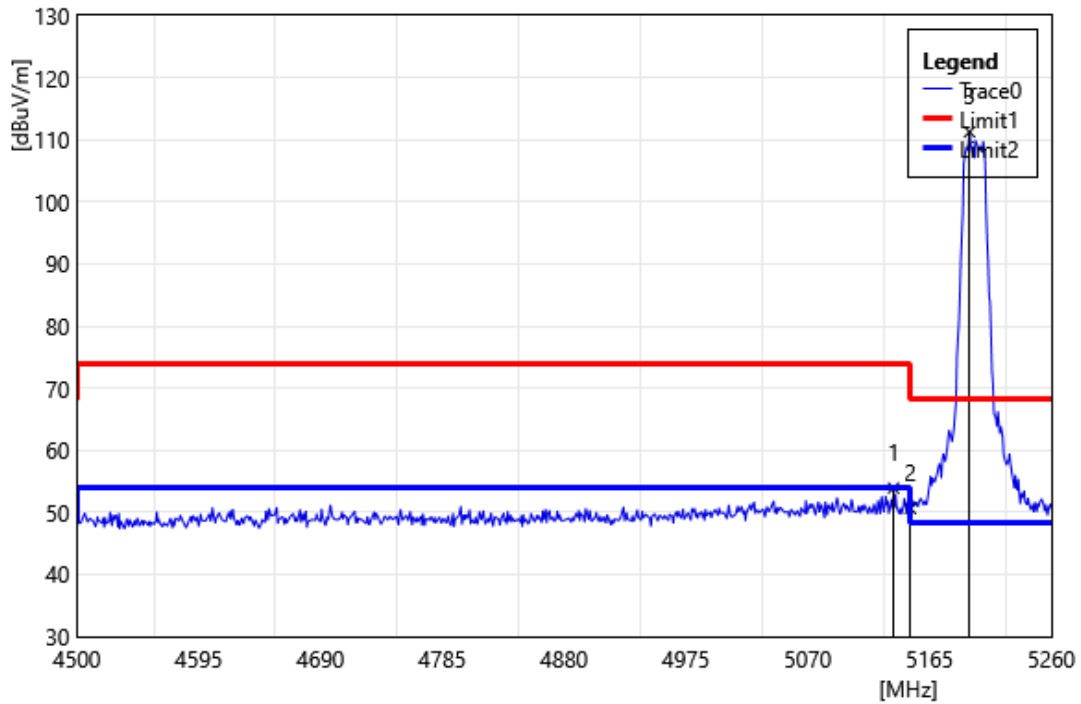


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	54.82	-0.90	53.92	74.00	-20.08	PEAK
2	5150.00	51.55	-0.91	50.64	74.00	-23.36	PEAK
3	5196.16	112.40	-1.14	111.26	68.20	43.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5200 MHz		
Polarization:	Vertical		
Remark:			

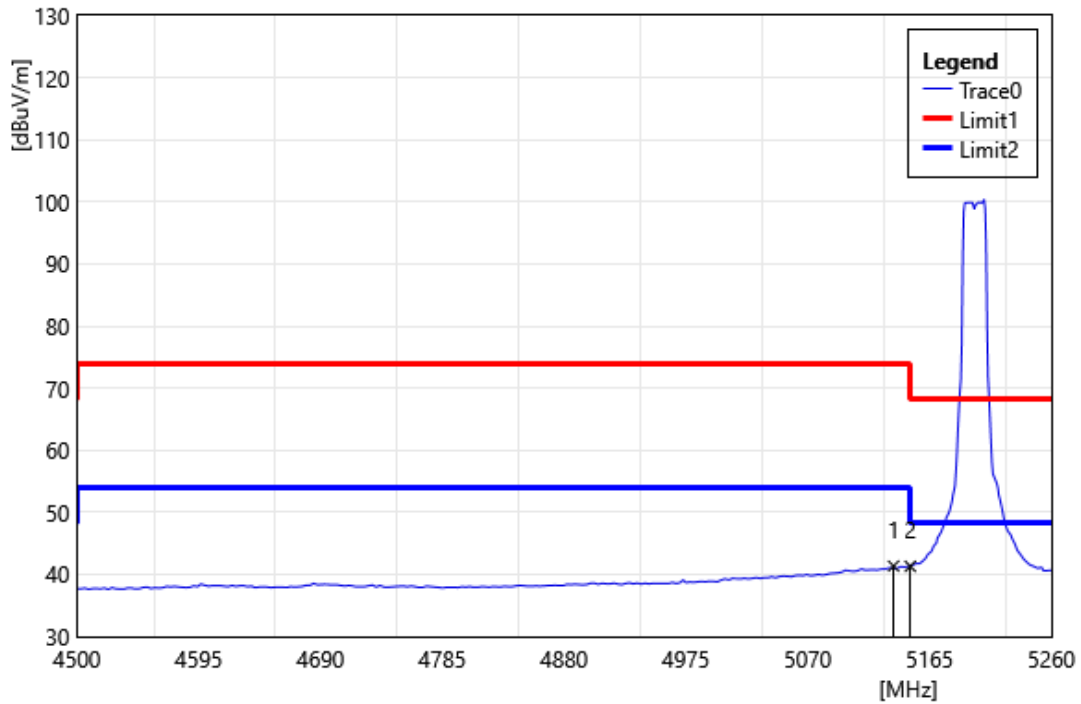


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	42.25	-0.90	41.35	54.00	-12.65	AVG
2	5150.00	42.22	-0.91	41.31	54.00	-12.69	AVG

Test Site:	966 Chamber	Standard:	Part 15.47
Test Mode:	802.11a 5200 MHz		
Polarization:	Horizontal		
Remark:			

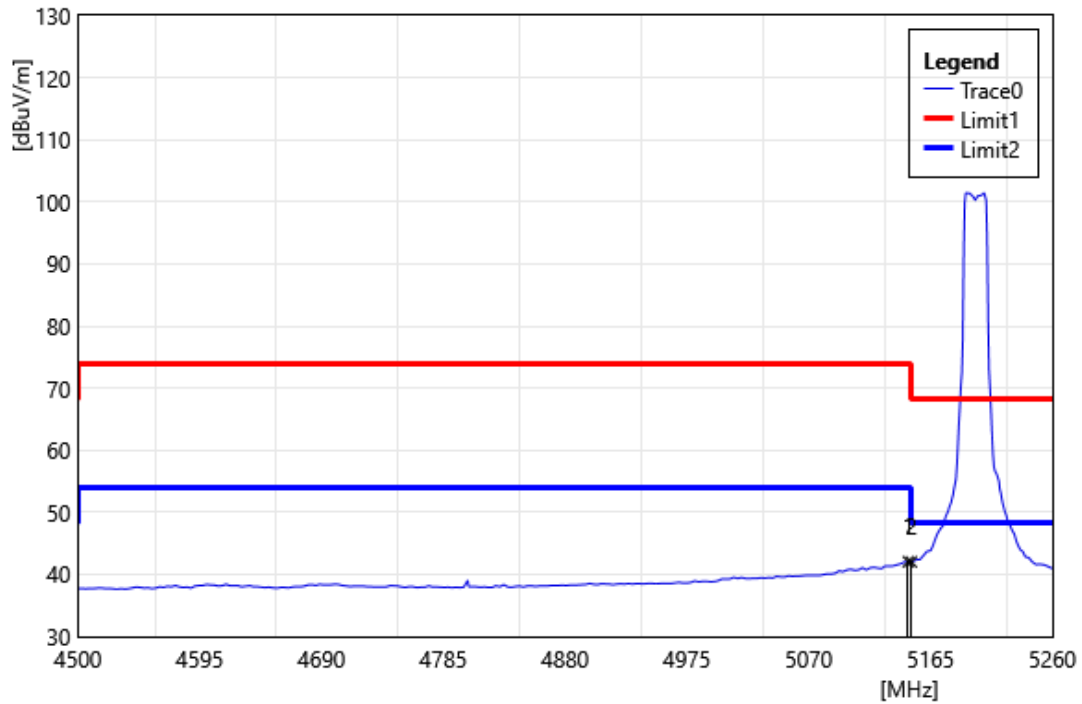


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	42.96	-0.91	42.05	54.00	-11.95	AVG
2	5150.00	42.94	-0.91	42.03	54.00	-11.97	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Vertical		
Remark:			

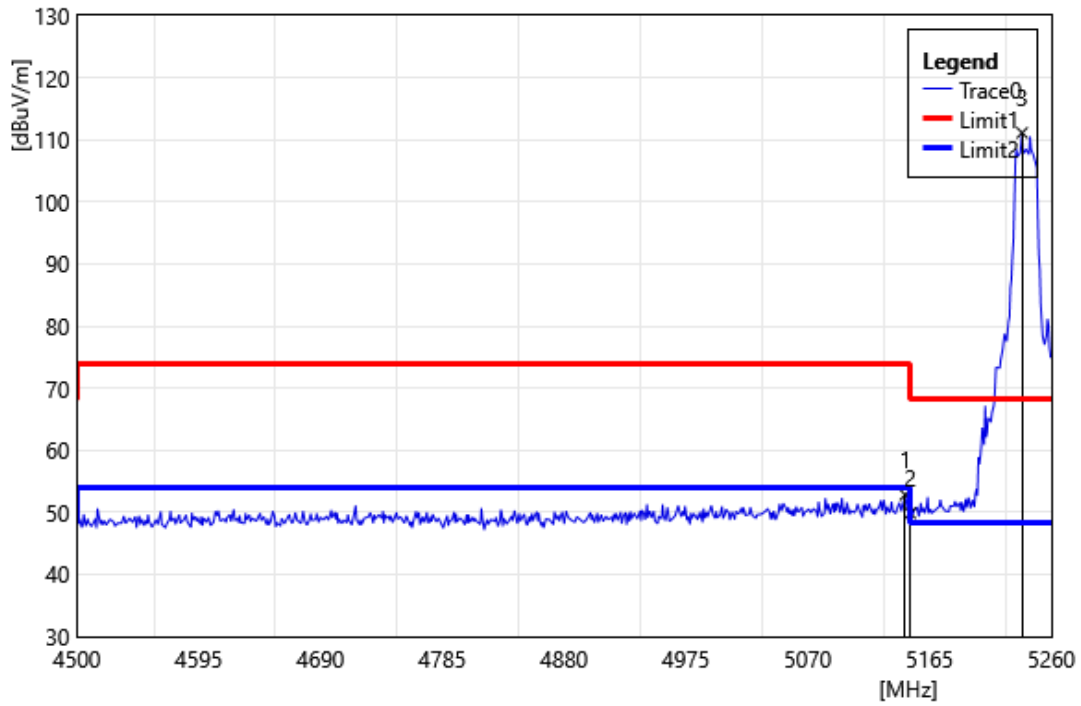


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	53.72	-0.90	52.83	74.00	-21.18	PEAK
2	5150.00	50.79	-0.91	49.88	74.00	-24.12	PEAK
3	5237.20	112.54	-1.41	111.13	68.20	42.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Horizontal		
Remark:			

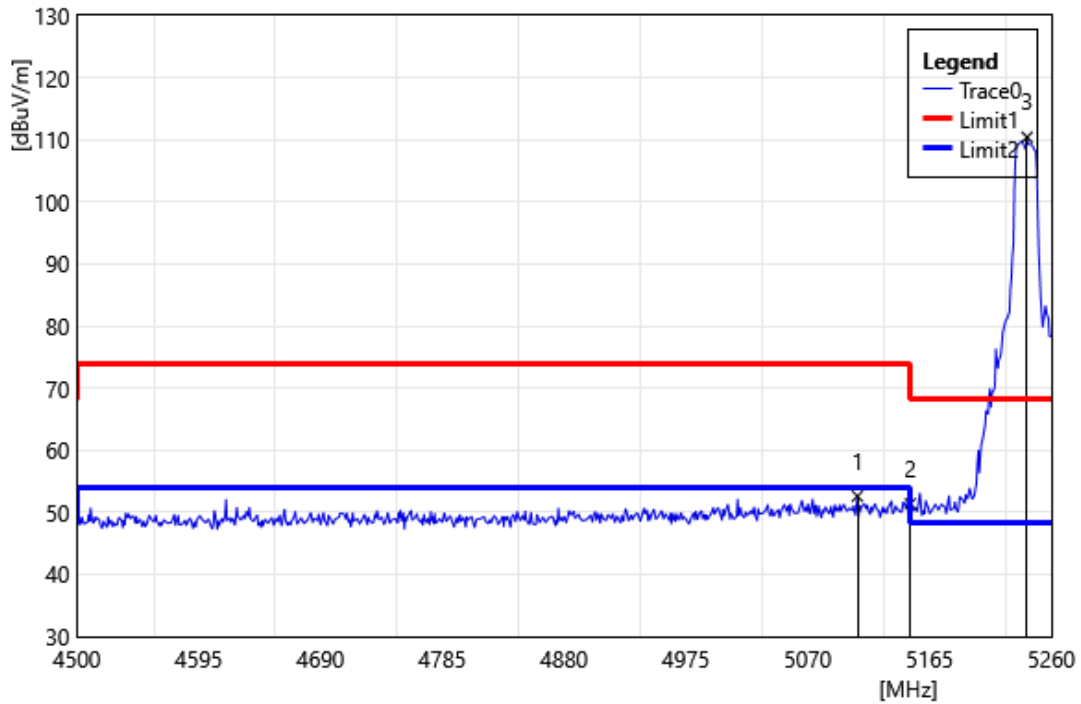


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5108.76	53.46	-0.87	52.59	74.00	-21.42	PEAK
2	5150.00	52.29	-0.91	51.39	74.00	-22.61	PEAK
3	5241.00	111.86	-1.44	110.42	68.20	42.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Vertical		
Remark:			

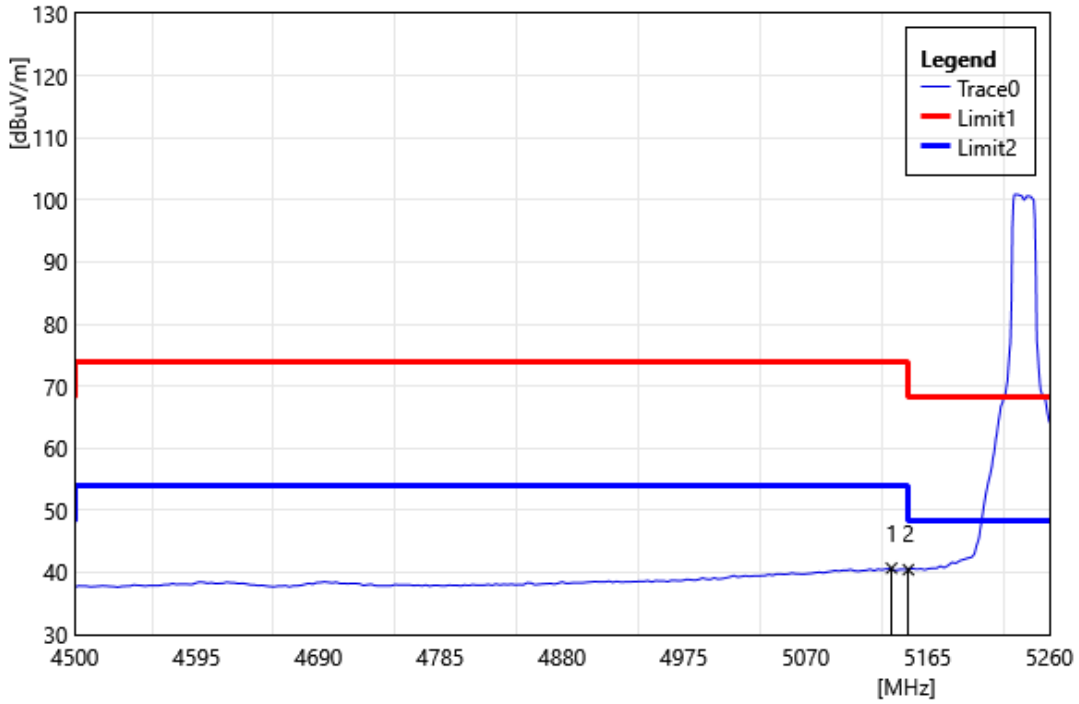


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	41.58	-0.90	40.69	54.00	-13.32	AVG
2	5150.00	41.36	-0.91	40.45	54.00	-13.55	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Horizontal		
Remark:			

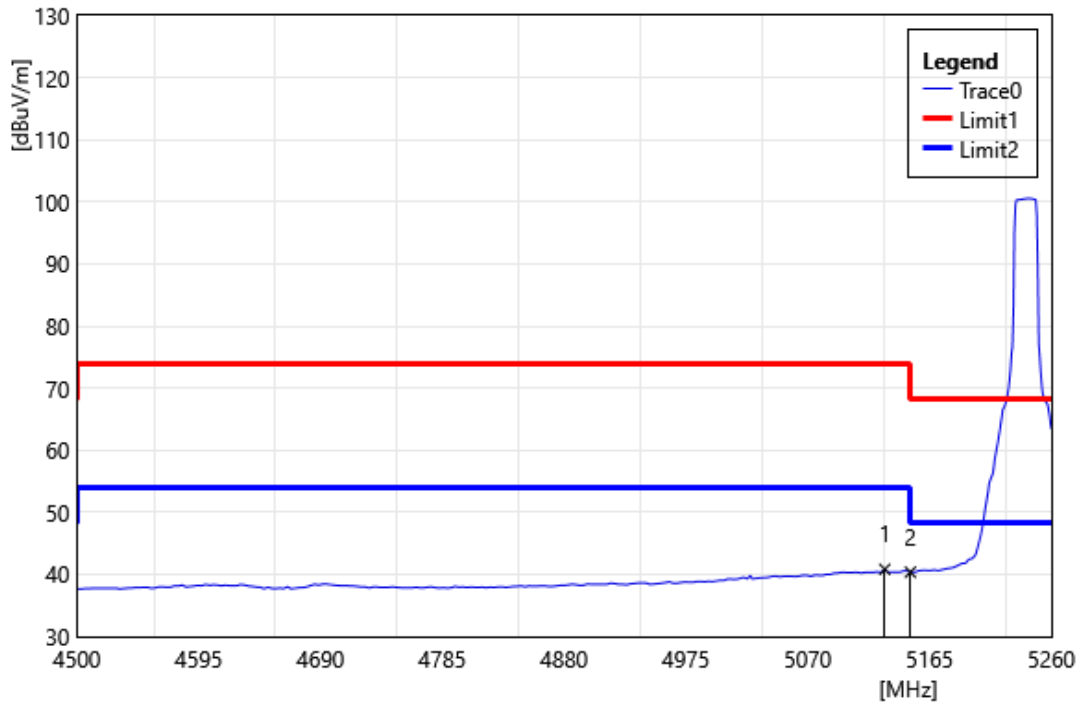


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5130.04	41.72	-0.89	40.84	54.00	-13.17	AVG
2	5150.00	41.27	-0.91	40.37	54.00	-13.63	AVG

Test Site:	966 Chamber	Standard:	Part 15.47
Test Mode:	802.11a 5260 MHz		
Polarization:	Vertical		
Remark:			

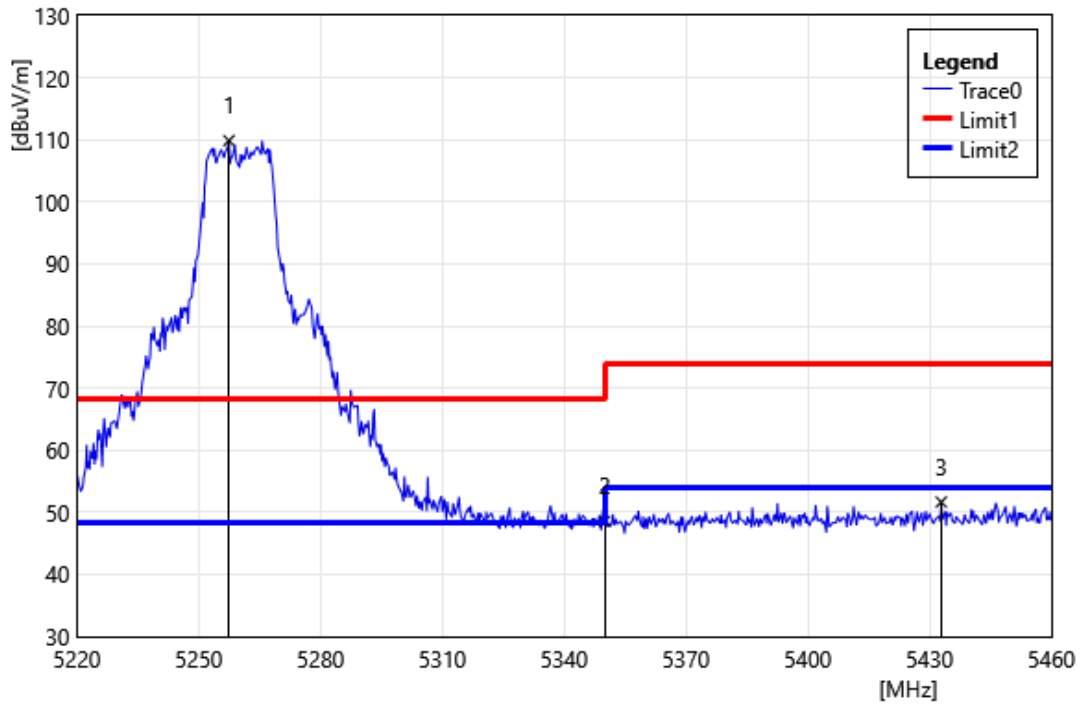


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5257.44	111.39	-1.52	109.87	68.20	41.67	PEAK
2	5350.00	49.85	-1.29	48.56	74.00	-25.44	PEAK
3	5432.88	52.37	-0.71	51.66	74.00	-22.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5260 MHz		
Polarization:	Horizontal		
Remark:			

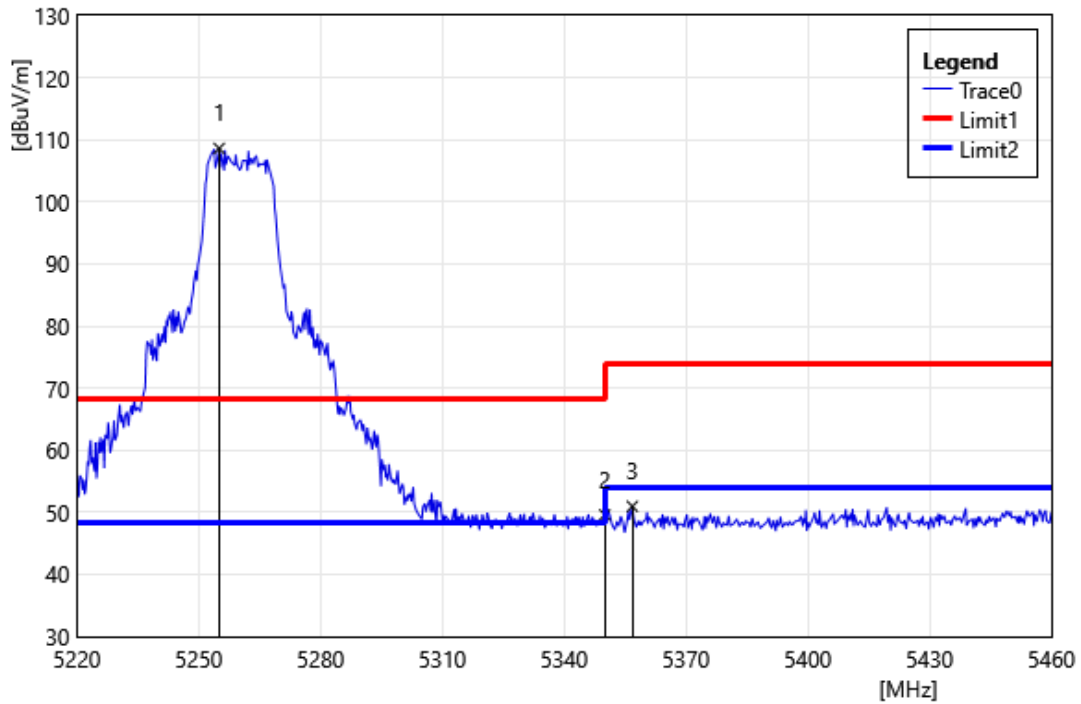


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5255.04	110.13	-1.51	108.62	68.20	40.42	PEAK
2	5350.00	50.89	-1.29	49.60	74.00	-24.40	PEAK
3	5356.80	52.21	-1.24	50.97	74.00	-23.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5280 MHz		
Polarization:	Vertical		
Remark:			

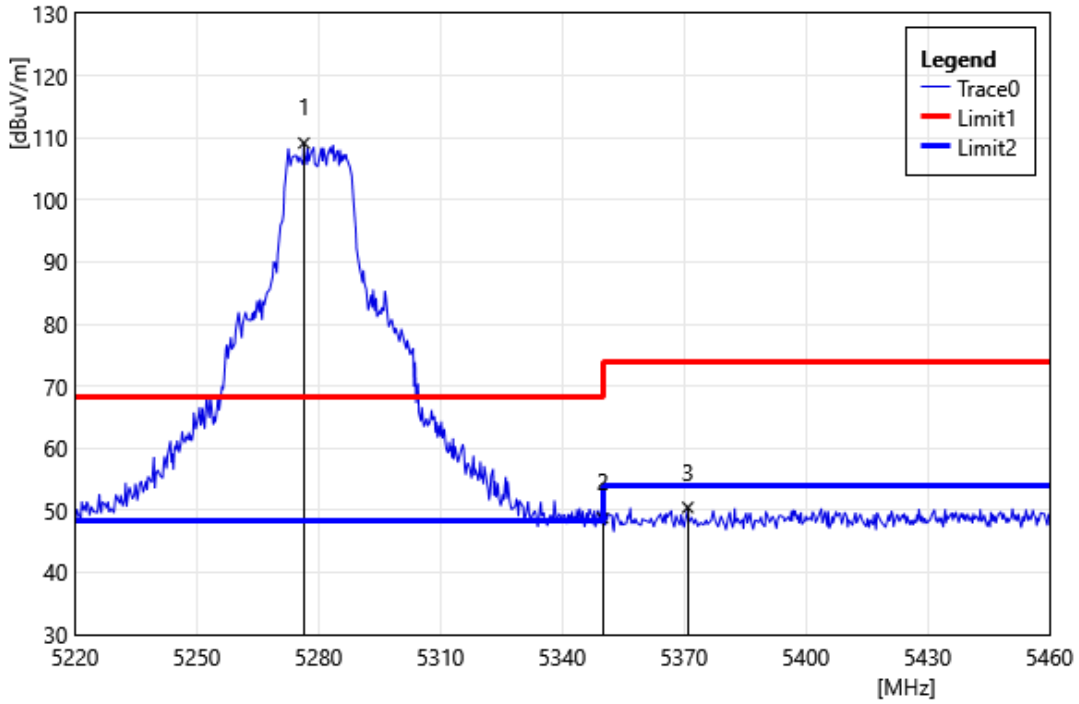


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5276.40	110.73	-1.58	109.15	68.20	40.95	PEAK
2	5350.00	50.05	-1.29	48.76	74.00	-25.24	PEAK
3	5370.96	51.60	-1.14	50.46	74.00	-23.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5280 MHz		
Polarization:	Horizontal		
Remark:			

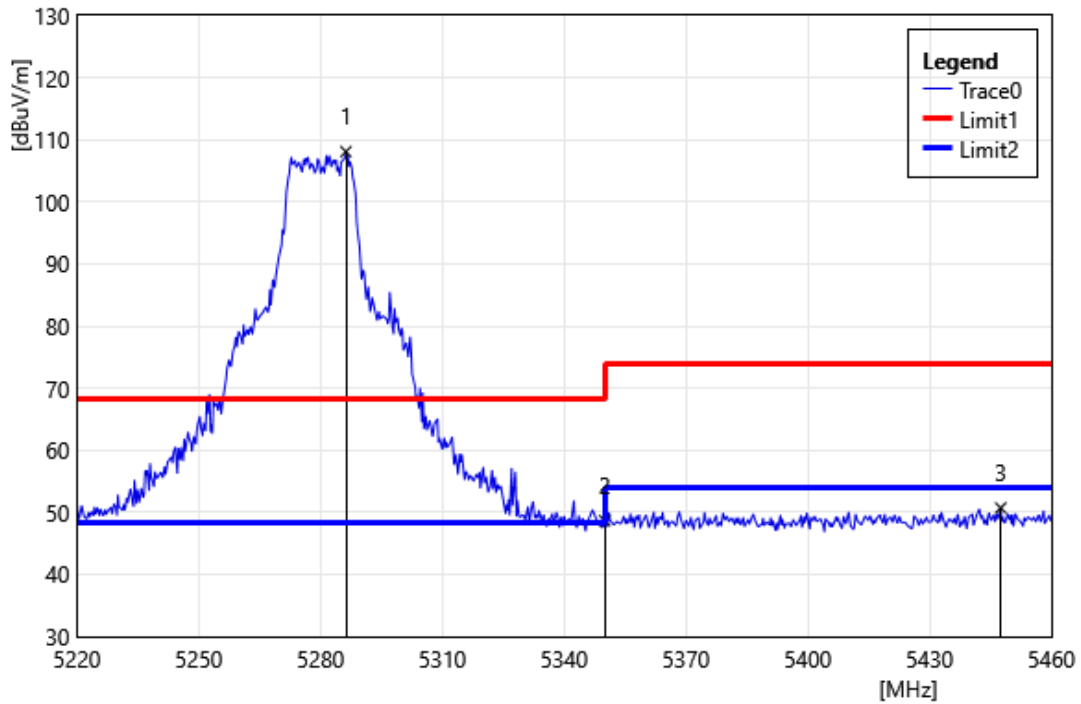


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5286.24	109.71	-1.61	108.10	68.20	39.90	PEAK
2	5350.00	49.95	-1.29	48.66	74.00	-25.34	PEAK
3	5447.52	51.31	-0.60	50.71	74.00	-23.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Vertical		
Remark:			

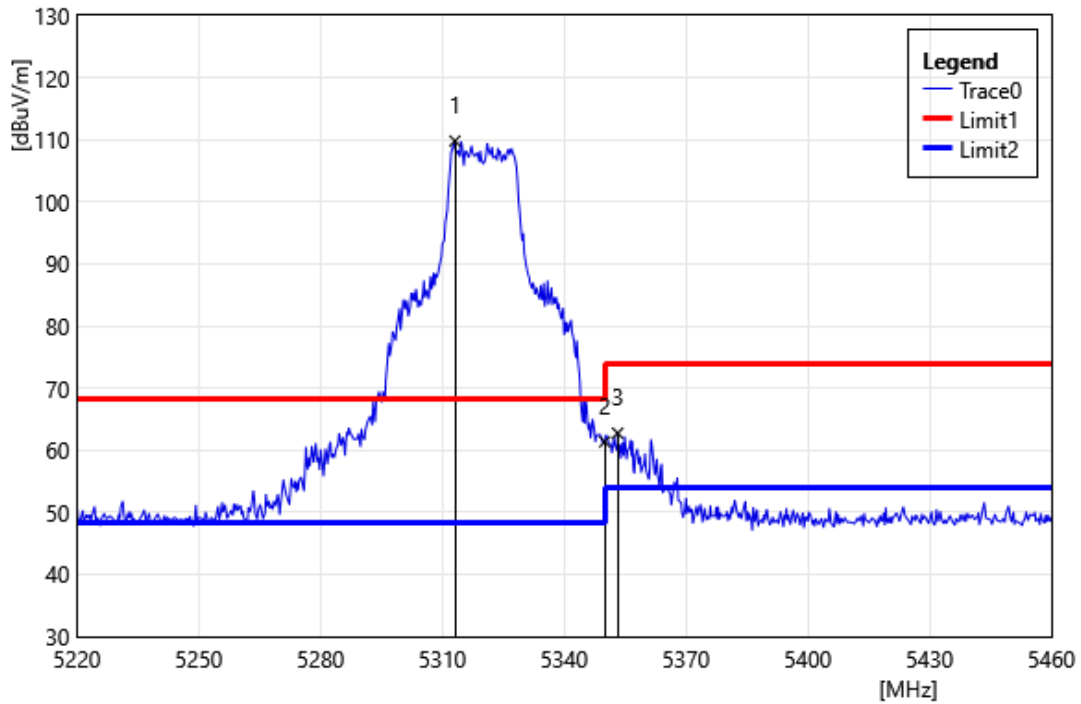


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5313.12	111.36	-1.55	109.81	68.20	41.61	PEAK
2	5350.00	62.66	-1.29	61.37	74.00	-12.63	PEAK
3	5353.20	64.02	-1.27	62.75	74.00	-11.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

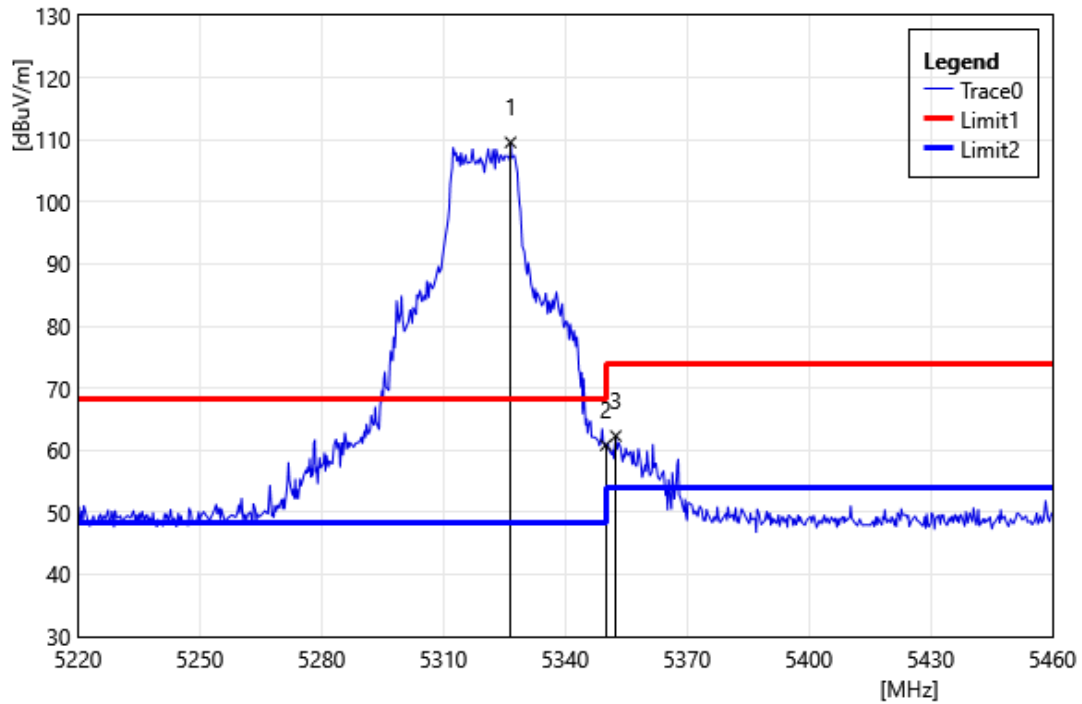


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5326.56	111.05	-1.46	109.59	68.20	41.39	PEAK
2	5350.00	62.10	-1.29	60.81	74.00	-13.19	PEAK
3	5352.48	63.57	-1.27	62.30	74.00	-11.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Vertical		
Remark:			

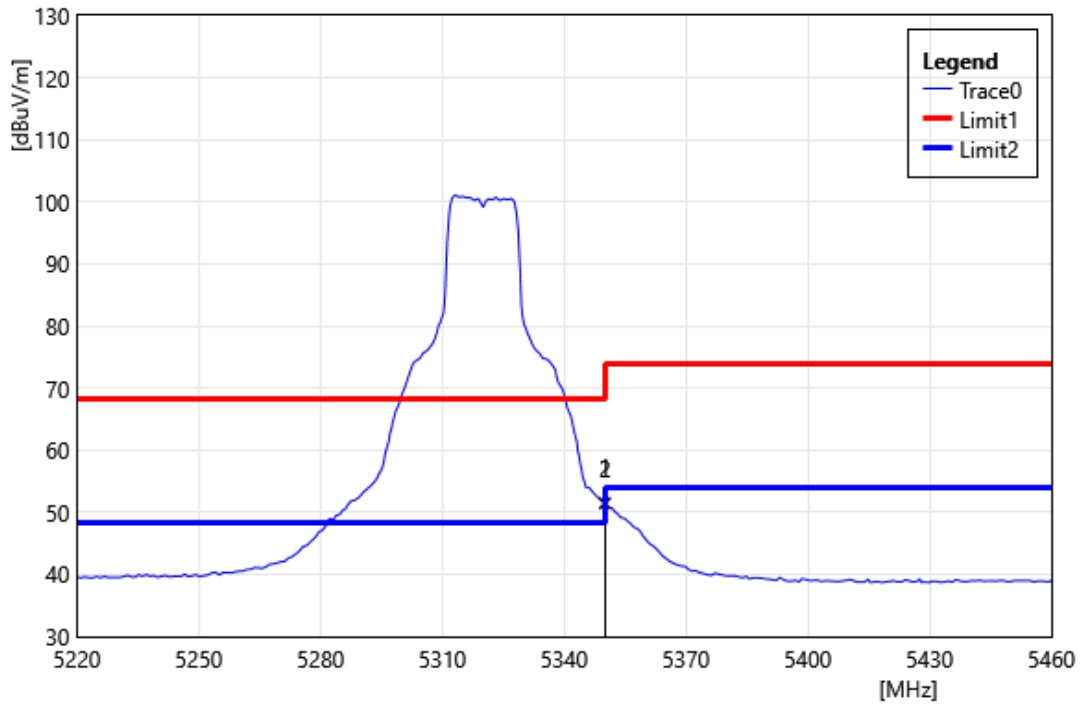


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	52.83	-1.29	51.54	54.00	-2.46	AVG
2	5350.08	52.67	-1.29	51.38	54.00	-2.62	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

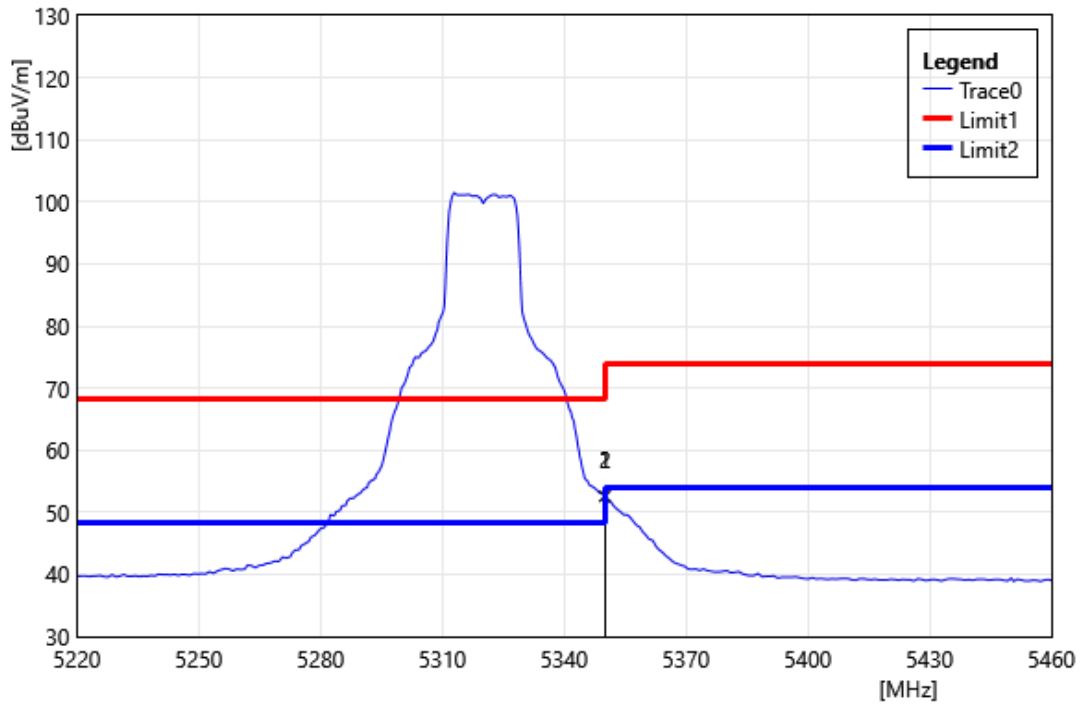


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.90	-1.29	52.61	54.00	-1.39	AVG
2	5350.08	53.90	-1.29	52.61	54.00	-1.39	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

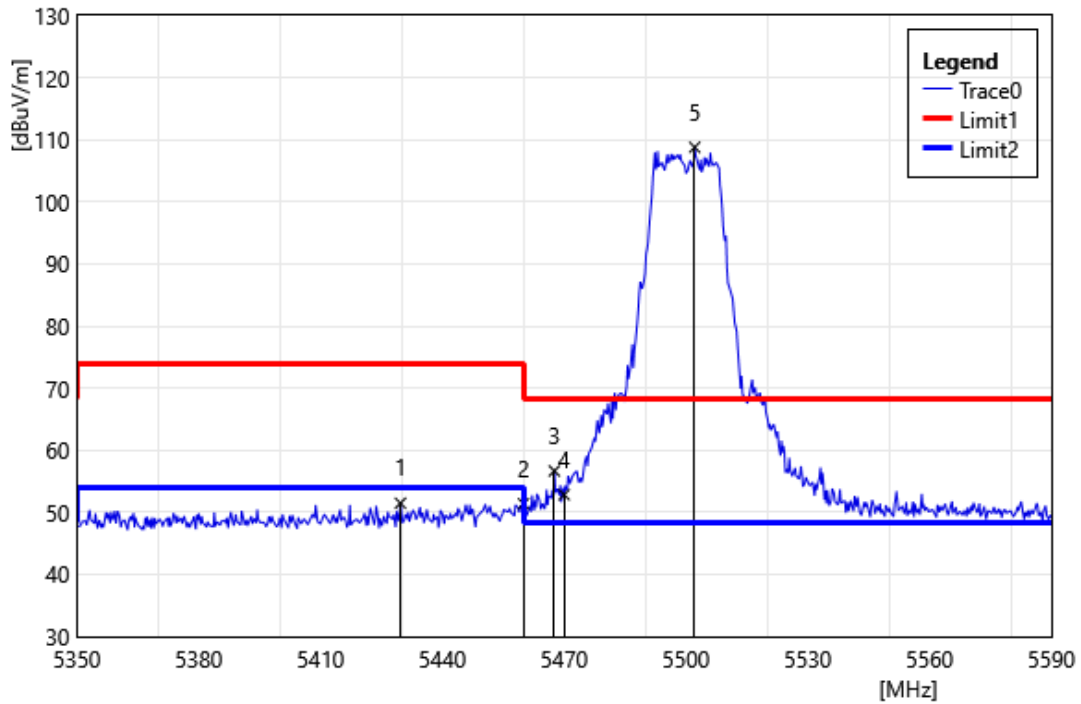


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5429.68	52.20	-0.73	51.47	74.00	-22.53	PEAK
2	5460.00	51.96	-0.57	51.39	74.00	-22.61	PEAK
3	5467.60	57.23	-0.56	56.67	68.20	-11.53	PEAK
4	5470.00	53.39	-0.56	52.83	68.20	-15.37	PEAK
5	5502.16	109.33	-0.53	108.80	68.20	40.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

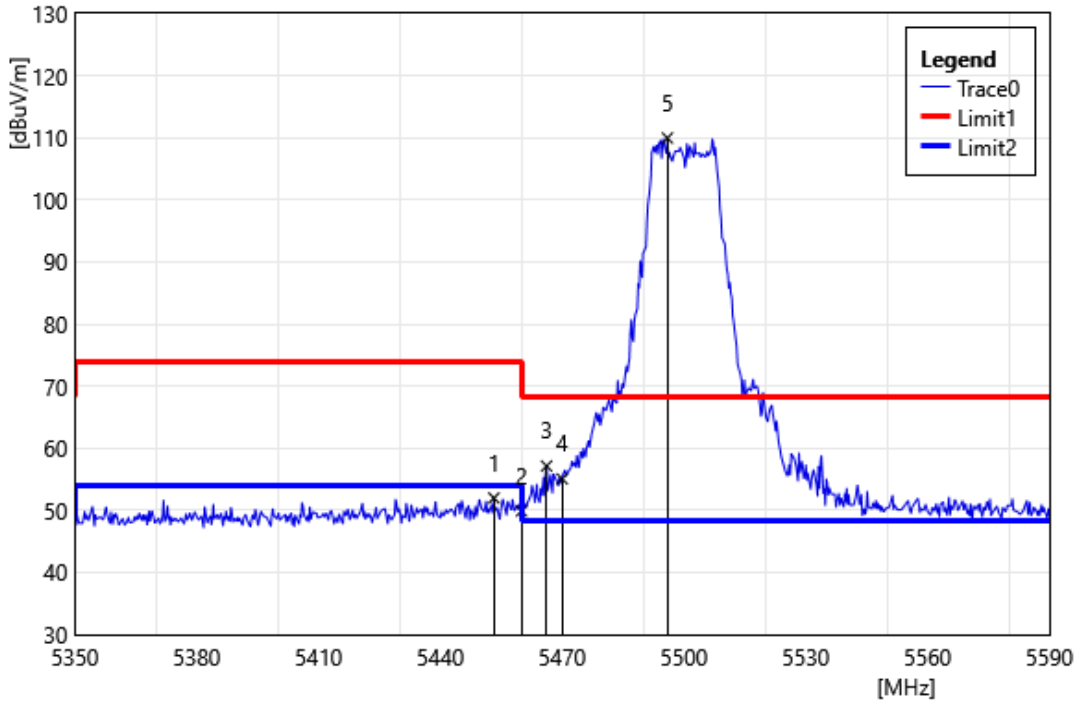


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.20	52.57	-0.58	51.99	74.00	-22.01	PEAK
2	5460.00	50.47	-0.57	49.90	74.00	-24.10	PEAK
3	5466.16	57.71	-0.57	57.14	68.20	-11.06	PEAK
4	5470.00	55.62	-0.56	55.06	68.20	-13.14	PEAK
5	5495.92	110.50	-0.53	109.97	68.20	41.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

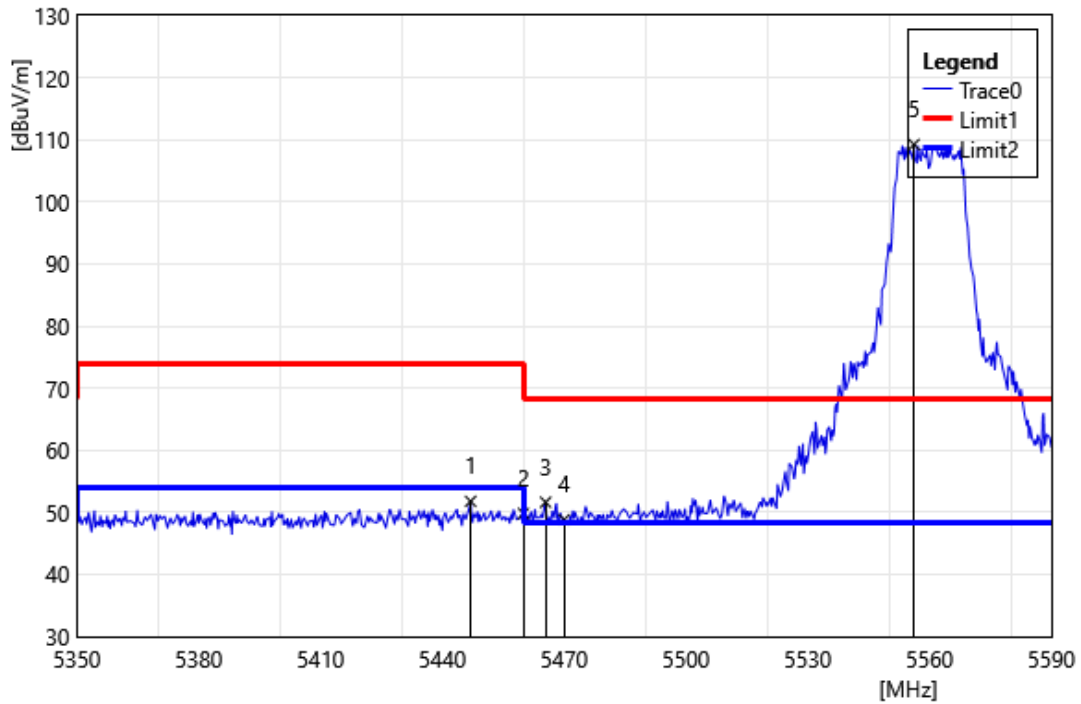


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5446.96	52.38	-0.61	51.77	74.00	-22.23	PEAK
2	5460.00	50.38	-0.57	49.81	74.00	-24.19	PEAK
3	5465.44	52.19	-0.57	51.62	68.20	-16.58	PEAK
4	5470.00	49.38	-0.56	48.82	68.20	-19.38	PEAK
5	5556.16	109.75	-0.51	109.24	68.20	41.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

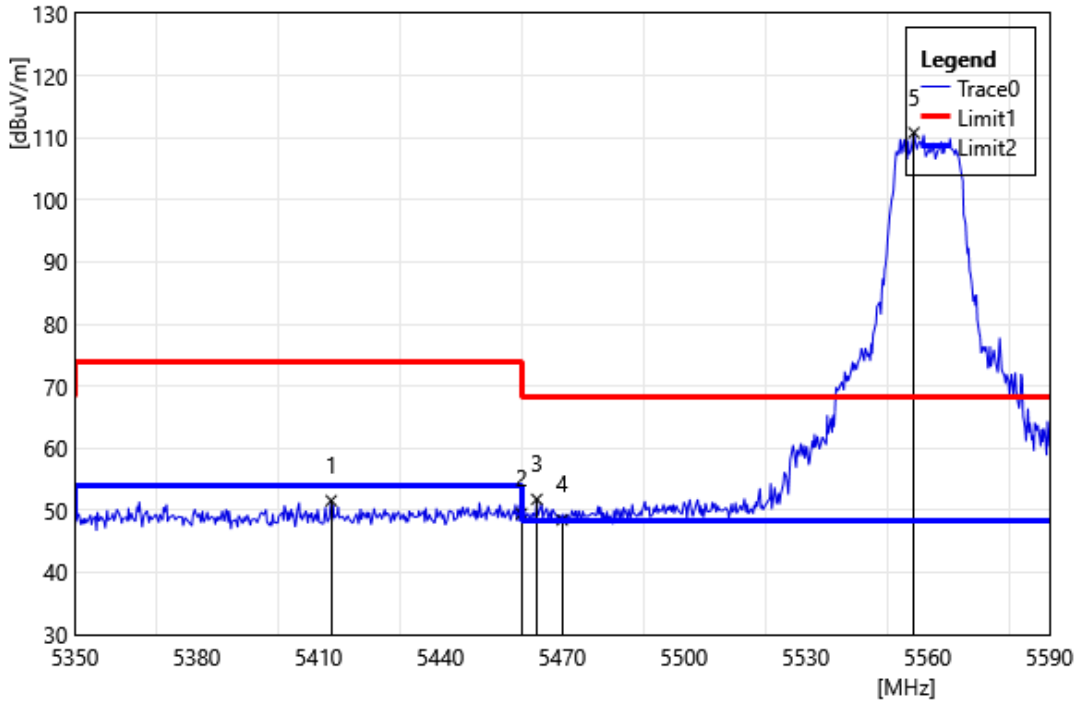


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5413.12	52.40	-0.85	51.55	74.00	-22.46	PEAK
2	5460.00	50.04	-0.57	49.47	74.00	-24.53	PEAK
3	5463.76	52.34	-0.57	51.77	68.20	-16.43	PEAK
4	5470.00	49.01	-0.56	48.45	68.20	-19.75	PEAK
5	5556.64	111.33	-0.51	110.82	68.20	42.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5700 MHz		
Polarization:	Vertical		
Remark:			

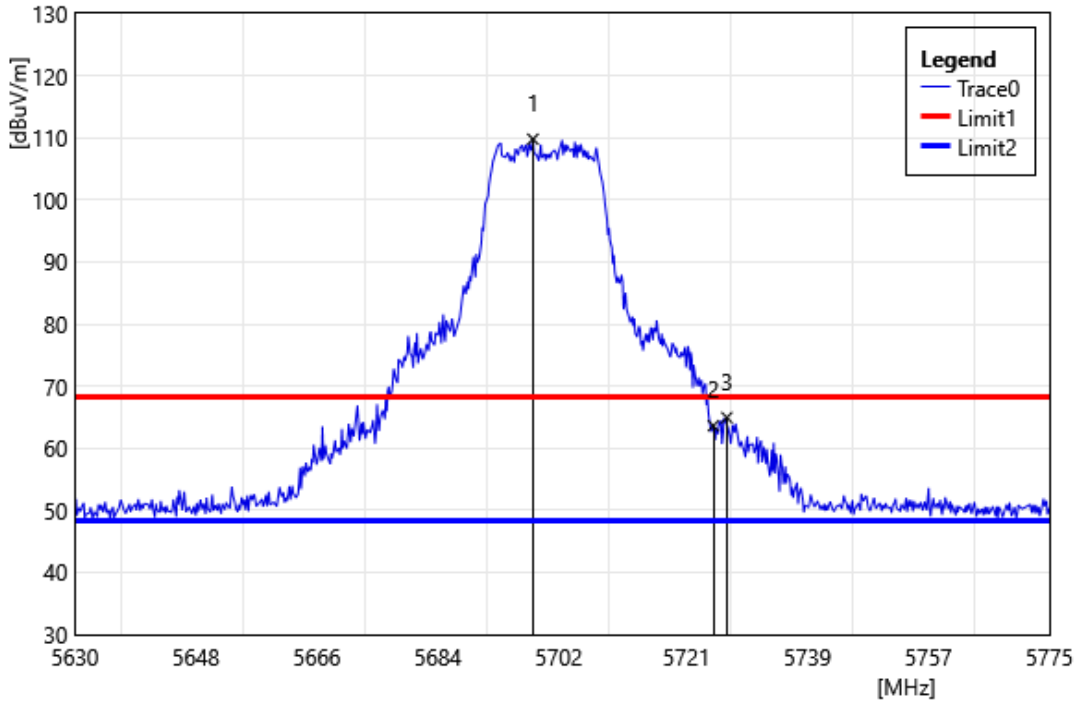


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5698.15	110.39	-0.61	109.78	68.20	41.58	PEAK
2	5725.00	63.98	-0.34	63.64	68.20	-4.56	PEAK
3	5727.01	65.26	-0.32	64.94	68.20	-3.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5700 MHz		
Polarization:	Horizontal		
Remark:			

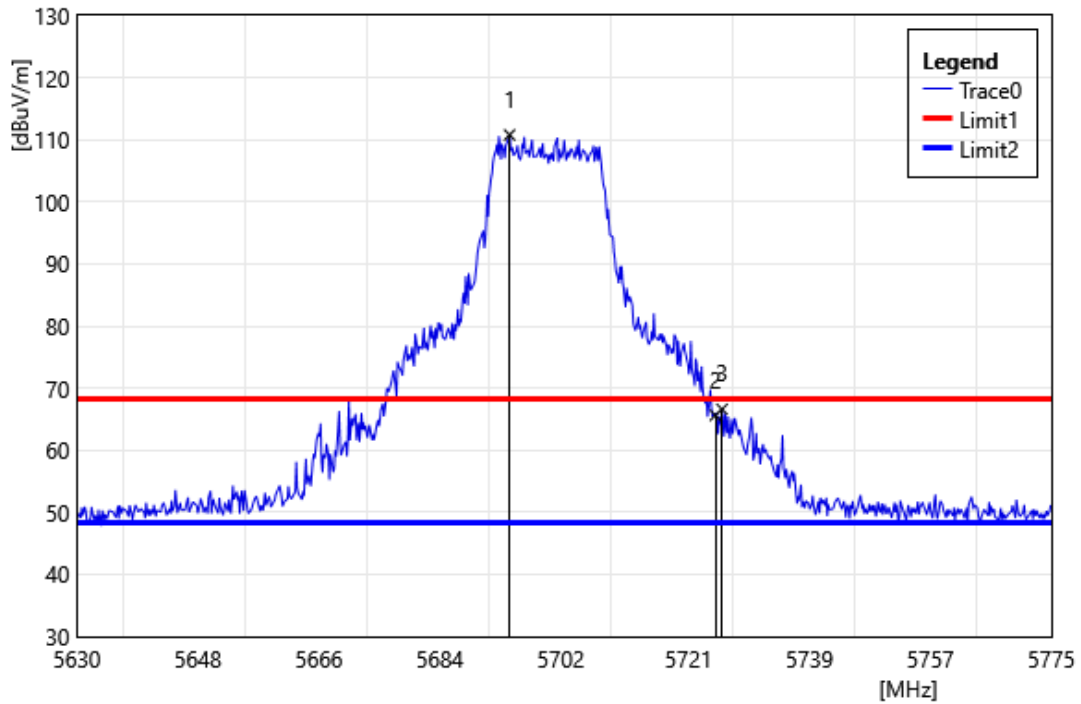


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5694.38	111.39	-0.61	110.78	68.20	42.58	PEAK
2	5725.00	65.97	-0.34	65.63	68.20	-2.57	PEAK
3	5725.99	66.94	-0.33	66.62	68.20	-1.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

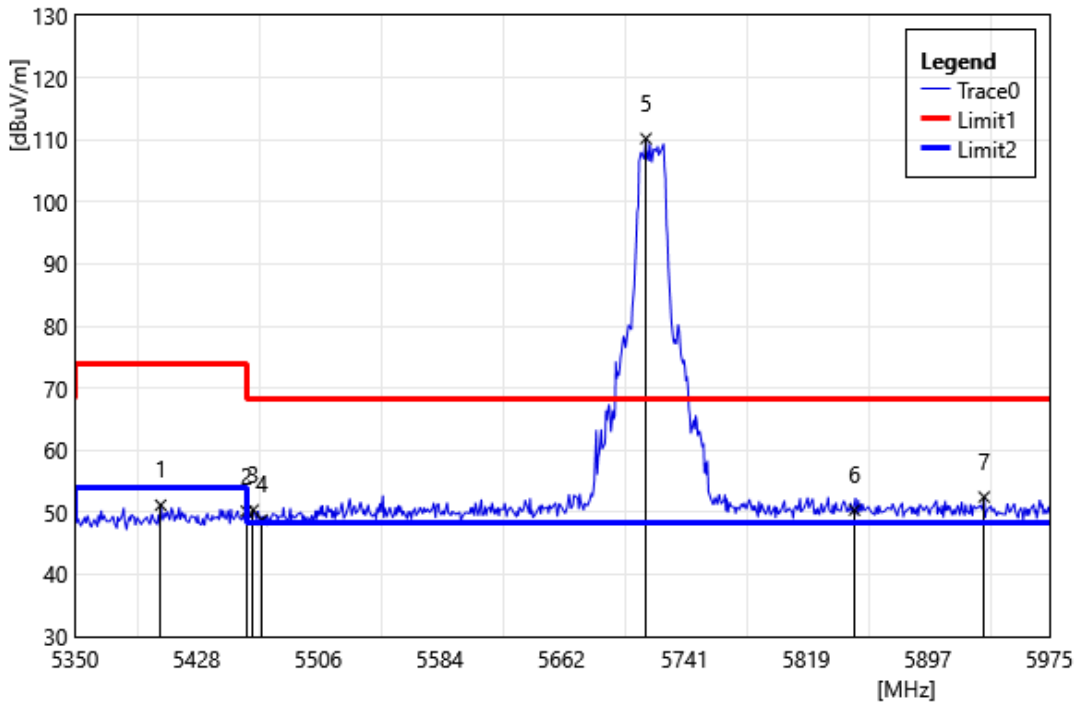


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5405.00	52.06	-0.90	51.16	74.00	-22.84	PEAK
2	5460.00	50.75	-0.57	50.18	74.00	-23.82	PEAK
3	5464.38	50.94	-0.57	50.37	68.20	-17.83	PEAK
4	5470.00	49.35	-0.56	48.79	68.20	-19.41	PEAK
5	5716.25	110.63	-0.44	110.19	68.20	41.99	PEAK
6	5850.00	50.09	0.28	50.37	68.20	-17.83	PEAK
7	5933.13	52.25	0.23	52.48	68.20	-15.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

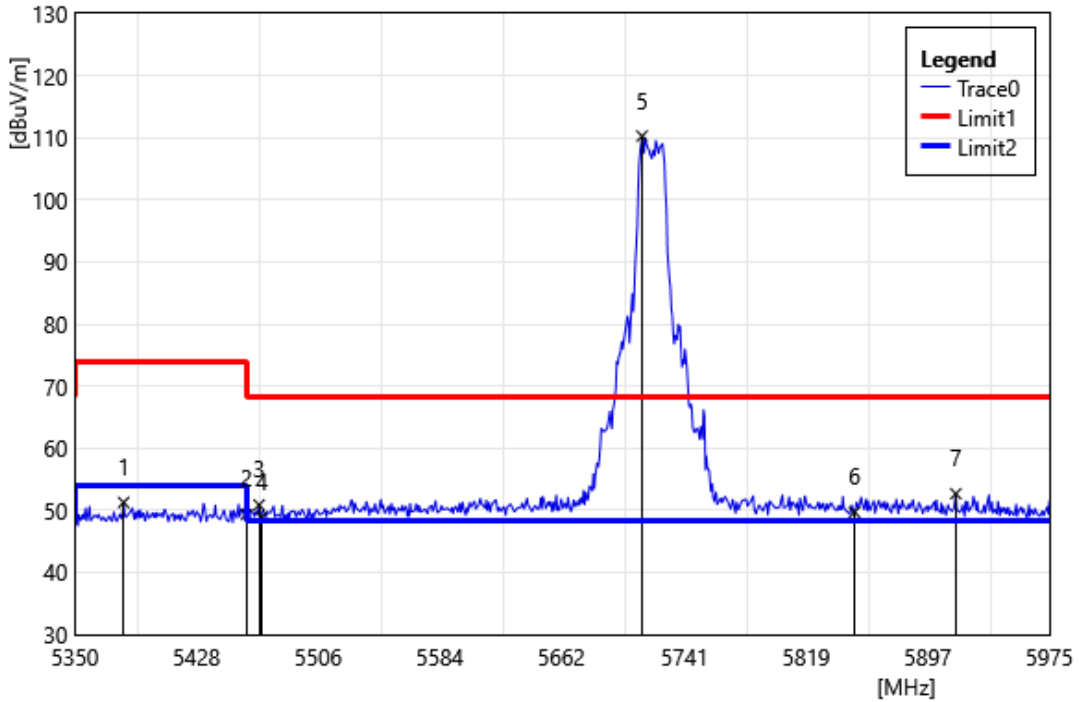


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5381.25	52.34	-1.07	51.27	74.00	-22.73	PEAK
2	5460.00	49.91	-0.57	49.34	74.00	-24.66	PEAK
3	5468.13	51.44	-0.56	50.88	68.20	-17.32	PEAK
4	5470.00	49.50	-0.56	48.94	68.20	-19.26	PEAK
5	5713.75	110.73	-0.46	110.27	68.20	42.07	PEAK
6	5850.00	49.44	0.28	49.72	68.20	-18.48	PEAK
7	5915.00	52.35	0.33	52.68	68.20	-15.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

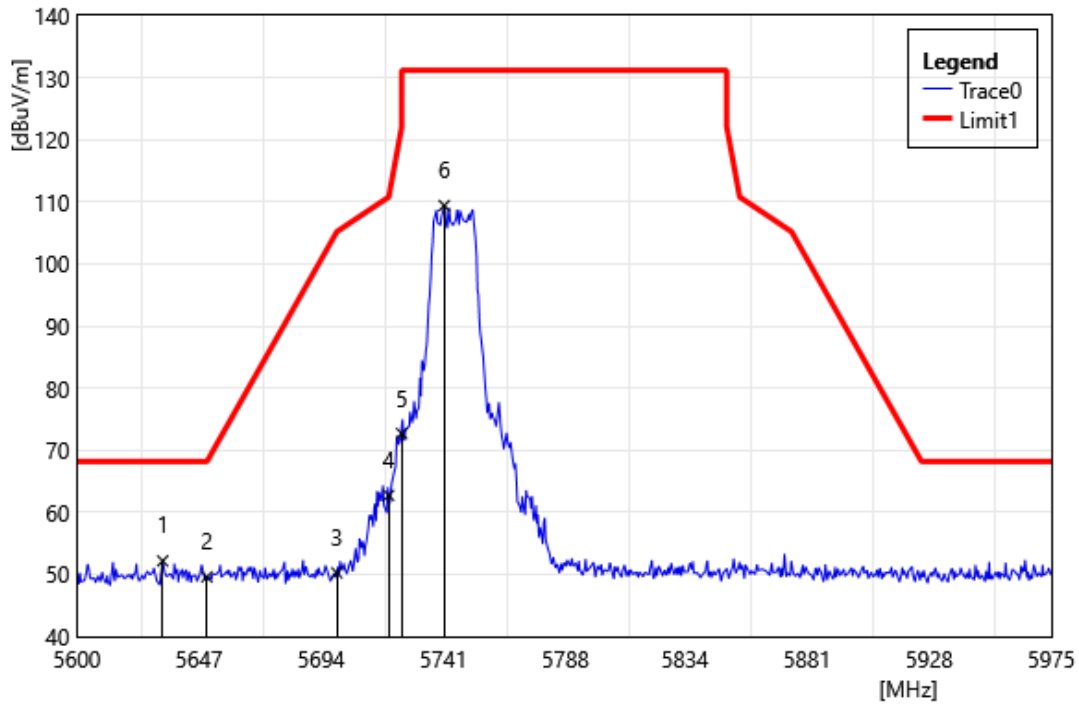


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.00	52.80	-0.62	52.18	68.20	-16.02	PEAK
2	5650.00	50.24	-0.64	49.60	68.20	-18.60	PEAK
3	5700.00	50.87	-0.61	50.26	105.20	-54.94	PEAK
4	5720.00	63.14	-0.40	62.74	110.80	-48.06	PEAK
5	5725.00	73.02	-0.34	72.68	122.20	-49.52	PEAK
6	5741.38	109.57	-0.17	109.40	131.20	-21.80	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

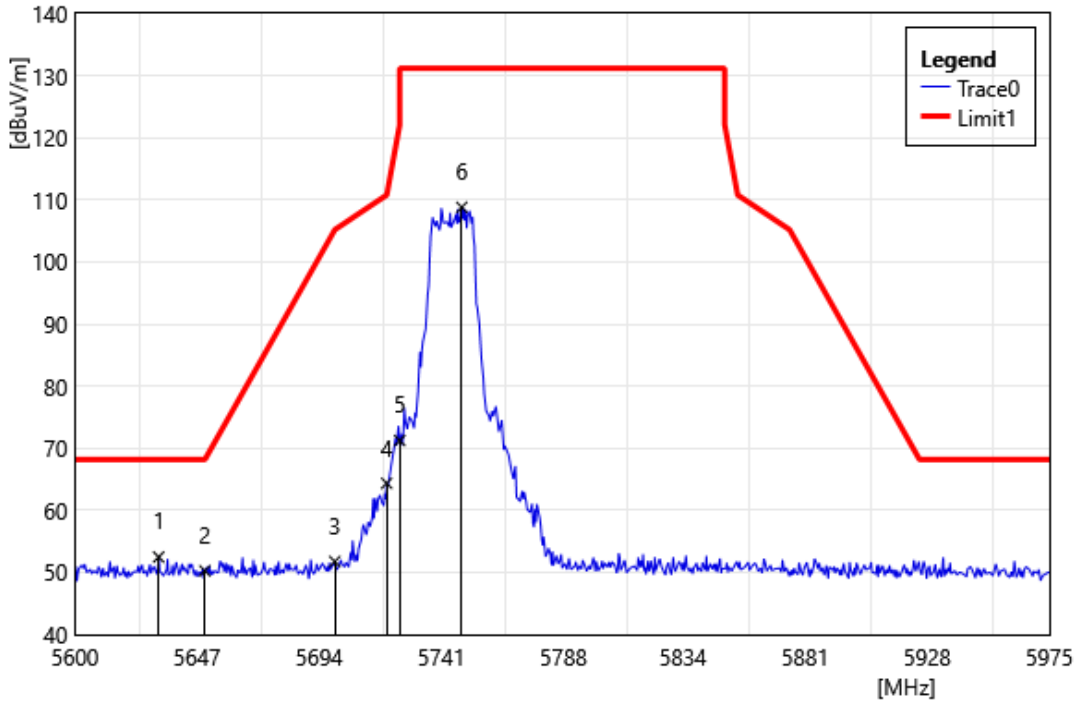


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5632.25	53.10	-0.62	52.48	68.20	-15.72	PEAK
2	5650.00	50.90	-0.64	50.26	68.20	-17.94	PEAK
3	5700.00	52.37	-0.61	51.76	105.20	-53.44	PEAK
4	5720.00	64.75	-0.40	64.35	110.80	-46.45	PEAK
5	5725.00	71.58	-0.34	71.24	122.20	-50.96	PEAK
6	5748.88	108.90	-0.09	108.81	131.20	-22.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5785 MHz		
Polarization:	Vertical		
Remark:			

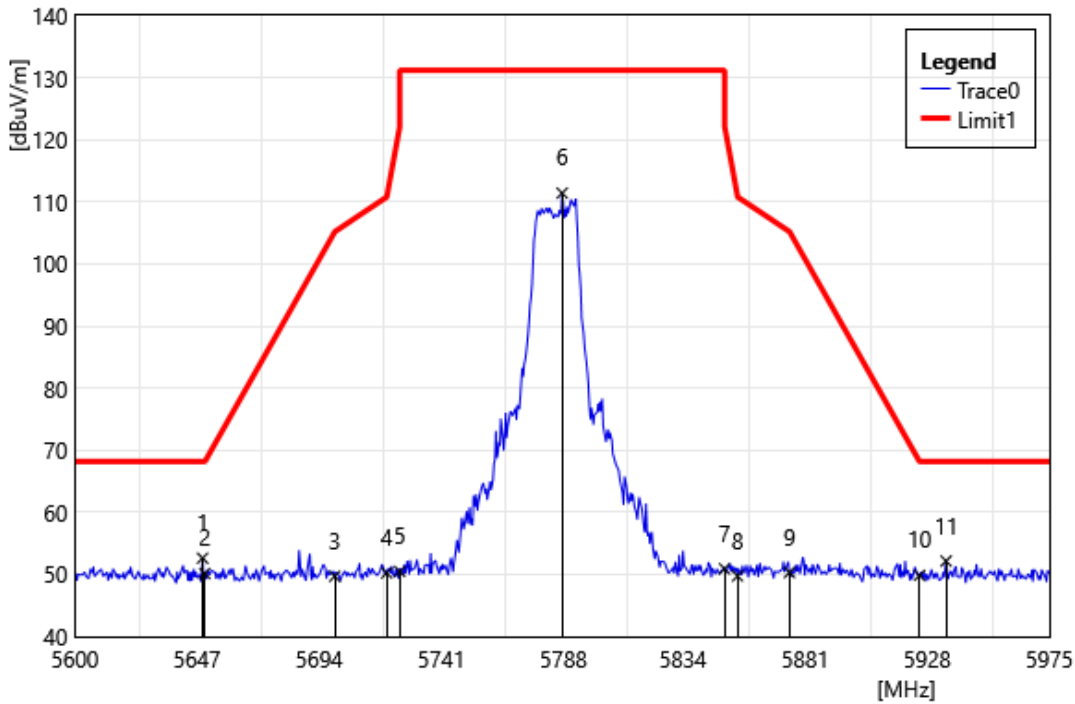


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5649.13	53.26	-0.64	52.62	68.20	-15.58	PEAK
2	5650.00	50.79	-0.64	50.15	68.20	-18.05	PEAK
3	5700.00	50.32	-0.61	49.71	105.20	-55.49	PEAK
4	5720.00	50.64	-0.40	50.24	110.80	-60.56	PEAK
5	5725.00	50.82	-0.34	50.48	122.20	-71.72	PEAK
6	5787.50	111.34	0.09	111.43	131.20	-19.77	PEAK
7	5850.00	50.63	0.28	50.91	122.20	-71.29	PEAK
8	5855.00	49.47	0.29	49.76	110.80	-61.04	PEAK
9	5875.00	49.98	0.34	50.32	105.20	-54.88	PEAK
10	5925.00	49.59	0.28	49.87	68.20	-18.33	PEAK
11	5935.25	51.93	0.22	52.15	68.20	-16.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5785 MHz		
Polarization:	Horizontal		
Remark:			

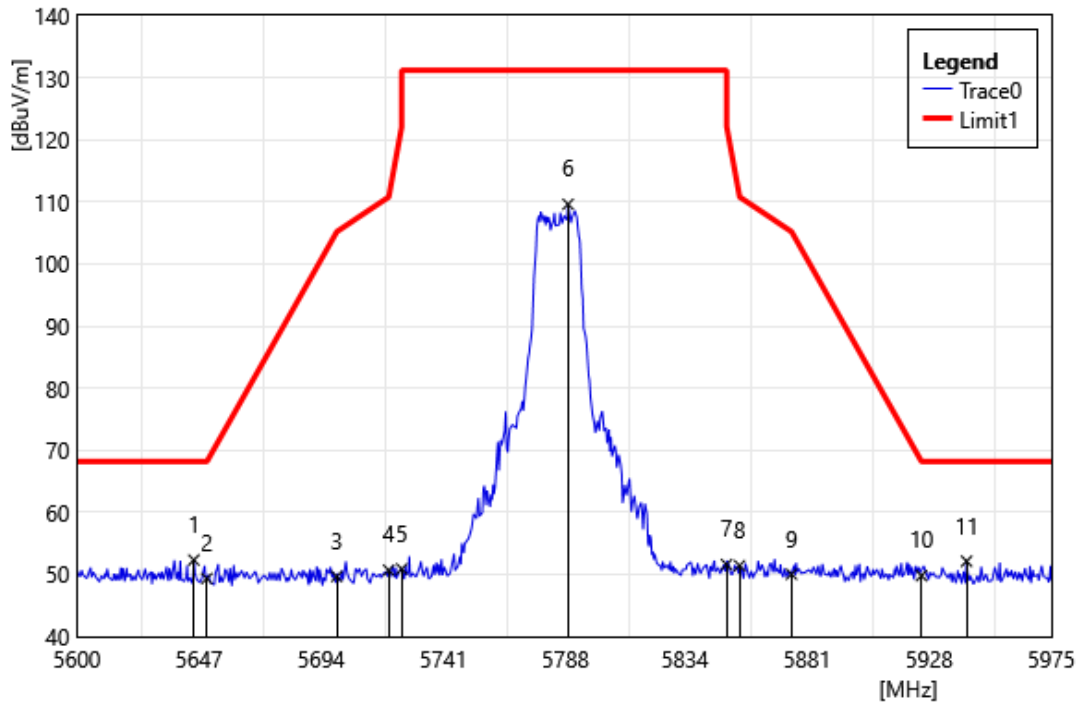


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5645.00	52.96	-0.63	52.33	68.20	-15.87	PEAK
2	5650.00	49.99	-0.64	49.35	68.20	-18.85	PEAK
3	5700.00	50.29	-0.61	49.68	105.20	-55.52	PEAK
4	5720.00	51.09	-0.40	50.69	110.80	-60.11	PEAK
5	5725.00	51.24	-0.34	50.90	122.20	-71.30	PEAK
6	5789.00	109.52	0.10	109.62	131.20	-21.58	PEAK
7	5850.00	51.32	0.28	51.60	122.20	-70.60	PEAK
8	5855.00	51.13	0.29	51.42	110.80	-59.38	PEAK
9	5875.00	49.70	0.34	50.04	105.20	-55.16	PEAK
10	5925.00	49.52	0.28	49.80	68.20	-18.40	PEAK
11	5942.38	51.95	0.18	52.13	68.20	-16.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

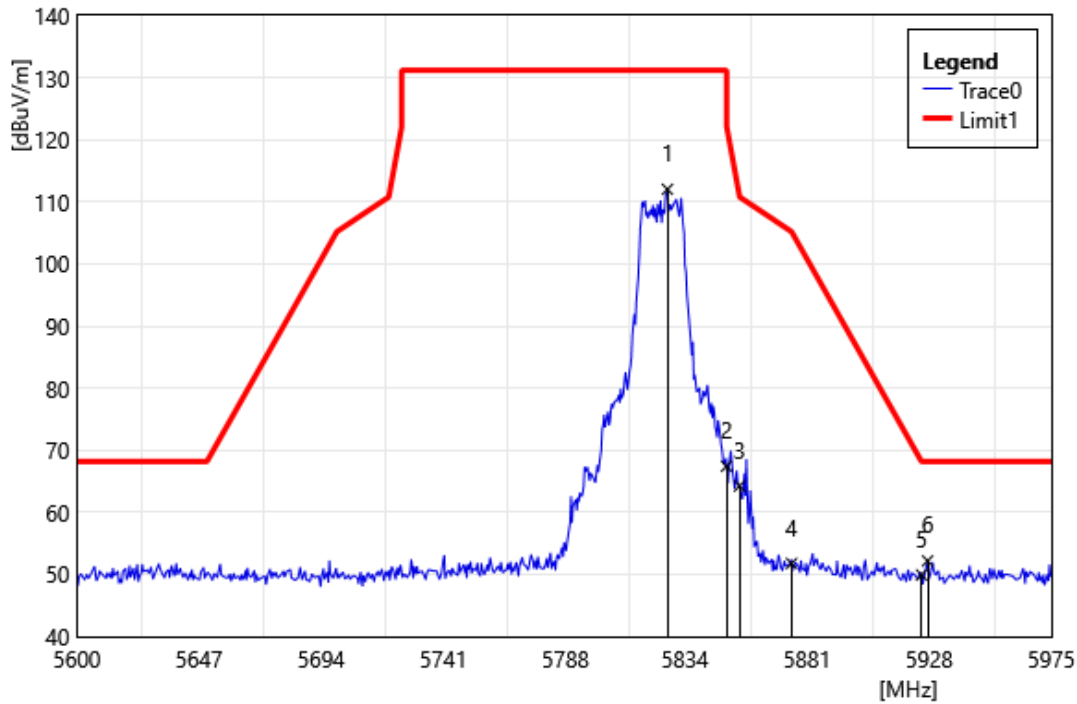


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5827.25	111.81	0.22	112.03	131.20	-19.17	PEAK
2	5850.00	67.15	0.28	67.43	122.20	-54.77	PEAK
3	5855.00	63.96	0.29	64.25	110.80	-46.55	PEAK
4	5875.00	51.43	0.34	51.77	105.20	-53.43	PEAK
5	5925.00	49.64	0.28	49.92	68.20	-18.28	PEAK
6	5927.38	51.92	0.26	52.18	68.20	-16.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

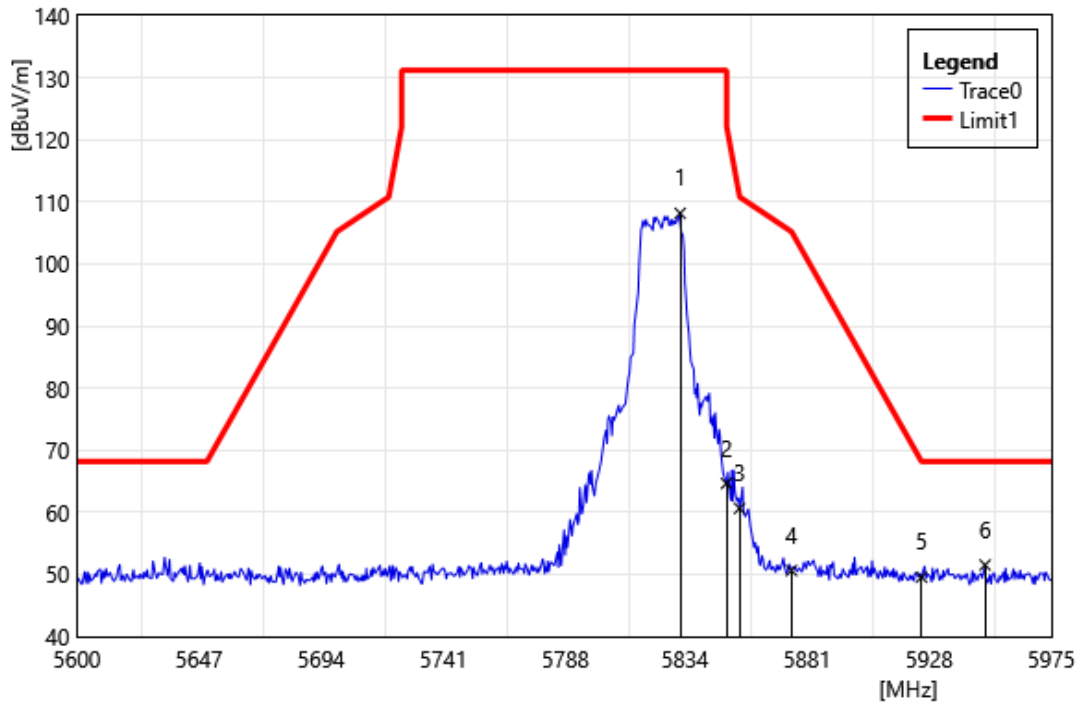


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5832.13	107.93	0.23	108.16	131.20	-23.04	PEAK
2	5850.00	64.38	0.28	64.66	122.20	-57.54	PEAK
3	5855.00	60.37	0.29	60.66	110.80	-50.14	PEAK
4	5875.00	50.29	0.34	50.63	105.20	-54.57	PEAK
5	5925.00	49.27	0.28	49.55	68.20	-18.65	PEAK
6	5949.50	51.38	0.14	51.53	68.20	-16.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

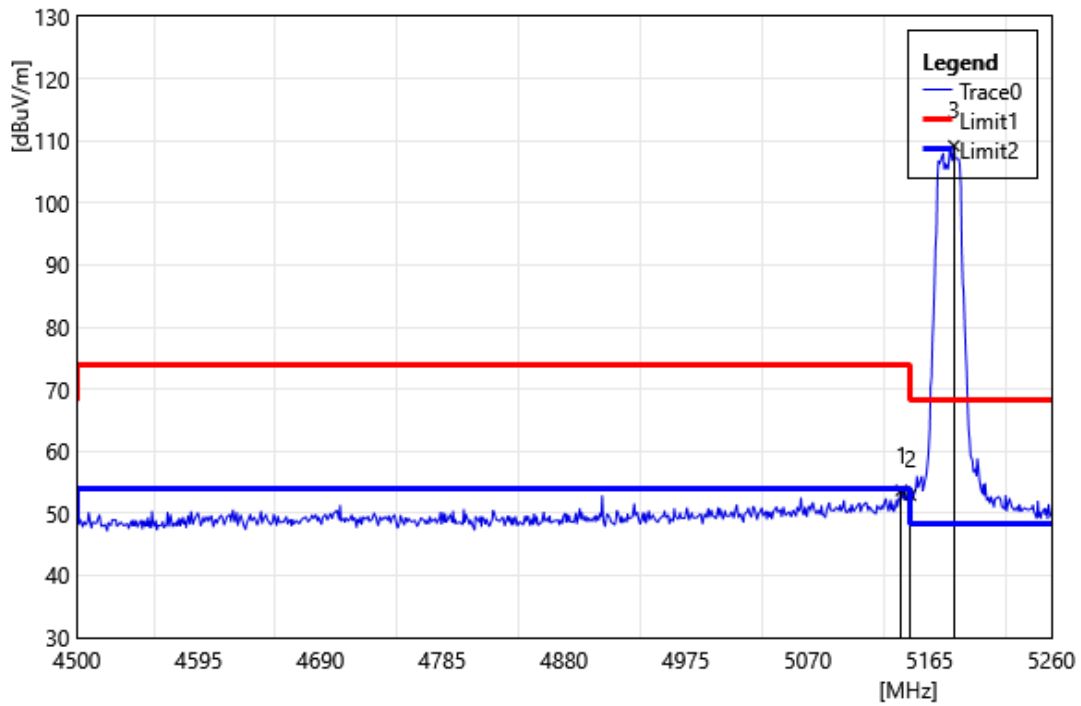


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	54.59	-0.90	53.69	74.00	-20.31	PEAK
2	5150.00	53.85	-0.91	52.95	74.00	-21.05	PEAK
3	5184.00	110.26	-1.08	109.18	68.20	40.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

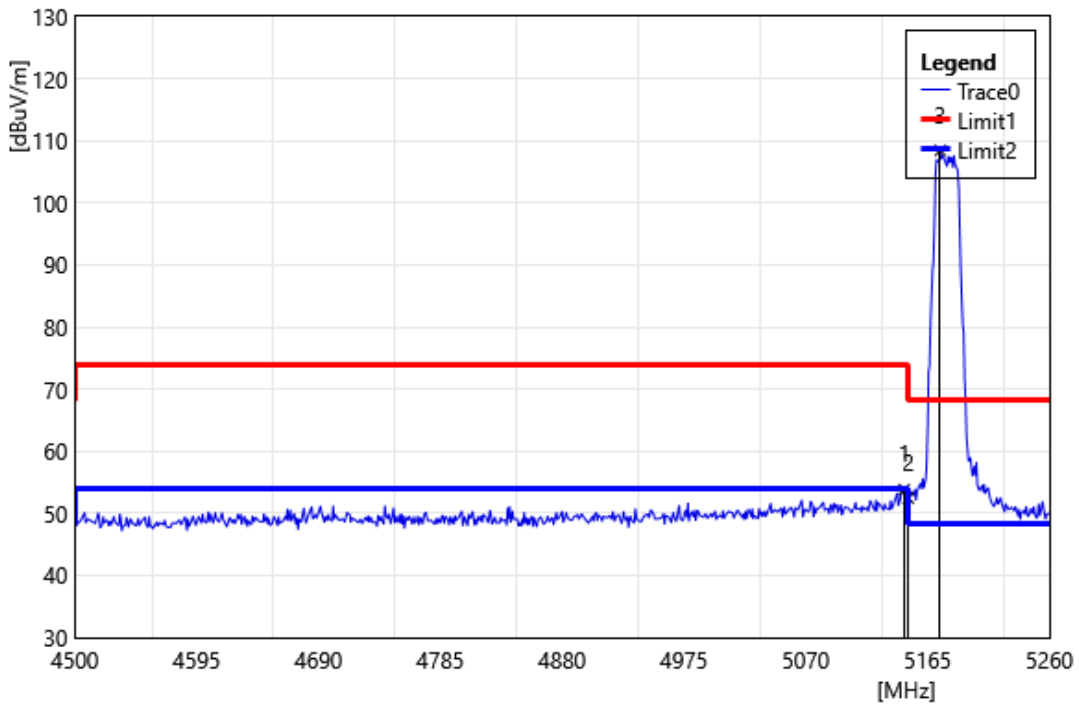


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	54.73	-0.90	53.83	74.00	-20.17	PEAK
2	5150.00	53.37	-0.91	52.47	74.00	-21.53	PEAK
3	5174.88	109.48	-1.03	108.45	68.20	40.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

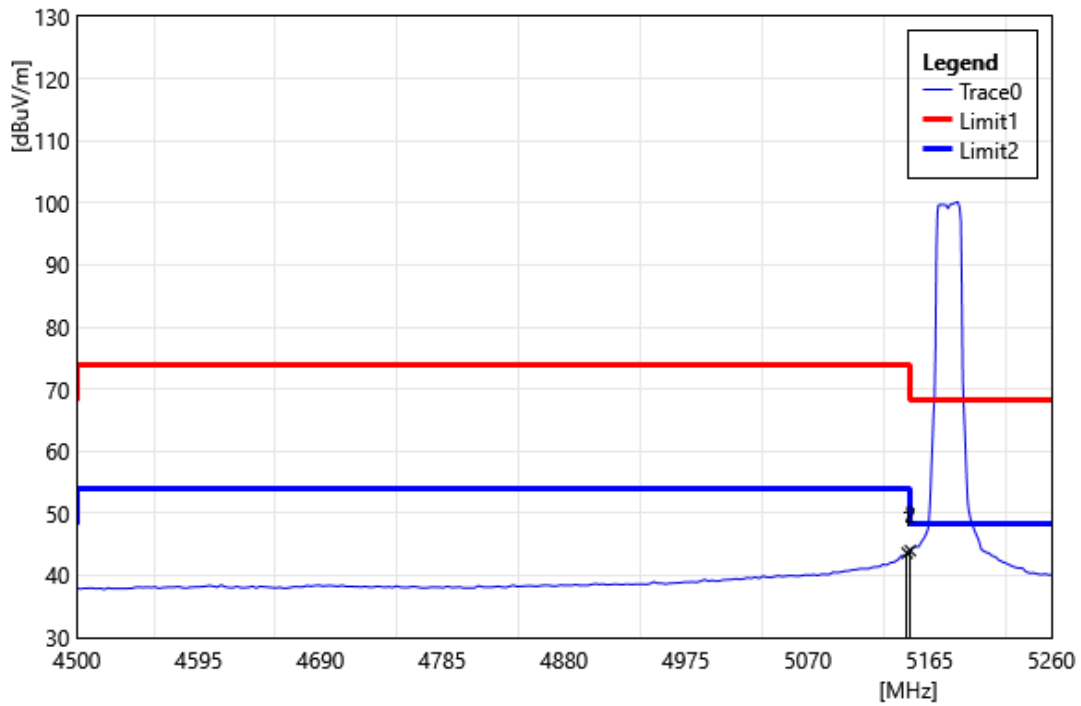


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	44.51	-0.91	43.60	54.00	-10.40	AVG
2	5150.00	44.90	-0.91	43.99	54.00	-10.01	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

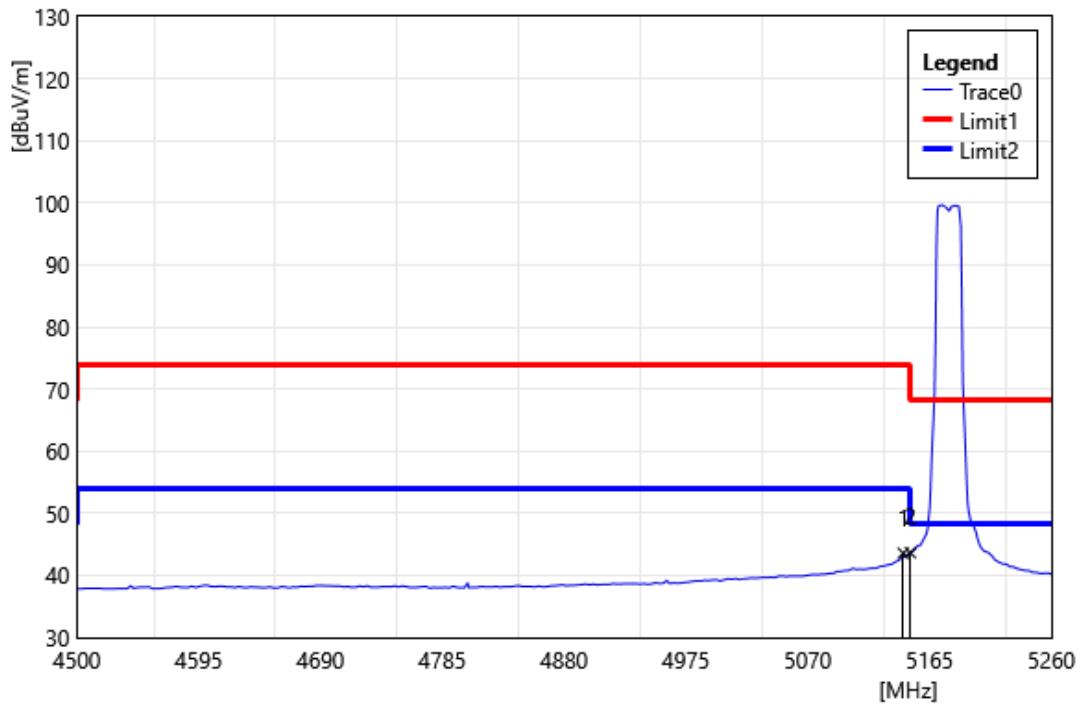


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	44.49	-0.90	43.59	54.00	-10.41	AVG
2	5150.00	44.58	-0.91	43.67	54.00	-10.33	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

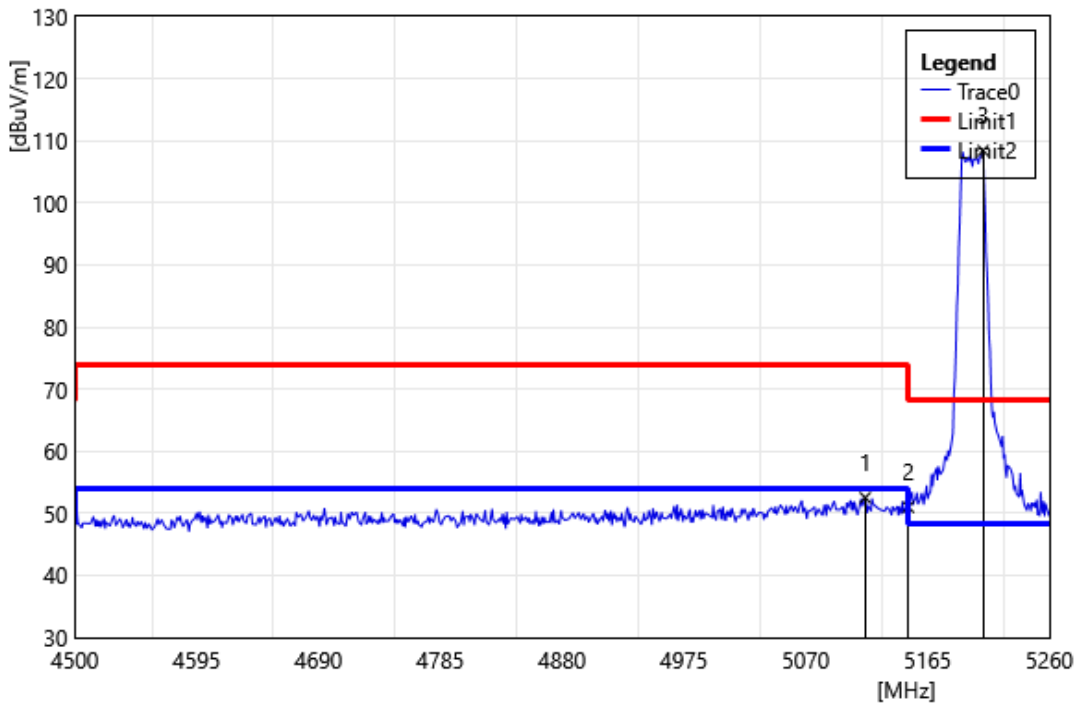


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5116.36	53.41	-0.88	52.53	74.00	-21.47	PEAK
2	5150.00	51.92	-0.91	51.01	74.00	-22.99	PEAK
3	5208.32	109.63	-1.21	108.42	68.20	40.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

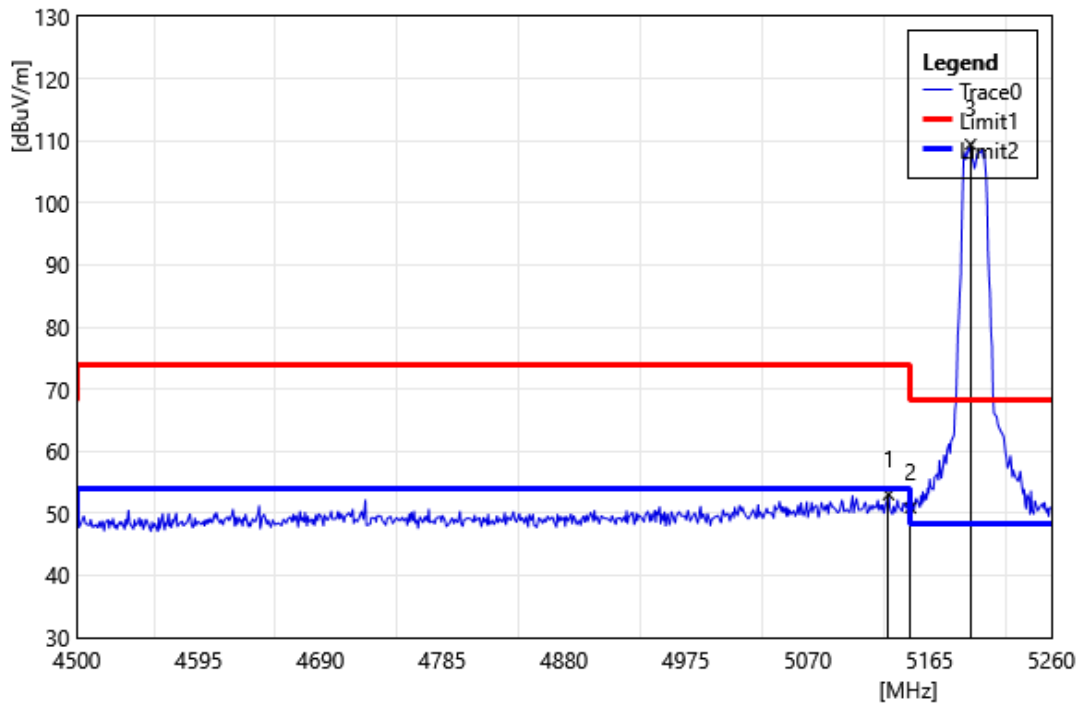


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5133.08	53.92	-0.89	53.03	74.00	-20.97	PEAK
2	5150.00	51.80	-0.91	50.90	74.00	-23.10	PEAK
3	5196.92	110.57	-1.14	109.43	68.20	41.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

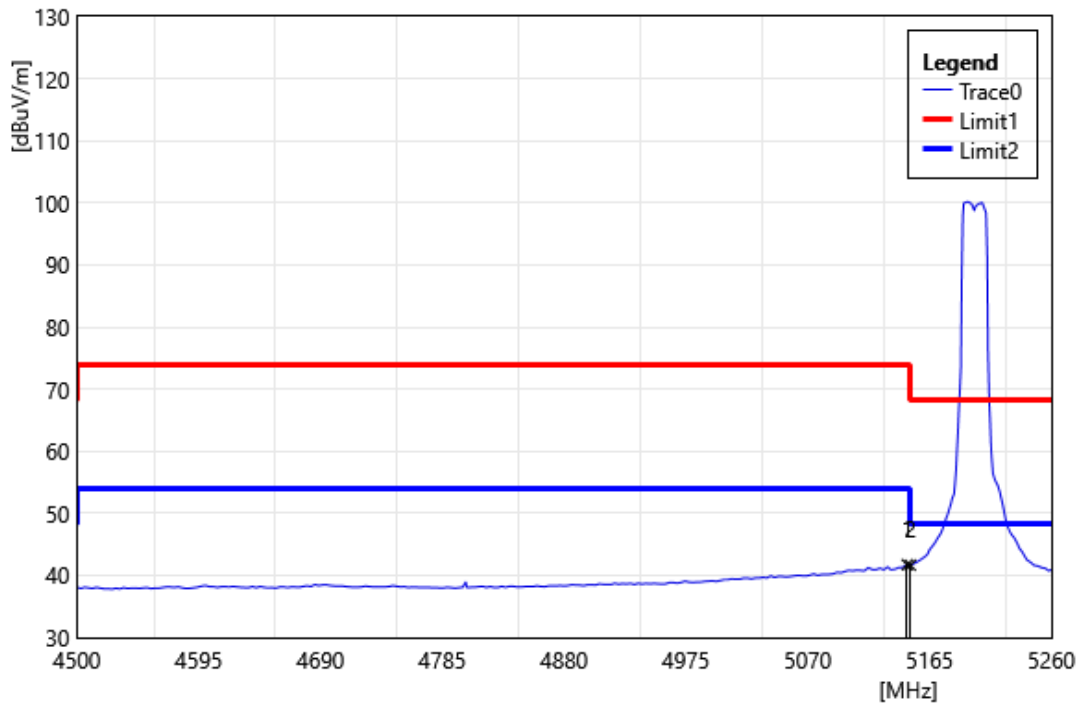


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	42.64	-0.91	41.73	54.00	-12.27	AVG
2	5150.00	42.56	-0.91	41.65	54.00	-12.35	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

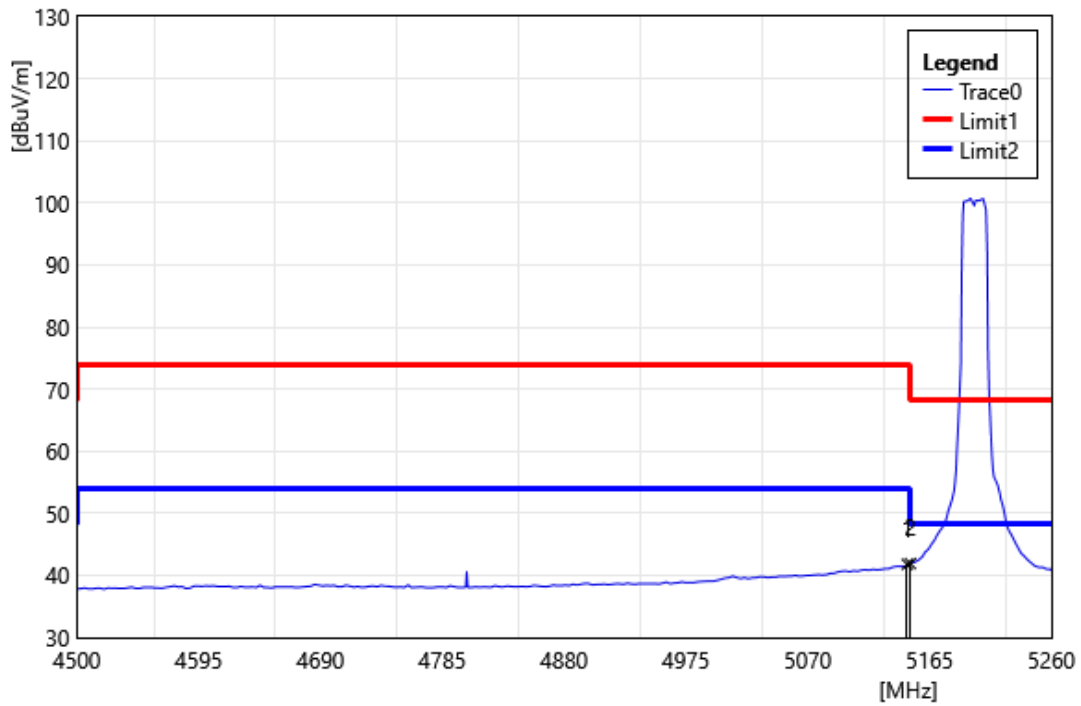


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	42.70	-0.91	41.79	54.00	-12.21	AVG
2	5150.00	42.82	-0.91	41.91	54.00	-12.09	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

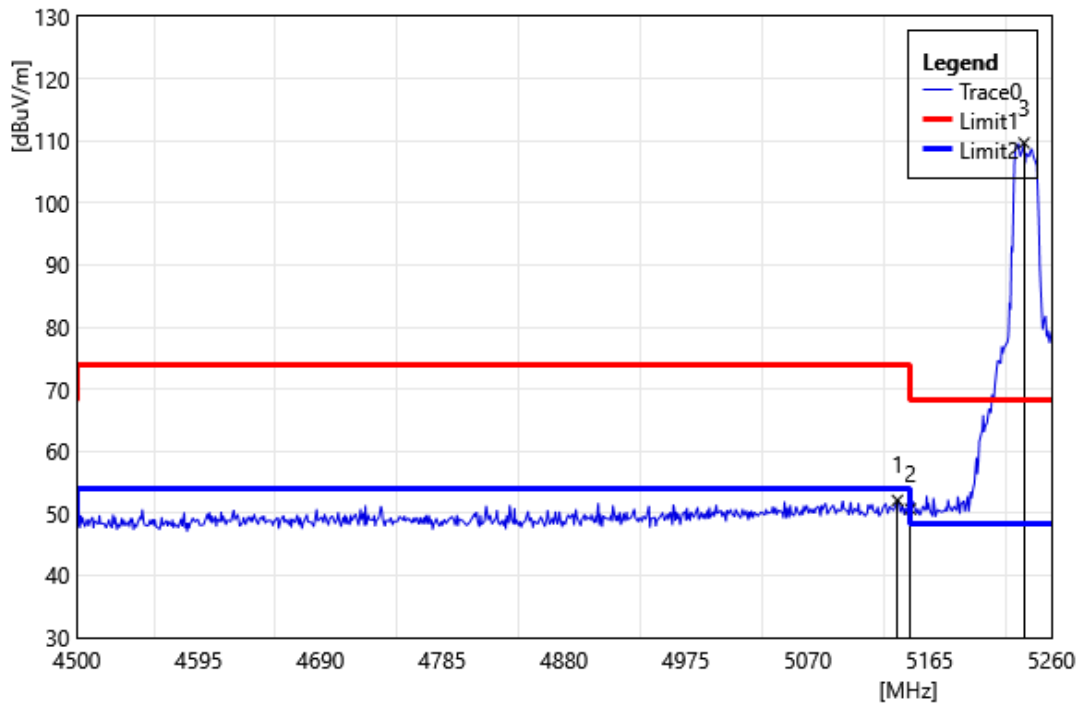


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.92	52.99	-0.90	52.09	74.00	-21.91	PEAK
2	5150.00	51.60	-0.91	50.69	74.00	-23.31	PEAK
3	5238.72	111.06	-1.42	109.64	68.20	41.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

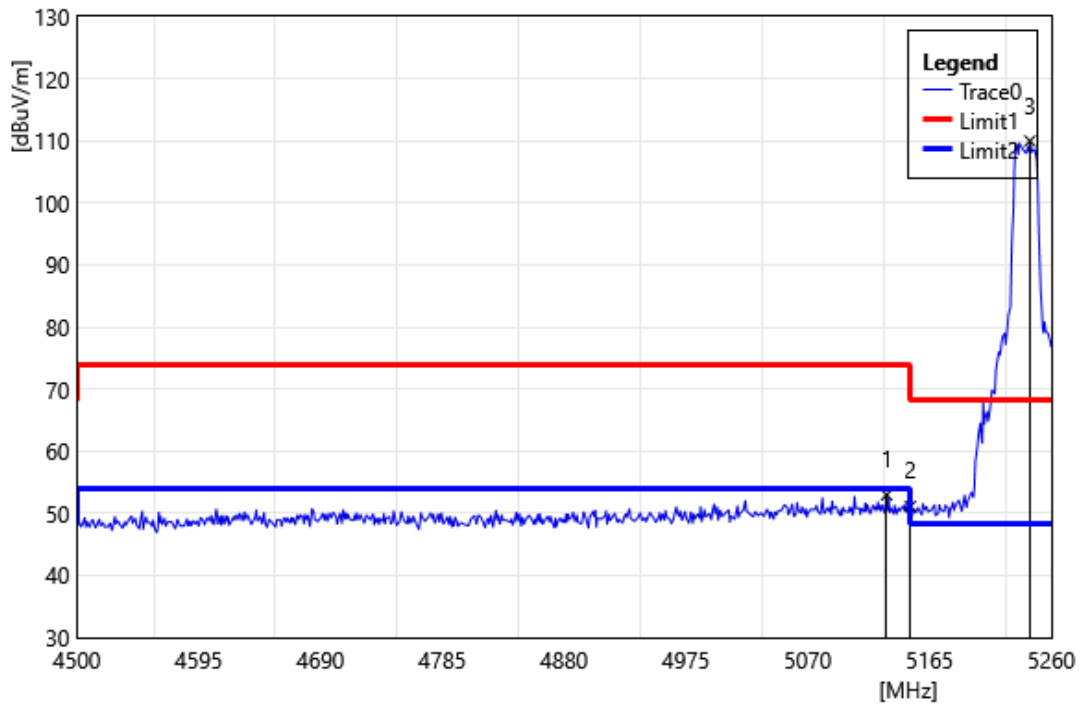


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5131.56	53.86	-0.89	52.97	74.00	-21.03	PEAK
2	5150.00	52.03	-0.91	51.12	74.00	-22.88	PEAK
3	5243.28	111.40	-1.45	109.95	68.20	41.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

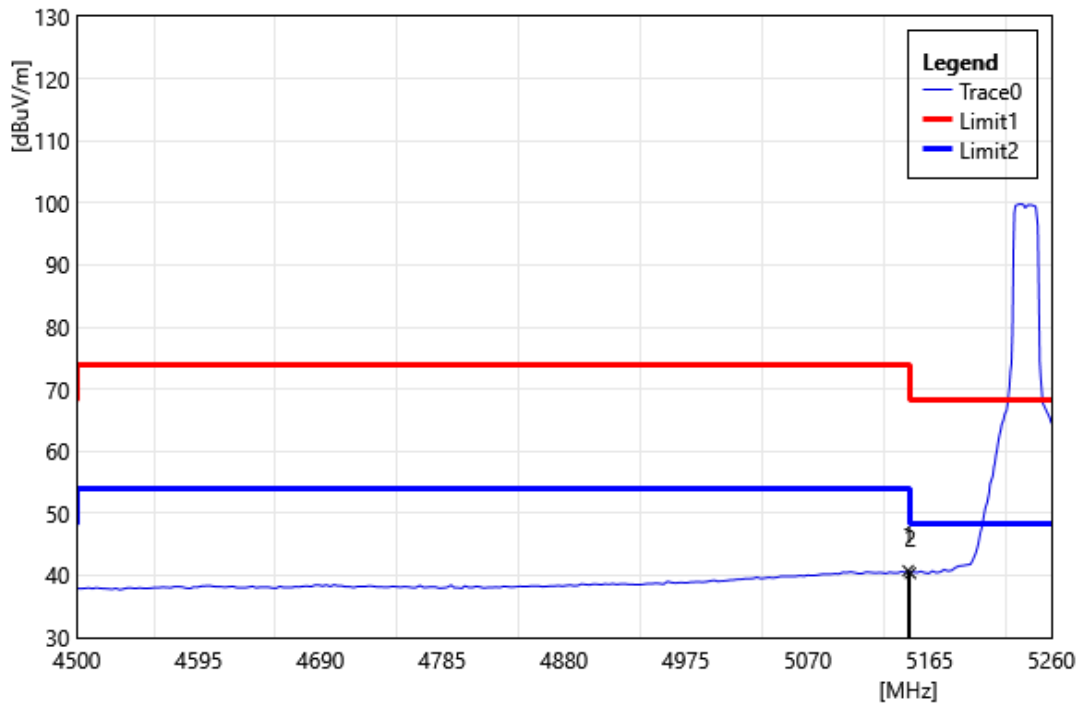


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	41.66	-0.91	40.75	54.00	-13.25	AVG
2	5150.00	41.28	-0.91	40.38	54.00	-13.62	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240 MHz		
Polarization:	Horizontal		
Remark:			

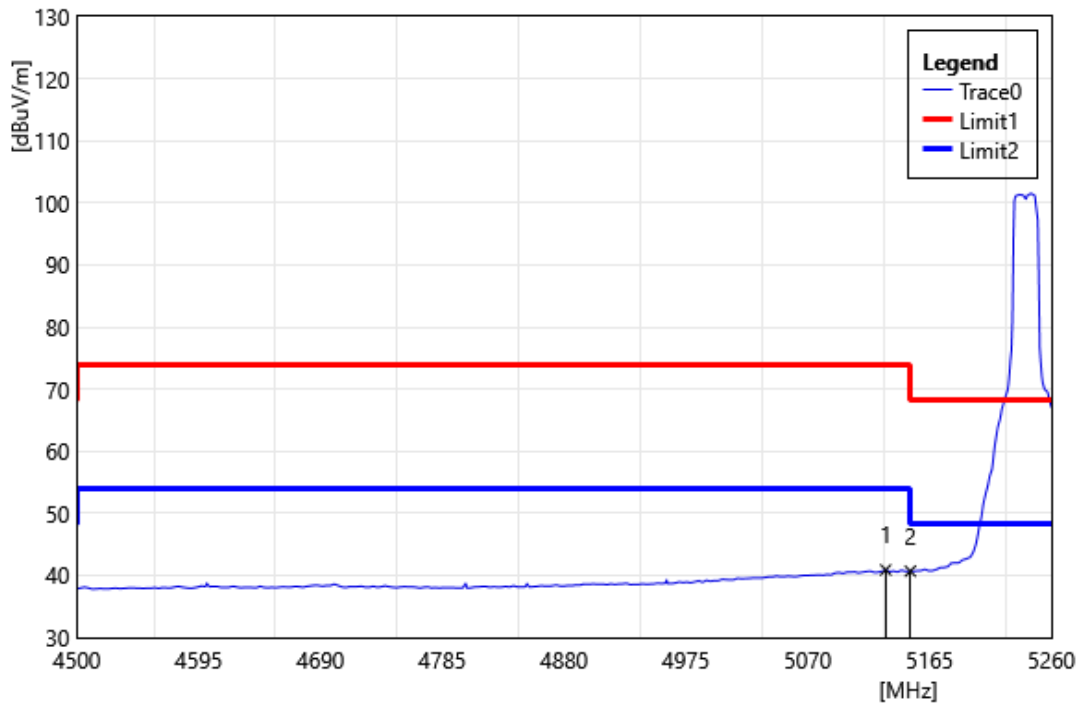


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5130.80	41.78	-0.89	40.90	54.00	-13.11	AVG
2	5150.00	41.59	-0.91	40.69	54.00	-13.31	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

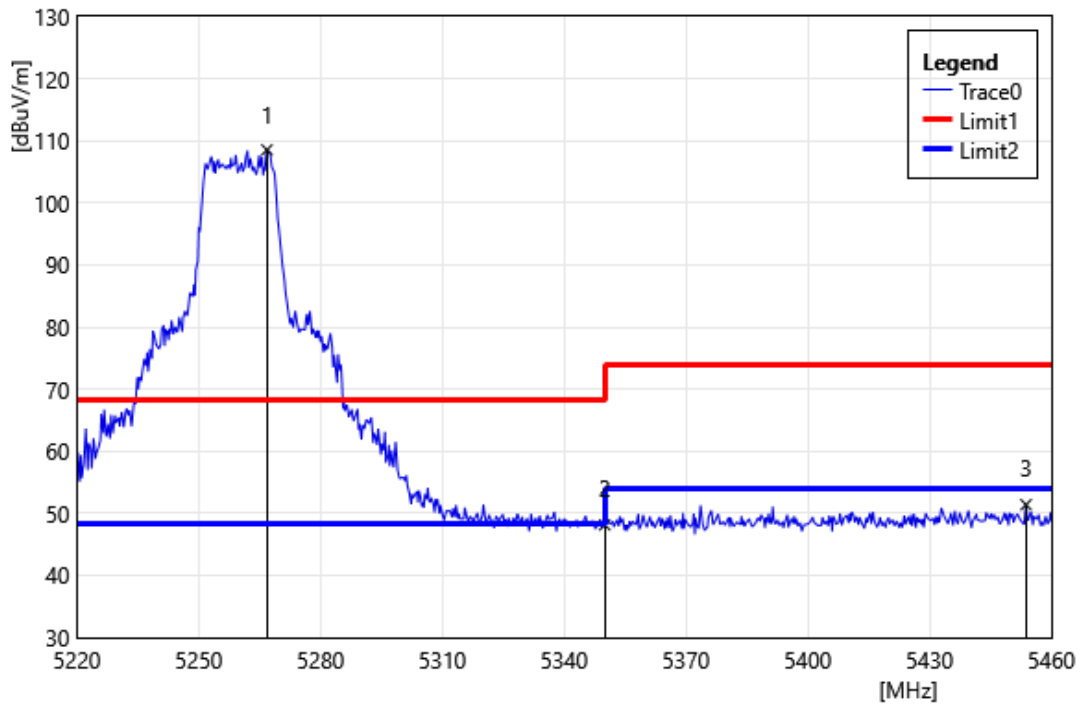


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5266.80	110.07	-1.55	108.52	68.20	40.32	PEAK
2	5350.00	49.44	-1.29	48.15	74.00	-25.85	PEAK
3	5453.76	51.98	-0.58	51.41	74.00	-22.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

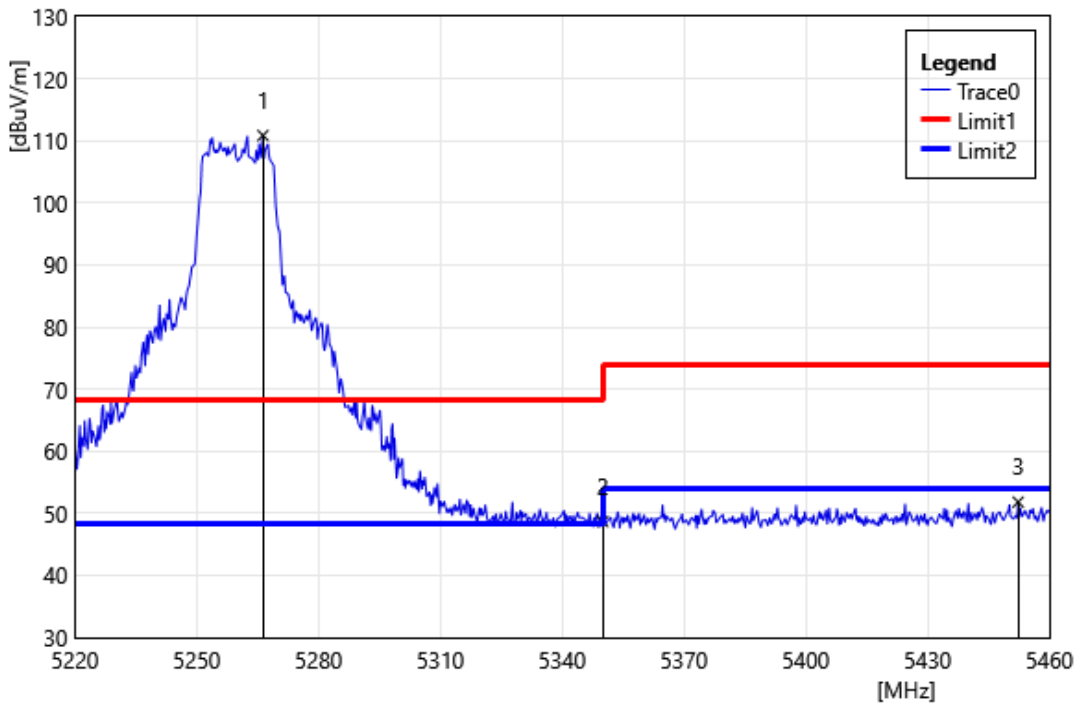


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5266.32	112.40	-1.55	110.85	68.20	42.65	PEAK
2	5350.00	49.97	-1.29	48.68	74.00	-25.32	PEAK
3	5452.32	52.39	-0.58	51.81	74.00	-22.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

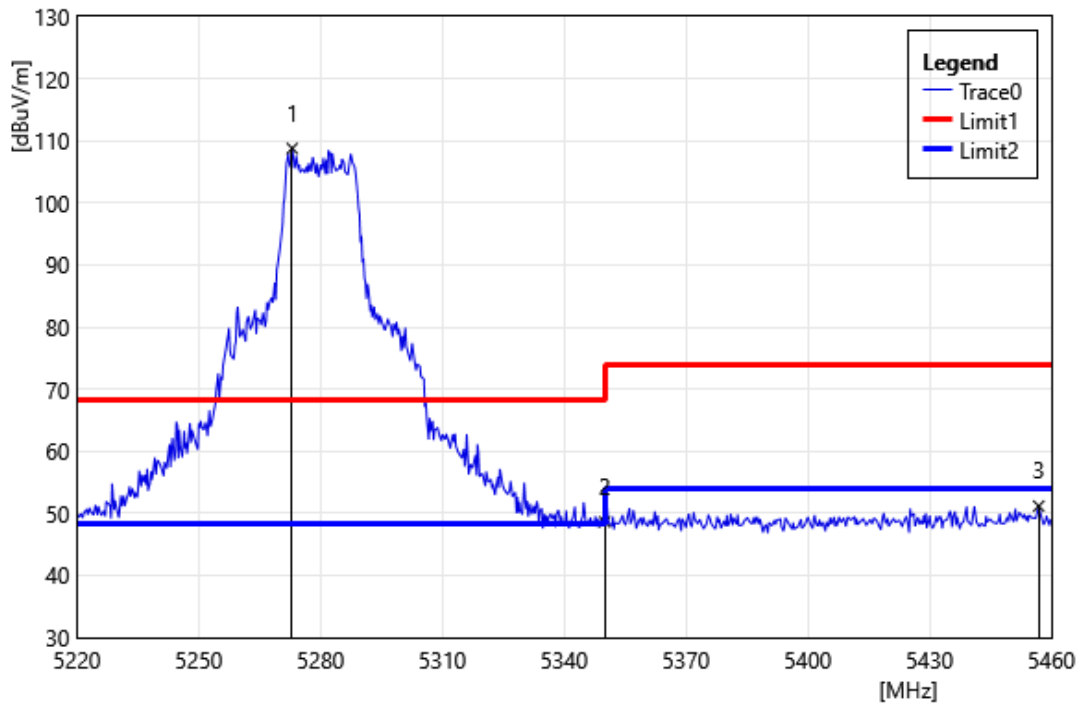


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5273.04	110.34	-1.57	108.77	68.20	40.57	PEAK
2	5350.00	49.92	-1.29	48.63	74.00	-25.37	PEAK
3	5456.88	51.75	-0.58	51.17	74.00	-22.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

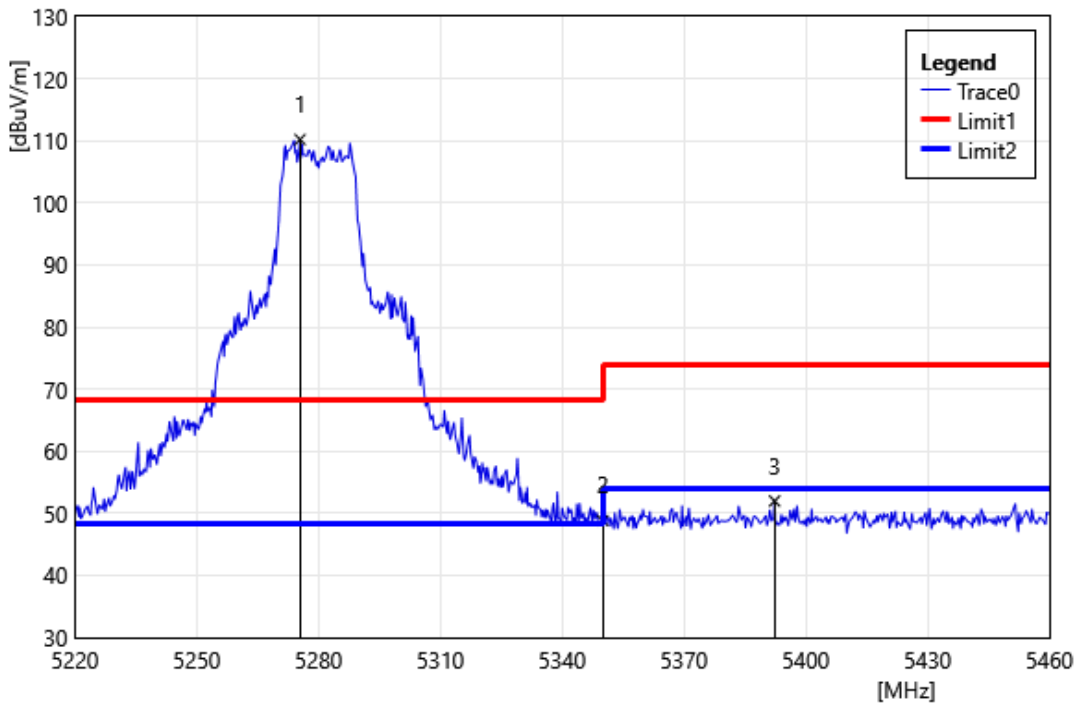


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5275.44	111.77	-1.57	110.20	68.20	42.00	PEAK
2	5350.00	50.13	-1.29	48.84	74.00	-25.16	PEAK
3	5392.32	52.98	-0.99	51.99	74.00	-22.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

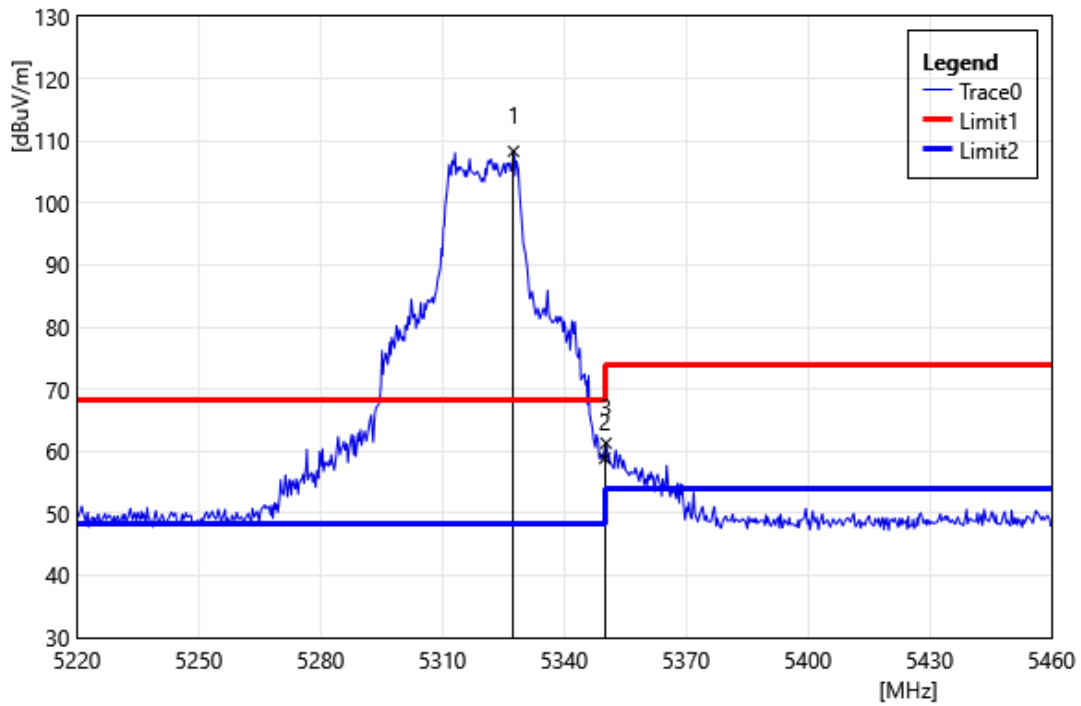


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5327.52	109.76	-1.45	108.31	68.20	40.11	PEAK
2	5350.00	60.14	-1.29	58.85	74.00	-15.15	PEAK
3	5350.32	62.58	-1.29	61.29	74.00	-12.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

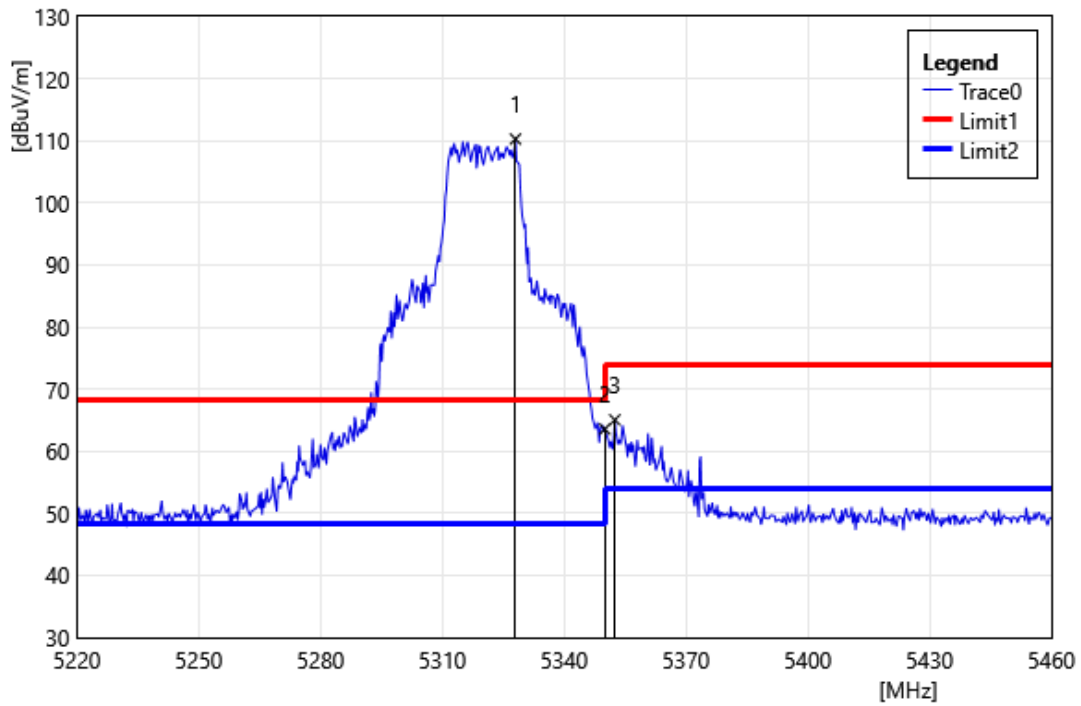


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5328.00	111.73	-1.45	110.28	68.20	42.08	PEAK
2	5350.00	64.86	-1.29	63.57	74.00	-10.43	PEAK
3	5352.48	66.33	-1.27	65.06	74.00	-8.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Vertical		
Remark:			

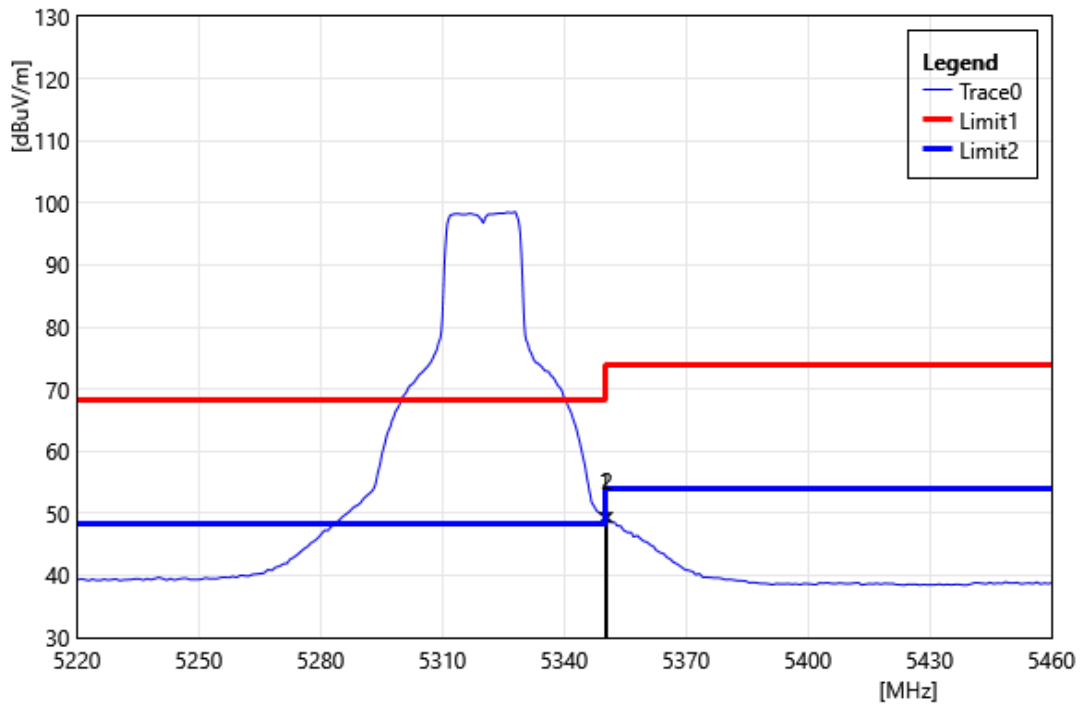


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	50.64	-1.29	49.34	54.00	-4.66	AVG
2	5350.56	50.61	-1.29	49.32	54.00	-4.68	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

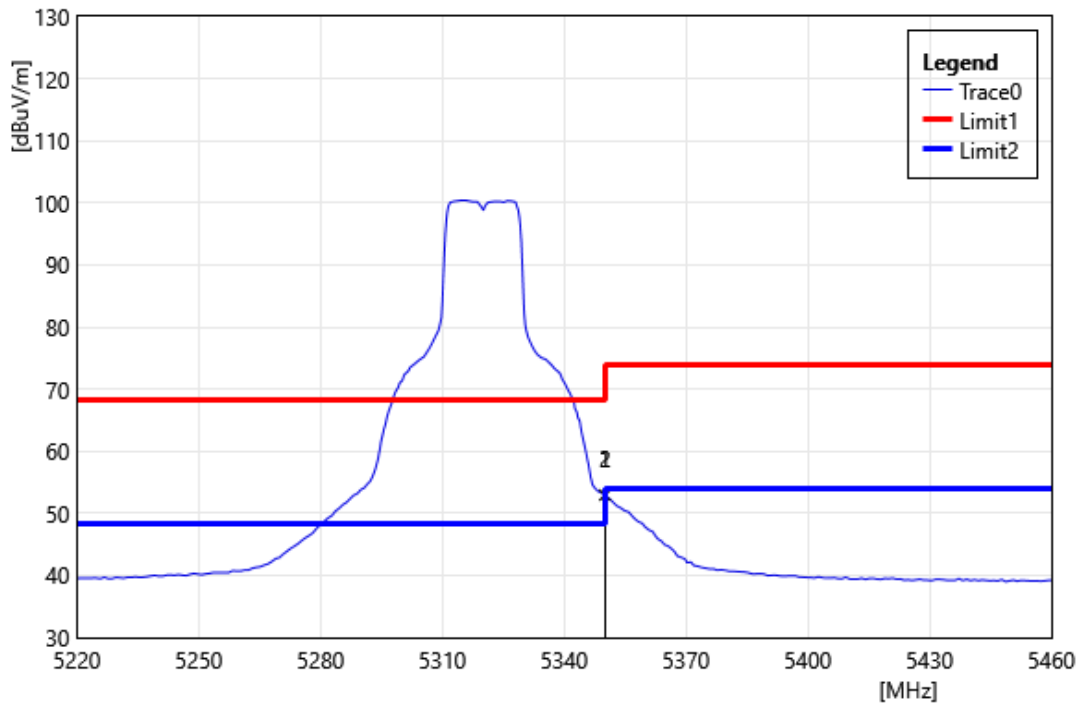


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	54.26	-1.29	52.96	54.00	-1.04	AVG
2	5350.08	54.24	-1.29	52.95	54.00	-1.05	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

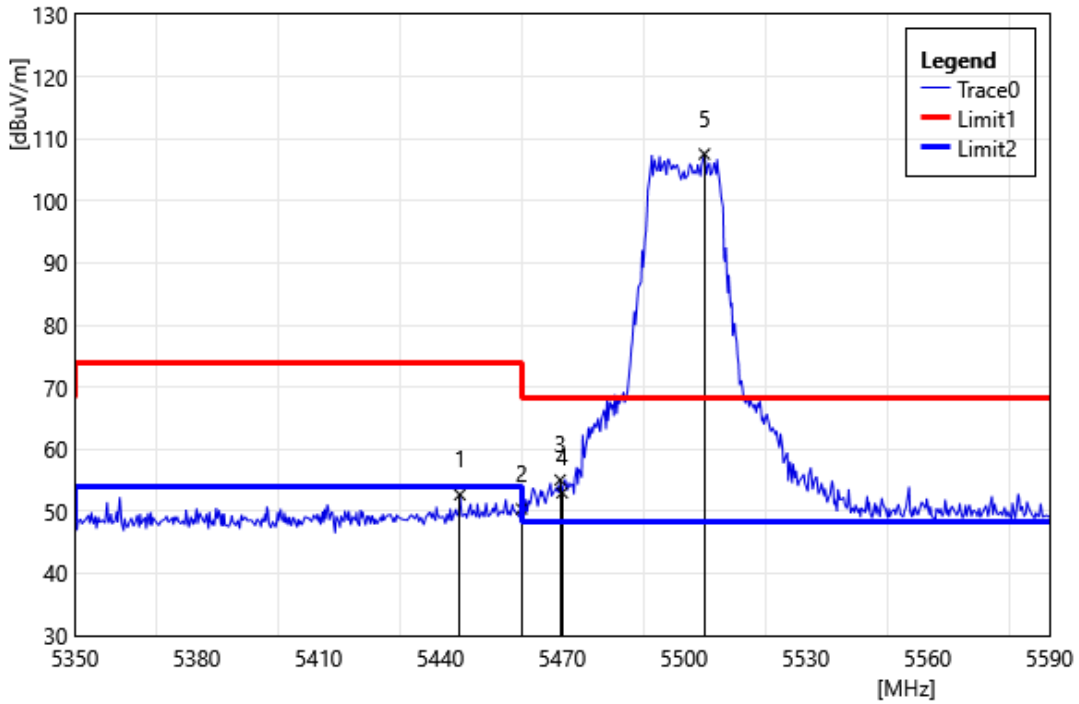


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5444.80	53.31	-0.62	52.69	74.00	-21.31	PEAK
2	5460.00	50.95	-0.57	50.38	74.00	-23.62	PEAK
3	5469.52	55.60	-0.56	55.04	68.20	-13.16	PEAK
4	5470.00	53.54	-0.56	52.98	68.20	-15.22	PEAK
5	5505.04	108.07	-0.53	107.54	68.20	39.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

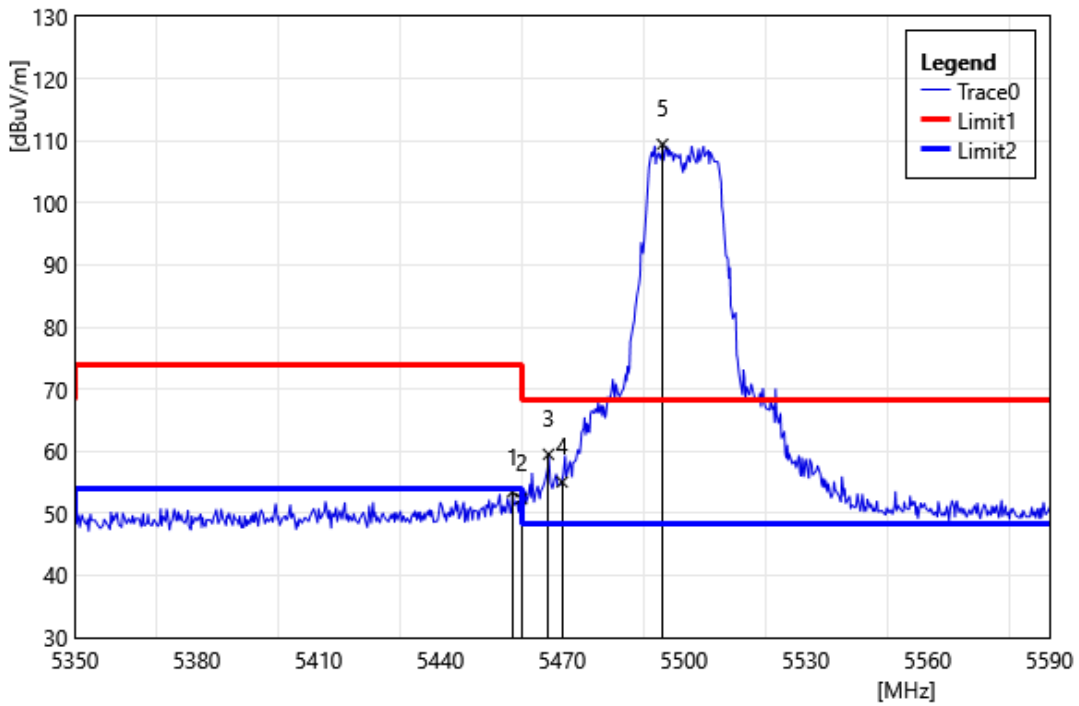


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.76	54.03	-0.58	53.45	74.00	-20.55	PEAK
2	5460.00	52.92	-0.57	52.35	74.00	-21.65	PEAK
3	5466.64	60.07	-0.57	59.50	68.20	-8.70	PEAK
4	5470.00	55.61	-0.56	55.05	68.20	-13.15	PEAK
5	5494.72	109.97	-0.54	109.43	68.20	41.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

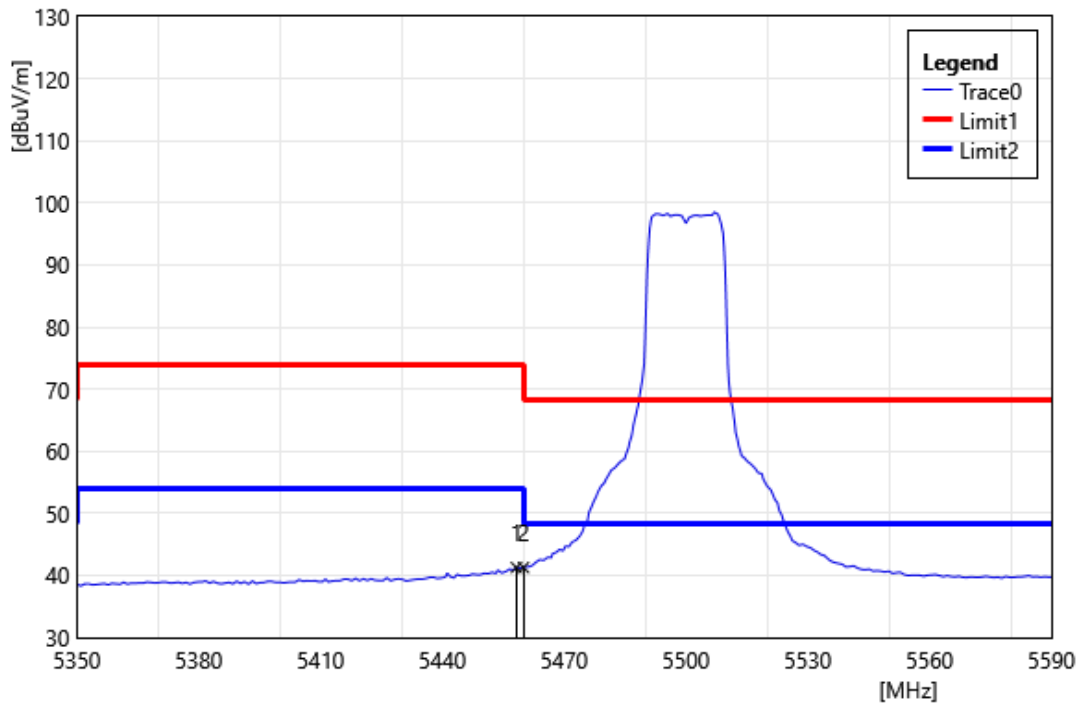


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	41.86	-0.58	41.28	54.00	-12.72	AVG
2	5460.00	41.83	-0.57	41.26	54.00	-12.74	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500 MHz		
Polarization:	Horizontal		
Remark:			

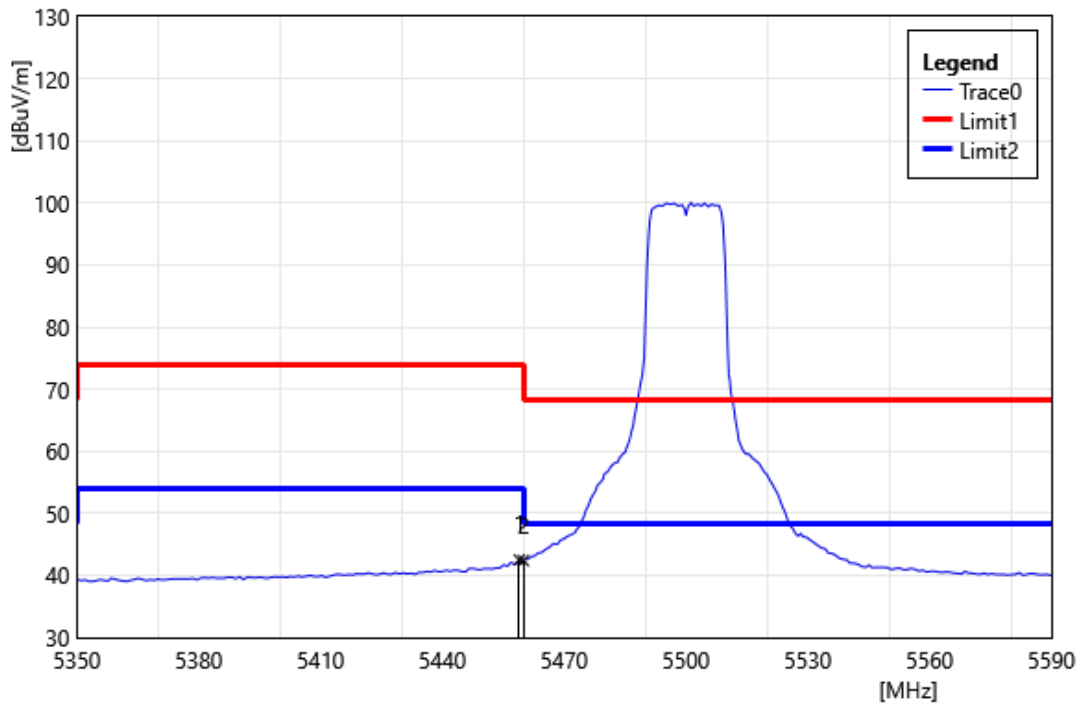


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	43.08	-0.57	42.51	54.00	-11.49	AVG
2	5460.00	42.96	-0.57	42.39	54.00	-11.61	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

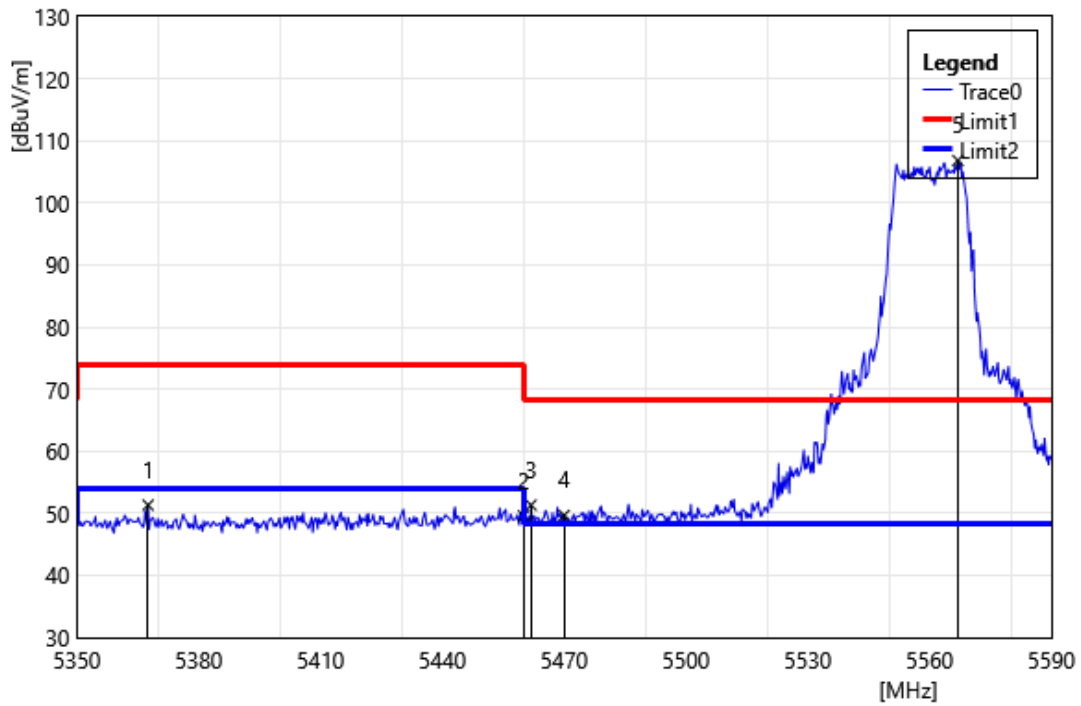


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5367.52	52.51	-1.17	51.34	74.00	-22.66	PEAK
2	5460.00	50.17	-0.57	49.60	74.00	-24.40	PEAK
3	5461.84	51.89	-0.57	51.32	68.20	-16.88	PEAK
4	5470.00	50.23	-0.56	49.67	68.20	-18.53	PEAK
5	5566.96	107.33	-0.52	106.81	68.20	38.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

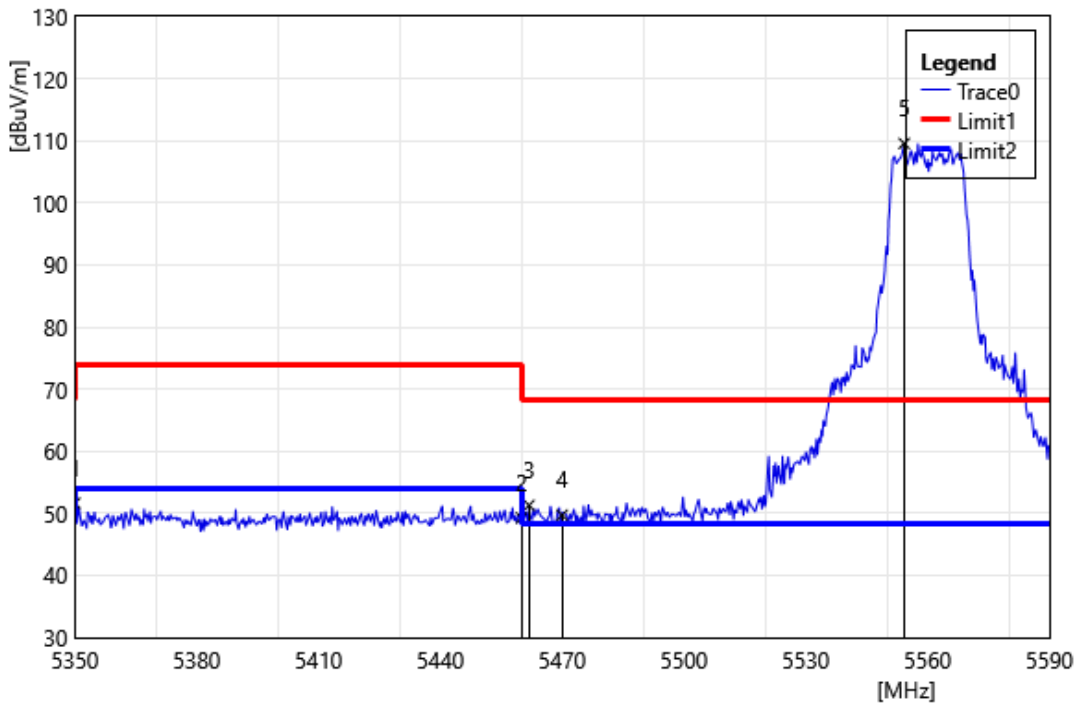


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	52.92	-1.29	51.63	74.00	-22.37	PEAK
2	5460.00	49.83	-0.57	49.26	74.00	-24.74	PEAK
3	5461.84	51.85	-0.57	51.28	68.20	-16.92	PEAK
4	5470.00	50.28	-0.56	49.72	68.20	-18.48	PEAK
5	5554.24	110.07	-0.51	109.56	68.20	41.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700 MHz		
Polarization:	Vertical		
Remark:			

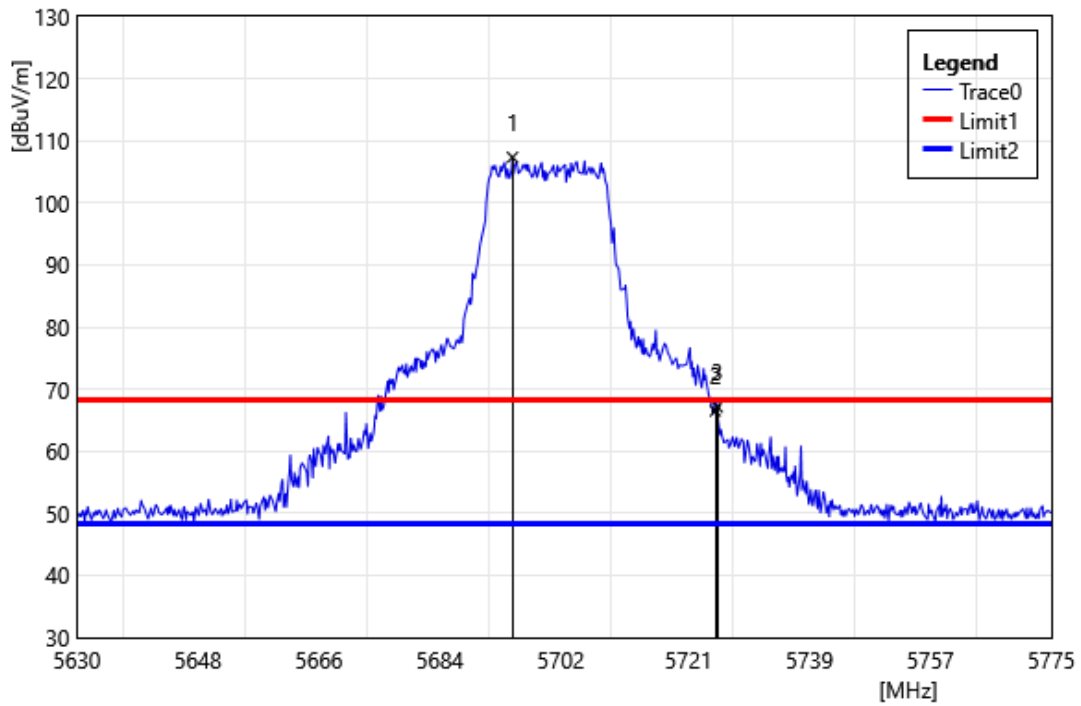


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5694.82	107.94	-0.61	107.33	68.20	39.13	PEAK
2	5725.00	66.84	-0.34	66.50	68.20	-1.70	PEAK
3	5725.27	67.49	-0.34	67.15	68.20	-1.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700 MHz		
Polarization:	Horizontal		
Remark:			

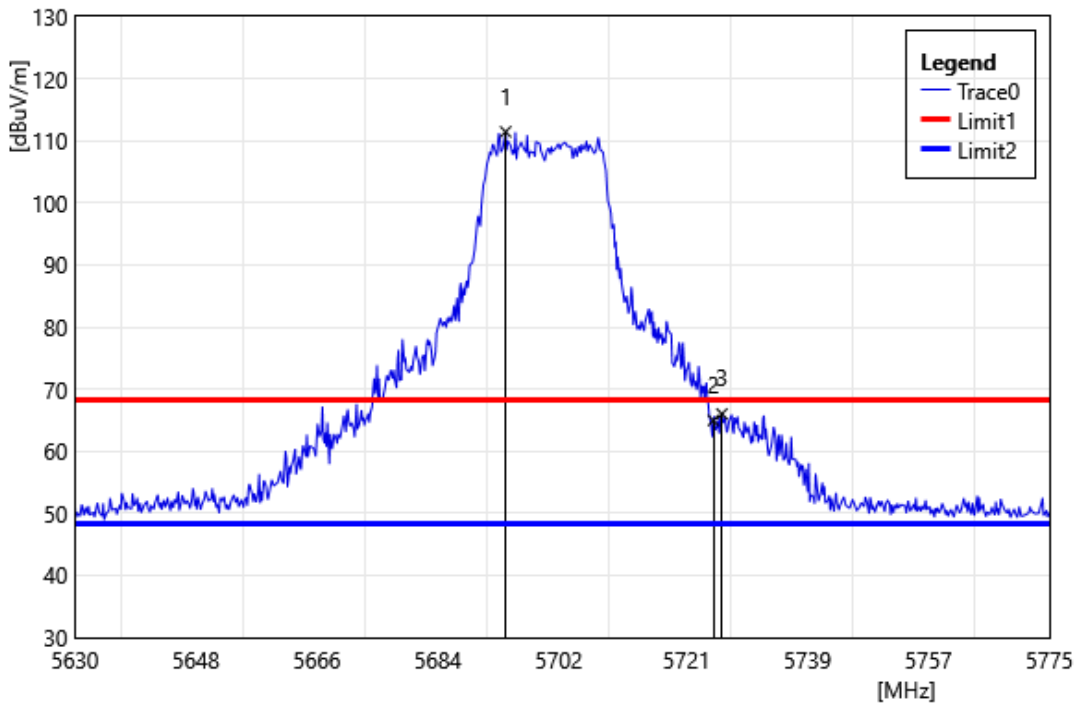


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5694.09	112.07	-0.61	111.46	68.20	43.26	PEAK
2	5725.00	65.31	-0.34	64.97	68.20	-3.23	PEAK
3	5726.28	66.34	-0.33	66.01	68.20	-2.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

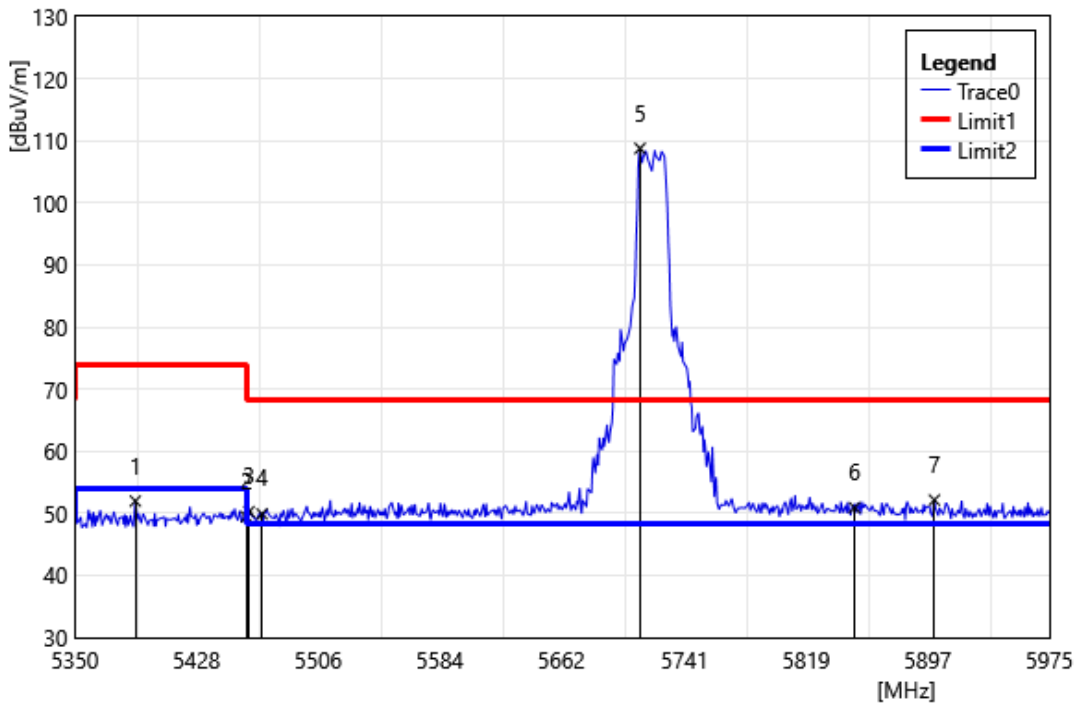


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5388.75	52.99	-1.02	51.97	74.00	-22.03	PEAK
2	5460.00	50.03	-0.57	49.46	74.00	-24.54	PEAK
3	5461.63	50.85	-0.57	50.28	68.20	-17.92	PEAK
4	5470.00	50.48	-0.56	49.92	68.20	-18.28	PEAK
5	5712.50	109.25	-0.48	108.77	68.20	40.57	PEAK
6	5850.00	50.65	0.28	50.93	68.20	-17.27	PEAK
7	5901.25	51.76	0.40	52.16	68.20	-16.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

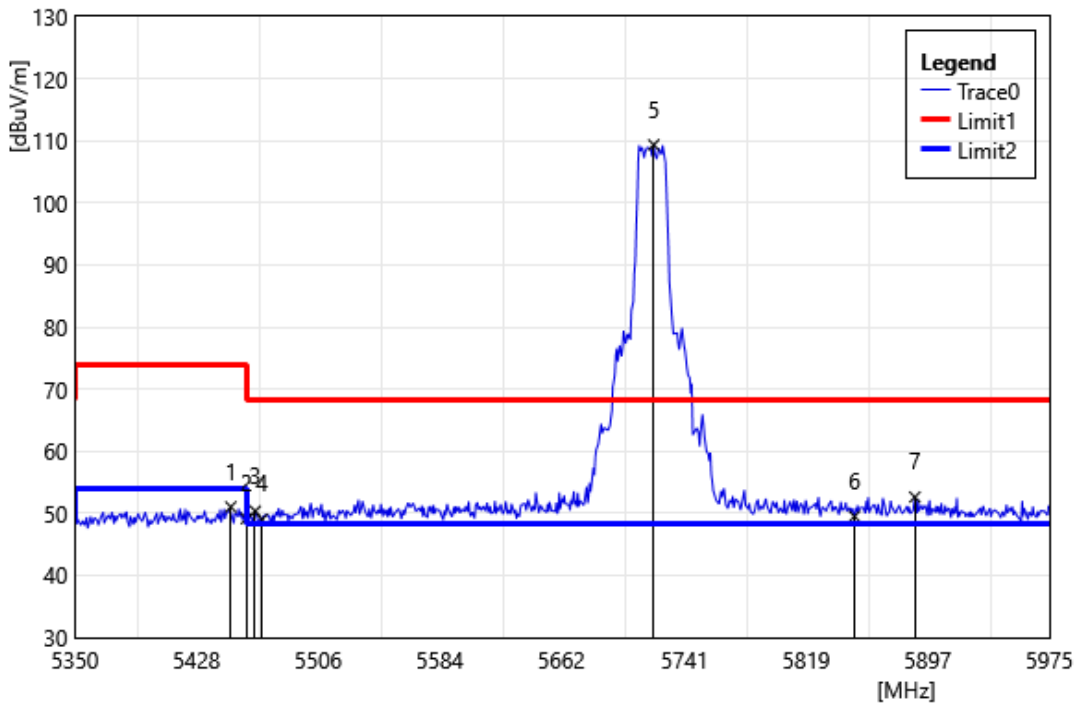


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.00	51.62	-0.58	51.04	74.00	-22.96	PEAK
2	5460.00	49.72	-0.57	49.15	74.00	-24.85	PEAK
3	5465.63	50.92	-0.57	50.35	68.20	-17.85	PEAK
4	5470.00	49.58	-0.56	49.02	68.20	-19.18	PEAK
5	5721.25	109.73	-0.38	109.35	68.20	41.15	PEAK
6	5850.00	49.22	0.28	49.50	68.20	-18.70	PEAK
7	5888.75	52.25	0.38	52.63	68.20	-15.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

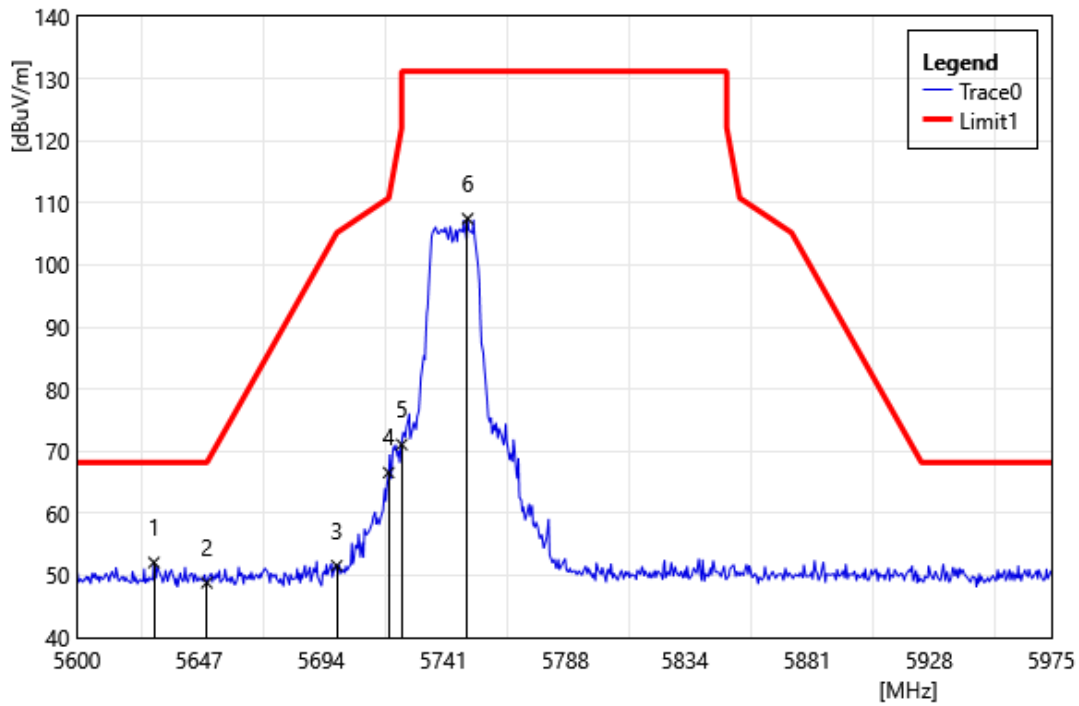


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5629.63	52.70	-0.61	52.09	68.20	-16.11	PEAK
2	5650.00	49.46	-0.64	48.82	68.20	-19.38	PEAK
3	5700.00	52.18	-0.61	51.57	105.20	-53.63	PEAK
4	5720.00	66.97	-0.40	66.57	110.80	-44.23	PEAK
5	5725.00	71.42	-0.34	71.08	122.20	-51.12	PEAK
6	5750.38	107.53	-0.08	107.45	131.20	-23.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

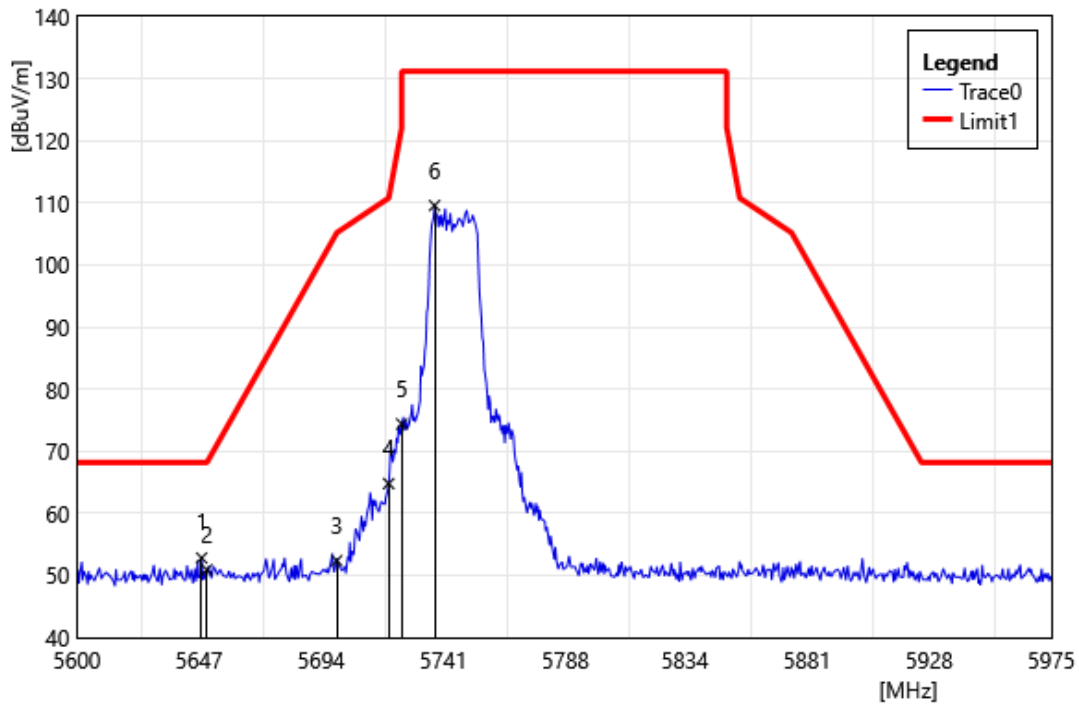


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5648.00	53.44	-0.64	52.80	68.20	-15.40	PEAK
2	5650.00	51.55	-0.64	50.91	68.20	-17.29	PEAK
3	5700.00	52.99	-0.61	52.38	105.20	-52.82	PEAK
4	5720.00	65.19	-0.40	64.79	110.80	-46.01	PEAK
5	5725.00	74.73	-0.34	74.39	122.20	-47.81	PEAK
6	5737.63	109.78	-0.21	109.57	131.20	-21.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

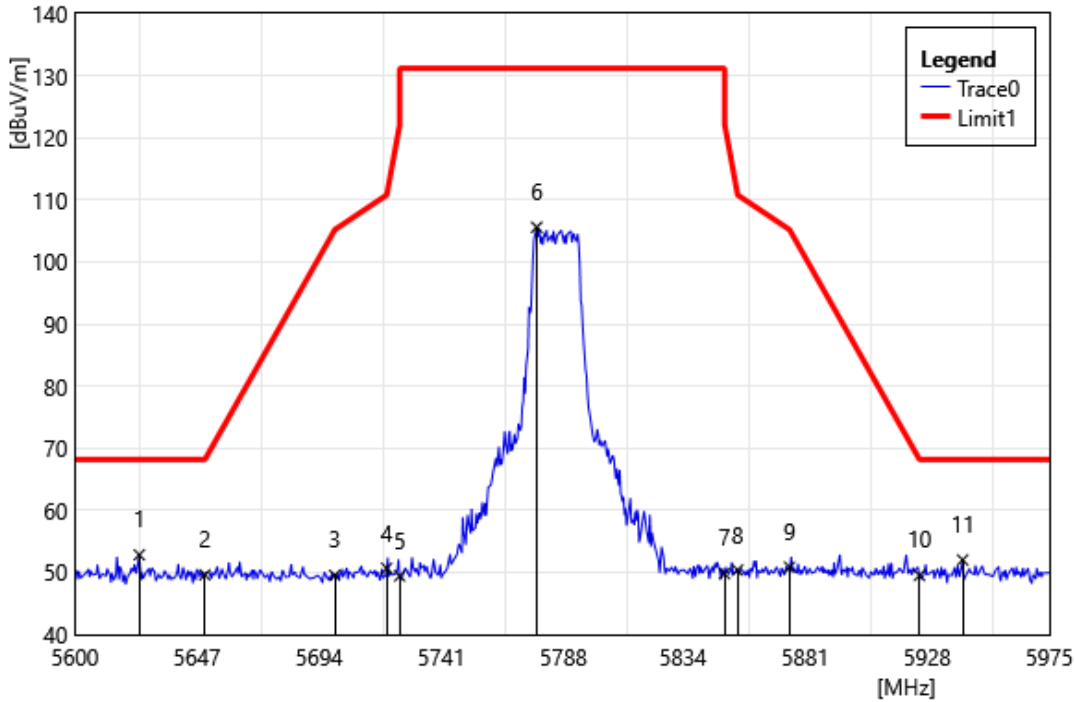


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5624.75	53.44	-0.60	52.84	68.20	-15.36	PEAK
2	5650.00	50.25	-0.64	49.61	68.20	-18.59	PEAK
3	5700.00	50.15	-0.61	49.54	105.20	-55.66	PEAK
4	5720.00	51.07	-0.40	50.67	110.80	-60.13	PEAK
5	5725.00	49.78	-0.34	49.44	122.20	-72.76	PEAK
6	5777.75	105.54	0.05	105.59	131.20	-25.61	PEAK
7	5850.00	49.52	0.28	49.80	122.20	-72.40	PEAK
8	5855.00	50.10	0.29	50.39	110.80	-60.41	PEAK
9	5875.00	50.51	0.34	50.85	105.20	-54.35	PEAK
10	5925.00	49.24	0.28	49.52	68.20	-18.68	PEAK
11	5941.63	51.83	0.19	52.02	68.20	-16.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

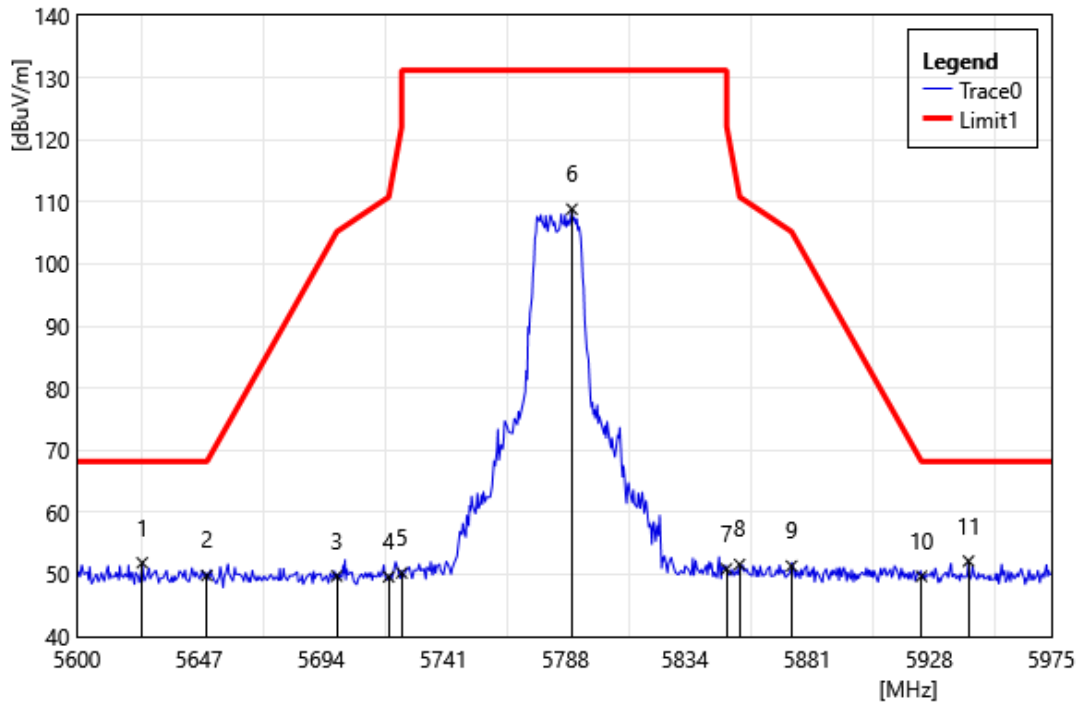


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5625.13	52.49	-0.61	51.88	68.20	-16.32	PEAK
2	5650.00	50.47	-0.64	49.83	68.20	-18.37	PEAK
3	5700.00	50.34	-0.61	49.73	105.20	-55.47	PEAK
4	5720.00	50.02	-0.40	49.62	110.80	-61.18	PEAK
5	5725.00	50.59	-0.34	50.25	122.20	-71.95	PEAK
6	5790.50	108.73	0.11	108.84	131.20	-22.36	PEAK
7	5850.00	50.61	0.28	50.89	122.20	-71.31	PEAK
8	5855.00	51.30	0.29	51.59	110.80	-59.21	PEAK
9	5875.00	51.01	0.34	51.35	105.20	-53.85	PEAK
10	5925.00	49.42	0.28	49.70	68.20	-18.50	PEAK
11	5943.13	51.97	0.18	52.15	68.20	-16.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

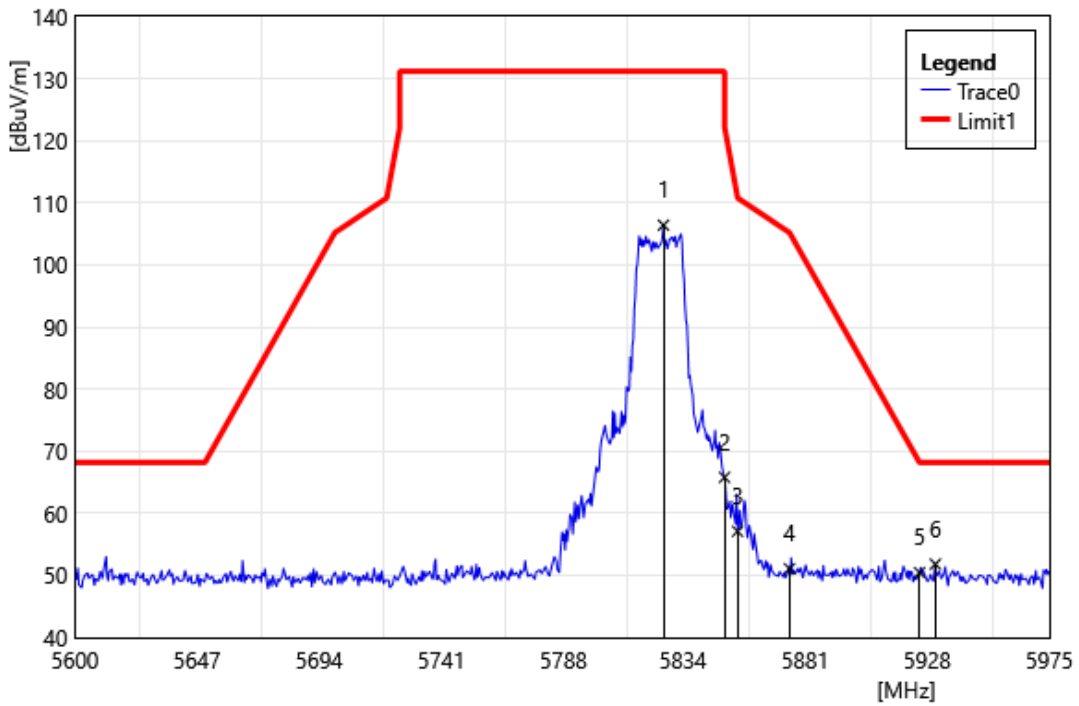


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5826.50	106.19	0.22	106.41	131.20	-24.79	PEAK
2	5850.00	65.52	0.28	65.80	122.20	-56.40	PEAK
3	5855.00	56.82	0.29	57.11	110.80	-53.69	PEAK
4	5875.00	50.76	0.34	51.10	105.20	-54.10	PEAK
5	5925.00	50.18	0.28	50.46	68.20	-17.74	PEAK
6	5931.13	51.58	0.24	51.82	68.20	-16.38	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825 MHz		
Polarization:	Horizontal		
Remark:			

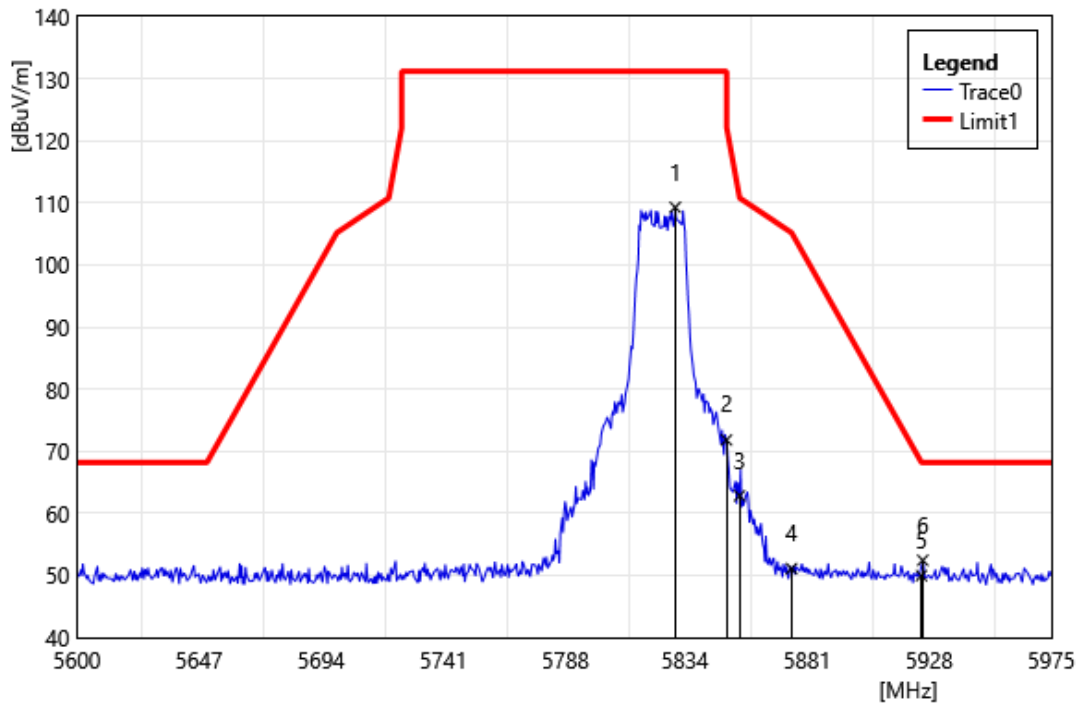


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5830.25	109.05	0.23	109.28	131.20	-21.92	PEAK
2	5850.00	71.54	0.28	71.82	122.20	-50.38	PEAK
3	5855.00	62.54	0.29	62.83	110.80	-47.97	PEAK
4	5875.00	50.77	0.34	51.11	105.20	-54.09	PEAK
5	5925.00	49.69	0.28	49.97	68.20	-18.23	PEAK
6	5925.50	52.18	0.27	52.45	68.20	-15.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

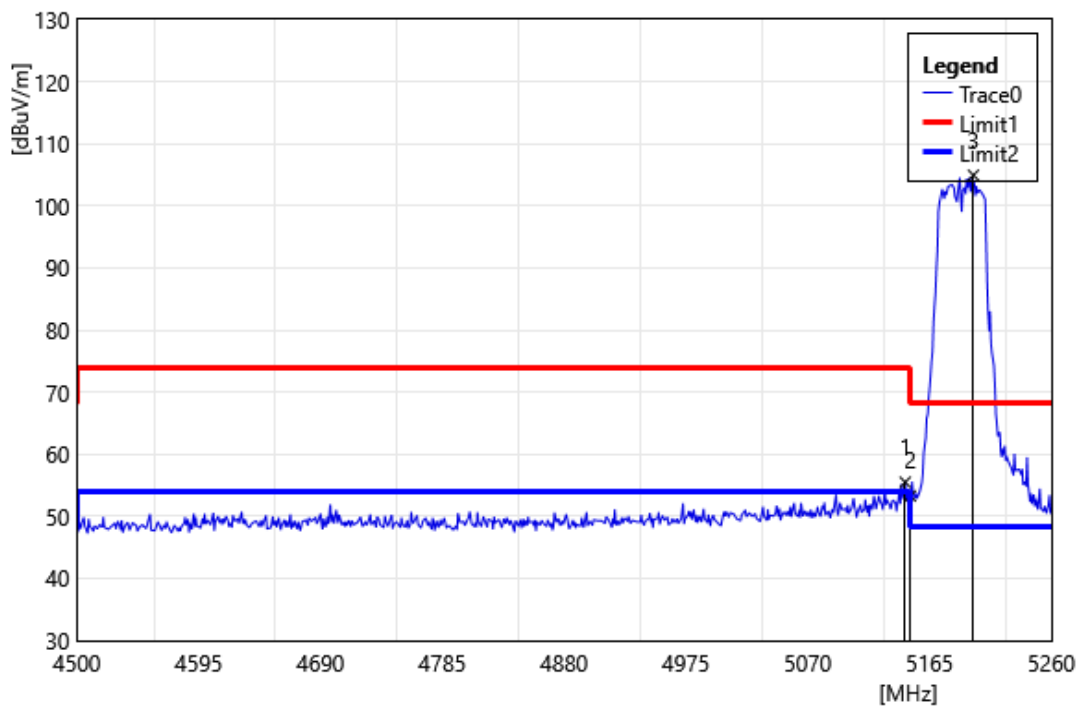


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	56.40	-0.90	55.50	74.00	-18.50	PEAK
2	5150.00	54.19	-0.91	53.29	74.00	-20.71	PEAK
3	5199.20	106.09	-1.15	104.94	68.20	36.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

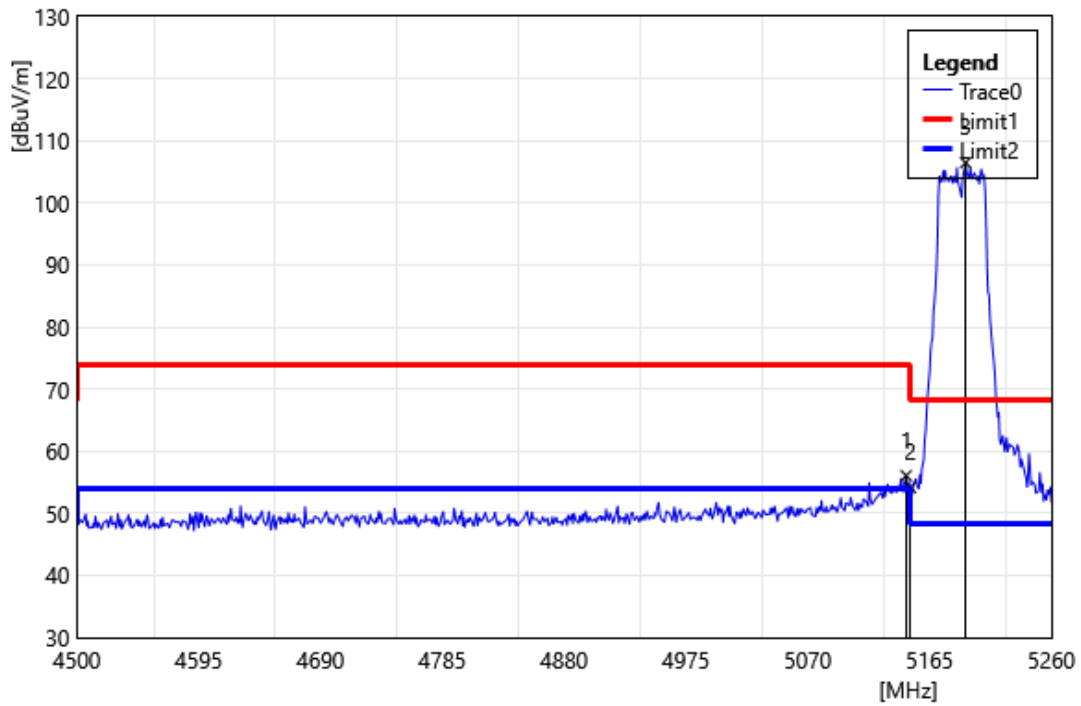


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	56.97	-0.90	56.07	74.00	-17.93	PEAK
2	5150.00	55.07	-0.91	54.17	74.00	-19.83	PEAK
3	5193.12	107.60	-1.12	106.48	68.20	38.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

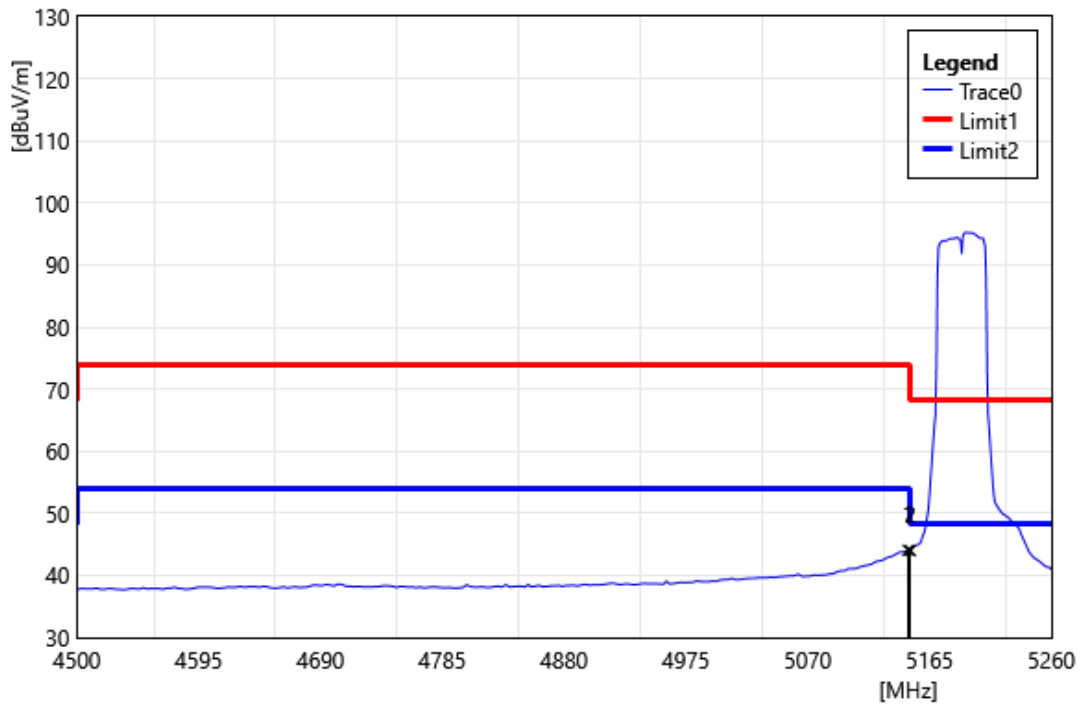


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	44.97	-0.91	44.06	54.00	-9.94	AVG
2	5150.00	44.92	-0.91	44.01	54.00	-9.99	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

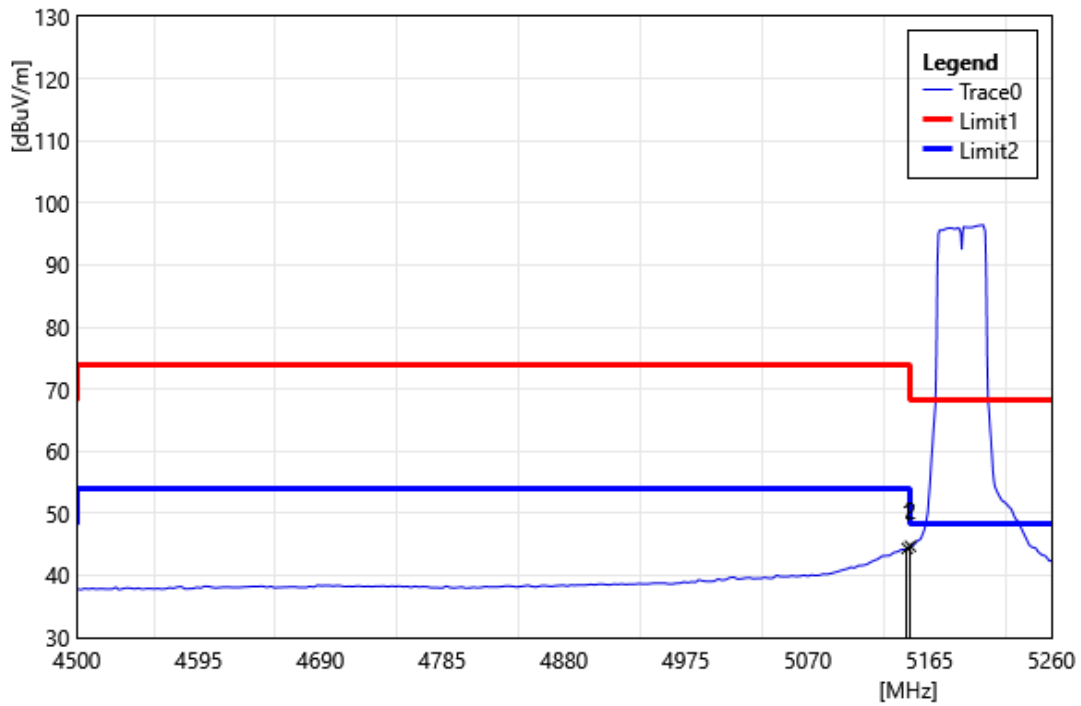


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	45.26	-0.91	44.35	54.00	-9.65	AVG
2	5150.00	45.61	-0.91	44.71	54.00	-9.29	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

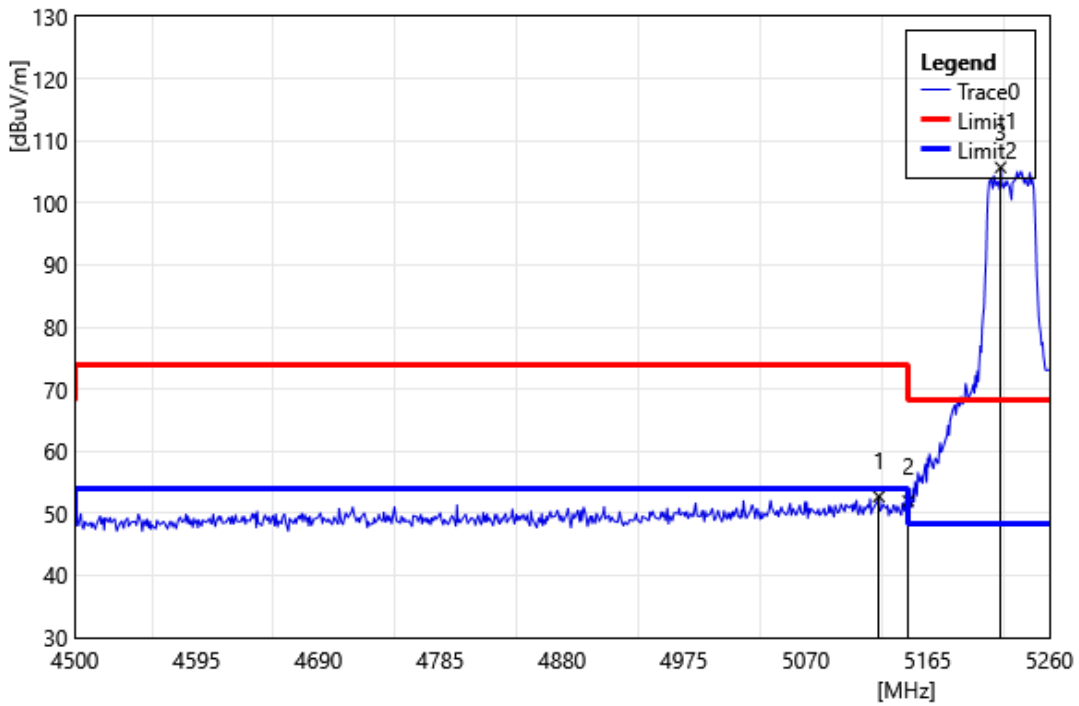


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5127.00	53.60	-0.89	52.71	74.00	-21.29	PEAK
2	5150.00	52.90	-0.91	51.99	74.00	-22.01	PEAK
3	5222.00	107.02	-1.31	105.71	68.20	37.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

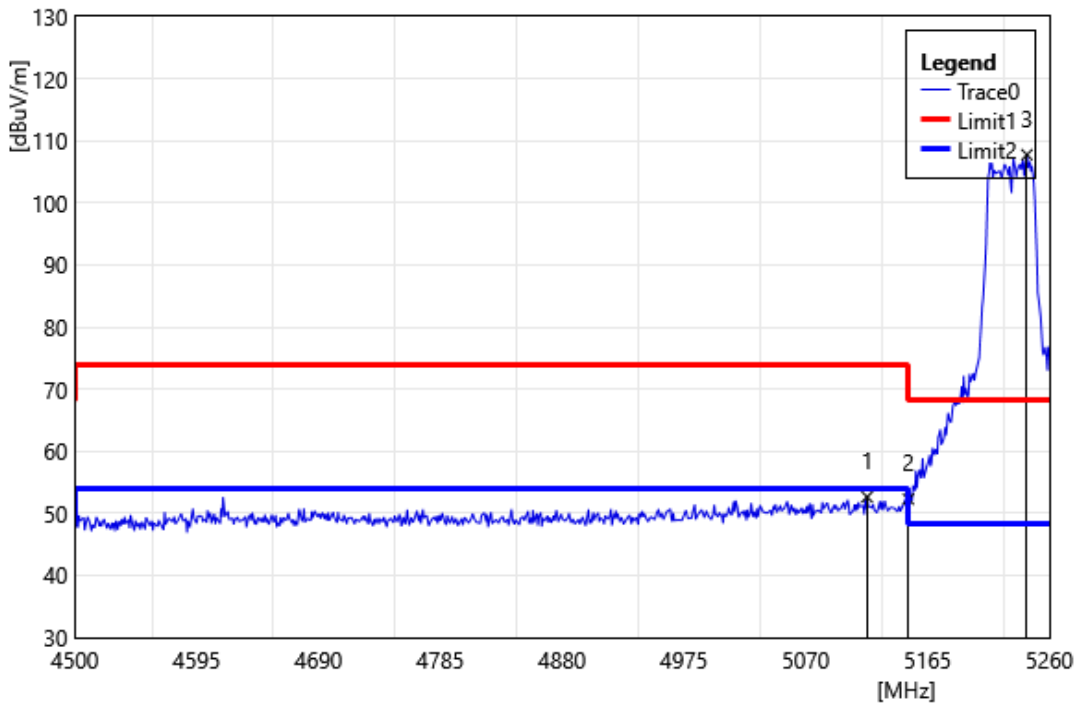


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5117.88	53.52	-0.88	52.64	74.00	-21.36	PEAK
2	5150.00	53.20	-0.91	52.29	74.00	-21.71	PEAK
3	5242.52	109.21	-1.45	107.76	68.20	39.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

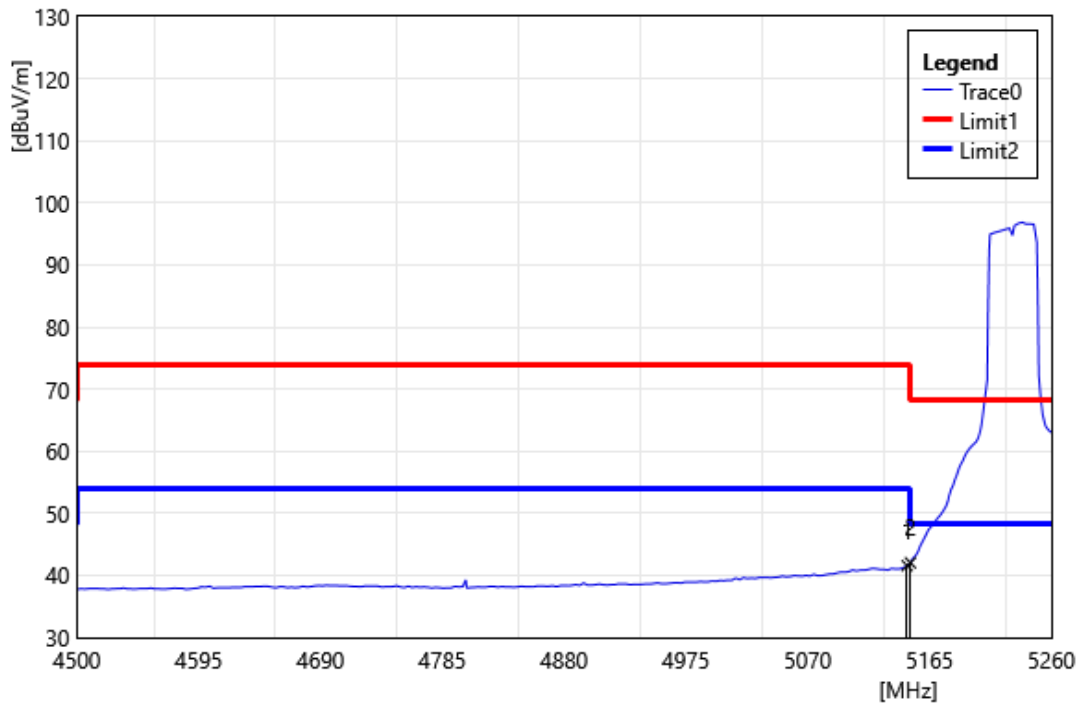


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	42.47	-0.91	41.56	54.00	-12.44	AVG
2	5150.00	42.95	-0.91	42.04	54.00	-11.96	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

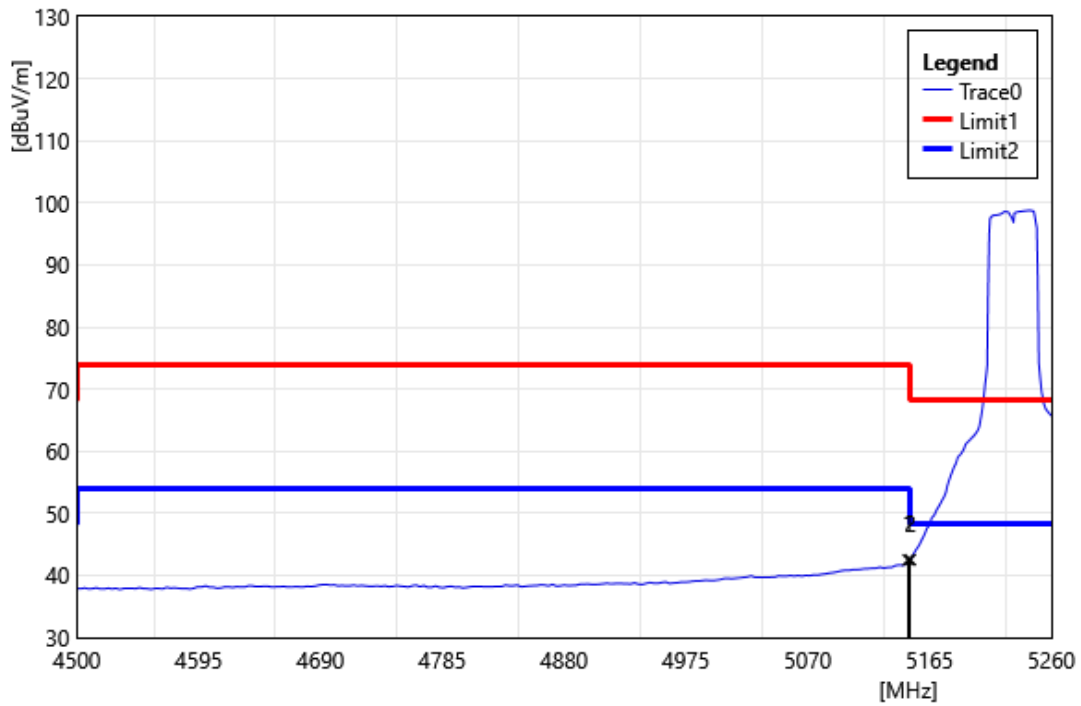


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	43.40	-0.91	42.49	54.00	-11.51	AVG
2	5150.00	43.44	-0.91	42.53	54.00	-11.47	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

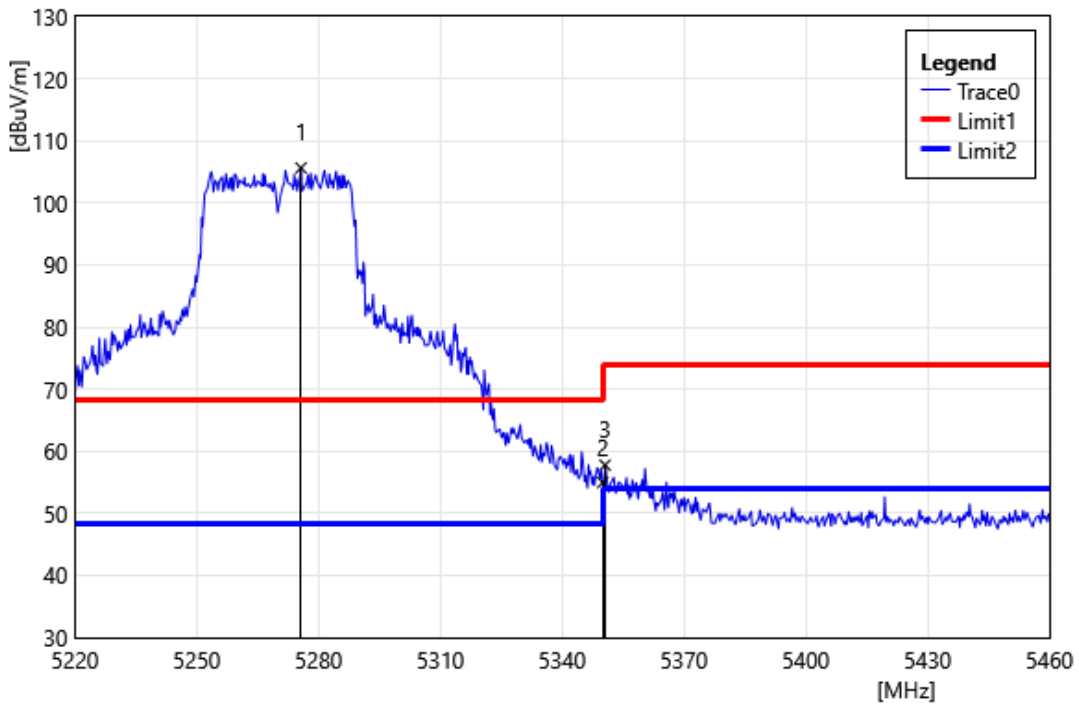


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5275.68	107.21	-1.58	105.63	68.20	37.43	PEAK
2	5350.00	56.25	-1.29	54.96	74.00	-19.04	PEAK
3	5350.56	59.07	-1.29	57.78	74.00	-16.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

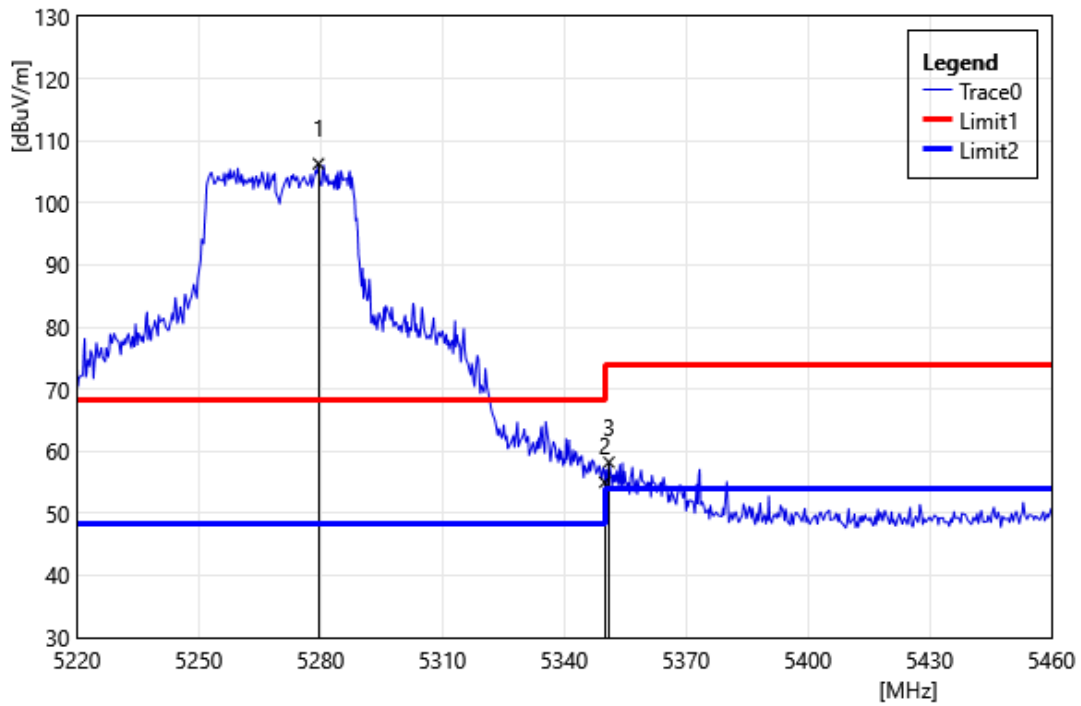


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5279.52	107.90	-1.59	106.31	68.20	38.11	PEAK
2	5350.00	56.30	-1.29	55.01	74.00	-18.99	PEAK
3	5351.04	59.51	-1.28	58.23	74.00	-15.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

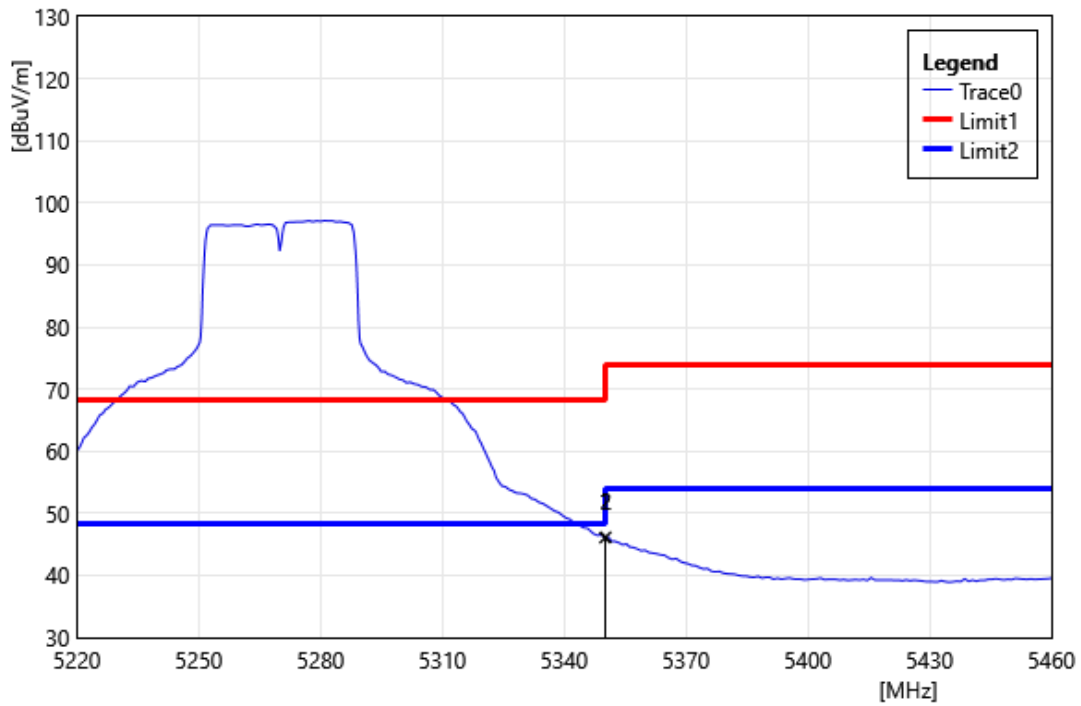


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	47.37	-1.29	46.08	54.00	-7.92	AVG
2	5350.32	47.45	-1.29	46.16	54.00	-7.84	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

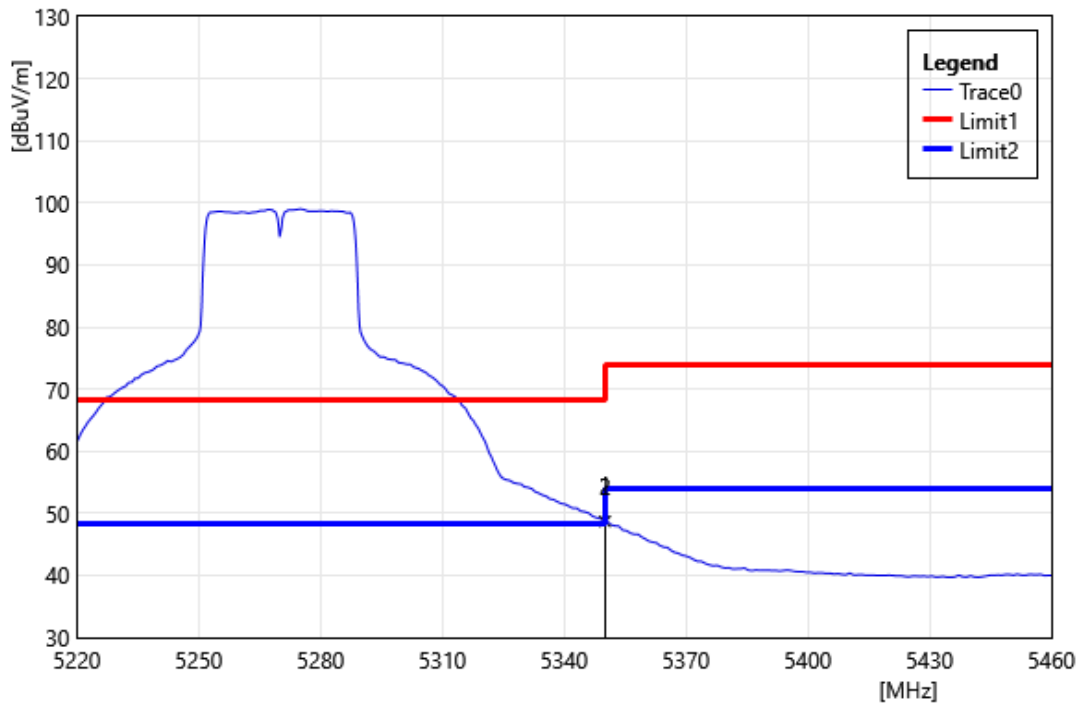


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	50.04	-1.29	48.75	54.00	-5.25	AVG
2	5350.08	50.00	-1.29	48.71	54.00	-5.29	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

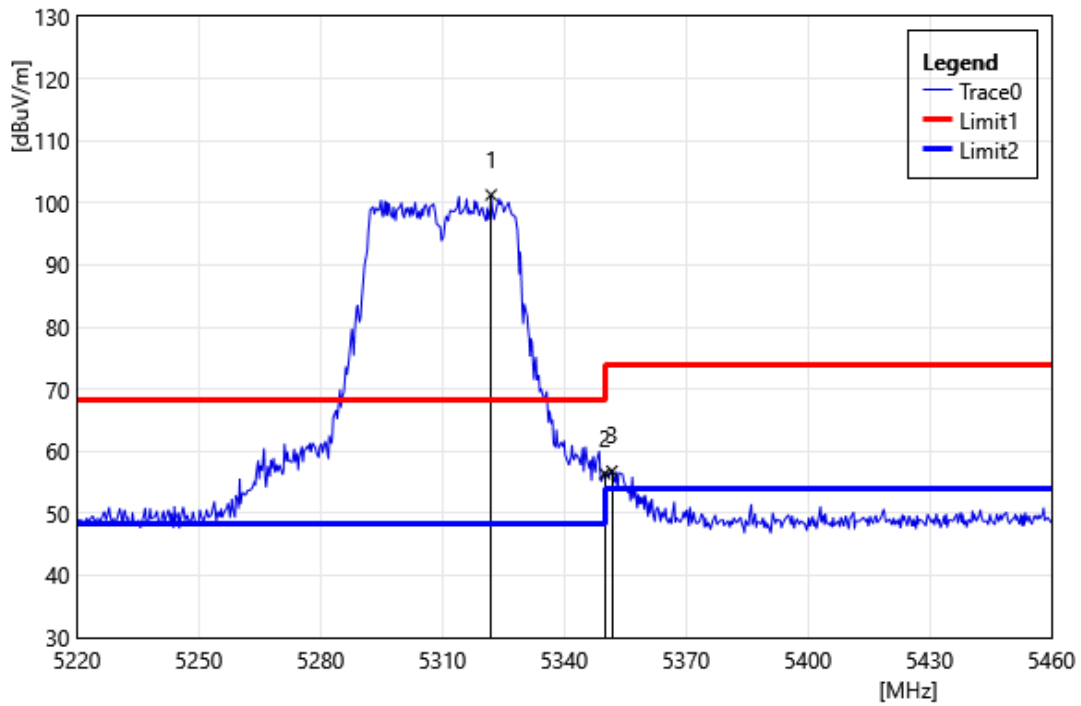


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5322.00	102.77	-1.49	101.28	68.20	33.08	PEAK
2	5350.00	57.68	-1.29	56.39	74.00	-17.61	PEAK
3	5351.76	58.08	-1.28	56.80	74.00	-17.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

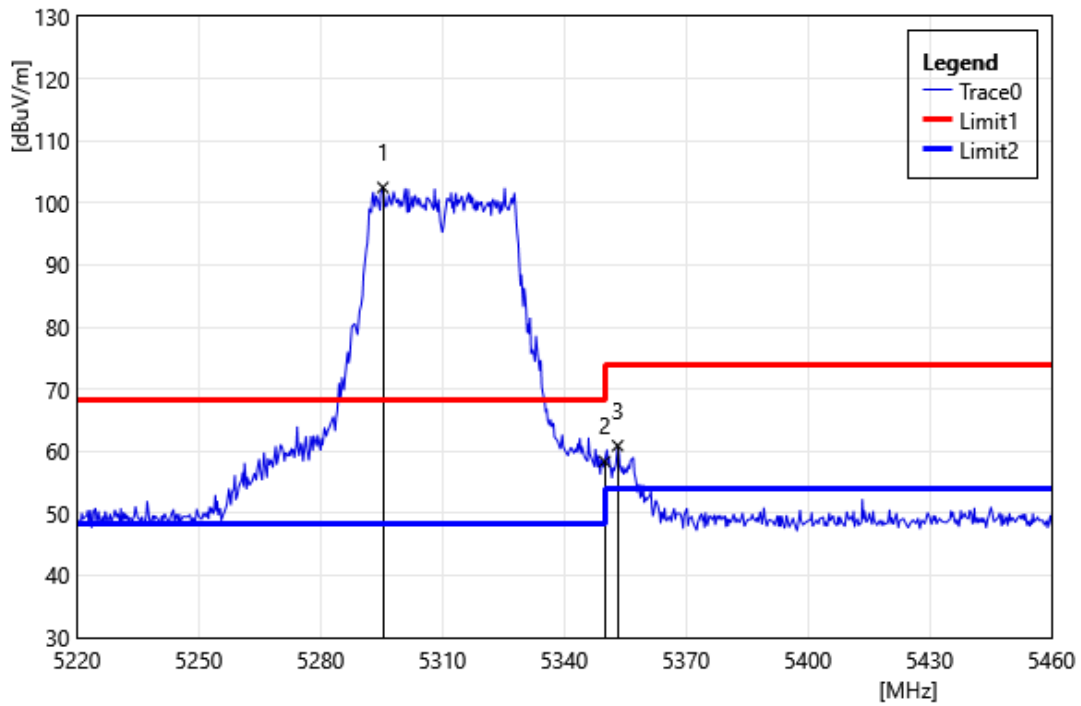


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5295.36	104.12	-1.63	102.49	68.20	34.29	PEAK
2	5350.00	59.65	-1.29	58.36	74.00	-15.64	PEAK
3	5353.20	62.16	-1.27	60.89	74.00	-13.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

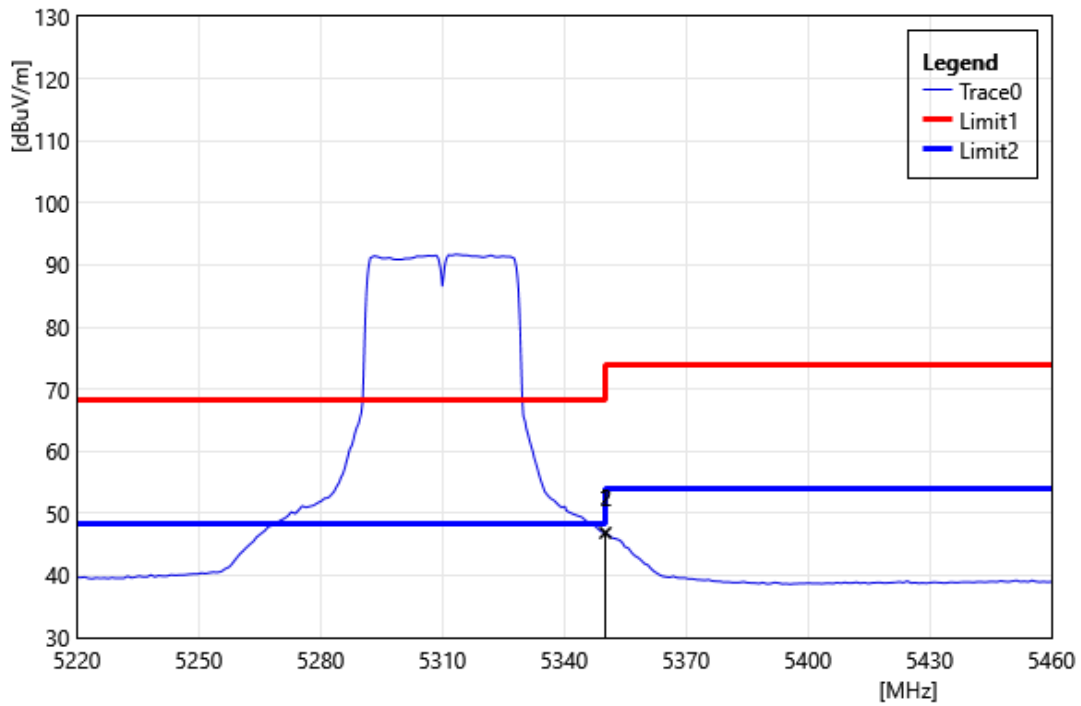


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	48.13	-1.29	46.84	54.00	-7.16	AVG
2	5350.32	48.16	-1.29	46.88	54.00	-7.13	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

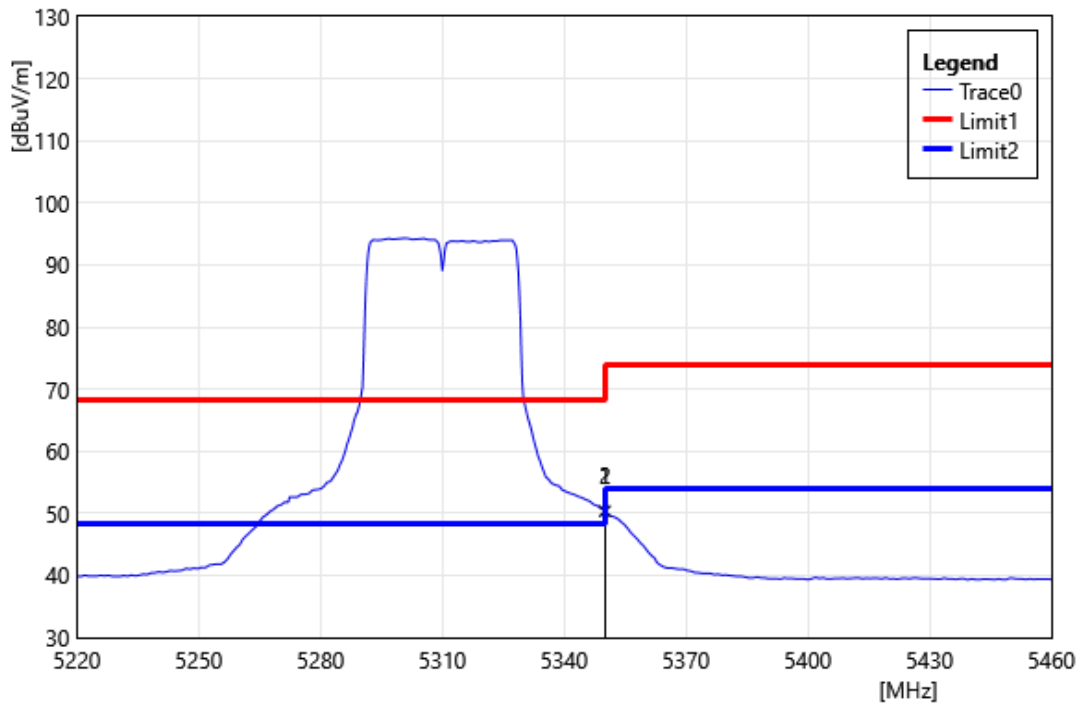


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	51.69	-1.29	50.40	54.00	-3.60	AVG
2	5350.08	51.61	-1.29	50.32	54.00	-3.68	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

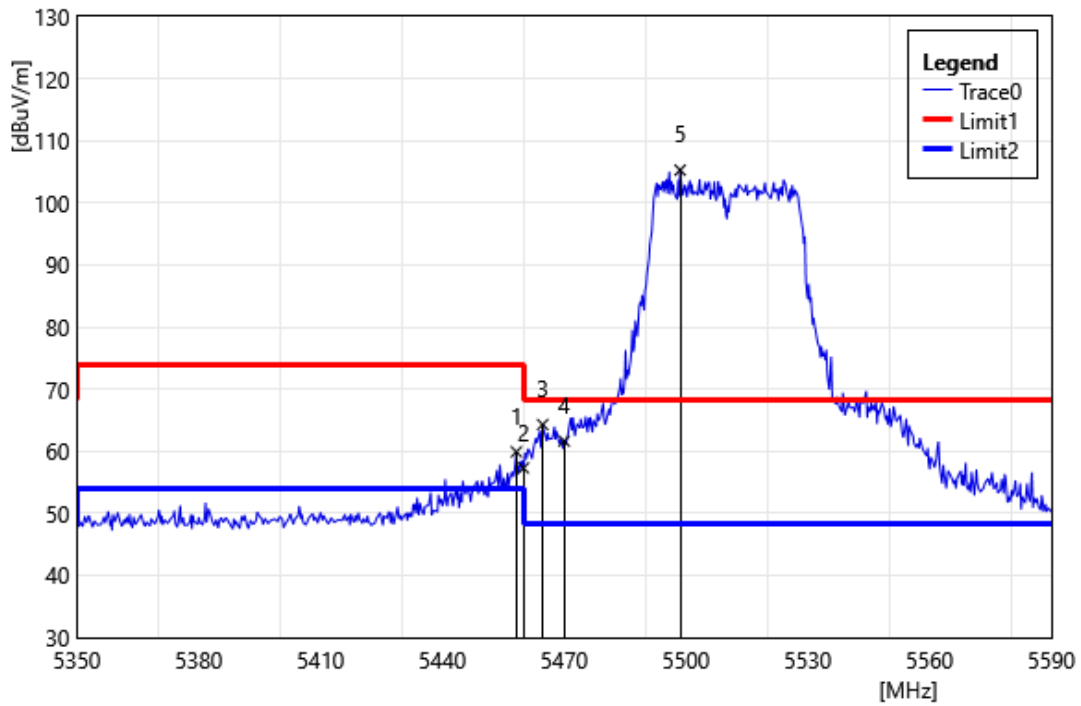


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	60.49	-0.58	59.91	74.00	-14.09	PEAK
2	5460.00	57.88	-0.57	57.31	74.00	-16.69	PEAK
3	5464.72	64.87	-0.57	64.30	68.20	-3.90	PEAK
4	5470.00	62.21	-0.56	61.65	68.20	-6.55	PEAK
5	5498.56	105.81	-0.53	105.28	68.20	37.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

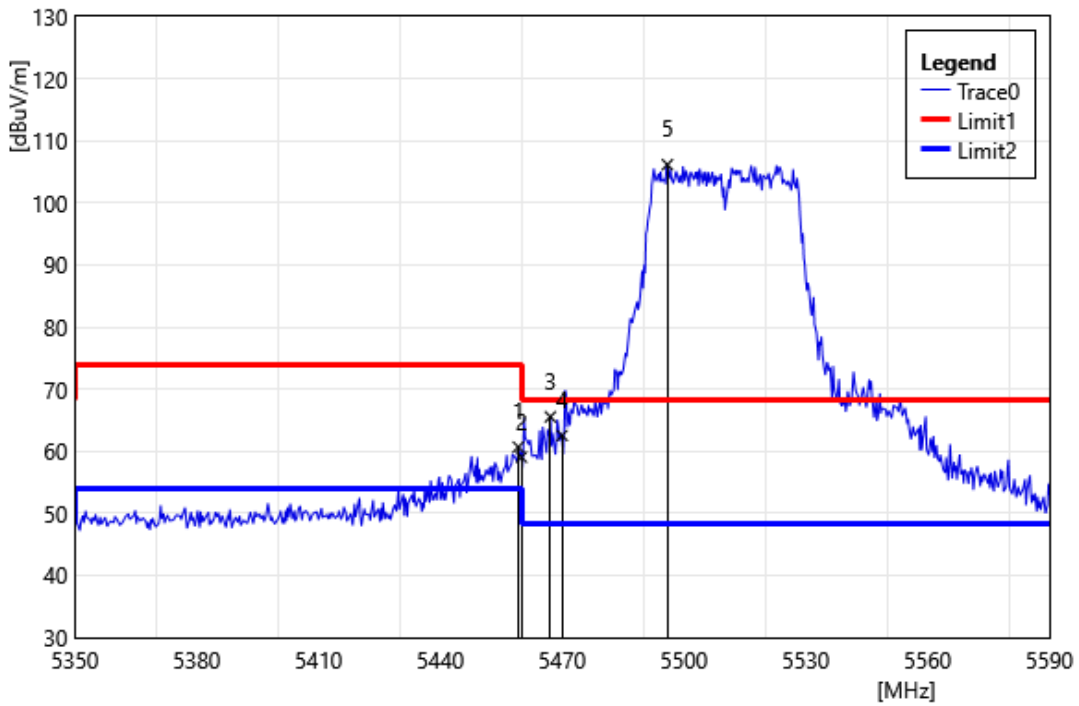


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	61.25	-0.57	60.68	74.00	-13.32	PEAK
2	5460.00	59.62	-0.57	59.05	74.00	-14.95	PEAK
3	5467.12	66.11	-0.57	65.54	68.20	-2.66	PEAK
4	5470.00	63.09	-0.56	62.53	68.20	-5.67	PEAK
5	5495.92	106.68	-0.53	106.15	68.20	37.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

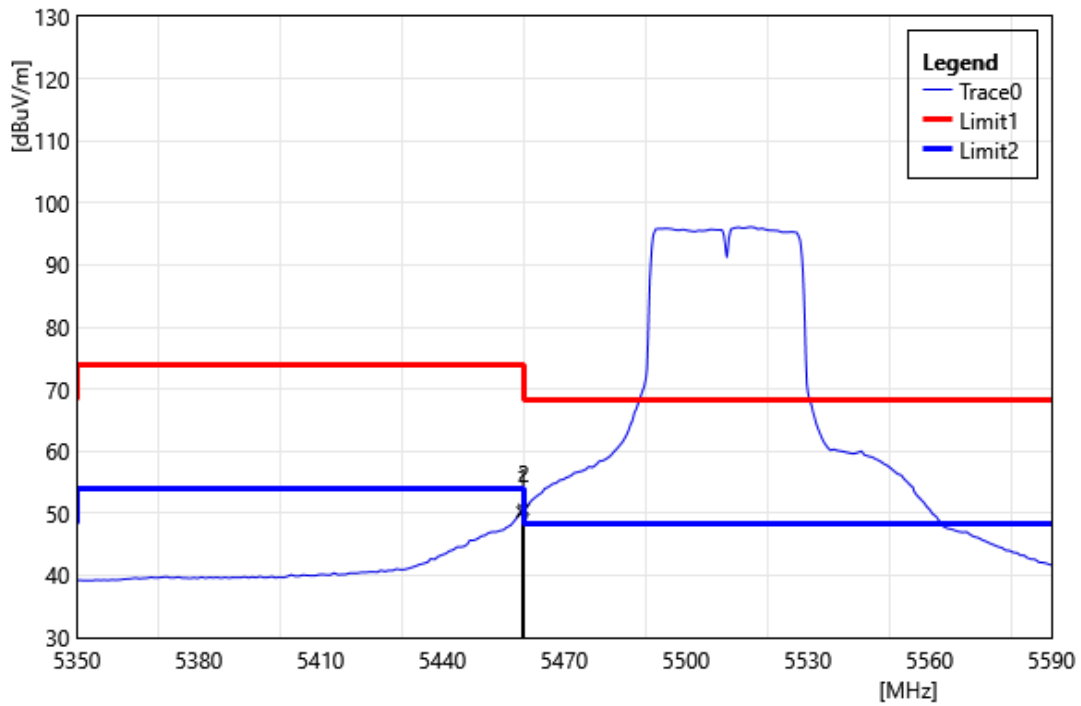


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.68	50.77	-0.57	50.20	54.00	-3.80	AVG
2	5460.00	51.21	-0.57	50.64	54.00	-3.36	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

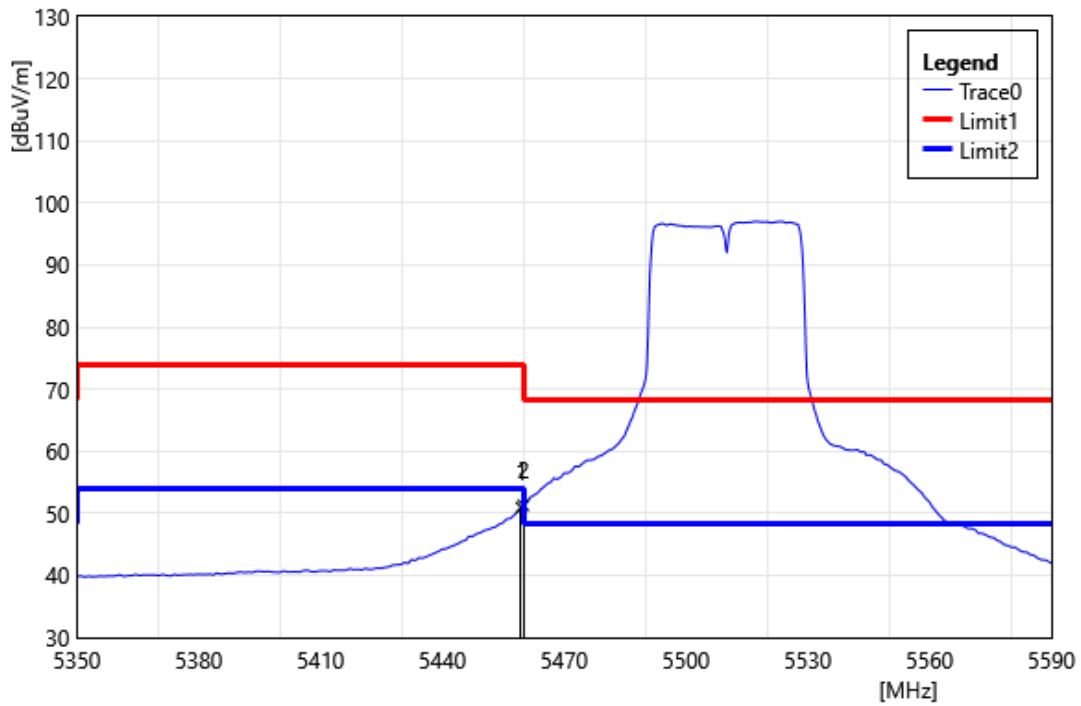


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.44	51.52	-0.57	50.95	54.00	-3.05	AVG
2	5460.00	51.87	-0.57	51.30	54.00	-2.70	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

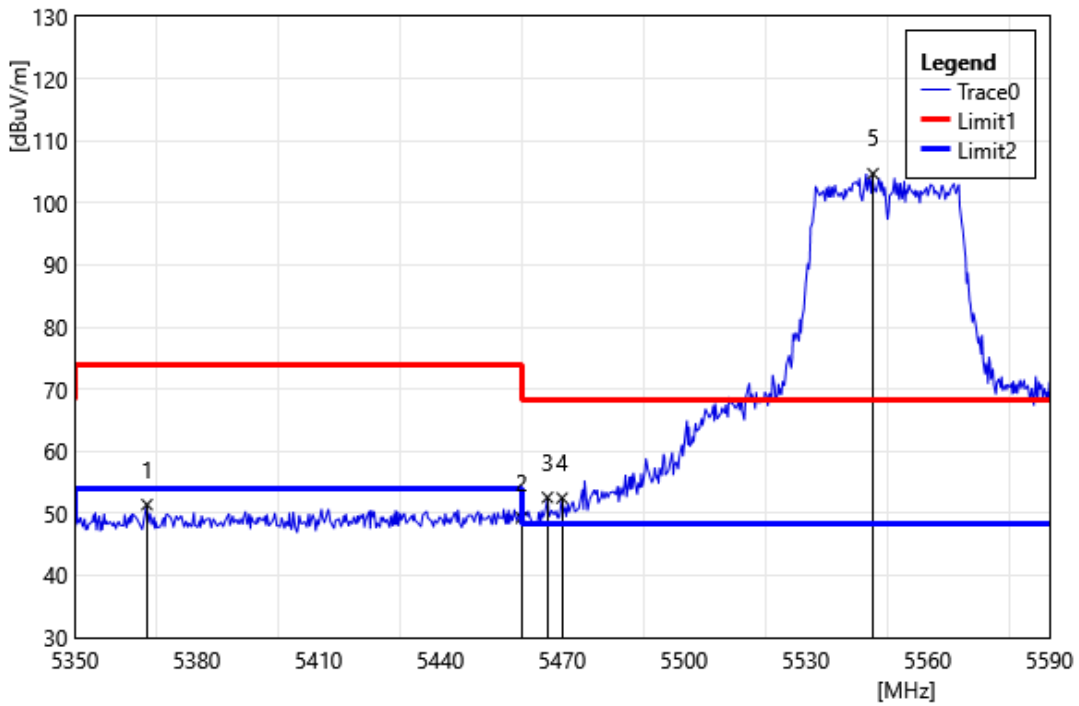


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5367.76	52.57	-1.17	51.40	74.00	-22.60	PEAK
2	5460.00	49.83	-0.57	49.26	74.00	-24.74	PEAK
3	5466.40	53.14	-0.57	52.58	68.20	-15.63	PEAK
4	5470.00	53.02	-0.56	52.46	68.20	-15.74	PEAK
5	5546.56	105.20	-0.50	104.71	68.20	36.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

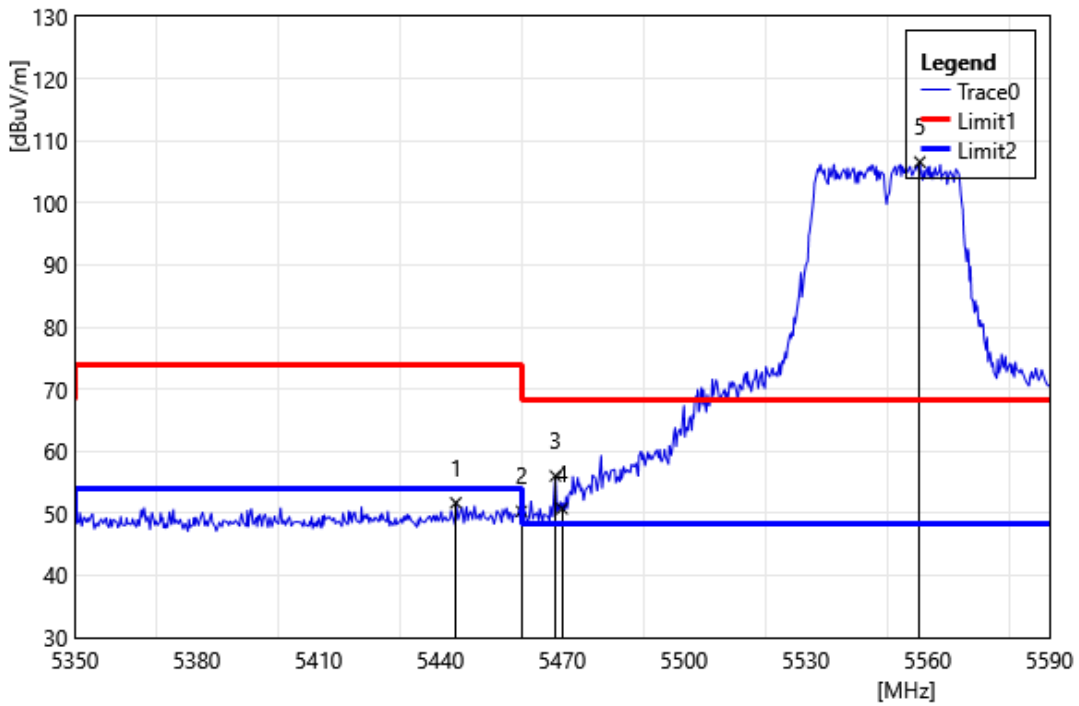


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5443.84	52.32	-0.63	51.69	74.00	-22.31	PEAK
2	5460.00	50.91	-0.57	50.34	74.00	-23.66	PEAK
3	5468.32	56.59	-0.56	56.03	68.20	-12.17	PEAK
4	5470.00	51.31	-0.56	50.75	68.20	-17.45	PEAK
5	5558.08	107.10	-0.51	106.59	68.20	38.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

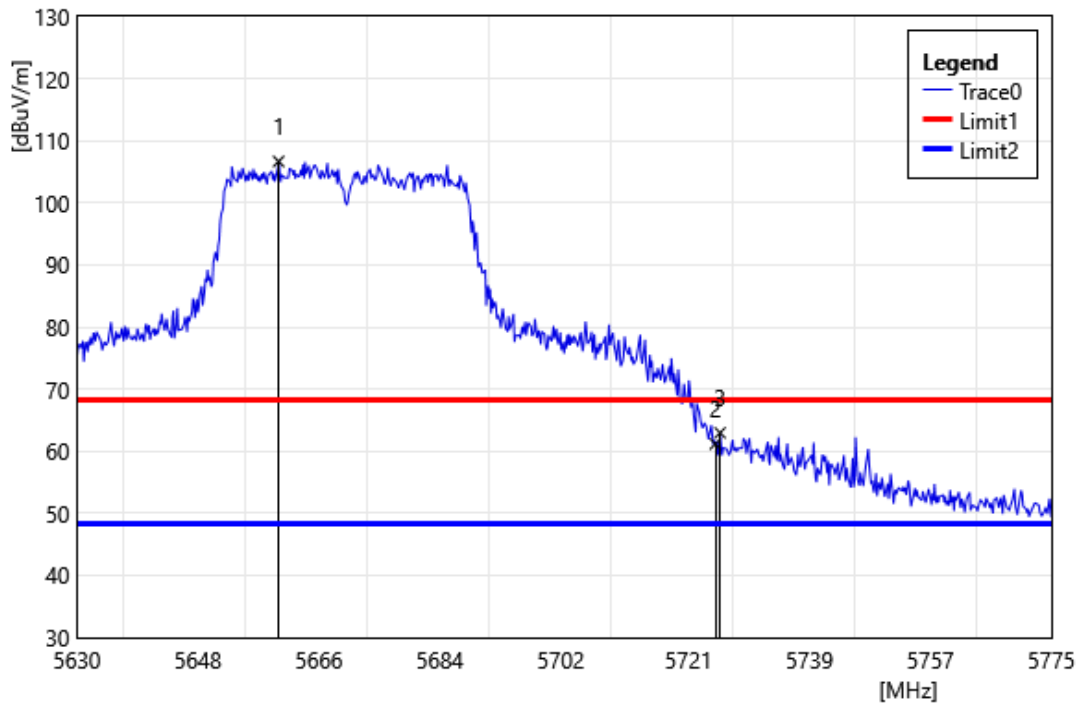


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5660.02	107.30	-0.63	106.68	68.20	38.48	PEAK
2	5725.00	61.51	-0.34	61.17	68.20	-7.03	PEAK
3	5725.70	63.31	-0.34	62.97	68.20	-5.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

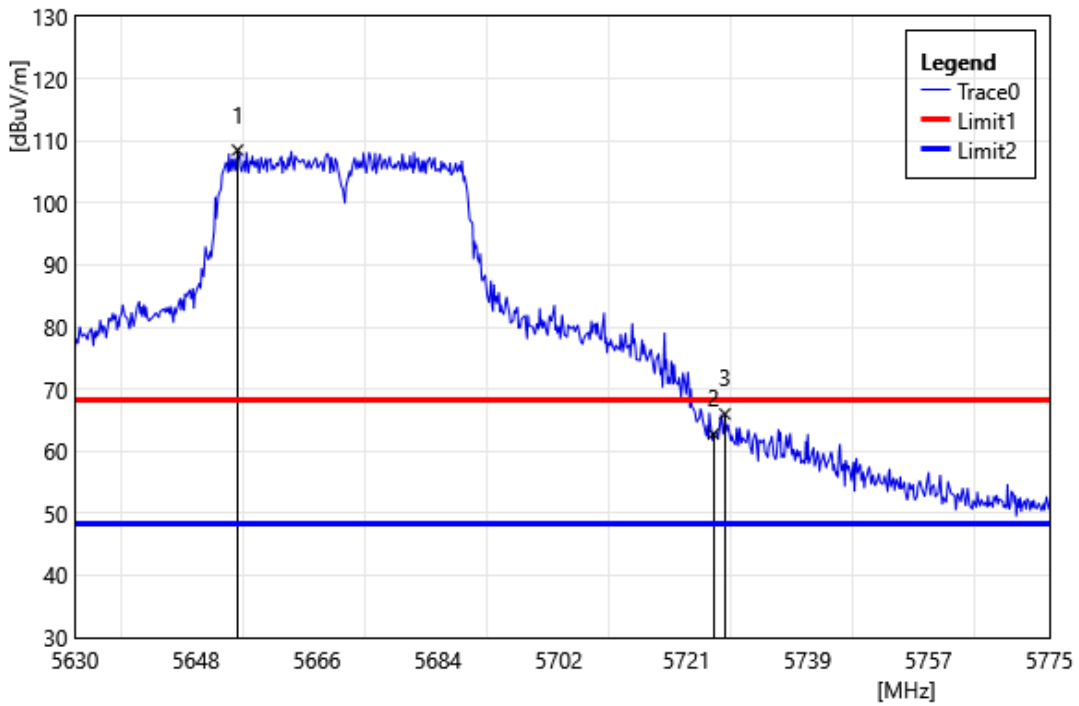


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5654.22	109.14	-0.64	108.50	68.20	40.30	PEAK
2	5725.00	63.10	-0.34	62.76	68.20	-5.44	PEAK
3	5726.72	66.34	-0.33	66.01	68.20	-2.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

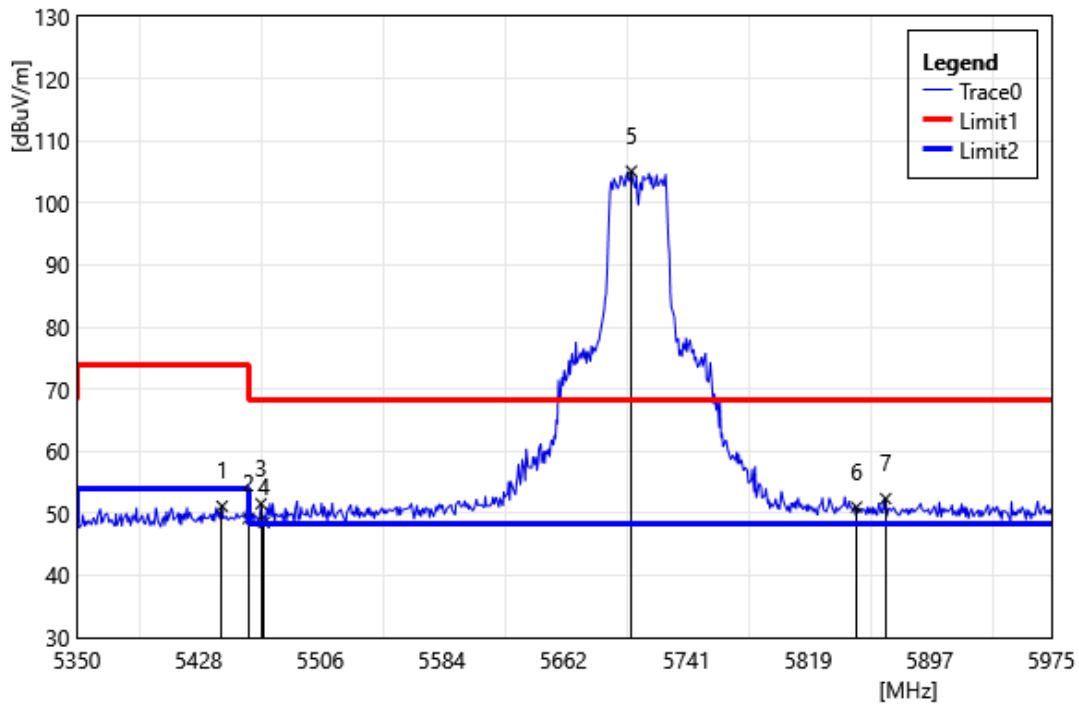


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5443.13	51.77	-0.63	51.14	74.00	-22.86	PEAK
2	5460.00	49.77	-0.57	49.20	74.00	-24.80	PEAK
3	5468.13	52.11	-0.56	51.55	68.20	-16.65	PEAK
4	5470.00	49.08	-0.56	48.52	68.20	-19.68	PEAK
5	5705.63	105.66	-0.55	105.11	68.20	36.91	PEAK
6	5850.00	50.73	0.28	51.01	68.20	-17.19	PEAK
7	5868.75	52.04	0.33	52.37	68.20	-15.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

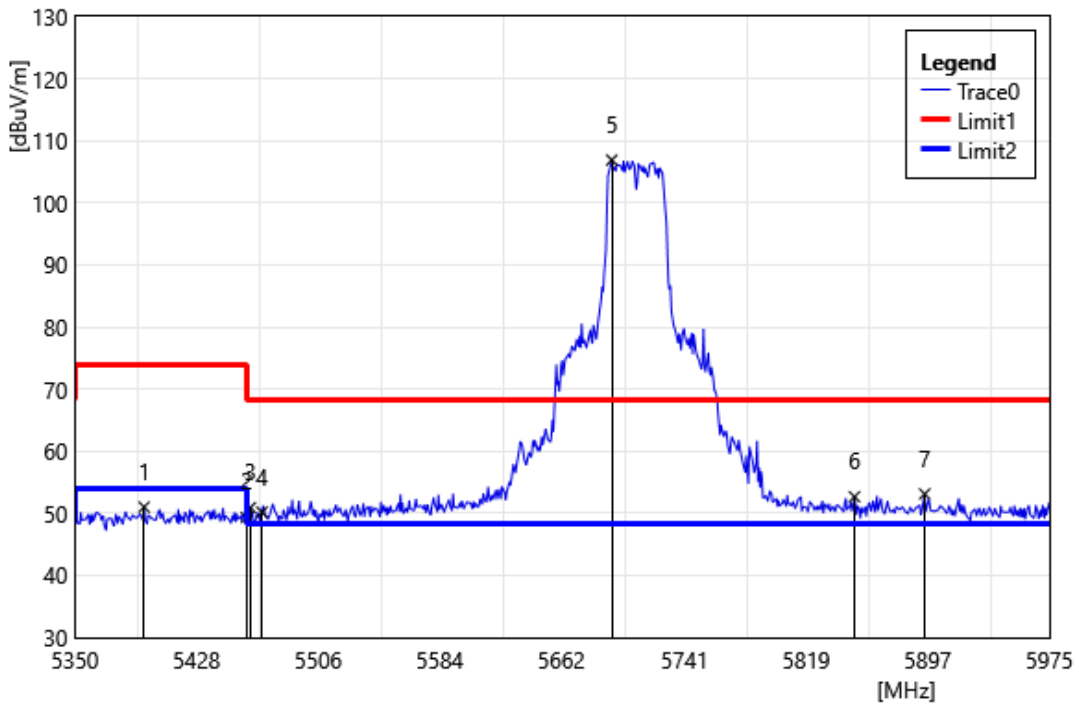


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5394.38	52.00	-0.98	51.02	74.00	-22.99	PEAK
2	5460.00	49.90	-0.57	49.33	74.00	-24.67	PEAK
3	5462.50	51.50	-0.57	50.93	68.20	-17.28	PEAK
4	5470.00	50.76	-0.56	50.20	68.20	-18.00	PEAK
5	5694.38	107.51	-0.61	106.90	68.20	38.70	PEAK
6	5850.00	52.41	0.28	52.69	68.20	-15.51	PEAK
7	5895.00	52.74	0.40	53.14	68.20	-15.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

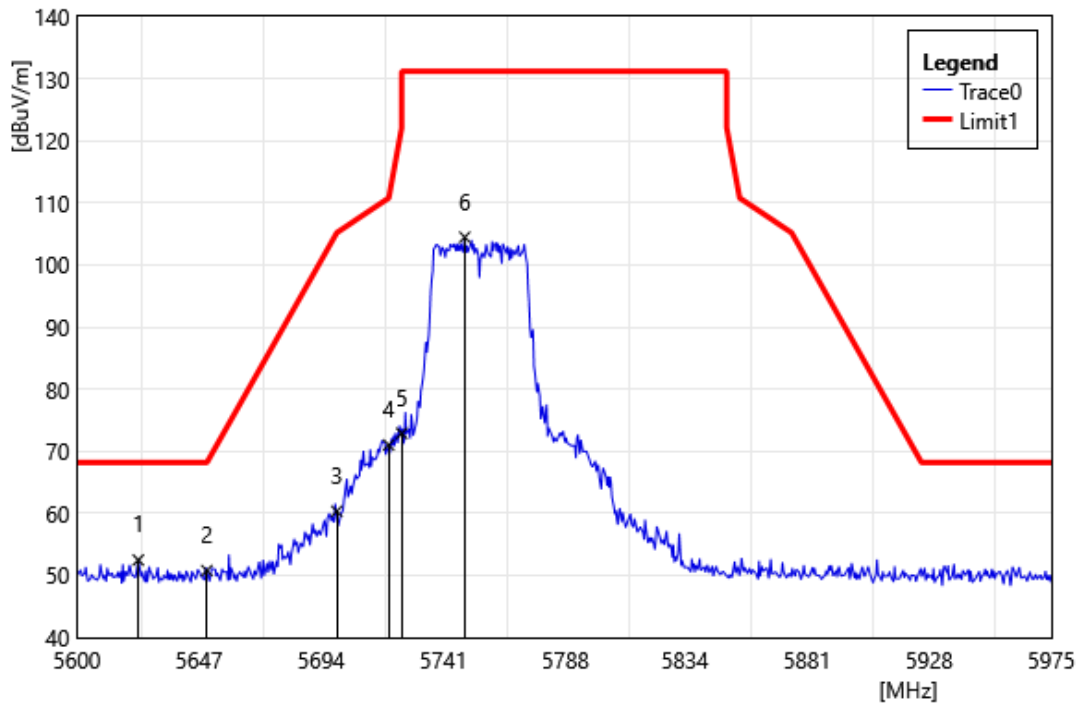


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5623.63	53.08	-0.60	52.48	68.20	-15.72	PEAK
2	5650.00	51.44	-0.64	50.80	68.20	-17.40	PEAK
3	5700.00	60.95	-0.61	60.34	105.20	-44.86	PEAK
4	5720.00	71.41	-0.40	71.01	110.80	-39.79	PEAK
5	5725.00	73.22	-0.34	72.88	122.20	-49.32	PEAK
6	5749.25	104.56	-0.09	104.47	131.20	-26.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

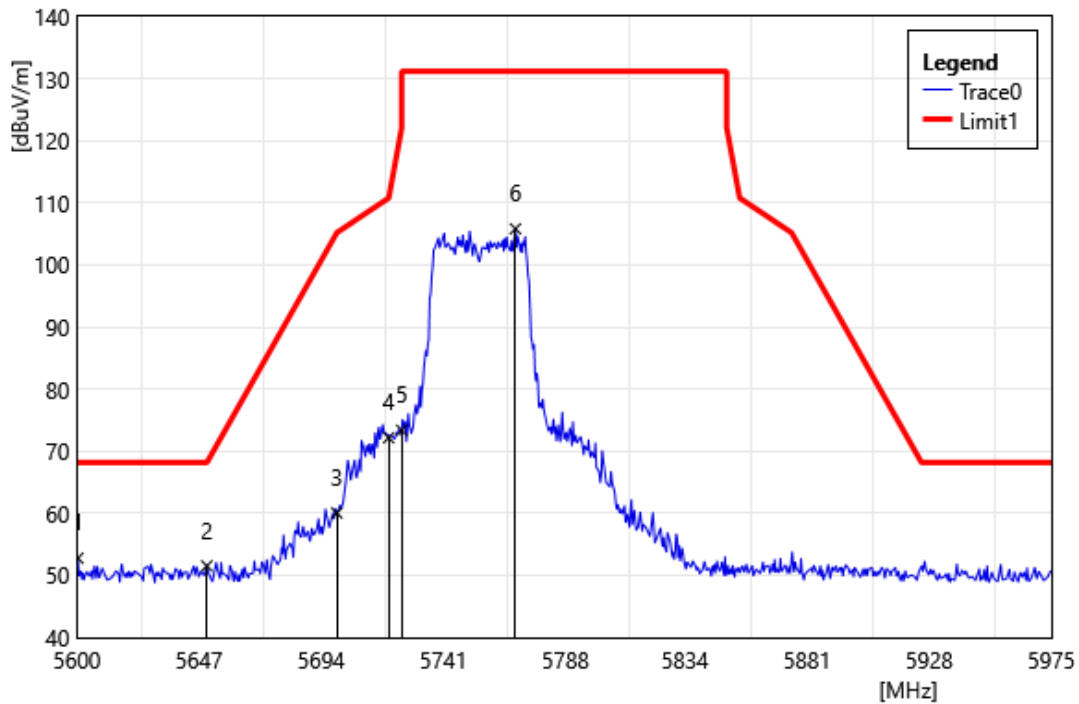


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5600.38	53.34	-0.57	52.77	68.20	-15.43	PEAK
2	5650.00	52.19	-0.64	51.55	68.20	-16.65	PEAK
3	5700.00	60.68	-0.61	60.07	105.20	-45.13	PEAK
4	5720.00	72.58	-0.40	72.18	110.80	-38.62	PEAK
5	5725.00	73.73	-0.34	73.39	122.20	-48.81	PEAK
6	5768.75	105.81	0.01	105.82	131.20	-25.38	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

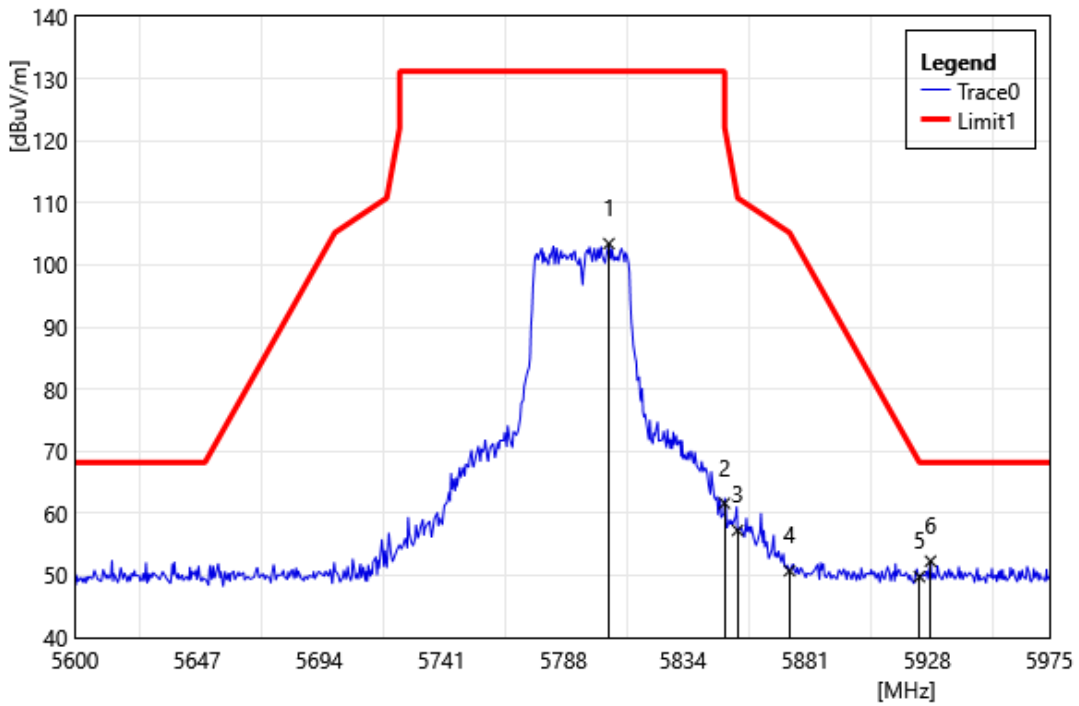


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5805.50	103.28	0.16	103.44	131.20	-27.76	PEAK
2	5850.00	61.35	0.28	61.63	122.20	-60.57	PEAK
3	5855.00	56.97	0.29	57.26	110.80	-53.54	PEAK
4	5875.00	50.40	0.34	50.74	105.20	-54.46	PEAK
5	5925.00	49.52	0.28	49.81	68.20	-18.40	PEAK
6	5929.25	52.05	0.25	52.30	68.20	-15.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

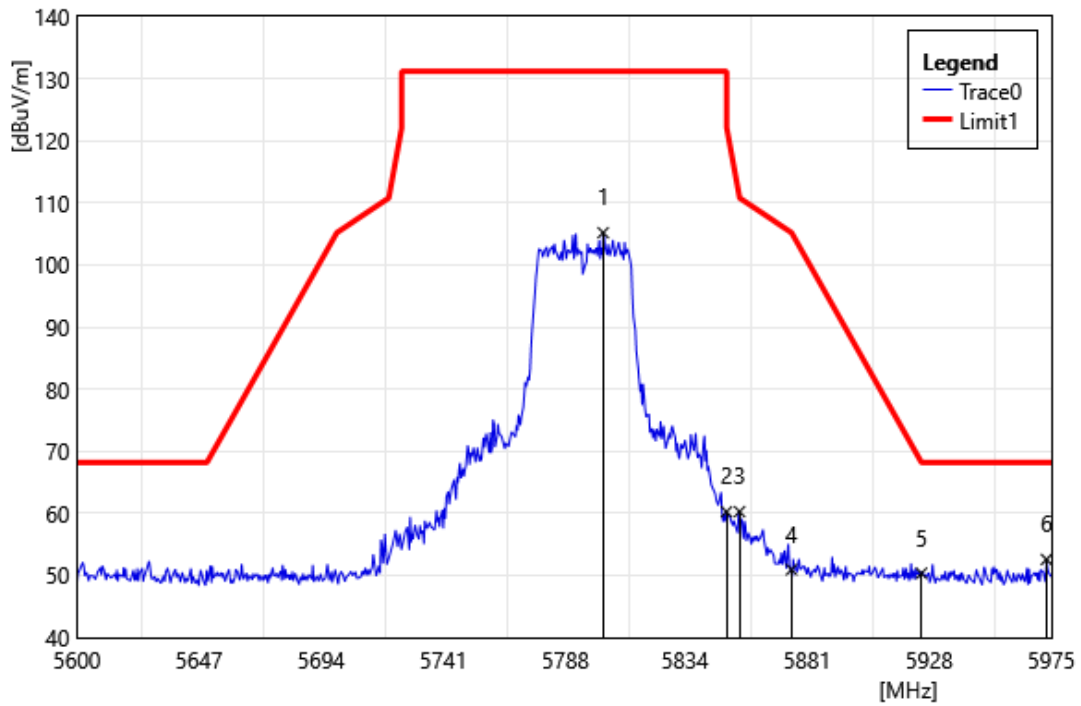


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5802.50	105.03	0.16	105.19	131.20	-26.01	PEAK
2	5850.00	59.97	0.28	60.25	122.20	-61.95	PEAK
3	5855.00	59.98	0.29	60.27	110.80	-50.53	PEAK
4	5875.00	50.60	0.34	50.94	105.20	-54.26	PEAK
5	5925.00	50.07	0.28	50.35	68.20	-17.85	PEAK
6	5973.13	52.38	0.20	52.58	68.20	-15.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

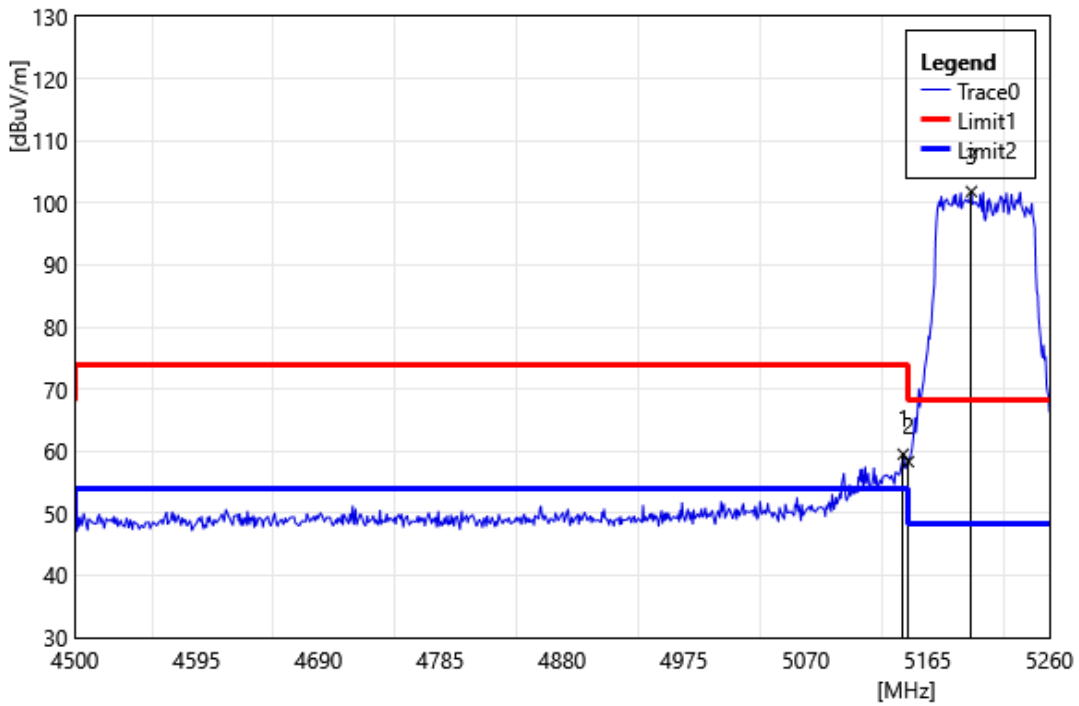


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	60.42	-0.90	59.53	74.00	-14.48	PEAK
2	5150.00	59.22	-0.91	58.31	74.00	-15.69	PEAK
3	5199.20	102.99	-1.15	101.84	68.20	33.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

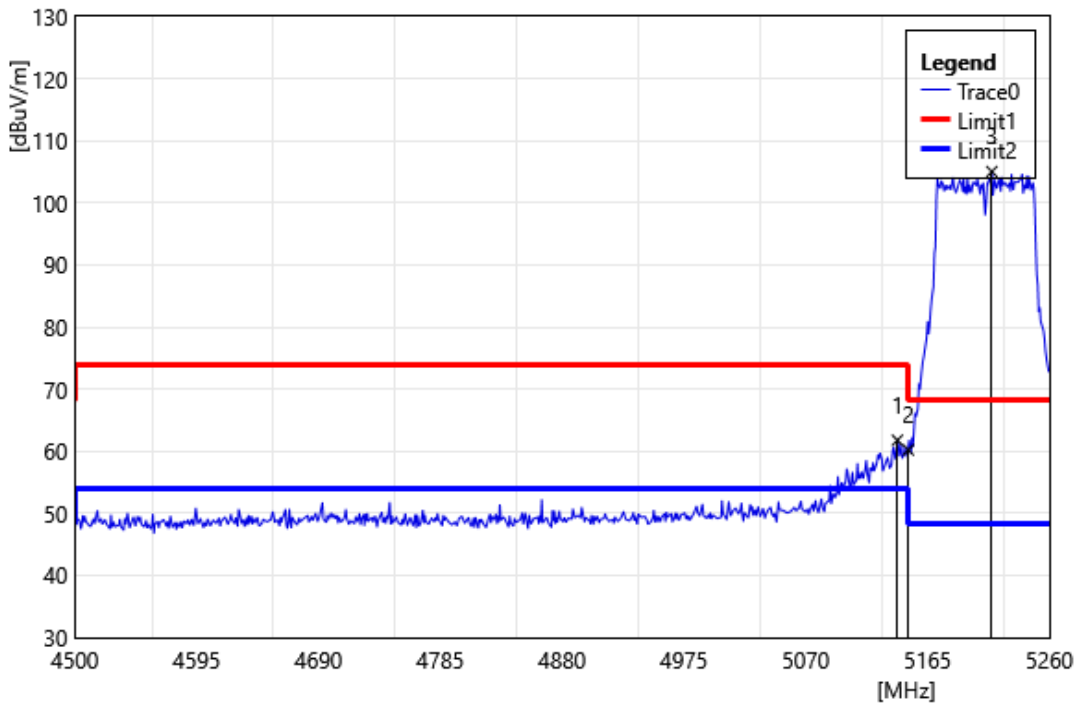


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5141.44	62.68	-0.90	61.78	74.00	-12.22	PEAK
2	5150.00	61.12	-0.91	60.21	74.00	-13.79	PEAK
3	5215.16	106.31	-1.26	105.05	68.20	36.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

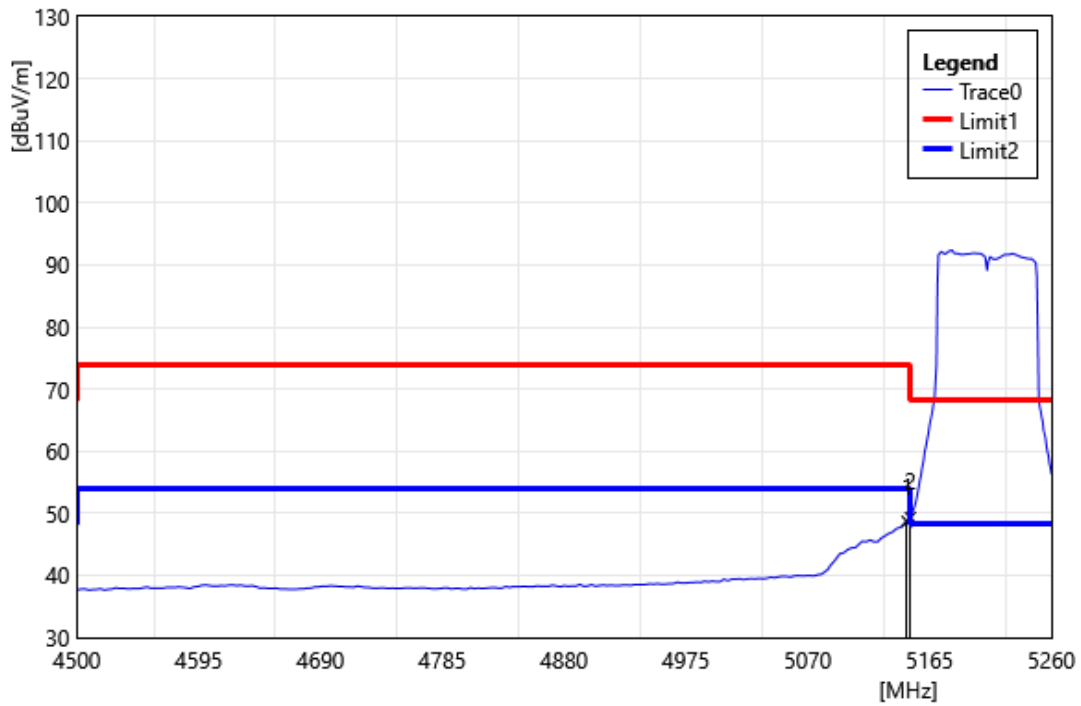


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	49.61	-0.91	48.70	54.00	-5.30	AVG
2	5150.00	50.24	-0.91	49.33	54.00	-4.67	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

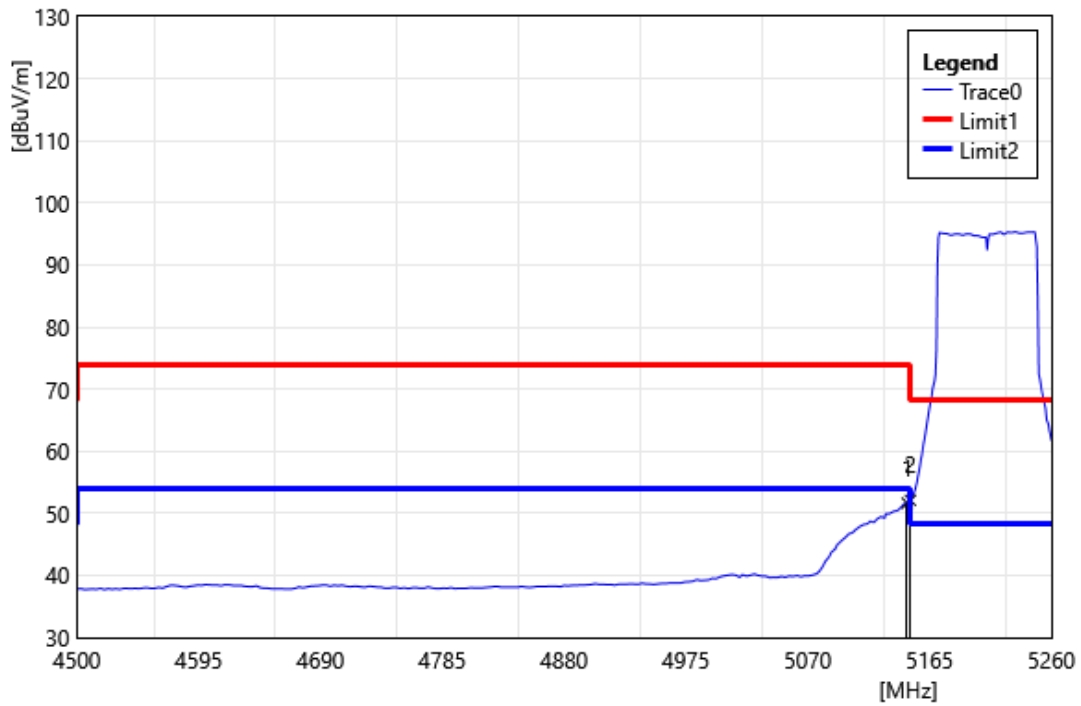


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	52.55	-0.91	51.64	54.00	-2.36	AVG
2	5150.00	53.01	-0.91	52.10	54.00	-1.90	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

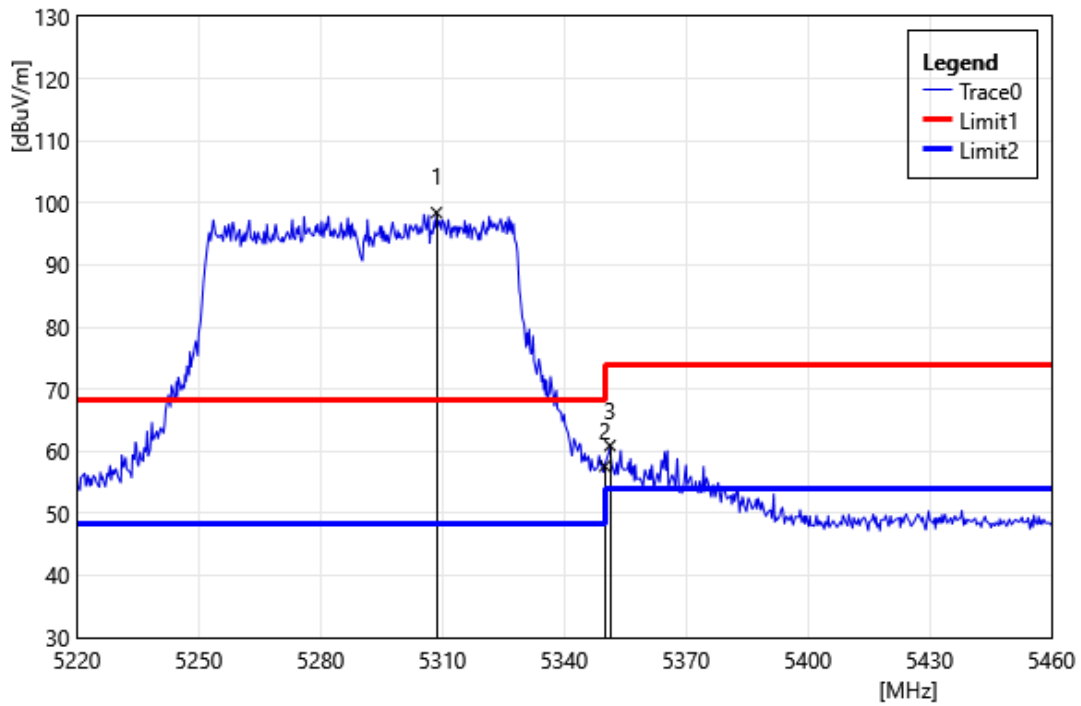


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5308.56	100.02	-1.59	98.43	68.20	30.23	PEAK
2	5350.00	58.90	-1.29	57.60	74.00	-16.40	PEAK
3	5351.28	62.19	-1.28	60.91	74.00	-13.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

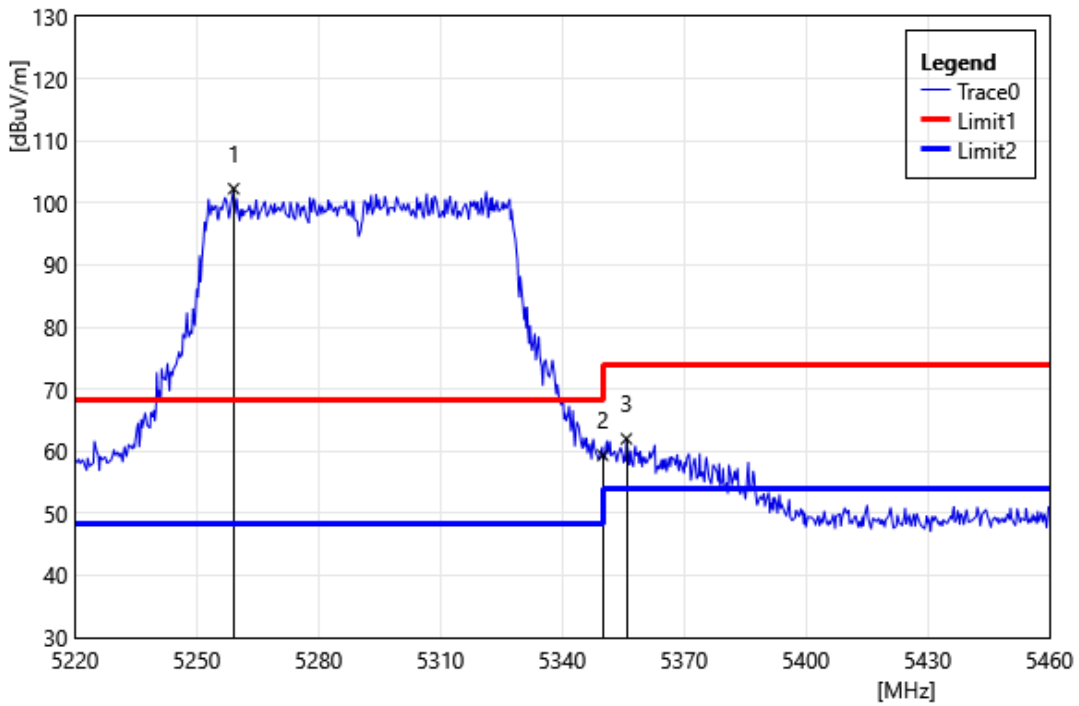


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5259.12	103.80	-1.53	102.27	68.20	34.07	PEAK
2	5350.00	60.65	-1.29	59.36	74.00	-14.64	PEAK
3	5355.84	63.25	-1.25	62.00	74.00	-12.00	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

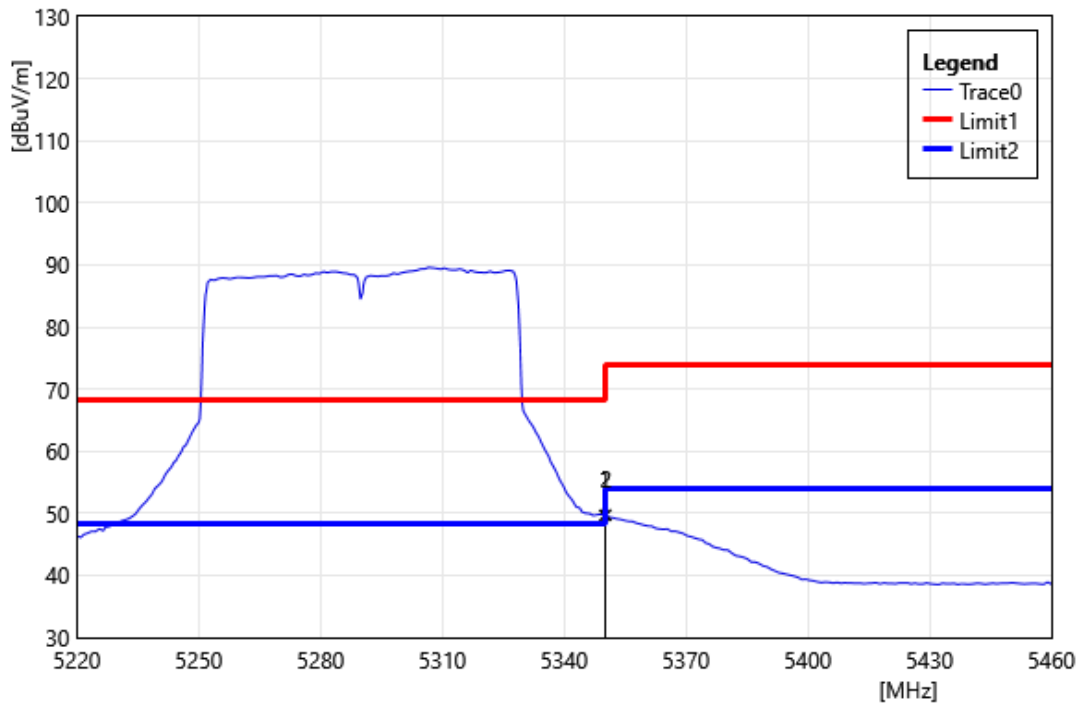


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	50.96	-1.29	49.66	54.00	-4.34	AVG
2	5350.32	51.02	-1.29	49.73	54.00	-4.27	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

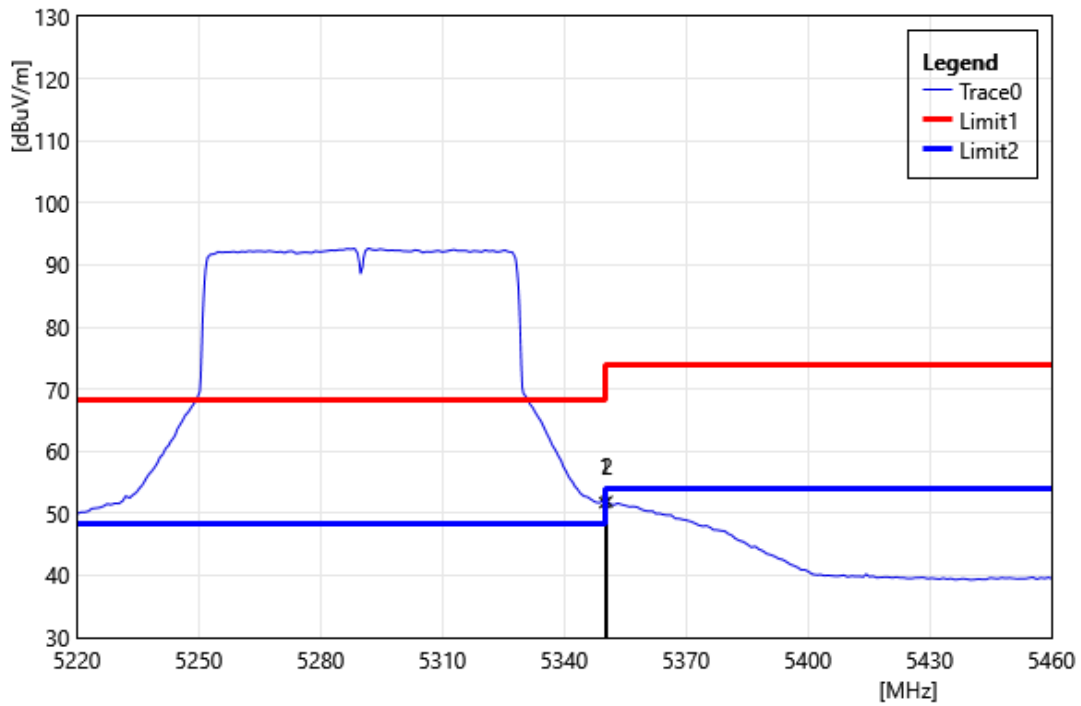


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.02	-1.29	51.73	54.00	-2.27	AVG
2	5350.56	53.19	-1.29	51.90	54.00	-2.10	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

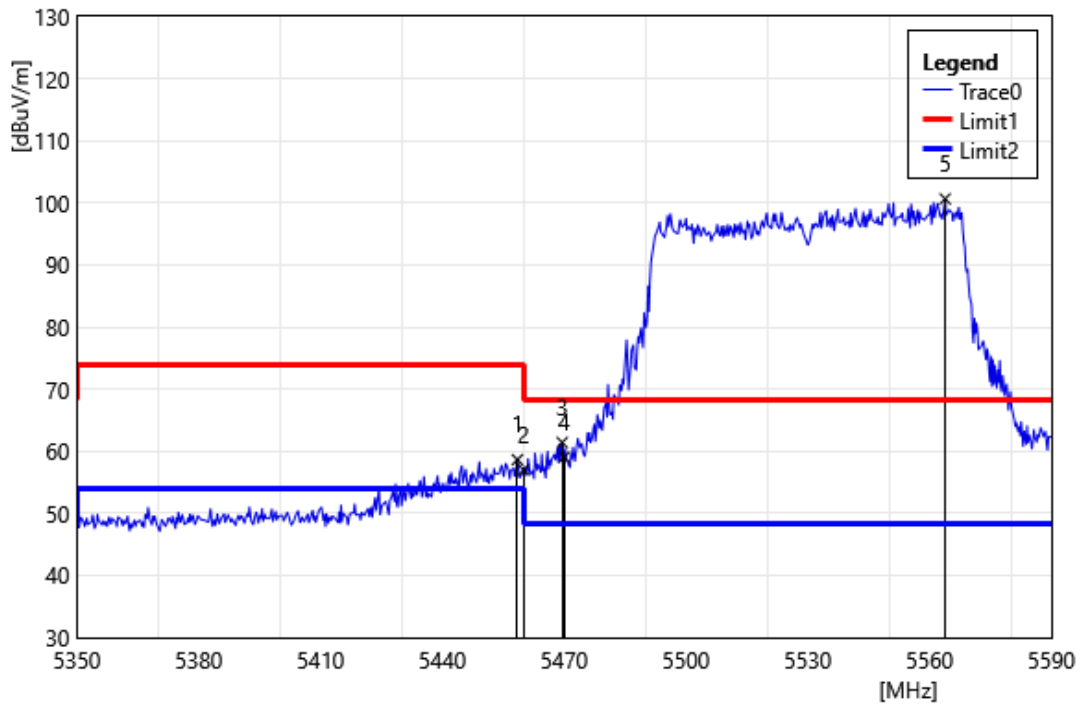


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.48	59.22	-0.57	58.65	74.00	-15.36	PEAK
2	5460.00	57.57	-0.57	57.00	74.00	-17.00	PEAK
3	5469.52	61.98	-0.56	61.42	68.20	-6.79	PEAK
4	5470.00	59.61	-0.56	59.05	68.20	-9.15	PEAK
5	5563.84	101.16	-0.52	100.64	68.20	32.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

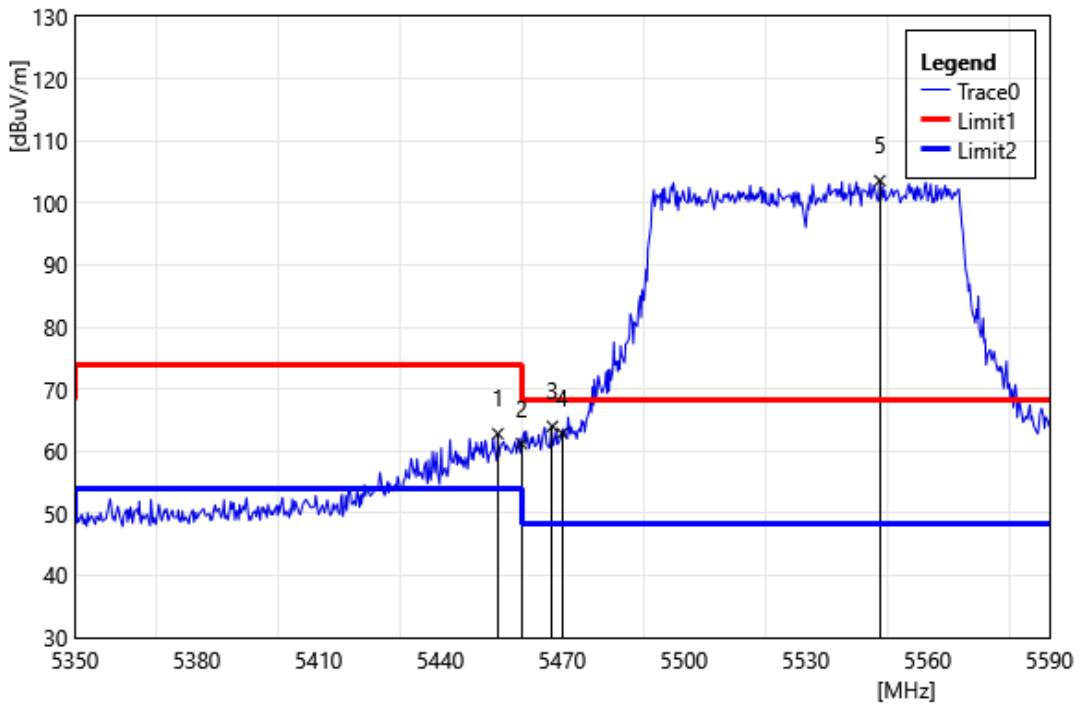


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.16	63.42	-0.58	62.84	74.00	-11.16	PEAK
2	5460.00	61.76	-0.57	61.19	74.00	-12.81	PEAK
3	5467.60	64.57	-0.56	64.01	68.20	-4.19	PEAK
4	5470.00	63.43	-0.56	62.87	68.20	-5.33	PEAK
5	5548.24	104.08	-0.50	103.59	68.20	35.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

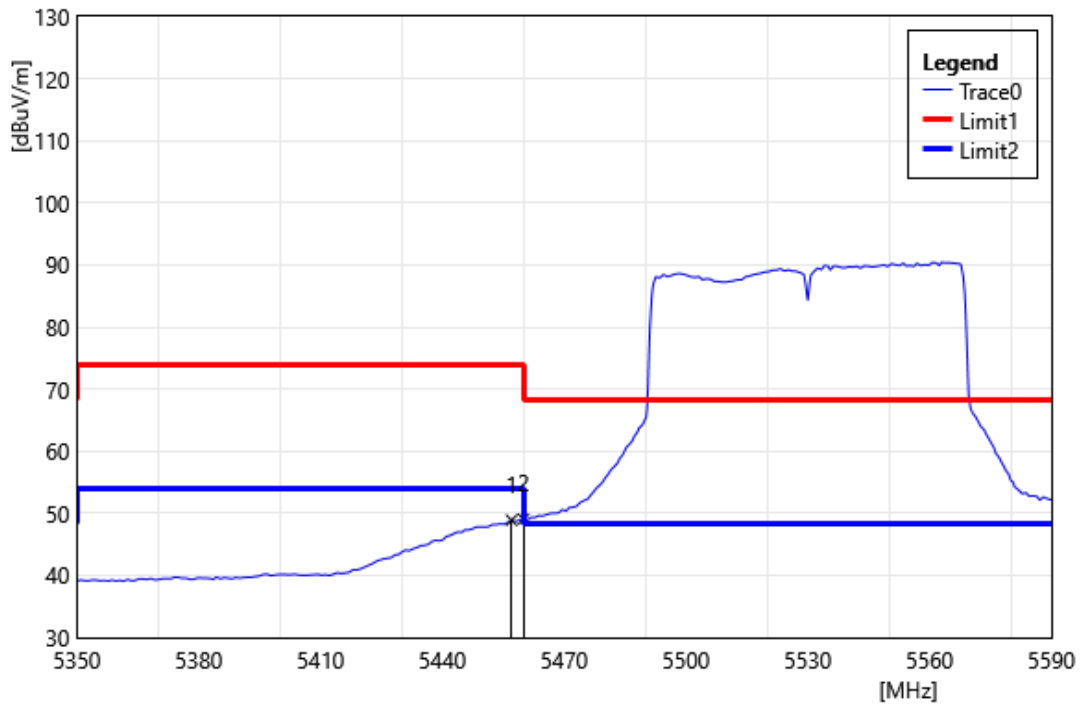


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.04	49.49	-0.58	48.91	54.00	-5.09	AVG
2	5460.00	49.62	-0.57	49.05	54.00	-4.95	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

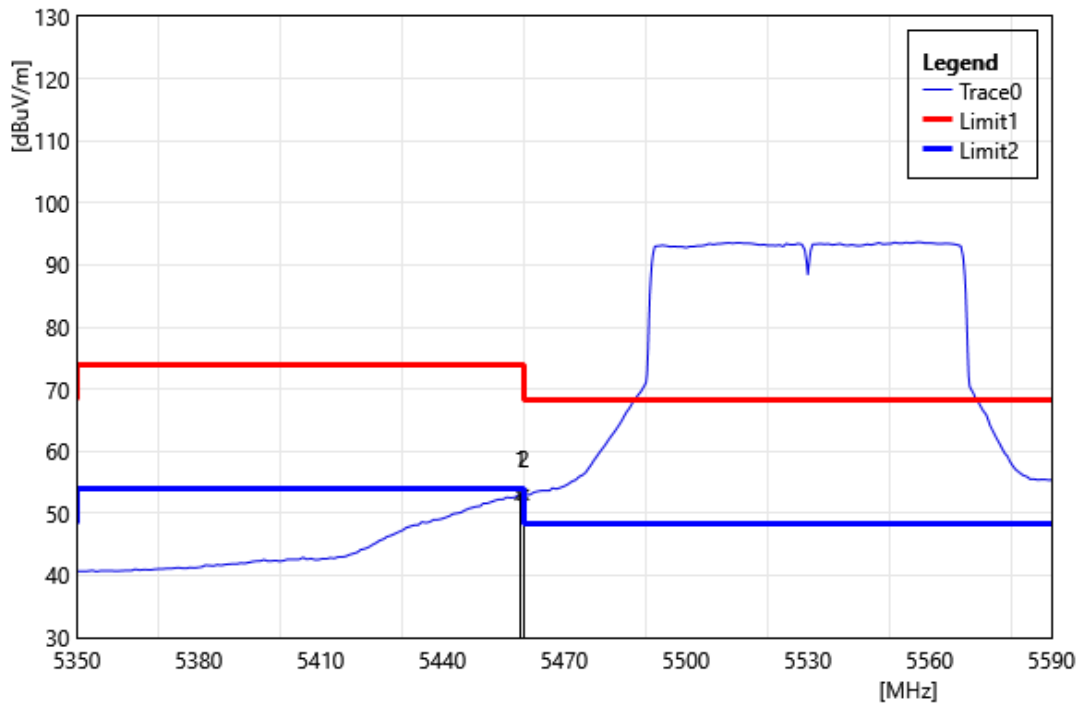


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	53.57	-0.57	53.00	54.00	-1.00	AVG
2	5460.00	53.56	-0.57	52.99	54.00	-1.01	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

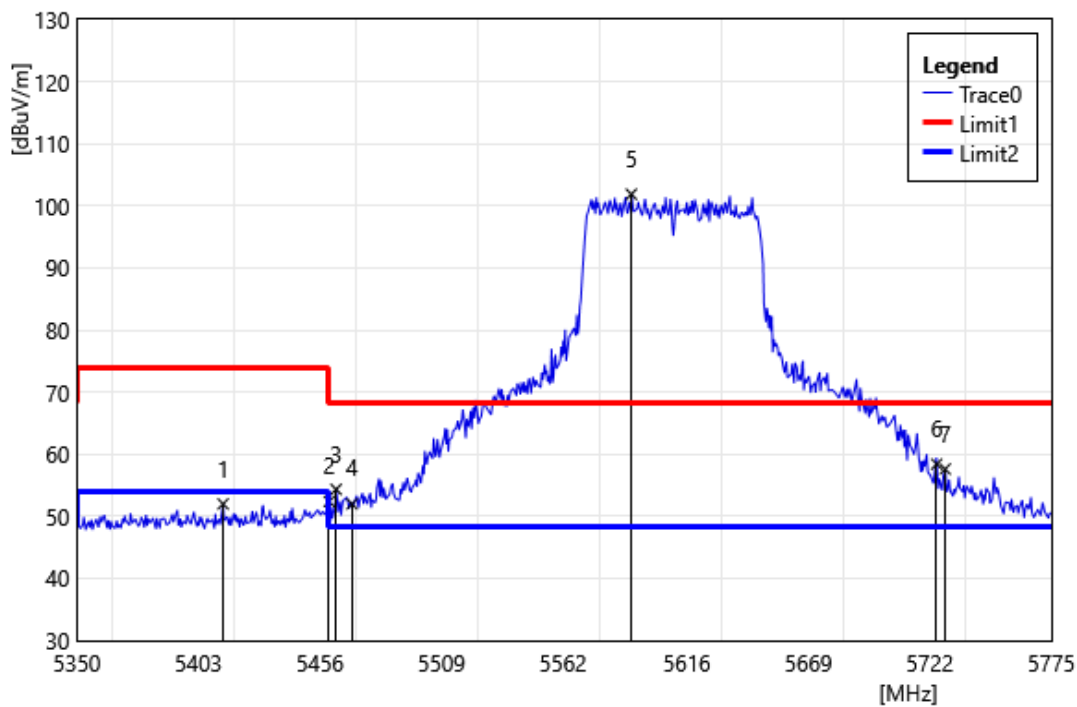


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5413.75	52.83	-0.84	51.99	74.00	-22.01	PEAK
2	5460.00	52.96	-0.57	52.39	74.00	-21.61	PEAK
3	5463.05	54.92	-0.57	54.35	68.20	-13.85	PEAK
4	5470.00	52.55	-0.56	51.99	68.20	-16.21	PEAK
5	5591.83	102.44	-0.56	101.88	68.20	33.68	PEAK
6	5725.00	58.75	-0.34	58.41	68.20	-9.79	PEAK
7	5728.68	57.93	-0.31	57.62	68.20	-10.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

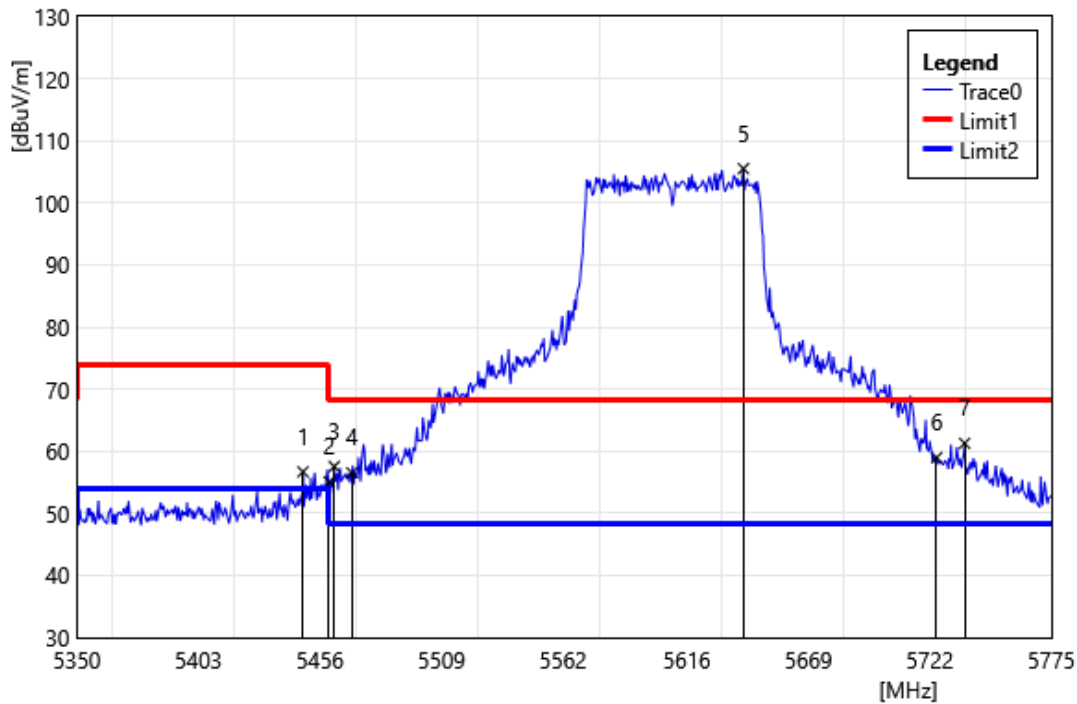


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.60	57.27	-0.59	56.68	74.00	-17.32	PEAK
2	5460.00	55.65	-0.57	55.08	74.00	-18.92	PEAK
3	5462.20	58.11	-0.57	57.54	68.20	-10.66	PEAK
4	5470.00	57.09	-0.56	56.53	68.20	-11.67	PEAK
5	5640.70	106.14	-0.63	105.51	68.20	37.31	PEAK
6	5725.00	59.32	-0.34	58.98	68.20	-9.22	PEAK
7	5737.18	61.50	-0.22	61.28	68.20	-6.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

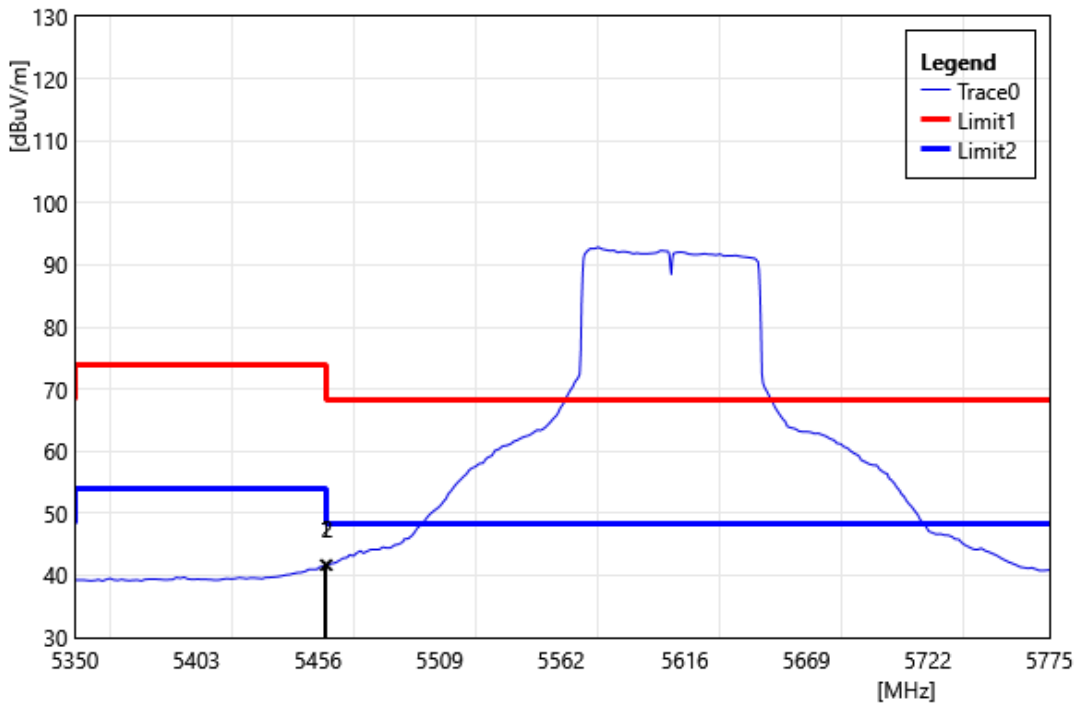


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.23	42.24	-0.57	41.67	54.00	-12.33	AVG
2	5460.00	42.24	-0.57	41.68	54.00	-12.33	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

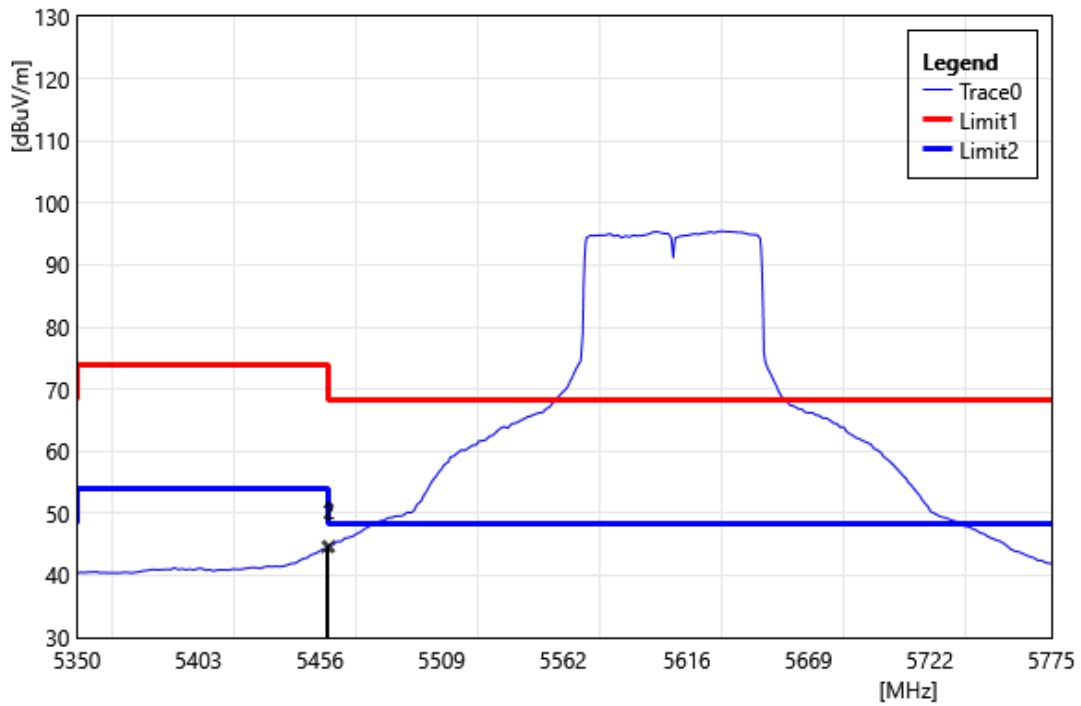


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.23	45.08	-0.57	44.51	54.00	-9.49	AVG
2	5460.00	45.34	-0.57	44.77	54.00	-9.23	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

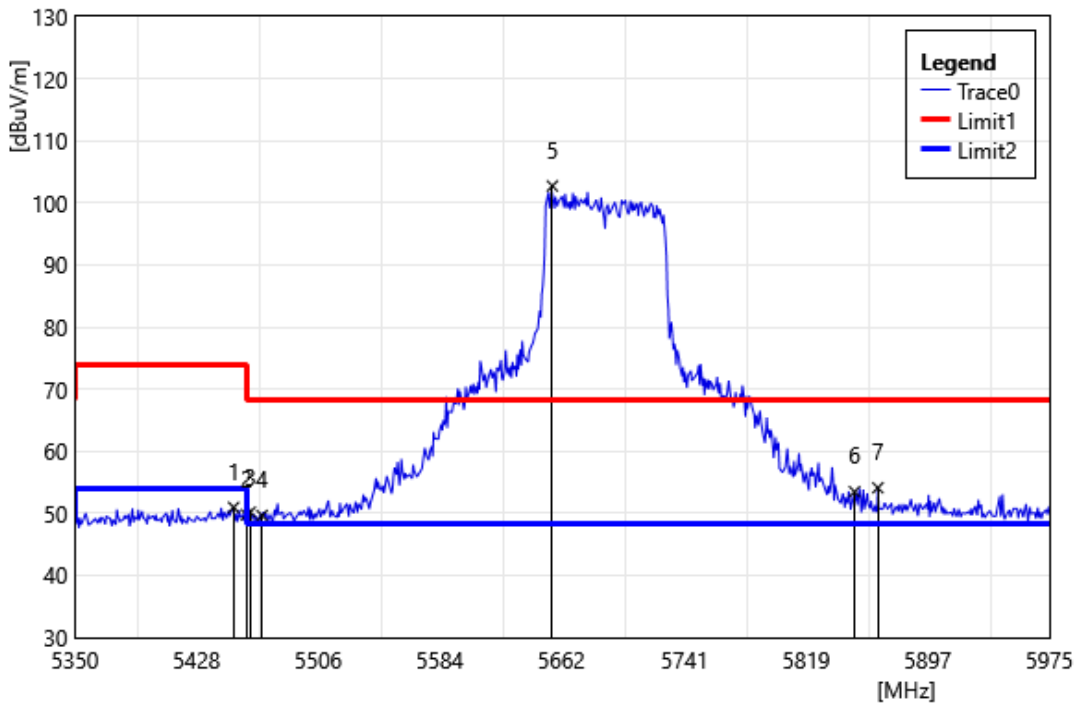


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.88	51.54	-0.58	50.96	74.00	-23.04	PEAK
2	5460.00	50.35	-0.57	49.78	74.00	-24.22	PEAK
3	5462.50	50.76	-0.57	50.19	68.20	-18.01	PEAK
4	5470.00	50.22	-0.56	49.66	68.20	-18.54	PEAK
5	5656.25	103.36	-0.64	102.72	68.20	34.52	PEAK
6	5850.00	53.22	0.28	53.50	68.20	-14.70	PEAK
7	5865.00	53.79	0.32	54.11	68.20	-14.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

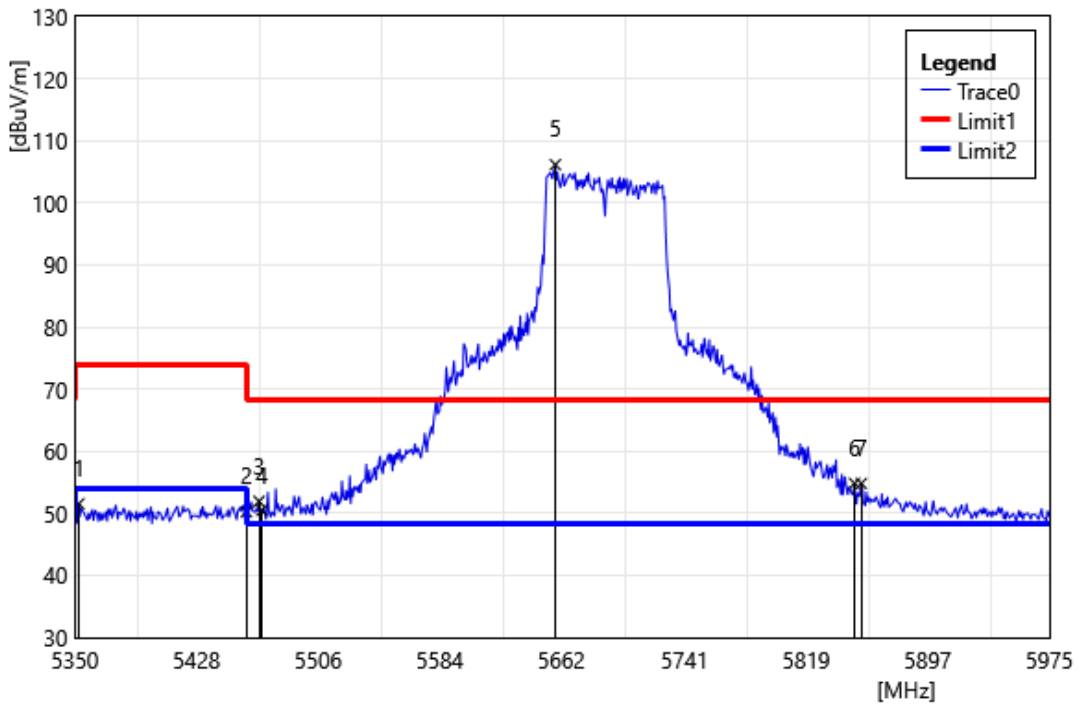


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5352.50	52.81	-1.27	51.54	74.00	-22.46	PEAK
2	5460.00	50.81	-0.57	50.24	74.00	-23.76	PEAK
3	5468.13	52.49	-0.56	51.93	68.20	-16.27	PEAK
4	5470.00	51.06	-0.56	50.50	68.20	-17.70	PEAK
5	5658.13	106.79	-0.64	106.15	68.20	37.95	PEAK
6	5850.00	54.56	0.28	54.84	68.20	-13.36	PEAK
7	5854.38	54.52	0.29	54.82	68.20	-13.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

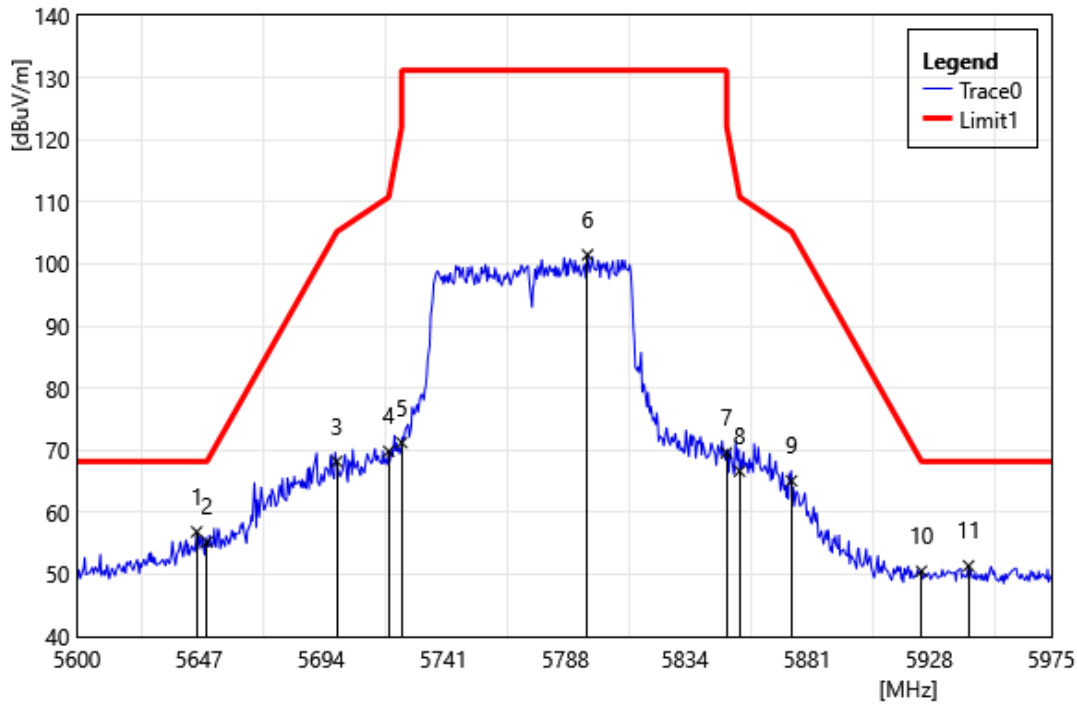


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5646.13	57.49	-0.63	56.86	68.20	-11.34	PEAK
2	5650.00	55.85	-0.64	55.21	68.20	-12.99	PEAK
3	5700.00	68.81	-0.61	68.20	105.20	-37.00	PEAK
4	5720.00	70.23	-0.40	69.83	110.80	-40.97	PEAK
5	5725.00	71.56	-0.34	71.22	122.20	-50.98	PEAK
6	5796.50	101.35	0.13	101.48	131.20	-29.72	PEAK
7	5850.00	69.30	0.28	69.58	122.20	-52.62	PEAK
8	5855.00	66.34	0.29	66.63	110.80	-44.17	PEAK
9	5875.00	64.73	0.34	65.07	105.20	-40.13	PEAK
10	5925.00	50.24	0.28	50.52	68.20	-17.68	PEAK
11	5943.13	51.21	0.18	51.39	68.20	-16.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

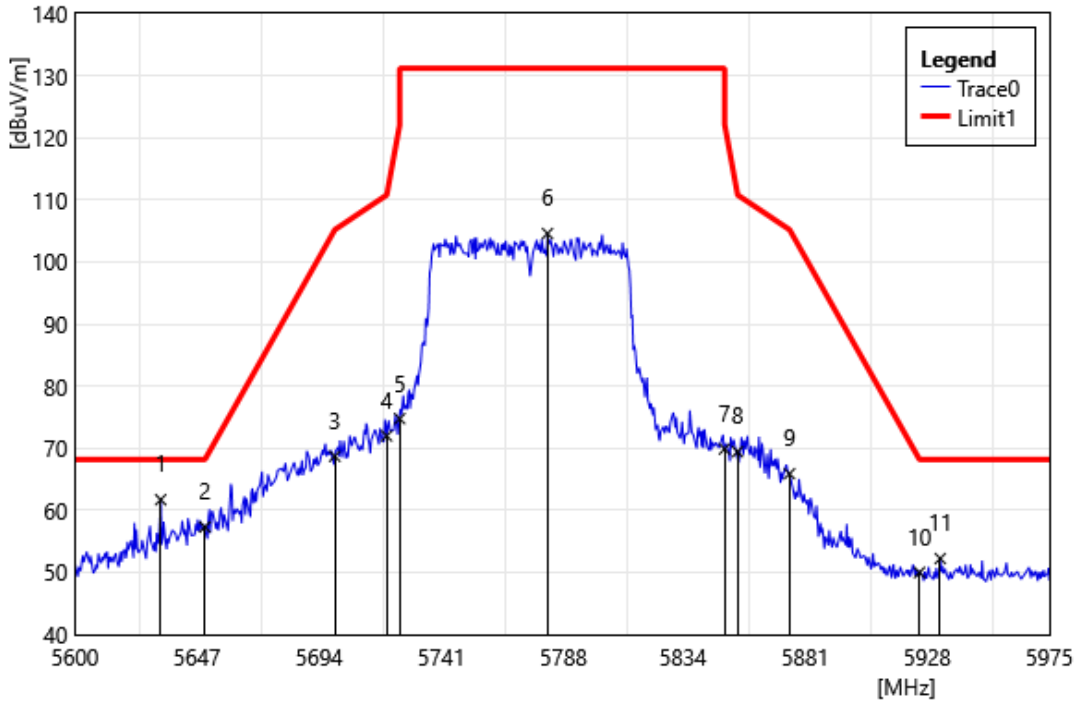


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.00	62.33	-0.62	61.71	68.20	-6.49	PEAK
2	5650.00	57.96	-0.64	57.32	68.20	-10.88	PEAK
3	5700.00	69.32	-0.61	68.71	105.20	-36.49	PEAK
4	5720.00	72.40	-0.40	72.00	110.80	-38.80	PEAK
5	5725.00	75.11	-0.34	74.77	122.20	-47.43	PEAK
6	5781.88	104.51	0.07	104.58	131.20	-26.62	PEAK
7	5850.00	69.60	0.28	69.88	122.20	-52.32	PEAK
8	5855.00	69.15	0.29	69.44	110.80	-41.36	PEAK
9	5875.00	65.56	0.34	65.90	105.20	-39.30	PEAK
10	5925.00	49.71	0.28	49.99	68.20	-18.21	PEAK
11	5933.00	52.00	0.23	52.23	68.20	-15.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

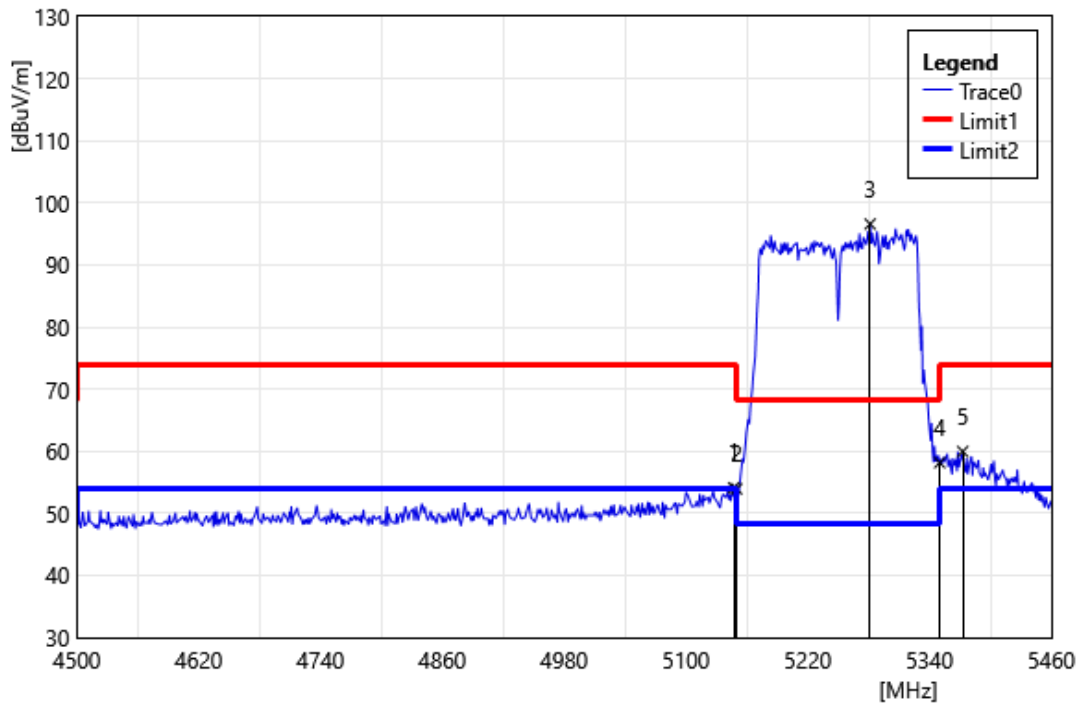


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.04	55.02	-0.91	54.11	74.00	-19.89	PEAK
2	5150.00	54.85	-0.91	53.94	74.00	-20.06	PEAK
3	5281.44	98.19	-1.59	96.60	68.20	28.40	PEAK
4	5350.00	59.46	-1.29	58.17	74.00	-15.83	PEAK
5	5372.64	61.10	-1.13	59.97	74.00	-14.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

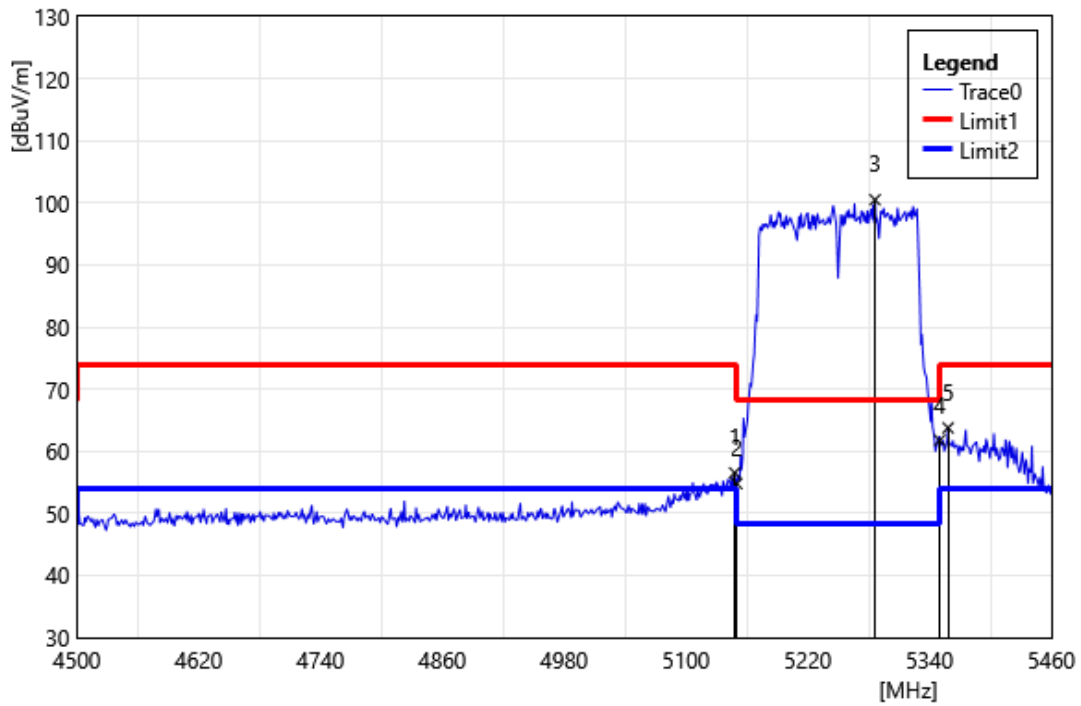


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.00	57.44	-0.91	56.54	74.00	-17.47	PEAK
2	5150.00	55.70	-0.91	54.79	74.00	-19.21	PEAK
3	5286.24	102.13	-1.61	100.52	68.20	32.32	PEAK
4	5350.00	63.07	-1.29	61.77	74.00	-12.23	PEAK
5	5358.24	65.00	-1.23	63.77	74.00	-10.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

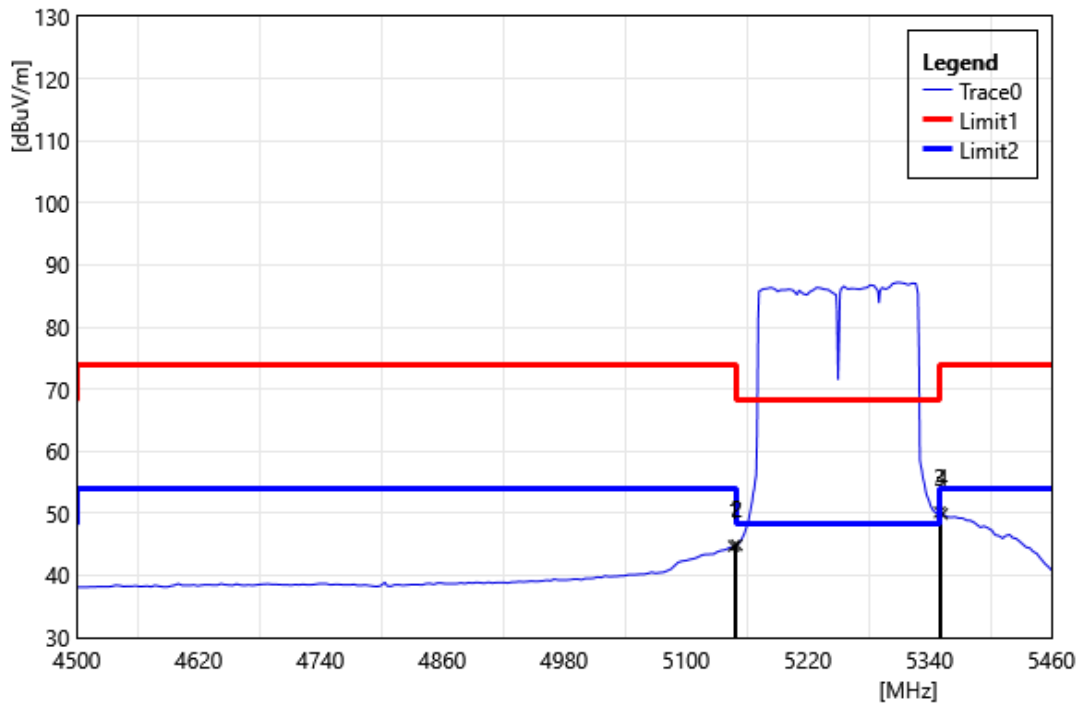

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.04	45.65	-0.91	44.75	54.00	-9.26	AVG
2	5150.00	45.79	-0.91	44.88	54.00	-9.12	AVG
3	5350.00	51.48	-1.29	50.19	54.00	-3.81	AVG
4	5352.48	51.19	-1.27	49.92	54.00	-4.08	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

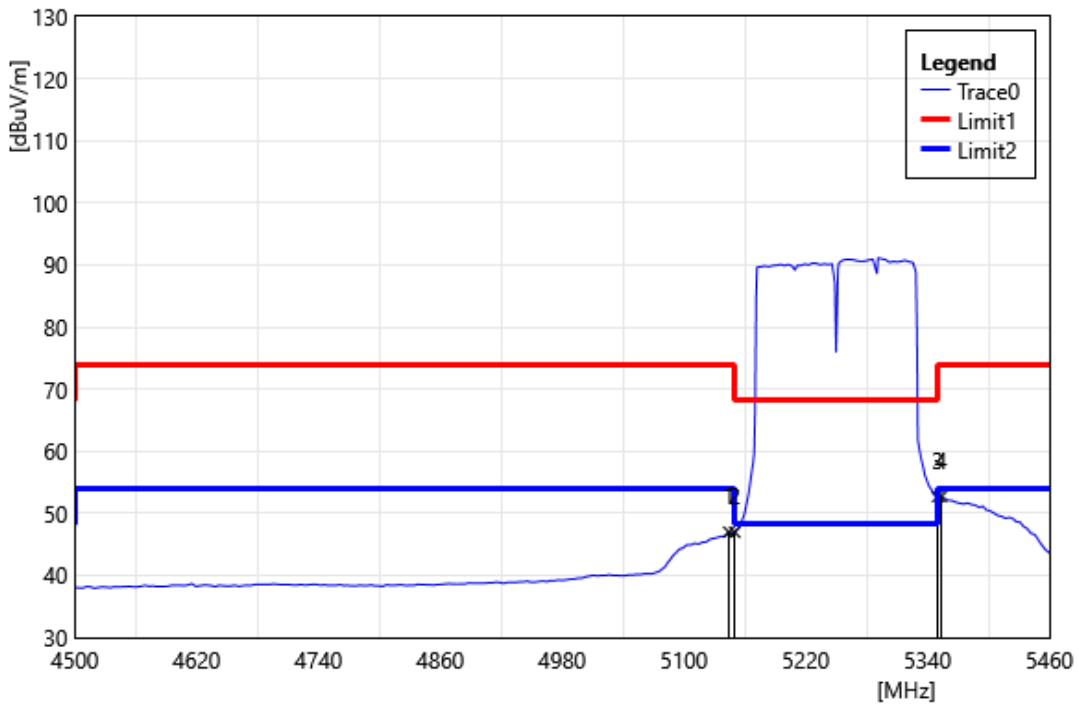

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.16	47.88	-0.90	46.98	54.00	-7.02	AVG
2	5150.00	47.87	-0.91	46.96	54.00	-7.04	AVG
3	5350.00	53.97	-1.29	52.68	54.00	-1.32	AVG
4	5353.44	53.93	-1.27	52.66	54.00	-1.34	AVG