


EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

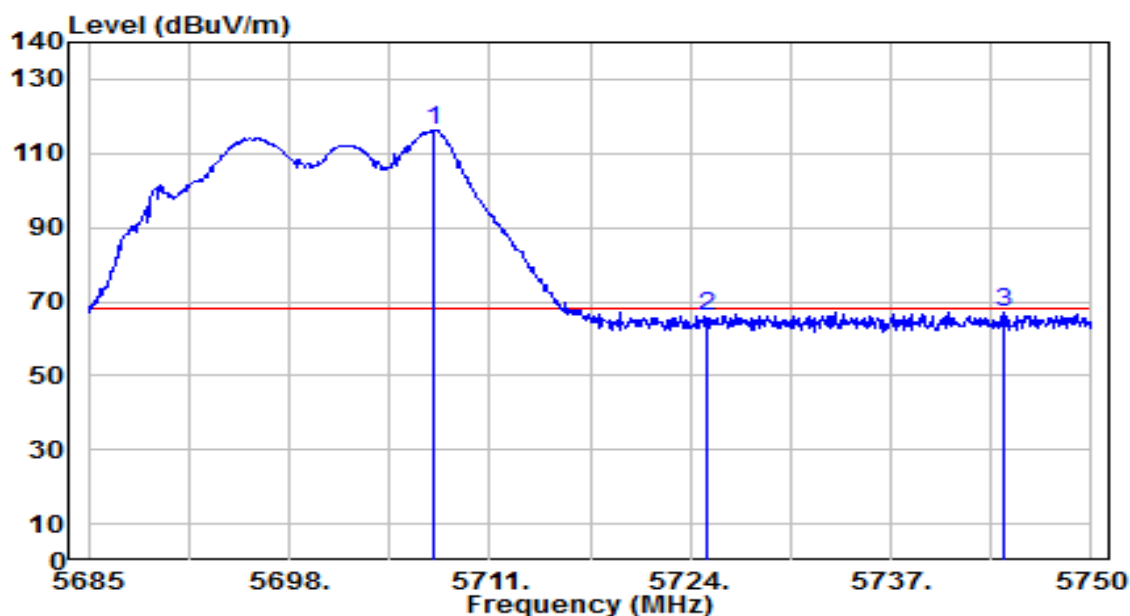


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5707.425	110.20	6.08	116.28	N/A	N/A	260	135	Peak
2	5725.000	60.10	6.14	66.24	-1.96	68.20	260	135	Peak
3	* 5744.345	60.83	6.21	67.04	-1.16	68.20	260	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

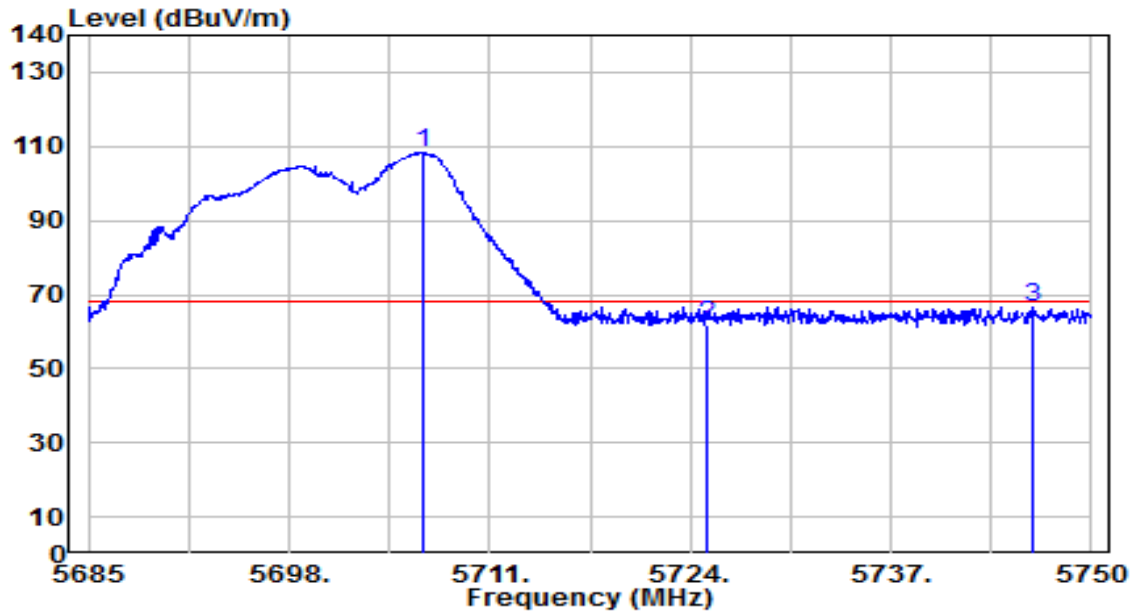


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.645	102.16	6.08	108.24	N/A	N/A	145	205	Peak
2	5725.000	55.88	6.14	62.02	-6.18	68.20	145	205	Peak
3	* 5746.165	60.46	6.22	66.68	-1.52	68.20	145	205	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

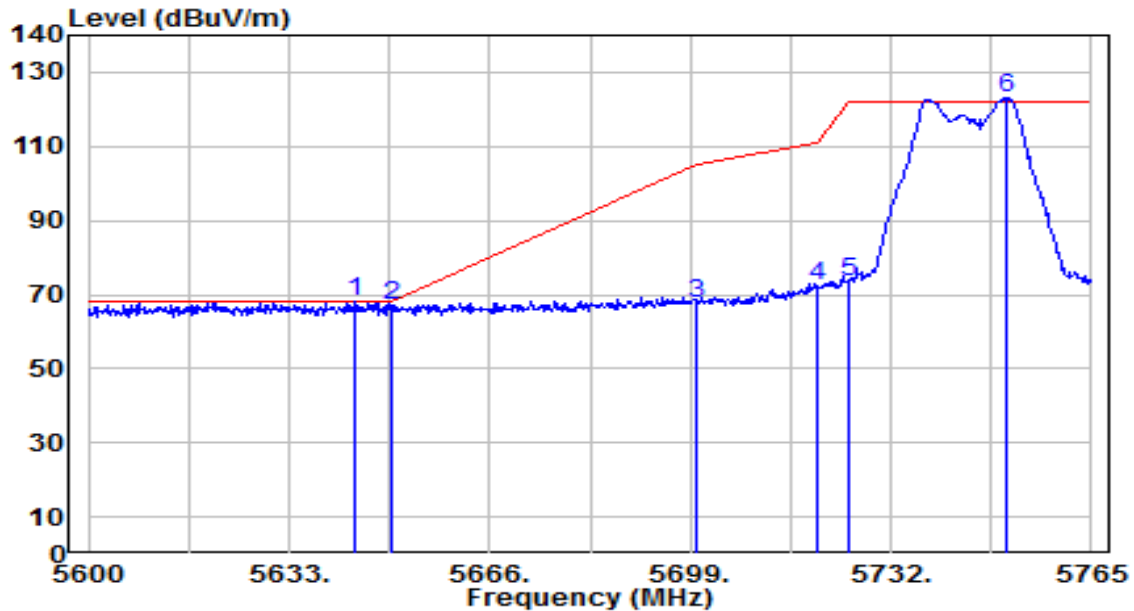


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5643.890	62.10	5.86	67.96	-0.24	68.20	290	120	Peak
2	5650.000	61.02	5.88	66.90	-1.30	68.20	290	120	Peak
3	5700.000	61.53	6.05	67.58	-37.62	105.20	290	120	Peak
4	5720.000	66.30	6.13	72.43	-38.37	110.80	290	120	Peak
5	5725.000	67.23	6.14	73.37	-48.83	122.20	290	120	Peak
6	* 5751.140	116.73	6.24	122.97	N/A	N/A	290	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

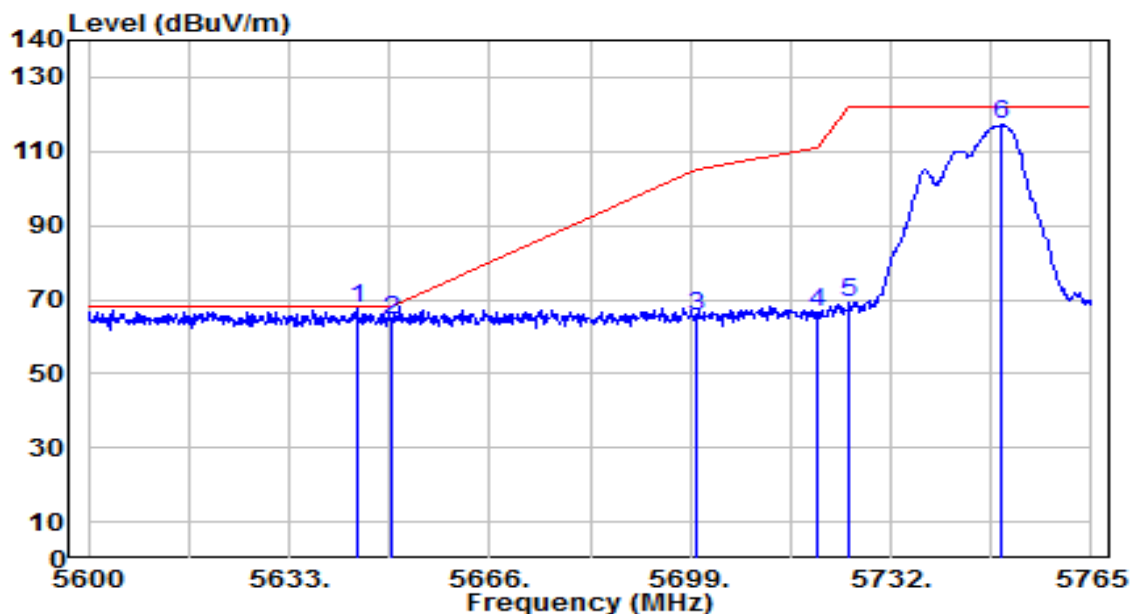


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.055	61.56	5.86	67.42	-0.78	68.20	140	200	Peak
2		5650.000	58.35	5.88	64.23	-3.97	68.20	140	200	Peak
3		5700.000	59.34	6.05	65.39	-39.81	105.20	140	200	Peak
4		5720.000	60.38	6.13	66.50	-44.30	110.80	140	200	Peak
5		5725.000	63.10	6.14	69.25	-52.95	122.20	140	200	Peak
6		5750.315	110.93	6.24	117.17	N/A	N/A	140	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

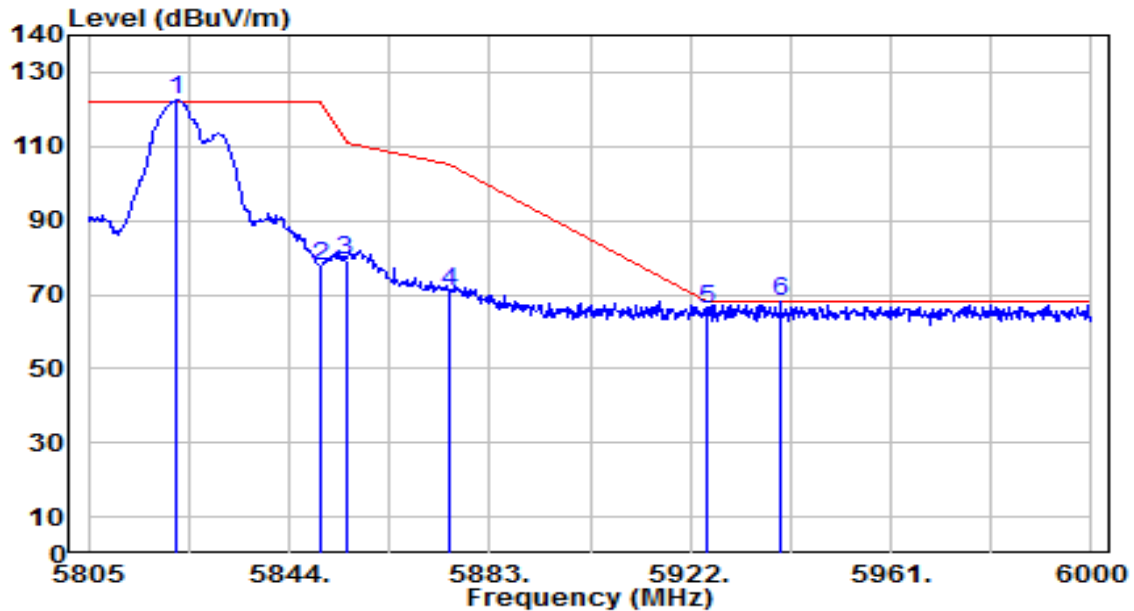


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.160	116.10	6.49	122.59	N/A	N/A	135	235	Peak
2	5850.000	71.09	6.57	77.66	-44.54	122.20	135	235	Peak
3	5855.000	72.47	6.59	79.06	-31.74	110.80	135	235	Peak
4	5875.000	64.21	6.65	70.85	-34.35	105.20	135	235	Peak
5	5925.000	59.14	6.81	65.95	-2.25	68.20	135	235	Peak
6	* 5939.550	61.12	6.86	67.99	-0.21	68.20	135	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

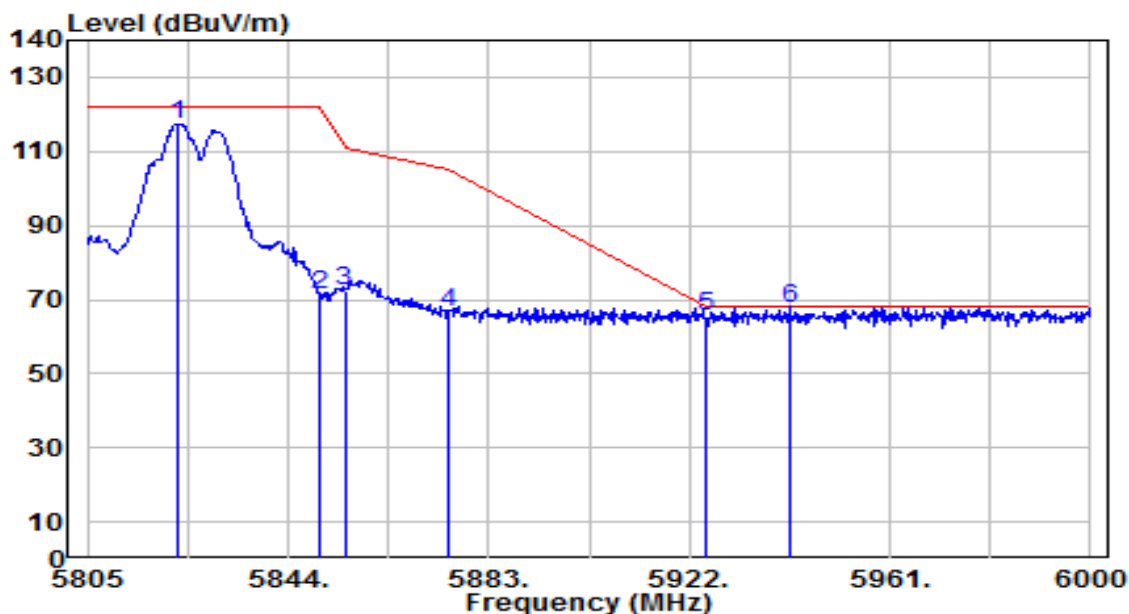


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.550	111.04	6.49	117.52	N/A	N/A	150	160	Peak
2	5850.000	64.80	6.57	71.37	-50.83	122.20	150	160	Peak
3	5855.000	65.74	6.59	72.32	-38.48	110.80	150	160	Peak
4	5875.000	59.90	6.65	66.55	-38.65	105.20	150	160	Peak
5	5925.000	58.54	6.81	65.35	-2.85	68.20	150	160	Peak
6	* 5941.500	60.97	6.87	67.84	-0.36	68.20	150	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

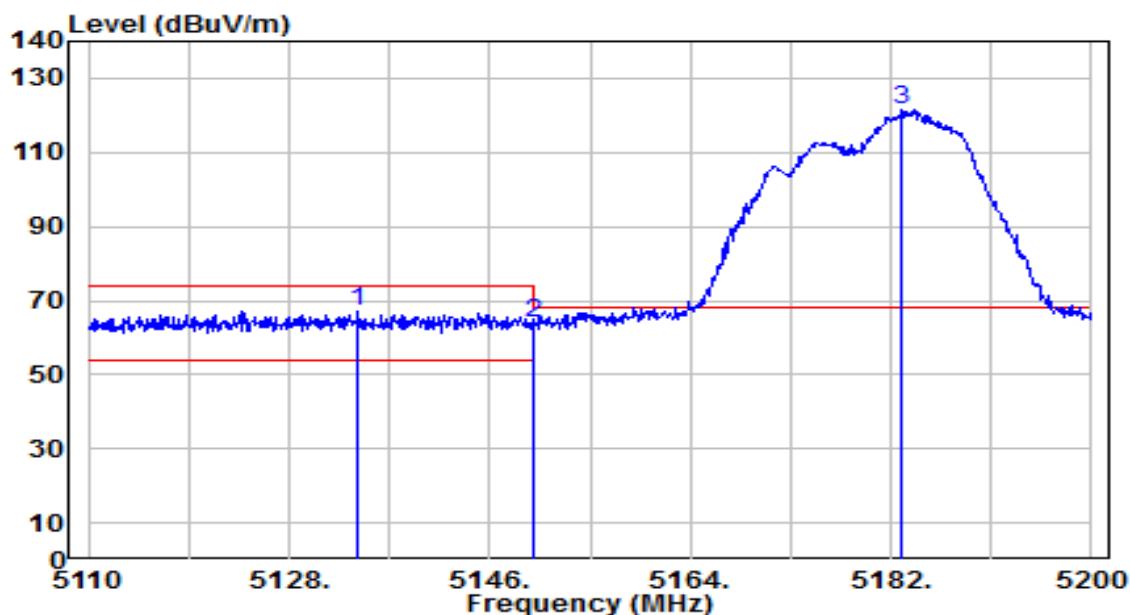


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.120	62.32	5.04	67.36	-6.64	74.00	160	130	Peak
2		5150.000	58.97	5.06	64.03	-9.97	74.00	160	130	Peak
3		5182.990	116.57	5.11	121.67	N/A	N/A	160	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

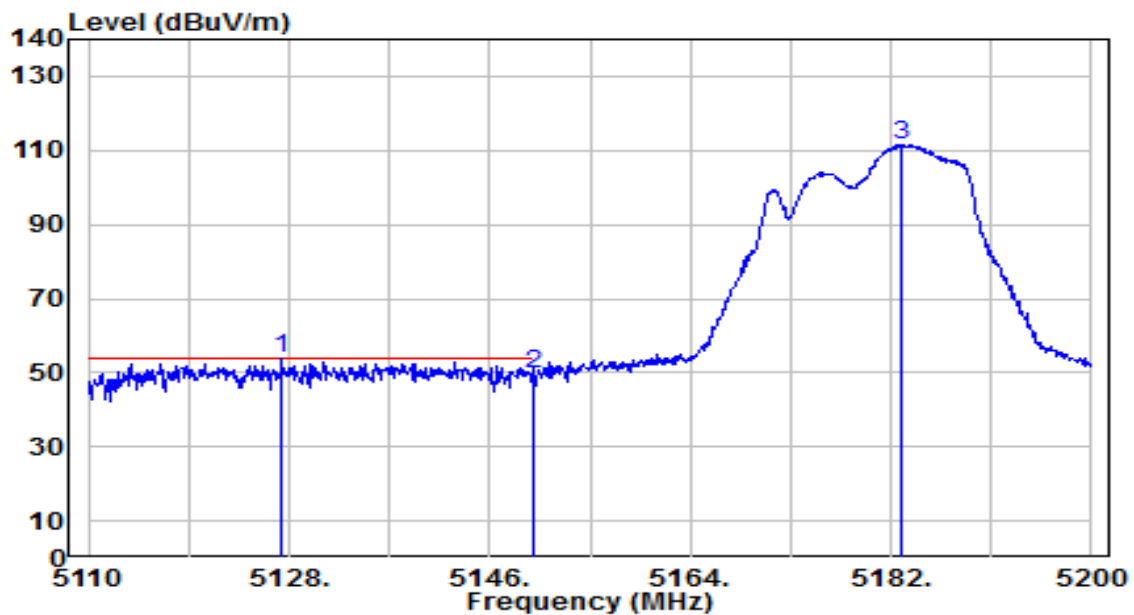


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5127.370	48.71	5.03	53.74	-0.26	54.00	160	130	Average
2		5150.000	44.35	5.06	49.41	-4.59	54.00	160	130	Average
3		5182.990	106.24	5.11	111.35	N/A	N/A	160	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

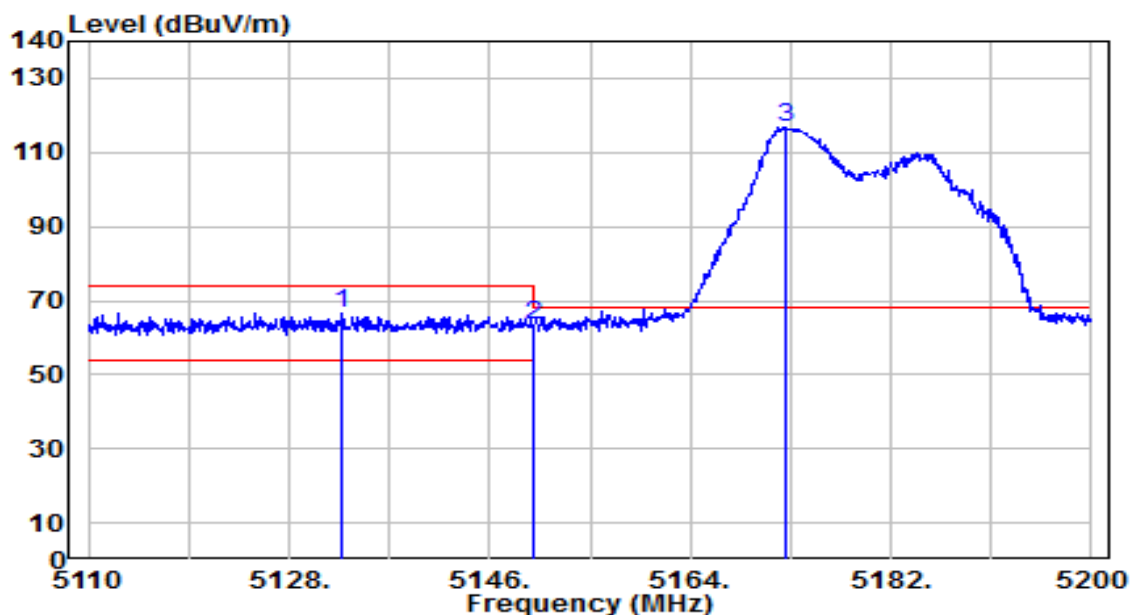


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5132.770	61.64	5.04	66.67	-7.33	74.00	120	180	Peak
2		5150.000	58.10	5.06	63.16	-10.84	74.00	120	180	Peak
3		5172.550	111.54	5.09	116.63	N/A	N/A	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

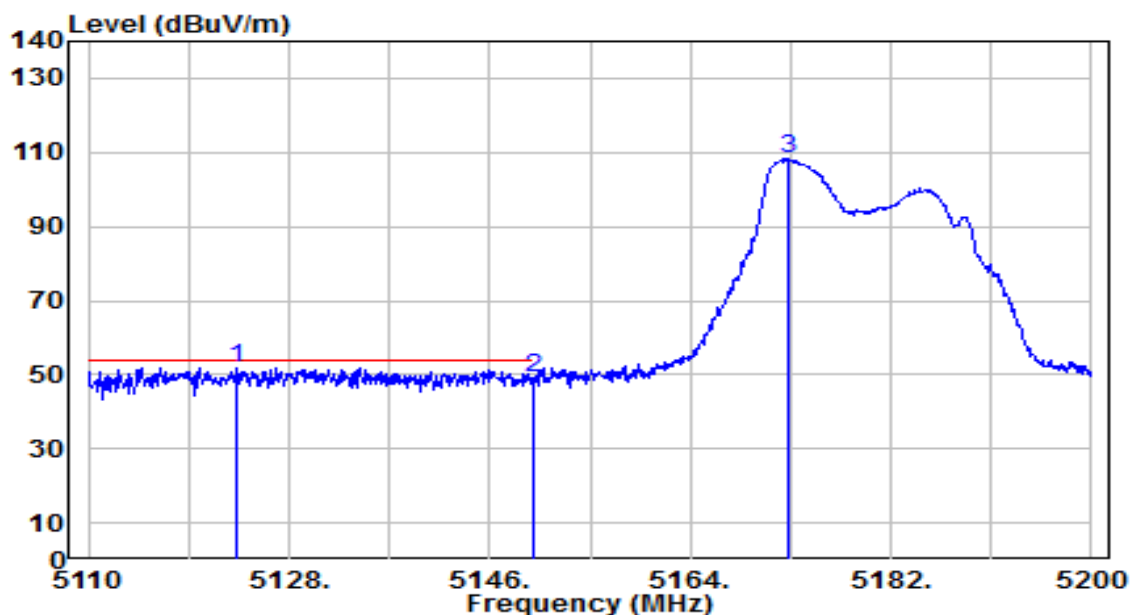


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5123.320	46.92	5.02	51.95	-2.05	54.00	120	180	Average
2		5150.000	43.94	5.06	49.00	-5.00	54.00	120	180	Average
3		5172.910	103.14	5.09	108.23	N/A	N/A	120	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

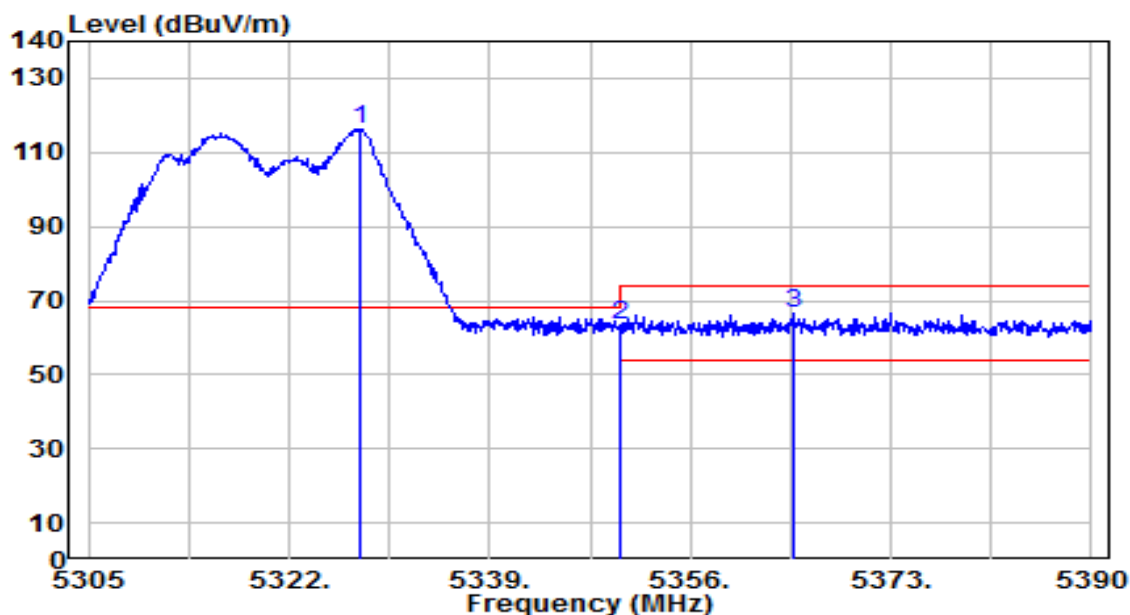


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5328.120	110.89	5.24	116.12	N/A	N/A	285	125	Peak
2	*	5350.000	58.14	5.25	63.40	-4.80	68.20	285	125	Peak
3		5364.755	61.51	5.27	66.77	-7.23	74.00	285	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

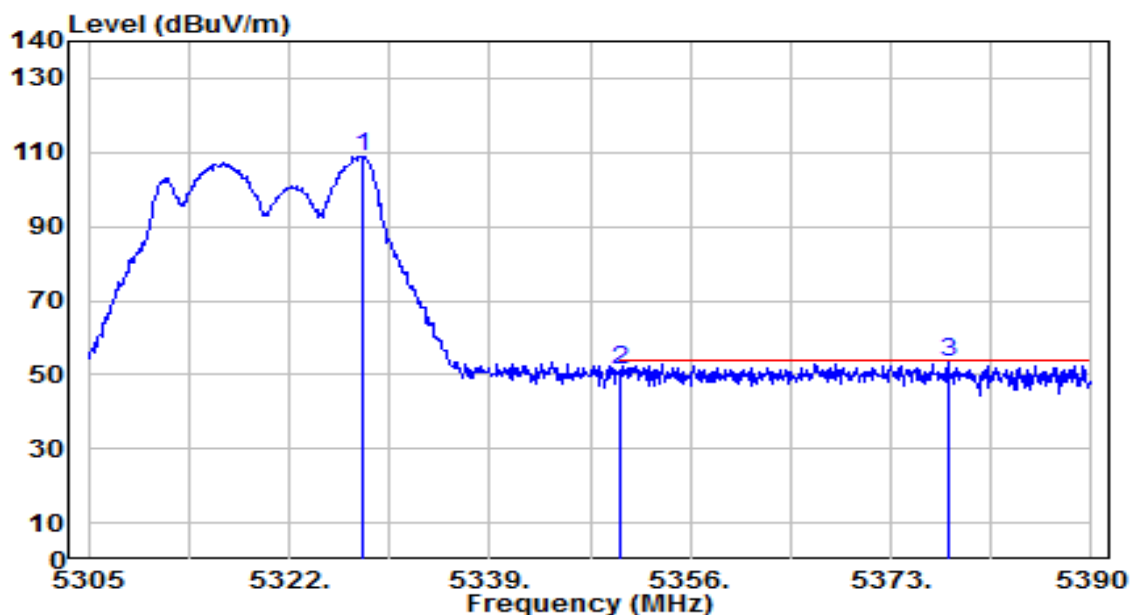


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.205	103.63	5.24	108.86	N/A	N/A	285	125	Average
2	5350.000	45.94	5.25	51.19	-2.81	54.00	285	125	Average
3	* 5377.845	48.09	5.28	53.37	-0.63	54.00	285	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

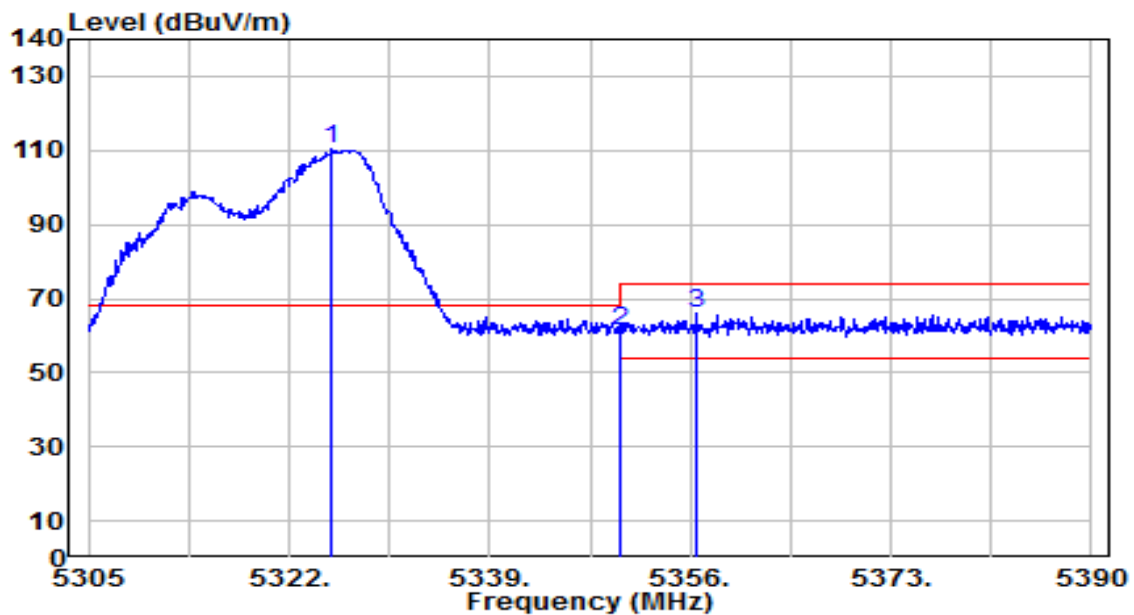


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5325.655	105.04	5.23	110.28	N/A	N/A	165	195	Peak
2	*	5350.000	56.29	5.25	61.54	-6.66	68.20	165	195	Peak
3		5356.510	60.60	5.26	65.86	-8.14	74.00	165	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

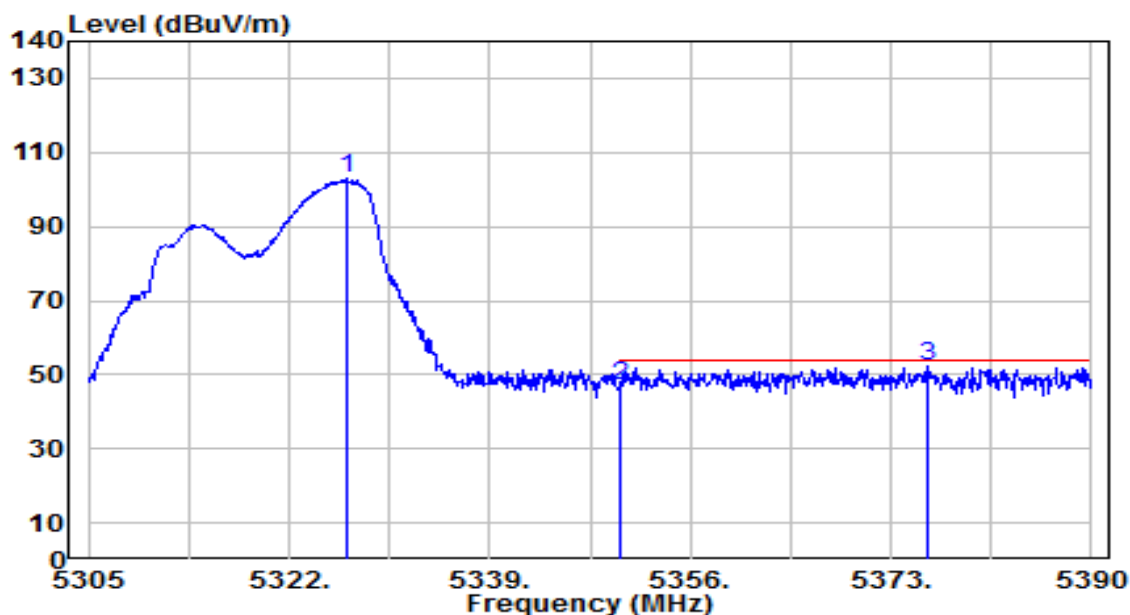


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.930	97.75	5.23	102.98	N/A	N/A	165	195	Average
2	5350.000	41.60	5.25	46.85	-7.15	54.00	165	195	Average
3	* 5376.060	46.88	5.28	52.16	-1.84	54.00	165	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

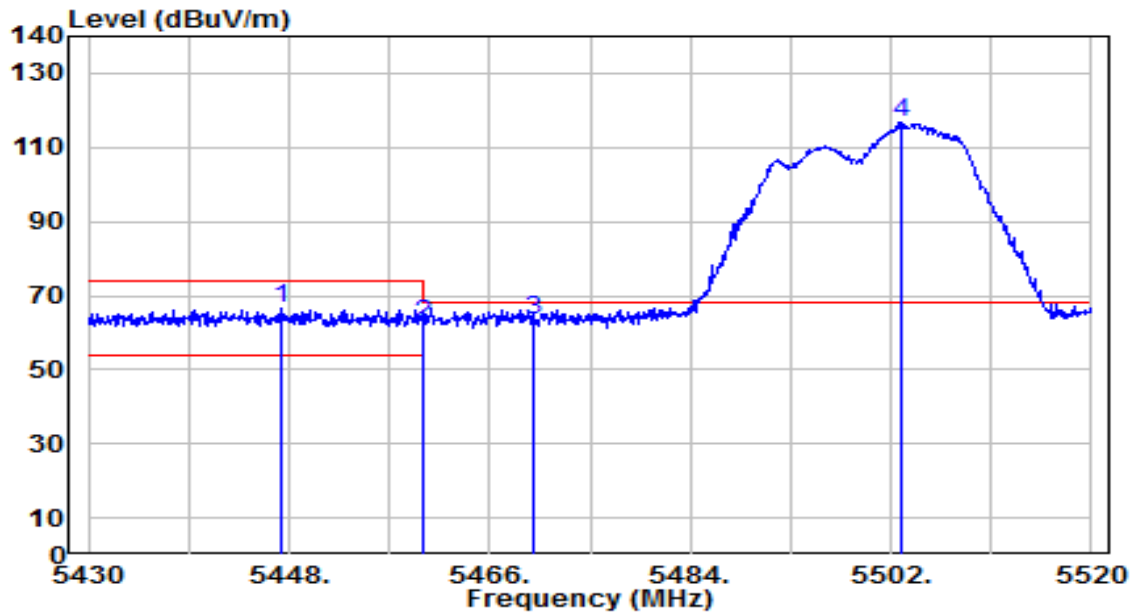


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.190	61.08	5.32	66.40	-7.60	74.00	110	135	Peak
2	5460.000	57.15	5.32	62.47	-5.73	68.20	110	135	Peak
3	* 5470.000	58.28	5.33	63.61	-4.59	68.20	110	135	Peak
4	5502.990	111.60	5.35	116.96	N/A	N/A	110	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

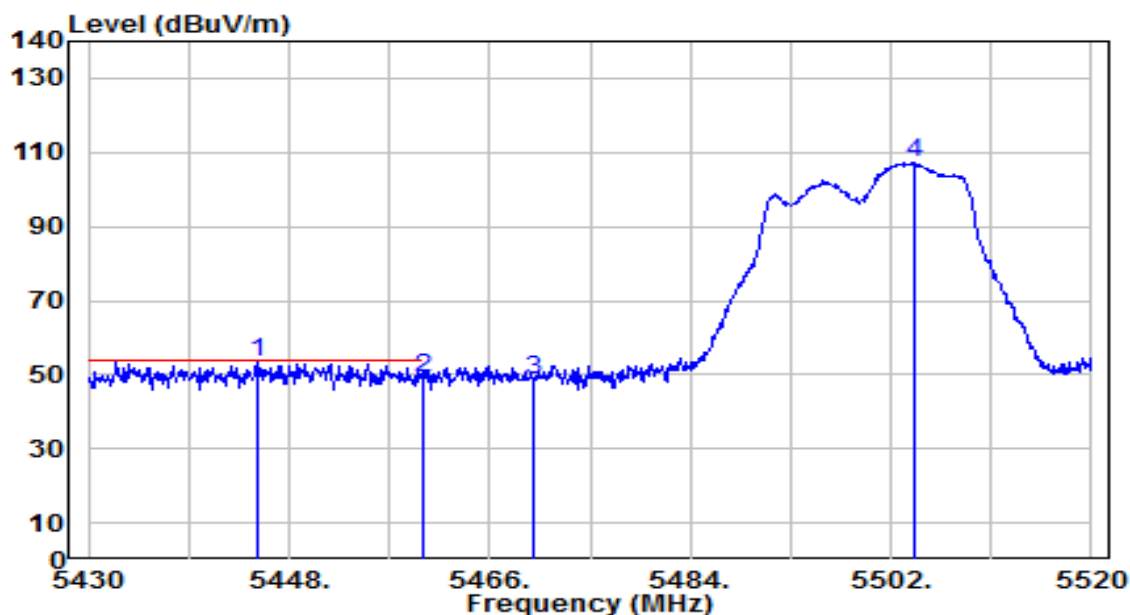


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5445.120	47.87	5.32	53.19	-0.81	54.00	110	135	Average
2		5460.000	43.61	5.32	48.94	-5.06	54.00	110	135	Average
3		5470.000	43.43	5.33	48.76	N/A	N/A	110	135	Average
4		5504.160	101.95	5.36	107.30	N/A	N/A	110	135	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

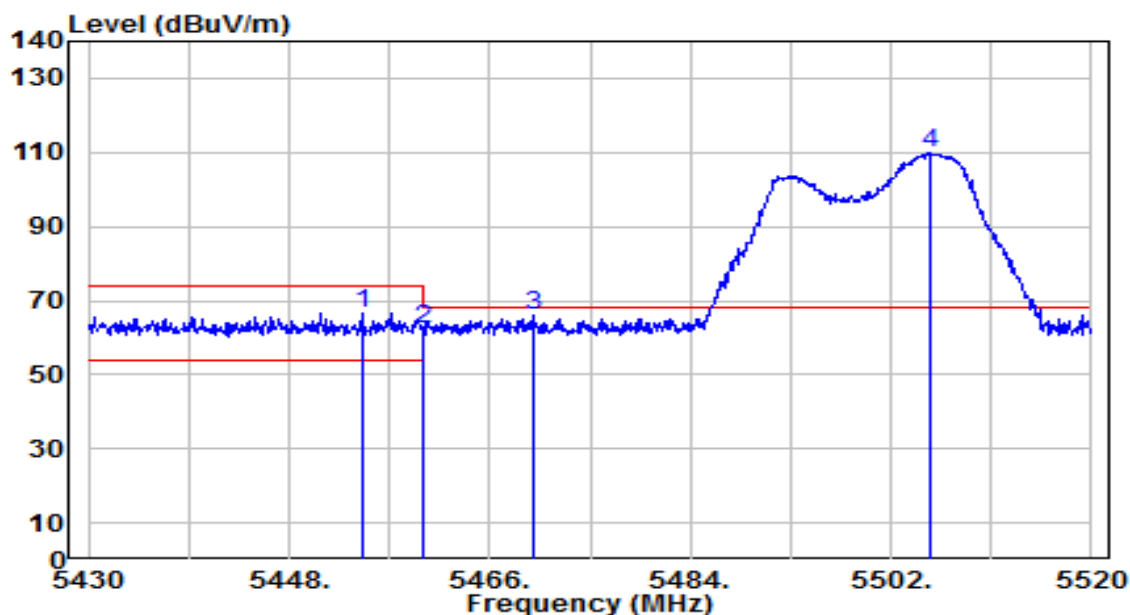


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.570	61.22	5.32	66.55	-7.45	74.00	140	200	Peak
2	5460.000	57.15	5.32	62.47	-5.73	68.20	140	200	Peak
3	* 5470.000	60.64	5.33	65.97	-2.23	68.20	140	200	Peak
4	5505.510	104.62	5.36	109.98	N/A	N/A	140	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

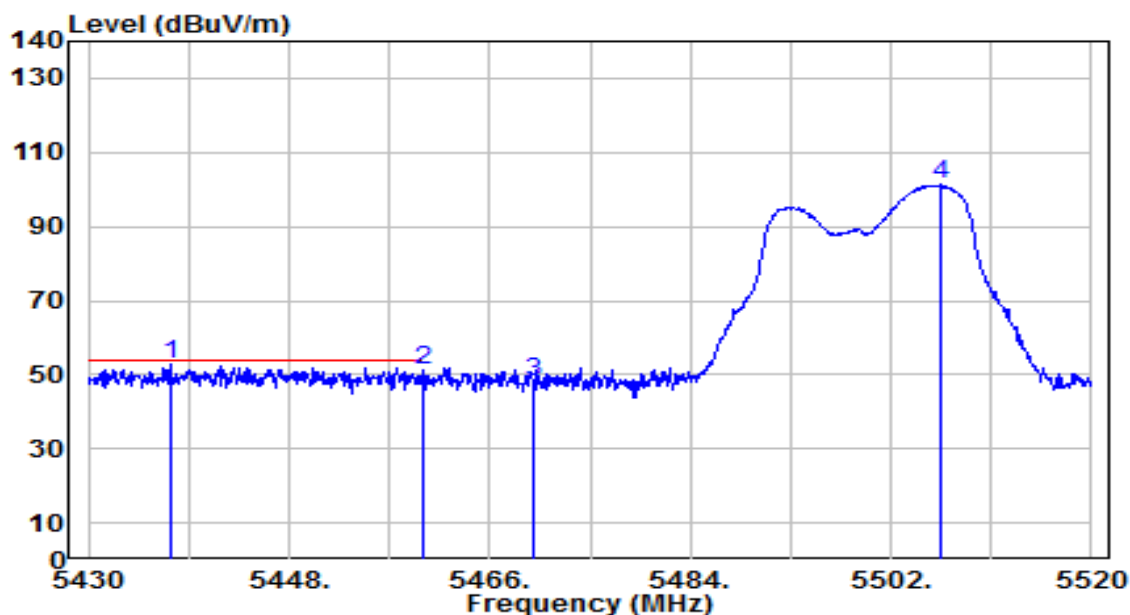


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5437.290	47.67	5.31	52.99	-1.01	54.00	140	200	Average
2		5460.000	46.17	5.32	51.49	-2.51	54.00	140	200	Average
3		5470.000	42.77	5.33	48.10	N/A	N/A	140	200	Average
4		5506.500	95.96	5.36	101.32	N/A	N/A	140	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

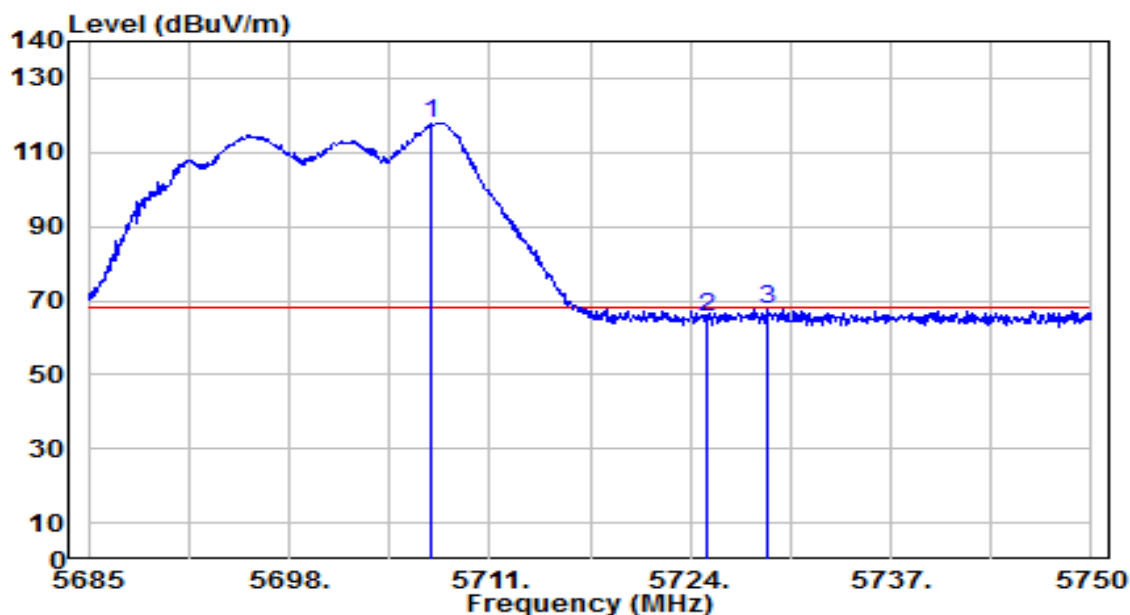


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5707.230	111.89	6.08	117.96	N/A	N/A	265	135	Peak
2	5725.000	59.37	6.14	65.51	-2.69	68.20	265	135	Peak
3	* 5728.940	61.70	6.16	67.86	-0.34	68.20	265	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

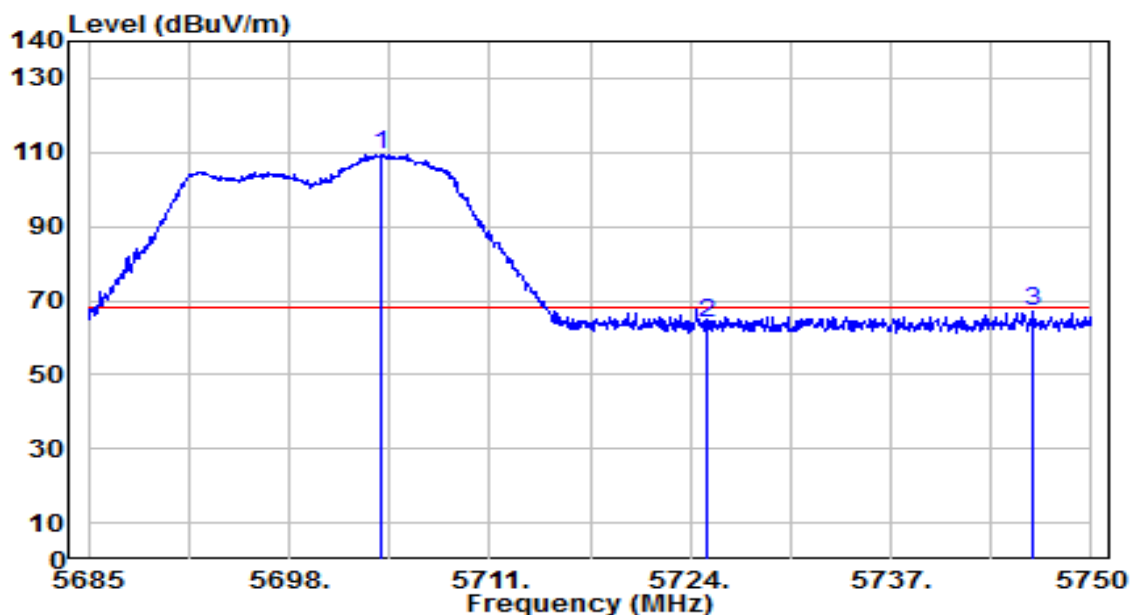


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.980	103.50	6.07	109.57	N/A	N/A	115	200	Peak
2	5725.000	57.85	6.14	63.99	-4.21	68.20	115	200	Peak
3	* 5746.230	60.69	6.22	66.92	-1.28	68.20	115	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

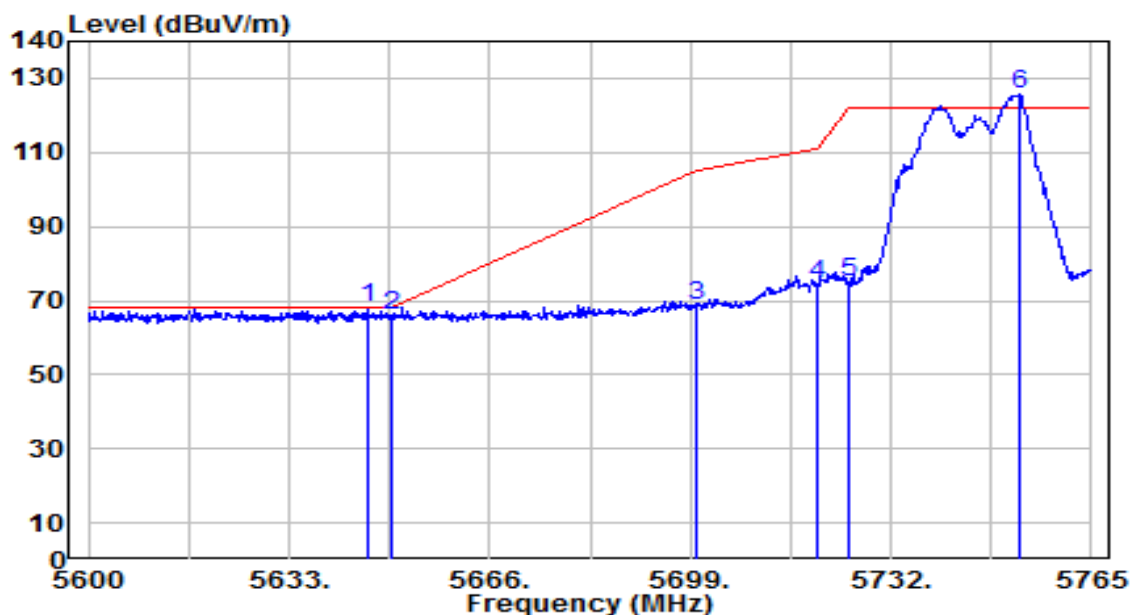


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.870	62.07	5.86	67.93	-0.27	68.20	260	140	Peak
2		5650.000	59.98	5.88	65.86	-2.34	68.20	260	140	Peak
3		5700.000	62.54	6.05	68.59	-36.61	105.20	260	140	Peak
4		5720.000	68.22	6.13	74.35	-36.45	110.80	260	140	Peak
5		5725.000	68.64	6.14	74.78	-47.42	122.20	260	140	Peak
6		5753.285	119.29	6.25	125.54	N/A	N/A	260	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

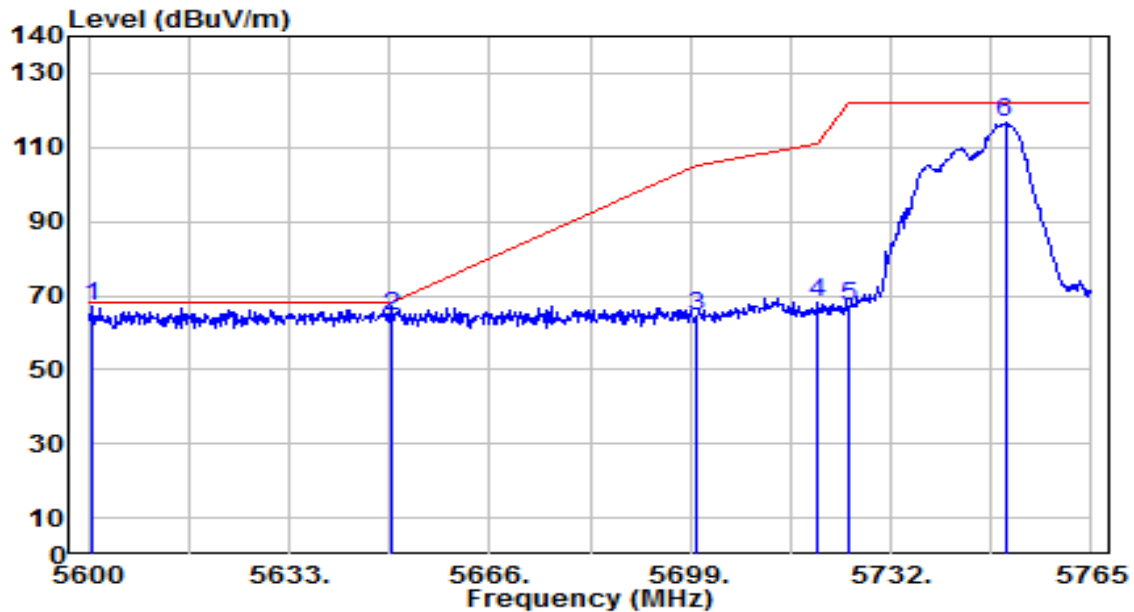


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5600.495	61.13	5.71	66.84	-1.36	68.20	150	205	Peak
2		5650.000	58.63	5.88	64.51	-3.69	68.20	150	205	Peak
3		5700.000	58.46	6.05	64.51	-40.69	105.20	150	205	Peak
4		5720.000	61.84	6.13	67.96	-42.84	110.80	150	205	Peak
5		5725.000	61.01	6.14	67.15	-55.05	122.20	150	205	Peak
6		5750.810	110.42	6.24	116.66	N/A	N/A	150	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

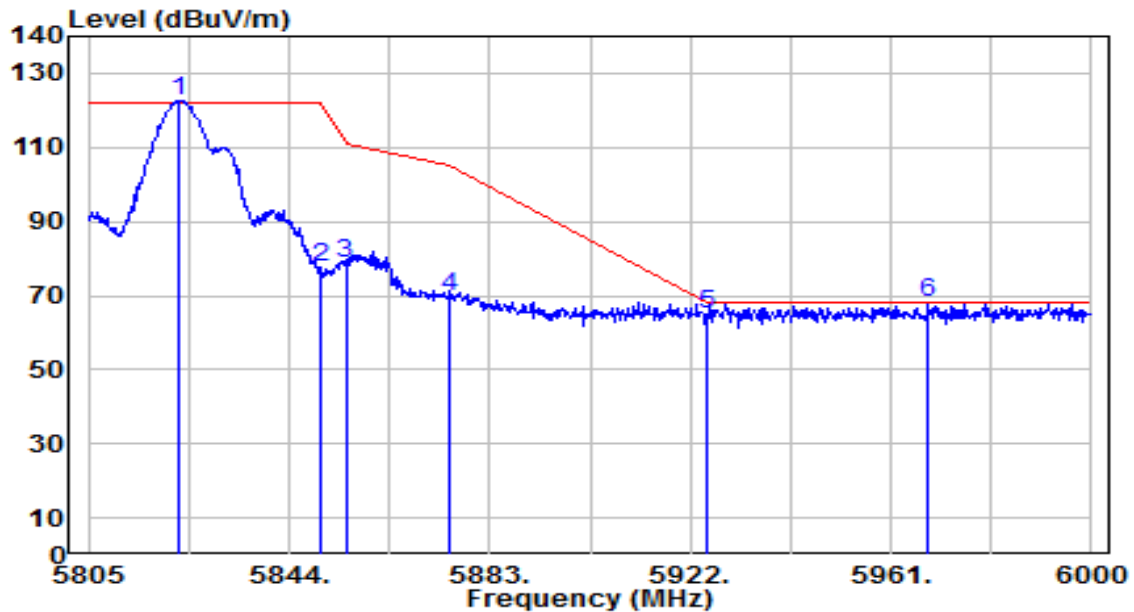


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.745	116.27	6.49	122.76	N/A	N/A	135	240	Peak
2	5850.000	71.23	6.57	77.80	-44.40	122.20	135	240	Peak
3	5855.000	72.25	6.59	78.83	-31.97	110.80	135	240	Peak
4	5875.000	63.01	6.65	69.66	-35.54	105.20	135	240	Peak
5	5925.000	57.91	6.81	64.72	-3.48	68.20	135	240	Peak
6	* 5968.215	61.02	6.97	67.98	-0.22	68.20	135	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

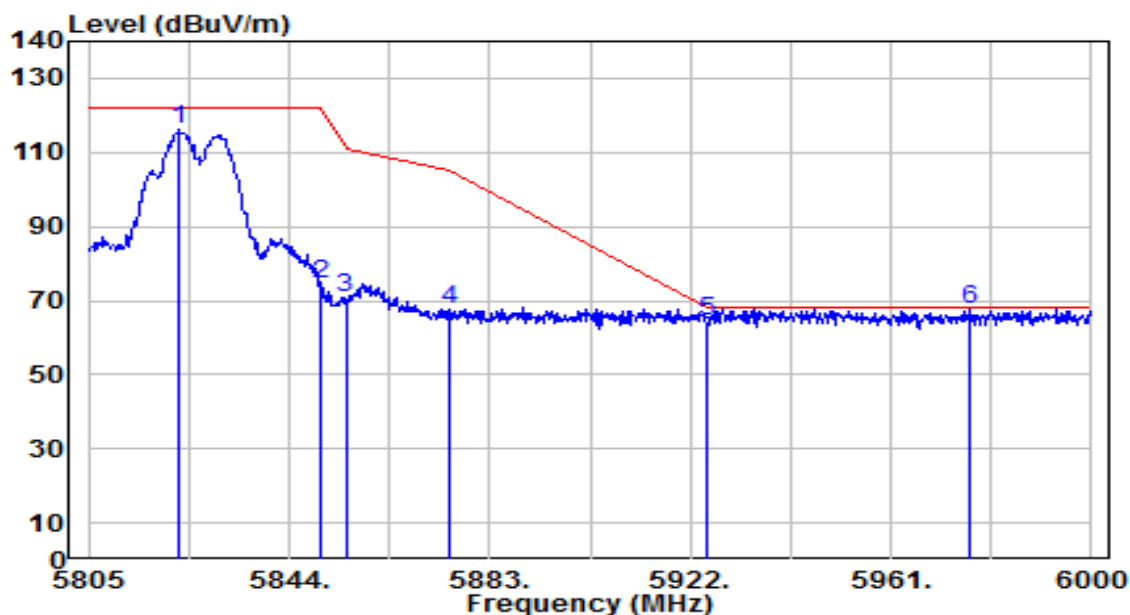


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.745	109.79	6.49	116.28	N/A	N/A	170	160	Peak
2	5850.000	68.06	6.57	74.63	-47.57	122.20	170	160	Peak
3	5855.000	64.13	6.59	70.71	-40.09	110.80	170	160	Peak
4	5875.000	60.72	6.65	67.37	-37.83	105.20	170	160	Peak
5	5925.000	57.79	6.81	64.60	-3.60	68.20	170	160	Peak
6	* 5976.210	60.85	7.00	67.84	-0.36	68.20	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

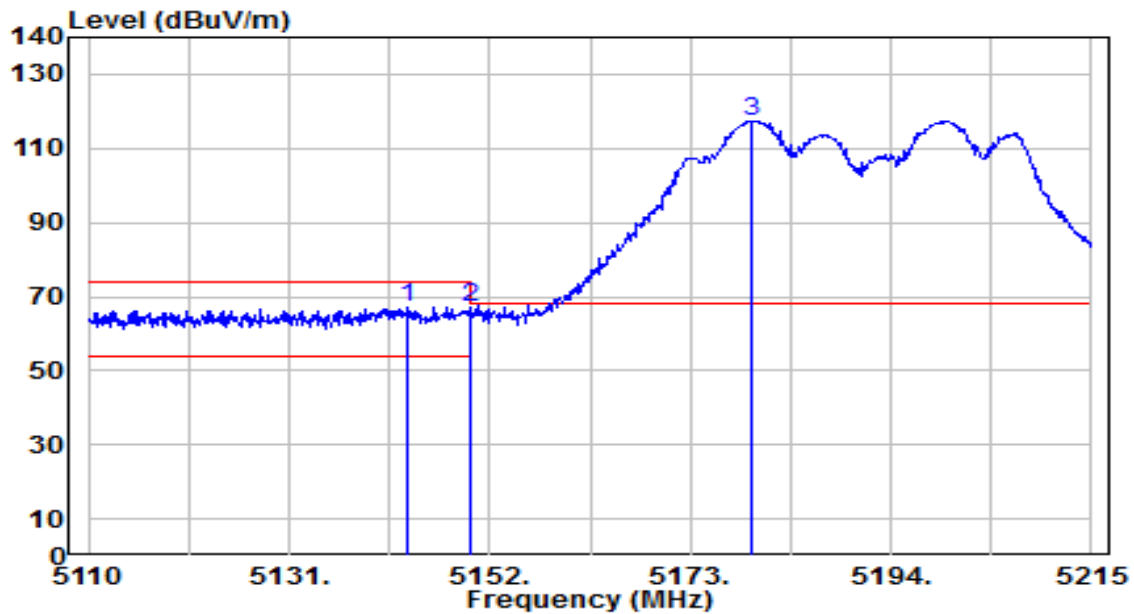


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.495	62.27	5.05	67.32	-6.68	74.00	295	125	Peak
2		5150.000	62.07	5.06	67.13	-6.87	74.00	295	125	Peak
3		5179.300	112.41	5.10	117.51	N/A	N/A	295	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

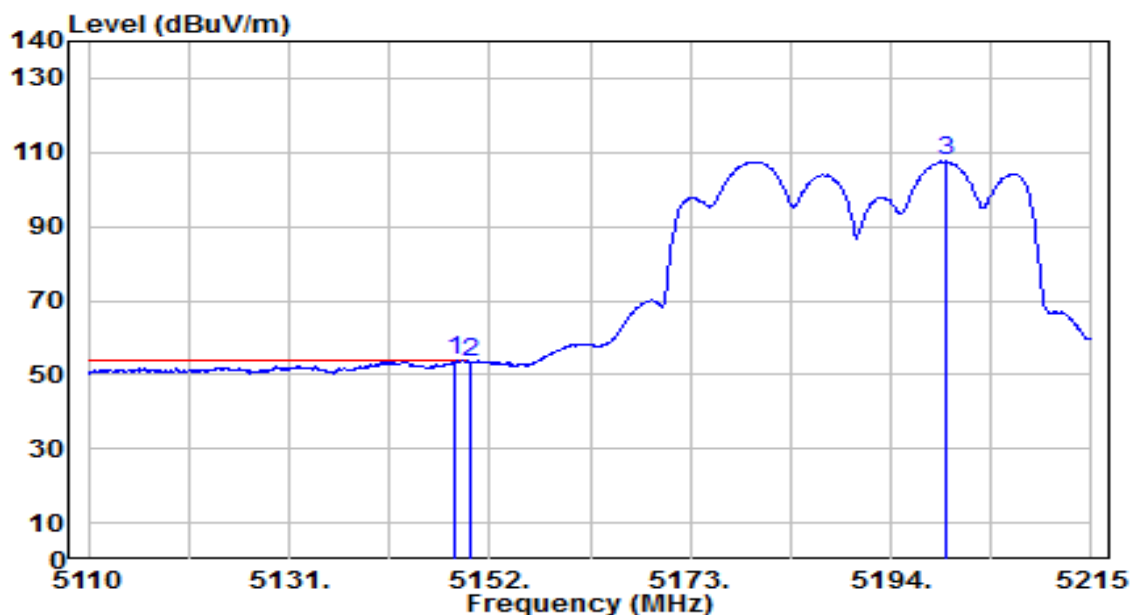


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.325	48.65	5.06	53.71	-0.29	54.00	295	125	Average
2		5150.000	48.31	5.06	53.37	-0.63	54.00	295	125	Average
3		5199.670	102.43	5.13	107.56	N/A	N/A	295	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

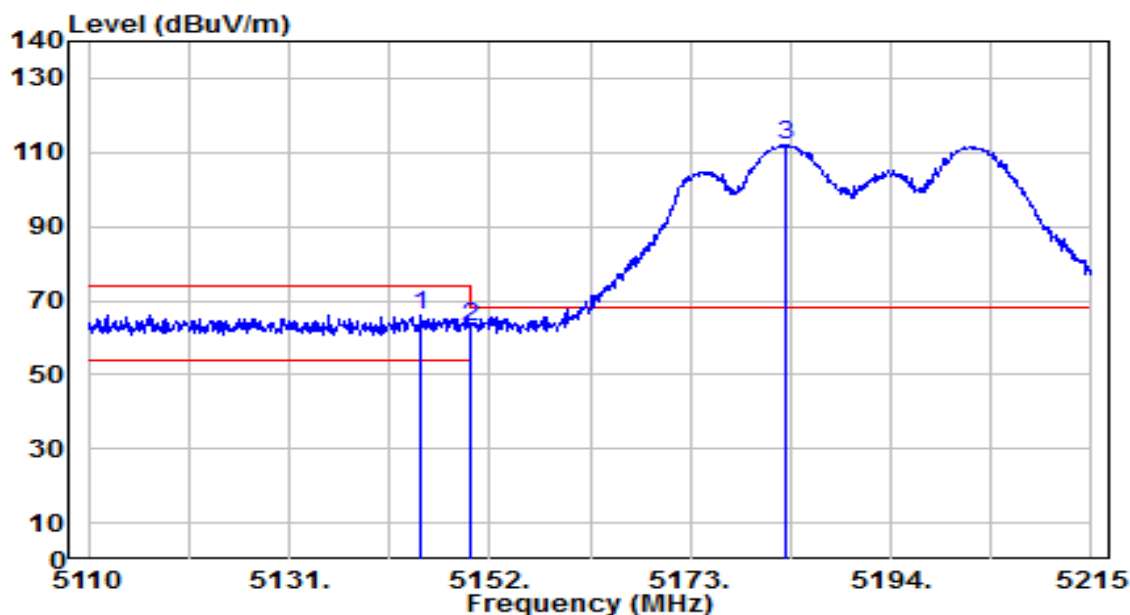


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.755	60.93	5.05	65.98	-8.02	74.00	120	180	Peak
2		5150.000	57.63	5.06	62.69	-11.31	74.00	120	180	Peak
3		5182.975	106.91	5.11	112.02	N/A	N/A	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

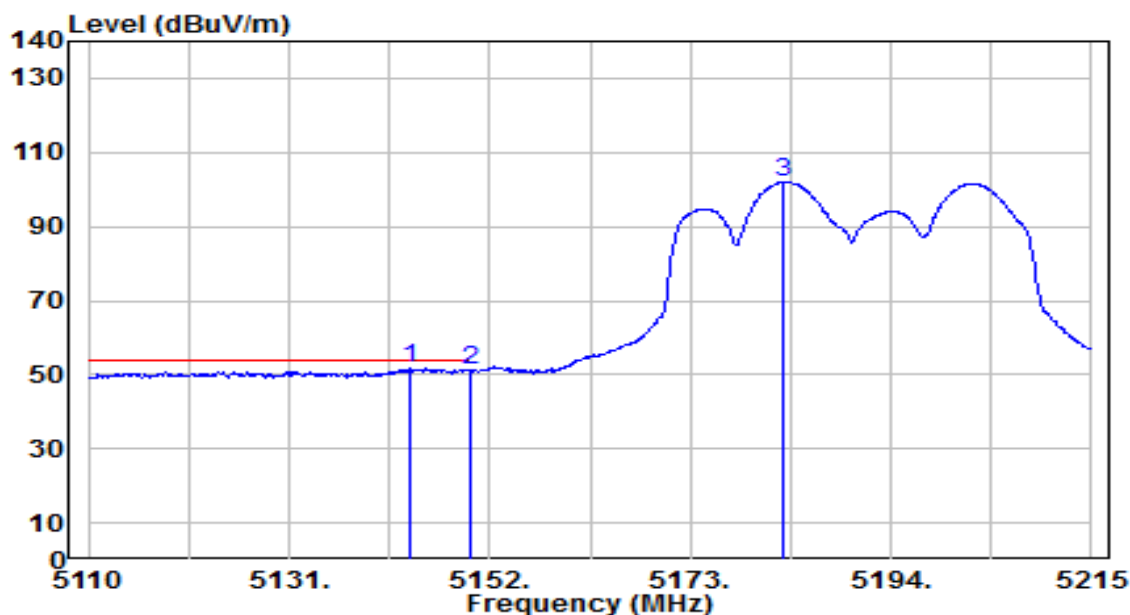


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.600	46.50	5.05	51.55	-2.45	54.00	120	180	Average
2		5150.000	46.26	5.06	51.32	-2.68	54.00	120	180	Average
3		5182.765	96.94	5.11	102.05	N/A	N/A	120	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

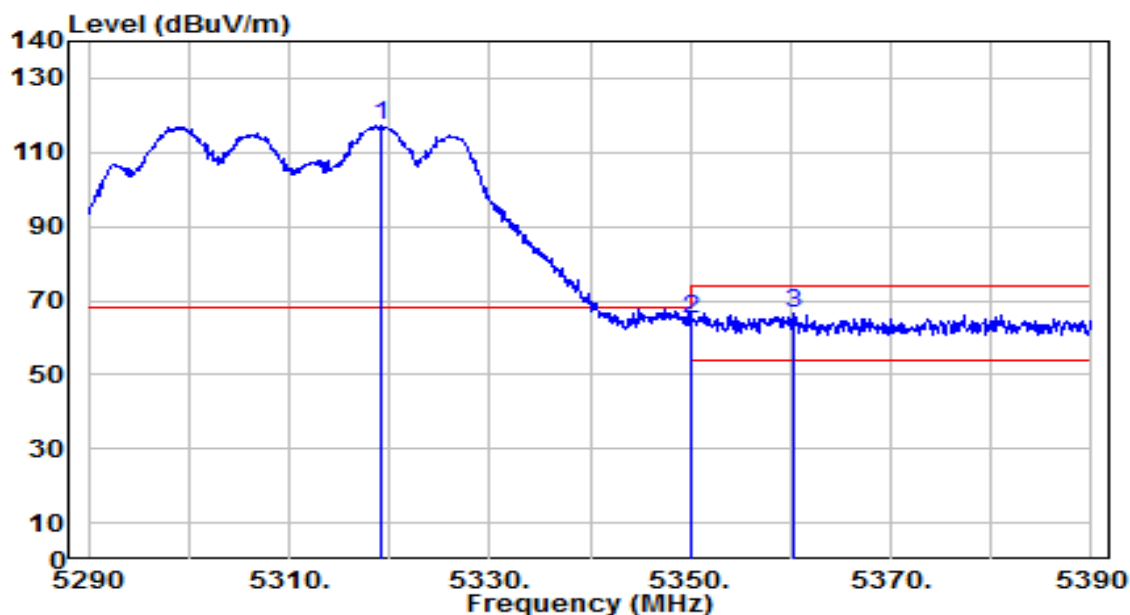


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5319.100	112.00	5.23	117.23	N/A	N/A	285	125	Peak
2	*	5350.000	59.96	5.25	65.21	-2.99	68.20	285	125	Peak
3		5360.400	61.08	5.26	66.34	-7.66	74.00	285	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

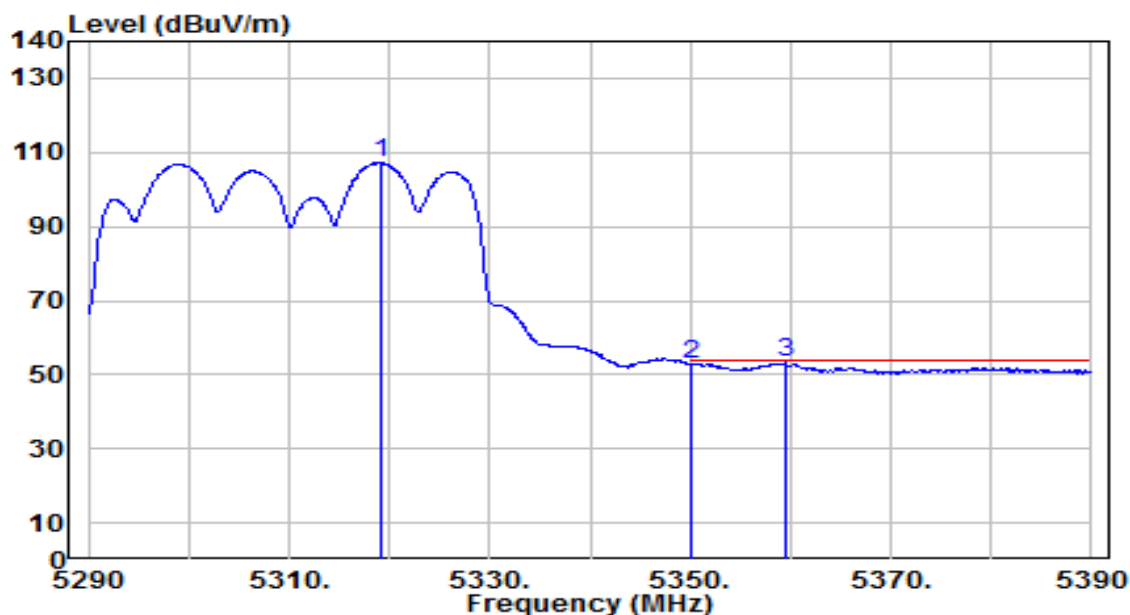


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.300	102.02	5.23	107.24	N/A	N/A	285	125	Average
2	5350.000	47.76	5.25	53.01	-0.99	54.00	285	125	Average
3	* 5359.400	47.87	5.26	53.13	-0.87	54.00	285	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

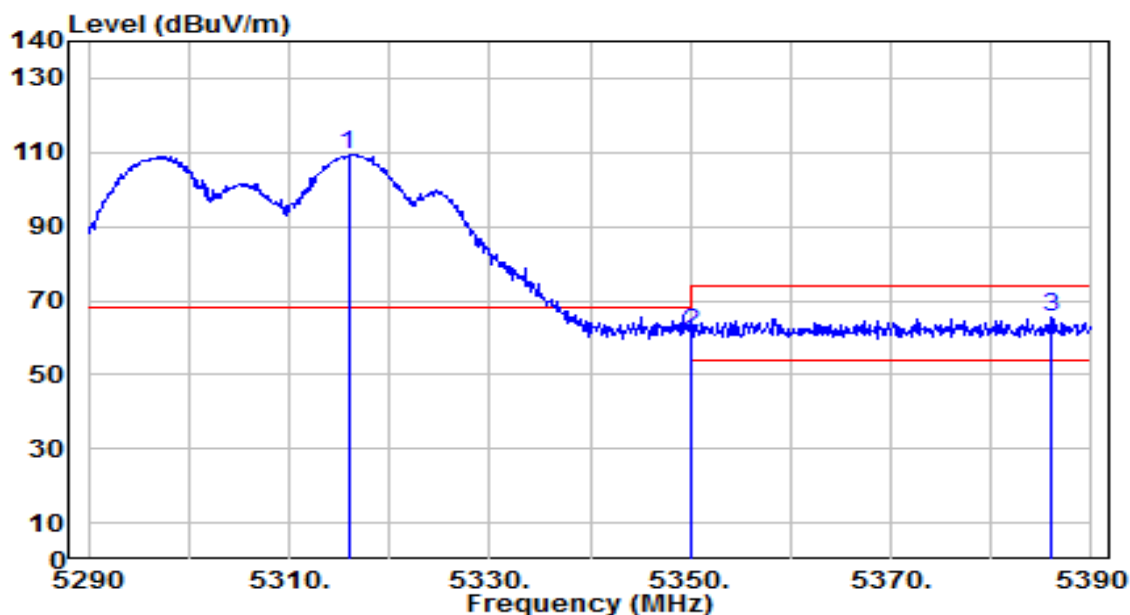


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5315.900	104.31	5.22	109.53	N/A	N/A	165	195	Peak
2	*	5350.000	55.86	5.25	61.11	-7.09	68.20	165	195	Peak
3		5386.000	60.36	5.29	65.65	-8.35	74.00	165	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

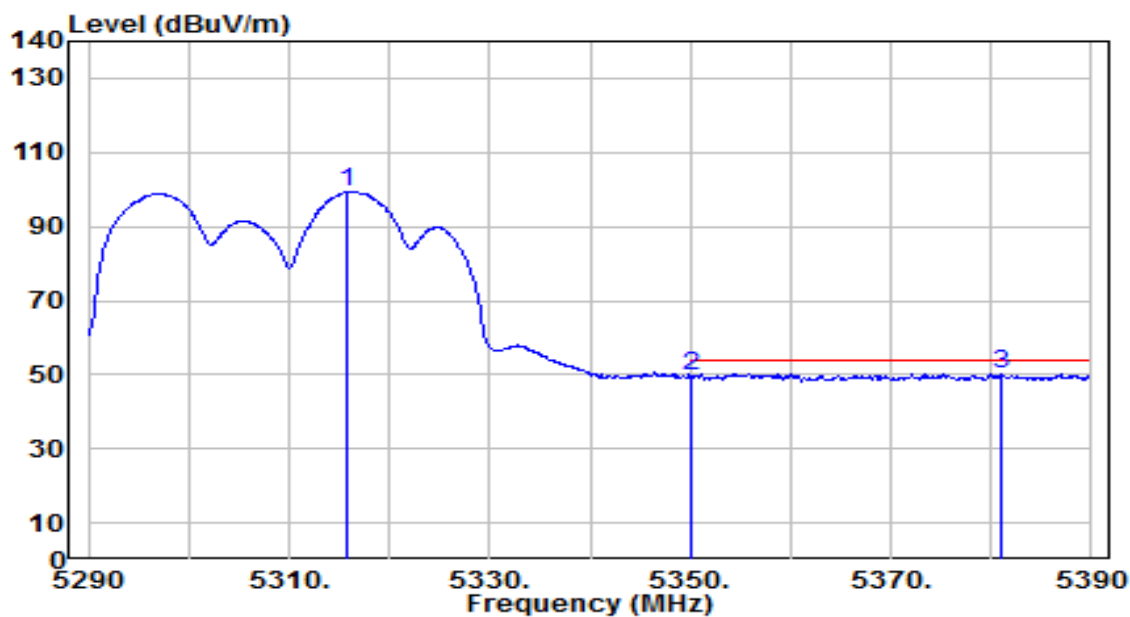


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.800	94.16	5.22	99.39	N/A	N/A	165	195	Average
2	5350.000	44.44	5.25	49.70	-4.30	54.00	165	195	Average
3	* 5381.000	45.13	5.28	50.41	-3.59	54.00	165	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

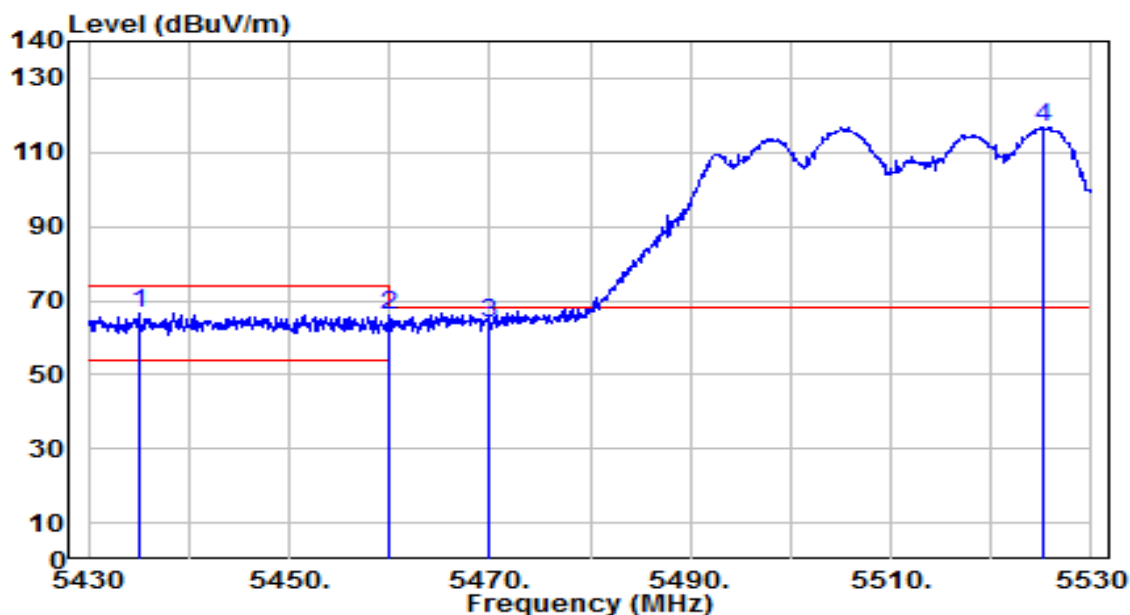


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5435.000	61.40	5.31	66.72	-7.28	74.00	245	130	Peak
2	*	5460.000	60.98	5.32	66.30	-1.90	68.20	245	130	Peak
3		5470.000	58.48	5.33	63.80	-4.40	68.20	245	130	Peak
4		5525.200	111.58	5.43	117.01	N/A	N/A	245	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

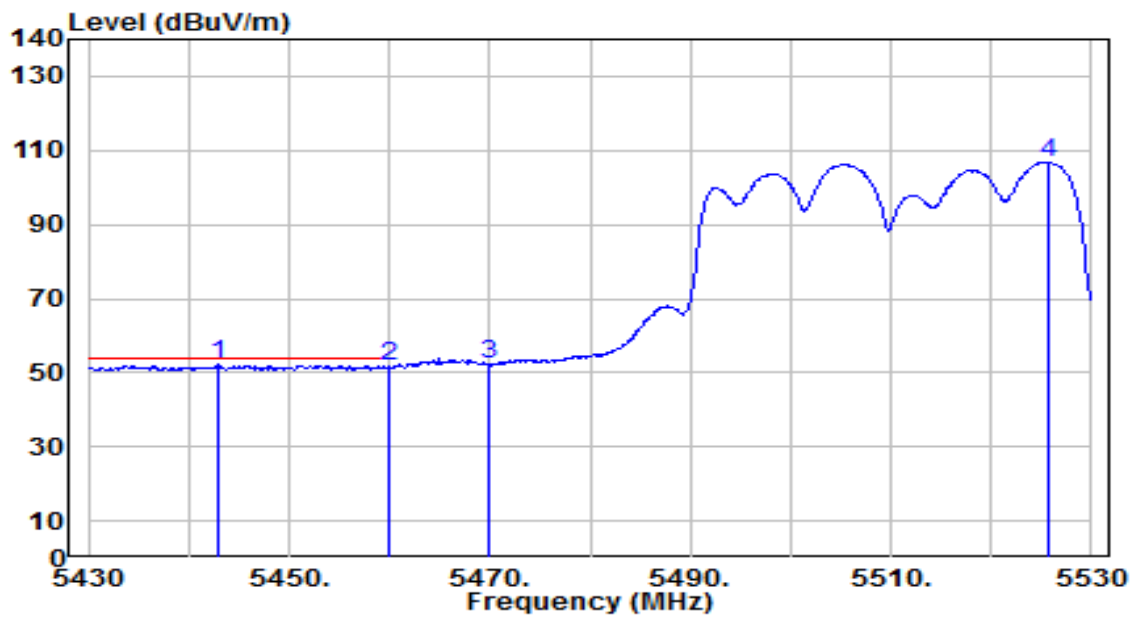


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5442.900	46.84	5.32	52.16	-1.84	54.00	245	130	Average
2		5460.000	46.28	5.32	51.61	-2.39	54.00	245	130	Average
3		5470.000	47.05	5.33	52.38	N/A	N/A	245	130	Average
4		5525.700	101.35	5.43	106.79	N/A	N/A	245	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

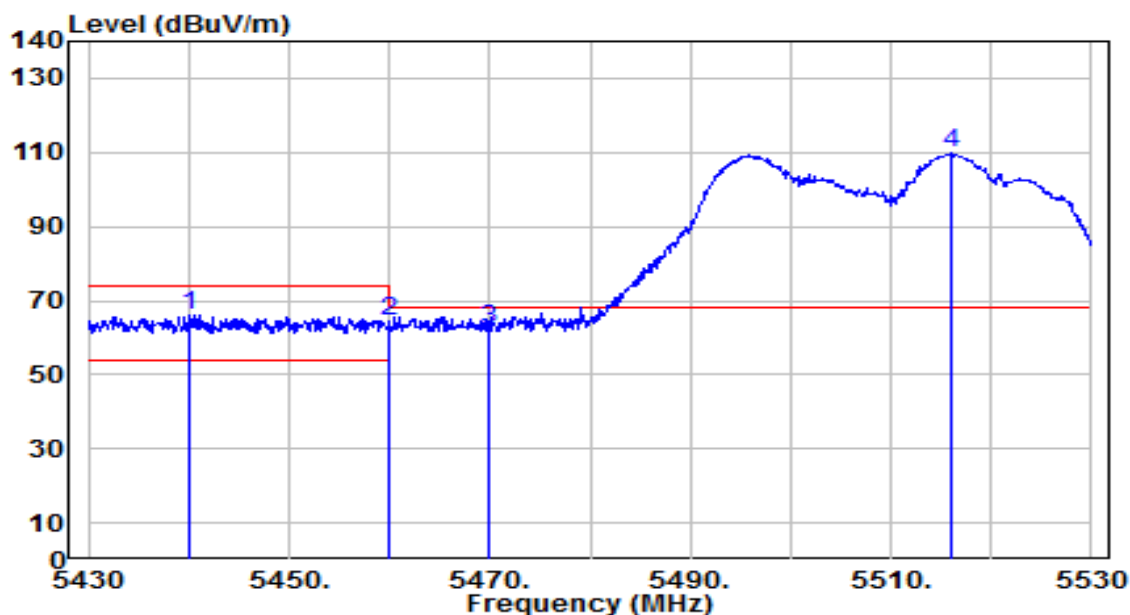


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5440.100	60.95	5.32	66.27	-7.73	74.00	140	200	Peak
2	*	5460.000	58.90	5.32	64.22	-3.98	68.20	140	200	Peak
3		5470.000	57.02	5.33	62.34	-5.86	68.20	140	200	Peak
4		5516.100	104.46	5.40	109.86	N/A	N/A	140	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

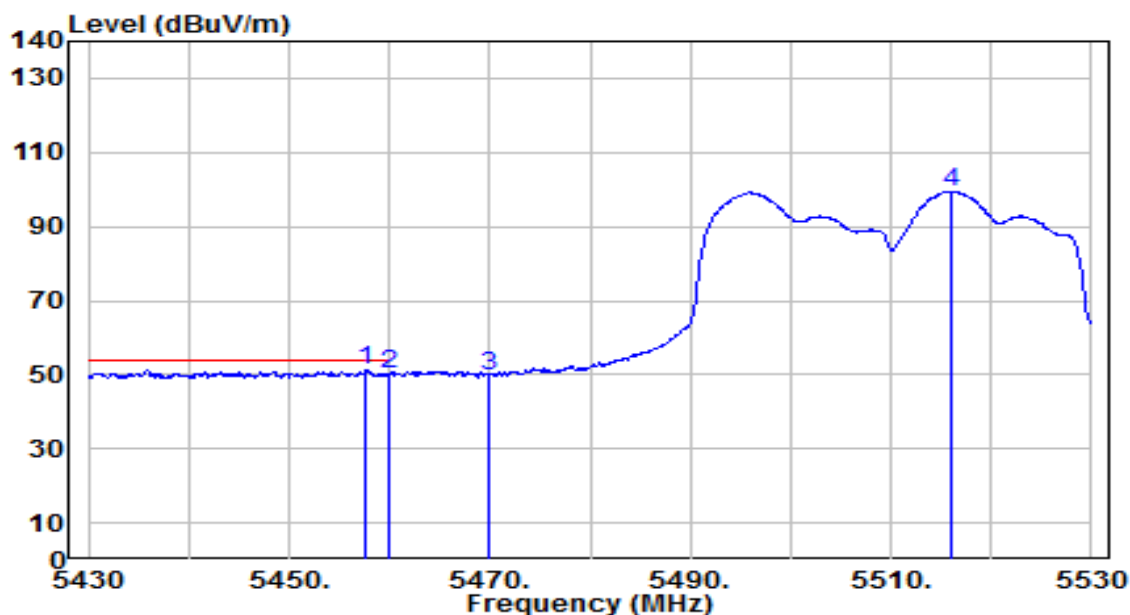


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.700	45.93	5.32	51.25	-2.75	54.00	140	200	Average
2		5460.000	44.78	5.32	50.11	-3.89	54.00	140	200	Average
3		5470.000	44.31	5.33	49.64	N/A	N/A	140	200	Average
4		5516.100	93.97	5.40	99.37	N/A	N/A	140	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

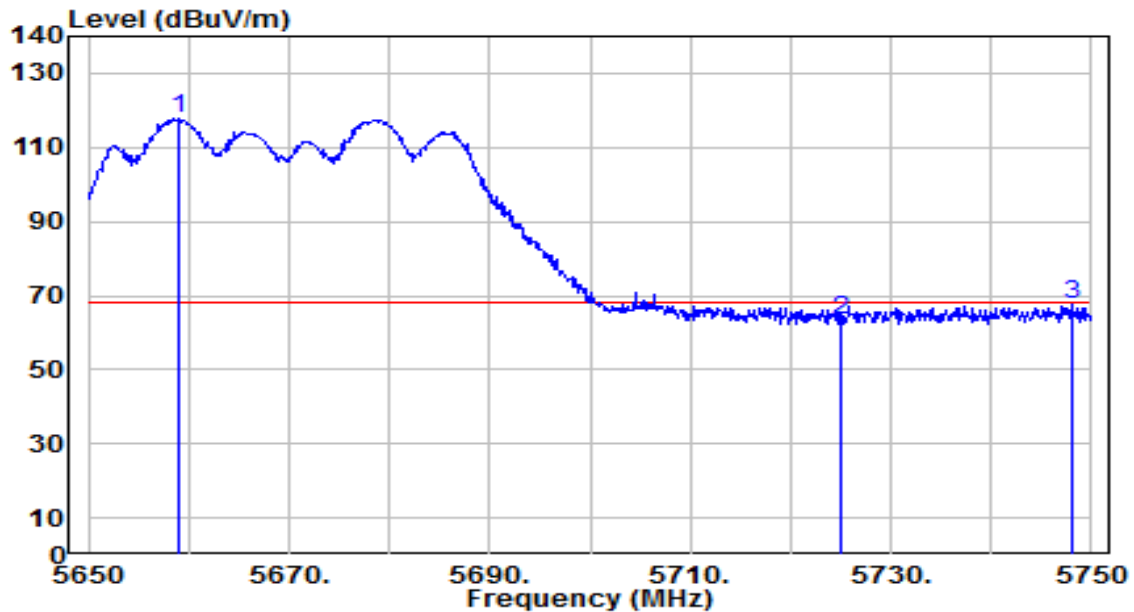


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5659.100	111.75	5.91	117.66	N/A	N/A	265	135	Peak
2	5725.000	57.39	6.14	63.53	-4.67	68.20	265	135	Peak
3	* 5748.100	61.32	6.23	67.55	-0.65	68.20	265	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

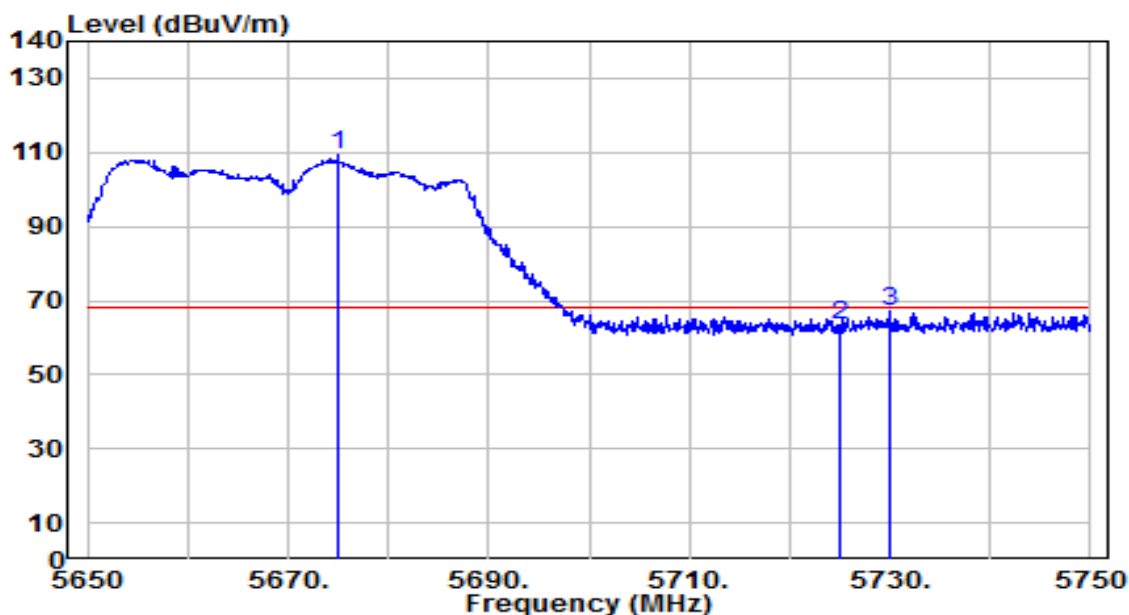


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5675.000	103.15	5.97	109.11	N/A	N/A	115	200	Peak
2	5725.000	57.16	6.14	63.30	-4.90	68.20	115	200	Peak
3	* 5730.000	61.08	6.16	67.24	-0.96	68.20	115	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

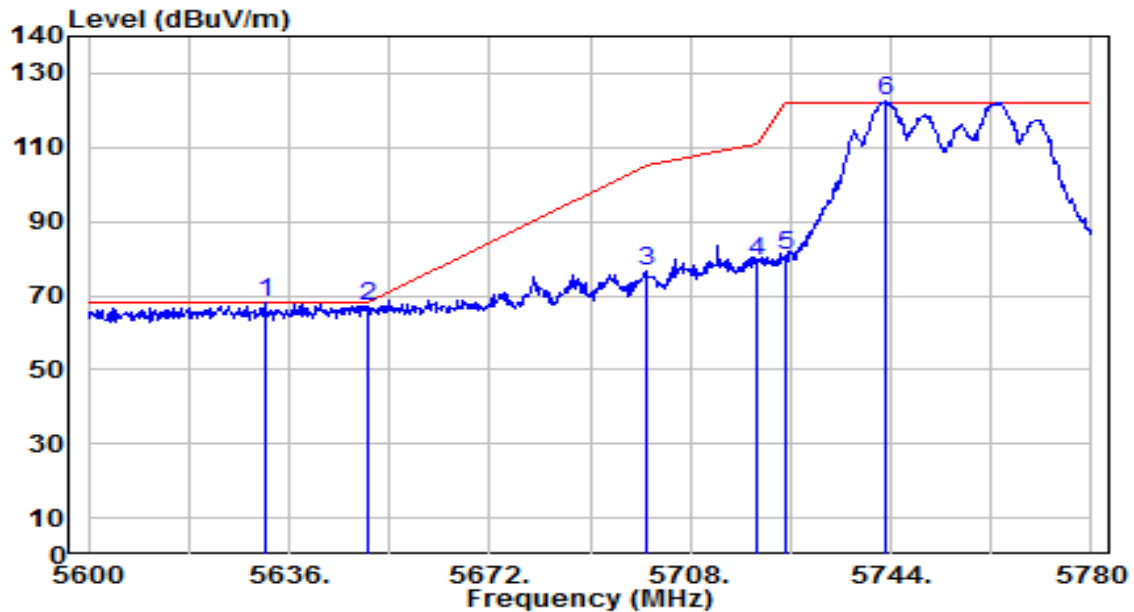


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5631.680	62.10	5.82	67.92	-0.28	68.20	260	140	Peak
2		5650.000	61.23	5.88	67.11	-1.09	68.20	260	140	Peak
3		5700.000	70.35	6.05	76.41	-28.79	105.20	260	140	Peak
4		5720.000	73.12	6.13	79.25	-31.55	110.80	260	140	Peak
5		5725.000	74.65	6.14	80.80	-41.40	122.20	260	140	Peak
6		5743.280	116.28	6.21	122.49	N/A	N/A	260	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

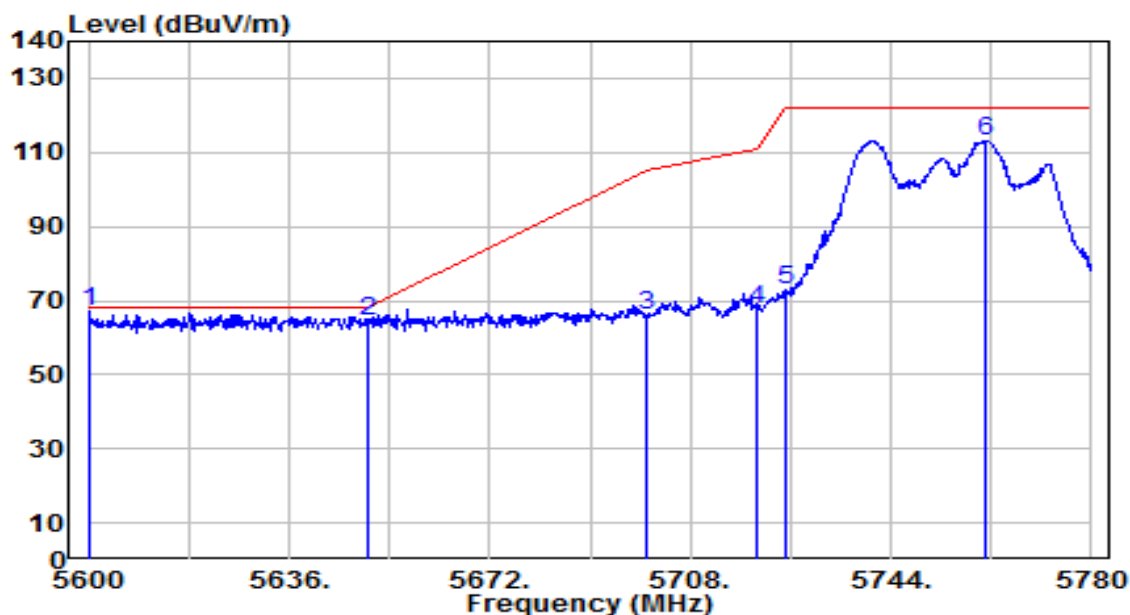


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5600.360	61.20	5.71	66.91	-1.29	68.20	150	205	Peak
2		5650.000	58.70	5.88	64.58	-3.62	68.20	150	205	Peak
3		5700.000	59.94	6.05	65.99	-39.21	105.20	150	205	Peak
4		5720.000	61.52	6.13	67.64	-43.16	110.80	150	205	Peak
5		5725.000	66.85	6.14	72.99	-49.21	122.20	150	205	Peak
6		5761.100	106.75	6.28	113.03	N/A	N/A	150	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

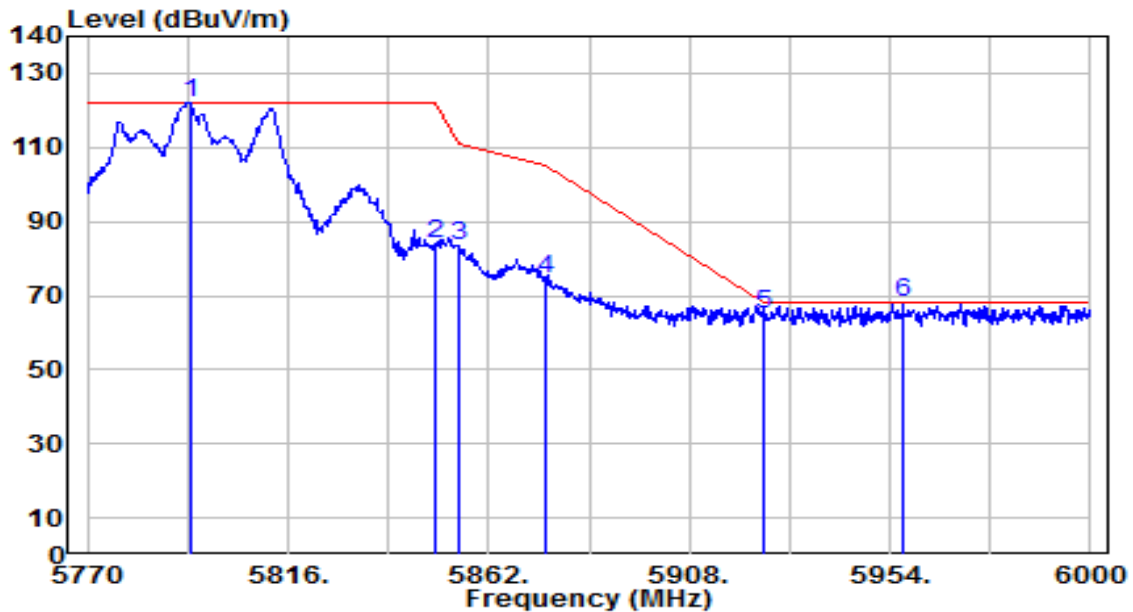


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.460	115.84	6.39	122.24	N/A	N/A	135	240	Peak
2	5850.000	77.24	6.57	83.81	-38.39	122.20	135	240	Peak
3	5855.000	76.90	6.59	83.49	-27.31	110.80	135	240	Peak
4	5875.000	67.84	6.65	74.49	-30.71	105.20	135	240	Peak
5	5925.000	58.38	6.81	65.20	-3.00	68.20	135	240	Peak
6	* 5956.990	60.99	6.93	67.92	-0.28	68.20	135	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

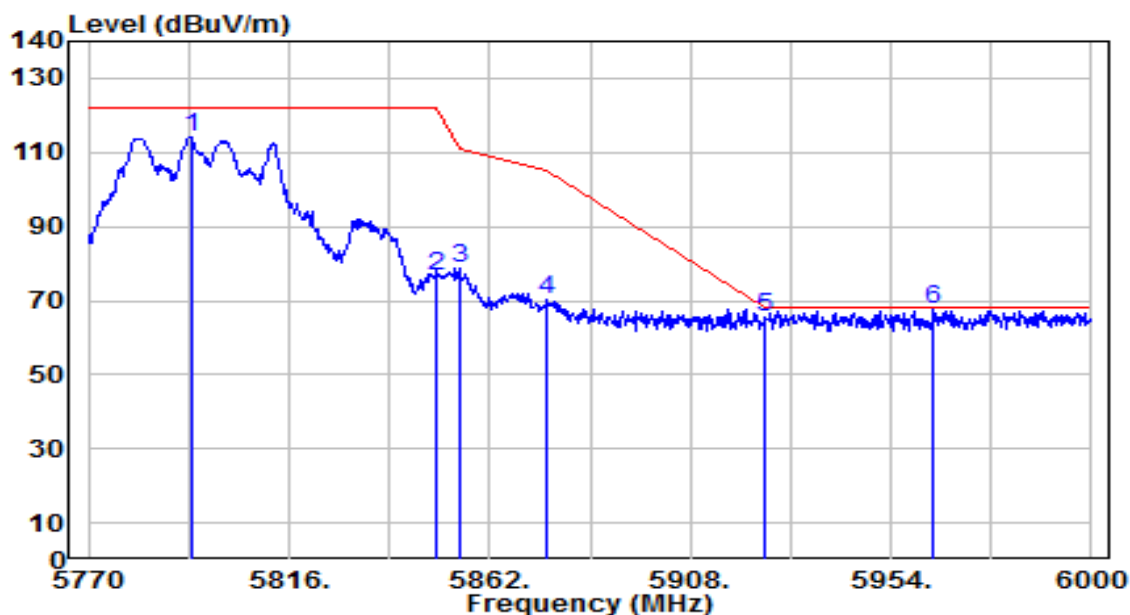


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.460	107.89	6.39	114.29	N/A	N/A	170	160	Peak
2	5850.000	70.17	6.57	76.74	-45.46	122.20	170	160	Peak
3	5855.000	72.26	6.59	78.85	-31.95	110.80	170	160	Peak
4	5875.000	63.72	6.65	70.36	-34.84	105.20	170	160	Peak
5	5925.000	58.53	6.81	65.35	-2.85	68.20	170	160	Peak
6	* 5963.660	60.57	6.95	67.52	-0.68	68.20	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

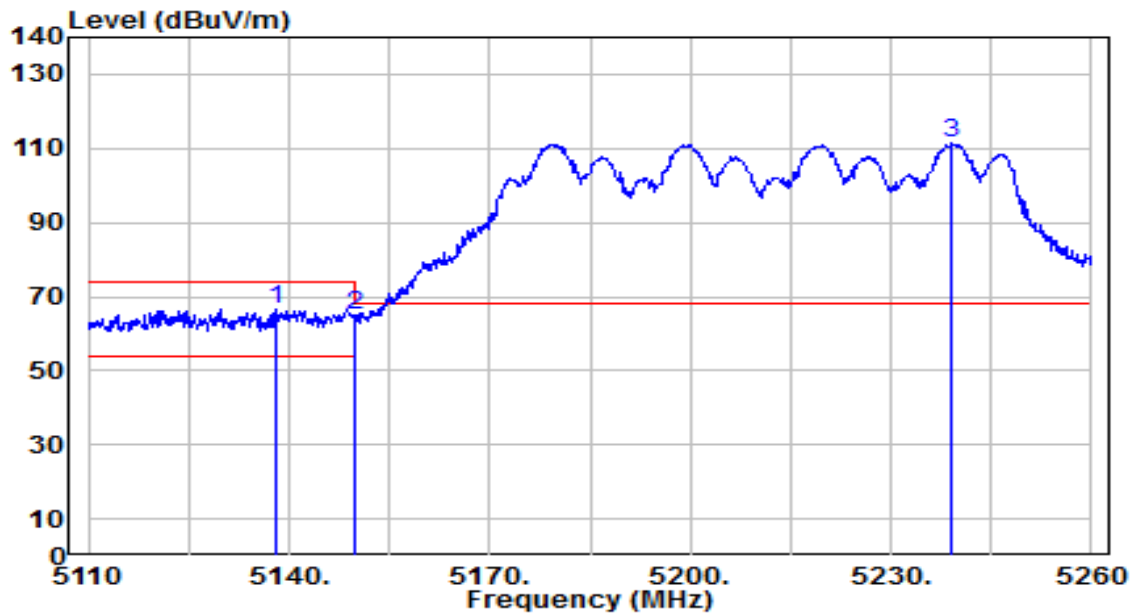


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.200	61.51	5.04	66.55	-7.45	74.00	295	125	Peak
2		5150.000	60.13	5.06	65.19	-8.81	74.00	295	125	Peak
3		5239.000	106.49	5.16	111.65	N/A	N/A	295	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

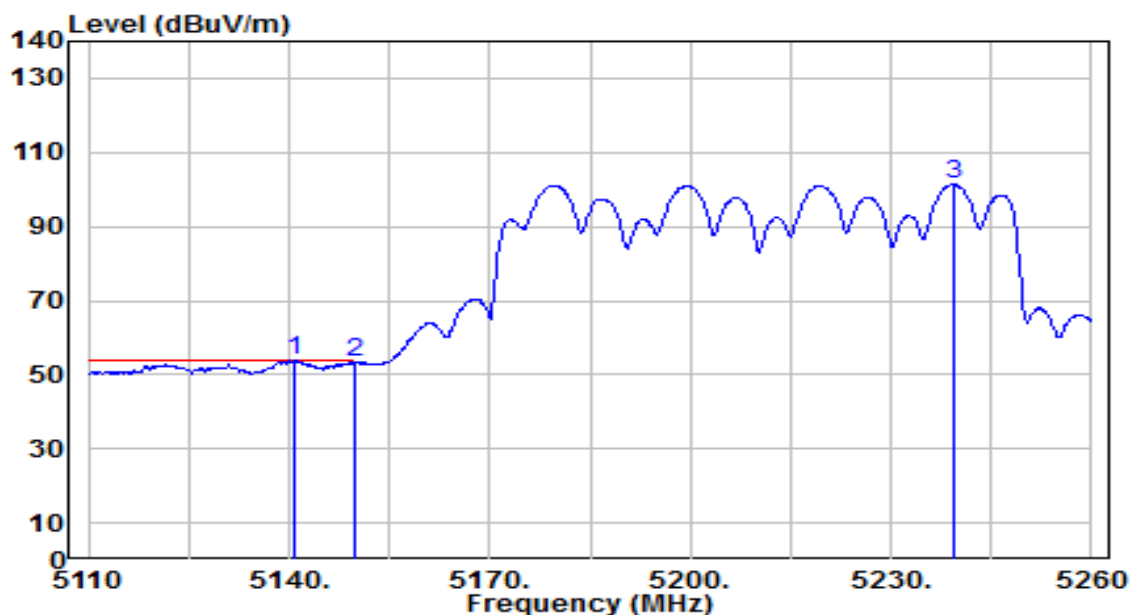


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.750	48.70	5.05	53.74	-0.26	54.00	295	125	Average
2		5150.000	48.24	5.06	53.30	-0.70	54.00	295	125	Average
3		5239.600	96.24	5.16	101.40	N/A	N/A	295	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

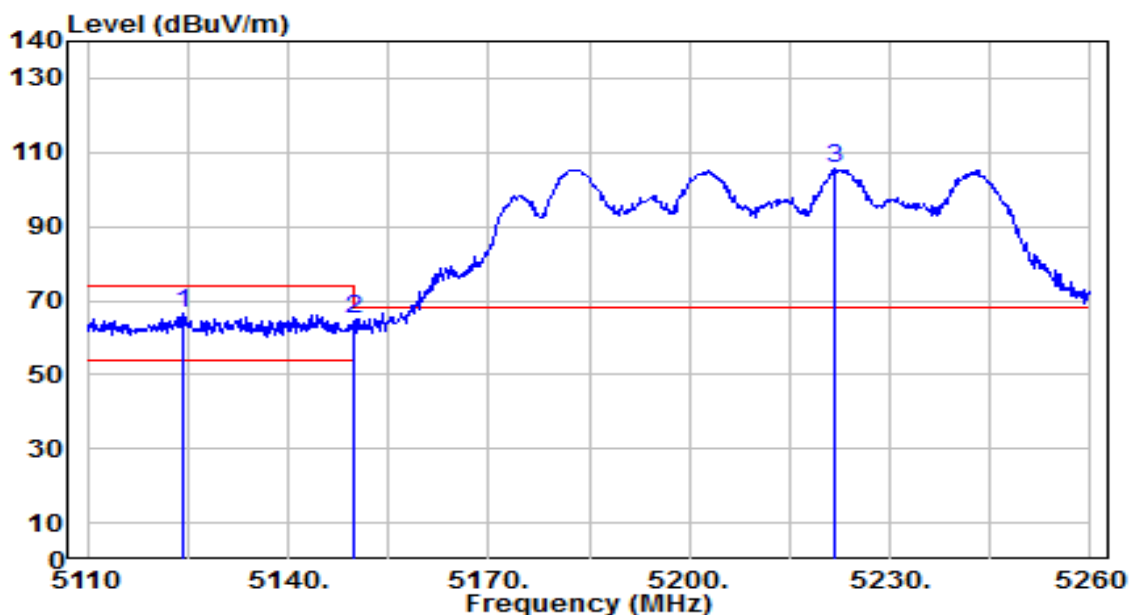


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5124.250	61.31	5.02	66.33	-7.67	74.00	120	180	Peak
2		5150.000	59.76	5.06	64.82	-9.18	74.00	120	180	Peak
3		5221.900	100.25	5.15	105.40	N/A	N/A	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

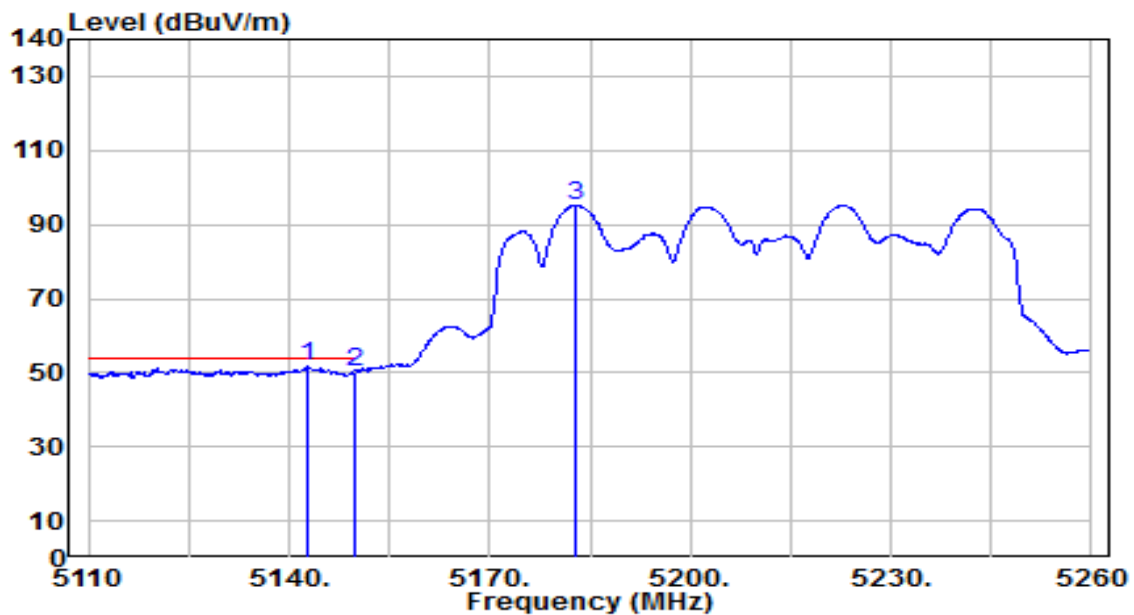


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.700	46.54	5.05	51.59	-2.41	54.00	120	180	Average
2		5150.000	45.37	5.06	50.43	-3.57	54.00	120	180	Average
3		5182.750	90.22	5.11	95.33	N/A	N/A	120	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

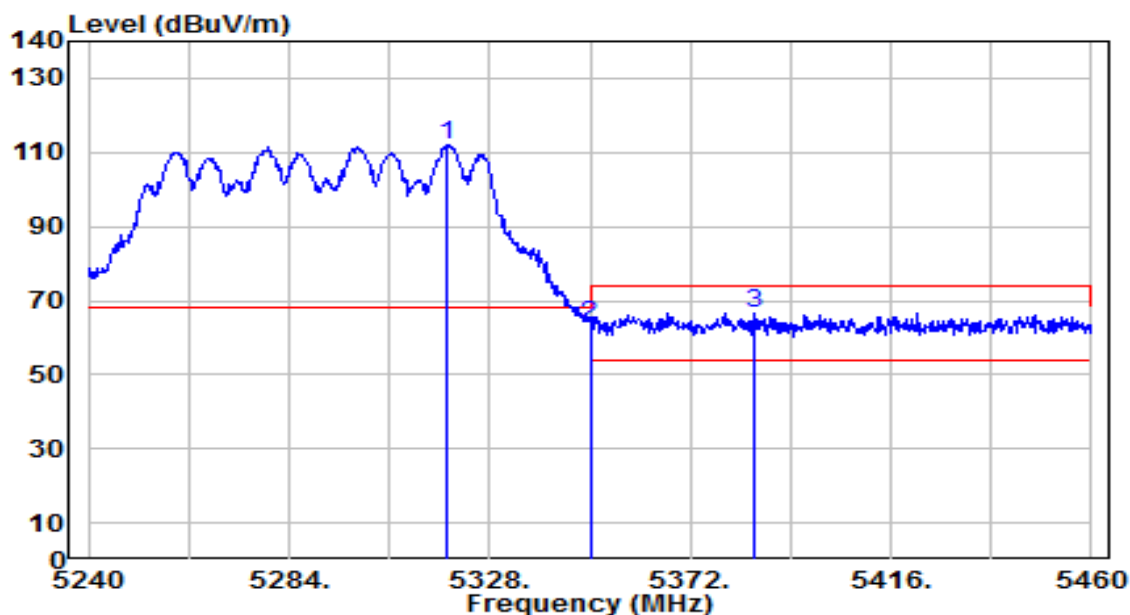


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5318.760	106.79	5.23	112.01	N/A	N/A	285	125	Peak
2	*	5350.000	58.03	5.25	63.28	-4.92	68.20	285	125	Peak
3		5385.860	61.23	5.29	66.52	-7.48	74.00	285	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

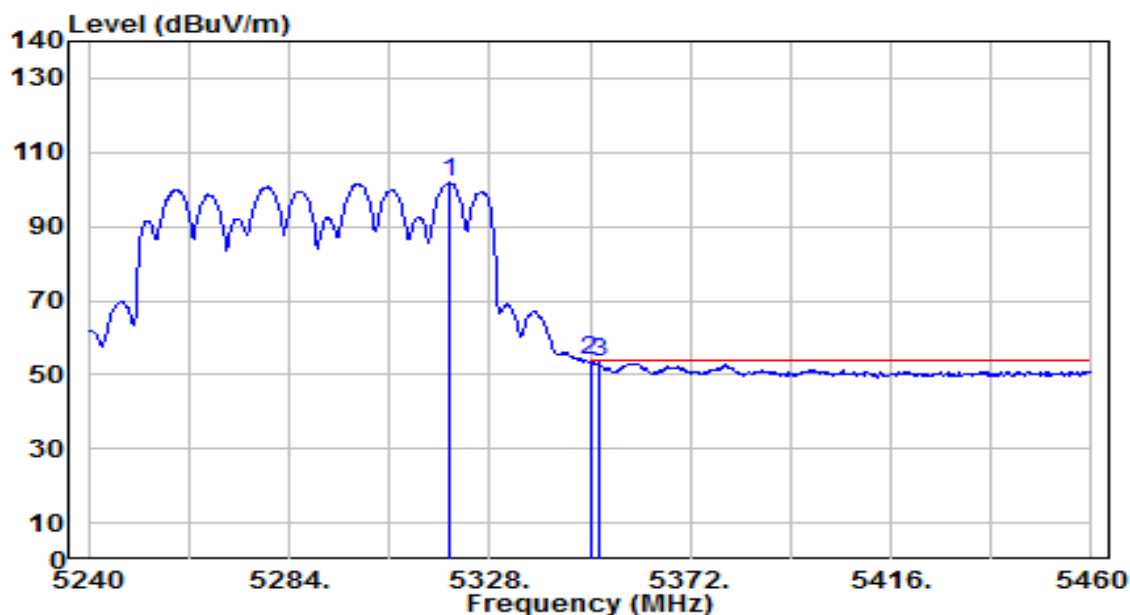


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5319.200	96.61	5.23	101.84	N/A	N/A	285	125	Average
2	*	5350.000	48.49	5.25	53.74	-0.26	54.00	285	125	Average
3		5351.760	47.88	5.26	53.14	-0.86	54.00	285	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

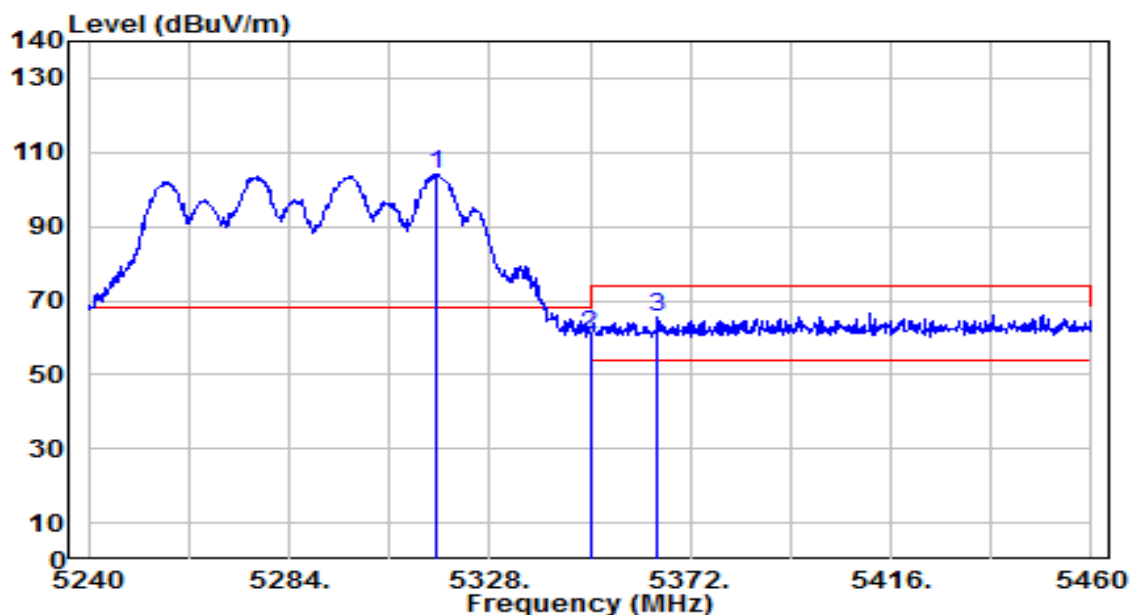


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5316.560	98.90	5.22	104.13	N/A	N/A	165	195	Peak
2	*	5350.000	55.42	5.25	60.67	-7.53	68.20	165	195	Peak
3		5364.960	60.10	5.27	65.36	-8.64	74.00	165	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

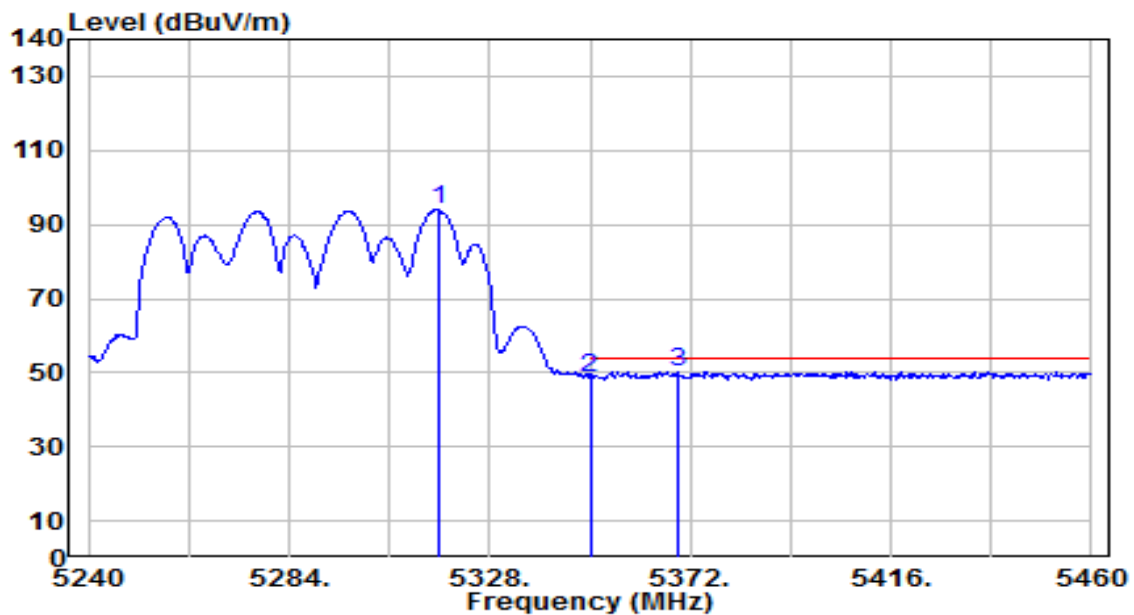


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.780	88.71	5.23	93.93	N/A	N/A	165	195	Average
2	5350.000	43.45	5.25	48.70	-5.30	54.00	165	195	Average
3	* 5369.140	45.01	5.27	50.29	-3.72	54.00	165	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

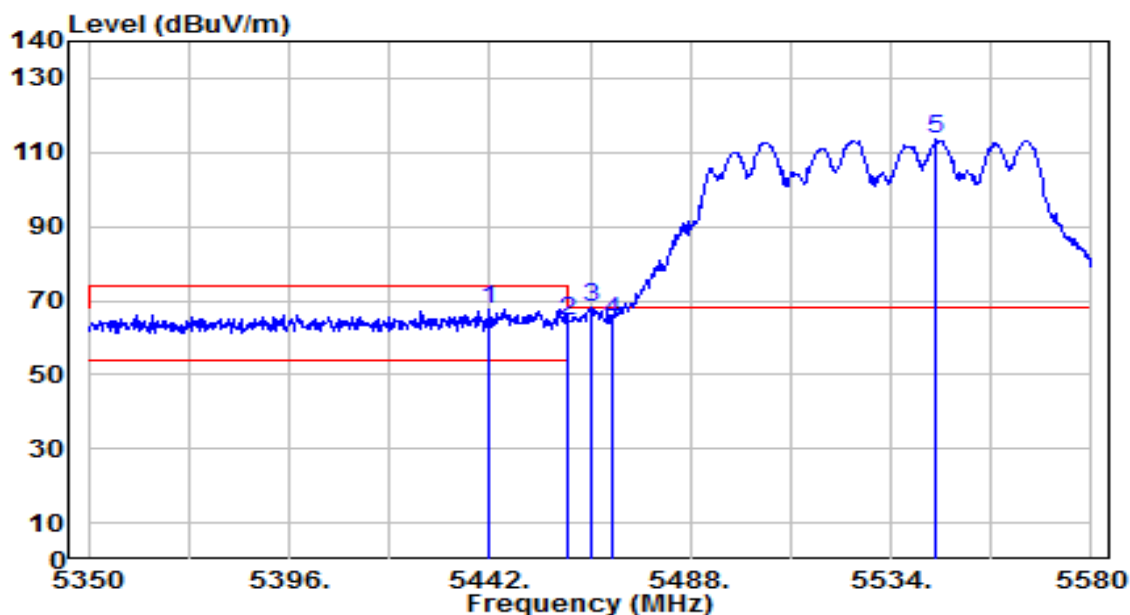


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.540	62.10	5.32	67.42	-6.58	74.00	245	130	Peak
2	5460.000	59.37	5.32	64.69	-3.51	68.20	245	130	Peak
3	* 5465.230	62.61	5.33	67.93	-0.27	68.20	245	130	Peak
4	5470.000	59.23	5.33	64.56	-3.64	68.20	245	130	Peak
5	5544.350	107.97	5.50	113.48	N/A	N/A	245	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

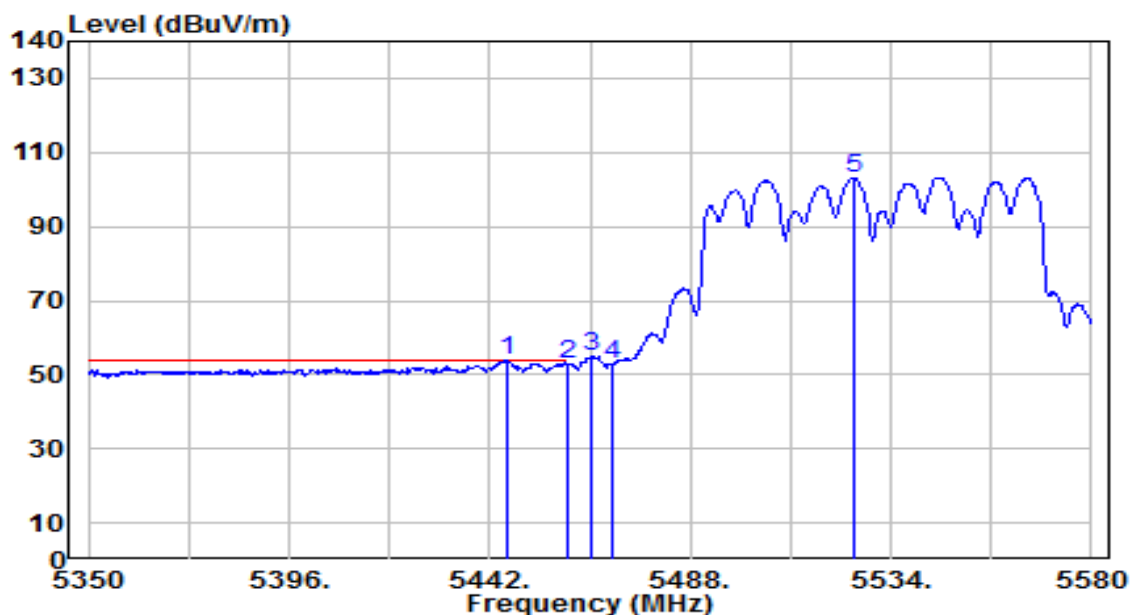


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5445.910	48.52	5.32	53.84	-0.16	54.00	245	130	Average
2		5460.000	47.56	5.32	52.88	-1.12	54.00	245	130	Average
3		5465.460	49.64	5.33	54.96	N/A	N/A	245	130	Average
4		5470.000	47.38	5.33	52.70	N/A	N/A	245	130	Average
5		5525.490	97.76	5.43	103.19	N/A	N/A	245	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

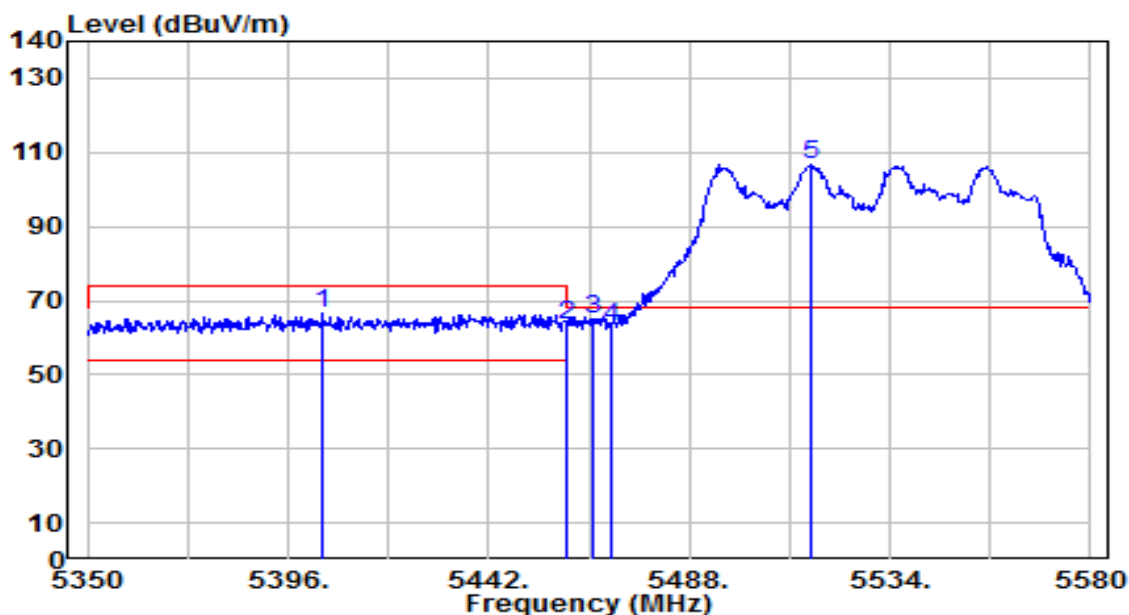


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5404.050	61.14	5.30	66.44	-7.56	74.00	140	200	Peak
2	5460.000	58.14	5.32	63.46	-4.74	68.20	140	200	Peak
3	* 5465.690	59.72	5.33	65.05	-3.15	68.20	140	200	Peak
4	5470.000	57.63	5.33	62.96	-5.24	68.20	140	200	Peak
5	5515.830	101.36	5.40	106.75	N/A	N/A	140	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

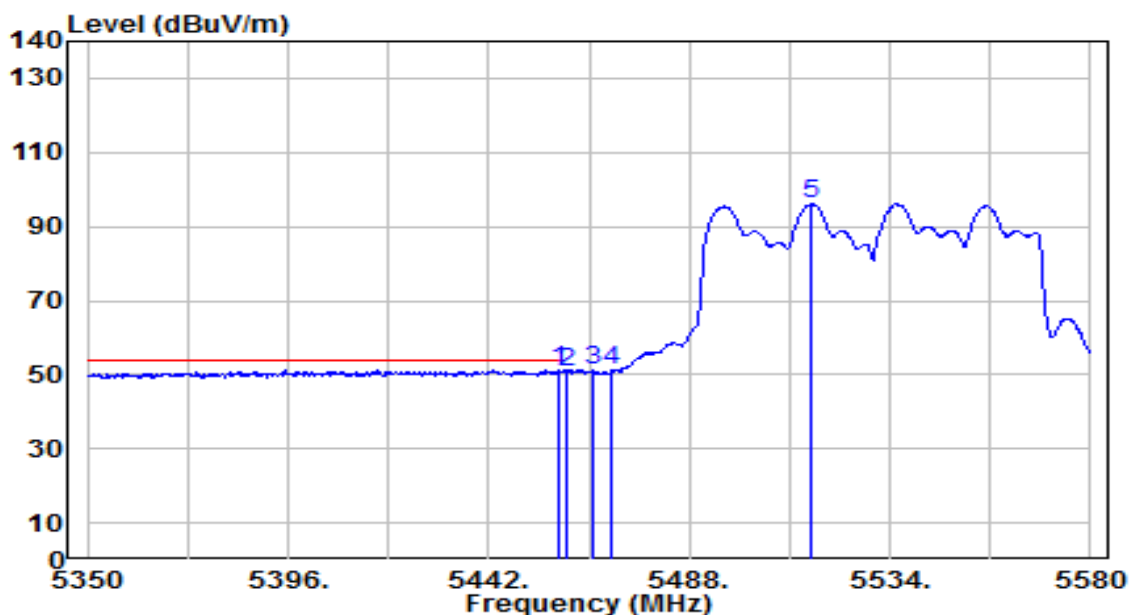


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.870	45.88	5.32	51.21	-2.79	54.00	140	200	Average
2		5460.000	45.40	5.32	50.72	-3.28	54.00	140	200	Average
3		5465.690	45.83	5.33	51.16	N/A	N/A	140	200	Average
4		5470.000	46.02	5.33	51.35	N/A	N/A	140	200	Average
5		5515.830	90.71	5.40	96.11	N/A	N/A	140	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

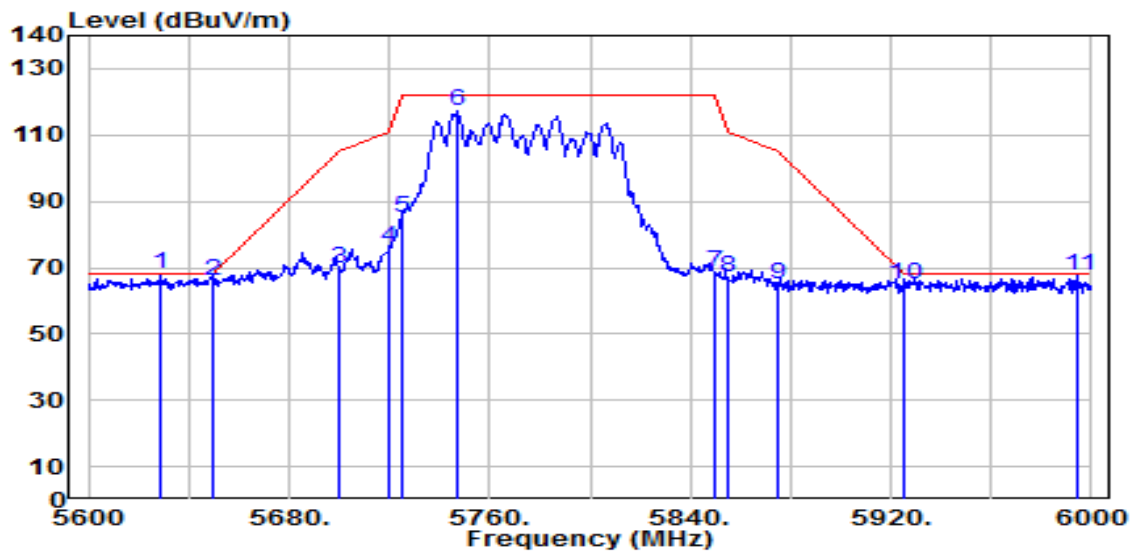


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5628.400	62.14	5.80	67.94	-0.26	68.20	225	115	Peak
2		5650.000	60.08	5.88	65.96	-2.24	68.20	225	115	Peak
3		5700.000	63.42	6.05	69.47	-35.73	105.20	225	115	Peak
4		5720.000	70.07	6.13	76.20	-34.60	110.80	225	115	Peak
5		5725.000	79.10	6.14	85.25	-36.95	122.20	225	115	Peak
6		5747.200	111.29	6.22	117.51	N/A	N/A	225	115	Peak
7		5850.000	62.01	6.57	68.58	-53.62	122.20	225	115	Peak
8		5855.000	60.34	6.59	66.92	-43.88	110.80	225	115	Peak
9		5875.000	58.51	6.65	65.16	-40.04	105.20	225	115	Peak
10		5925.000	58.11	6.81	64.93	-3.27	68.20	225	115	Peak
11		5994.800	60.46	7.06	67.52	-0.68	68.20	225	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

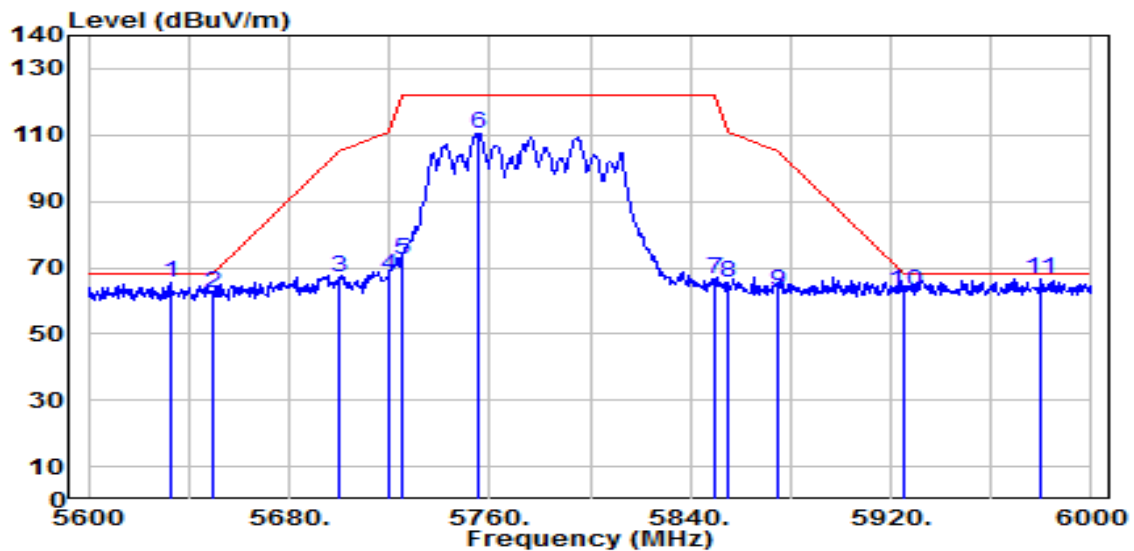


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5632.400	59.59	5.82	65.40	-2.80	68.20	155	160	Peak
2	5650.000	56.34	5.88	62.22	-5.98	68.20	155	160	Peak
3	5700.000	60.94	6.05	67.00	-38.20	105.20	155	160	Peak
4	5720.000	61.75	6.13	67.87	-42.93	110.80	155	160	Peak
5	5725.000	65.99	6.14	72.13	-50.07	122.20	155	160	Peak
6	5755.200	104.42	6.25	110.67	N/A	N/A	155	160	Peak
7	5850.000	60.03	6.57	66.60	-55.60	122.20	155	160	Peak
8	5855.000	58.91	6.59	65.50	-45.30	110.80	155	160	Peak
9	5875.000	56.42	6.65	63.07	-42.13	105.20	155	160	Peak
10	5925.000	55.80	6.81	62.61	-5.59	68.20	155	160	Peak
11	* 5979.600	59.49	7.01	66.50	-1.70	68.20	155	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

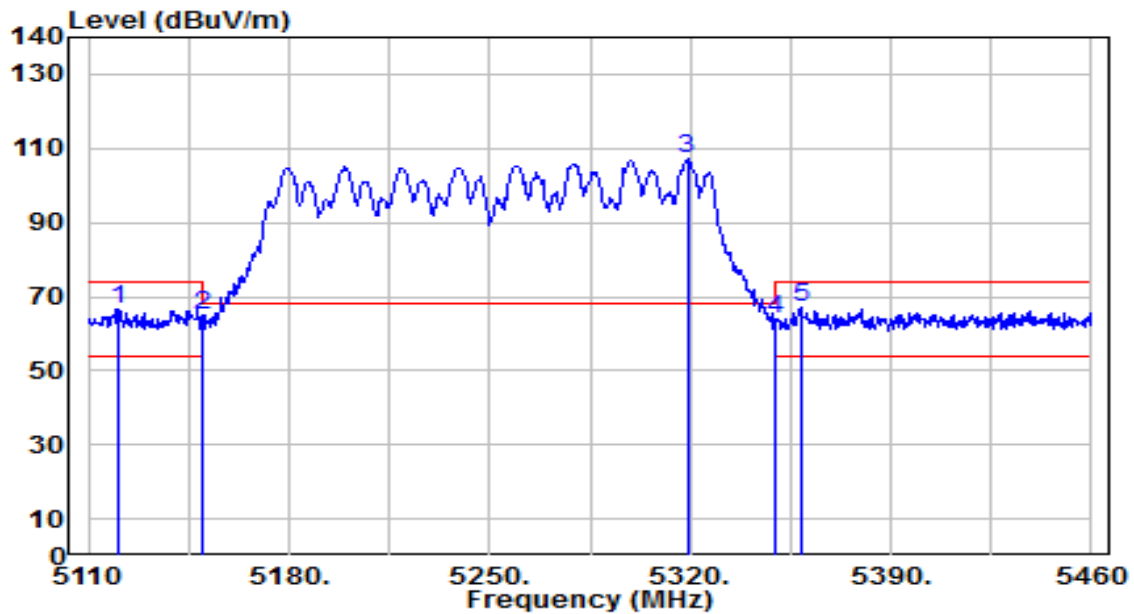


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5120.850	61.50	5.02	66.51	-7.49	74.00	295	125	Peak
2	5150.000	60.00	5.06	65.06	-8.94	74.00	295	125	Peak
3	5318.950	101.76	5.23	106.99	N/A	N/A	295	125	Peak
4	* 5350.000	58.80	5.25	64.05	-4.15	68.20	295	125	Peak
5	5358.500	61.68	5.26	66.94	-7.06	74.00	295	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

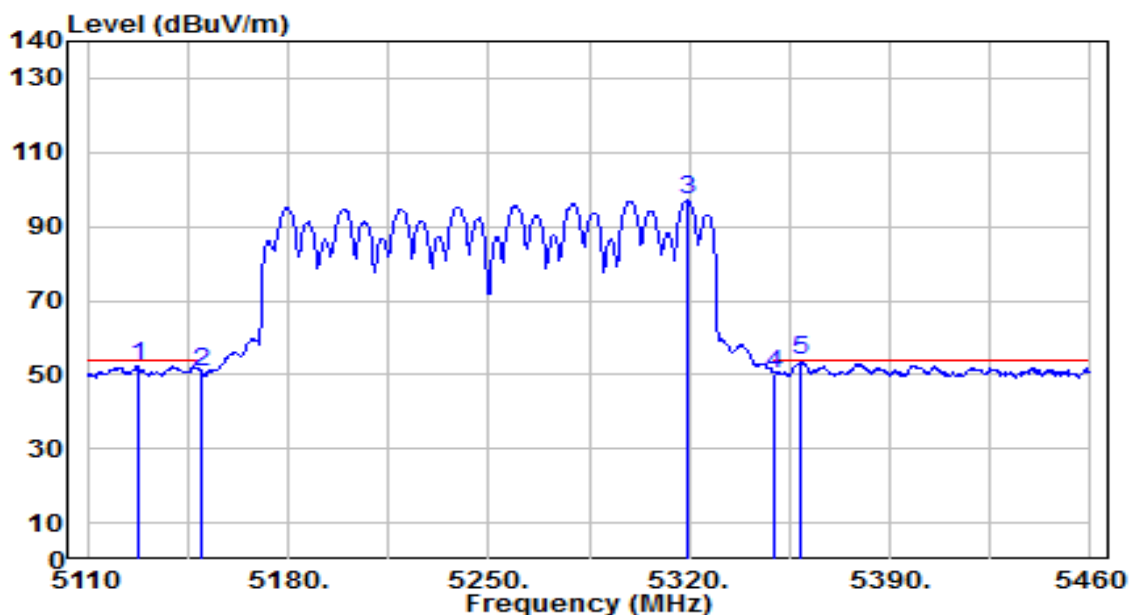


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5128.200	47.33	5.03	52.36	-1.64	54.00	295	125	Average
2	5150.000	45.60	5.06	50.66	-3.34	54.00	295	125	Average
3	5319.300	91.97	5.23	97.19	N/A	N/A	295	125	Average
4	5350.000	45.16	5.25	50.41	-3.59	54.00	295	125	Average
5	* 5358.850	48.47	5.26	53.73	-0.27	54.00	295	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

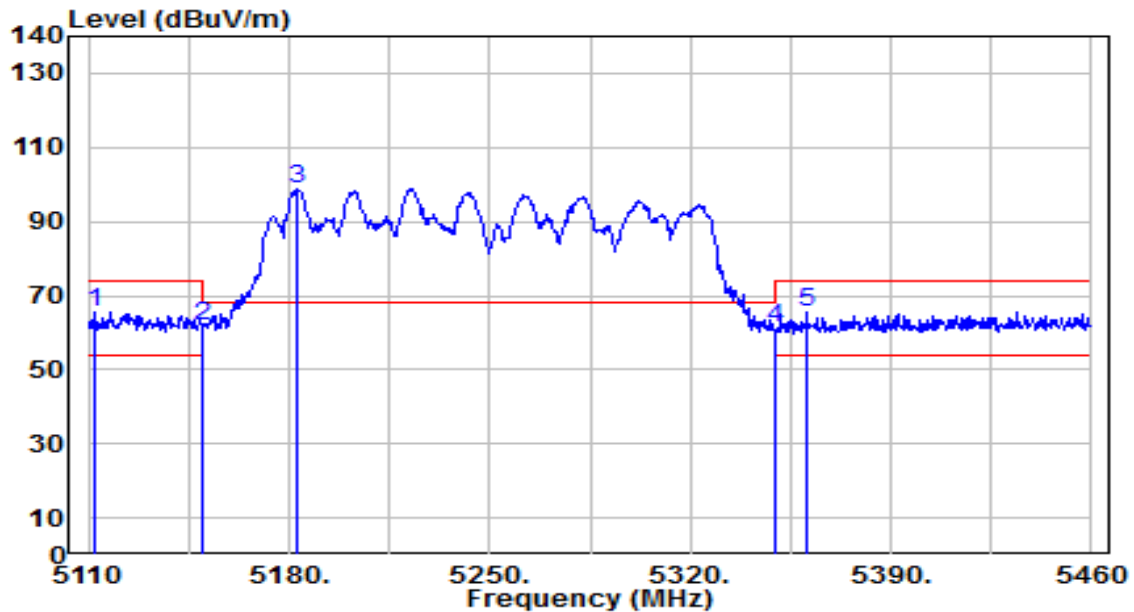


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5112.450	60.33	5.01	65.33	-8.67	74.00	120	180	Peak
2	5150.000	56.68	5.06	61.74	-12.26	74.00	120	180	Peak
3	5182.450	93.68	5.11	98.78	N/A	N/A	120	180	Peak
4	* 5350.000	55.79	5.25	61.04	-7.16	68.20	120	180	Peak
5	5360.600	60.31	5.26	65.57	-8.43	74.00	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

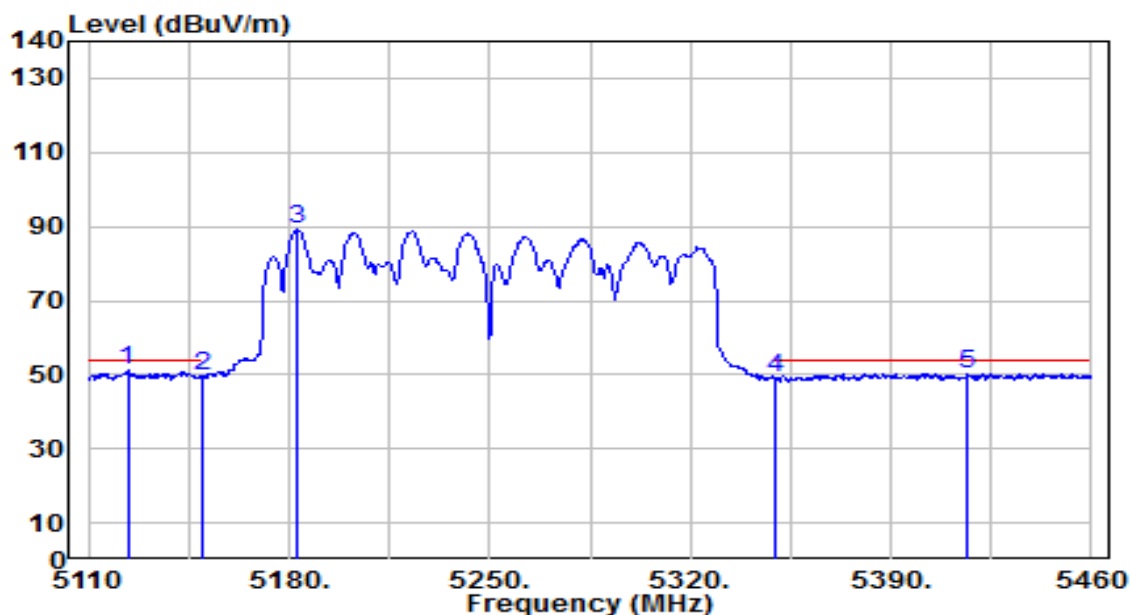


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5123.650	46.19	5.02	51.22	-2.78	54.00	120	180	Average
2		5150.000	44.34	5.06	49.40	-4.60	54.00	120	180	Average
3		5183.150	83.99	5.11	89.09	N/A	N/A	120	180	Average
4		5350.000	43.74	5.25	49.00	-5.00	54.00	120	180	Average
5		5416.600	45.13	5.31	50.44	-3.56	54.00	120	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

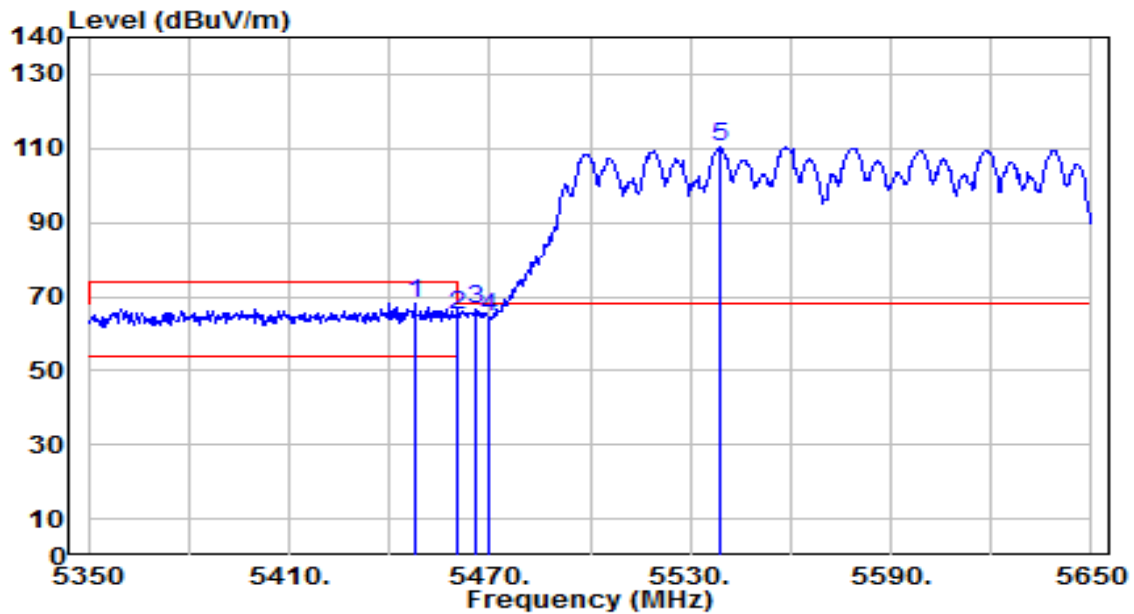


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.500	63.03	5.32	68.35	-5.65	74.00	295	130	Peak
2	5460.000	59.51	5.32	64.84	-3.36	68.20	295	130	Peak
3	* 5465.500	61.24	5.33	66.57	-1.63	68.20	295	130	Peak
4	5470.000	59.30	5.33	64.63	-3.57	68.20	295	130	Peak
5	5539.000	105.09	5.48	110.57	N/A	N/A	295	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

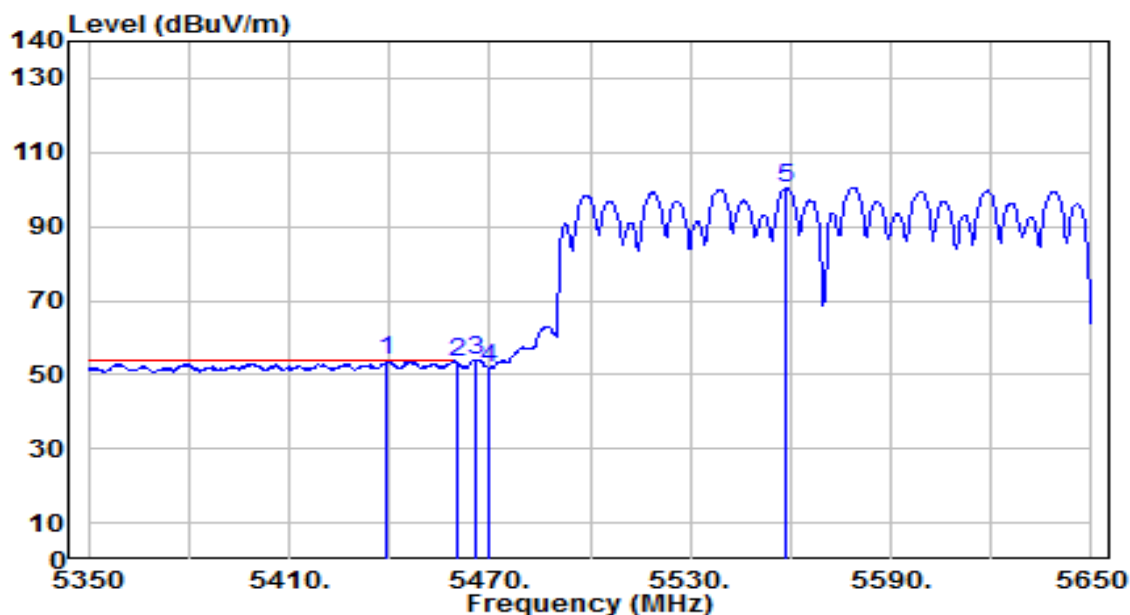


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5439.100	48.39	5.32	53.71	-0.29	54.00	295	130	Average
2		5460.000	48.09	5.32	53.42	-0.58	54.00	295	130	Average
3		5465.800	48.77	5.33	54.10	N/A	N/A	295	130	Average
4		5470.000	46.64	5.33	51.97	N/A	N/A	295	130	Average
5		5558.500	94.99	5.55	100.54	N/A	N/A	295	130	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

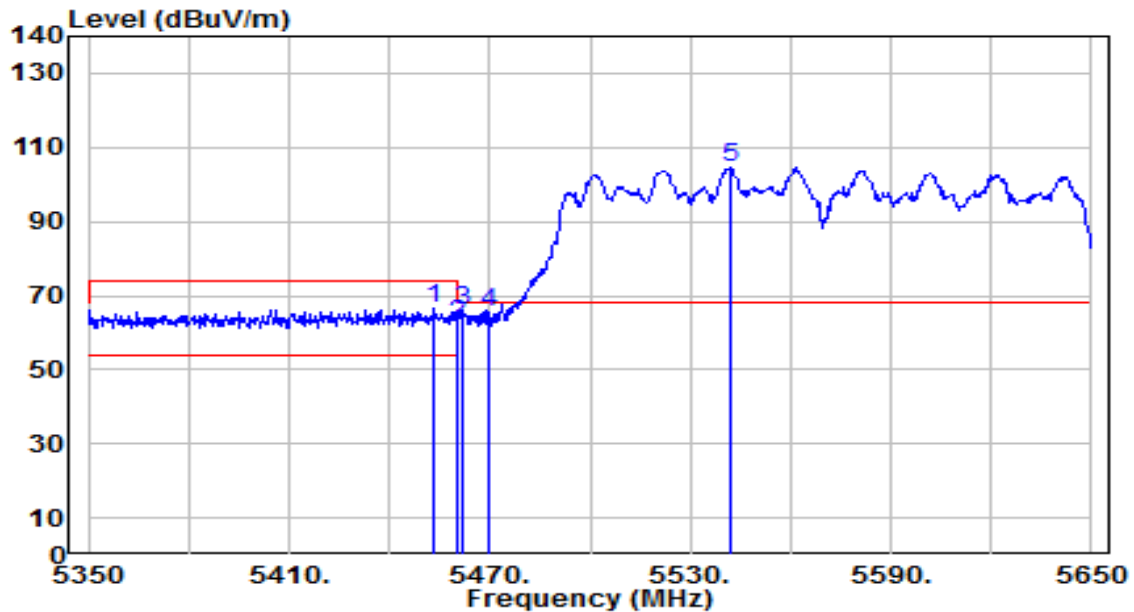


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.500	61.03	5.32	66.35	-7.65	74.00	100	200	Peak
2	5460.000	56.84	5.32	62.17	-6.03	68.20	100	200	Peak
3	* 5461.900	60.58	5.32	65.91	-2.29	68.20	100	200	Peak
4	5470.000	60.06	5.33	65.39	-2.81	68.20	100	200	Peak
5	5542.000	98.94	5.49	104.44	N/A	N/A	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

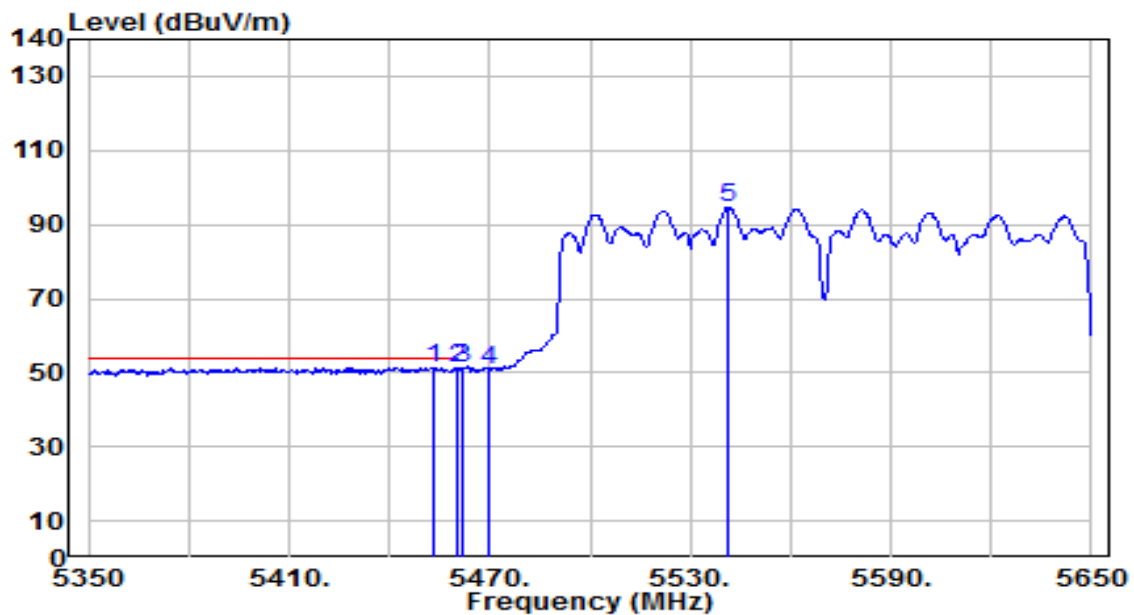


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.500	46.05	5.32	51.38	-2.62	54.00	100	200	Average
2		5460.000	45.87	5.32	51.20	-2.80	54.00	100	200	Average
3		5461.900	46.18	5.32	51.50	N/A	N/A	100	200	Average
4		5470.000	45.61	5.33	50.94	N/A	N/A	100	200	Average
5		5541.400	89.22	5.49	94.71	N/A	N/A	100	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

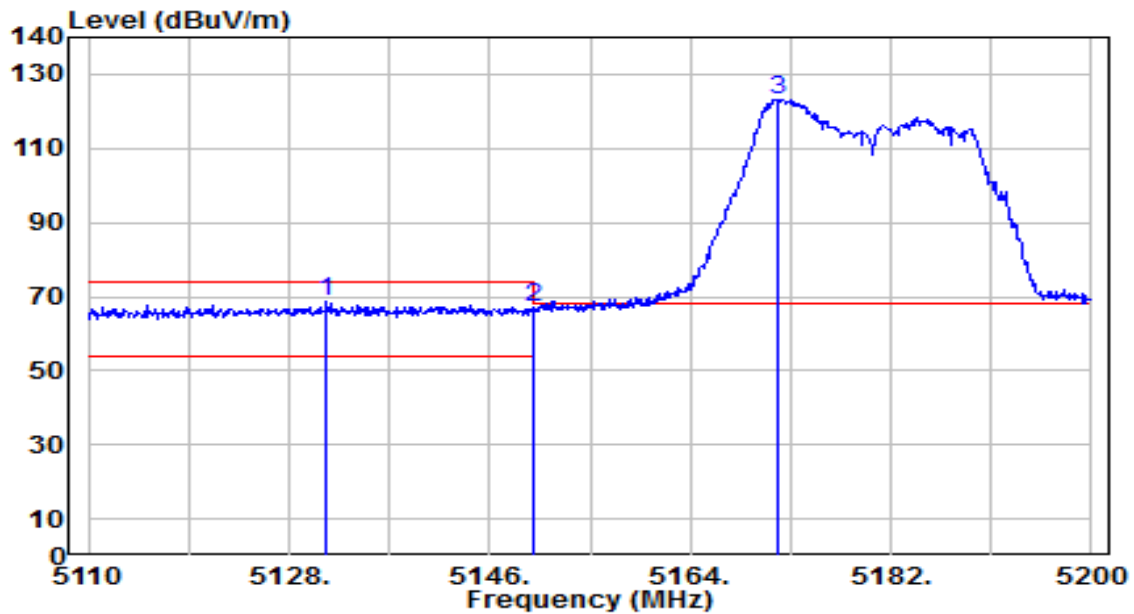


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5131.330	63.49	5.03	68.52	-5.48	74.00	115	235	Peak
2		5150.000	62.08	5.06	67.14	-6.86	74.00	115	235	Peak
3		5171.830	118.27	5.09	123.36	N/A	N/A	115	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

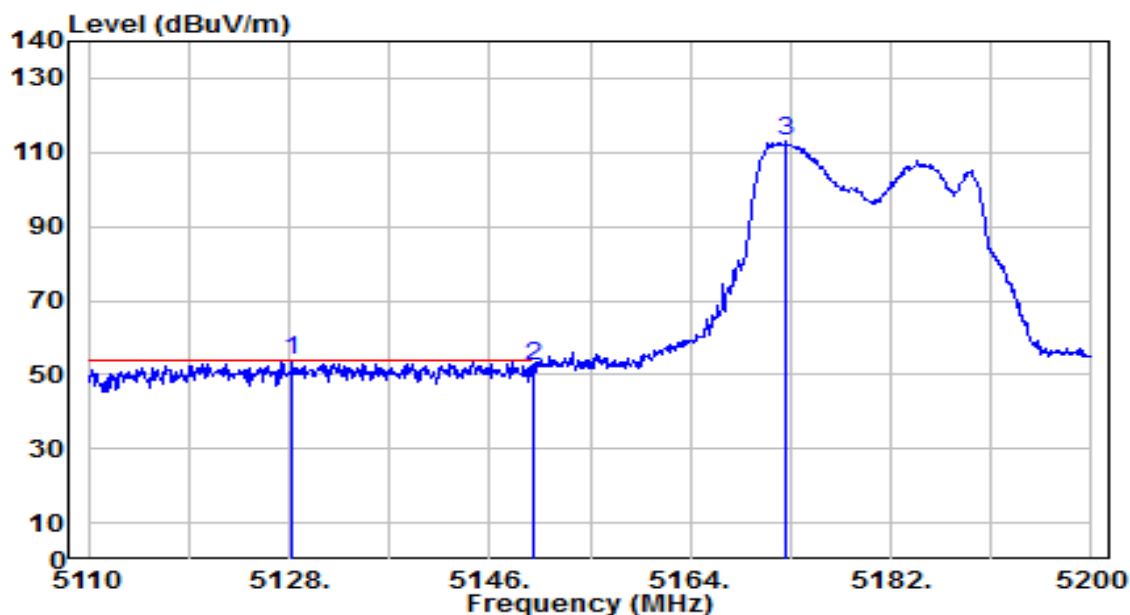


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5128.270	48.67	5.03	53.70	-0.30	54.00	115	235	Average
2		5150.000	47.18	5.06	52.24	-1.76	54.00	115	235	Average
3		5172.550	107.70	5.09	112.79	N/A	N/A	115	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

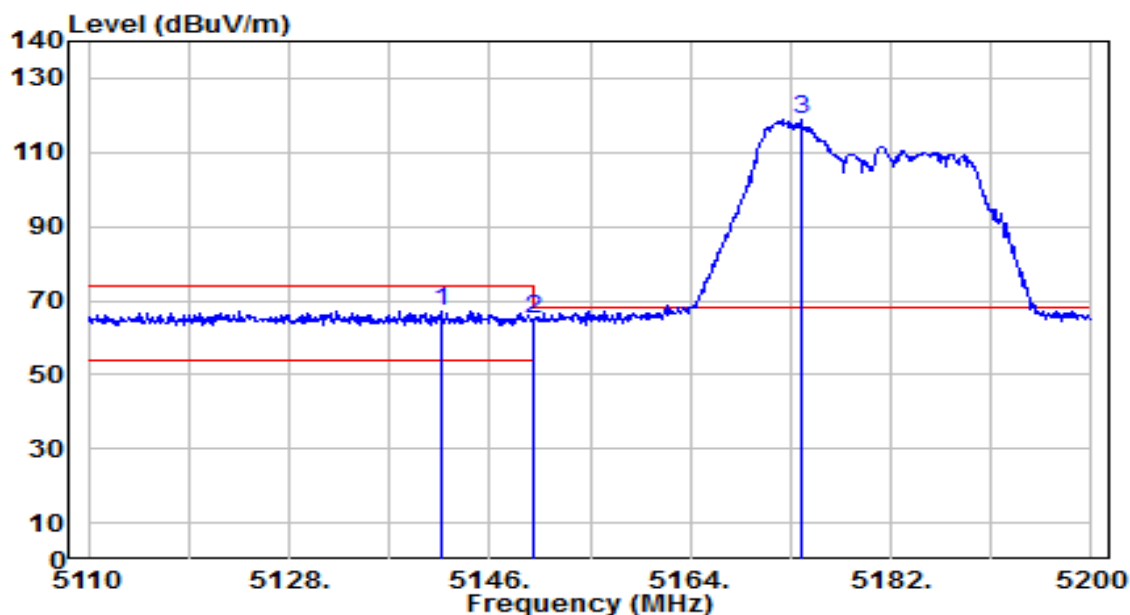


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.590	62.20	5.05	67.25	-6.75	74.00	120	180	Peak
2		5150.000	59.80	5.06	64.86	-9.14	74.00	120	180	Peak
3		5173.990	113.83	5.09	118.92	N/A	N/A	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

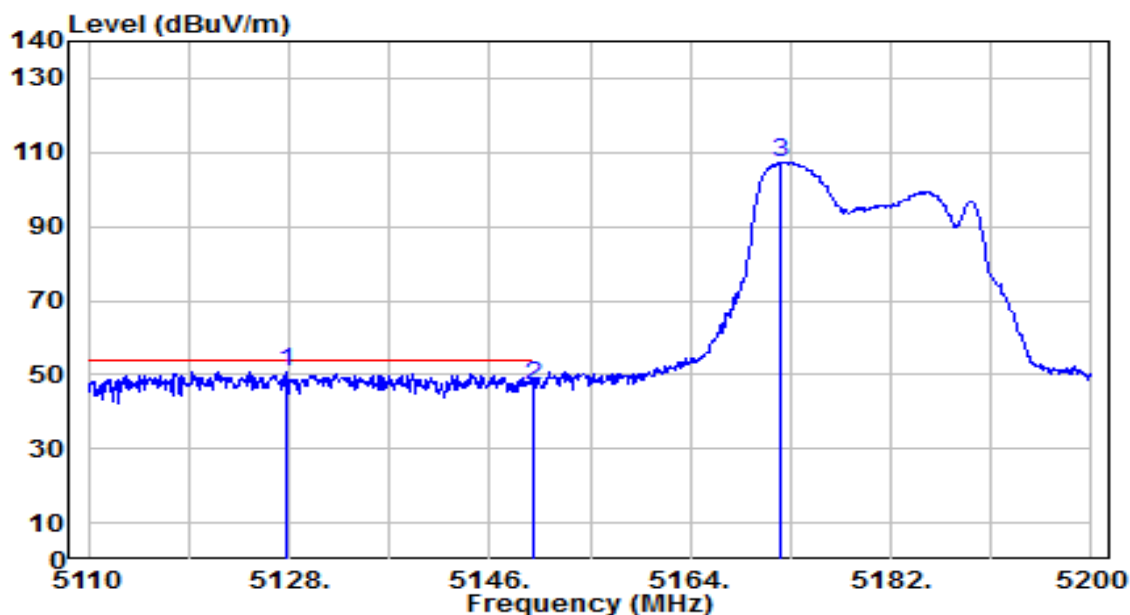


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5127.730	45.92	5.03	50.95	-3.05	54.00	120	180	Average
2		5150.000	41.98	5.06	47.04	-6.96	54.00	120	180	Average
3		5172.010	102.36	5.09	107.46	N/A	N/A	120	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

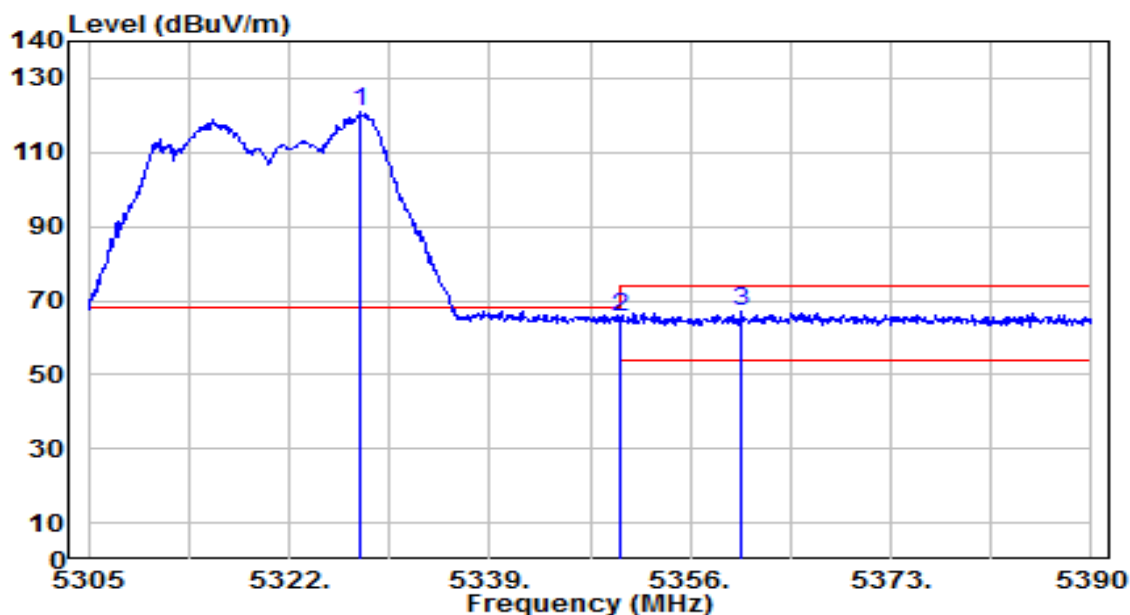


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5327.950	115.49	5.24	120.73	N/A	N/A	295	120	Peak
2	*	5350.000	60.12	5.25	65.37	-2.83	68.20	295	120	Peak
3		5360.335	61.80	5.26	67.06	-6.94	74.00	295	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

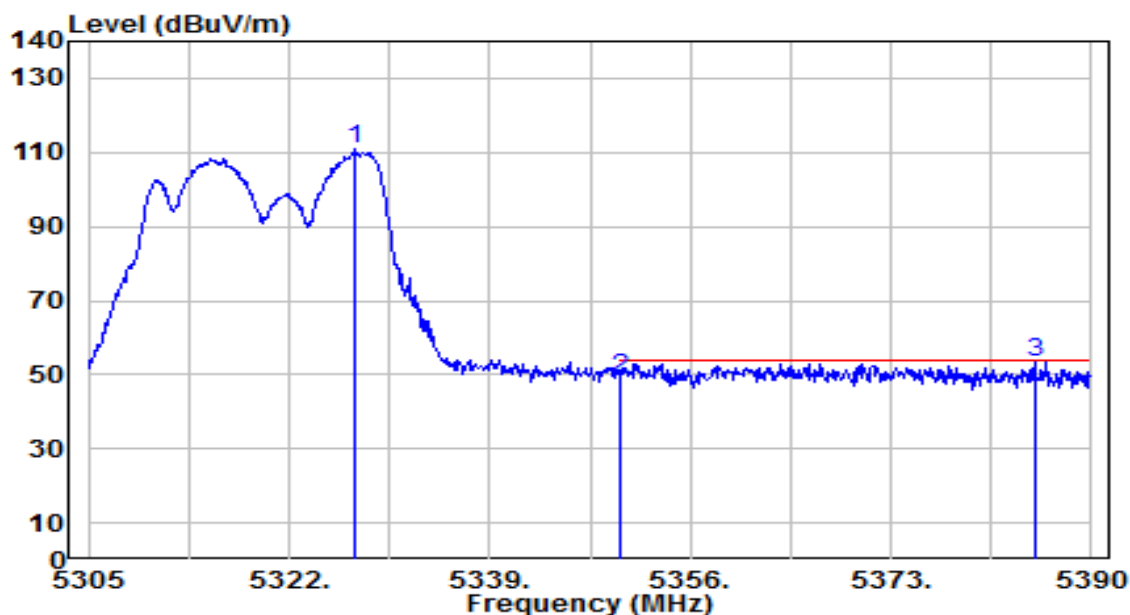


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.610	105.49	5.23	110.73	N/A	N/A	295	120	Average
2	5350.000	44.10	5.25	49.35	-4.65	54.00	295	120	Average
3	* 5385.155	48.23	5.29	53.51	-0.49	54.00	295	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

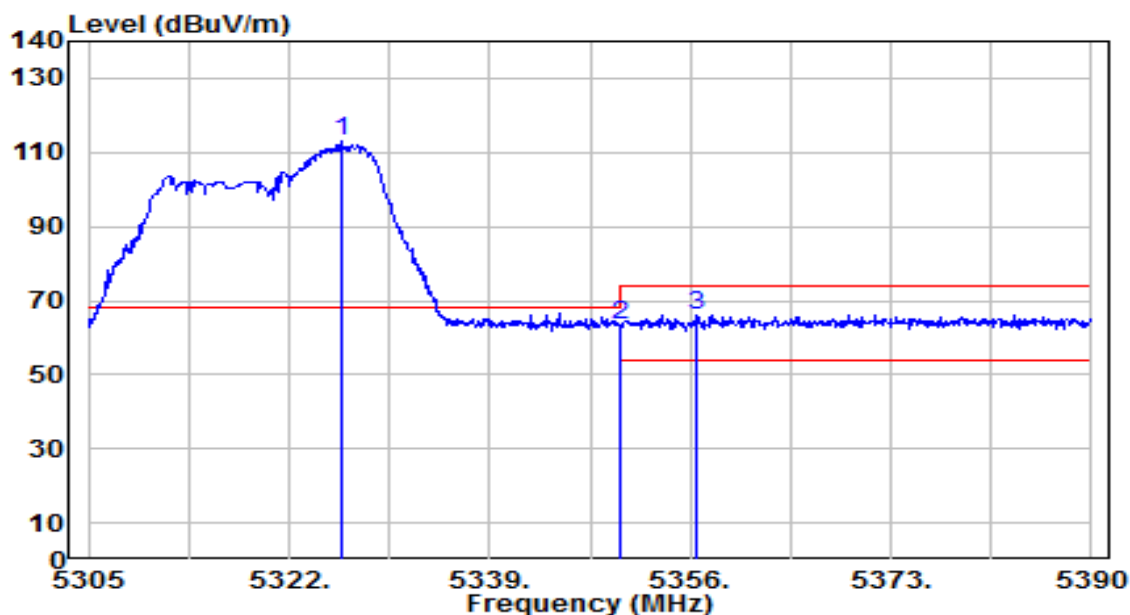


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5326.420	107.56	5.23	112.80	N/A	N/A	165	195	Peak
2	*	5350.000	58.35	5.25	63.61	-4.59	68.20	165	195	Peak
3		5356.425	60.85	5.26	66.11	-7.89	74.00	165	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

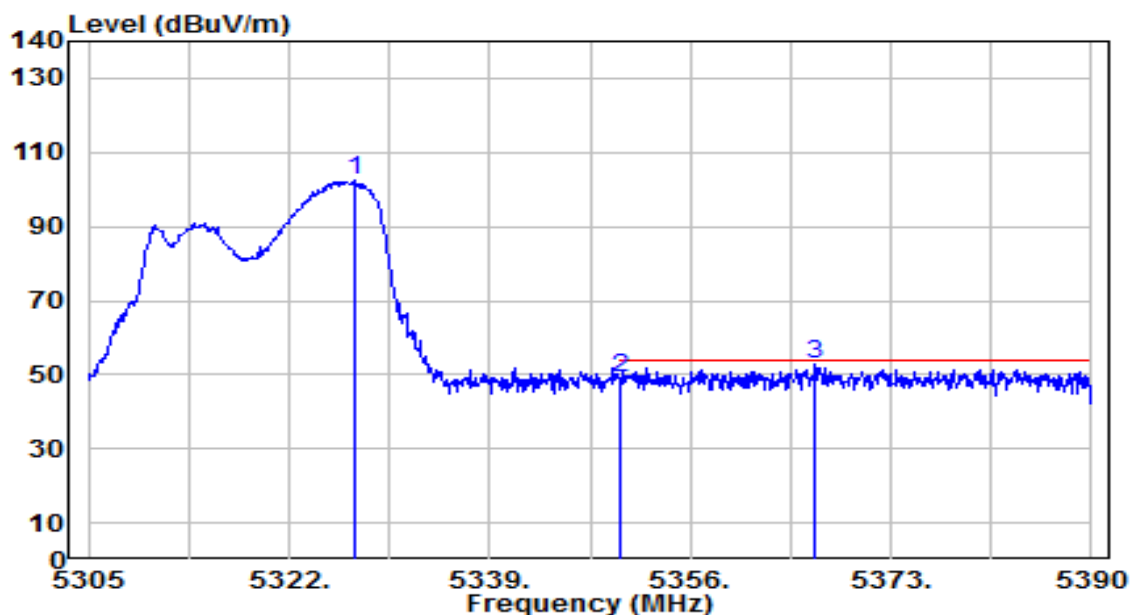


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.610	97.10	5.23	102.34	N/A	N/A	165	195	Average
2	5350.000	43.64	5.25	48.89	-5.11	54.00	165	195	Average
3	* 5366.625	47.41	5.27	52.68	-1.32	54.00	165	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

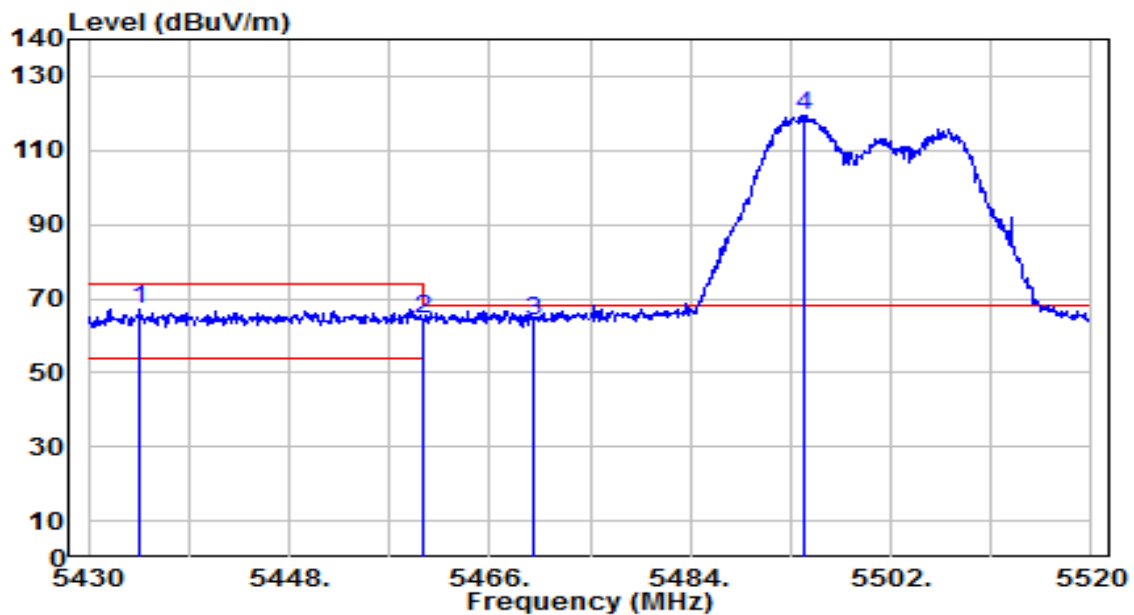


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5434.590	61.89	5.31	67.20	-6.80	74.00	230	120	Peak
2	*	5460.000	59.24	5.32	64.56	-3.64	68.20	230	120	Peak
3		5470.000	58.46	5.33	63.79	-4.41	68.20	230	120	Peak
4		5494.260	114.15	5.34	119.49	N/A	N/A	230	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

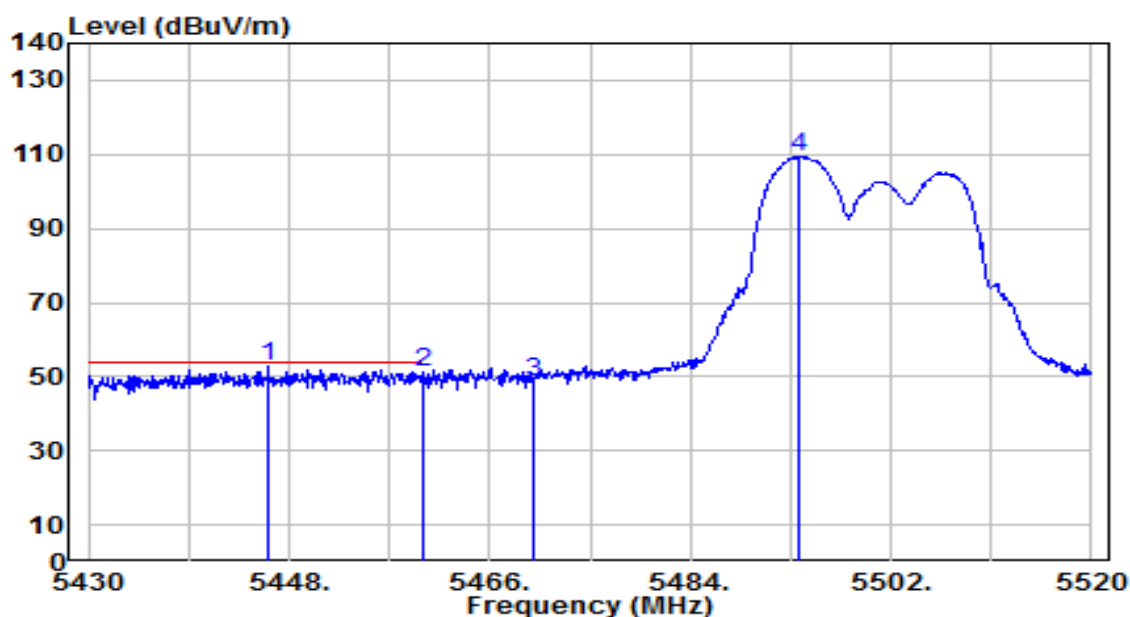


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5446.110	47.27	5.32	52.59	-1.41	54.00	230	120	Average
2		5460.000	45.66	5.32	50.98	-3.02	54.00	230	120	Average
3		5470.000	43.48	5.33	48.81	N/A	N/A	230	120	Average
4		5493.720	103.97	5.34	109.31	N/A	N/A	230	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

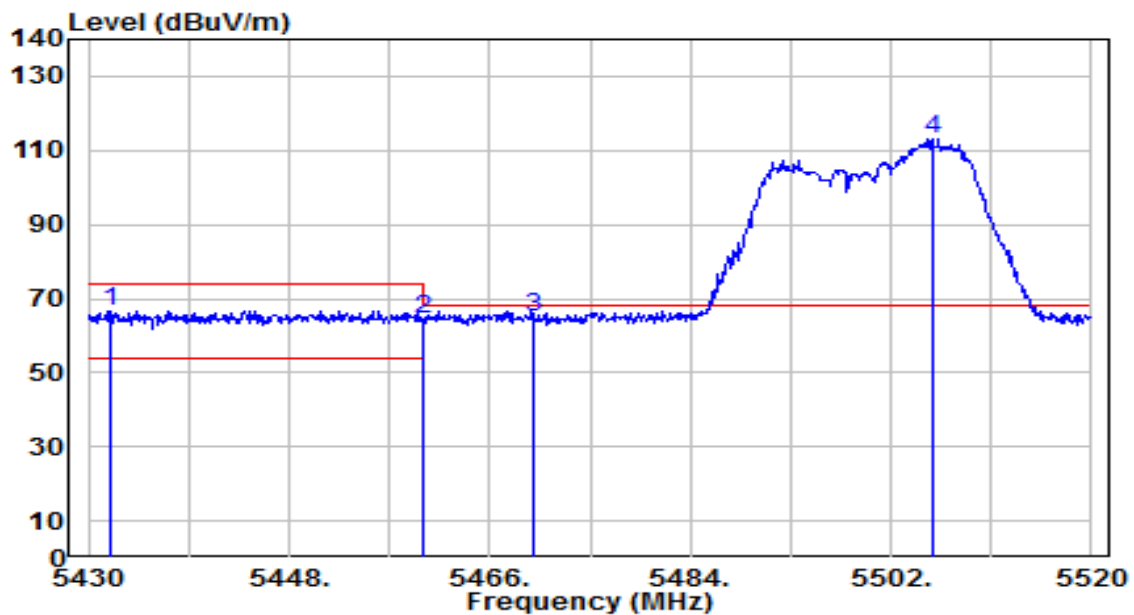


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5431.890	61.43	5.31	66.74	-7.26	74.00	140	200	Peak
2	5460.000	58.91	5.32	64.23	-3.97	68.20	140	200	Peak
3	* 5470.000	59.67	5.33	65.00	-3.20	68.20	140	200	Peak
4	5505.690	107.62	5.36	112.98	N/A	N/A	140	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

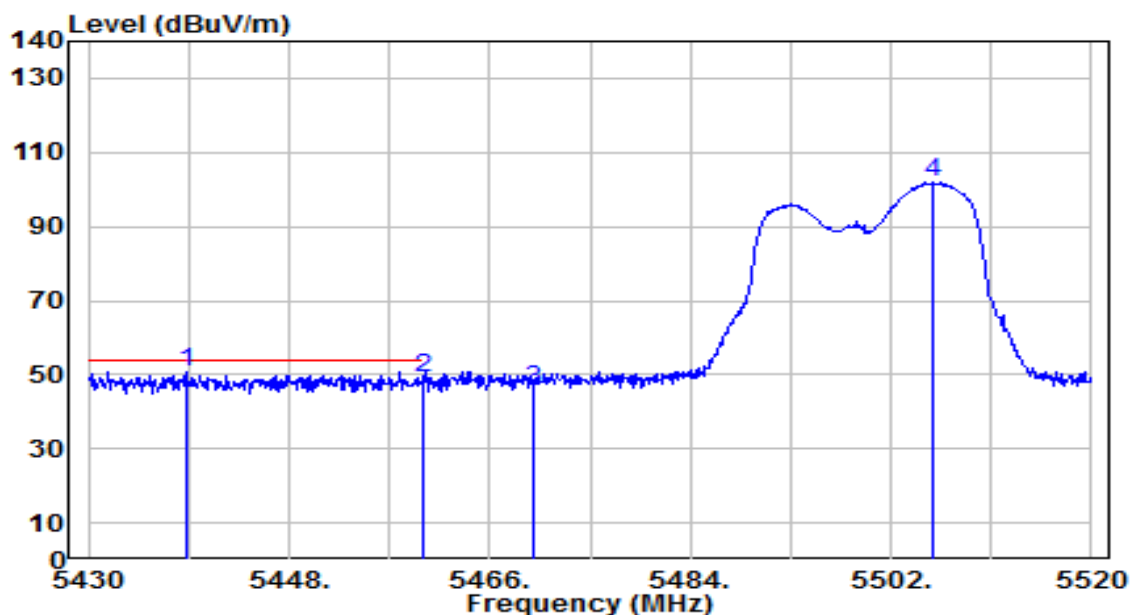


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5438.820	45.64	5.32	50.96	-3.04	54.00	140	200	Average
2		5460.000	43.80	5.32	49.12	-4.88	54.00	140	200	Average
3		5470.000	40.56	5.33	45.89	N/A	N/A	140	200	Average
4		5505.780	96.49	5.36	101.85	N/A	N/A	140	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

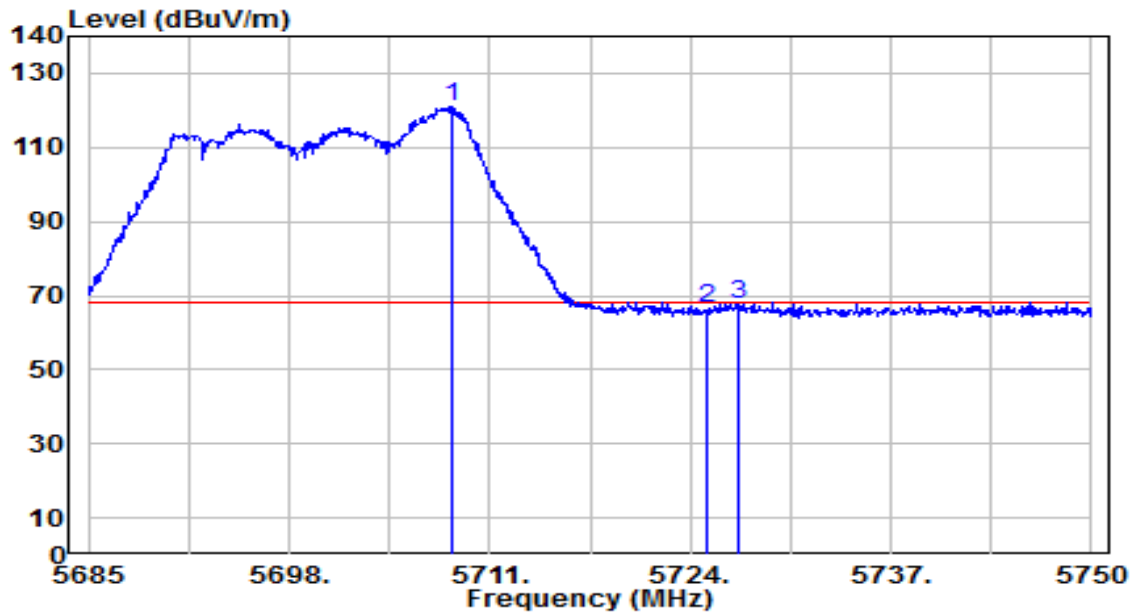


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.530	115.12	6.08	121.21	N/A	N/A	290	135	Peak
2	5725.000	60.34	6.14	66.48	-1.72	68.20	290	135	Peak
3	* 5727.120	61.57	6.15	67.72	-0.48	68.20	290	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

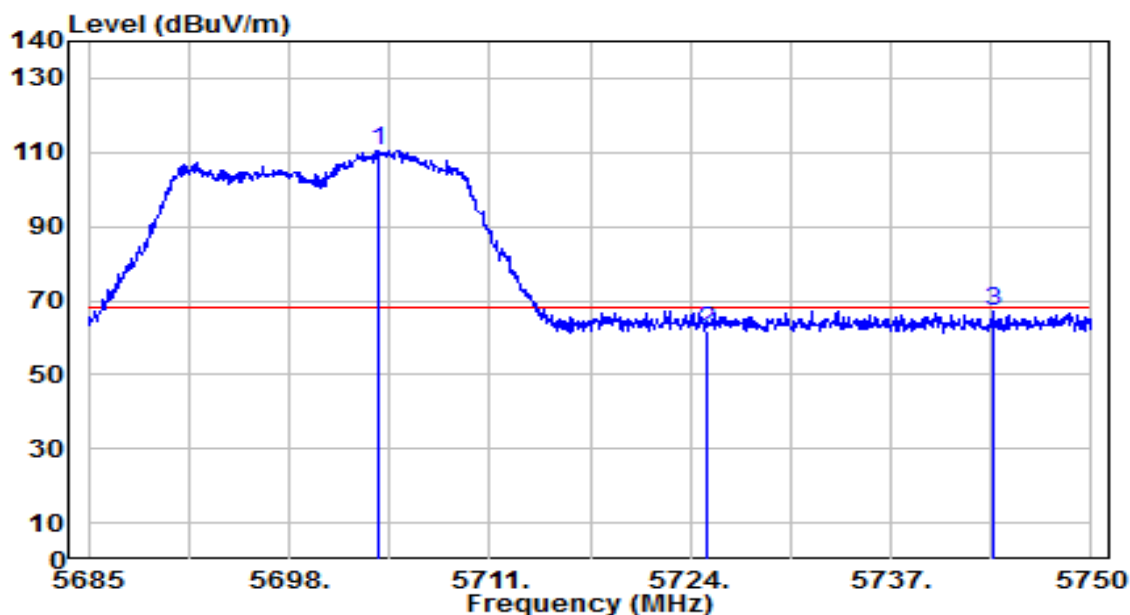


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.785	104.44	6.07	110.50	N/A	N/A	115	200	Peak
2	5725.000	55.70	6.14	61.84	-6.36	68.20	115	200	Peak
3	* 5743.630	60.79	6.21	67.01	-1.19	68.20	115	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

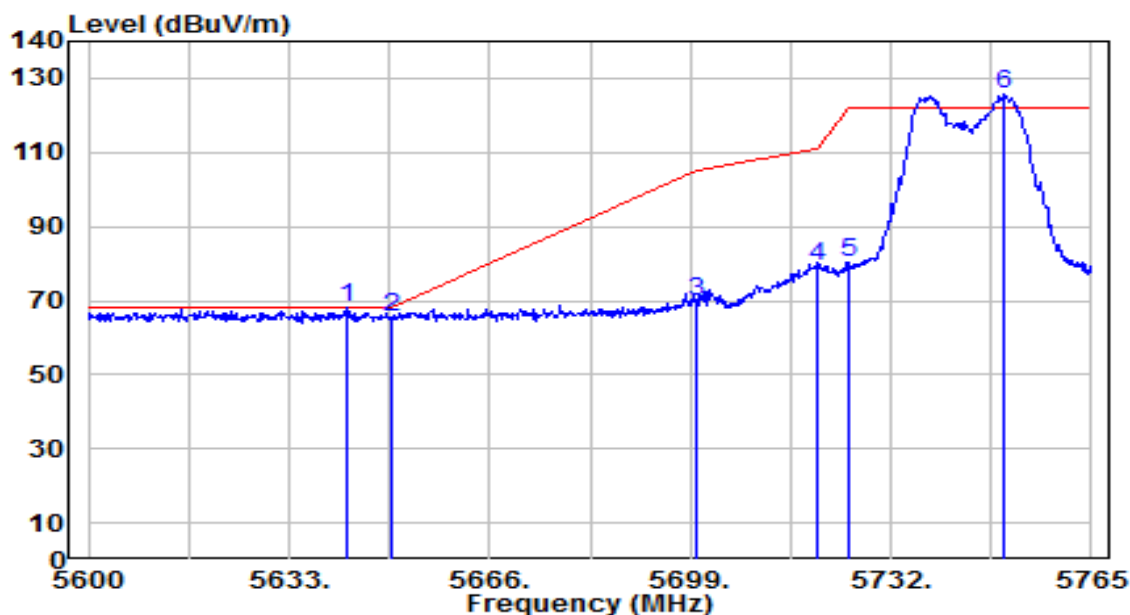


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5642.405	62.04	5.85	67.90	-0.30	68.20	265	125	Peak
2	5650.000	59.42	5.88	65.30	-2.90	68.20	265	125	Peak
3	5700.000	63.67	6.05	69.72	-35.48	105.20	265	125	Peak
4	5720.000	72.94	6.13	79.06	-31.74	110.80	265	125	Peak
5	5725.000	74.30	6.14	80.44	-41.76	122.20	265	125	Peak
6	5750.645	119.37	6.24	125.61	N/A	N/A	265	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

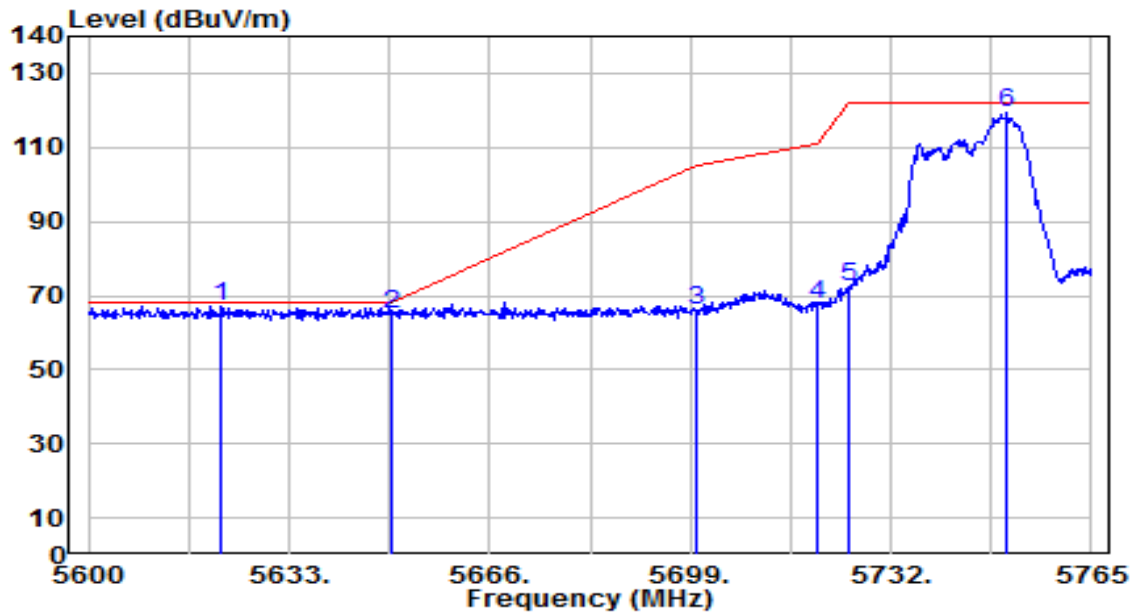


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5621.780	61.25	5.78	67.03	-1.17	68.20	150	205	Peak
2		5650.000	59.29	5.88	65.17	-3.03	68.20	150	205	Peak
3		5700.000	59.91	6.05	65.97	-39.23	105.20	150	205	Peak
4		5720.000	61.39	6.13	67.52	-43.28	110.80	150	205	Peak
5		5725.000	66.33	6.14	72.47	-49.73	122.20	150	205	Peak
6		5751.140	113.20	6.24	119.44	N/A	N/A	150	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

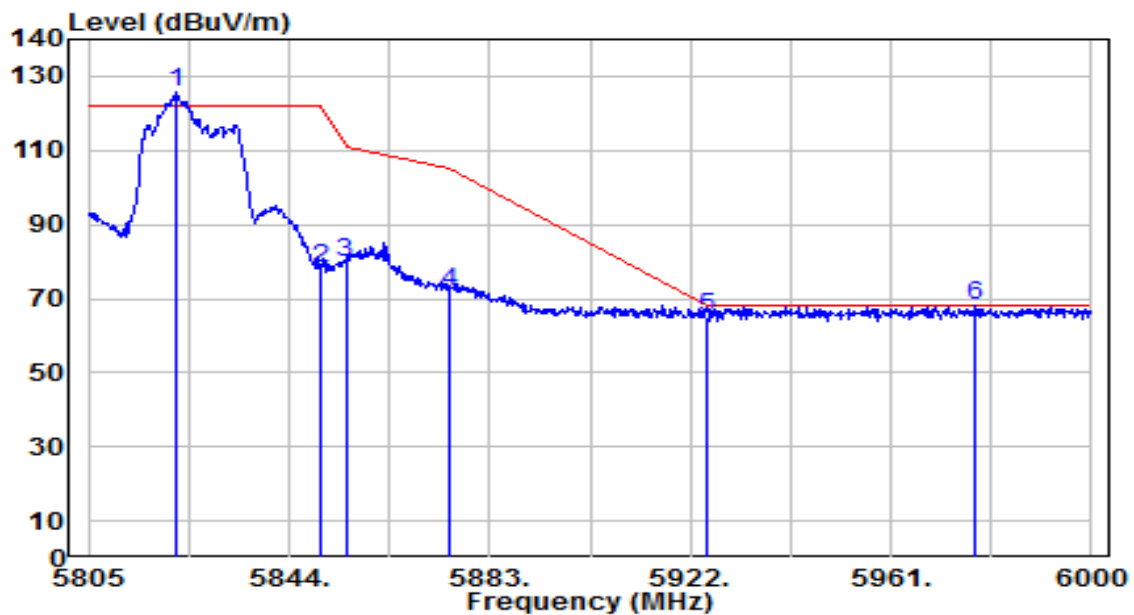


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.160	119.04	6.49	125.52	N/A	N/A	140	235	Peak
2	5850.000	71.67	6.57	78.24	-43.96	122.20	140	235	Peak
3	5855.000	73.08	6.59	79.67	-31.13	110.80	140	235	Peak
4	5875.000	65.44	6.65	72.09	-33.11	105.20	140	235	Peak
5	5925.000	58.13	6.81	64.95	-3.25	68.20	140	235	Peak
6	* 5977.380	61.03	7.00	68.03	-0.17	68.20	140	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

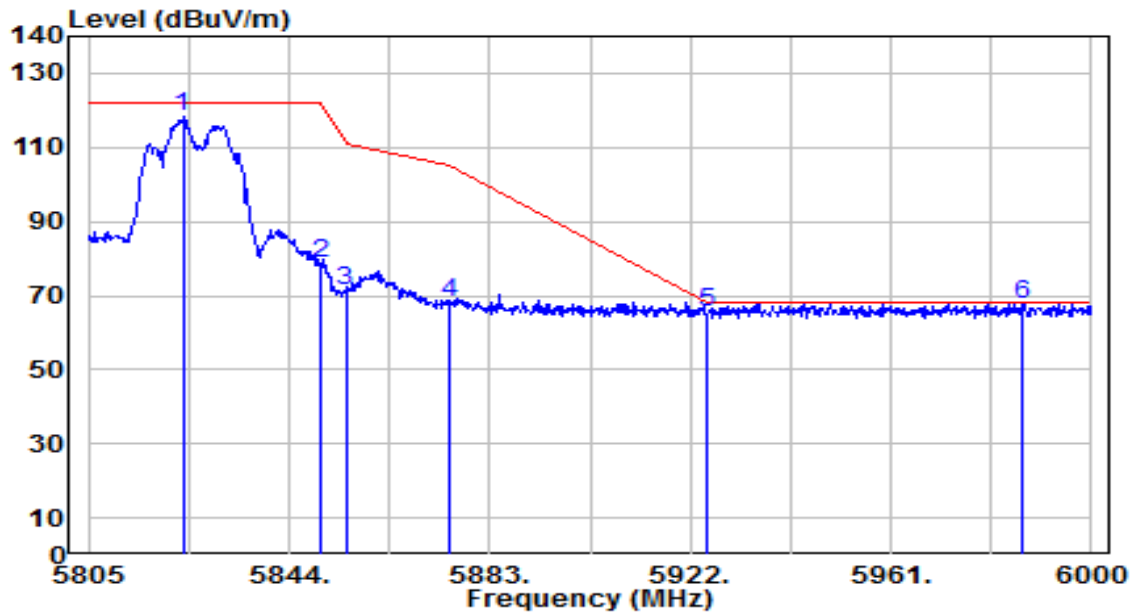


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.330	111.69	6.49	118.18	N/A	N/A	170	160	Peak
2	5850.000	72.24	6.57	78.81	-43.39	122.20	170	160	Peak
3	5855.000	64.67	6.59	71.25	-39.55	110.80	170	160	Peak
4	5875.000	61.51	6.65	68.16	-37.04	105.20	170	160	Peak
5	5925.000	58.60	6.81	65.41	-2.79	68.20	170	160	Peak
6	* 5986.740	60.82	7.03	67.85	-0.35	68.20	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

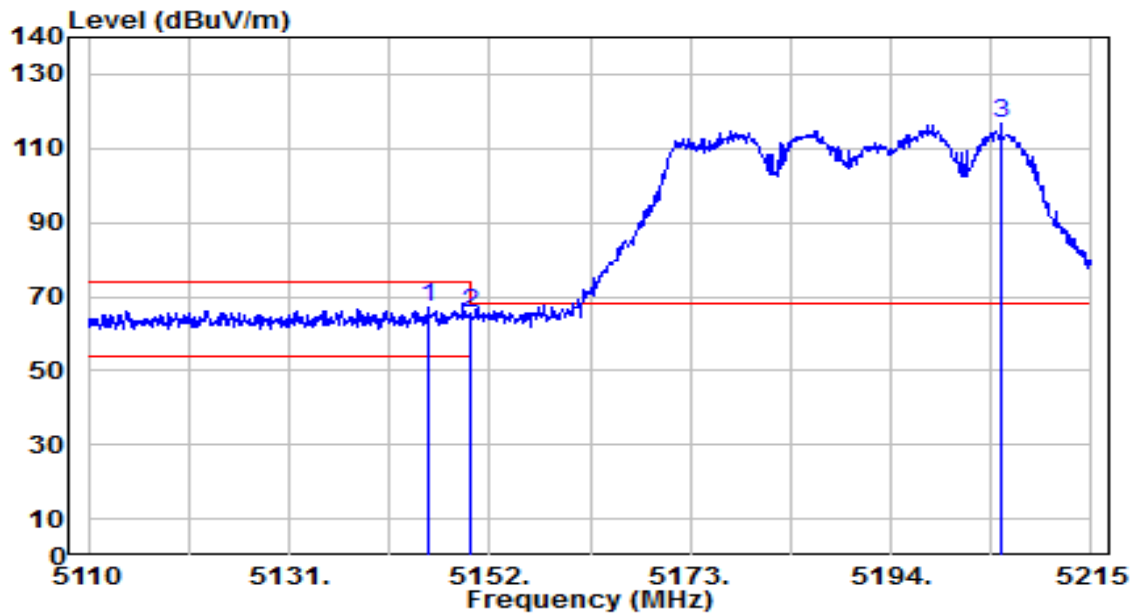


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.595	61.84	5.05	66.89	-7.11	74.00	255	115	Peak
2		5150.000	60.45	5.06	65.51	-8.49	74.00	255	115	Peak
3		5205.550	111.47	5.13	116.60	N/A	N/A	255	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

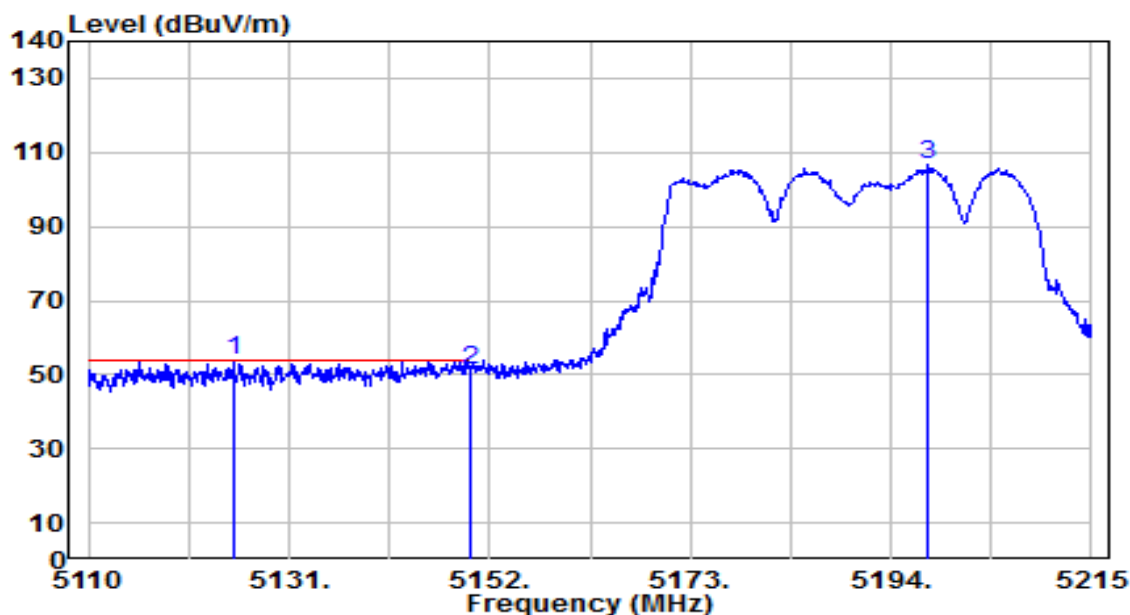


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5125.225	48.71	5.03	53.73	-0.27	54.00	255	115	Average
2		5150.000	46.45	5.06	51.51	-2.49	54.00	255	115	Average
3		5197.885	101.35	5.13	106.48	N/A	N/A	255	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

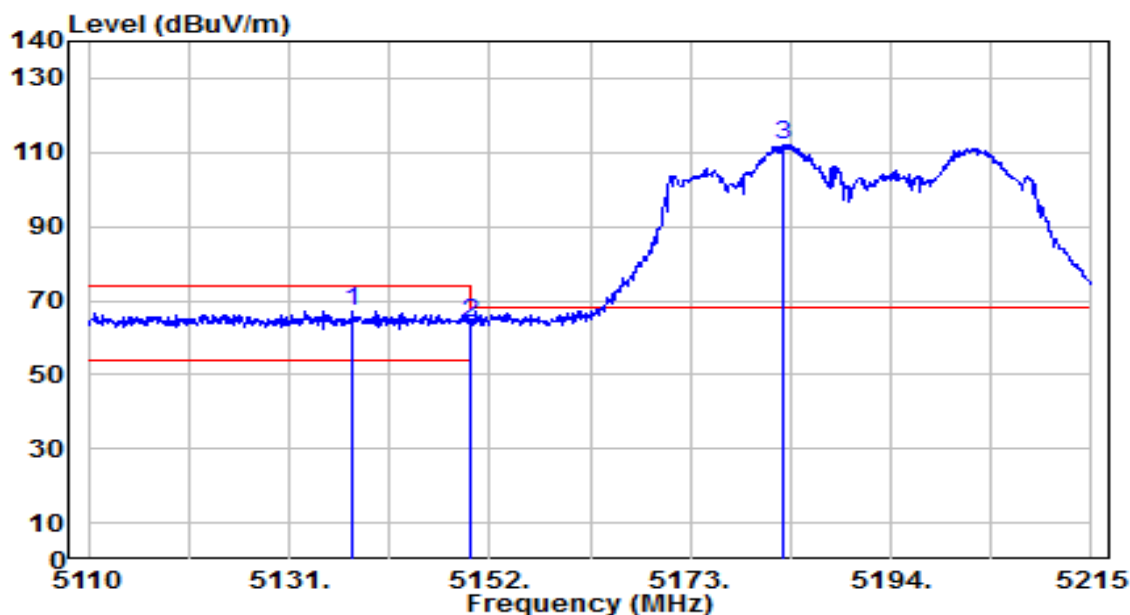


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.720	62.27	5.04	67.32	-6.68	74.00	120	180	Peak
2		5150.000	59.00	5.06	64.06	-9.94	74.00	120	180	Peak
3		5182.660	106.90	5.11	112.00	N/A	N/A	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

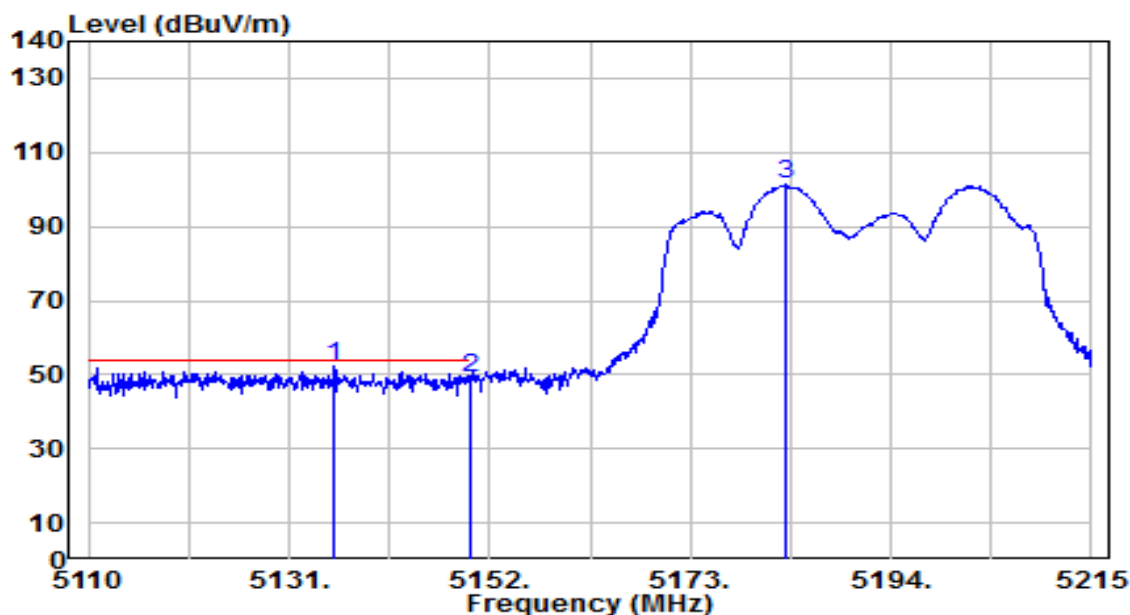


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5135.725	47.13	5.04	52.17	-1.83	54.00	120	180	Average
2		5150.000	44.20	5.06	49.26	-4.74	54.00	120	180	Average
3		5182.975	96.31	5.11	101.41	N/A	N/A	120	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

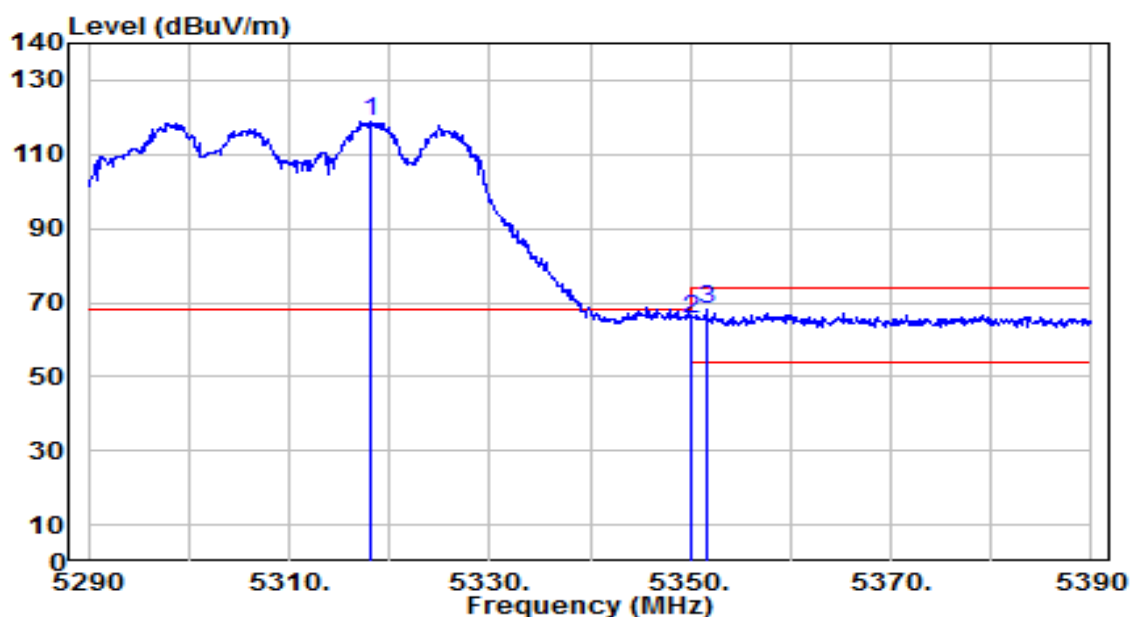


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5318.200	113.77	5.23	119.00	N/A	N/A	295	120	Peak
2	*	5350.000	60.45	5.25	65.71	-2.49	68.20	295	120	Peak
3		5351.600	62.66	5.26	67.92	-6.08	74.00	295	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

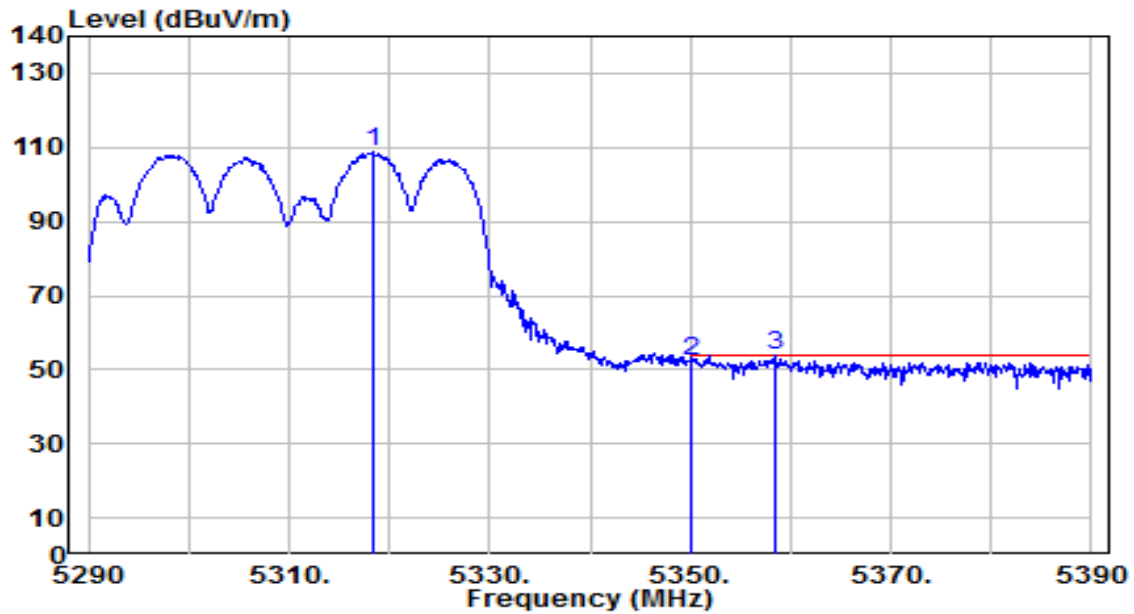


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.300	103.52	5.23	108.74	N/A	N/A	295	120	Average
2	5350.000	46.99	5.25	52.24	-1.76	54.00	295	120	Average
3	* 5358.400	48.59	5.26	53.85	-0.15	54.00	295	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

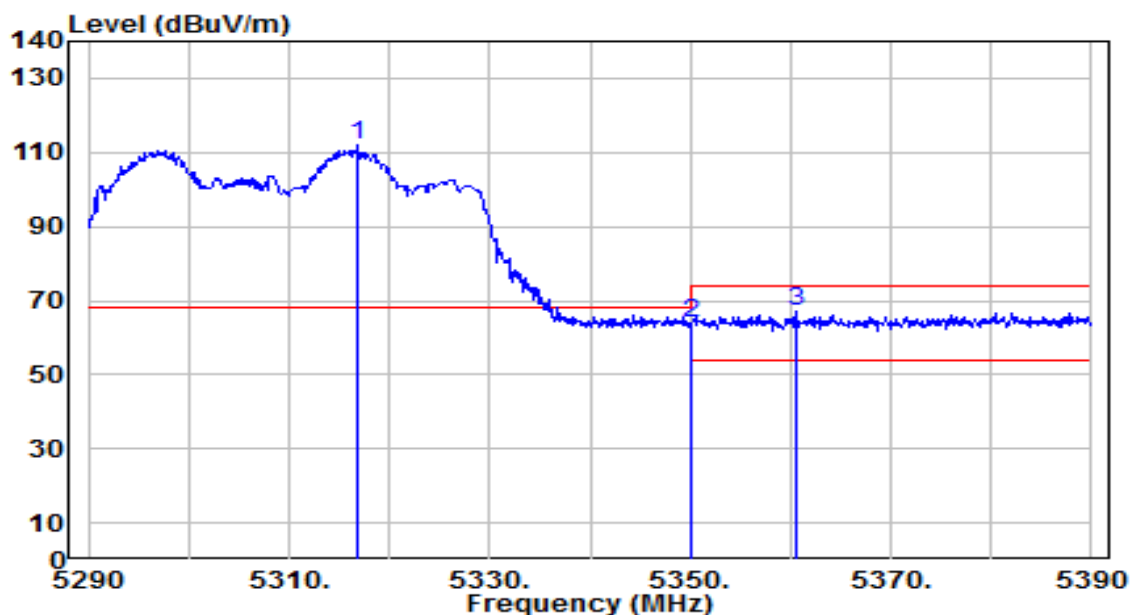


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5316.800	106.92	5.23	112.15	N/A	N/A	165	195	Peak
2	*	5350.000	58.70	5.25	63.96	-4.24	68.20	165	195	Peak
3		5360.500	61.76	5.26	67.02	-6.98	74.00	165	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

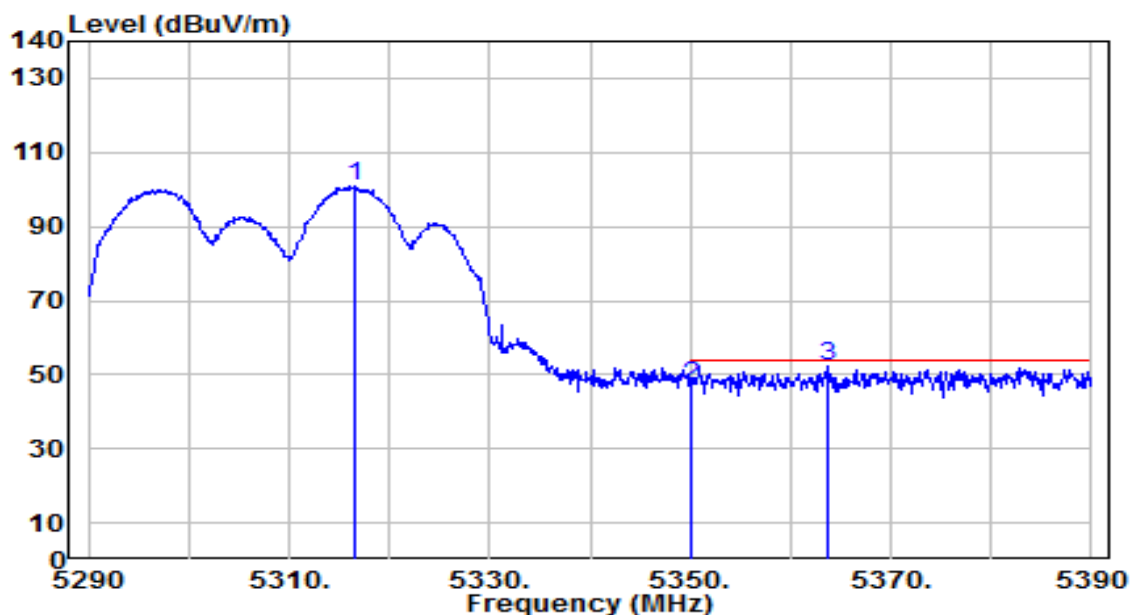


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.500	95.74	5.22	100.96	N/A	N/A	165	195	Average
2	5350.000	41.73	5.25	46.99	-7.01	54.00	165	195	Average
3	* 5363.600	47.01	5.27	52.27	-1.73	54.00	165	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

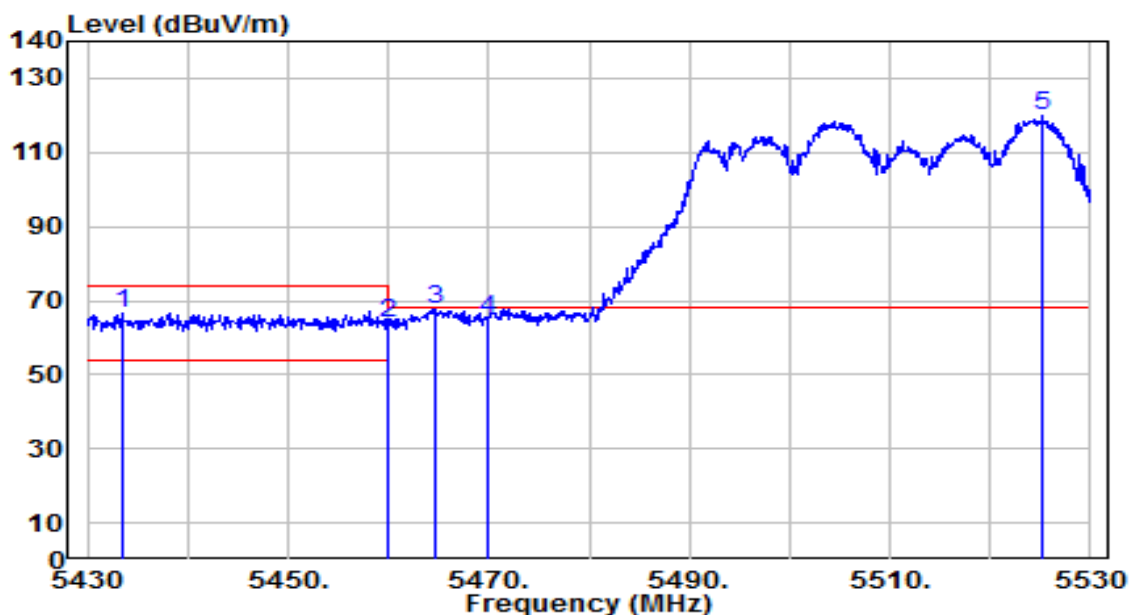


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5433.400	61.33	5.31	66.65	-7.35	74.00	225	125	Peak
2	5460.000	58.53	5.32	63.86	-4.34	68.20	225	125	Peak
3	* 5464.600	62.22	5.33	67.54	-0.66	68.20	225	125	Peak
4	5470.000	59.81	5.33	65.14	-3.06	68.20	225	125	Peak
5	5525.300	114.27	5.43	119.70	N/A	N/A	225	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

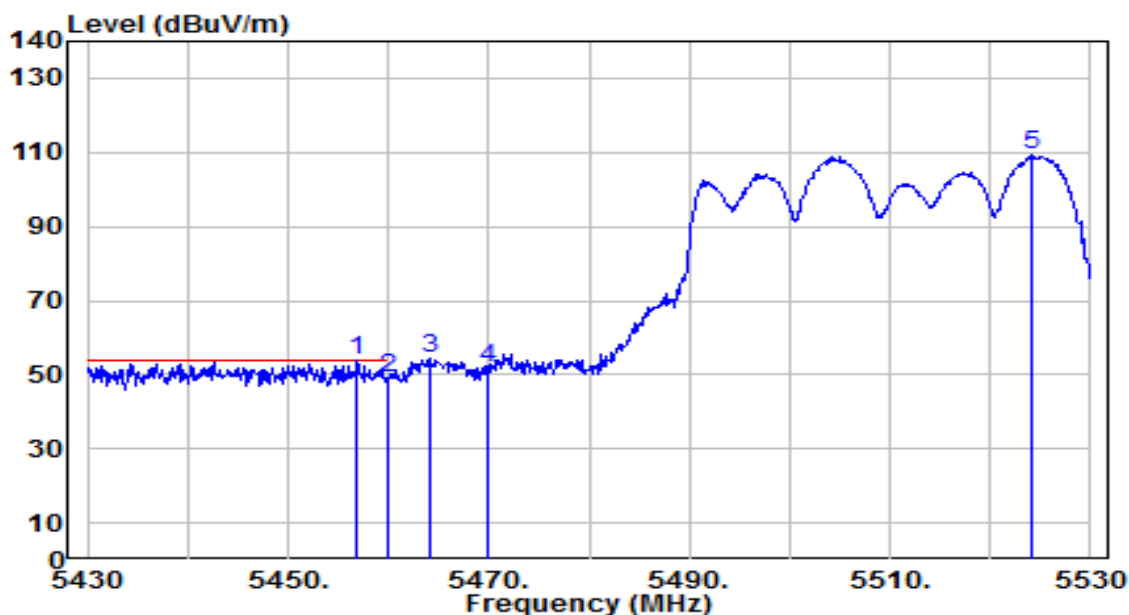


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.900	48.39	5.32	53.71	-0.29	54.00	225	125	Average
2		5460.000	43.77	5.32	49.09	-4.91	54.00	225	125	Average
3		5464.100	49.19	5.33	54.51	N/A	N/A	225	125	Average
4		5470.000	46.53	5.33	51.86	N/A	N/A	225	125	Average
5		5524.100	103.67	5.43	109.10	N/A	N/A	225	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

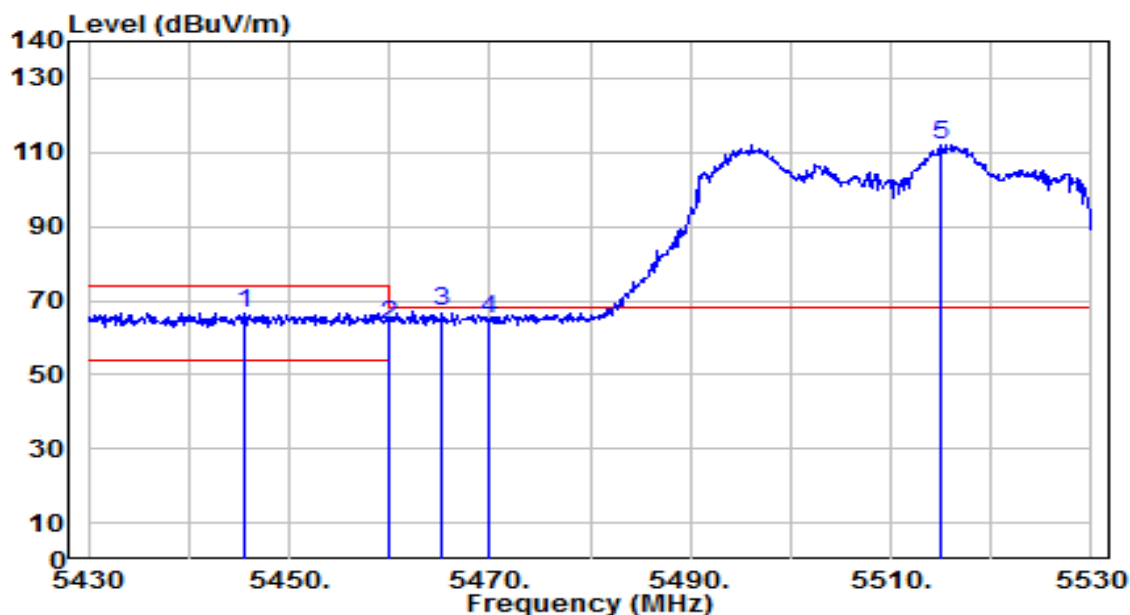


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5445.500	61.40	5.32	66.71	-7.29	74.00	140	200	Peak
2	5460.000	58.10	5.32	63.43	-4.77	68.20	140	200	Peak
3	* 5465.200	61.91	5.33	67.24	-0.96	68.20	140	200	Peak
4	5470.000	59.55	5.33	64.88	-3.32	68.20	140	200	Peak
5	5515.100	106.46	5.40	111.86	N/A	N/A	140	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

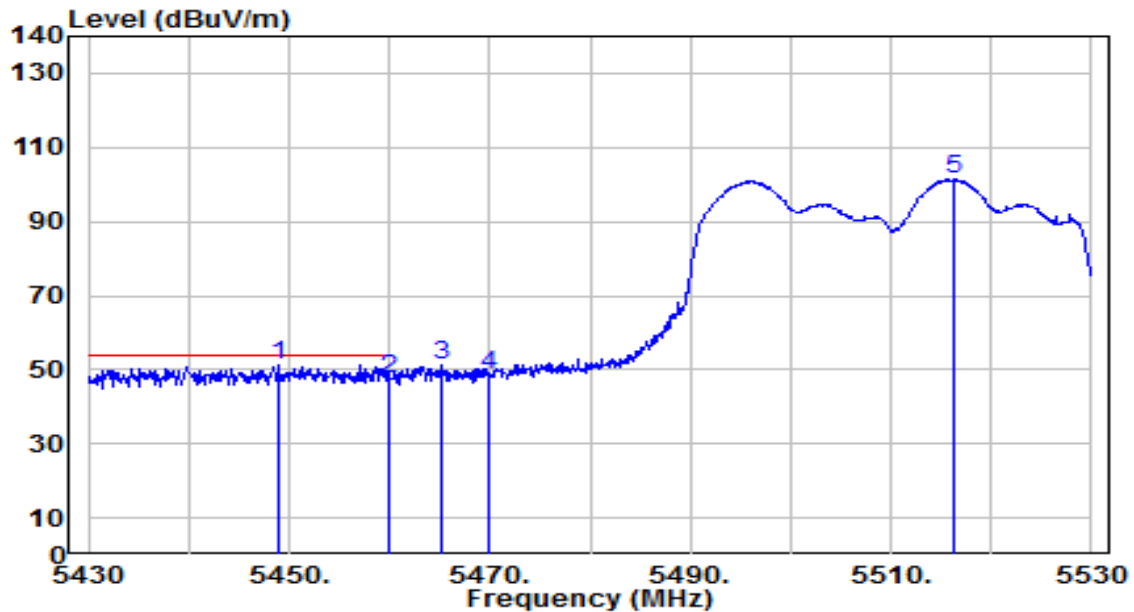


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.000	45.76	5.32	51.08	-2.92	54.00	140	200	Average
2		5460.000	42.23	5.32	47.56	-6.44	54.00	140	200	Average
3		5465.300	45.89	5.33	51.22	N/A	N/A	140	200	Average
4		5470.000	43.02	5.33	48.35	N/A	N/A	140	200	Average
5		5516.400	96.18	5.40	101.58	N/A	N/A	140	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

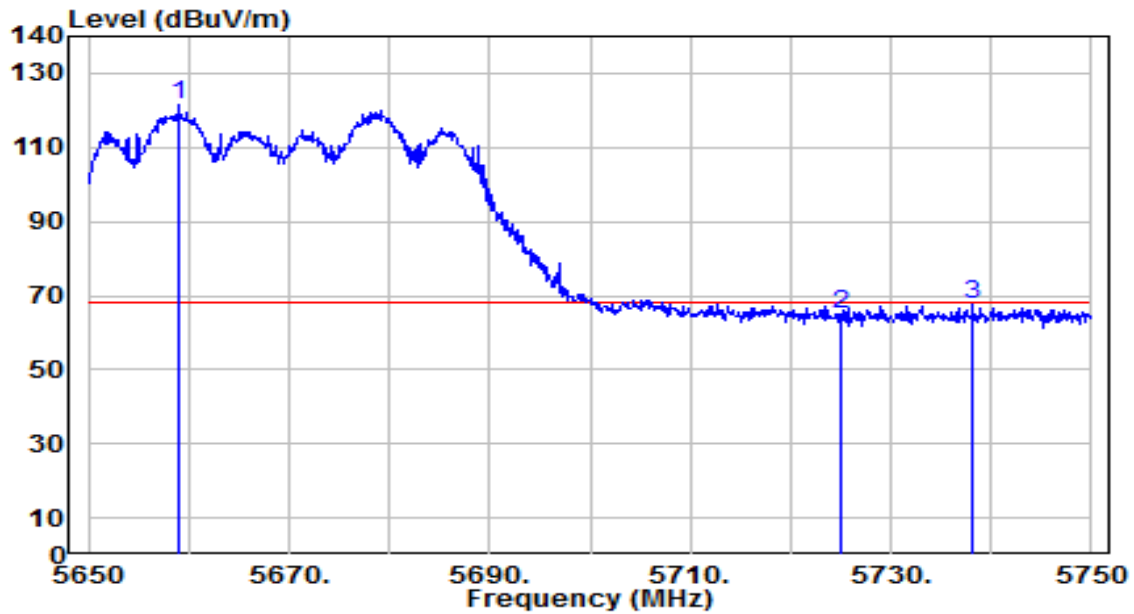


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5659.000	115.46	5.91	121.37	N/A	N/A	290	135	Peak
2	5725.000	59.00	6.14	65.15	-3.05	68.20	290	135	Peak
3	* 5738.100	61.37	6.19	67.56	-0.64	68.20	290	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

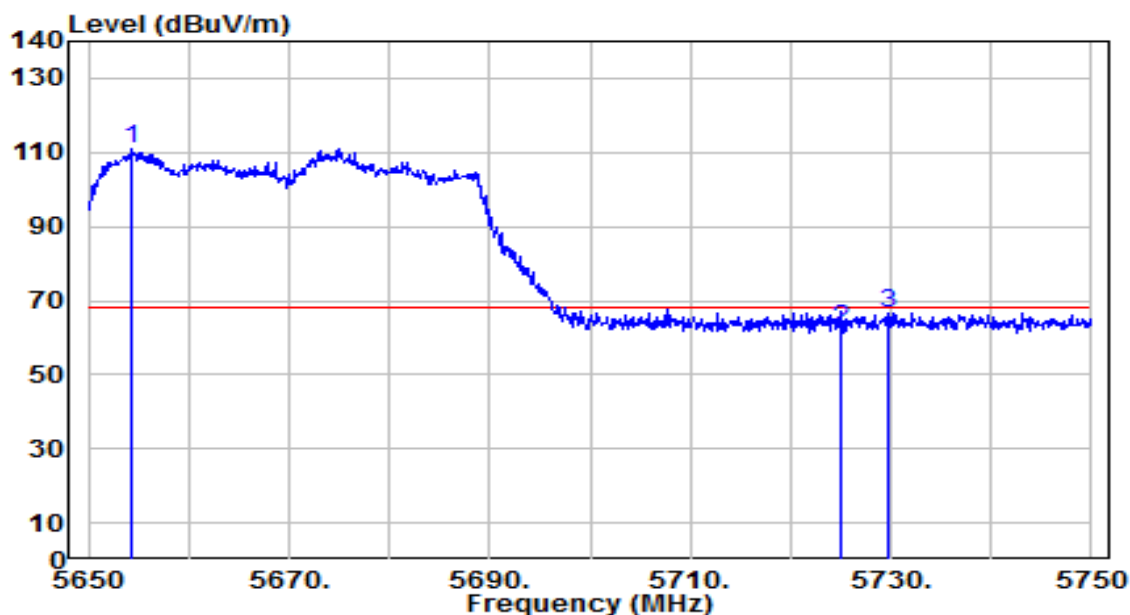


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5654.300	105.10	5.89	110.99	N/A	N/A	115	200	Peak
2	5725.000	56.16	6.14	62.30	-5.90	68.20	115	200	Peak
3	* 5729.800	60.64	6.16	66.80	-1.40	68.20	115	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

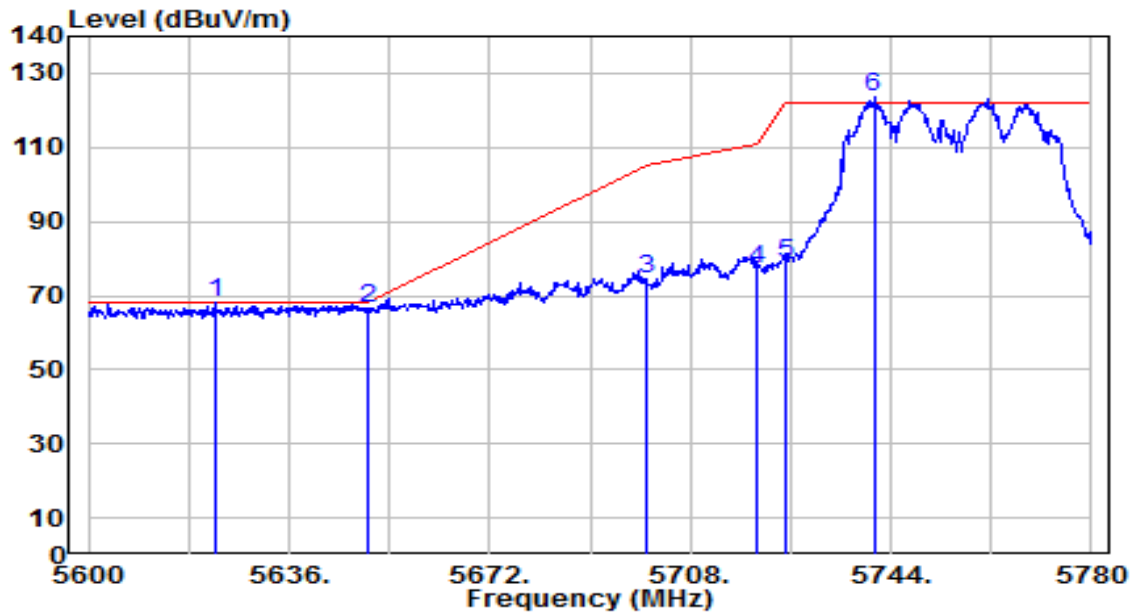


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5622.680	62.16	5.78	67.94	-0.26	68.20	265	125	Peak
2		5650.000	60.42	5.88	66.30	-1.90	68.20	265	125	Peak
3		5700.000	68.34	6.05	74.40	-30.80	105.20	265	125	Peak
4		5720.000	71.16	6.13	77.28	-33.52	110.80	265	125	Peak
5		5725.000	72.80	6.14	78.95	-43.25	122.20	265	125	Peak
6		5740.940	117.68	6.20	123.88	N/A	N/A	265	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

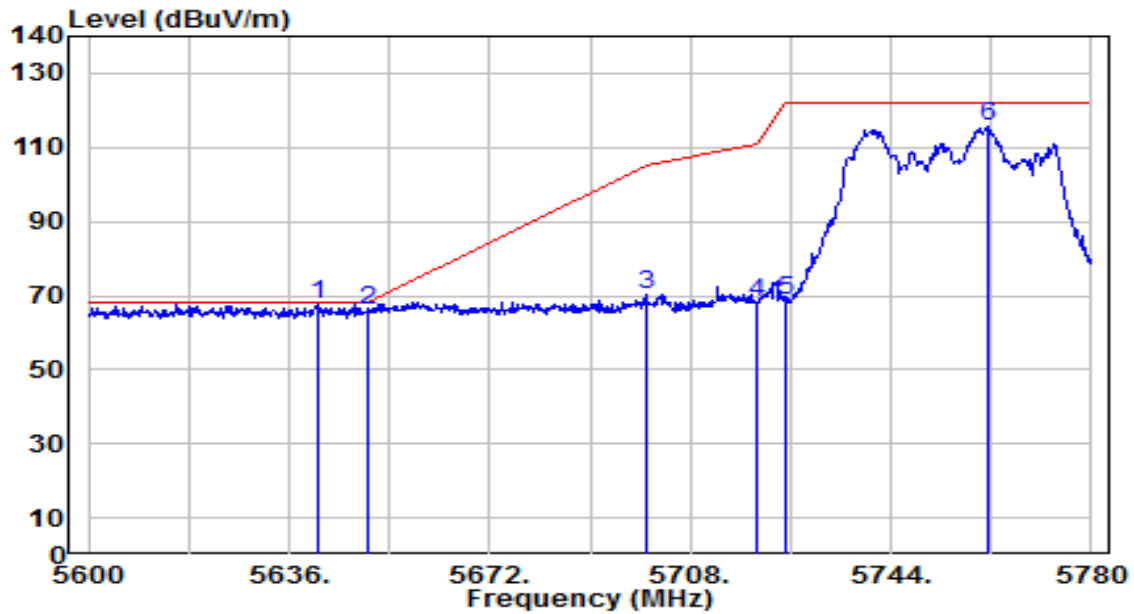


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.220	61.98	5.85	67.83	-0.37	68.20	150	205	Peak
2		5650.000	59.94	5.88	65.82	-2.38	68.20	150	205	Peak
3		5700.000	64.31	6.05	70.36	-34.84	105.20	150	205	Peak
4		5720.000	62.27	6.13	68.39	-42.41	110.80	150	205	Peak
5		5725.000	62.34	6.14	68.48	-53.72	122.20	150	205	Peak
6		5761.640	109.42	6.28	115.70	N/A	N/A	150	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

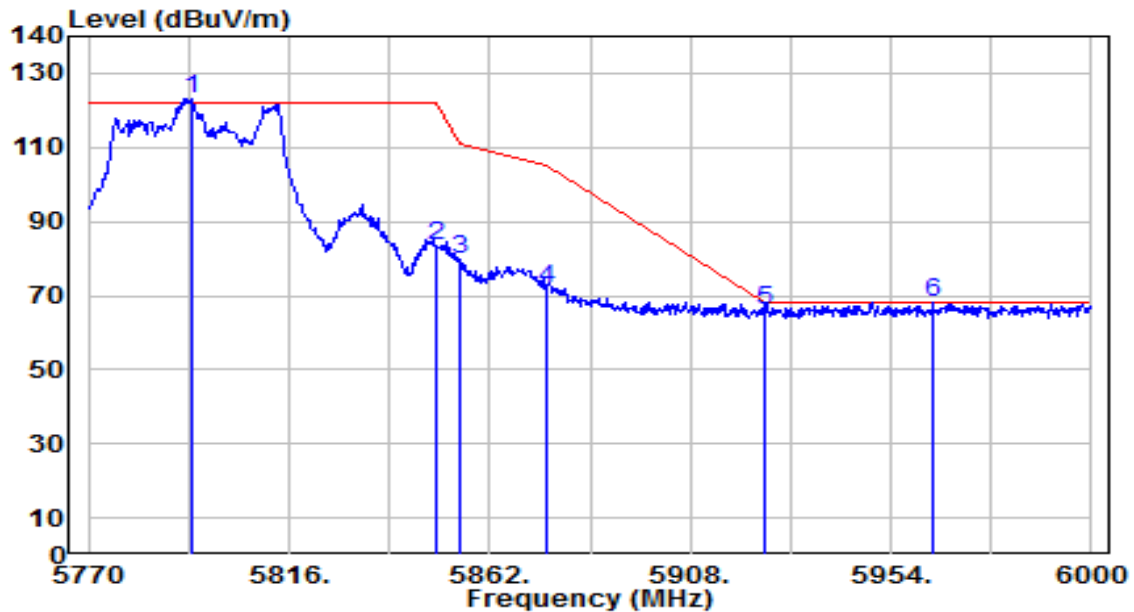


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.690	116.74	6.39	123.13	N/A	N/A	140	235	Peak
2	5850.000	76.96	6.57	83.54	-38.66	122.20	140	235	Peak
3	5855.000	73.10	6.59	79.69	-31.11	110.80	140	235	Peak
4	5875.000	65.40	6.65	72.05	-33.15	105.20	140	235	Peak
5	5925.000	59.44	6.81	66.26	-1.94	68.20	140	235	Peak
6	* 5963.660	61.13	6.95	68.08	-0.12	68.20	140	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

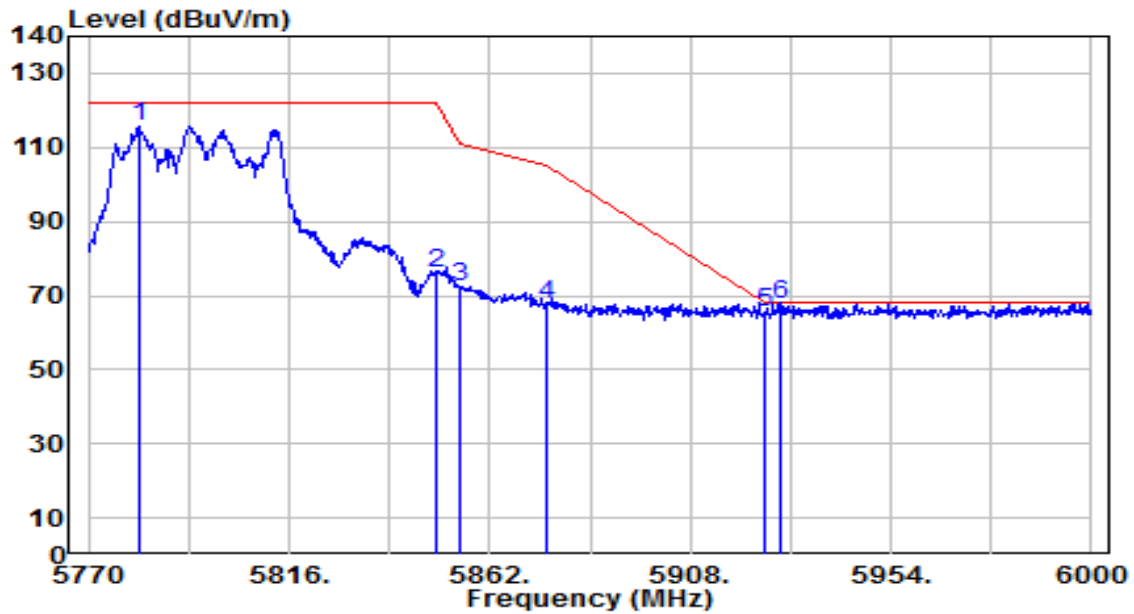


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5781.960	109.55	6.35	115.91	N/A	N/A	170	160	Peak
2	5850.000	69.63	6.57	76.21	-45.99	122.20	170	160	Peak
3	5855.000	65.97	6.59	72.56	-38.24	110.80	170	160	Peak
4	5875.000	60.84	6.65	67.49	-37.71	105.20	170	160	Peak
5	5925.000	58.94	6.81	65.76	-2.44	68.20	170	160	Peak
6	* 5928.700	61.01	6.83	67.83	-0.37	68.20	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

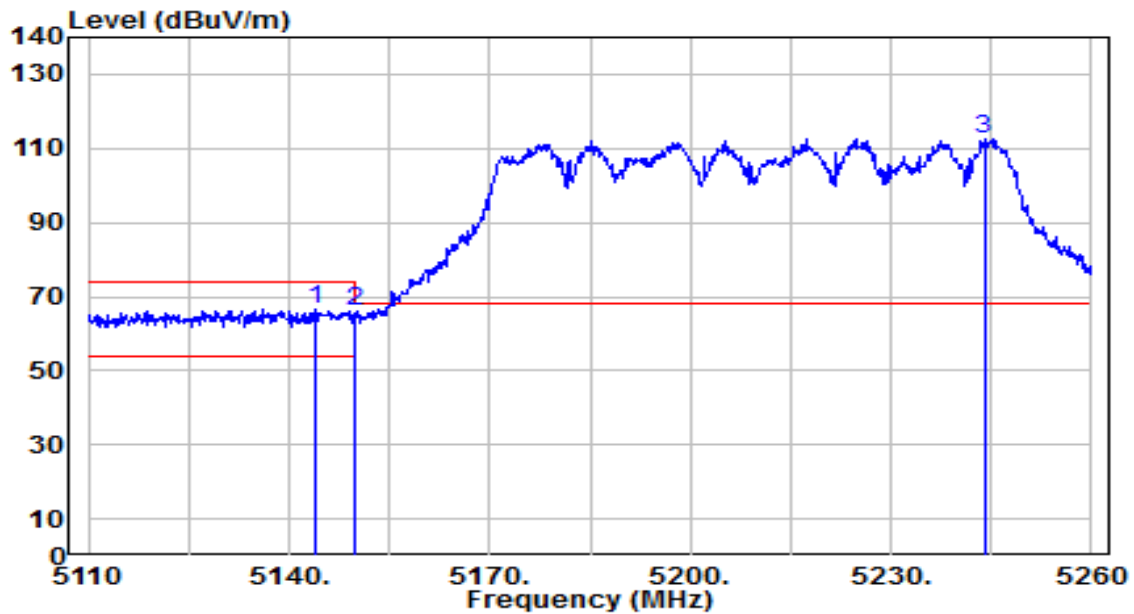


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.050	61.40	5.05	66.45	-7.55	74.00	255	115	Peak
2		5150.000	61.12	5.06	66.18	-7.82	74.00	255	115	Peak
3		5243.950	107.57	5.17	112.74	N/A	N/A	255	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

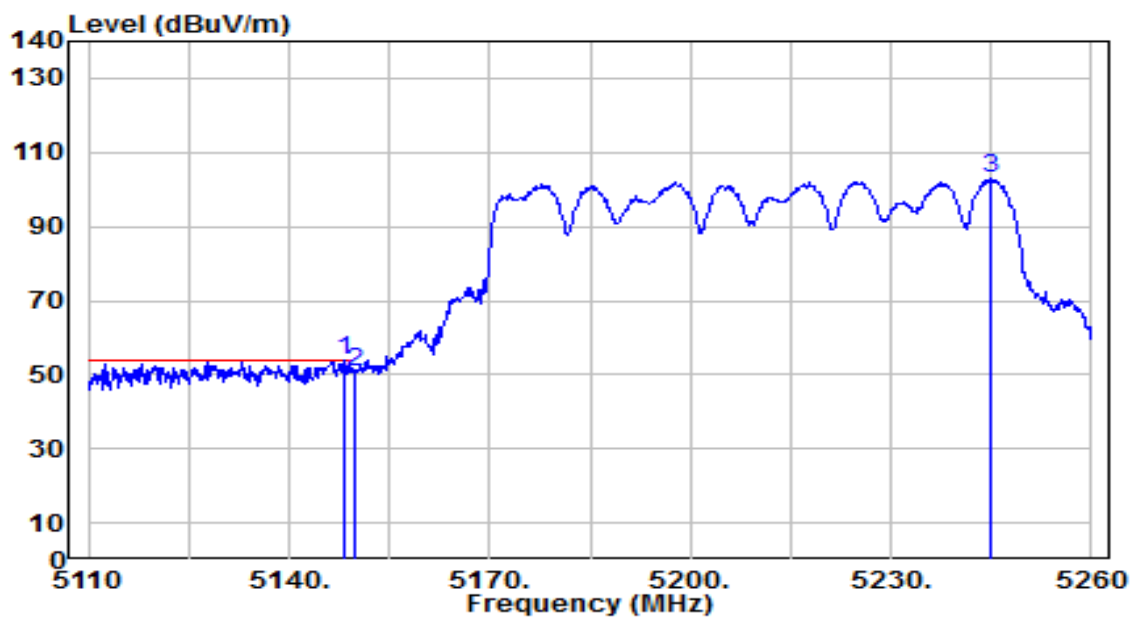


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	48.81	5.06	53.87	-0.13	54.00	255	115	Average
2		5150.000	45.53	5.06	50.59	-3.41	54.00	255	115	Average
3		5244.850	97.87	5.17	103.04	N/A	N/A	255	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

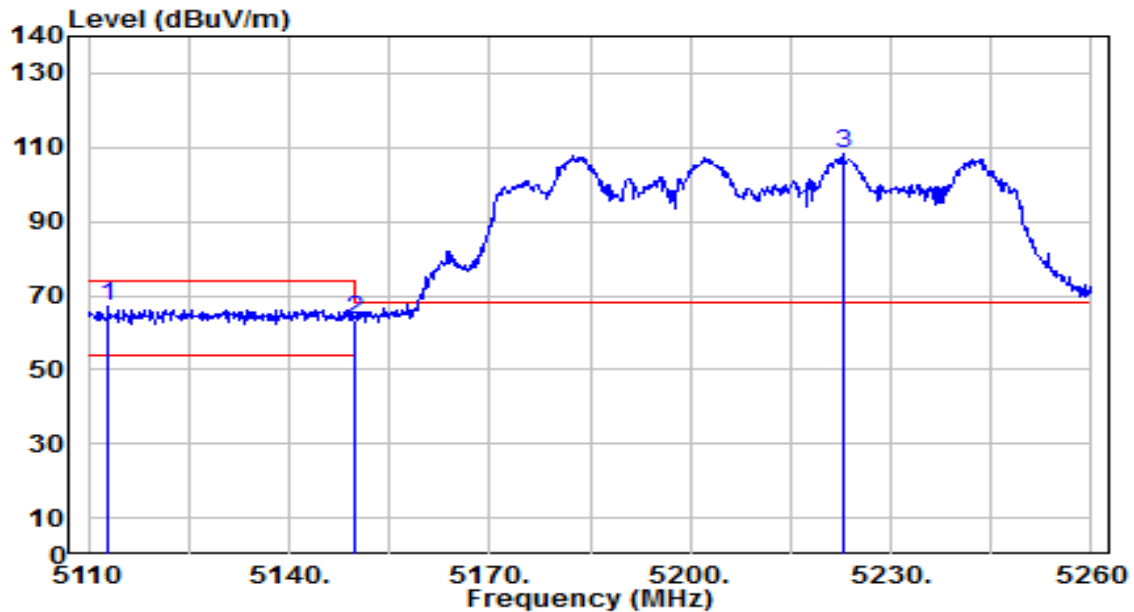


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5113.000	61.89	5.01	66.90	-7.10	74.00	120	180	Peak
2		5150.000	58.40	5.06	63.46	-10.54	74.00	120	180	Peak
3		5222.800	103.00	5.15	108.15	N/A	N/A	120	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

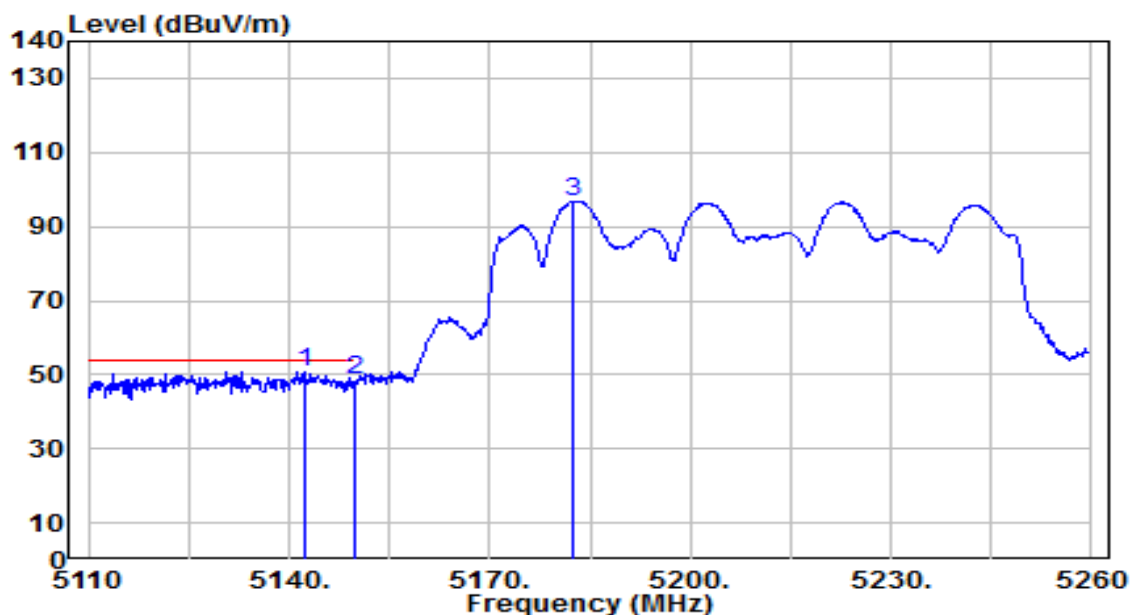


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.250	45.68	5.05	50.73	-3.27	54.00	120	180	Average
2		5150.000	43.37	5.06	48.43	-5.57	54.00	120	180	Average
3		5182.300	91.77	5.11	96.88	N/A	N/A	120	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

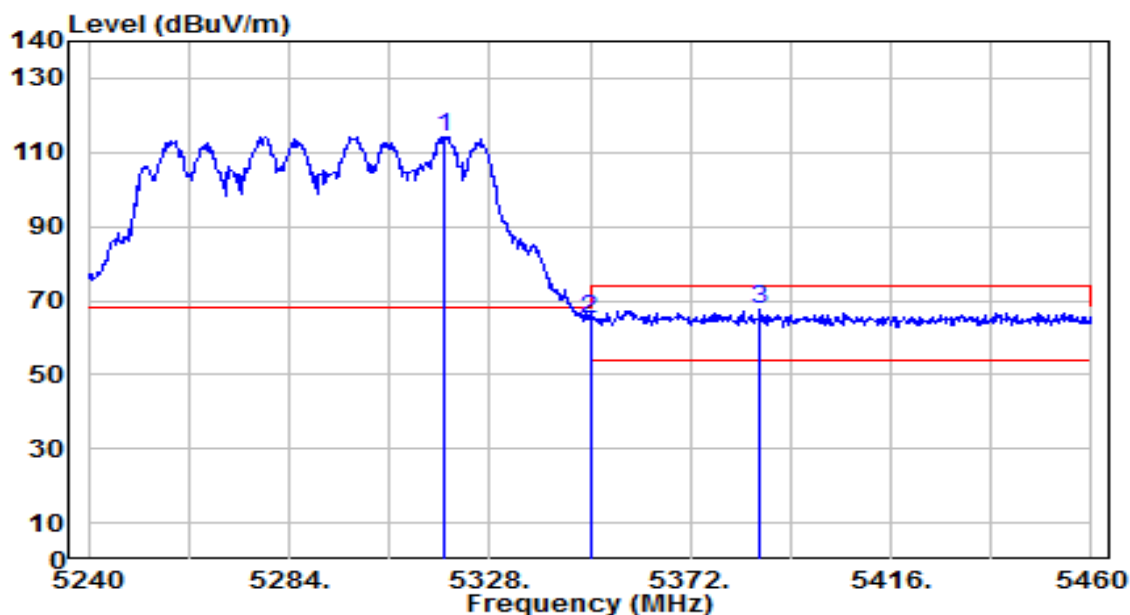


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5318.100	109.02	5.23	114.24	N/A	N/A	295	120	Peak
2	*	5350.000	59.94	5.25	65.19	-3.01	68.20	295	120	Peak
3		5387.180	62.24	5.29	67.53	-6.47	74.00	295	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

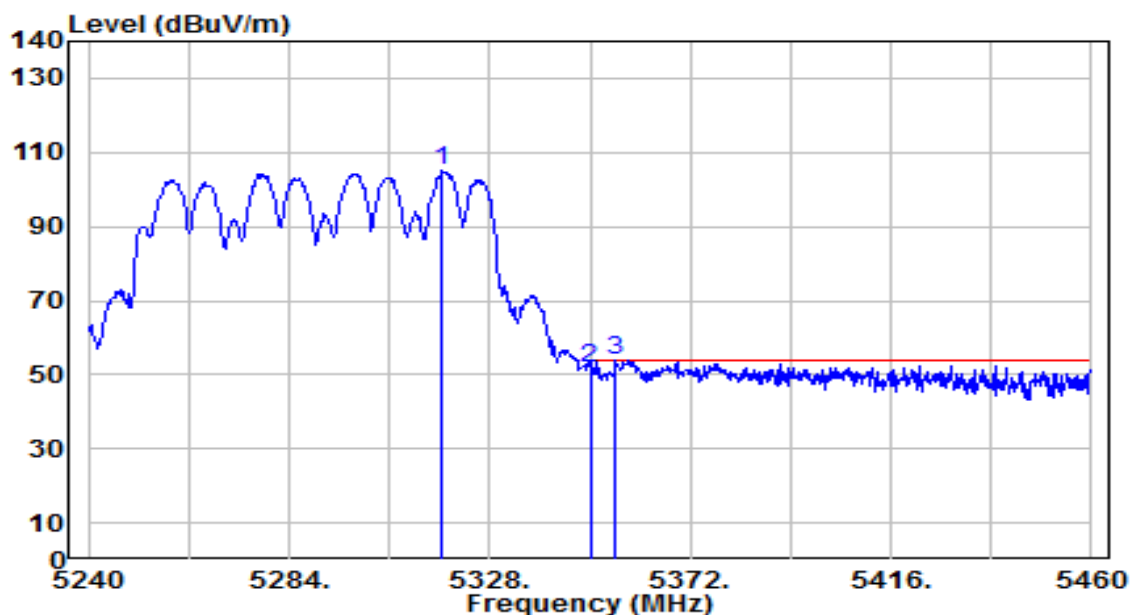


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.660	99.80	5.23	105.02	N/A	N/A	295	120	Average
2	5350.000	46.32	5.25	51.58	-2.42	54.00	295	120	Average
3	* 5355.720	48.64	5.26	53.90	-0.10	54.00	295	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

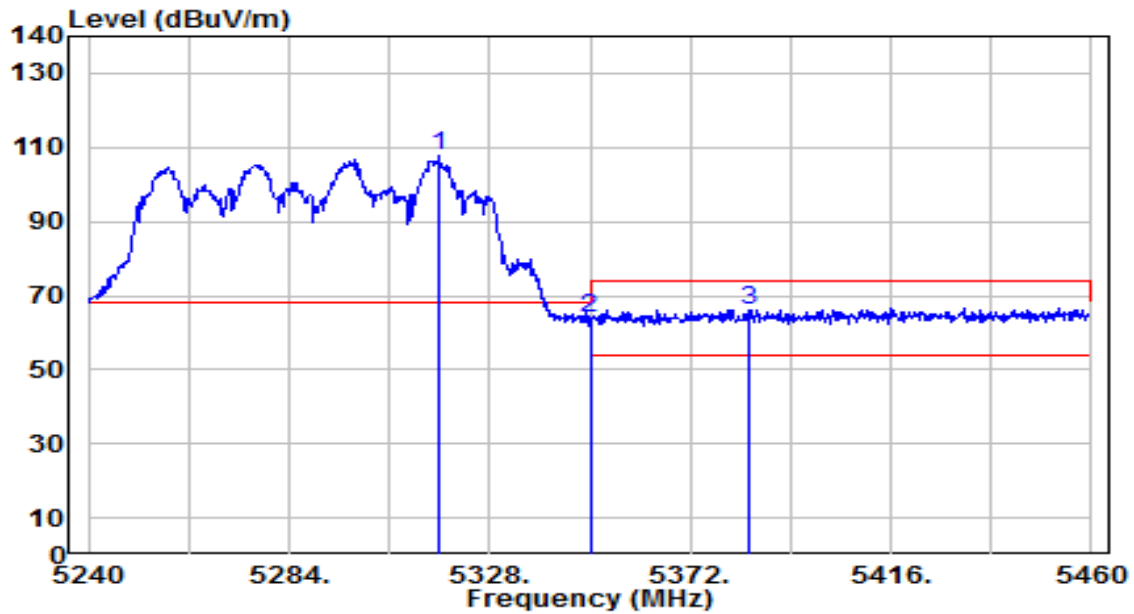


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5317.000	102.34	5.23	107.57	N/A	N/A	165	195	Peak
2	*	5350.000	58.41	5.25	63.66	-4.54	68.20	165	195	Peak
3		5384.760	60.93	5.29	66.21	-7.79	74.00	165	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

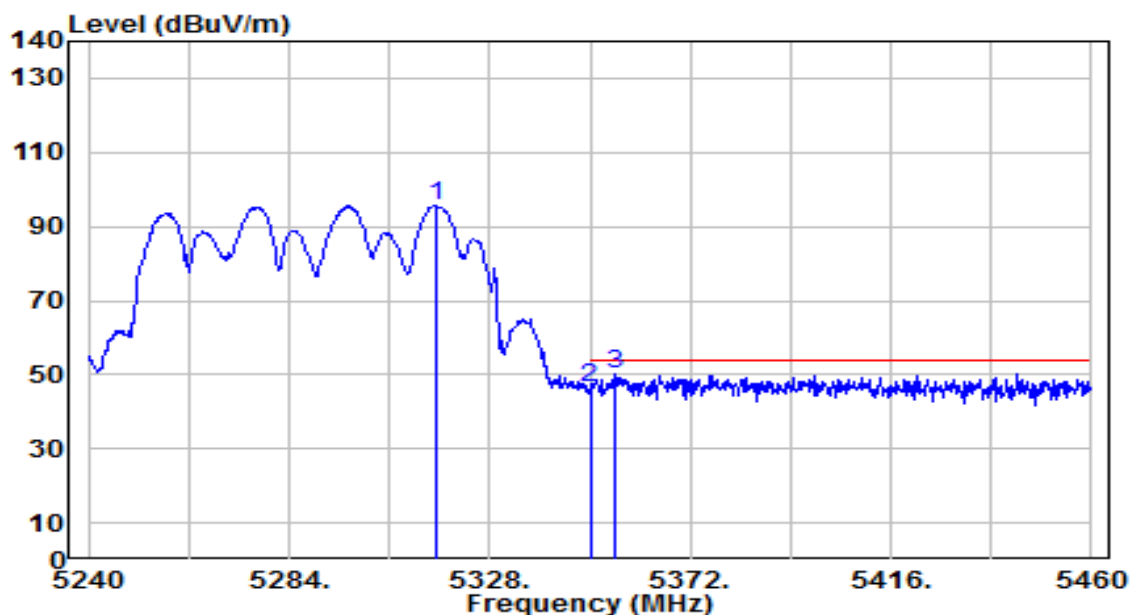


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.120	90.46	5.22	95.69	N/A	N/A	165	195	Average
2	5350.000	41.45	5.25	46.71	-7.29	54.00	165	195	Average
3	* 5355.280	44.74	5.26	50.00	-4.00	54.00	165	195	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

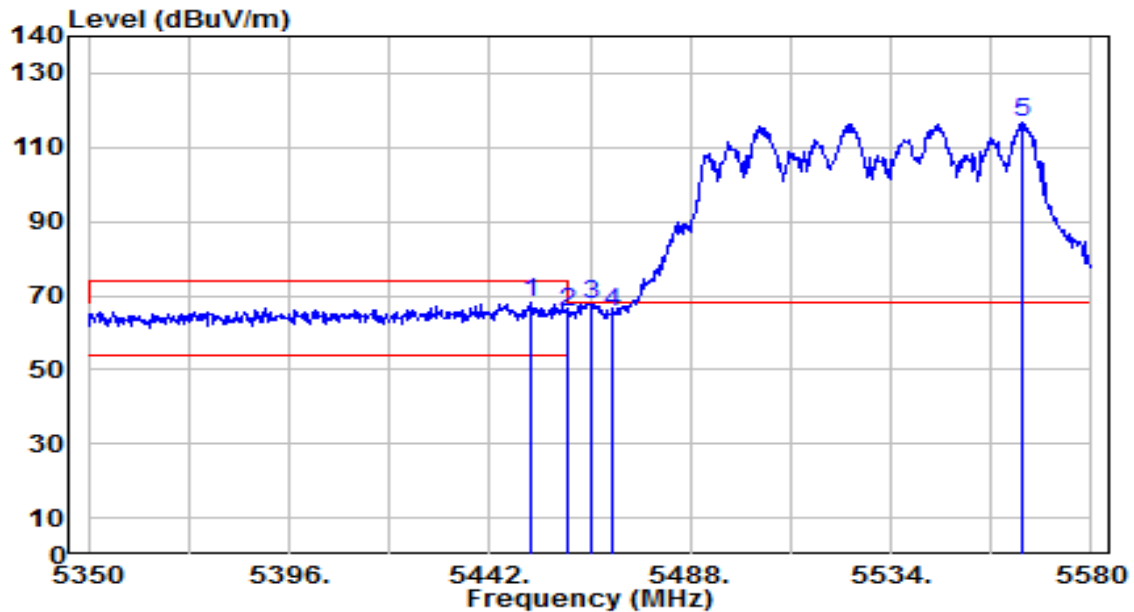


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.200	62.62	5.32	67.94	-6.06	74.00	225	125	Peak
2	5460.000	60.35	5.32	65.67	-2.53	68.20	225	125	Peak
3	* 5465.460	62.50	5.33	67.83	-0.37	68.20	225	125	Peak
4	5470.000	60.38	5.33	65.71	-2.49	68.20	225	125	Peak
5	5564.130	111.41	5.57	116.98	N/A	N/A	225	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

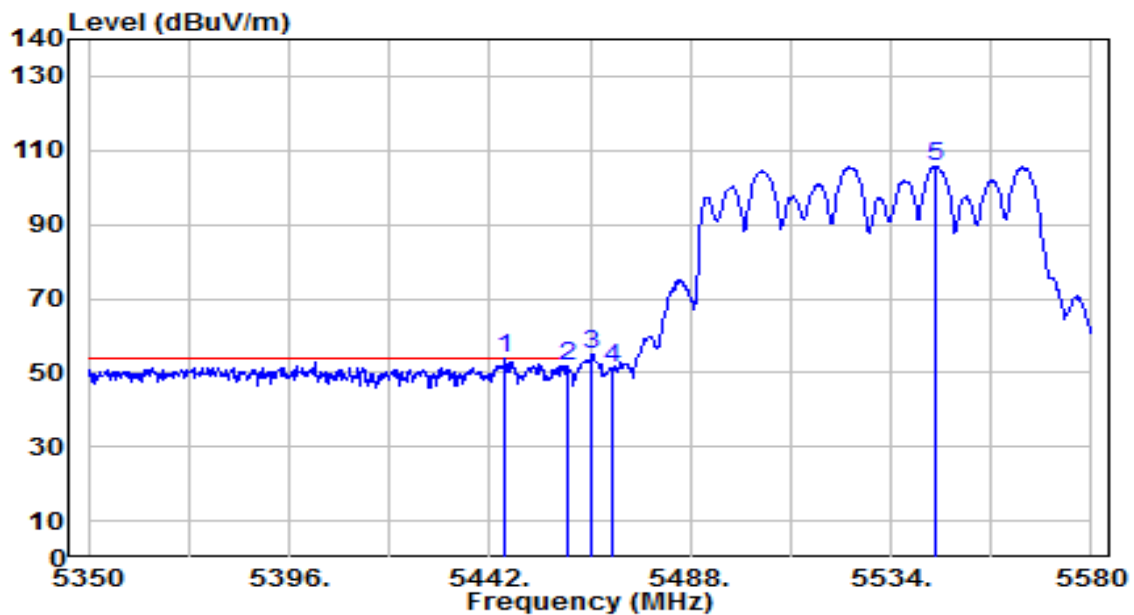


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5445.450	48.46	5.32	53.78	-0.22	54.00	225	125	Average
2		5460.000	46.35	5.32	51.68	-2.32	54.00	225	125	Average
3		5465.460	49.70	5.33	55.03	N/A	N/A	225	125	Average
4		5470.000	45.73	5.33	51.05	N/A	N/A	225	125	Average
5		5544.120	100.33	5.50	105.83	N/A	N/A	225	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

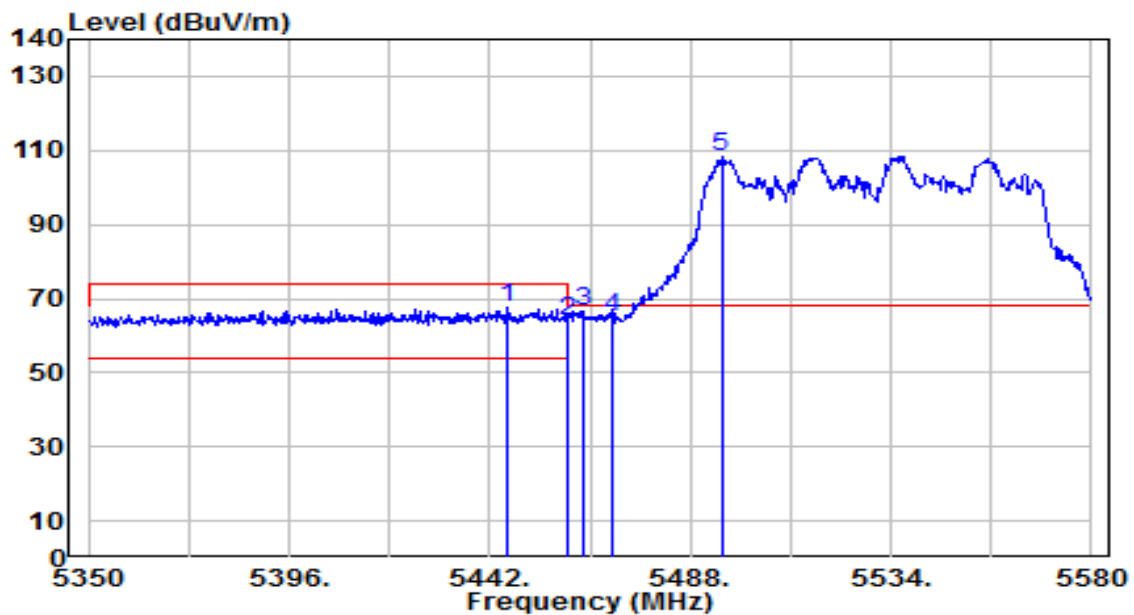


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5445.910	62.19	5.32	67.51	-6.49	74.00	140	200	Peak
2	5460.000	58.49	5.32	63.81	-4.39	68.20	140	200	Peak
3	* 5463.620	61.15	5.33	66.47	-1.73	68.20	140	200	Peak
4	5470.000	59.49	5.33	64.82	-3.38	68.20	140	200	Peak
5	5495.130	102.96	5.34	108.30	N/A	N/A	140	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

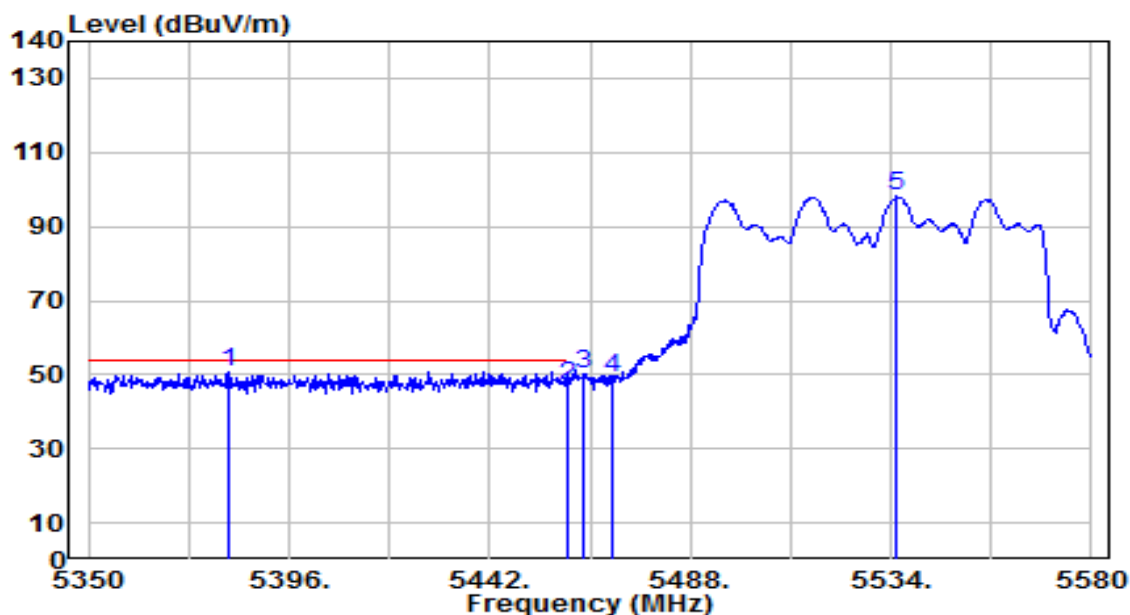


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5382.430	45.54	5.28	50.83	-3.17	54.00	140	200	Average
2		5460.000	41.63	5.32	46.95	-7.05	54.00	140	200	Average
3		5463.620	45.01	5.33	50.34	N/A	N/A	140	200	Average
4		5470.000	43.93	5.33	49.26	N/A	N/A	140	200	Average
5		5535.380	92.62	5.47	98.09	N/A	N/A	140	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

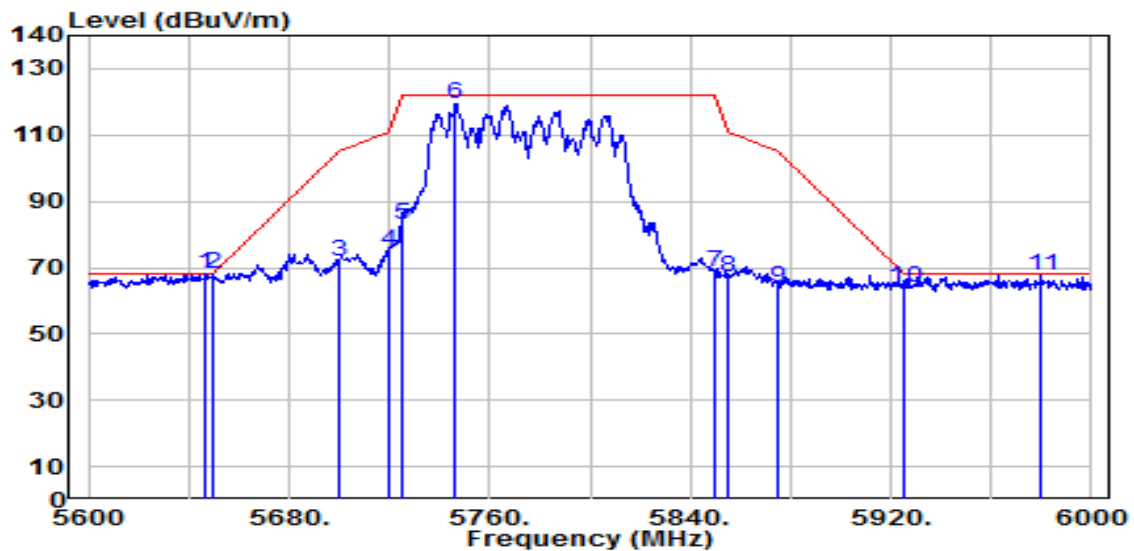


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5646.800	62.15	5.87	68.02	-0.18	68.20	235	115	Peak
2	* 5650.000	62.20	5.88	68.08	-0.12	68.20	235	115	Peak
3	5700.000	65.73	6.05	71.78	-33.42	105.20	235	115	Peak
4	5720.000	69.00	6.13	75.12	-35.68	110.80	235	115	Peak
5	5725.000	76.97	6.14	83.12	-39.08	122.20	235	115	Peak
6	5746.400	113.40	6.22	119.62	N/A	N/A	235	115	Peak
7	5850.000	62.22	6.57	68.79	-53.41	122.20	235	115	Peak
8	5855.000	60.49	6.59	67.08	-43.72	110.80	235	115	Peak
9	5875.000	57.27	6.65	63.92	-41.28	105.20	235	115	Peak
10	5925.000	57.21	6.81	64.03	-4.17	68.20	235	115	Peak
11	5980.000	60.81	7.01	67.82	-0.38	68.20	235	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

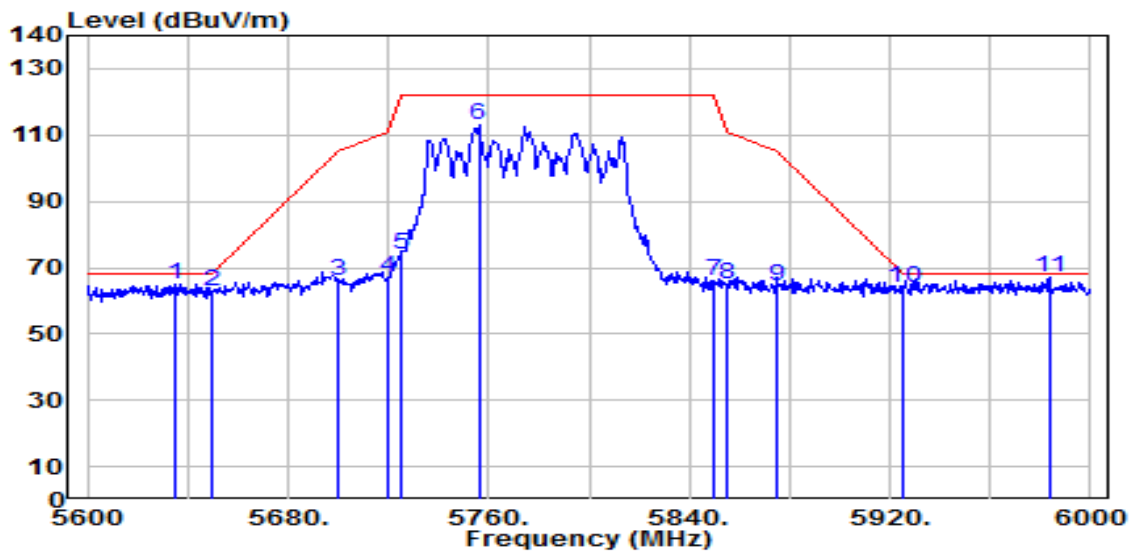


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5634.800	59.18	5.83	65.01	-3.19	68.20	155	160	Peak
2	5650.000	56.77	5.88	62.65	-5.55	68.20	155	160	Peak
3	5700.000	59.87	6.05	65.92	-39.28	105.20	155	160	Peak
4	5720.000	61.14	6.13	67.26	-43.54	110.80	155	160	Peak
5	5725.000	67.69	6.14	73.83	-48.37	122.20	155	160	Peak
6	5756.000	106.58	6.26	112.83	N/A	N/A	155	160	Peak
7	5850.000	59.46	6.57	66.03	-56.17	122.20	155	160	Peak
8	5855.000	58.34	6.59	64.92	-45.88	110.80	155	160	Peak
9	5875.000	58.01	6.65	64.66	-40.54	105.20	155	160	Peak
10	5925.000	56.99	6.81	63.80	-4.40	68.20	155	160	Peak
11	* 5983.600	59.86	7.02	66.89	-1.31	68.20	155	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE15000 Ceiling Mount Tri-Band Wi-Fi 7 Access Point	Date of Test	2025-05-12
Factor	BBHA 9120D	Temp. / Humidity	23°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

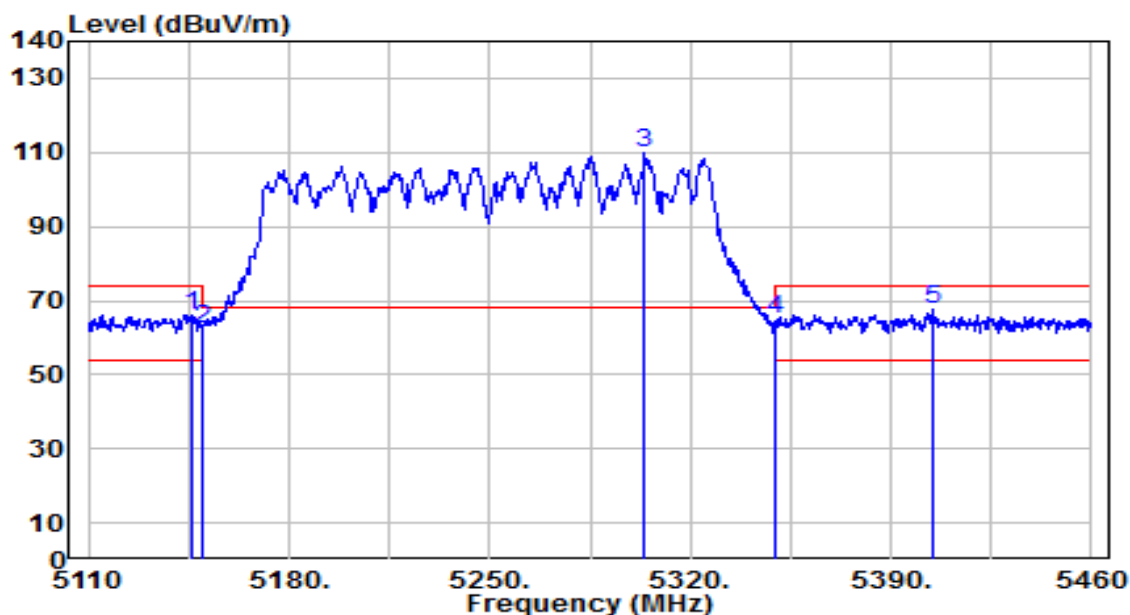

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.700	61.01	5.05	66.06	-7.94	74.00	255	115	Peak
2	5150.000	57.32	5.06	62.38	-11.62	74.00	255	115	Peak
3	5304.250	104.43	5.21	109.64	N/A	N/A	255	115	Peak
4	* 5350.000	59.52	5.25	64.77	-3.43	68.20	255	115	Peak
5	5404.700	62.24	5.30	67.54	-6.46	74.00	255	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.