

# TEST REPORT

<b>Bureau Veritas CPS Korea Tech Limited</b> (Annyeong-dong) 26, 28, 30, Seja-ro 406beon-gil, Hwaseong-si, Gyeonggi-do, Republic of Korea Tel:031-222-4251, Fax: -	Report No.: KST-FCR-250005	
<p>1. Applicant</p> <ul style="list-style-type: none"> <li>• Name : Ettifos Co.</li> <li>• Address : 405, 41, Beolmal-ro 50beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, South K orea</li> </ul> <p>2. Test Item</p> <ul style="list-style-type: none"> <li>• Product Name: THEUS C-V2X RSU</li> <li>• Model Name: ETF-PRO-RC02</li> <li>• Brand: None</li> <li>• FCC ID: 2BHJL-ETF-PRO-RC02</li> </ul> <p>3. Manufacturer</p> <ul style="list-style-type: none"> <li>• Name : Ettifos Co.</li> <li>• Address : 405, 41, Beolmal-ro 50beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, South K orea</li> </ul> <p>4. Date of Test : 2025. 04. 30.</p> <p style="padding-left: 150px;">FCC CFR 47, Part 15. Subpart C-15.247</p> <p>5. Test Method Used : 558074 D01 15.247 Meas Guidance v05r02</p> <p style="padding-left: 150px;">ANSI C 63.10-2013</p> <p>6. Test Result : Compliance</p> <p>7. Note: None</p>		
<p><b>Supplementary Information</b></p> <p>The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in <a href="#">ANSI C 63.26-2015</a>.</p> <p>We attest to the accuracy of data and all measurements reported herein were performed by Bureau Veritas CPS Korea Tech Limited and were made under Chief Engineer's supervision. We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.</p>		
<p>The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report is not related to KOLAS accreditation.</p>		
Affirmation	Tested by Name : Jung, Ho-Cheol  (Signature)	Technical Manager Name : Lee, Mi-Young  (Signature)
<p>2025. 05. 07.</p>		
<p><b>Bureau Veritas CPS Korea Tech Limited</b></p>		

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 Test Facility .....	3
1.2 Location .....	3
1.3 Revision History of test report .....	4
<b>2. EQUIPMENT DESCRIPTION .....</b>	<b>5</b>
<b>3. SYSTEM CONFIGURATION FOR TEST .....</b>	<b>6</b>
3.1 Characteristics of equipment .....	6
3.2 Used peripherals list .....	6
3.3 Product Modification .....	6
3.4 Operating Mode .....	6
3.5 Test Setup of EUT .....	6
3.6 Parameters of Test Software Setting .....	7
3.7 Table for Carrier Frequencies .....	8
3.9 Used Test Equipment List .....	9
<b>4. SUMMARY TEST RESULTS .....</b>	<b>11</b>
<b>5. MEASUREMENT RESULTS .....</b>	<b>12</b>
5.1 Spurious RF Radiated emissions .....	12
5.2 Antenna requirement .....	21

## 1. GENERAL INFORMATION

### 1.1 Test Facility


#### Test laboratory and address

Bureau Veritas CPS Korea Tech Limited  
(Annyeong-dong) 26, 28, 30, Seja-ro 406beon-gil, Hwaseong-si, Gyeonggi-do, Republic of Korea  
Telephone Number: 82-31-222-4251  
Facsimile Number: -

#### Registration information

KOLAS No.: KT232  
RRA (National Radio Research Agency): KR0041  
FCC Designation No.: KR0041  
IC Designation No.: KR0041  
VCCI Membership No.: 2005

### 1.2 Location

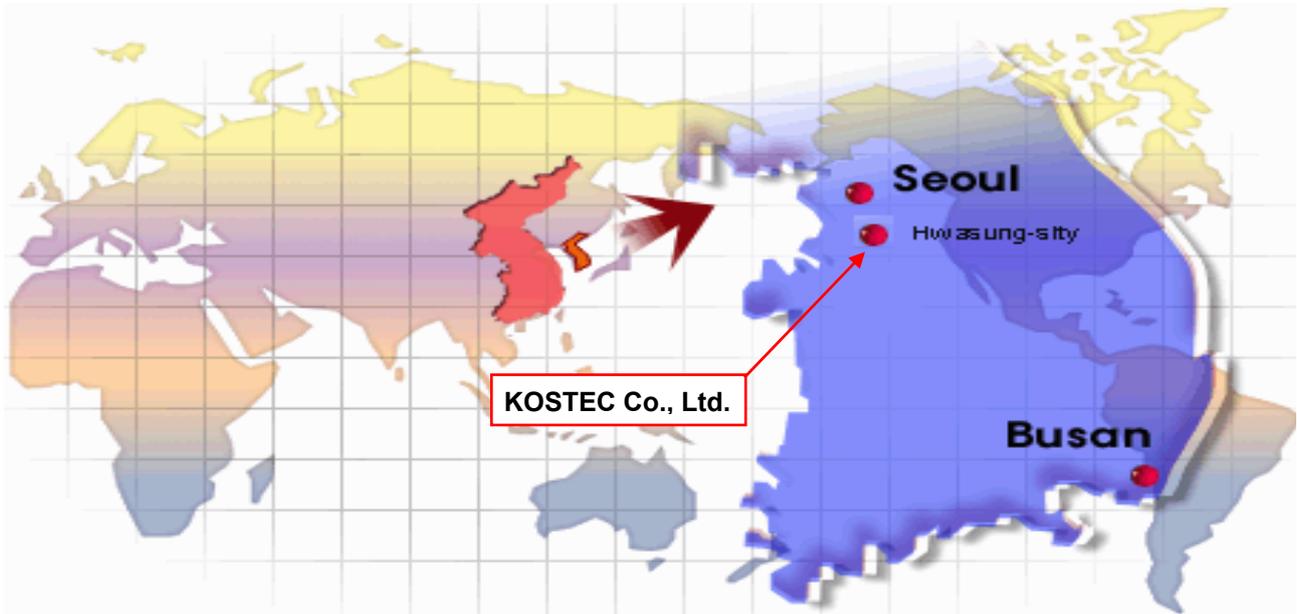

### 1.3 Revision History of test report

Rev.	Revisions	Effect page	Reviewed	Date
-	Initial issue	All	Mi-Young, Lee	2025. 05. 07.

## 2. EQUIPMENT DESCRIPTION

The product specification described herein was declared by manufacturer. And refer to user's manual for the details.

Equipment Name	THEUS C-V2X RSU
Model No	ETF-PRO-RC02
Usage	THEUS C-V2X RSU
Serial Number	Proto type
Modulation type	GFSK(BDR 1 Mbps), $\pi/4$ -DQPSK(EDR 2 Mbps), 8DPSK(EDR 3 Mbps)
Emission Type	F1D/G1D
Maximum output power	6.53 dBm
Operated Frequency	2 402 MHz ~ 2 480 MHz
Channel Number	79
Operation temperature	-10 °C ~ 50 °C
Power Source	DC 48 V(PoE)
Antenna Description	External Dipole antenna, gain : 2.2 dBi
Remark	<ol style="list-style-type: none"> <li>1. The device was operating at its maximum output power for all measurements.</li> <li>2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case (Y) is shown in the report.</li> <li>3. The above DUT's information was declared by manufacturer. Please refer to the specifications or user manual for more detailed description.</li> <li>4. This product is equipped with a certified module, and the details are as follows <ul style="list-style-type: none"> <li>- Applicant: FN-LINK TECHNOLOGY LIMITED</li> <li>- FCC ID: 2AATL-8223A-SR</li> <li>- Model: 8223A-SR</li> </ul> </li> </ol>
FCC ID	2BHJL-ETF-PRO-RC02

### 3. SYSTEM CONFIGURATION FOR TEST

#### 3.1 Characteristics of equipment

The Equipment Under Test (EUT) contains the following capabilities: This equipment is C-V2X RSU. The detailed explanation is refer as user manual.

#### 3.2 Used peripherals list

Description	Model No.	Serial No.	Manufacture	Remark
Notebook	80QQ	PF0E1J1Z	Lenovo PC HK Limited	-

#### 3.3 Product Modification


N/A

#### 3.4 Operating Mode

Constantly transmitting with a modulated carrier at maximum power on the low, middle and high channels.

#### 3.5 Test Setup of EUT

The measurements were taken in continuous transmit mode using the test mode which controlled by Teraterm. The test command and the test Jig and cables were provided by the applicant.

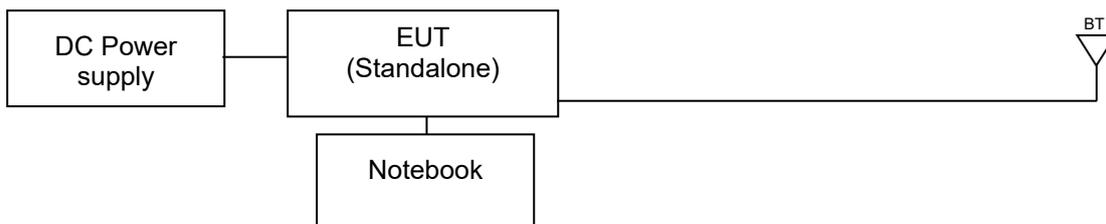



### 3.7 Table for Carrier Frequencies

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>0</b>	<b>2 402</b>	20	2 422	40	2 442	60	2 462
1	2 403	21	2 423	41	2 443	61	2 463
2	2 404	22	2 424	42	2 444	62	2 464
3	2 405	23	2 425	43	2 445	63	2 465
4	2 406	24	2 426	44	2 446	64	2 466
5	2 407	25	2 427	45	2 447	65	2 467
6	2 408	26	2 428	46	2 448	66	2 468
7	2 409	27	2 429	47	2 449	67	2 469
8	2 410	28	2 430	48	2 450	68	2 470
9	2 411	29	2 431	49	2 451	69	2 471
10	2 412	30	2 432	50	2 452	70	2 472
11	2 413	31	2 433	51	2 453	71	2 473
12	2 414	32	2 434	52	2 454	72	2 474
13	2 415	33	2 435	53	2 455	73	2 475
14	2 416	34	2 436	54	2 456	74	2 476
15	2 417	35	2 437	55	2 457	75	2 477
16	2 418	36	2 438	56	2 458	76	2 478
17	2 419	37	2 439	57	2 459	77	2 479
18	2 420	<b>38</b>	<b>2 440</b>	58	2 460	<b>78</b>	<b>2 480</b>
19	2 421	39	2 441	59	2 461		

### 3.9 Used Test Equipment List

No.	Instrument	Model	S/N	Manufacturer	Next Cal Date	Cal interval	used
1	T & H Chamber	PL-3J	15003623	ESPEC CORP	2025.08.13	1 year	<input type="checkbox"/>
2	T & H Chamber	SH-662	93000067	ESPEC CORP	2025.08.13	1 year	<input type="checkbox"/>
3	T & H Chamber	SH-642	93011406	ESPEC CORP	2025.08.13	1 year	<input type="checkbox"/>
4	Spectrum Analyzer	8563EC	3046A00527	Agilent Technology	2026.01.08	1 year	<input type="checkbox"/>
5	Spectrum Analyzer	FSV30	104029	Rohde & Schwarz	2025.08.12	1 year	<input type="checkbox"/>
6	Spectrum Analyzer	FSV30	20-353063	Rohde & Schwarz	2026.01.08	1 year	<input type="checkbox"/>
7	Spectrum Analyzer	FSV40	101727	Rohde & Schwarz	2025.08.12	1 year	<input type="checkbox"/>
8	Signal Analyzer	FSW43	101294	Rohde & Schwarz	2026.01.08	1 year	<input type="checkbox"/>
9	Signal Analyzer	FSW85	101602	Rohde & Schwarz	2025.07.03	1 year	<input type="checkbox"/>
10	EMI Test Receiver	ESCI7	100823	Rohde & Schwarz	2026.01.07	1 year	<input type="checkbox"/>
11	EMI Test Receiver	ESPI	100488	Rohde & Schwarz	2026.01.06	1 year	<input type="checkbox"/>
12	EMI Test Receiver	ESI	837514/004	Rohde & Schwarz	2025.08.12	1 year	<input checked="" type="checkbox"/>
13	Vector Signal Analyzer	89441A	3416A02620	Agilent Technology	2026.01.09	1 year	<input type="checkbox"/>
14	Network Analyzer	8753ES	US39170869	AGILENT	2025.08.13	1 year	<input type="checkbox"/>
15	EPM Series Power meter	E4418B	GB39512547	Agilent Technology	2026.01.08	1 year	<input type="checkbox"/>
16	RF Power Sensor	E9300A	MY41496631	Agilent Technology	2026.01.08	1 year	<input type="checkbox"/>
17	Microwave Frequency Counter	5352B	2908A00480	Agilent Technology	2026.01.06	1 year	<input type="checkbox"/>
18	Audio Analyzer	8903B	3514A16919	Agilent Technology	2026.01.06	1 year	<input type="checkbox"/>
19	Audio Telephone Analyzer	DD-5601CID	520010281	CREDIX	2026.01.06	1 year	<input type="checkbox"/>
20	Modulation Analyzer	8901A	3041A05716	H.P	2026.01.08	1 year	<input type="checkbox"/>
21	Digital storage Oscilloscope	TDS3052	B015962	Tektronix	2025.08.13	1 year	<input type="checkbox"/>
22	ESG-D Series Signal Generator	E4436B	US39260458	Agilent Technology	2026.01.09	1 year	<input type="checkbox"/>
23	Vector Signal Generator	SMBV100A	257557	Rohde & Schwarz	2026.01.09	1 year	<input type="checkbox"/>
24	GNSS Signal Generator	TC-2800A	2800A000494	TESCOM CO., LTD.	2026.01.09	1 year	<input type="checkbox"/>
25	Signal Generator	SMB100A	179628	Rohde & Schwarz	2026.01.09	1 year	<input type="checkbox"/>
26	Signal Generator	N5173B	MY57280148	KEYSIGHT	2026.03.27	1 year	<input type="checkbox"/>
27	SLIDAC	None	0207-4	Myoung sung Ele.	2026.01.06	1 year	<input type="checkbox"/>
28	DC Power supply	DDPS-3K	U03-109	Digitech Power	2026.01.07	1 year	<input checked="" type="checkbox"/>
29	DC Power supply	E3610A	KR24104505	Agilent Technology	2026.01.06	1 year	<input type="checkbox"/>
30	DC Power supply	UP-3005T	68	Unicon Co.,Ltd	2026.01.06	1 year	<input type="checkbox"/>
31	DC Power Supply	SM 3400-D	114701000117	DELTAELEKTRONIKA	2026.01.06	1 year	<input type="checkbox"/>
32	DC Power supply	6632B	MY43004005	Agilent Technology	2026.01.06	1 year	<input type="checkbox"/>
33	DC Power Supply	6632B	MY43004137	Agilent Technology	2026.01.06	1 year	<input type="checkbox"/>
34	Termination	1433-3	LM718	WEINSCHEL	2026.01.08	1 year	<input type="checkbox"/>
35	Termination	1432-3	QR946	AEROFLEX/WEINSCHEL	2026.01.08	1 year	<input type="checkbox"/>
36	Attenuator	8498A	3318A09485	HP	2026.01.08	1 year	<input type="checkbox"/>
37	Step Attenuator	8494B	3308A32809	HP	2026.01.08	1 year	<input type="checkbox"/>
38	RF Step Attenuator	RSP	100091	Rohde & Schwarz	2026.01.09	1 year	<input type="checkbox"/>
39	Attenuator	18B50W-20F	64671	INMET	2026.01.09	1 year	<input type="checkbox"/>
40	Attenuator	10 dB	1	Rohde & Schwarz	2026.01.08	1 year	<input type="checkbox"/>
41	Attenuator	54A-10	74564	WEINSCHEL	2025.08.19	1 year	<input type="checkbox"/>
42	Attenuator	56-10	66920	WEINSCHEL	2026.01.08	1 year	<input type="checkbox"/>
43	Attenuator	SA18N100-20	001	FAIRVIEW MICROWAVE	2025.08.12	1 year	<input type="checkbox"/>
44	Attenuator	SA26B-10	33464/2134	FAIRVIEW MICROWAVE	2025.08.19	1 year	<input type="checkbox"/>
45	Attenuator	SA4018-10	DC 2126	FAIRVIEW MICROWAVE	2025.08.19	1 year	<input type="checkbox"/>
46	Power divider	11636B	51212	HP	2026.01.08	1 year	<input type="checkbox"/>
47	3Way Power divider	KPDSU3W	00070365	KMW	2025.08.12	1 year	<input type="checkbox"/>
48	4Way Power divider	70052651	173834	KRYTAR	2026.01.08	1 year	<input type="checkbox"/>
49	3Way Power divider	1580	SQ361	WEINSCHEL	2026.01.08	1 year	<input type="checkbox"/>
50	OSP	OSP120	101577	Rohde & Schwarz	2026.01.09	1 year	<input type="checkbox"/>
51	White noise audio filter	ST31EQ	101902	SoundTech	2025.08.13	1 year	<input type="checkbox"/>

No.	Instrument	Model	S/N	Manufacturer	Next Cal Date	Cal interval	used
52	Dual directional coupler	778D	17693	HEWLETT PACKARD	2026.01.09	1 year	<input type="checkbox"/>
53	Dual directional coupler	772D	2839A00924	HEWLETT PACKARD	2026.01.09	1 year	<input type="checkbox"/>
54	Band rejection filter	3TNF-0006	26	DOVER Tech	2026.01.09	1 year	<input type="checkbox"/>
55	Band rejection filter	3TNF-0007	311	DOVER Tech	2026.01.09	1 year	<input type="checkbox"/>
56	Band rejection filter	WTR-BRF2442-84NN	09020001	WAVE TECH Co.,LTD	2026.01.09	1 year	<input type="checkbox"/>
57	Band rejection filter	WRCJV12-5695-5725-5825-5855-50SS	1	Wainwright Instruments GmbH	2026.01.09	1 year	<input type="checkbox"/>
58	Band rejection filter	WRCJV12-5120-5150-5350-5380-40SS	4	Wainwright Instruments GmbH	2026.01.09	1 year	<input type="checkbox"/>
59	Band rejection filter	WRCGV10-2360-2400-2500-2540-50SS	2	Wainwright Instruments GmbH	2026.01.09	1 year	<input type="checkbox"/>
60	Band rejection filter	CTF-155M-S1	001	RF One Electronics	2025.08.12	1 year	<input type="checkbox"/>
61	Band rejection filter	CTF-435M-S1	001	RF One Electronics	2025.08.12	1 year	<input type="checkbox"/>
62	Band rejection filter	CTF-5890M-70MS1	1	RF One Electronics	2026.01.09	1 year	<input type="checkbox"/>
63	Highpass Filter	WHJS1100-10EF	1	WAINWRIGHT	2026.01.08	1 year	<input type="checkbox"/>
64	Highpass Filter	WHJS3000-10EF	1	WAINWRIGHT	2026.01.08	1 year	<input type="checkbox"/>
65	Highpass Filter	WHNX6-5530-7000-26500-40CC	2	Wainwright Instruments GmbH	2026.01.13	1 year	<input type="checkbox"/>
66	Highpass Filter	WHNX6-2370-3000-26500-40CC	4	Wainwright Instruments GmbH	2026.01.13	1 year	<input type="checkbox"/>
67	WideBand Radio Communication Tester	CMW500	102276	Rohde & Schwarz	2026.01.09	1 year	<input type="checkbox"/>
68	WideBand Radio Communication Tester	CMW500	117235	Rohde & Schwarz	2026.01.15	1 year	<input type="checkbox"/>
69	WideBand Radio Communication Tester	MT8000A	6261987920	Anritsu	2026.01.08	1 year	<input type="checkbox"/>
70	WideBand Radio Communication Tester	MT8821C	6262287695	Anritsu	2026.01.08	1 year	<input type="checkbox"/>
71	Bluetooth Tester	TC-3000B	3000B6A0166	TESCOM CO., LTD.	2026.01.10	1 year	<input type="checkbox"/>
72	Loop Antenna	6502	9203-0493	EMCO	2025.05.23	2 year	<input type="checkbox"/>
73	Loop Antenna	FMZB1513	#374	Schwarzbeck	2027.02.11	2 year	<input checked="" type="checkbox"/>
74	BiconiLog Antenna <sub>(R)</sub>	3142C	35880	ETS-LINDGREN	2026.10.17	2 year	<input checked="" type="checkbox"/>
75	Trilog-Broadband Antenna <sub>(R)</sub>	VULB 9168	9168-606	SCHWARZBECK	2026.09.03	2 year	<input type="checkbox"/>
76	Biconical Antenna <sub>(T)</sub>	VUBA9117	9117-342	Schwarz beck	2026.01.16	2 year	<input type="checkbox"/>
77	Horn Antenna	3115	9605-4834	EMCO	2026.02.21	1 year	<input type="checkbox"/>
78	Horn Antenna	QMS-00208	21909	STEATITE ANTENNA	2026.03.31	1 year	<input type="checkbox"/>
79	Horn Antenna <sub>(R)</sub>	3117	00135191	ETS-LINDGREN	2026.03.24	1 year	<input checked="" type="checkbox"/>
80	Horn Antenna <sub>(T)</sub>	3115	2996	EMCO	2026.01.07	1 year	<input type="checkbox"/>
81	Horn Antenna <sub>(R)</sub>	BBHA 9170	9170-722	SCHWARZBECK	2026.01.13	1 year	<input checked="" type="checkbox"/>
82	Horn Antenna <sub>(T)</sub>	BBHA 9170	743	SCHWARZBECK	2026.01.07	1 year	<input type="checkbox"/>
83	AMPLIFIER(A 10)	TK-PA01S	220109-L	TESTEK	2026.01.07	1 year	<input type="checkbox"/>
84	AMPLIFIER(C 3)	TK-PA01S	200141-L	TESTEK	2025.08.12	1 year	<input checked="" type="checkbox"/>
85	PREAMPLIFIER(C 3)	8449B	3008A02577	Agilent	2026.01.06	1 year	<input type="checkbox"/>
86	RF PRE AMPLIFIER	SCU08F2	100762	Rohde & Schwarz	2025.08.22	1 year	<input type="checkbox"/>
87	AMPLIFIER	TK-PA18	150003	TESTEK	2026.01.07	1 year	<input checked="" type="checkbox"/>
88	AMPLIFIER	TK-PA1840H	160010-L	TESTEK	2026.01.06	1 year	<input checked="" type="checkbox"/>

#### 4. SUMMARY TEST RESULTS

Description of Test	FCC Rule	Reference Clause	Used	Test Result
Peak Output Power	§ 15.247(b)(1)	-	<input type="checkbox"/>	N/P <sup>1)</sup>
20 dB Bandwidth	§ 15.247(a)(1)	-	<input type="checkbox"/>	N/P <sup>1)</sup>
Channel Separation	§ 15.247(a)(1)	-	<input type="checkbox"/>	N/P <sup>1)</sup>
Number of Hopping Channels	§ 15.247(a)(1)	-	<input type="checkbox"/>	N/P <sup>1)</sup>
Time of Occupancy	§ 15.247(a)(1)	-	<input type="checkbox"/>	N/P <sup>1)</sup>
Conducted Spurious Emissions	§ 15.247(d)	-	<input type="checkbox"/>	N/P <sup>1)</sup>
Spurious RF radiated emissions	15.247(d), 15.209(a)	Clause 5.1	<input checked="" type="checkbox"/>	Compliance
Antenna requirement	15.203, 15.247(b)	Clause 5.2	<input checked="" type="checkbox"/>	Compliance
AC Power Conducted emissions	15.207	-	<input type="checkbox"/>	N/A <sup>1)</sup>

Compliance/pass : The EUT complies with the essential requirements in the standard.  
 Not Compliance : The EUT does not comply with the essential requirements in the standard.  
 N/A : The test was not applicable in the standard.

1) This product uses DC power and is therefore exempt from testing.

N/P: Not Performed

1) Leveraged from module certification report under FCC ID: 2AATL-8223A-SR(Report No.: NTC1712035FV00, NTC1712033FV00)

#### Procedure Reference

FCC CFR 47, Part 15. Subpart C-15.247  
 558074 D01 15.247 Meas Guidance v05r02  
 ANSI C 63.10-2013

## 5. MEASUREMENT RESULTS

### 5.1 Spurious RF Radiated emissions

#### 5.1.1 Standard Applicable [ FCC §15.247(d)]

##### FCC

All other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10 GHz, the frequency Range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, Whichever is lower. In addition, radiated emissions which fall in the restricted bands, as defined in Sec.15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a)

§15.209 and RSS-Gen limits for radiated emissions measurements (distance at 3 m)

Frequency Band [MHz]	DISTANCE [Meters]	Limit [ $\mu\text{W}/\text{m}$ ]	Limit [ $\text{dB}\mu\text{W}/\text{m}$ ]	Detector
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)	Peak
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)	Peak
1.705 ~ 30.0	30	30	29.54	Peak
30 - 88	3	100 **	40.00	Quasi peak
88 - 216	3	150 **	43.52	Quasi peak
216 - 960	3	200 **	46.02	Quasi peak
Above 960	3	500	54.00	Average
Above 1000	3	74.0 $\text{dB}\mu\text{W}/\text{m}$ (Peak), 54.0 $\text{dB}\mu\text{W}/\text{m}$ (Average)		

\*\* fundamental emissions from intentional radiators operation under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, or 470-806 MHz. However, operation within these Frequency bands is permitted under other sections of this Part Section 15.231 and 15.241

§15.205. Restrict Band of Operation for FCC

[MHz]	[MHz]	[MHz]	[GHz]
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505**	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.
4.177 25 - 4.177 75	37.5 -38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.38 6 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	Above 38.6
13.36 - 13.41			

\*\* Until February 1, 1999, this restricted band shall be 0.490-0.510

## §15.205. Restrict Band of Operation for IC

[MHz]	[MHz]	[MHz]	[GHz]
0.090 - 0.110	12.519 75 - 12.520 25	399.9 - 410	5.35 - 5.46
2.173 5 - 2.190 5	12.576 75 - 12.577 25	608 - 614	7.25 - 7.75
3.020 - 3.026	13.36 - 13.41	960 - 1 427	8.025 - 8.
4.125 - 4.128	16.42 - 16.423	1 435 - 1 626.5	9.0 - 9.2
4.177 25 - 4.177 75	16.694 75 - 16.695 25	1 645.5 - 1 646.5	9.3 - 9.5
4.207 25 - 4.207 75	16.804 25 - 16.804 75	1 660 - 1 710	10.6 - 12.7
5.677 - 5.683	25.5 - 25.67	1 718.8 - 1 722.2	13.25 - 13.4
6.215 - 6.218	37.5 - 38.25	2 200 - 2 300	14.47 - 14.5
6.26775-6.26825	73 - 74.6	2 310 - 2 390	15.35 - 16.2
6.31175-6.31225	74.8 - 75.2	2 655 - 2 900	17.7 - 21.4
8.291 - 8.294	108 - 138	3 260 - 3 267	22.01 - 23.12
8.362 - 8.366	156.524 75 - 156.525 25	3 332 - 3 339	23.6 - 24.0
8.376 25 - 8.38 6 75	156.7 - 156.9	3 345.8 - 3 358	31.2 - 31.8
8.414 25 - 8.414 75	240 - 285	3 500 - 4 400	36.43 - 36.5
12.29 - 12.293	322 - 335.4	4 500 - 5 150	Above 38.6

### 5.1.2 Test Environment conditions

- Ambient temperature : (21 ~ 22) °C • Relative Humidity : (44 ~ 49) % R.H.

### 5.1.3 Measurement Procedure

The measurements procedure of the Spurious RF Radiated emissions is as following describe method.

1. The EUT was placed on the top of a rotating table (0.8 meters for below 1 GHz and 1.5 meters for above 1 GHz) above the ground at a 3 meter camber. The table was rotated 360 degree to determine the position of the highest radiation.
  2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna master.
  3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both Horizontal and vertical polarizations of the antenna are set to make the measurement.
  4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 - 360 degrees to find the maximum reading.
  5. The measuring receiver was set to peak detector and specified bandwidth with max hold function.
  6. Low, Middle and high channels were measured, and radiation measurements are performed in X, Y, Z axis positioning. And found the worst axis position and only the test worst case mode is recorded in the report.
- The measurement results are obtained as described below:  
Result(dBμV/m) = Reading(dBμV) + Antenna factor(dB/m)+ CL(dB) + other applicable factor (dB)
  - The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for RMS Average (Duty cycle < 98 %) for Average detection (AV) at frequency above 1 GHz, then the measurement results was added to a correction factor (10 log(1/duty cycle)).
  - The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
  - According to §15.33 (a)(1), Frequency range of radiated measurement is performed the tenth harmonic.

Above test was performed in accordance with ANSI C63.10-2013 Section 6.10.5 & 6.4, 6.5, 6.6


### 5.1.4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the UCISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Radiated Emission measurement: Below 1 GHz: 5.06 dB (CL: Approx 95 %, k=2)  
Above 1 GHz: 5.00 dB (CL: Approx 95 %, k=2)

### 5.1.5 Test Configuration


Radiated emission setup, below 30 MHz

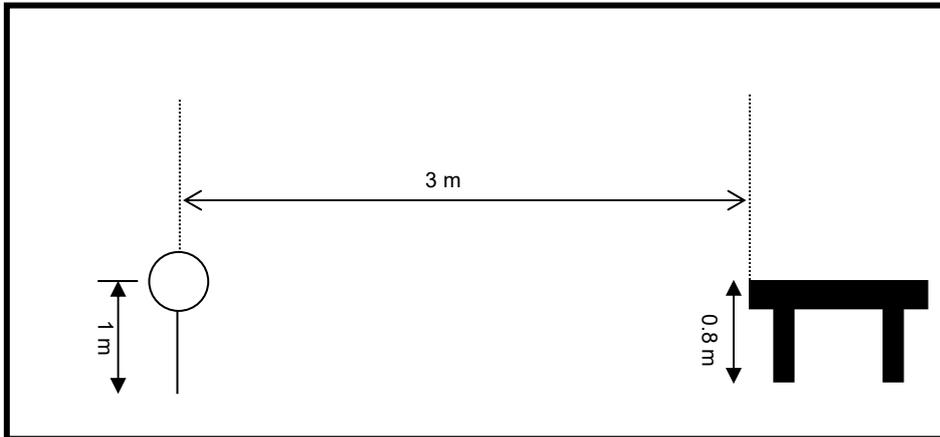

Radiated emission setup, below 1 000 MHz

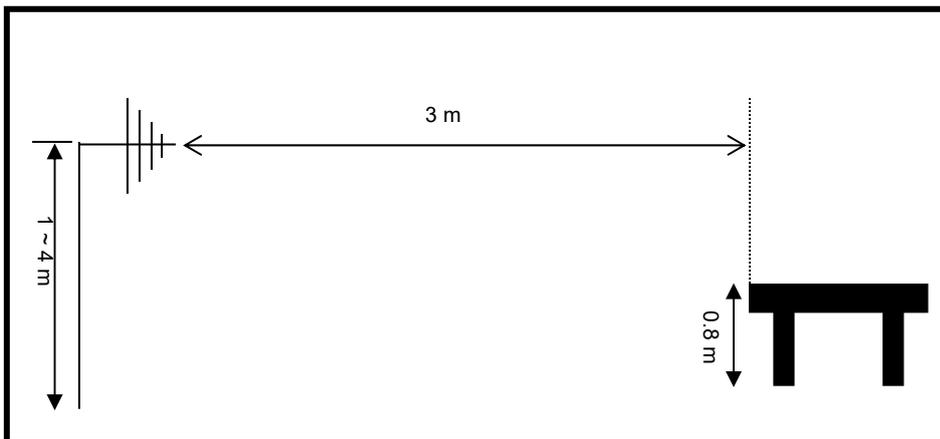

Radiated emission setup, above 1 GHz

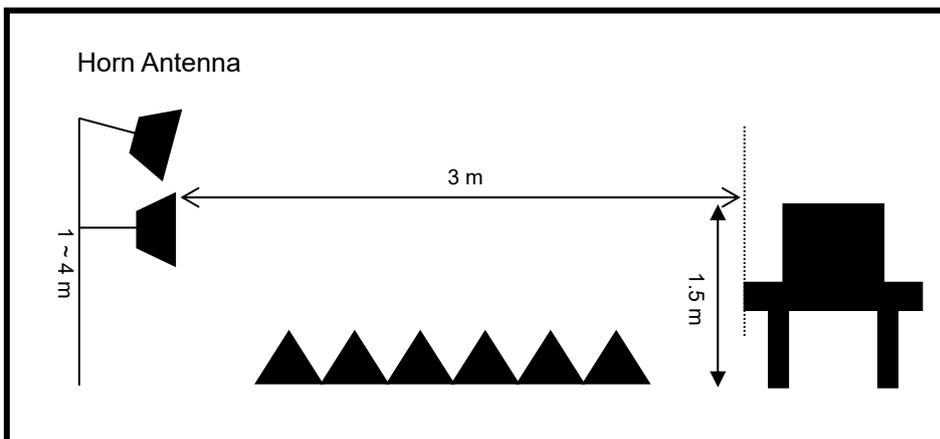

### 5.1.6 Measurement Result

■ Above 1 GHz

BDR 1 Mbps (2 402 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.390*	33.33	-	1.5	V	32.16	6.83	45.67	33.33	-	74.00	54.00	40.67	-	Compliance

\* Restrict band & Band-edge emissions.

BDR 1 Mbps (2 440 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

BDR 1 Mbps (2 480 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.489*	34.53	-	1.5	H	32.47	6.78	45.66	34.53	-	74.00	54.00	39.47	-	Compliance

\* Restrict band & Band-edge emissions.

#### ※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule 15.35
- Limit: 54 dB $\mu$ V/m(Average), 74 dB $\mu$ V/m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB $\mu$ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

EDR 2 Mbps (2 402 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.390*	33.48	-	1.5	H	32.16	6.83	45.67	33.48	-	74.00	54.00	40.52	-	Compliance

\* Restrict band & Band-edge emissions.

EDR 2 Mbps (2 440 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

EDR 2 Mbps (2 480 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.489*	34.21	-	1.5	H	32.47	6.78	45.66	34.21	-	74.00	54.00	39.79	-	Compliance

\* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB $\mu$ V/m(Average), 74 dB $\mu$ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB $\mu$ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

EDR 3 Mbps (2 402 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.390*	33.79	-	1.5	H	32.16	6.83	45.67	33.79	-	74.00	54.00	40.21	-	Compliance

\* Restrict band & Band-edge emissions.

EDR 3 Mbps (2 440 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compliance

EDR 3 Mbps (2 480 MHz)

Freq. (GHz)	Reading (dB $\mu$ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.489*	34.48	-	1.5	H	32.47	6.78	45.66	34.48	-	74.00	54.00	39.52	-	Compliance

\* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB $\mu$ V/m(Average), 74 dB $\mu$ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB $\mu$ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

■ Below 1 GHz

-BDR 1 Mbps (Worst case)

Freq. (MHz)	Reading (dB $\mu$ V/m)	Antenna			CL (dB)	AMP (dB)	Meas Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Mgn (dB)	Result
		Height (m)	Pol. (H/V)	Fctr. (dB/m)						
33.10	31.26	1.0	V	21.24	0.86	46.35	31.26	40.00	8.74	Compliance
38.10	34.42	1.0	V	18.52	0.88	46.41	34.42	40.00	5.58	Compliance
60.15	31.66	3.8	H	12.99	1.07	46.53	31.66	40.00	8.34	Compliance
159.76	30.28	3.4	H	14.49	1.76	46.46	30.28	43.50	13.22	Compliance
169.00	30.54	3.3	V	14.74	1.82	46.47	30.54	43.50	12.96	Compliance


Freq.(MHz): Measurement frequency, Antenna(Height, Pol, Fctr): Antenna Height, Polarization and Factor, CL(dB): Cable loss, AMP(dB): Pre-amplifier gain(dB), Limit(dB $\mu$ V/m): Limit value specified with FCC Rule, Mgn(dB): FCC Limit (dB $\mu$ V/m) - Meas Result(dB $\mu$ V/m), Meas Result & Reading (dB $\mu$ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

### 5.1.7 Plots


\*BLE (The worst case only)

- Below 1 GHz

Horizontal  
30 MHz ~ 1 GHz

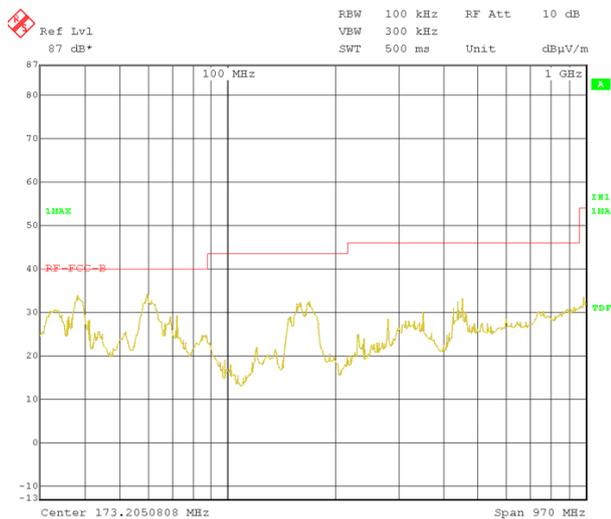


Vertical  
30 MHz ~ 1 GHz

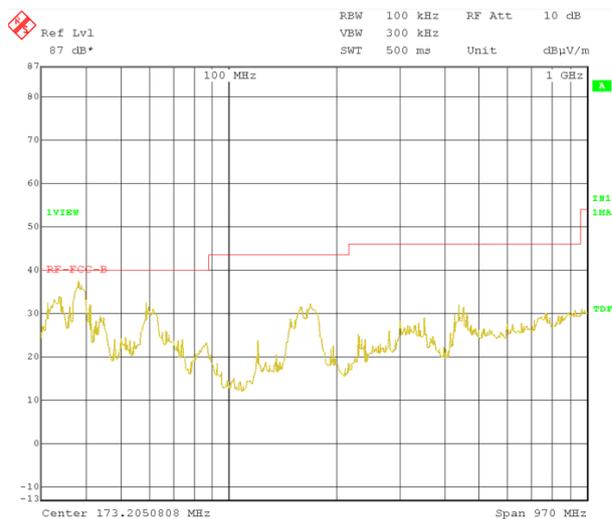


- Above 1 GHz


1 GHz ~ 3 GHz

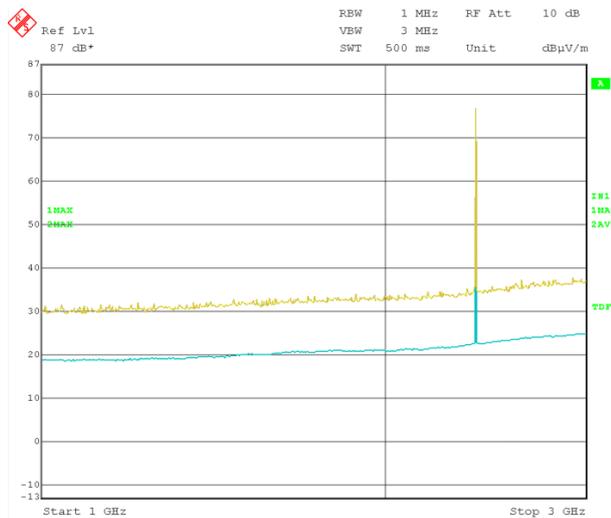


3 GHz ~ 7 GHz

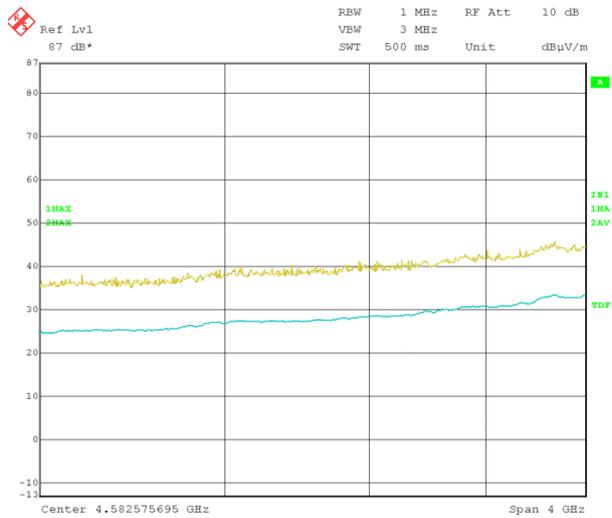

7 GHz ~ 18 GHz

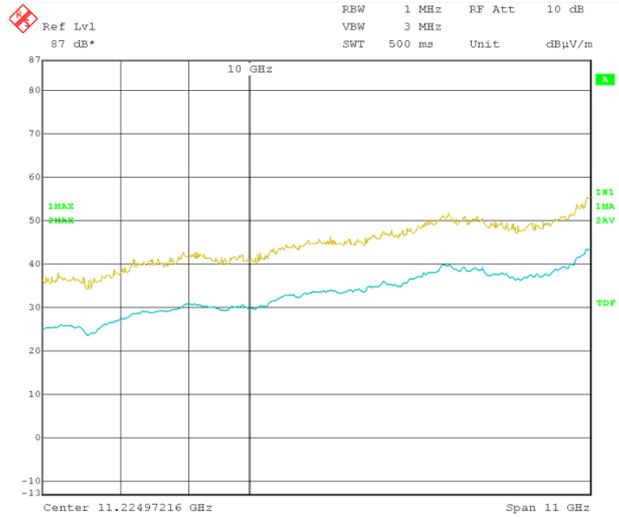

18 GHz ~ 26 GHz

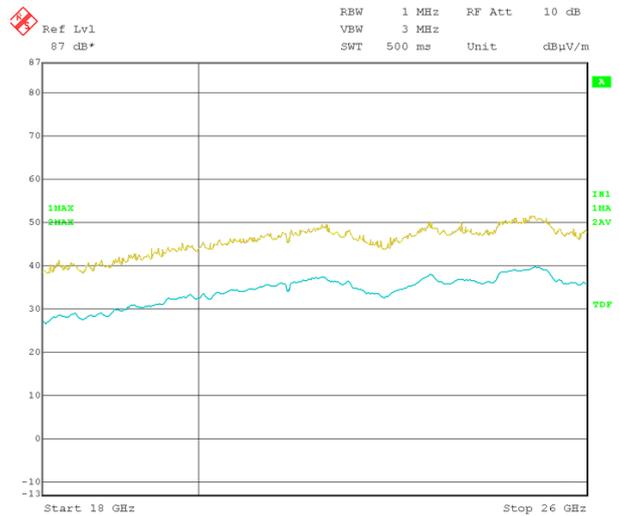

## 5.2 Antenna requirement

### 5.2.1 Standard applicable [FCC §15.203]

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that user a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit so that broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.2.2 Antenna details

Frequency Band	Antenna Type	Gain [dBi]	Results
2.4 GHz	External Dipole antenna	2.2 dBi	Compliance