

# FCC Test Report

**Report No.:** 2405V28082EB

**Applicant:** Sindcon (Singapore) IoT Technology Pte. Ltd.

**Address:** 7 Tampines Industrial Drive, #03-01 Zulin Building, Singapore 528547

**Product Name:** Magnnotech Non-Mag Sensor

**Product Model:** Non-Mag Sensor

**Multiple Models:** N/A

**Trade Mark:** 

**FCC ID:** 2BHSMSS0401

**Standards:** FCC CFR Title 47 Part 15C (§15.249)

**Test Date:** 2024-08-16 to 2024-09-19

**Test Result:** Complied

**Report Date:** 2024-09-20

**Reviewed by:**

*Abel Chen*

Abel Chen  
Project Engineer

**Approved by:**

*Jacob Kong*

Jacob Kong  
Manager

**Prepared by:**

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

## Announcement

1. This test report shall not be reproduced except in full, without the written approval of World Alliance Testing & Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

## Revision History

Version No.	Issued Date	Description
00	2024-09-20	Original

# Contents

<b>1</b>	<b>General Information .....</b>	<b>4</b>
1.1	Client Information .....	4
1.2	Product Description of EUT .....	4
1.3	Antenna information .....	4
1.4	Related Submittal(s)/Grant(s).....	4
1.5	Measurement Uncertainty .....	5
1.6	Laboratory Location.....	5
1.7	Test Methodology .....	5
<b>2</b>	<b>Description of Measurement.....</b>	<b>6</b>
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment .....	6
2.3	Interconnecting Cables.....	6
2.4	Block Diagram of Connection between EUT and AE .....	7
2.5	Test Setup.....	7
2.6	Test Procedure .....	8
2.7	Measurement Method.....	10
2.8	Measurement Equipment .....	10
<b>3</b>	<b>Test Results .....</b>	<b>11</b>
3.1	Test Summary.....	11
3.2	Limit .....	12
3.3	AC Line Conducted Emissions Test Data.....	13
3.4	Radiated emission Test Data.....	14
3.5	Duty cycle factor .....	25
3.6	Bandwidth Test Data.....	26
<b>4</b>	<b>Test Setup Photo.....</b>	<b>27</b>
<b>5</b>	<b>E.U.T Photo.....</b>	<b>28</b>

# 1 General Information

## 1.1 Client Information

Applicant:	Sindcon (Singapore) IoT Technology Pte. Ltd.
Address:	7 Tampines Industrial Drive, #03-01 Zulin Building, Singapore 528547
Manufacturer:	Sindcon (Singapore) IoT Technology Pte. Ltd.
Address:	7 Tampines Industrial Drive, #03-01 Zulin Building, Singapore 528547

## 1.2 Product Description of EUT

The EUT is Magnnotech Non-Mag Sensor that contains a Lora radio, this report covers the full testing of the Lora radio.

Sample Serial Number	2P5S-2 for RE test, 2P5S-3 for RF conducted test (assigned by WATC)
Sample Received Date	2024-07-29
Sample Status	Good Condition
Frequency Range	921.4~924.6MHz
Maximum E-field Strength:	92.17dBuV/m@3m
Modulation Technology	LoRa (CSS)
Antenna Gain <sup>#</sup>	1.73dBi
Spatial Streams <sup>#</sup>	SISO (1TX, 1RX)
Power Supply	DC 3.6V from battery
Adapter Information	N/A
Modification	Sample No Modification by the test lab

## 1.3 Antenna information

<b>15.203 requirement:</b>	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>Device Antenna information:</b>	
The antenna is an internal antenna which cannot replace by end-user. Please see product internal photos for details.	

## 1.4 Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s)
----------------------------------

## 1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Bandwidth		0.34%
<p><b>Note 1:</b> The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.</p> <p><b>Note 2:</b> The Decision Rule is based on simple acceptance with ISO Guide 98-4:2012 Clause 8.2 (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)</p>		

## 1.6 Laboratory Location

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: [qa@watc.com.cn](mailto:qa@watc.com.cn)

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

## 1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

ANSI C63.10-2020

## 2 Description of Measurement

### 2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	921.4	7	922.6	13	924.0
2	921.6	8	922.8	14	924.2
3	921.8	9	923.2	15	924.4
4	922.0	10	923.4	16	924.6
5	922.2	11	923.6	/	/
6	922.4	12	923.8	/	/

According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest//highest frequency in the frequency range in which device operates for testing. The detailed frequency points are as follows:

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	921.4	/	/	16	924.6

Test Mode:			
Transmitting mode:	Keep the EUT in continuous transmitting with modulation		
Exercise software#:	host_V5.3.6		
Mode	Power Level Setting <sup>#</sup>		
	Low Channel	Middle Channel	High Channel
SRD	16	/	16

The exercise software and the maximum power setting that provided by manufacturer.

Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
For radiated emission 9kHz-30MHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.

### 2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

### 2.3 Interconnecting Cables


Manufacturer	Description	From	To
/	/	/	/

## 2.4 Block Diagram of Connection between EUT and AE



## 2.5 Test Setup


### 1) Conducted emission measurement:

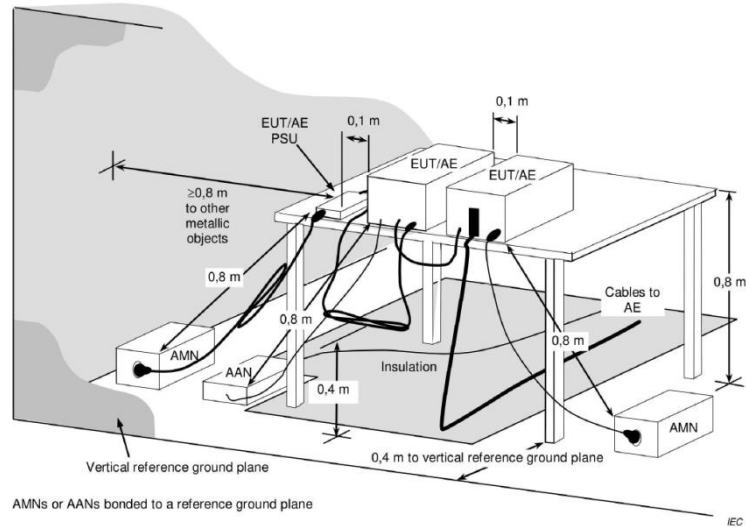


**Note:** The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

### 2) Radiated emission measurement:

Below 30MHz (3m SAC)

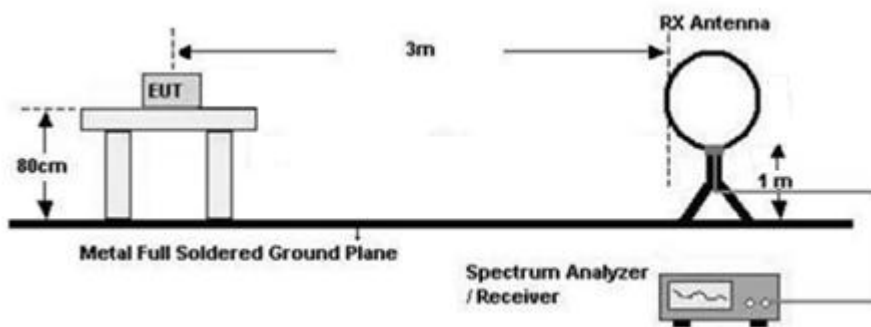

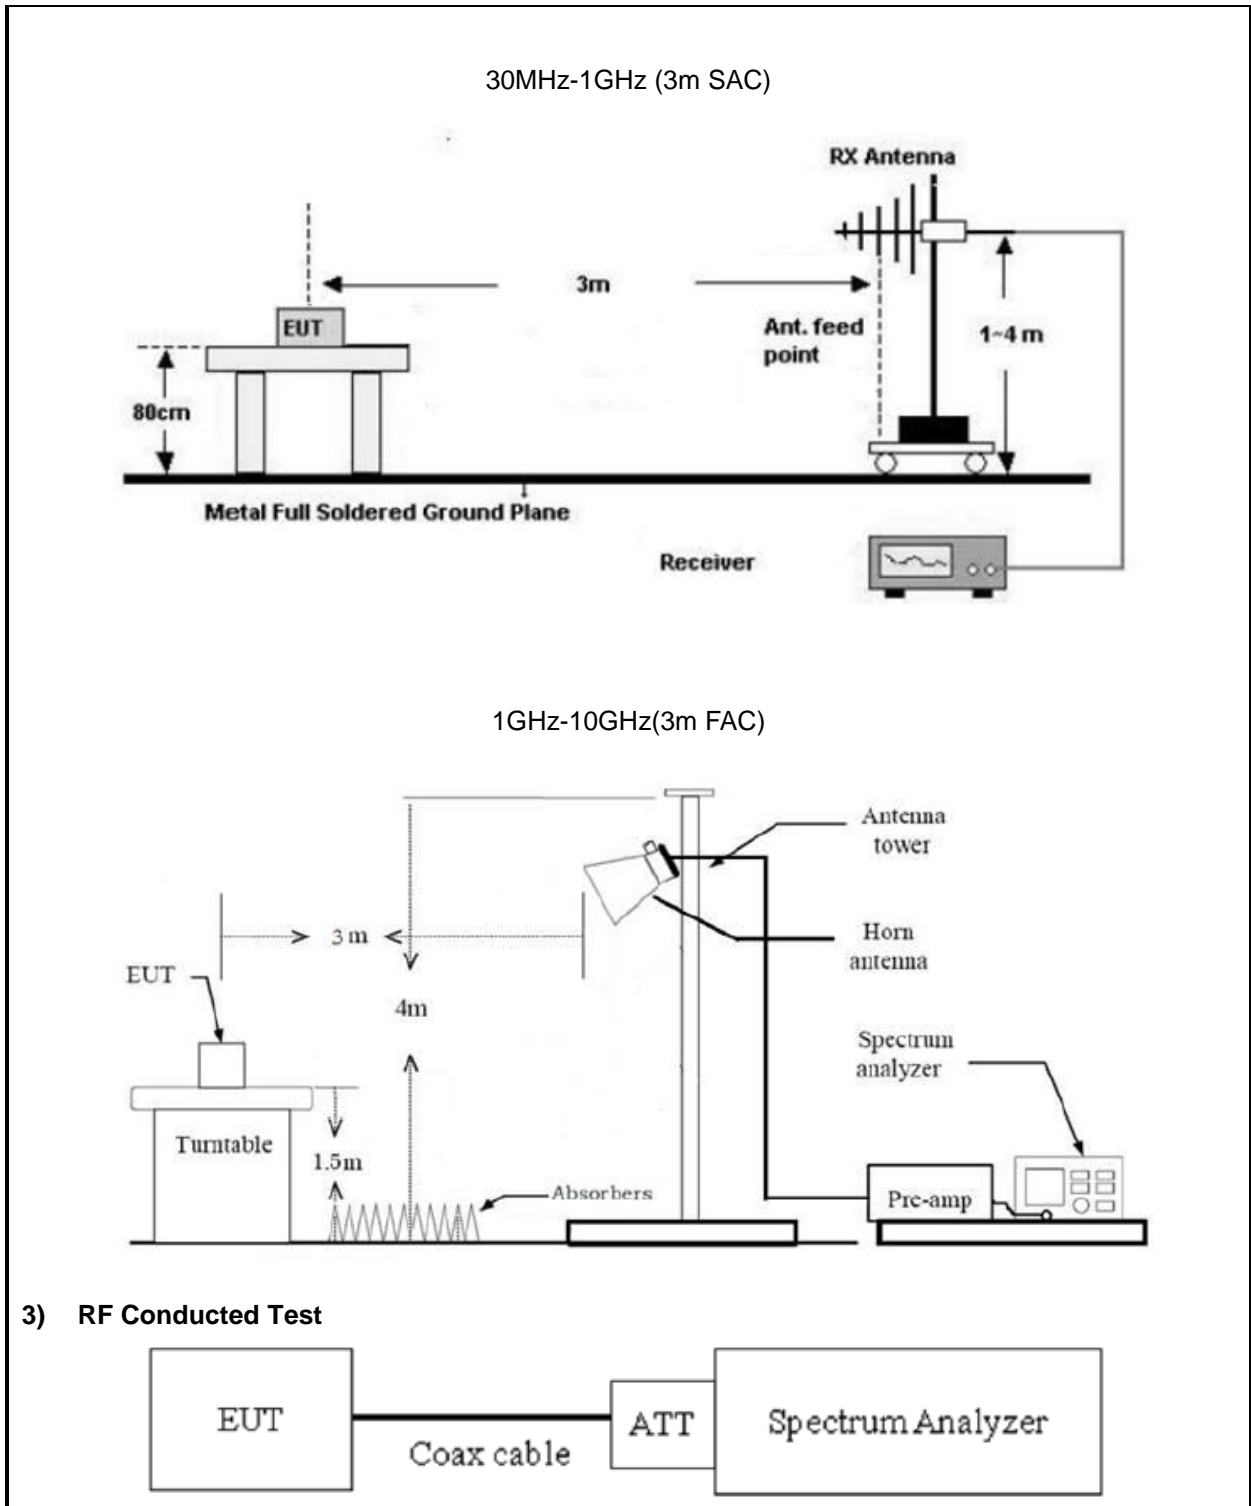

## 2.6 Test Procedure

### Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.



3. Line conducted data is recorded for both Line and Neutral

**Radiated Emission Procedure:**

**a) For below 30MHz**

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were  $40 \cdot \log(\text{test distance} / \text{specification distance})$ .
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

**b) For 30MHz-1GHz:**

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from  $0^\circ$  to  $360^\circ$  and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

**c) For above 1GHz:**

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from  $0^\circ$  to  $360^\circ$  and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

**Bandwidth Test:**

1. The antenna port of EUT was connected to the RF port of the Spectrum analyzer through Attenuator and RF cable.
2. The EUT is keeping in continuous transmission mode.
3. Test the bandwidth and record the result

## 2.7 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
20dB Emission Bandwidth	ANSI C63.10-2020 Section 6.9.2
Field strength of fundamental and Radiated emission	ANSI C63.10-2020 Section 6.3&6.4&6.5&6.6

## 2.8 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2024/6/4	2025/6/3
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2024/6/4	2025/6/3
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2024/6/4	2025/6/3
COM-POWER	preamplifier	PAM-118A	18040152	2024/6/4	2025/6/3
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2027/2/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2026/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2026/7/5
Oulitong	Band Reject Filter	OBSF-902-928-40S	OE02104362	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.9	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.14	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.15	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.16	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.17	N/A	2024/6/4	2025/6/3
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSU-26	200680/026	2024/6/4	2025/6/3
narda	6dB attenuator	603-06-1	N/A	2024/6/4	2025/6/3

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

### 3 Test Results

#### 3.1 Test Summary

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207(a)	AC Line Conducted Emissions	N/A
FCC §15.215(c)	20dB Emission Bandwidth	Compliance
FCC §15.205, §15.209, §15.249	Field strength of fundamental and Radiated emission	Compliance

### 3.2 Limit

Test items	Limit															
AC Line Conducted Emissions	See details §15.207 (a)															
Field strength of fundamental and Radiated emission	<p>The field strength of fundamental and harmonic emissions measured at 3 m shall not exceed the limits as below:</p> <table border="1" data-bbox="592 477 1428 745"> <thead> <tr> <th data-bbox="595 481 780 555">Fundamental frequency</th> <th data-bbox="780 481 1102 555">Field strength of fundamental (millivolts/meter)</th> <th data-bbox="1102 481 1425 555">Field strength of harmonics (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td data-bbox="595 562 780 600">902–928 MHz</td> <td data-bbox="780 562 1102 600">50</td> <td data-bbox="1102 562 1425 600">500</td> </tr> <tr> <td data-bbox="595 607 780 645">2400–2483.5 MHz</td> <td data-bbox="780 607 1102 645">50</td> <td data-bbox="1102 607 1425 645">500</td> </tr> <tr> <td data-bbox="595 651 780 689">5725–5875 MHz</td> <td data-bbox="780 651 1102 689">50</td> <td data-bbox="1102 651 1425 689">500</td> </tr> <tr> <td data-bbox="595 696 780 734">24.0–24.25 GHz</td> <td data-bbox="780 696 1102 734">250</td> <td data-bbox="1102 696 1425 734">2500</td> </tr> </tbody> </table> <p>The field strength shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.</p> <p>Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.</p> <p>For frequencies above 1000 MHz, the field strength limits in above table are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.</p>	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	902–928 MHz	50	500	2400–2483.5 MHz	50	500	5725–5875 MHz	50	500	24.0–24.25 GHz	250	2500
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)														
902–928 MHz	50	500														
2400–2483.5 MHz	50	500														
5725–5875 MHz	50	500														
24.0–24.25 GHz	250	2500														

### 3.3 AC Line Conducted Emissions Test Data

*Not Applicable, the device only powered by battery.*

### 3.4 Radiated emission Test Data


9 kHz-30MHz:


<b>Test Date:</b>	2024-09-19	<b>Test By:</b>	Bard Huang
<b>Environment condition:</b>	Temperature: 23.7°C; Relative Humidity:62%; ATM Pressure: 99.8kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

**30MHz-1GHz:**

<b>Test Date:</b>	2024-09-19	<b>Test By:</b>	Bard Huang
<b>Environment condition:</b>	Temperature: 23.7°C; Relative Humidity:62%; ATM Pressure: 99.8kPa		

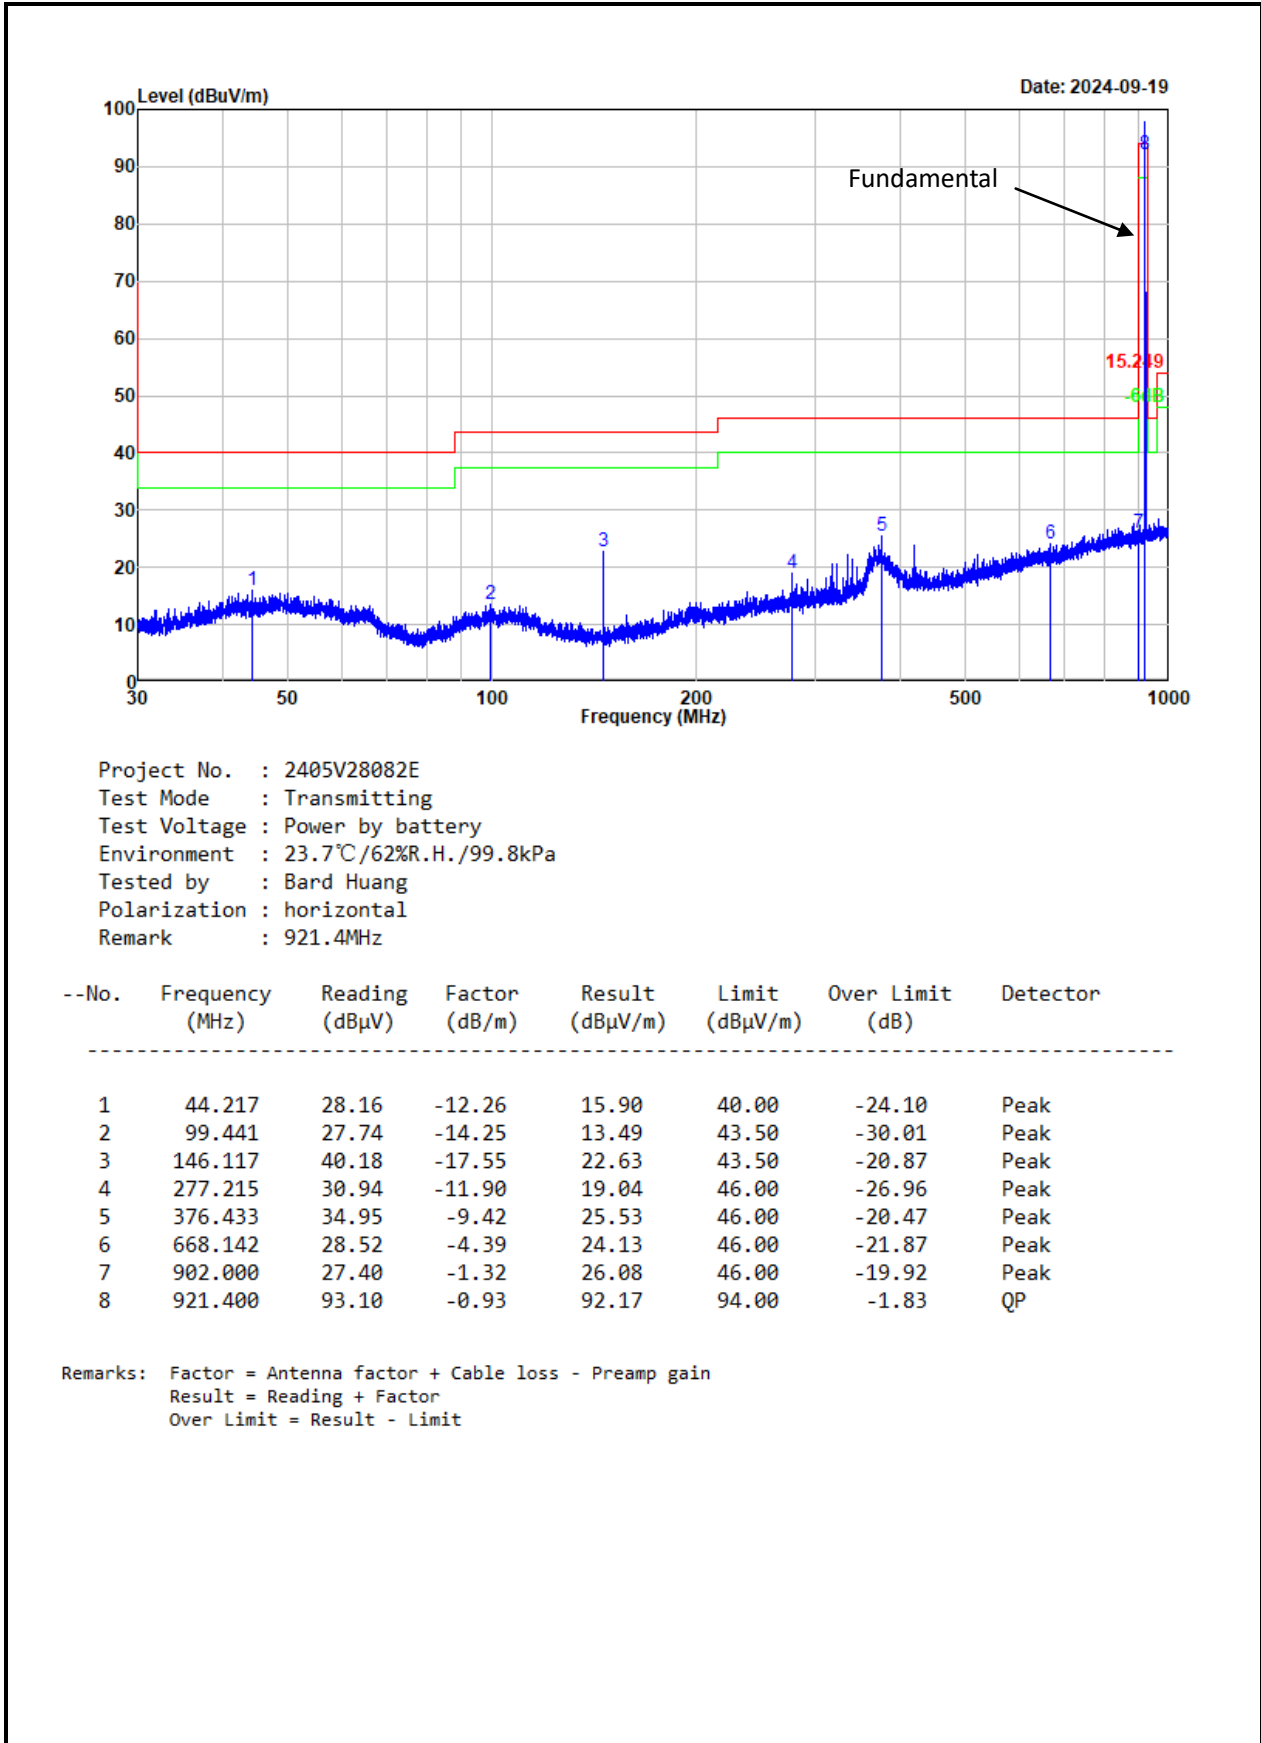

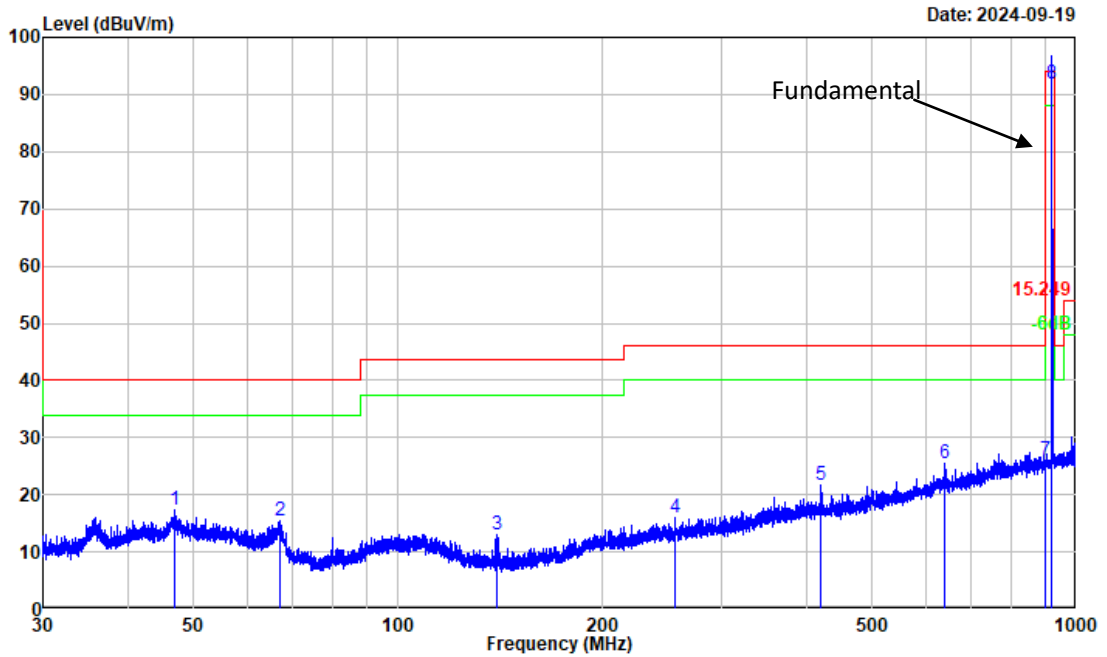


Project No. : 2405V28082E  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 23.7°C/62%R.H./99.8kPa  
 Tested by : Bard Huang  
 Polarization : vertical  
 Remark : 921.4MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	46.851	29.60	-12.17	17.43	40.00	-22.57	Peak
2	67.143	30.49	-15.11	15.38	40.00	-24.62	Peak
3	139.728	30.48	-17.59	12.89	43.50	-30.61	Peak
4	256.521	28.42	-12.34	16.08	46.00	-29.92	Peak
5	420.949	30.24	-8.47	21.77	46.00	-24.23	Peak
6	640.050	30.09	-4.66	25.43	46.00	-20.57	Peak
7	902.000	27.24	-1.32	25.92	46.00	-20.08	Peak
8	921.400	92.80	-0.93	91.87	94.00	-2.13	QP

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit




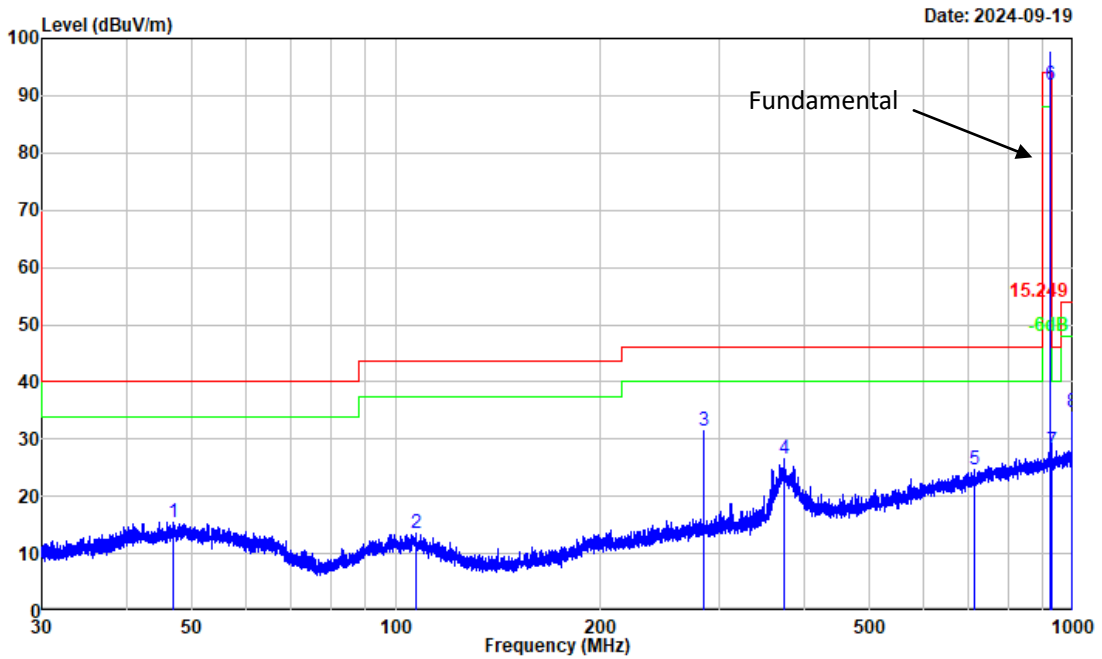

Project No. : 2405V28082E  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 23.7°C/62%R.H./99.8kPa  
 Tested by : Bard Huang  
 Polarization : horizontal  
 Remark : 924.6MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	46.851	27.69	-12.17	15.52	40.00	-24.48	Peak
2	106.946	27.61	-14.00	13.61	43.50	-29.89	Peak
3	284.478	43.19	-11.73	31.46	46.00	-14.54	Peak
4	373.803	36.02	-9.47	26.55	46.00	-19.45	Peak
5	713.235	28.60	-3.94	24.66	46.00	-21.34	Peak
6	924.600	92.81	-0.83	91.98	94.00	-2.02	QP
7	928.000	28.61	-0.77	27.84	46.00	-18.16	Peak
8	996.063	34.21	0.43	34.64	54.00	-19.36	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit

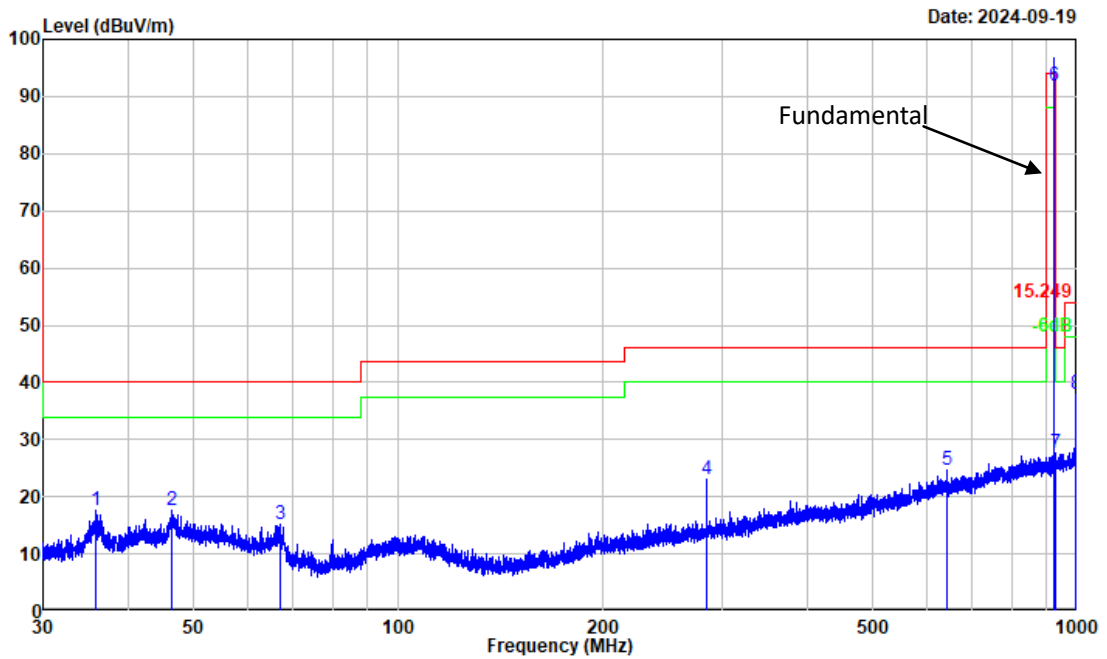

Project No. : 2405V28082E  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 23.7°C/62%R.H./99.8kPa  
 Tested by : Bard Huang  
 Polarization : vertical  
 Remark : 924.6MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	35.843	32.12	-14.48	17.64	40.00	-22.36	Peak
2	46.381	29.66	-12.17	17.49	40.00	-22.51	Peak
3	67.202	30.32	-15.13	15.19	40.00	-24.81	Peak
4	284.478	34.90	-11.73	23.17	46.00	-22.83	Peak
5	643.707	29.28	-4.58	24.70	46.00	-21.30	Peak
6	924.600	92.71	-0.83	91.88	94.00	-2.12	QP
7	928.000	28.53	-0.77	27.76	46.00	-18.24	Peak
8	996.063	37.50	0.43	37.93	54.00	-16.07	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit

**Above 1GHz:**

<b>Test Date:</b>	2024-09-19	<b>Test By:</b>	Luke Li
<b>Environment condition:</b>	Temperature: 23.7°C; Relative Humidity:62%; ATM Pressure: 99.8kPa		

Frequency (MHz)	Reading level (dBμV)	Polar (H/V)	Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
921.4MHz							
1842.800	55.10	horizontal	-2.90	52.20	74.00	-21.80	Peak
2764.200	65.10	horizontal	-1.86	63.24	74.00	-10.76	Peak
3685.600	56.68	horizontal	-2.18	54.50	74.00	-19.50	Peak
4607.000	50.85	horizontal	-2.61	48.24	74.00	-25.76	Peak
1842.800	54.05	vertical	-2.90	51.15	74.00	-22.85	Peak
2764.200	66.34	vertical	-1.86	64.48	74.00	-9.52	Peak
3685.600	53.37	vertical	-2.18	51.19	74.00	-22.81	Peak
4607.000	51.43	vertical	-2.61	48.82	74.00	-25.18	Peak
924.6MHz							
1849.200	56.92	horizontal	-2.92	54.00	74.00	-20.00	Peak
2773.800	60.87	horizontal	-1.87	59.00	74.00	-15.00	Peak
3698.400	57.09	horizontal	-2.18	54.91	74.00	-19.09	Peak
4623.000	52.26	horizontal	-2.39	49.87	74.00	-24.13	Peak
1849.200	55.81	vertical	-2.92	52.89	74.00	-21.11	Peak
2773.800	59.55	vertical	-1.87	57.68	74.00	-16.32	Peak
3698.400	54.58	vertical	-2.18	52.40	74.00	-21.60	Peak
4623.000	49.26	vertical	-2.39	46.87	74.00	-27.13	Peak

Note: Corrected factor=Antenna factor + Cable loss - Amplifier Gain

Corrected Amplitude=Reading level + Correct factor

Margin= Corrected Amplitude-Limit

Field strength of Average:


Frequency (MHz)	Peak level (dB $\mu$ V/m)	Polar (H/V)	Duty Cycle Factor (dB)	Average Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Remark
921.4MHz							
1842.800	52.20	horizontal	-17.73	34.47	54.00	-19.53	Average
2764.200	63.24	horizontal	-17.73	45.51	54.00	-8.49	Average
3685.600	54.50	horizontal	-17.73	36.77	54.00	-17.23	Average
4607.000	48.24	horizontal	-17.73	30.51	54.00	-23.49	Average
1842.800	51.15	vertical	-17.73	33.42	54.00	-20.58	Average
2764.200	64.48	vertical	-17.73	46.75	54.00	-7.25	Average
3685.600	51.19	vertical	-17.73	33.46	54.00	-20.54	Average
4607.000	48.82	vertical	-17.73	31.09	54.00	-22.91	Average
924.6MHz							
1849.200	54.00	horizontal	-17.73	36.27	54.00	-17.73	Average
2773.800	59.00	horizontal	-17.73	41.27	54.00	-12.73	Average
3698.400	54.91	horizontal	-17.73	37.18	54.00	-16.82	Average
4623.000	49.87	horizontal	-17.73	32.14	54.00	-21.86	Average
1849.200	52.89	vertical	-17.73	35.16	54.00	-18.84	Average
2773.800	57.68	vertical	-17.73	39.95	54.00	-14.05	Average
3698.400	52.40	vertical	-17.73	34.67	54.00	-19.33	Average
4623.000	46.87	vertical	-17.73	29.14	54.00	-24.86	Average

Note: Average Amplitude=Peak level + duty cycle factor

Margin= Average Amplitude – Limit

**Test plot for example as below:**

<b>Mode:</b>	SRD	<b>Channel:</b>	921.4MHz
--------------	-----	-----------------	----------

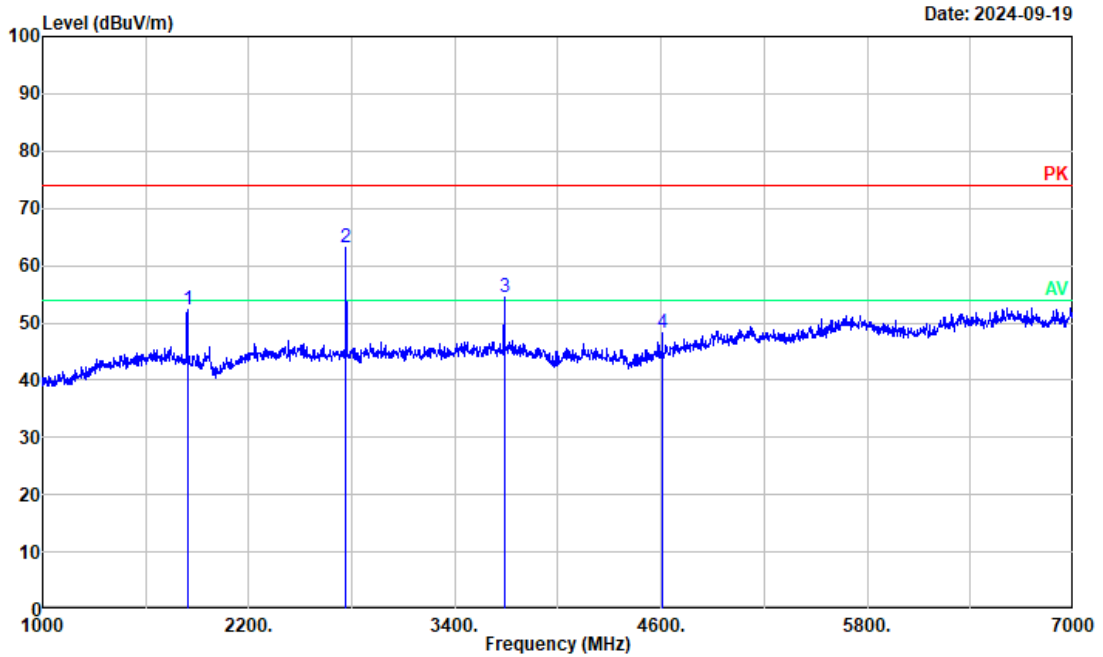


Project No. : 2405V28082E  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 23.7°C/62%R.H./99.8kPa  
 Tested by : Luke Li  
 Polarization : horizontal  
 Remark : 921.4MHz

--No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Detector
1	1842.800	55.10	-2.90	52.20	74.00	-21.80	Peak
2	2764.200	65.10	-1.86	63.24	74.00	-10.76	Peak
3	3685.600	56.68	-2.18	54.50	74.00	-19.50	Peak
4	4607.000	50.85	-2.61	48.24	74.00	-25.76	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit

<b>Mode:</b>	SRD	<b>Channel:</b>	921.4MHz
--------------	-----	-----------------	----------

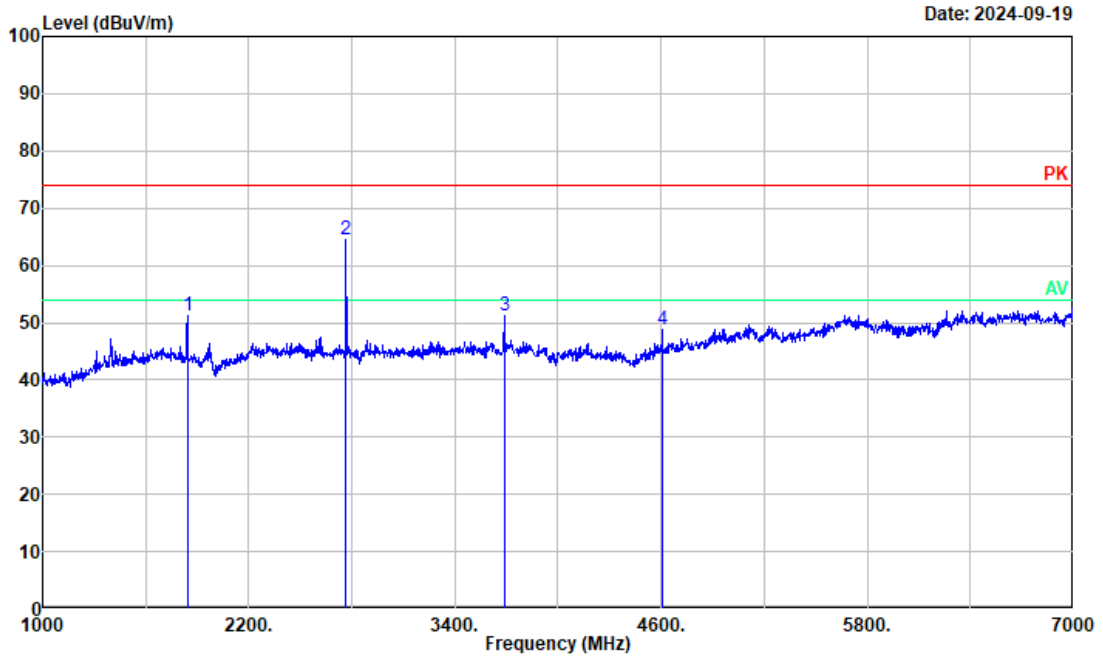


Project No. : 2405V28082E  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 23.7°C/62%R.H./99.8kPa  
 Tested by : Luke Li  
 Polarization : vertical  
 Remark : 921.4MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	1842.800	54.05	-2.90	51.15	74.00	-22.85	Peak
2	2764.200	66.34	-1.86	64.48	74.00	-9.52	Peak
3	3685.600	53.37	-2.18	51.19	74.00	-22.81	Peak
4	4607.000	51.43	-2.61	48.82	74.00	-25.18	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit

<b>Mode:</b>	SRD	<b>Channel:</b>	921.4MHz
--------------	-----	-----------------	----------

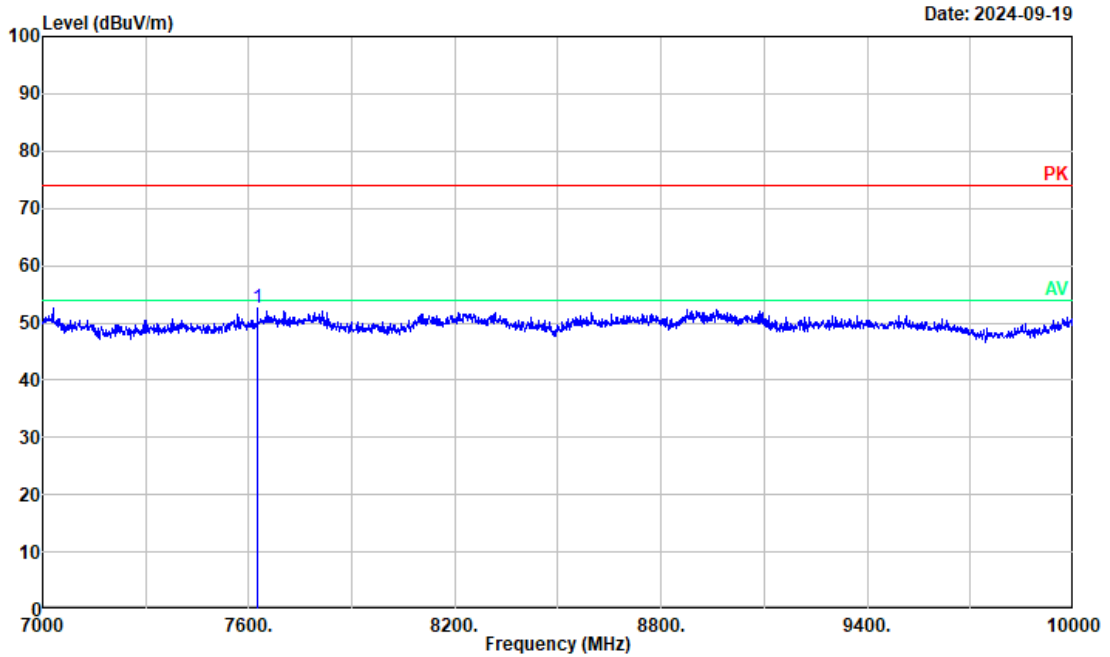


Project No. : 2405V28082E  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 23.7°C/62%R.H./99.8kPa  
 Tested by : Luke Li  
 Polarization : horizontal  
 Remark : 921.4MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	7625.813	53.57	-0.94	52.63	74.00	-21.37	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit

<b>Mode:</b>	SRD	<b>Channel:</b>	921.4MHz
--------------	-----	-----------------	----------

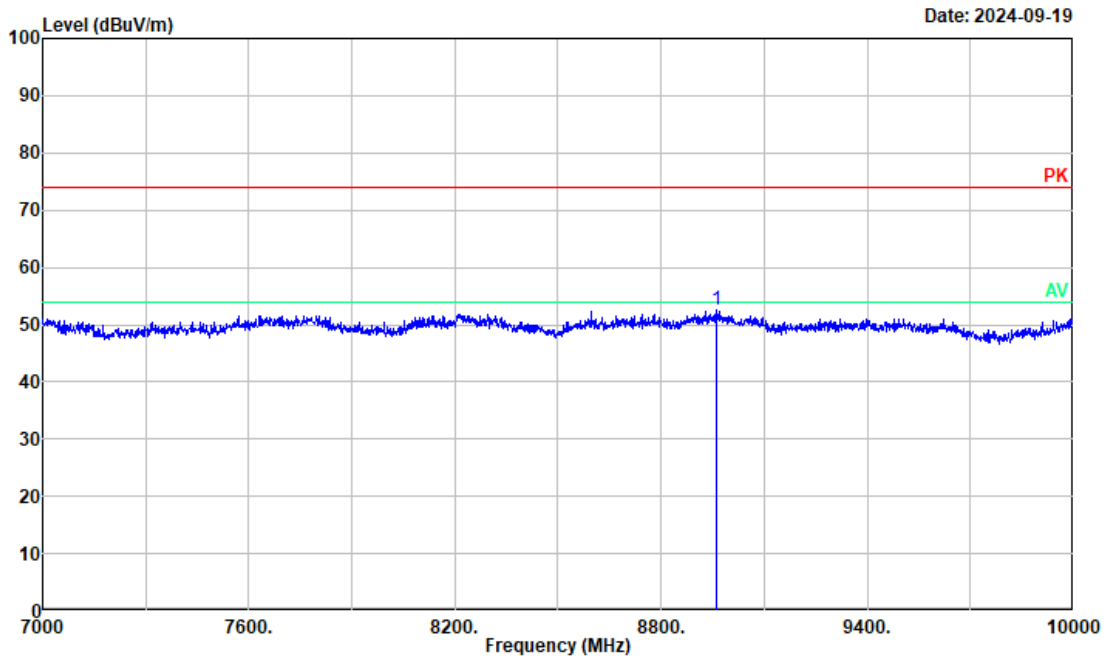

Project No. : 2405V28082E  
 Test Mode : Transmitting  
 Test Voltage : Power by battery  
 Environment : 23.7°C/62%R.H./99.8kPa  
 Tested by : Luke Li  
 Polarization : vertical  
 Remark : 921.4MHz

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	8959.980	51.61	1.00	52.61	74.00	-21.39	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit



### 3.5 Duty cycle factor

<b>Test Date:</b>	2024-08-16	<b>Test By:</b>	Ryan Zhang
<b>Environment condition:</b>	Temperature: 23.6°C; Relative Humidity:58%; ATM Pressure: 100.4kPa		


Total On time [ms]	Period of the pulse train [ms]	Duty Cycle [%]
12.981	100	12.98
<b>Duty cycle Factor[dB]:</b>	-17.73	

Note:

Duty Cycle=( Total On time)/Tp

Duty Cycle Factor=20\*log(Duty Cycle)

### Test Plots:

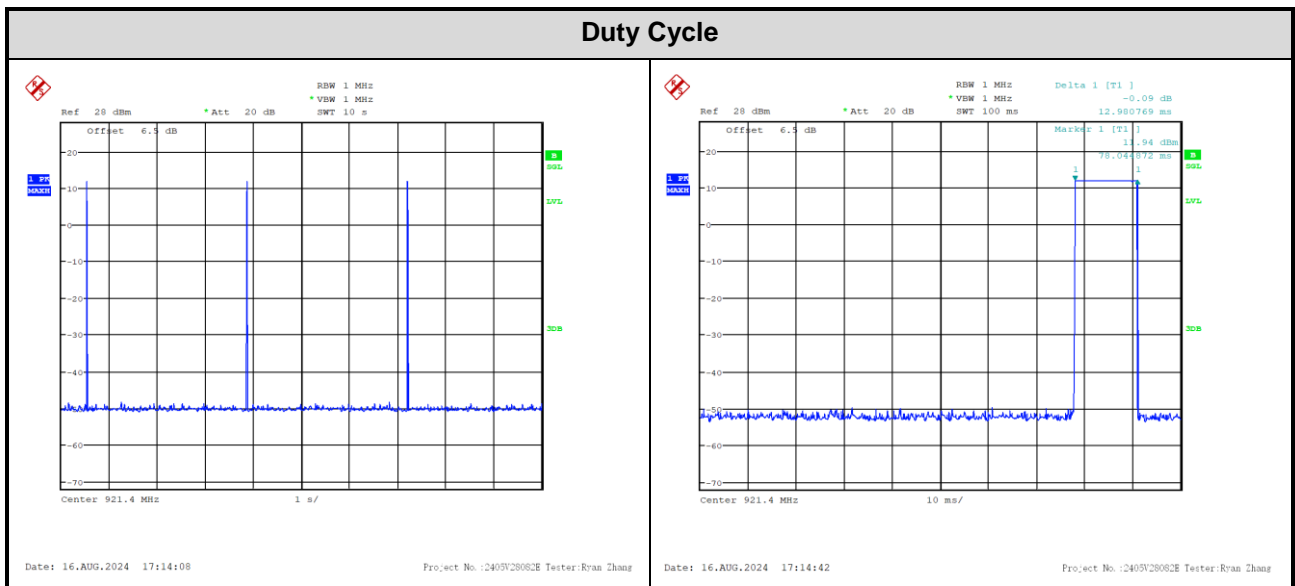


### 3.6 Bandwidth Test Data

<b>Test Date:</b>	2024-08-16	<b>Test By:</b>	Ryan Zhang
<b>Environment condition:</b>	Temperature: 23.6°C; Relative Humidity:58%; ATM Pressure: 100.4kPa		

Channel	20dB BW [KHz]
Low	285.26
High	292.47

### Test Plots:

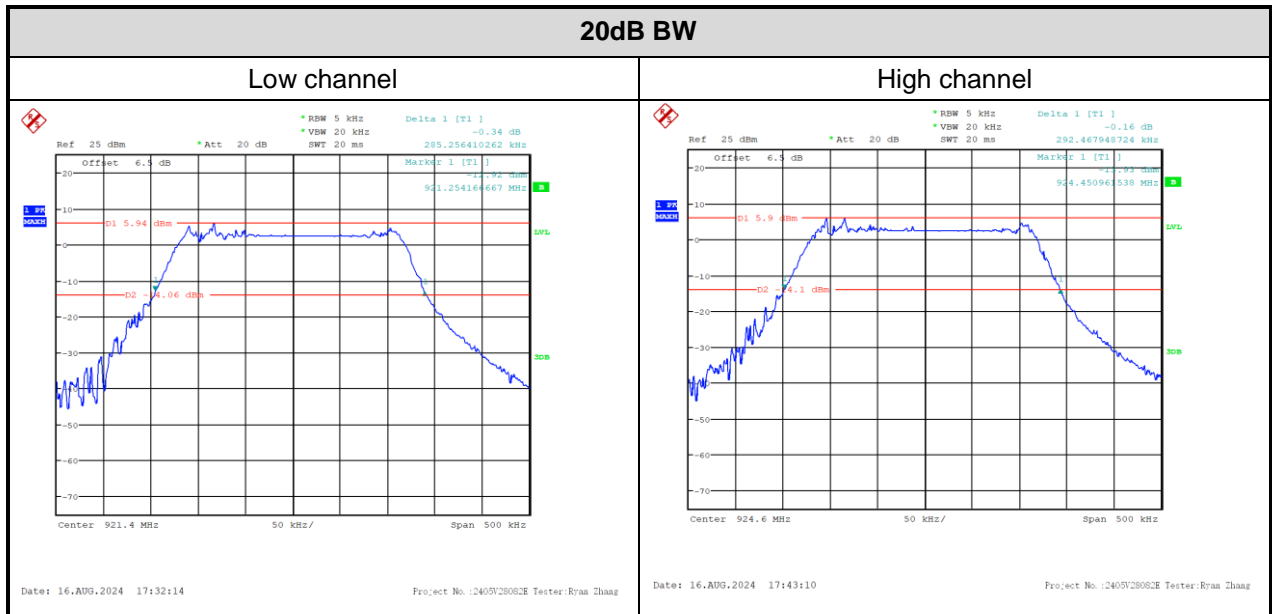

## 4 Test Setup Photo

Please refer to the attachment 2405V28082E Test Setup photo.

## 5 E.U.T Photo

Please refer to the attachment 2405V28082E External photo and 2405V28082E Internal photo.

**---End of Report---**