

Acknowledgment Letter

Customer: Hancai

Customer Part Number: 01.011.0306

Model: A11-G40*5.3*0.8-6.3UH-50MM

date landed: Apr. 29, 2024

supplier: Dongguan Jierestech Technology Co., Ltd.

draw	audit	Approve
Wang Lizhi	Deng Xianggui	 Lu Ru Shi

The customer acknowledges:

Qualified	Unqualified	acknowledge
Note		

Dongguan Jierestech Technology Co., Ltd.



Tel: _____

Fax: 86+13632701380

Add: No. 96, Langhu Road, Dalingshan Town, Dongguan City (Building L, 3rd Floor, Jinxiangda Science and Technology Park)

Customer	Customer P.N.	Model	Version	Date
Hancai	01.011.0306	G40*5.3*0.8-6.3UH-50MM	A0	Apr. 29, 2025

一、Planar Coil Diagram Unit: MM

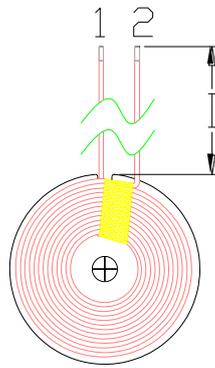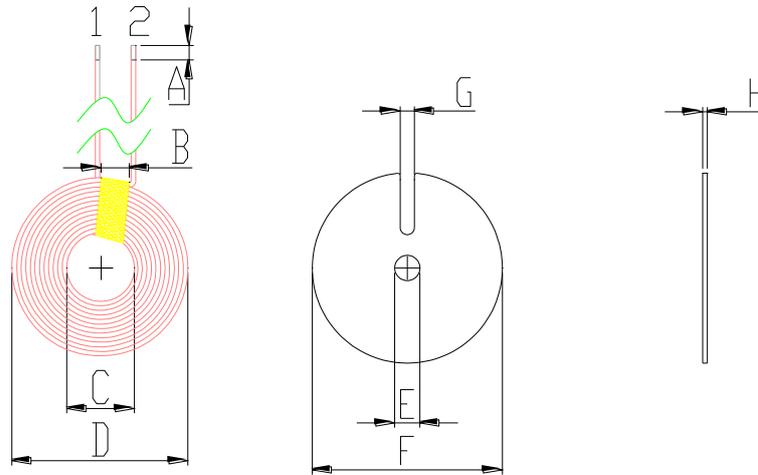

A	3.0±1
B	6
C	14±0.5
D	37.5±0.5
E	5.3±0.2
F	40±0.3
G	3±0.2
H	0.8±0.1
I	50±2

二、Product Parameter:

foot position	Path	Circle Number	Note
1 - 2	0.08*105P	12T	silk-covered wire

三、technical requirements:

1. Fix the ends of the wires securely to prevent any loosening or breakage of the wires.
2. According to the customer's requirements, cut the excessively long wire ends, tin them, and ensure that the tin coating depth is uniformly $3\pm 1\text{MM}$.
3. Apply appropriate white glue on the magnetic plate, attach the coil, and during the process, keep the product surface clean and tidy.
4. The used hard magnetic plates have round holes and are free from damage.



四、electrical parameter:


1. Inductance value, Q value:

PIN 1 — 2 = 6.3uH ±0.3UH

Q value ≥ 45

The above inductance and Q value were measured using the Quanhua 1062A instrument, with a standard of 100KHZ/1.0Vrms or an equivalent instrument.

五、bill of materials:

No.	Name	materials	supplier	Note
1	silk-covered wire	0.08*105P		
2	Disk	G43 * 5.3 * 0.8 Hard substrate		
3	tin	High-temperature environmental protection		
4	White glue	BY882		
5	double sides adhesive tape	D i a m e t e r 38*10MM		
6	high-temperature adhesive tape	6MM		