

TEST REPORT

Product : 4K Triple Laser Projector
Trade mark :  VALERION
Model/Type reference : VisionMaster Pro2, VisionMaster Plus, VisionMaster Plus2, VisionMaster Pro
Serial Number : N/A
Report Number : EED32Q81354203
FCC ID : 2BKWN-VALMAVISION
Date of Issue : Dec. 18, 2024
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

VALERION TECHNOLOGY USA CO., LTD
1312 17th Street, Unit Num 2955, Denver, CO 80202, United States.

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Zhenxia Wen

Reviewed by:

Frazer Li

Approved by:

Zhenxia Wen

Aaron Ma

Date:

Frazer Li

Dec. 18, 2024

Aaron Ma

Check No.: 9620300824



1 Content

1 CONTENT	2
2 VERSION	3
3 TEST SUMMARY	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST CONFIGURATION	7
4.4 TEST ENVIRONMENT	8
4.5 DESCRIPTION OF SUPPORT UNITS	8
4.6 TEST LOCATION	8
4.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
5 EQUIPMENT LIST	10
6 TEST RESULTS AND MEASUREMENT DATA	13
6.1 ANTENNA REQUIREMENT	13
6.2 AC POWER LINE CONDUCTED EMISSIONS	14
6.3 MAXIMUM CONDUCTED OUTPUT POWER	17
6.4 DTS BANDWIDTH	18
6.5 MAXIMUM POWER SPECTRAL DENSITY	19
6.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION	20
6.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	21
7 APPENDIX 2.4G WI-FI	72
8 PHOTOGRAPHS OF TEST SETUP	73
9 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	75

2 Version

Version No.	Date	Description
00	Dec. 18, 2024	Original

3 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band edge measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

Remark:

Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

Model No.: VisionMaster Pro2, VisionMaster Plus, VisionMaster Plus2, VisionMaster Pro

Only the model VisionMaster Pro2 was tested. The difference between different product models is different sales channels and different product appearance colors, resulting in different models. The rest of the same, does not affect the safety and electromagnetic compatibility test results.

4 General Information

4.1 Client Information

Applicant:	VALERION TECHNOLOGY USA CO., LTD
Address of Applicant:	1312 17th Street, Unit Num 2955, Denver, CO 80202, United States.
Manufacturer:	VALERION TECHNOLOGY USA CO., LTD
Address of Manufacturer:	1312 17th Street, Unit Num 2955, Denver, CO 80202, United States.
Factory:	Shenzhen WeProTalk Technology Co.,Ltd
Address of Factory:	2505, 2501, Yihua Financial Technology Building, No. 3939, Baishi Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen

4.2 General Description of EUT

Product Name:	4K Triple Laser Projector	
Model No.:	VisionMaster Pro2, VisionMaster Plus, VisionMaster Plus2, VisionMaster Pro	
Test Model No.:	VisionMaster Pro2	
Trade mark:		
Product Type:	☐ Mobile ☐ Portable ☒ Fixed Location	
Operation Frequency:	IEEE 802.11b/g/n(HT20)/ax(HE20): 2412MHz to 2462MHz IEEE 802.11n(HT40)/ax(HE40): 2422MHz to 2452MHz	
Modulation Type:	IEEE for 802.11b:DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g:OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40): OFDM (64QAM, 16QAM,QPSK,BPSK) IEEE 802.11ax(HE20/HE40): OFDM (QPSK, BPSK,16QAM, 64QAM, 256QAM, 1024QAM)	
Number of Channel:	IEEE 802.11b/g, IEEE 802.11n HT20, IEEE 802.11ax HE20: 11 Channels IEEE 802.11n HT40, IEEE 802.11ax HE40: 7 Channels	
Channel Separation:	5MHz	
Antenna Type:	Internal Antenna	
Antenna Gain:	ANT 1: 1.3 dBi ANT 2: 1.2 dBi	
Power Supply:	Adapter:	Input: 100V-240V 50-60Hz Output: 36V/5A
Test Voltage:	DC 5V	
Sample Received Date:	Nov. 04, 2024	
Sample tested Date:	Nov. 04, 2024 to Nov. 20, 2024	

Operation Frequency each of channel (802.11b/g/n HT20/ax HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel (802.11n HT40/ax HE40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)/ax HE20

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The highest channel	2462MHz

802.11n (HT40)/ax HE40

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The highest channel	2452MHz

4.3 Test Configuration

EUT Test Software Settings:	
Test Software:	QATool_Dbg
EUT Power Grade:	Default
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
Test Mode:	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ax(HE20)	
802.11ax(HE40)	
According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n(HT20) and MCS0 for 802.11n(HT40).	

4.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	Asus	FL8700JP1065- 0D8GXYQ2X10	FCC&CE	CTI

4.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

4.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

5 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-14-2023	12-13-2024
Signal Generator	Keysight	N5182B	MY53051549	12-11-2023	12-10-2024
DC Power	Keysight	E3642A	MY56376072	12-11-2023	12-10-2024
Communication test set	R&S	CMW500	169004	03-08-2024	03-07-2025
RF control unit(power unit)	JS Tonscend	JS0806-2	22G8060592	07-22-2024	07-21-2025
Wi-Fi 7GHz Band Extender	JS Tonscend	TS-WF7U2	2206200002	05-31-2024	05-30-2025
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	12-11-2023	12-10-2024
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-29-2024	05-28-2025
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	V3.3.20	---	---
Spectrum Analyzer	R&S	FSV3044	101509	01-17-2024	01-16-2025

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-18-2024	04-17-2025
Temperature/ Humidity Indicator	Defu	TH128	/	04-25-2024	04-24-2025
LISN	R&S	ENV216	100098	09-19-2024	09-18-2025
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---

Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-18-2024	06-17-2025
ISN	TESEQ	ISN T800	30297	12-14-2023	12-13-2024

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05/22/2022	05/21/2025
Receiver	R&S	ESC17	100938-003	09/07/2024	09/06/2025
Spectrum Analyzer	R&S	FSV40	101200	07/18/2024	07/17/2025
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/22/2022	05/21/2025
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/16/2024	04/15/2025
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/14/2023	12/13/2024
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023	07/01/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/16/2024	04/15/2025
Preamplifier	Agilent	11909A	12-1	03/22/2024	03/21/2025
Preamplifier	CD	PAP-1840-60	6041.6042	06/19/2024	06/18/2025
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Receiver	Keysight	N9038A	MY57290136	01-09-2024	01-08-2025
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-29-2024	01-28-2025
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-23-2024	01-22-2025
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2024	04-27-2025
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-16-2024	04-15-2025
Horn Antenna	ETS-LINDGREN	3117	57407	07-03-2024	07-02-2025
Preamplifier	EMCI	EMC001330	980563	03-08-2024	03-07-2025
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-18-2024	07-17-2025
Preamplifier	Tonscend	EMC051845SE	980380	12-14-2023	12-13-2024
Communication test set	R&S	CMW500	102898	12-14-2023	12-13-2024
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-07-2024	04-06-2025
RSE Automatic test software	JS Tonscend	JS36-RSE	V4.0.0.0	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001		---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos
The antenna is internal antenna. The best case gain of the antenna 1 is 1.3dBi. The best case gain of the antenna 2 is 1.2dBi.	


6.2 AC Power Line Conducted Emissions

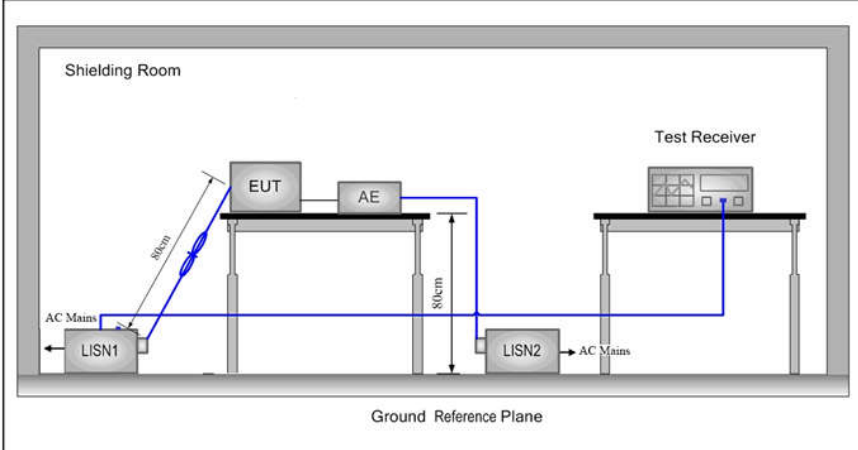Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Mode:	All modes were tested, only the worse case lowest channel of 1Mbps for 802.11b was recorded in the report.		

Test Results: Pass

Measurement Data

Live line:

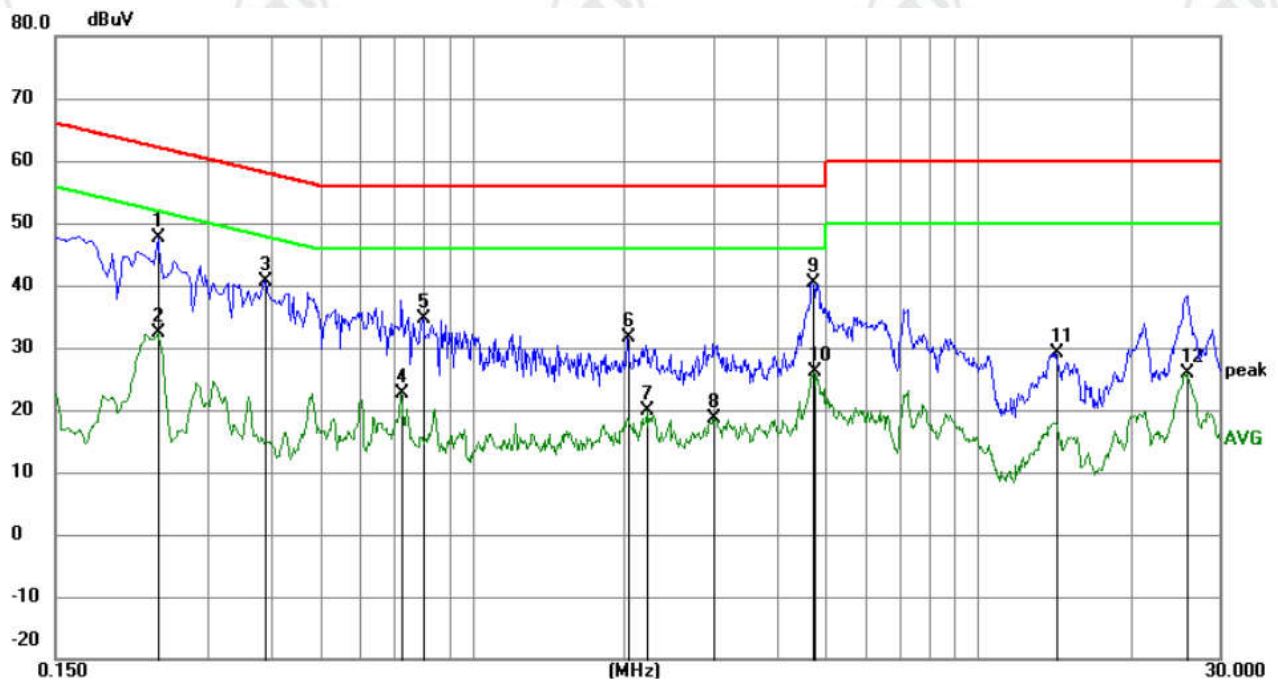


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.2400	37.98	9.74	47.72	62.10	-14.38	QP	
2		0.2400	22.57	9.74	32.31	52.10	-19.79	AVG	
3		0.3885	30.88	9.76	40.64	58.10	-17.46	QP	
4		0.7260	12.70	9.94	22.64	46.00	-23.36	AVG	
5		0.7980	24.94	9.78	34.72	56.00	-21.28	QP	
6		2.0264	21.82	9.75	31.57	56.00	-24.43	QP	
7		2.2200	10.09	9.76	19.85	46.00	-26.15	AVG	
8		2.9985	8.74	9.78	18.52	46.00	-27.48	AVG	
9		4.7175	30.46	9.83	40.29	56.00	-15.71	QP	
10		4.7445	16.21	9.83	26.04	46.00	-19.96	AVG	
11		14.2170	19.25	9.85	29.10	60.00	-30.90	QP	
12		25.9350	16.01	9.89	25.90	50.00	-24.10	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

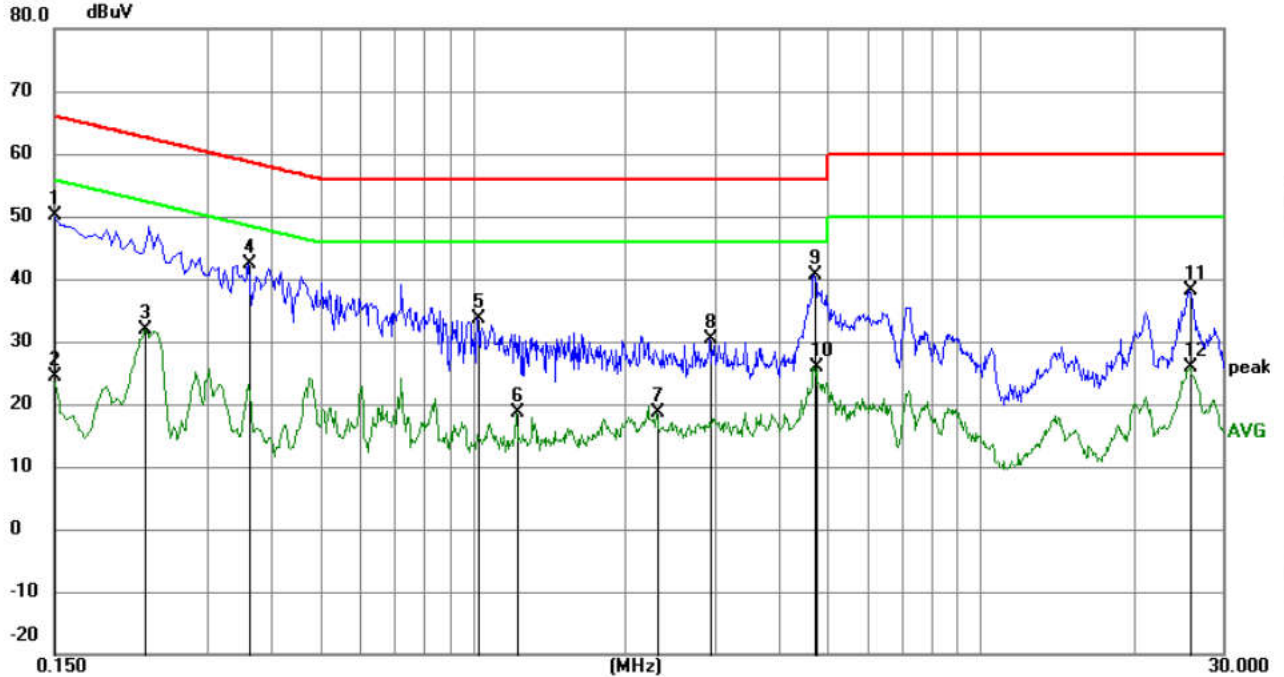


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	40.19	9.84	50.03	66.00	-15.97	QP	
2		0.1500	14.58	9.84	24.42	56.00	-31.58	AVG	
3		0.2265	22.11	9.78	31.89	52.58	-20.69	AVG	
4		0.3615	32.57	9.69	42.26	58.69	-16.43	QP	
5		1.0230	23.93	9.74	33.67	56.00	-22.33	QP	
6		1.2210	8.83	9.74	18.57	46.00	-27.43	AVG	
7		2.3055	8.92	9.76	18.68	46.00	-27.32	AVG	
8		2.9445	20.67	9.78	30.45	56.00	-25.55	QP	
9	*	4.6994	30.76	9.83	40.59	56.00	-15.41	QP	
10		4.7580	16.06	9.83	25.89	46.00	-20.11	AVG	
11		25.8090	28.14	9.89	38.03	60.00	-21.97	QP	
12		25.9125	16.08	9.89	25.97	50.00	-24.03	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


6.3 Maximum Conducted Output Power

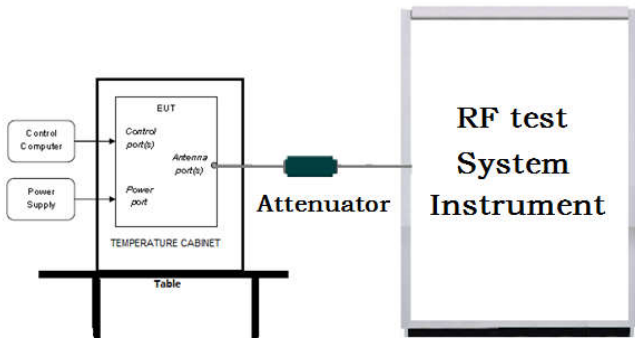Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2013
Test Setup:	
Test Procedure:	1. PKPM1 Peak power meter measurement The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector. 2. Method AVGPM-G Average power measurement Method AVGPM-G is a measurement using a gated RF average power meter. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
Limit:	30dBm
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix 2.4G Wi-Fi


6.4 DTS Bandwidth

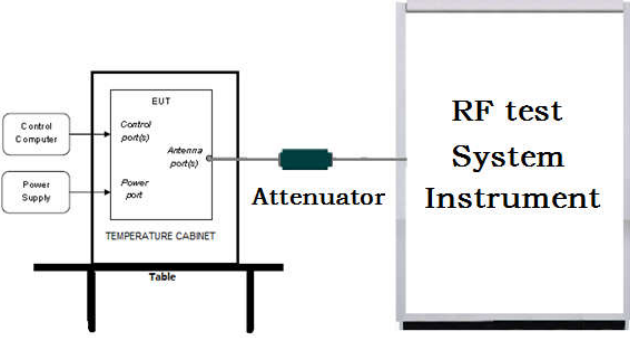Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	$\geq 500 \text{ kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix 2.4G Wi-Fi

6.5 Maximum Power Spectral Density

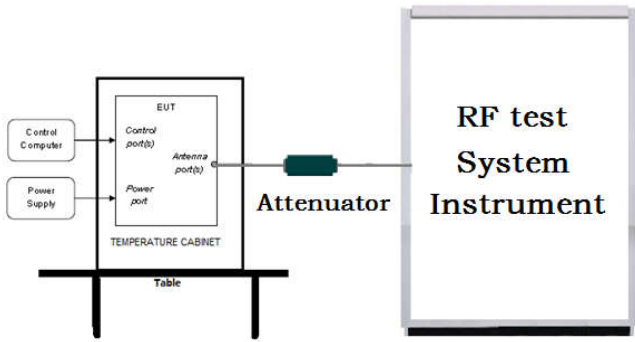Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	- Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$. - Set the VBW $> [3 \times \text{RBW}]$. - Detector = peak. - Sweep time = auto couple. - Trace mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
Limit:	$\leq 8.00 \text{ dBm}/3 \text{ kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix 2.4G Wi-Fi

6.6 Band Edge Measurements and Conducted Spurious Emission

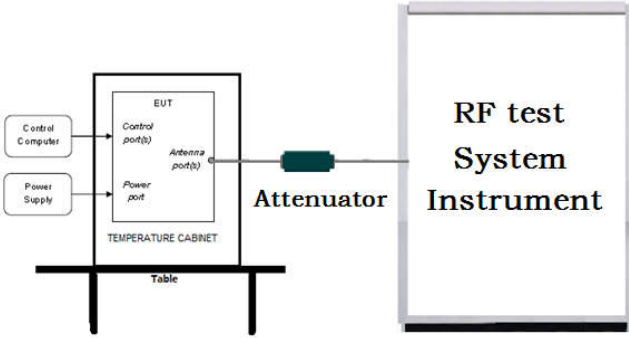Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix 2.4G Wi-Fi

6.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

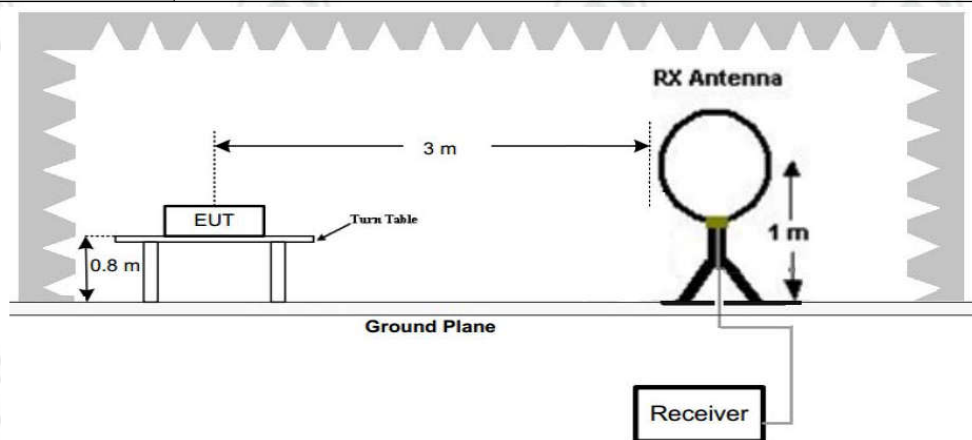


Figure 1. Below 30MHz

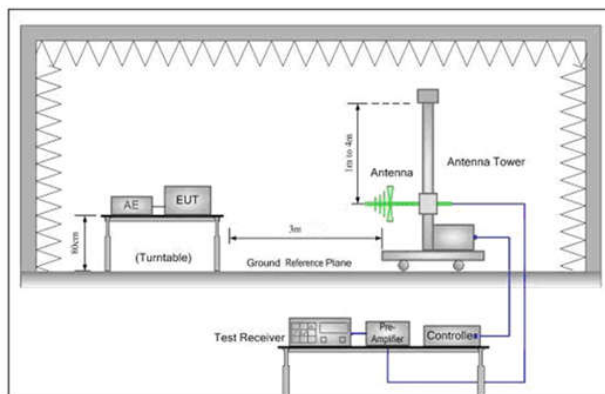


Figure 2. 30MHz to 1GHz

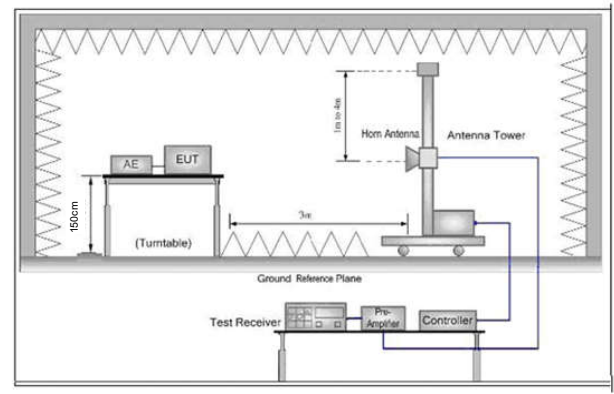


Figure 3. Above 1 GHz

Test Procedure:


- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 5.3
Test Results:	Pass

Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.


Horizontal:
Test Graph

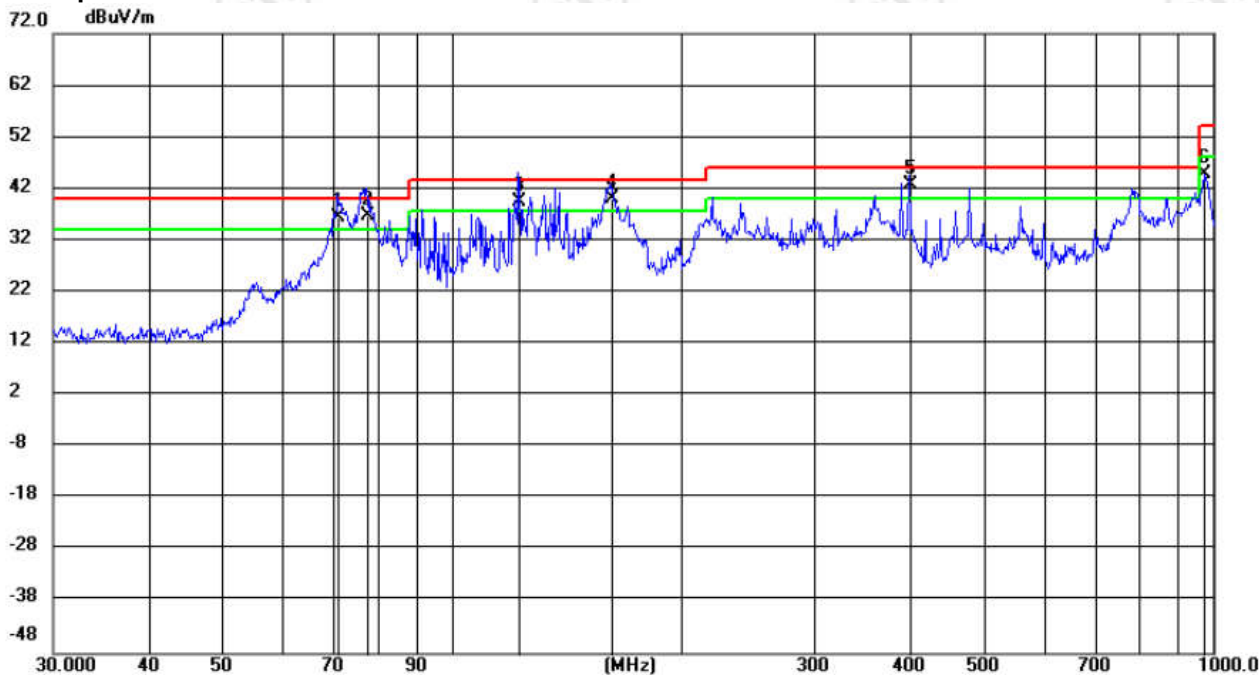

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	!	70.9308	26.07	10.33	36.40	40.00	-3.60	QP	199	307	
2	!	77.4568	27.21	9.49	36.70	40.00	-3.30	QP	199	232	
3	!	122.8339	28.34	11.16	39.50	43.50	-4.00	QP	199	242	
4	!	162.1266	30.00	10.20	40.20	43.50	-3.30	QP	199	7	
5	*	400.0108	24.76	18.04	42.80	46.00	-3.20	QP	100	214	
6		974.3852	18.45	26.35	44.80	54.00	-9.20	QP	100	21	

Vertical:

Test Graph

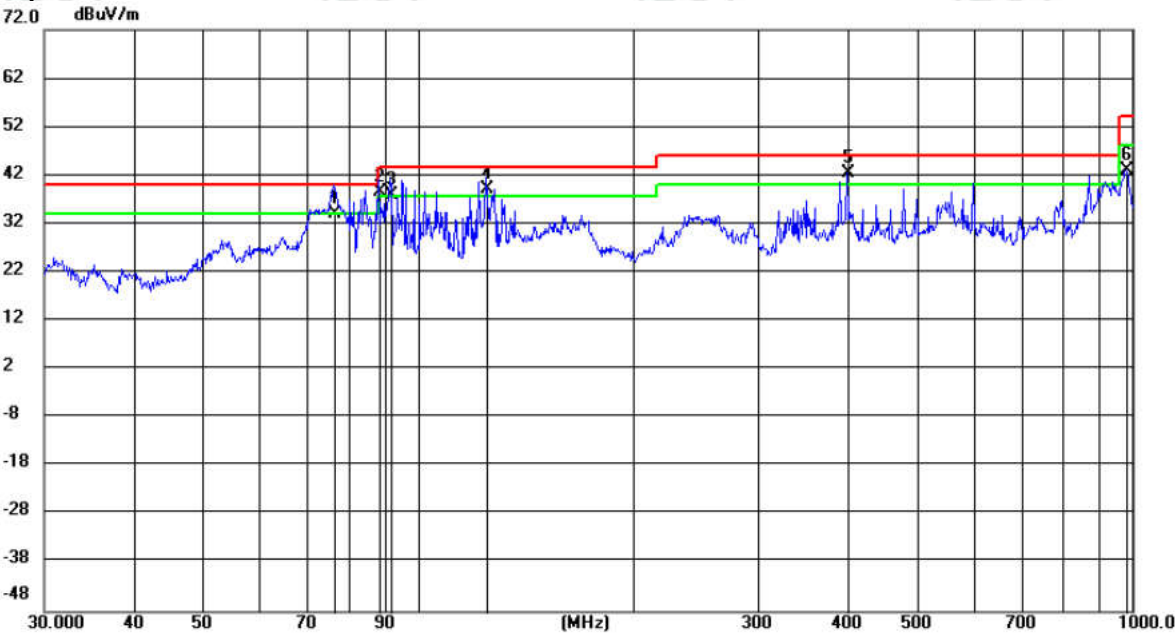

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	!	76.4448	24.58	9.62	34.20	40.00	-5.80	QP	100	253
2	!	88.2028	27.38	11.22	38.60	43.50	-4.90	QP	100	7
3	!	91.7841	25.96	11.94	37.90	43.50	-5.60	QP	100	7
4	!	124.8752	28.40	10.80	39.20	43.50	-4.30	QP	100	135
5	*	400.0109	24.43	18.04	42.47	46.00	-3.53	QP	100	350
6		979.6956	16.77	26.38	43.15	54.00	-10.85	QP	100	7

Radiated Spurious Emission above 1GHz:

Remark: Through Pre-scan, for 20MHz Occupied Bandwidth, 802.11 b mode was the worst case; for 40MHz Occupied Bandwidth, 802.11 ax(HE40) mode was the worst case; only the worst case was recorded in the report.

ANT 1:

Mode:			802.11 b Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1155.2155	10.24	37.55	47.79	74.00	26.21	PASS	H	PK
2	1956.0956	16.73	35.10	51.83	74.00	22.17	PASS	H	PK
3	3354.0236	-12.63	53.43	40.80	74.00	33.20	PASS	H	PK
4	6129.2086	-6.20	48.00	41.80	74.00	32.20	PASS	H	PK
5	11222.5482	5.09	43.64	48.73	74.00	25.27	PASS	H	PK
6	16404.8937	13.05	38.77	51.82	74.00	22.18	PASS	H	PK
7	1090.8091	8.93	38.32	47.25	74.00	26.75	PASS	V	PK
8	1947.6948	17.00	35.23	52.23	74.00	21.77	PASS	V	PK
9	3900.06	-11.75	52.33	40.58	74.00	33.42	PASS	V	PK
10	4895.1263	-9.56	50.26	40.70	74.00	33.30	PASS	V	PK
11	11757.5838	4.00	45.33	49.33	74.00	24.67	PASS	V	PK
12	16410.8941	12.93	38.88	51.81	74.00	22.19	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1120.6121	9.44	37.65	47.09	74.00	26.91	PASS	H	PK
2	1927.4927	16.35	35.74	52.09	74.00	21.91	PASS	H	PK
3	3328.0219	-12.90	53.37	40.47	74.00	33.53	PASS	H	PK
4	6561.2374	-6.16	48.05	41.89	74.00	32.11	PASS	H	PK
5	11246.5498	5.77	44.48	50.25	74.00	23.75	PASS	H	PK
6	14248.7499	12.66	39.06	51.72	74.00	22.28	PASS	H	PK
7	1149.615	10.40	36.63	47.03	74.00	26.97	PASS	V	PK
8	1949.2949	17.06	34.60	51.66	74.00	22.34	PASS	V	PK
9	3352.0235	-12.59	52.94	40.35	74.00	33.65	PASS	V	PK
10	7818.3212	-3.29	46.29	43.00	74.00	31.00	PASS	V	PK
11	9618.4412	2.44	44.11	46.55	74.00	27.45	PASS	V	PK
12	14250.75	12.82	38.83	51.65	74.00	22.35	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1109.2109	9.06	38.19	47.25	74.00	26.75	PASS	H	PK
2	1940.8941	16.79	35.12	51.91	74.00	22.09	PASS	H	PK
3	3382.0255	-13.14	53.92	40.78	74.00	33.22	PASS	H	PK
4	4499.0999	-8.49	49.41	40.92	74.00	33.08	PASS	H	PK
5	9801.4534	3.38	43.71	47.09	74.00	26.91	PASS	H	PK
6	14249.75	12.84	39.28	52.12	74.00	21.88	PASS	H	PK
7	1147.2147	10.32	36.91	47.23	74.00	26.77	PASS	V	PK
8	1933.2933	16.54	35.76	52.30	74.00	21.70	PASS	V	PK
9	3467.0311	-13.34	54.03	40.69	74.00	33.31	PASS	V	PK
10	4500.1	-8.40	48.80	40.40	74.00	33.60	PASS	V	PK
11	7845.323	-2.72	46.31	43.59	74.00	30.41	PASS	V	PK
12	14257.7505	12.21	39.82	52.03	74.00	21.97	PASS	V	PK

Mode:			802.11 ax(HE40) Transmitting			Channel:		2422MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1150.015	10.41	36.97	47.38	74.00	26.62	PASS	H	PK
2	1945.8946	16.94	35.41	52.35	74.00	21.65	PASS	H	PK
3	3349.0233	-12.57	52.71	40.14	74.00	33.86	PASS	H	PK
4	5762.1841	-7.30	47.91	40.61	74.00	33.39	PASS	H	PK
5	9297.4198	1.47	44.43	45.90	74.00	28.10	PASS	H	PK
6	14249.75	12.84	39.06	51.90	74.00	22.10	PASS	H	PK
7	1057.6058	9.55	37.85	47.40	74.00	26.60	PASS	V	PK
8	1948.0948	17.02	34.95	51.97	74.00	22.03	PASS	V	PK
9	3349.0233	-12.57	53.55	40.98	74.00	33.02	PASS	V	PK
10	6089.2059	-6.13	47.40	41.27	74.00	32.73	PASS	V	PK
11	9284.419	1.28	45.30	46.58	74.00	27.42	PASS	V	PK
12	14247.7498	12.48	38.89	51.37	74.00	22.63	PASS	V	PK

Mode:			802.11 ax(HE40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1150.6151	10.39	37.15	47.54	74.00	26.46	PASS	H	PK
2	1951.2951	17.01	35.17	52.18	74.00	21.82	PASS	H	PK
3	4402.0935	-10.20	51.28	41.08	74.00	32.92	PASS	H	PK
4	7767.3178	-3.29	46.49	43.20	74.00	30.80	PASS	H	PK
5	9614.441	2.49	44.22	46.71	74.00	27.29	PASS	H	PK
6	14249.75	12.84	38.67	51.51	74.00	22.49	PASS	H	PK
7	1154.8155	10.25	37.09	47.34	74.00	26.66	PASS	V	PK
8	1954.0954	16.85	34.97	51.82	74.00	22.18	PASS	V	PK
9	3921.0614	-11.61	52.02	40.41	74.00	33.59	PASS	V	PK
10	5139.1426	-9.30	48.89	39.59	74.00	34.41	PASS	V	PK
11	7778.3186	-3.42	46.41	42.99	74.00	31.01	PASS	V	PK
12	15246.8165	13.78	38.26	52.04	74.00	21.96	PASS	V	PK

Mode:			802.11 ax(HE40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1155.4155	10.24	36.84	47.08	74.00	26.92	PASS	H	PK
2	1958.0958	16.61	35.64	52.25	74.00	21.75	PASS	H	PK
3	3905.0603	-11.72	52.24	40.52	74.00	33.48	PASS	H	PK
4	6130.2087	-6.22	47.77	41.55	74.00	32.45	PASS	H	PK
5	11274.5516	4.40	45.37	49.77	74.00	24.23	PASS	H	PK
6	15857.8572	12.14	40.15	52.29	74.00	21.71	PASS	H	PK
7	1194.0194	8.95	38.42	47.37	74.00	26.63	PASS	V	PK
8	1965.0965	16.21	36.05	52.26	74.00	21.74	PASS	V	PK
9	3433.0289	-12.91	53.54	40.63	74.00	33.37	PASS	V	PK
10	6401.2267	-5.32	47.34	42.02	74.00	31.98	PASS	V	PK
11	9790.4527	3.11	43.21	46.32	74.00	27.68	PASS	V	PK
12	16421.8948	12.71	39.29	52.00	74.00	22.00	PASS	V	PK

MIMO:

Mode:			802.11 n(HT20) Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1146.6147	10.30	37.13	47.43	74.00	26.57	PASS	H	PK
2	1953.2953	16.89	35.07	51.96	74.00	22.04	PASS	H	PK
3	3915.061	-11.66	52.40	40.74	74.00	33.26	PASS	H	PK
4	6097.2065	-5.85	47.75	41.90	74.00	32.10	PASS	H	PK
5	11236.5491	5.49	43.66	49.15	74.00	24.85	PASS	H	PK
6	15902.8602	13.50	38.72	52.22	74.00	21.78	PASS	H	PK
7	1396.8397	10.60	37.91	48.51	74.00	25.49	PASS	V	PK
8	1962.0962	16.38	35.80	52.18	74.00	21.82	PASS	V	PK
9	3387.0258	-13.24	52.73	39.49	74.00	34.51	PASS	V	PK
10	5780.1853	-7.40	48.48	41.08	74.00	32.92	PASS	V	PK
11	9808.4539	3.28	43.99	47.27	74.00	26.73	PASS	V	PK
12	14270.7514	11.05	39.78	50.83	74.00	23.17	PASS	V	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1150.415	10.40	37.13	47.53	74.00	26.47	PASS	H	PK
2	1930.6931	16.46	35.84	52.30	74.00	21.70	PASS	H	PK
3	4501.1001	-8.44	49.11	40.67	74.00	33.33	PASS	H	PK
4	7842.3228	-2.79	45.73	42.94	74.00	31.06	PASS	H	PK
5	11241.5494	5.63	43.87	49.50	74.00	24.50	PASS	H	PK
6	14260.7507	11.94	39.99	51.93	74.00	22.07	PASS	H	PK
7	1147.8148	10.34	36.64	46.98	74.00	27.02	PASS	V	PK
8	1921.4921	16.16	35.79	51.95	74.00	22.05	PASS	V	PK
9	3358.0239	-12.70	53.54	40.84	74.00	33.16	PASS	V	PK
10	7802.3202	-3.63	47.66	44.03	74.00	29.97	PASS	V	PK
11	11241.5494	5.63	45.13	50.76	74.00	23.24	PASS	V	PK
12	14256.7504	12.30	39.57	51.87	74.00	22.13	PASS	V	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1157.6158	10.16	37.19	47.35	74.00	26.65	PASS	H	PK
2	1955.6956	16.75	35.26	52.01	74.00	21.99	PASS	H	PK
3	3354.0236	-12.63	54.24	41.61	74.00	32.39	PASS	H	PK
4	6125.2083	-6.14	47.52	41.38	74.00	32.62	PASS	H	PK
5	9802.4535	3.37	44.28	47.65	74.00	26.35	PASS	H	PK
6	14241.7494	11.37	40.60	51.97	74.00	22.03	PASS	H	PK
7	1139.2139	10.05	37.65	47.70	74.00	26.30	PASS	V	PK
8	1944.8945	16.92	34.92	51.84	74.00	22.16	PASS	V	PK
9	3449.0299	-12.64	53.41	40.77	74.00	33.23	PASS	V	PK
10	5053.1369	-8.86	49.01	40.15	74.00	33.85	PASS	V	PK
11	9812.4542	3.22	43.66	46.88	74.00	27.12	PASS	V	PK
12	14250.75	12.82	39.26	52.08	74.00	21.92	PASS	V	PK

Mode:			802.11 ax(HE40) Transmitting			Channel:		2422MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1170.217	9.74	38.28	48.02	74.00	25.98	PASS	H	PK
2	1957.8958	16.62	35.51	52.13	74.00	21.87	PASS	H	PK
3	3352.0235	-12.59	52.96	40.37	74.00	33.63	PASS	H	PK
4	6204.2136	-6.87	48.39	41.52	74.00	32.48	PASS	H	PK
5	9266.4178	1.02	45.55	46.57	74.00	27.43	PASS	H	PK
6	14248.7499	12.66	39.10	51.76	74.00	22.24	PASS	H	PK
7	1117.4117	9.34	37.90	47.24	74.00	26.76	PASS	V	PK
8	1964.8965	16.22	35.83	52.05	74.00	21.95	PASS	V	PK
9	3335.0223	-12.79	53.36	40.57	74.00	33.43	PASS	V	PK
10	7856.3238	-2.62	46.10	43.48	74.00	30.52	PASS	V	PK
11	11206.5471	4.63	45.07	49.70	74.00	24.30	PASS	V	PK
12	14258.7506	12.12	39.27	51.39	74.00	22.61	PASS	V	PK

Mode:			802.11 ax(HE40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1141.2141	10.12	37.53	47.65	74.00	26.35	PASS	H	PK
2	1937.2937	16.67	35.94	52.61	74.00	21.39	PASS	H	PK
3	3450.03	-12.62	53.29	40.67	74.00	33.33	PASS	H	PK
4	6102.2068	-5.78	47.70	41.92	74.00	32.08	PASS	H	PK
5	11250.55	5.84	43.96	49.80	74.00	24.20	PASS	H	PK
6	14254.7503	12.47	39.55	52.02	74.00	21.98	PASS	H	PK
7	1149.4149	10.39	36.89	47.28	74.00	26.72	PASS	V	PK
8	1957.2957	16.66	35.79	52.45	74.00	22.05	PASS	V	PK
9	3541.0361	-13.27	54.23	40.96	74.00	33.04	PASS	V	PK
10	4657.1105	-10.30	50.39	40.09	74.00	33.91	PASS	V	PK
11	9793.4529	3.20	43.53	46.73	74.00	27.27	PASS	V	PK
12	15250.8167	13.85	38.05	51.90	74.00	22.10	PASS	V	PK

Mode:			802.11 ax(HE40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1153.0153	10.31	37.18	47.49	74.00	26.51	PASS	H	PK
2	1954.6955	16.81	35.19	52.00	74.00	22.00	PASS	H	PK
3	3339.0226	-12.72	52.96	40.24	74.00	33.76	PASS	H	PK
4	4502.1001	-8.48	49.04	40.56	74.00	33.44	PASS	H	PK
5	7781.3188	-3.45	46.87	43.42	74.00	30.58	PASS	H	PK
6	11195.5464	4.26	44.69	48.95	74.00	25.05	PASS	H	PK
7	1144.6145	10.23	37.10	47.33	74.00	26.67	PASS	V	PK
8	1954.4954	16.82	35.41	52.23	74.00	21.77	PASS	V	PK
9	3340.0227	-12.71	53.40	40.69	74.00	33.31	PASS	V	PK
10	4694.1129	-9.13	50.27	41.14	74.00	32.86	PASS	V	PK
11	7751.3168	-3.10	47.29	44.19	74.00	29.81	PASS	V	PK
12	14252.7502	12.64	39.27	51.91	74.00	22.09	PASS	V	PK

Remark:


- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:

Test plot as follows:

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

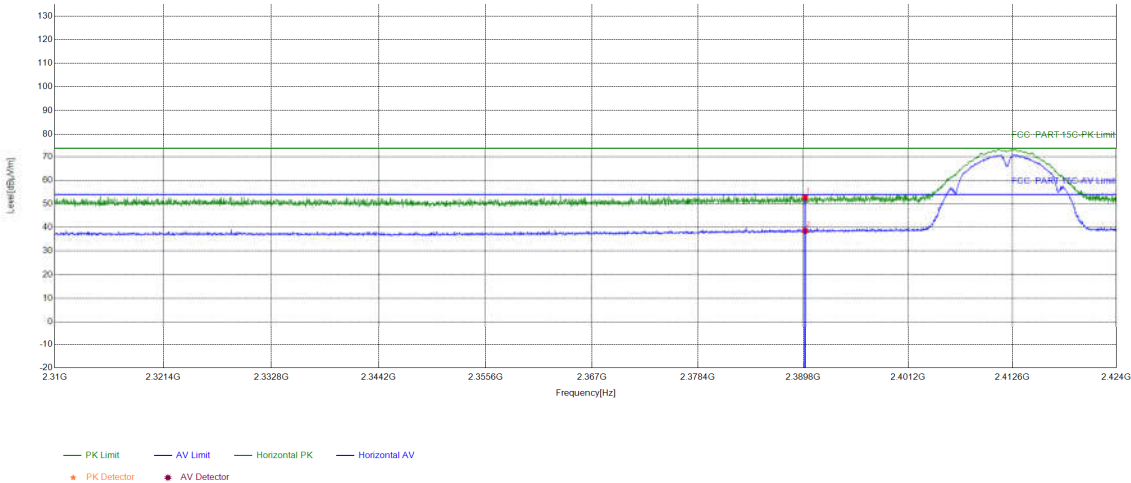

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	37.38	52.69	74.00	21.31	PASS	Horizontal	PK
2	2390	15.31	23.24	38.55	54.00	15.45	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

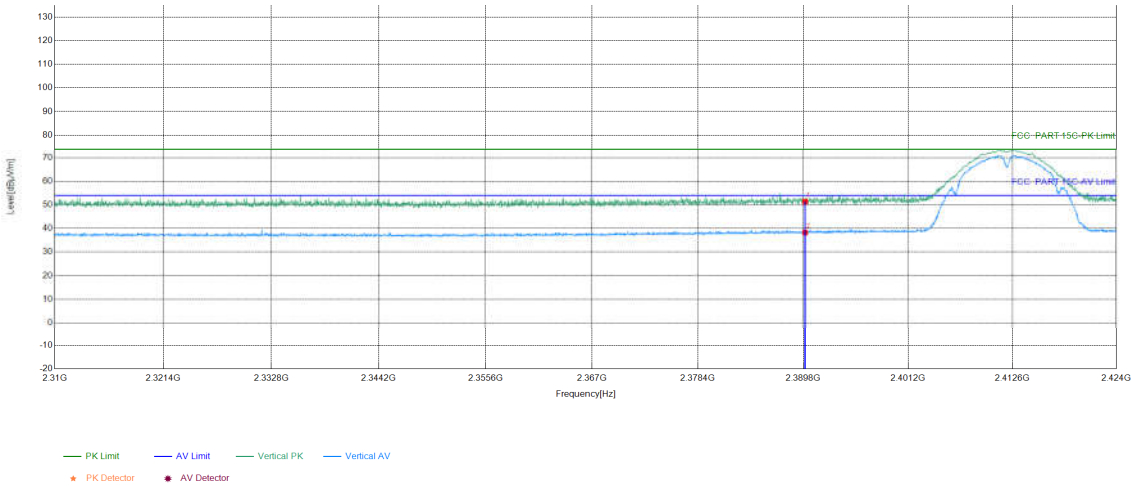

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.09	51.40	74.00	22.60	PASS	Vertical	PK
2	2390	15.31	22.96	38.27	54.00	15.73	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

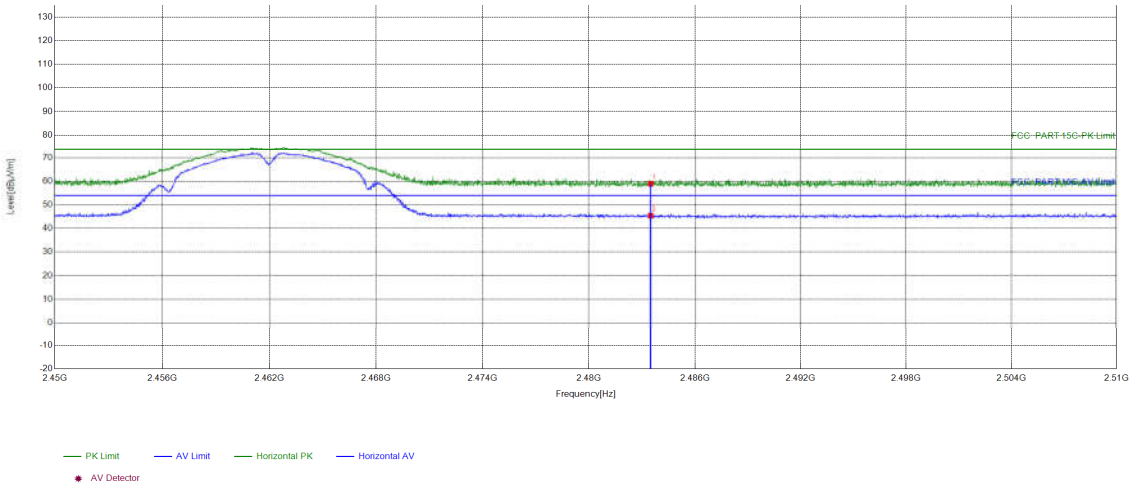

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	34.86	58.91	74.00	15.09	PASS	Horizontal	PK
2	2483.5	24.05	21.40	45.45	54.00	8.55	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

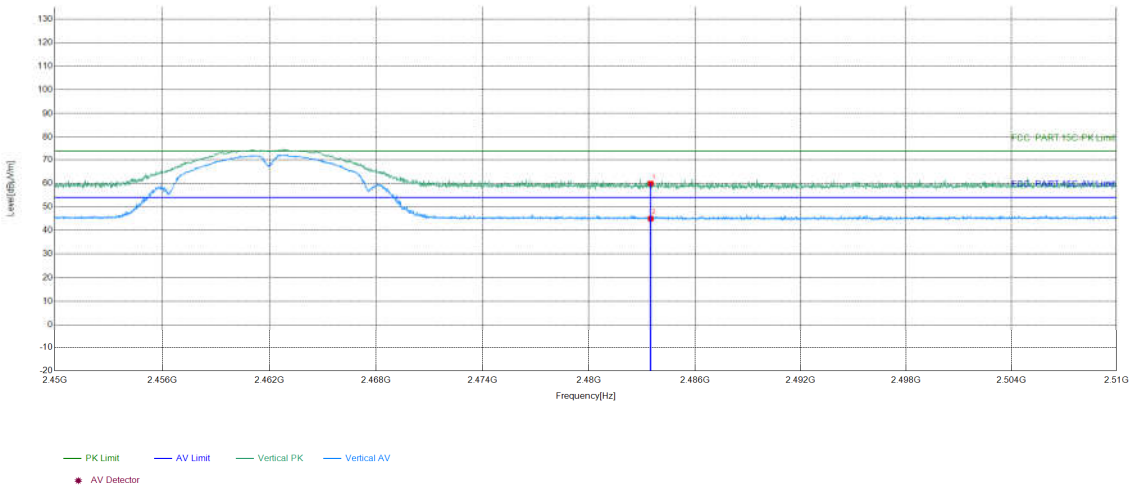

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	35.85	59.90	74.00	14.10	PASS	Vertical	PK
2	2483.5	24.05	20.94	44.99	54.00	9.01	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

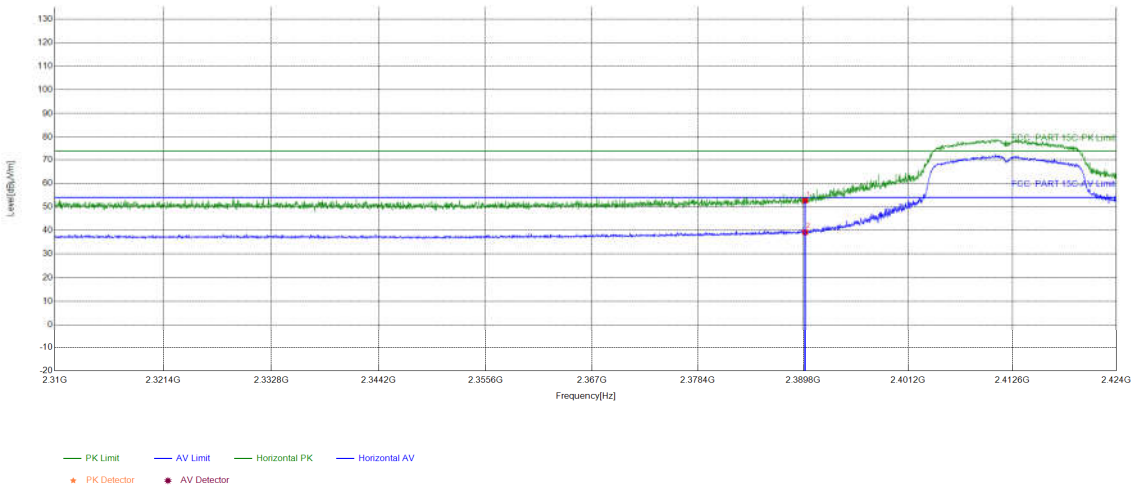

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	37.33	52.64	74.00	21.36	PASS	Horizontal	PK
2	2390	15.31	23.88	39.19	54.00	14.81	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

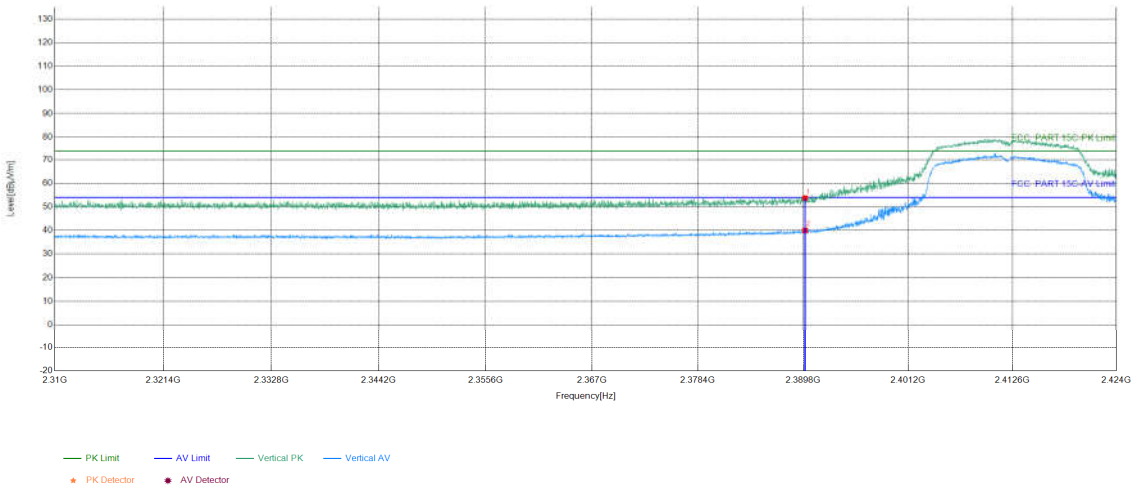

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	38.42	53.73	74.00	20.27	PASS	Vertical	PK
2	2390	15.31	24.70	40.01	54.00	13.99	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

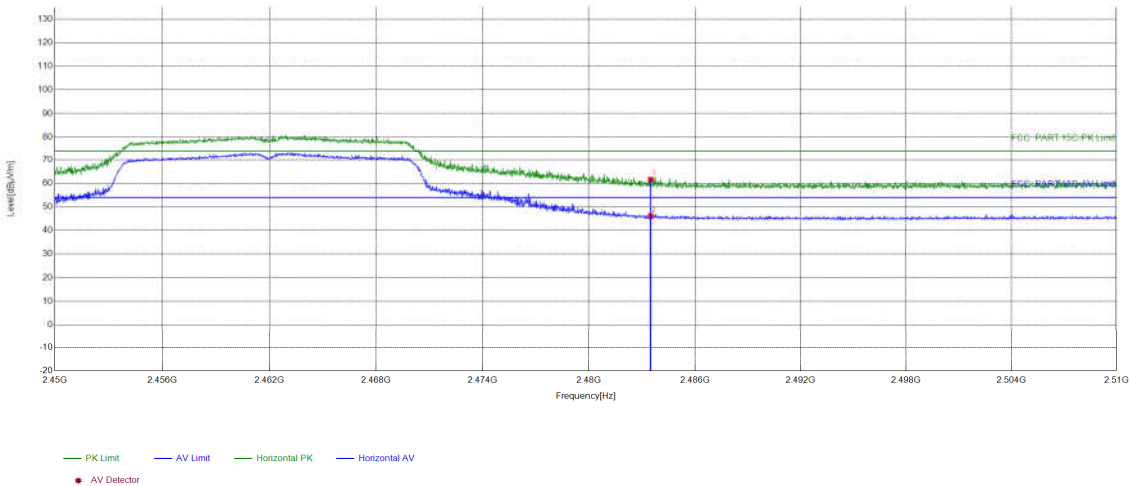

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	37.48	61.53	74.00	12.47	PASS	Horizontal	PK
2	2483.5	24.05	21.97	46.02	54.00	7.98	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

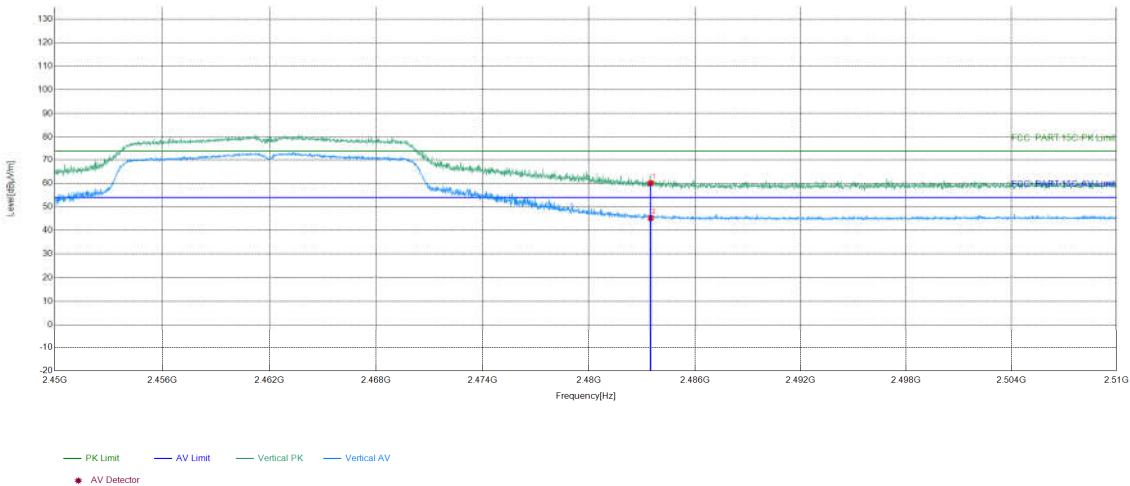

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	36.03	60.08	74.00	13.92	PASS	Vertical	PK
2	2483.5	24.05	21.20	45.25	54.00	8.75	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

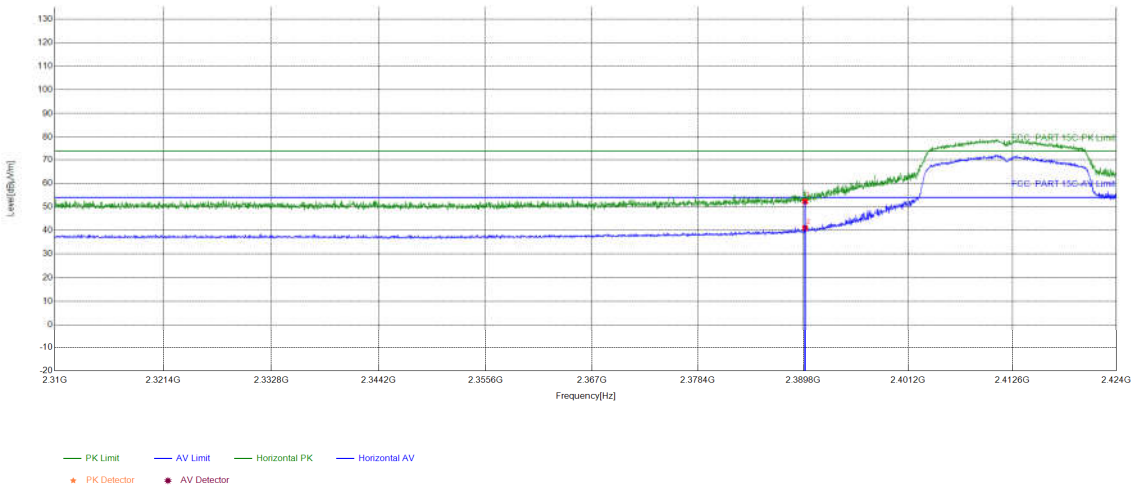

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.98	52.29	74.00	21.71	PASS	Horizontal	PK
2	2390	15.31	25.71	41.02	54.00	12.98	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

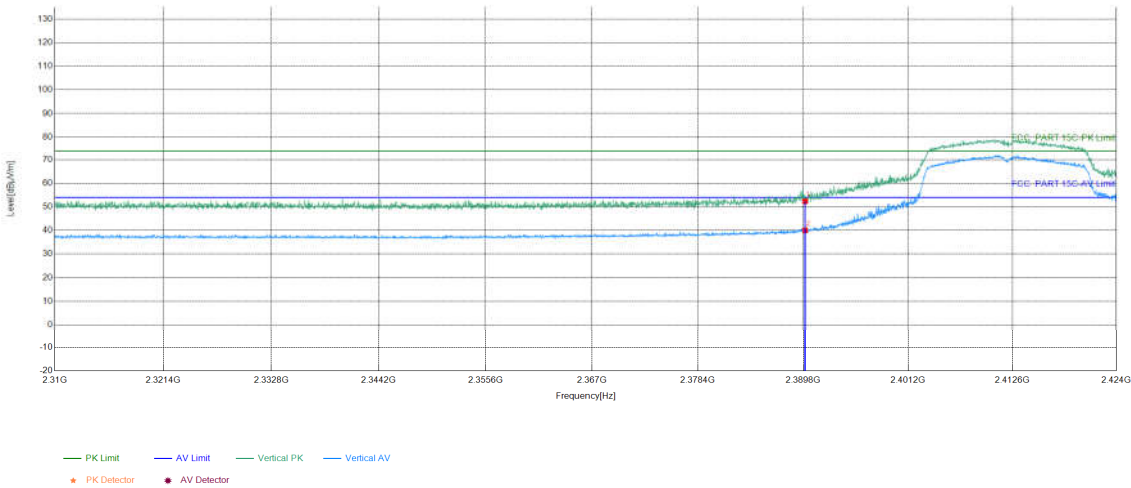

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	37.01	52.32	74.00	21.68	PASS	Vertical	PK
2	2390	15.31	24.74	40.05	54.00	13.95	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

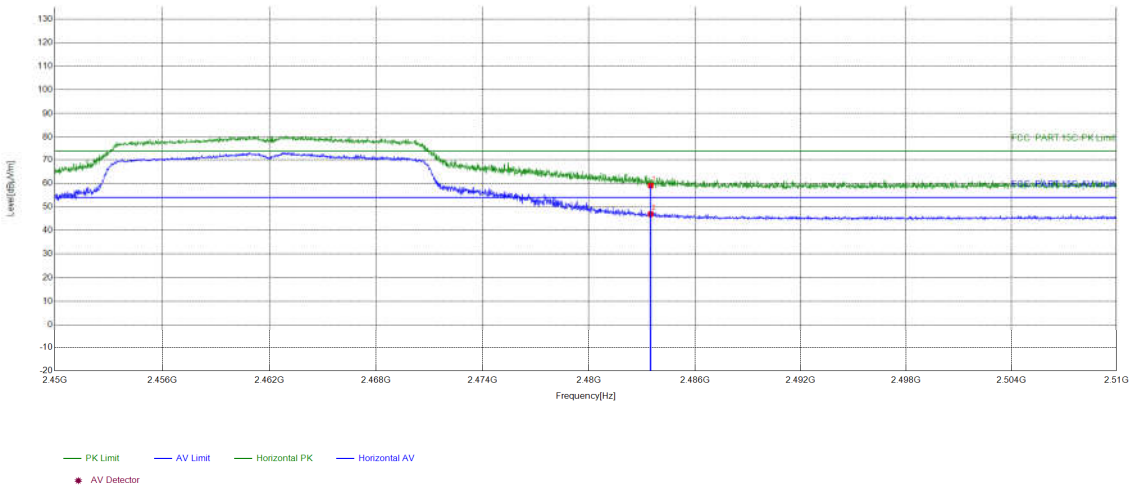

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	34.98	59.03	74.00	14.97	PASS	Horizontal	PK
2	2483.5	24.05	22.87	46.92	54.00	7.08	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

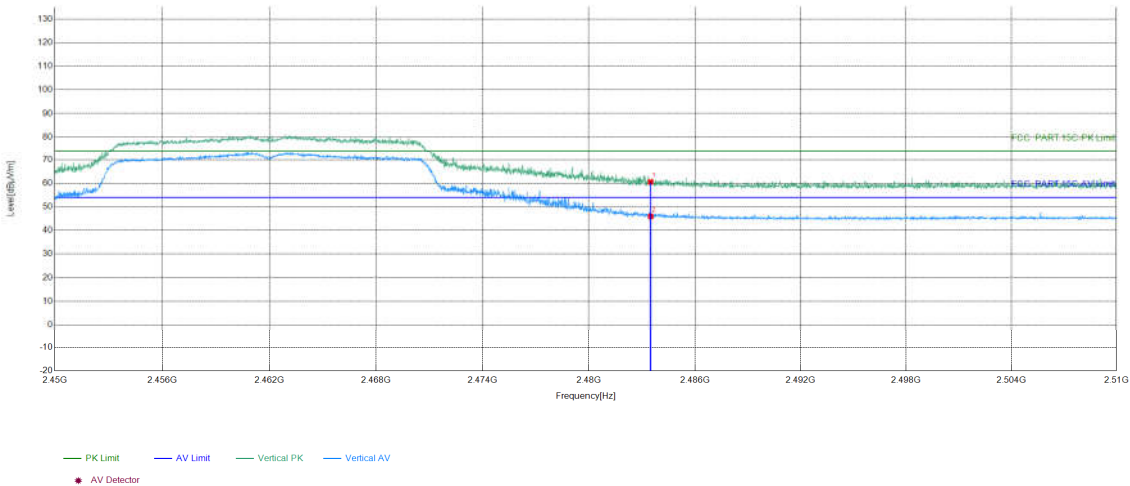

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	36.56	60.61	74.00	13.39	PASS	Vertical	PK
2	2483.5	24.05	21.91	45.96	54.00	8.04	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		

Test Graph

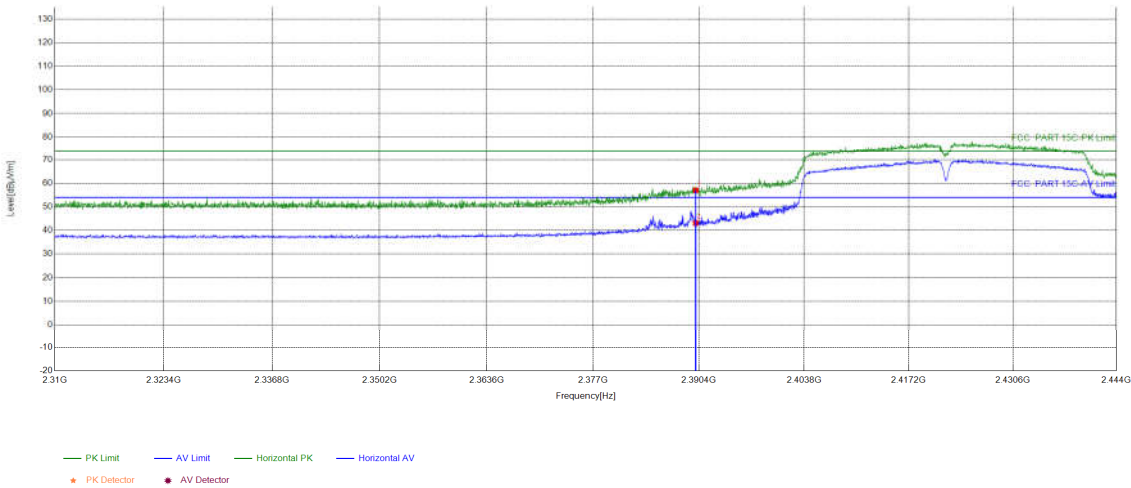


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	41.74	57.05	74.00	16.95	PASS	Horizontal	PK
2	2390	15.31	27.84	43.15	54.00	10.85	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

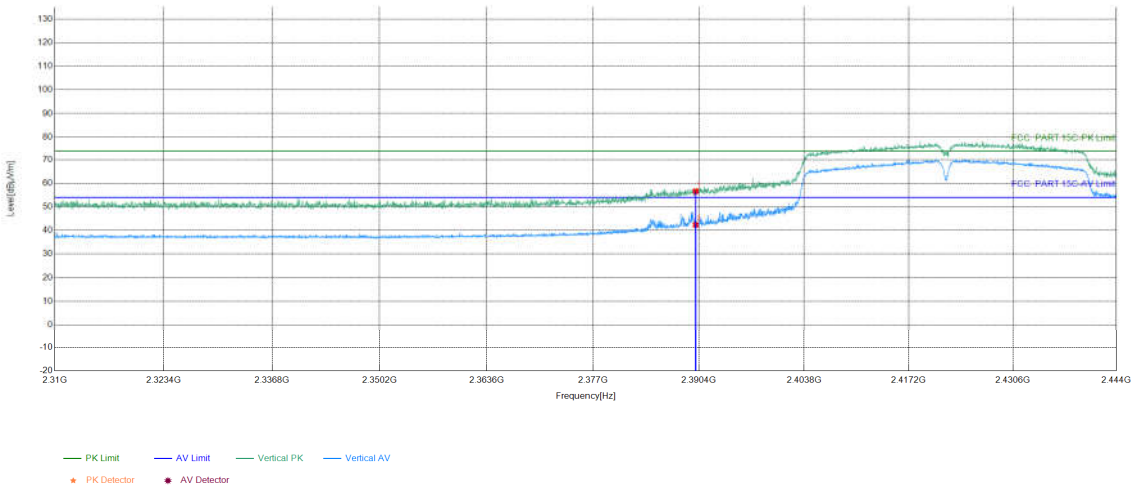

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	41.27	56.58	74.00	17.42	PASS	Vertical	PK
2	2390	15.31	27.07	42.38	54.00	11.62	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

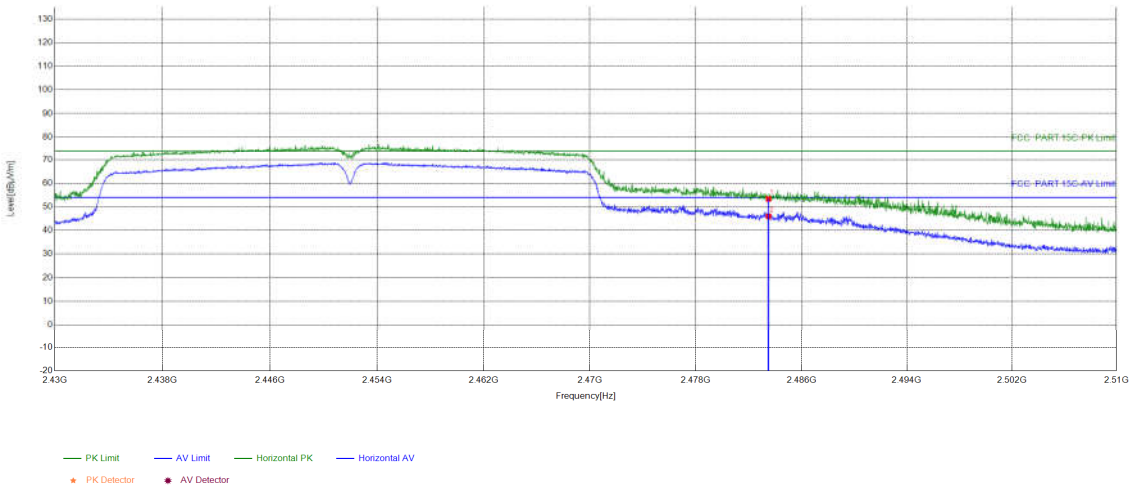

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	-17.27	70.64	53.37	74.00	20.63	PASS	Horizontal	PK
2	2483.5	-17.27	63.21	45.94	54.00	8.06	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

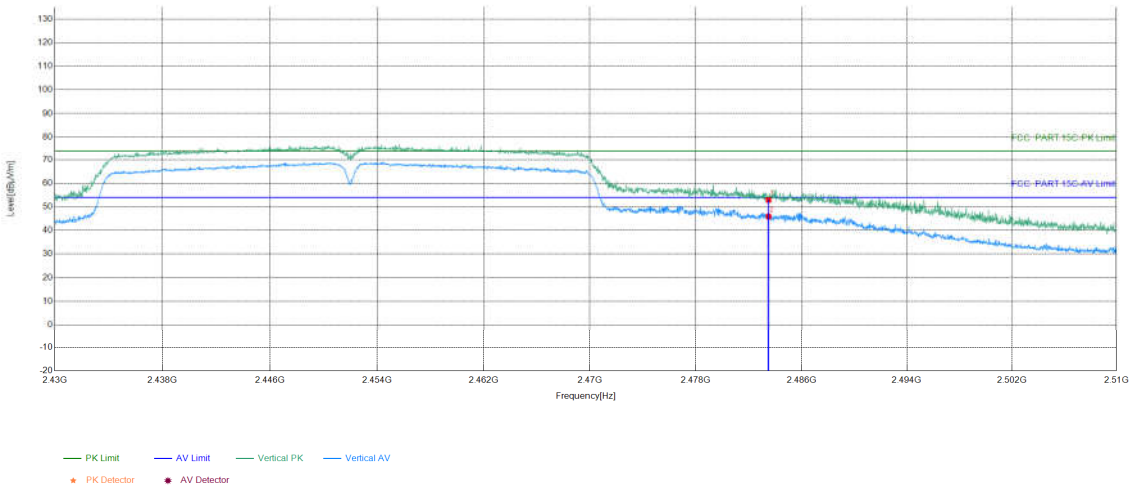

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	-17.27	70.23	52.96	74.00	21.04	PASS	Vertical	PK
2	2483.5	-17.27	63.18	45.91	54.00	8.09	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

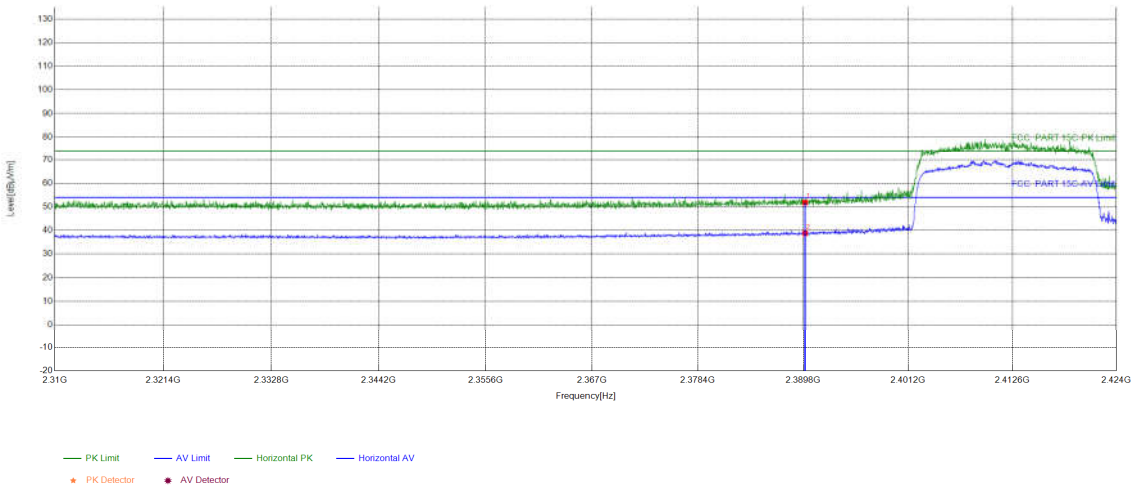

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.56	51.87	74.00	22.13	PASS	Horizontal	PK
2	2390	15.31	23.51	38.82	54.00	15.18	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

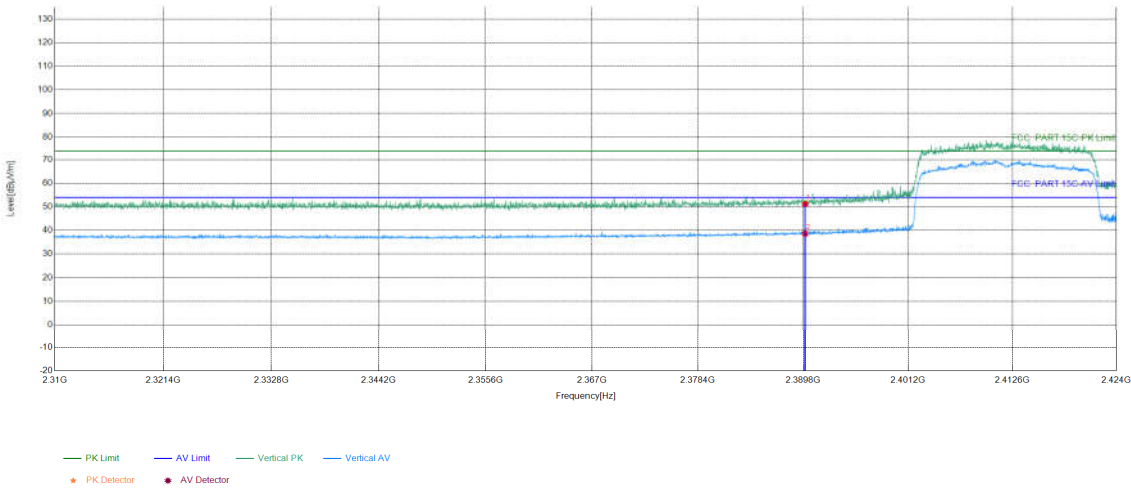

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	35.95	51.26	74.00	22.74	PASS	Vertical	PK
2	2390	15.31	23.33	38.64	54.00	15.36	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

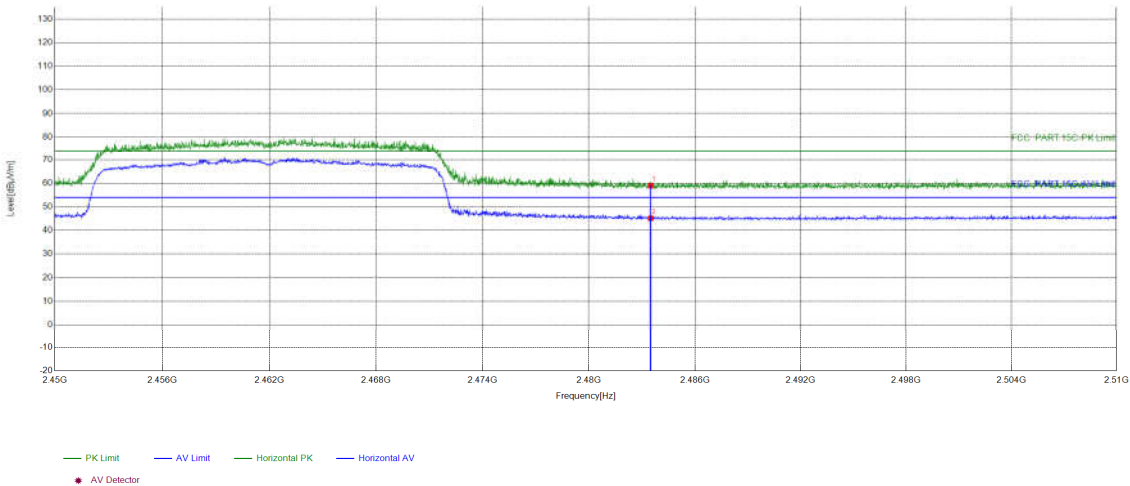

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	34.90	58.95	74.00	15.05	PASS	Horizontal	PK
2	2483.5	24.05	21.11	45.16	54.00	8.84	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

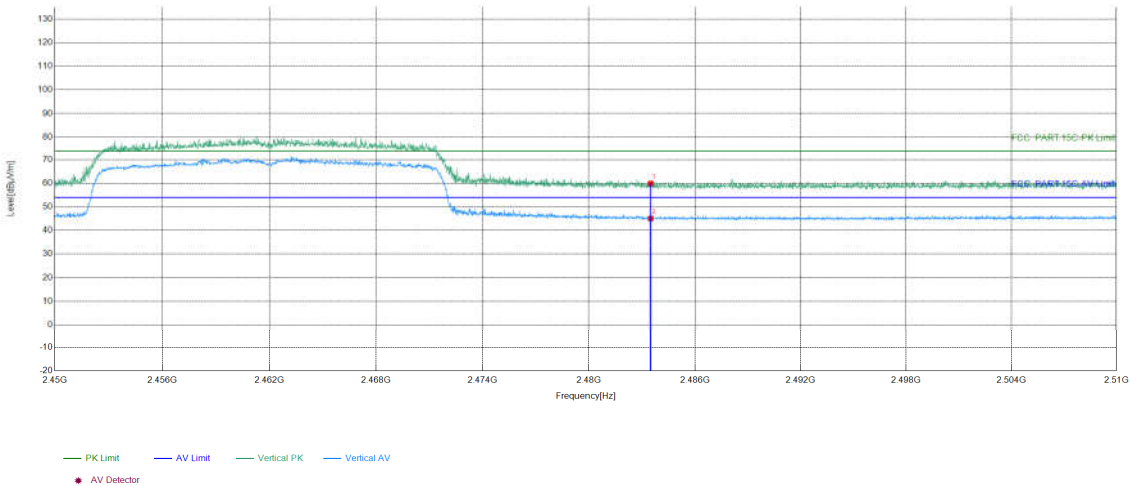

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	35.87	59.92	74.00	14.08	PASS	Vertical	PK
2	2483.5	24.05	21.01	45.06	54.00	8.94	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

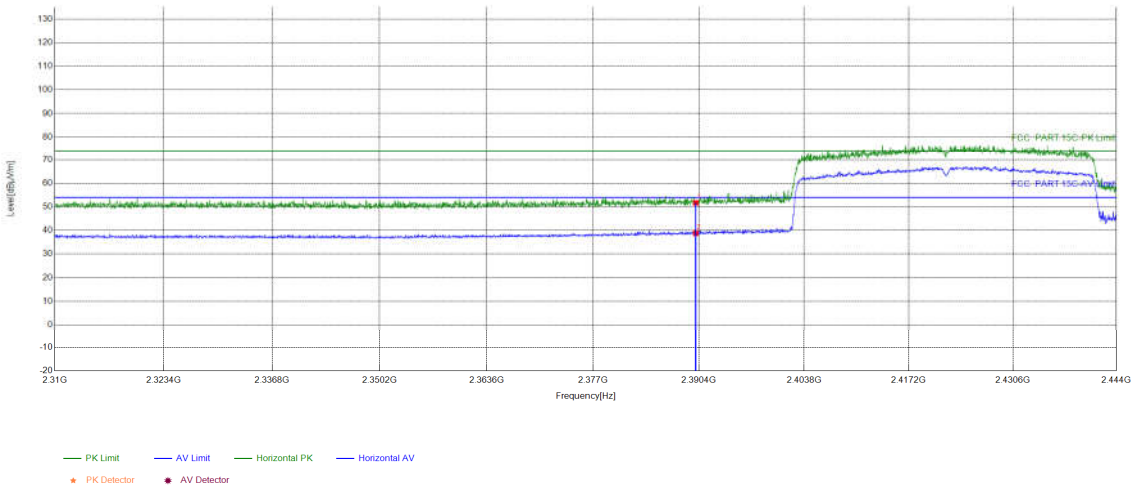

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.41	51.72	74.00	22.28	PASS	Horizontal	PK
2	2390	15.31	23.50	38.81	54.00	15.19	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

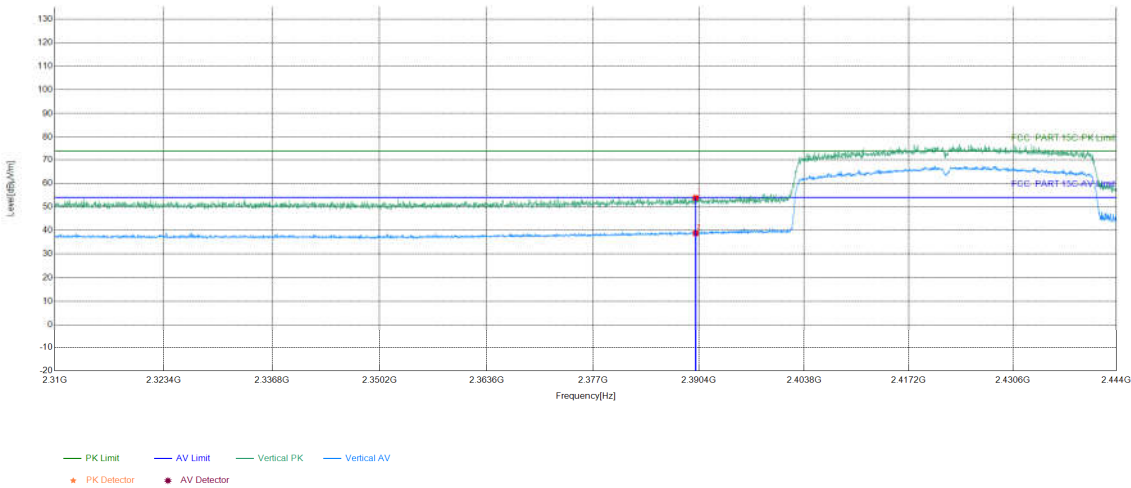

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	38.48	53.79	74.00	20.21	PASS	Vertical	PK
2	2390	15.31	23.52	38.83	54.00	15.17	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

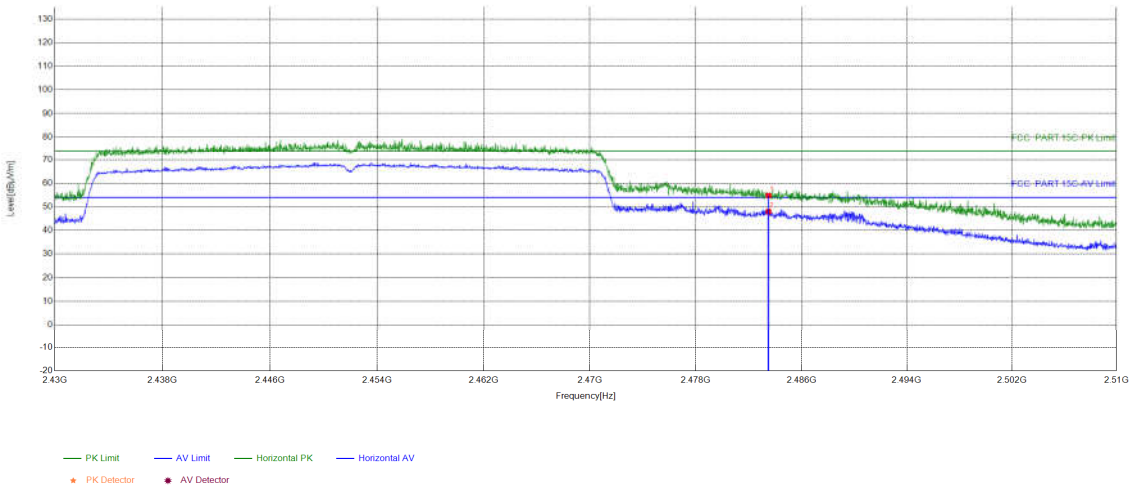

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	-17.27	72.10	54.83	74.00	19.17	PASS	Horizontal	PK
2	2483.5	-17.27	65.22	47.95	54.00	6.05	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

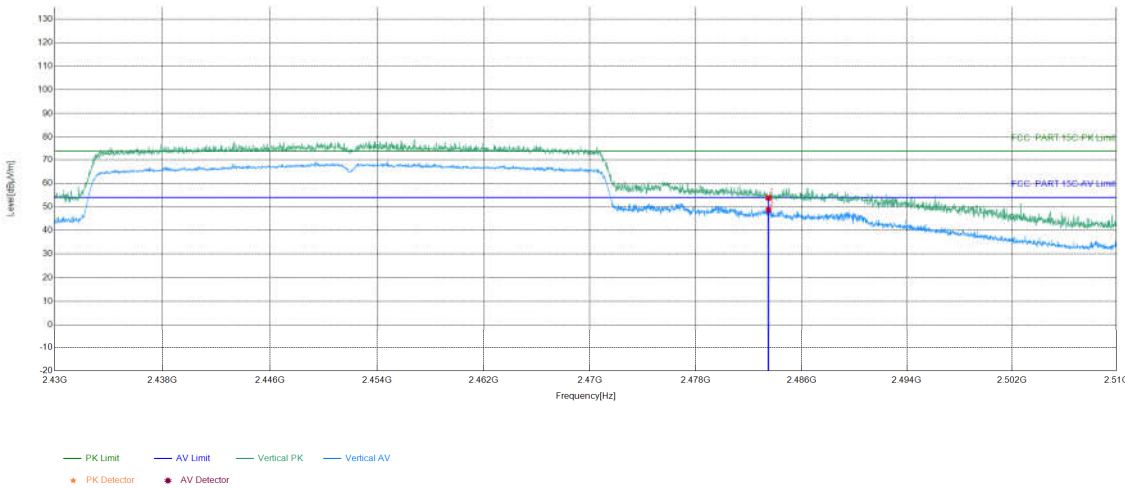

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	-17.27	71.10	53.83	74.00	20.17	PASS	Vertical	PK
2	2483.5	-17.27	65.99	48.72	54.00	5.28	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

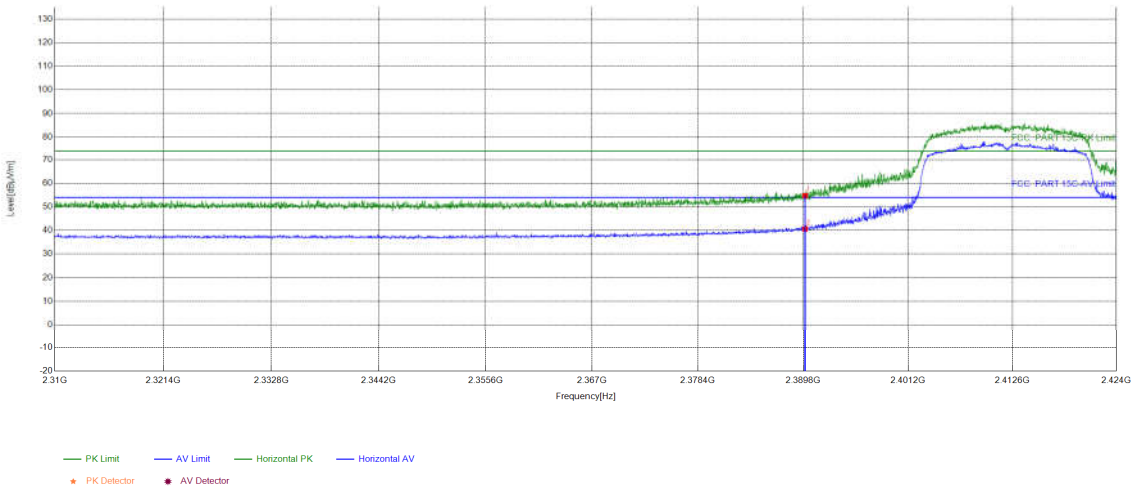

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	39.50	54.81	74.00	19.19	PASS	Horizontal	PK
2	2390	15.31	25.31	40.62	54.00	13.38	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

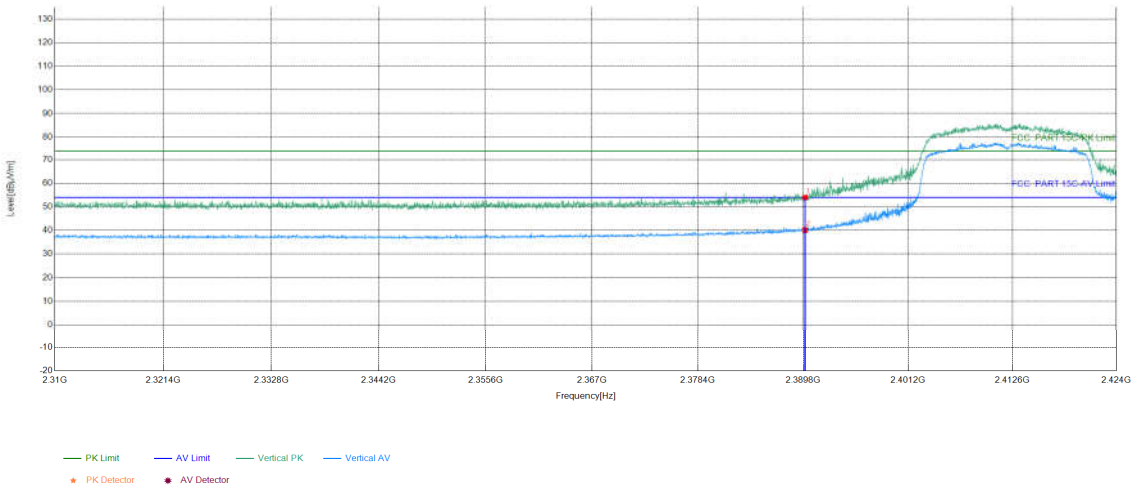

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	38.66	53.97	74.00	20.03	PASS	Vertical	PK
2	2390	15.31	24.85	40.16	54.00	13.84	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

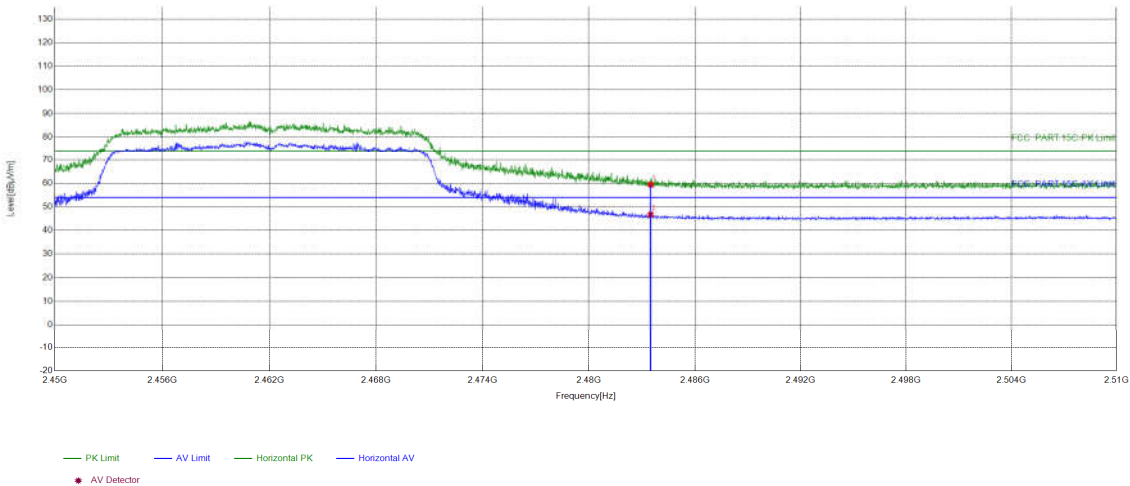

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	35.35	59.40	74.00	14.60	PASS	Horizontal	PK
2	2483.5	24.05	22.67	46.72	54.00	7.28	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

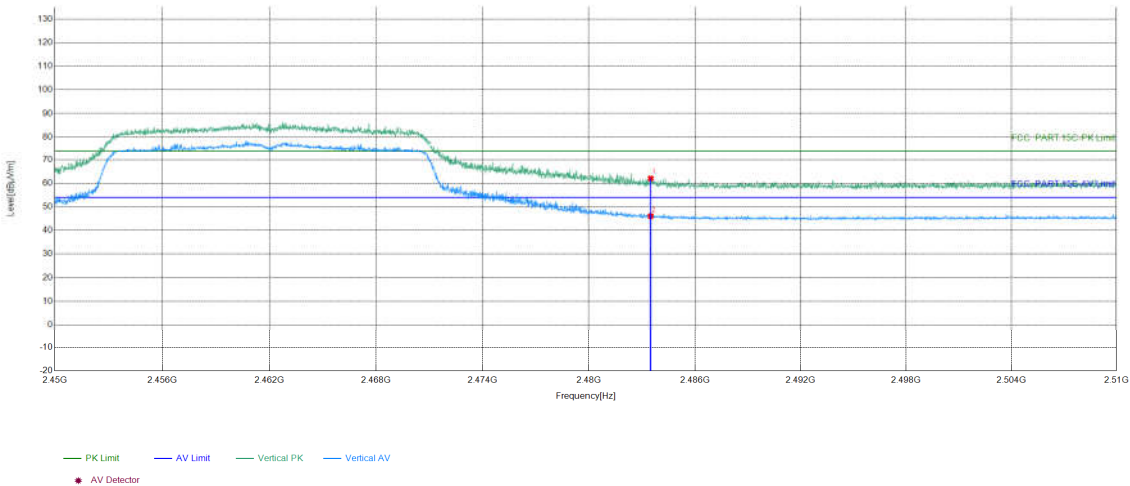

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	38.01	62.06	74.00	11.94	PASS	Vertical	PK
2	2483.5	24.05	22.01	46.06	54.00	7.94	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

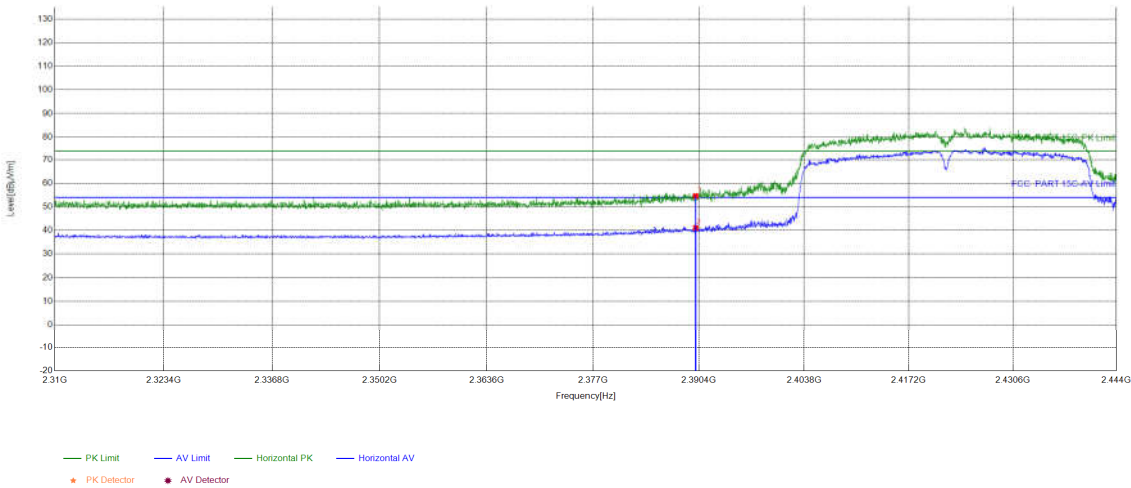

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	39.32	54.63	74.00	19.37	PASS	Horizontal	PK
2	2390	15.31	25.76	41.07	54.00	12.93	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

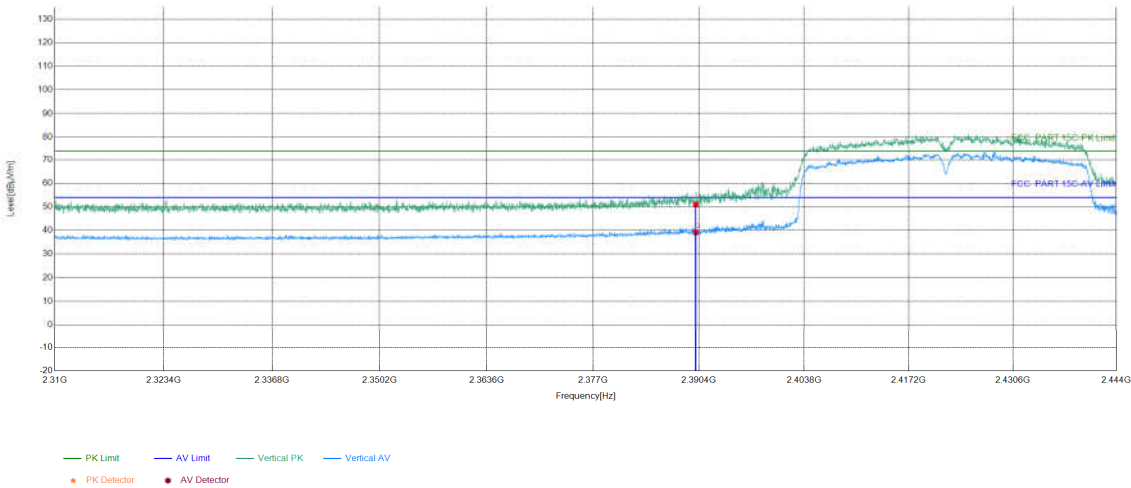

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	35.66	50.97	74.00	23.03	PASS	Vertical	PK
2	2390	15.31	23.86	39.17	54.00	14.83	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

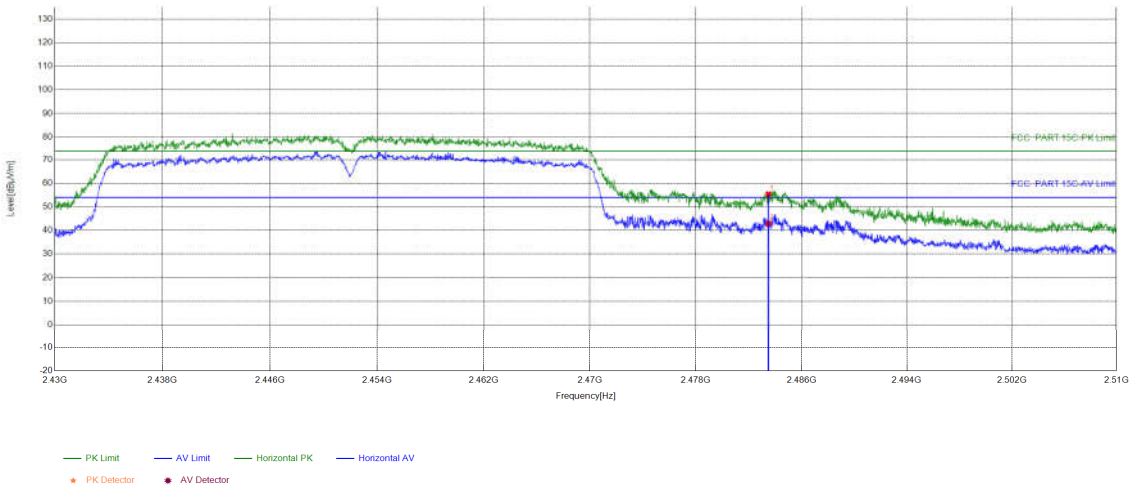

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	-17.27	72.62	55.35	74.00	18.65	PASS	Horizontal	PK
2	2483.5	-17.27	60.17	42.90	54.00	11.10	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

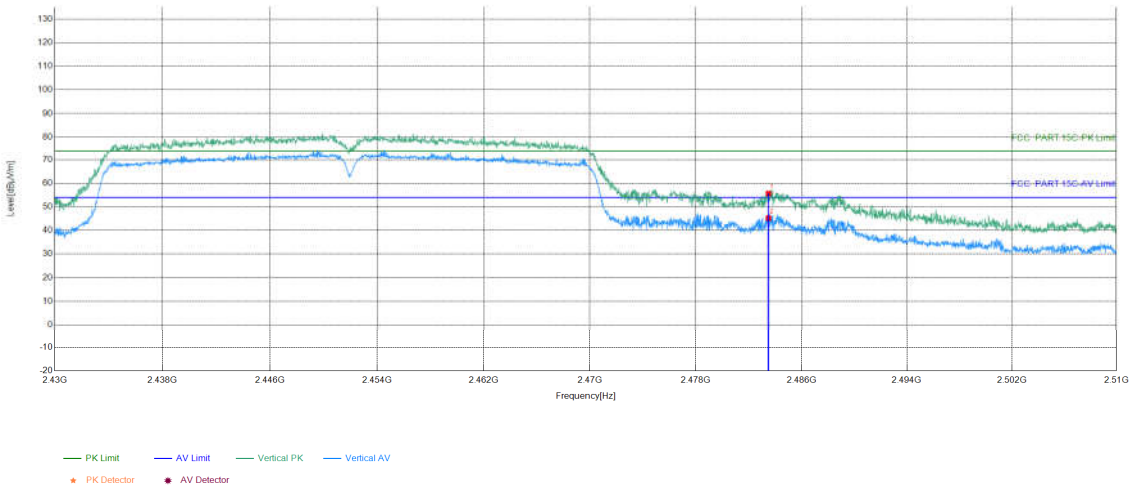

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	-17.27	72.92	55.65	74.00	18.35	PASS	Vertical	PK
2	2483.5	-17.27	62.49	45.22	54.00	8.78	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

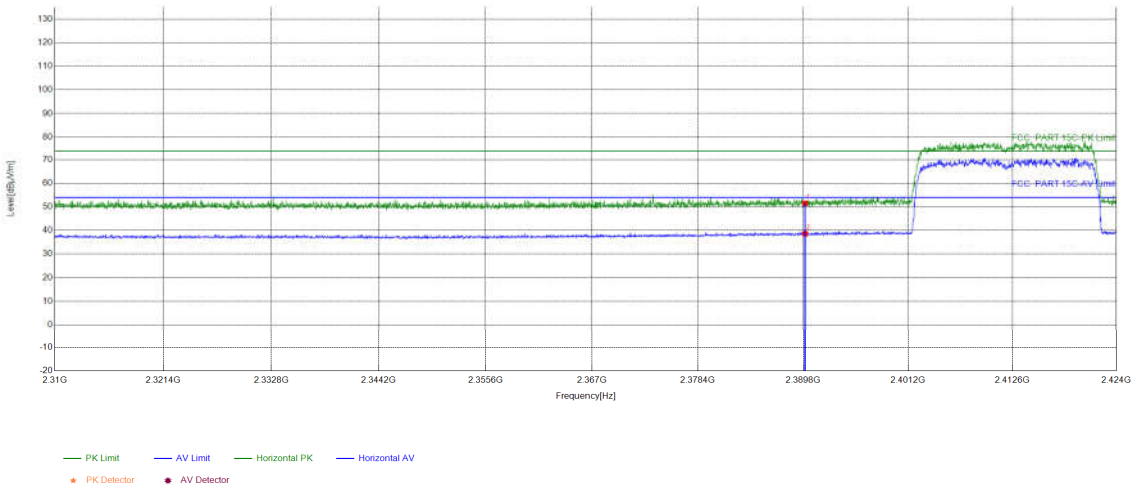

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.18	51.49	74.00	22.51	PASS	Horizontal	PK
2	2390	15.31	23.29	38.60	54.00	15.40	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

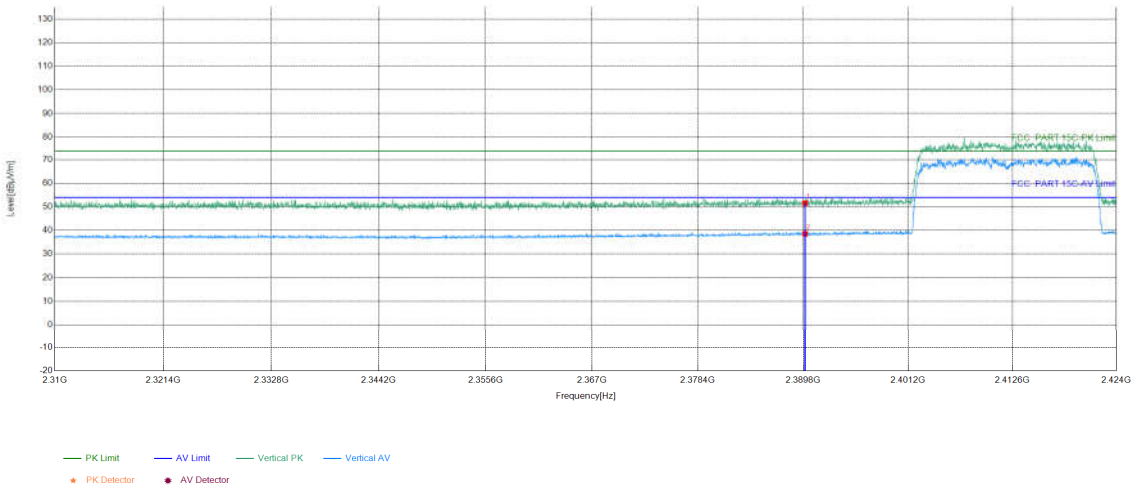

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.25	51.56	74.00	22.44	PASS	Vertical	PK
2	2390	15.31	23.26	38.57	54.00	15.43	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

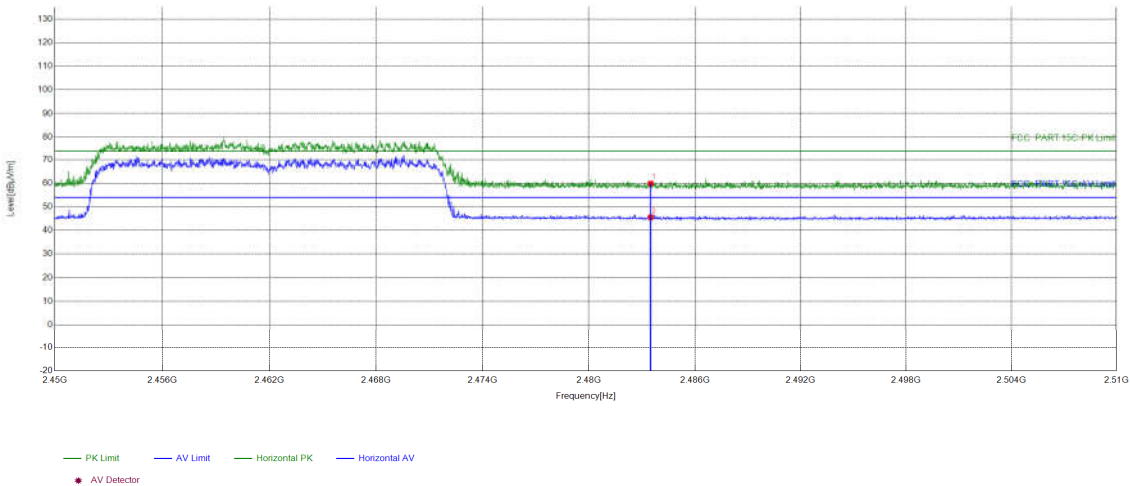

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	35.86	59.91	74.00	14.09	PASS	Horizontal	PK
2	2483.5	24.05	21.53	45.58	54.00	8.42	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		

Test Graph

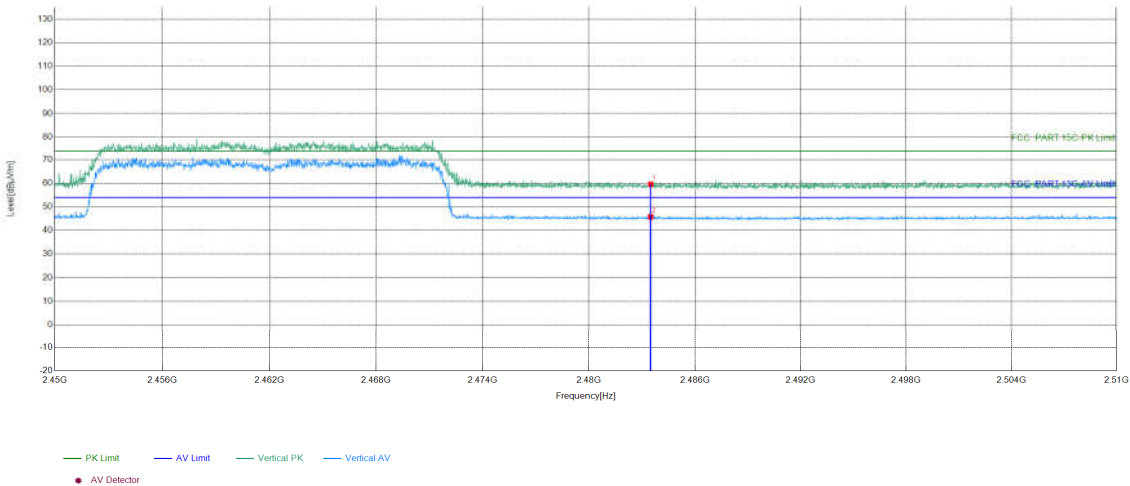


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	24.05	35.50	59.55	74.00	14.45	PASS	Vertical	PK
2	2483.5	24.05	21.70	45.75	54.00	8.25	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

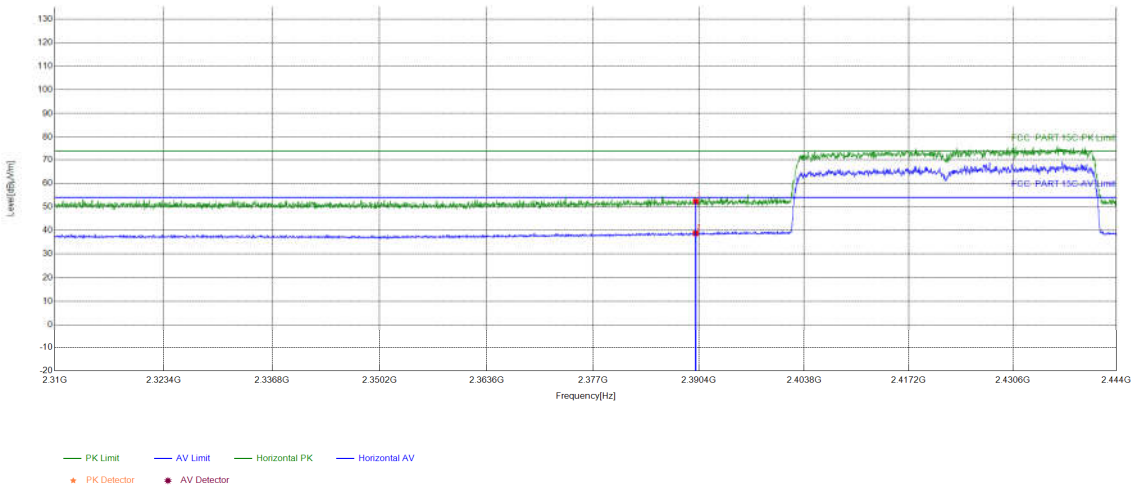

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.98	52.29	74.00	21.71	PASS	Horizontal	PK
2	2390	15.31	23.49	38.80	54.00	15.20	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		

Test Graph

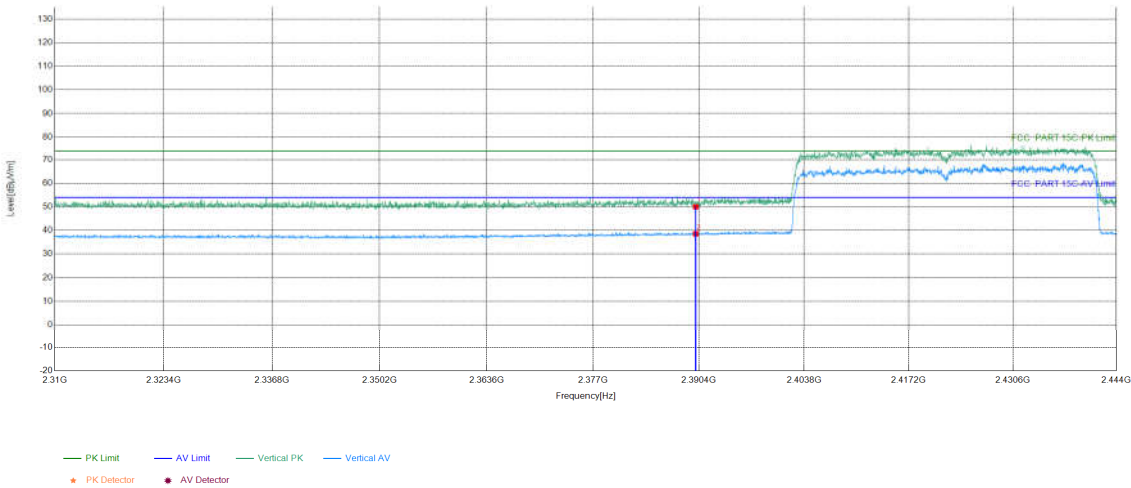


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	34.68	49.99	74.00	24.01	PASS	Vertical	PK
2	2390	15.31	23.25	38.56	54.00	15.44	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		


Test Graph

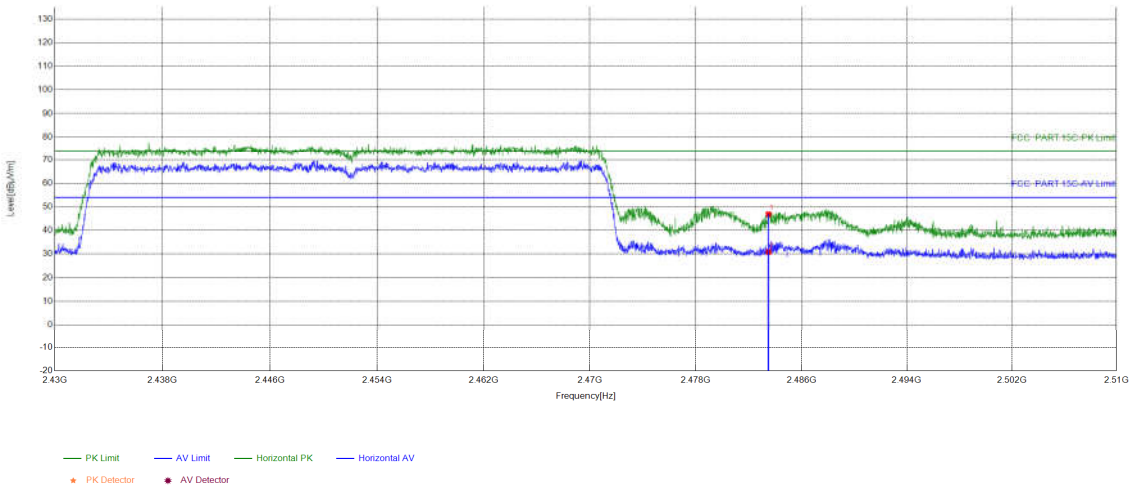

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	-17.27	64.15	46.88	74.00	27.12	PASS	Horizontal	PK
2	2483.5	-17.27	48.15	30.88	54.00	23.12	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2024/11/15
Remark	21.8°C59.9%\		

Test Graph

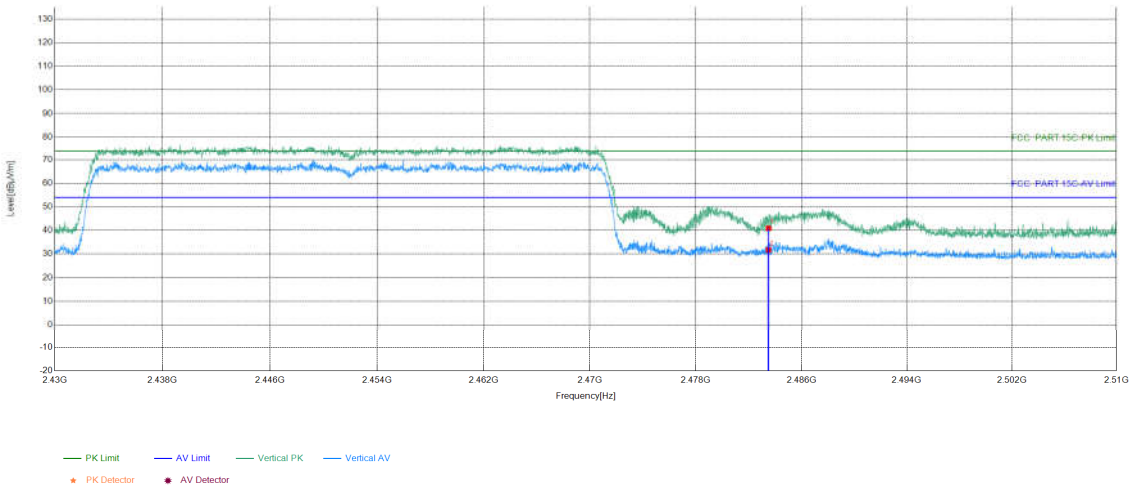

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	-17.27	58.17	40.90	74.00	33.10	PASS	Vertical	PK
2	2483.5	-17.27	49.01	31.74	54.00	22.26	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

7 Appendix 2.4G Wi-Fi

Refer to Appendix: 2.4G Wi-Fi of EED32Q81354203

9 PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32Q81354201 for EUT external and internal photos.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

*** End of Report ***