


USER MANUAL

DIGITAL WIRELESS SYSTEM WITH DVR



- | | | |
|--------------------|--------------------|--------------------|
| 1. Monitor antenna | 6. Power | 11. Mode (OK) |
| 2. Sun shade | 7. Left | 12. Camera bracket |
| 3. IPS | 8. Menu (Return) | 13. IR lights |
| 4. Bracket screws | 9. Right | 14. Lens |
| 5. U-Bracket | 10. Channel switch | 15. Camera antenna |

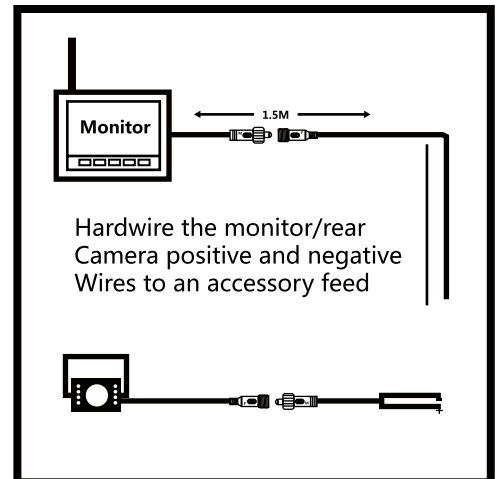

		MENU		AV	MODE
Short press to turn ON/OFF monitor	In menu mode, short press to left option In video mode: 1. Long press (3 sec) to rotate video 2. Short press to change brightness	In video mode, press for main menu In all menus, short press to return	In menu mode, short press for right option In video mode, short press to change brightness	In video mode, press to change channels	In menu mode, press to enter

How to Pair Additional Cameras

Important: Make sure to power on the camera right after choosing "Pair" on the monitor. If the camera is already powered on before pairing, it won't pair correctly.

You can install the camera and connect it to power, but when trying to pair, unplug the camera and plug it back in while it's in pairing mode. It might be helpful to have two people - one for pairing on the monitor and another to unplug and plug the camera in while it pairs.

Pairing Mode:

- Press the **AV** button to choose the camera channel where you want the extra camera to show up.
- Press the **MENU** button and select **MODE** to enter pairing mode.
- Power up the camera right after entering pairing mode (or unplug and plug it in while the monitor is in pairing mode).
- The camera should pair.
- If it doesn't pair, repeat the steps and make sure you power up the camera after entering pairing mode.

MONITOR SPECS

- 7" digital colour TFT LCD monitor with removeable sun visor
- Built in 2.4G digital wireless receiver module
- Operation freq: 2400-2483.5 MHz
- Format: NTSC
- Resolution: 1024 x 600 IPS
- Max SD storage: 128GB
- Operating temp: -20° to +70°
- Voltage: 9-36V

CAMERA SPECS

- Sensor: CCD
- Built in 24G digital wireless transmitter module
- Resolution: 720P
- Angle: 120°
- Illumination: 0Lux (Built in IR)
- Waterproof: IP68
- Shock proof: 10G
- Voltage: 9-36V

Warning Safety Driving:

This product is intended to assist in safe driving habits allowing the driver to view a broader area behind the vehicle while in reverse. It is the driver's sole responsibility for the safe operation of the vehicle when in reverse and to always look in the direction the vehicle is traveling. This Product is not intended as a replacement for using the rear-view mirror and looking behind while backing the vehicle. The monitor is only an aid and not designed to show the actual distance to an object. Be aware of blind spots and that the image on the monitor may be misleading.

VEHICLE LAWS & REGULATIONS: Many States and jurisdictions have laws & regulations that govern: TV screens/monitors in view of the driver, mounting cameras on vehicles as well as mounting objects on or near license plate. Before using this product, it is the owner's sole responsibility to be aware of any and all laws that apply to his/ her specific installation when using this product.

INSTALLATION PRECAUTIONS: These instructions are provided as a general guide and do not apply to all vehicles.

For information on your specific vehicle, questions regarding the installation or operation, call +86 158 1406 4613

You may also visit our website at www.enruige.cn or email us at: info@enruige.cn

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note 2: RF Exposure Statement To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

IC warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

This radio transmitter (identify the device by certification number, or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (identifier le dispositif par son numéro de certification ou son numéro de modèle s'il fait partie du matériel de catégorie I) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

The minimum separation generally be used is at least 20 cm.
La séparation minimale généralement utilisée est d'au moins 20 cm.