

SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
LTE Smart Phone

**FCC ID: 2BLEFS5506L
Model Name: S5506L, GoMo N11, N11**

**Report Number: 4791394016-1-SAR-1
Issue Date: September 5, 2024**

Prepared for
**Maverick Mobile LLC
8101 Ridgepoint Drive, Ste 107, Irving TX USA**

Prepared by
**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech
Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

Revision History

Rev.	Date	Revisions	Revised By
V1.0	September 5, 2024	Initial Issue	\

Note:

1. The Measurement result for the sample received is<Pass> according to < IEEE Std. 1528-2013> when <Simple Acceptance> decision rule is applied.
2. This report is only published to and used by the applicant, and it is not for evidence purpose in China.

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	7
3.	Facilities and Accreditation	8
4.	SAR Measurement System & Test Equipment	9
4.1.	SAR Measurement System	9
4.2.	SAR Scan Procedures	10
4.3.	Test Equipment.....	12
5.	Measurement Uncertainty.....	13
6.	Device Under Test (DUT) Information	14
6.1.	DUT Description	14
6.2.	Wireless Technology.....	15
7.	Test Configuration	16
7.1.	3G SAR Test Reduction Procedure	16
7.1.1.	GSM Test Configuration	16
7.1.2.	UMTS Test Configuration	17
7.2.	LTE Test Configuration	20
	Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)	22
	Table 4.2-2: Uplink-downlink configurations	22
7.3.	Wi-Fi Test Configuration	24
7.3.1.	Initial Test Position Procedure	24
7.3.2.	Initial Test Configuration Procedure	24
7.3.3.	Sub Test Configuration Procedure	24
7.3.4.	2.4GHz Wi-Fi SAR Test Procedures	24
7.3.5.	OFDM Transmission Mode and SAR Test Channel Selection.....	25
7.3.6.	2.4GHz BT/BLE SAR Test Requirements	25
7.4.	Repeated measurements.....	26
8.	Conducted Output Power Measurement and tune-up tolerance.....	27
8.1.	GSM850	27
8.2.	GSM1900	28
8.3.	WCDMA Band 2	29
8.4.	WCDMA Band 4	30
8.5.	WCDMA Band 5	31
8.6.	LTE Band 2.....	32
8.7.	LTE Band 4.....	33
8.8.	LTE Band 5.....	35
8.9.	LTE Band 12.....	38
8.10.	LTE Band 25.....	40
8.11.	LTE Band 26.....	42
8.12.	LTE Band 41	44

8.13.	LTE Band 66.....	46
8.14.	LTE Band 71.....	48
8.15.	2.4GHz Wi-Fi.....	50
8.16.	5GHz Wi-Fi.....	51
8.17.	BT.....	52
8.18.	Duty Cycle.....	53
9.	RF Exposure Conditions.....	54
10.	Dielectric Property Measurements & System Check.....	55
10.1.	Dielectric Property Measurements.....	55
10.2.	System Check.....	57
11.	Measured and Reported (Scaled) SAR Results.....	59
11.1.	SAR Test Results of GSM850.....	60
11.2.	SAR Test Results of GSM1900.....	61
11.3.	SAR Test Results of WCDMA Band II.....	62
11.4.	SAR Test Results of WCDMA Band IV.....	63
11.5.	SAR Test Results of WCDMA Band V.....	64
11.6.	SAR Test Results of LTE B5.....	65
11.7.	SAR Test Results of LTE B12.....	66
11.8.	SAR Test Results of LTE B25.....	67
11.9.	SAR Test Results of LTE B26.....	68
11.10.	SAR Test Results of LTE B41.....	69
11.11.	SAR Test Results of LTE B66.....	70
11.12.	SAR Test Results of LTE B71.....	71
11.13.	SAR Test Results of 2.4GHz Wi-Fi.....	72
11.14.	SAR Test Results of U-NII-1.....	73
11.15.	SAR Test Results of Bluetooth.....	74
12.	Simultaneous Transmission SAR Analysis.....	75
12.1.	Analysis for WWAN & Wi-Fi & U-NII-1 & BT.....	75
Appendixes		76
	4791394016-1-SAR-1_App A Photo.....	76
	4791394016-1-SAR-1_App B System Check Plots.....	76
	4791394016-1-SAR-1_App C Highest Test Plots.....	76
	4791394016-1-SAR-1_App D Cal. Certificates.....	76

1. Attestation of Test Results

Applicant Name	Maverick Mobile LLC				
Address	8101 Ridgepoint Drive, Ste 107, Irving TX USA				
Manufacturer	Maverick Mobile LLC				
Address	8101 Ridgepoint Drive, Ste 107, Irving TX USA				
EUT Name	LTE Smart Phone				
Model	S5506L				
Series Model	GoMo N11, N11				
Model Difference:	GoMo N11, N11 have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with S5506L. The difference lies only the model number. all these changes do not degrade the unwanted emissions of the certified product.				
Brand	GoMo				
Sample ID	7398632				
Sample Status	Normal				
Sample Received Date	July 4, 2024				
Date of Tested	August 2, 2024 ~ August 13, 2024				
Applicable Standards	FCC 47 CFR § 2.1093 IEEE Std. 1528-2013 KDB publication				
SAR Limits (W/Kg)					
Exposure Category	Peak spatial-average (1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)		
General population / Uncontrolled exposure	1.6		4		
Occupational / Controlled exposure	8		20		
The Highest Reported SAR (W/kg)					
RF Exposure Conditions		Equipment Class			
		PCE	DTS	U-NII-1	DSS
Head (0mm)		0.603	0.986	0.993	0.071
Body-worn (10mm)		0.778	0.242	0.221	0.016
Hotspot (10mm)		1.187	0.242	0.221	0.017
Simultaneous Transmission (1-g)	Head	1.596			
	Body-worn	1.020			
	Hotspot	1.187			
Test Results		Pass			

Prepared By: <i>Burt Hu</i> Burt Hu Laboratory Engineer	Reviewed By: <i>kebo.zhang.</i> Kebo Zhang Senior Project Engineer	Approved By: <i>Stephen Guo</i> Stephen Guo Laboratory Manager
--	---	---

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with IEEE Std.1528-2013 the following FCC Published RF exposure KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR v02
- 447498 D01 General RF Exposure Guidance v06
- 690783 D01 SAR Listings on Grants v01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01
- 865664 D02 RF Exposure Reporting v01
- 941225 D01 3G SAR Procedures v03
- 941225 D05 SAR for LTE Devices v02
- 648474 D04 Handset SAR v01r03

3. Facilities and Accreditation

Test Location	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Address	Building 10, Innovation Technology Park, Song Shan Lake Hi-tech Development Zone, Dongguan, 523808, China
Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202. Shielding Room B, the VCCI registration No. is C-20153 and T-20155.
Description	All measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi-tech Development Zone, Dongguan, 523808, China.

4.1. SAR Measurement System

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

	$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be greater than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Name of equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ENA Network Analyzer	Keysight	E5080A	MY55100583	2024.10.11
Dielectric Probe kit	SPEAG	SM DAK 040 SA	1155	2025.02.27
DC power supply	Keysight	E36103A	MY55350020	2024.10.11
Signal Generator	Rohde & Schwarz	SMB100A	178553	2024.10.11
BI-Directional Coupler	KRYTAR	1850	54733	2024.10.11
Peak and Average Power Sensor	Keysight	E9325A	MY62220002	2024.10.11
Peak and Average Power Sensor	Keysight	E9325A	MY62220003	2024.10.11
Dual Channel PK Power Meter	Keysight	N1912A	MY55416024	2024.10.11
Amplifier	CORAD TECHNOLOGY LTD	AMF-4D-00400600-50-30P	1983561	NCR
Dosimetric E-Field Probe	SPEAG	EX3DV4	7733	2025.02.20
Data Acquisition Electronic	SPEAG	DAE4	1739	2025.01.22
Dipole Kit 750 MHz	SPEAG	D750V3	1153	2024.12.14
Dipole Kit 835 MHz	SPEAG	D835V2	4d206	2024.12.16
Dipole Kit 1800 MHz	SPEAG	D1800V2	2d212	2024.12.20
Dipole Kit 1900 MHz	SPEAG	D1900V2	5d212	2024.12.19
Dipole Kit 2450 MHz	SPEAG	D2450V2	977	2024.12.16
Dipole Kit 2600 MHz	SPEAG	D2600V2	1117	2024.12.19
Dipole Kit 5 GHz	SPEAG	D5GHzV2	1231	2024.12.15
Software	SPEAG	DASY52	N/A	NCR
Twin Phantom	SPEAG	SAM 5.0	1805	NCR
Thermometer	/	GX-138	150709653	2024.10.18
Thermometer	VICTOR	ITHX-SD-5	18470005	2024.10.18

Note:

- 1) As per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated value;
 - c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.
- 2) Dielectric assessment kit is calibrated against air, distilled water and a shorting block performed before measuring liquid parameters.
- 3) NCR is short for "No Calibration Requirement".

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k=2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std. 1528-2013 is not required in SAR reports submitted for equipment approval. Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

EUT is a LTE smart phone with GSM/WCDMA/LTE/IEEE 802.11a/b/g/n, Bluetooth radio	
Dimension	Overall (Length x Width x Height): 151 mm x 71 mm x 10 mm
Accessory	Rated Voltage: 3.8V

6.2. Wireless Technology

Wireless technologies	Frequency bands	Operating mode	
GSM	850 1900	☒ Voice (GMSK) ☒ GPRS (GMSK) ☐ EGPRS (8PSK)	GSM Class: B GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☒ Class 12 - 4 Up, 4 Down ☐ Class 33 - 4 Up, 5 Down
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No		
WCDMA (UMTS)	Band II Band IV Band V	☒ UMTS Rel. 99 (Voice & Data) ☒ HSDPA (Rel. 5) ☒ HSUPA (Rel. 6) ☐ DC-HSDPA (Rel. 8) ☐ HSPA+ (Rel. 7)	
LTE	FDD Band2 FDD Band4 FDD Band5 FDD Band12 FDD Band25 FDD Band26 FDD Band66 FDD Band71 TDD Band41	QPSK 16QAM ☒ Rel. 9 ☐ Rel. 10 Does not support Carrier Aggregation (CA) ☐ Rel. 10 Carrier Aggregation (Downlink only) ☐ Rel. 11 Carrier Aggregation (2 Uplink and 2 Downlinks)	
Wi-Fi	2.4GHz	☒ 802.11b ☒ 802.11g ☒ 802.11n (HT20) ☒ 802.11n (HT40)	
Wi-Fi	5GHz	☒ 802.11a ☒ 802.11n (HT20) ☒ 802.11n (HT40) ☐ 802.11ac (VHT20) ☐ 802.11ac (VHT40)	
BT/BLE	2.4GHz	V4.0	

7. Test Configuration

7.1. 3G SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

7.1.1. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to “5” and “0” in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

7.1.2. UMTS Test Configuration

1. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures description in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s" for WCDMA/HSDPA or applying the required inner loop power control procedure to maintain maximum output power while HSUPA is active. Result for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) Should be tabulated in the SAR report. All configuration that are not supported by the DUT or cannot be measured due to technical or equipment limitation should be clearly identified.

2. WCDMA

Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1"s". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode.

3. HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

As per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c / β_d ^o	β_{hs} (1) ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Settings of required H-Set 1 QPSK acc. to 3GPP 34.121

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

4. HSUPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

As per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset" and „Release 5 HSDPA Data Device" sections of 3G device.

Subtests for WCDMA Release 6 HSUPA

Sub-test [Ⓢ]	β_c [Ⓢ]	β_d [Ⓢ]	β_d (SF) [Ⓢ]	β_c/β_d [Ⓢ]	β_{hs} ⁽¹⁾ [Ⓢ]	β_{ec} [Ⓢ]	β_{ed} [Ⓢ]	β_c [Ⓢ] (SF) [Ⓢ]	β_{ed} [Ⓢ] (code) [Ⓢ]	CM ⁽²⁾ [Ⓢ] (dB) [Ⓢ]	MP R [Ⓢ] (dB) [Ⓢ]	AG ⁽⁴⁾ [Ⓢ] Inde [Ⓢ] x [Ⓢ]	E-TFC I [Ⓢ]
1 [Ⓢ]	11/15 ⁽³⁾ [Ⓢ]	15/15 ⁽³⁾ [Ⓢ]	64 [Ⓢ]	11/15 ⁽³⁾ [Ⓢ]	22/15 [Ⓢ]	209/225 [Ⓢ]	1039/225 [Ⓢ]	4 [Ⓢ]	1 [Ⓢ]	1.0 [Ⓢ]	0.0 [Ⓢ]	20 [Ⓢ]	75 [Ⓢ]
2 [Ⓢ]	6/15 [Ⓢ]	15/15 [Ⓢ]	64 [Ⓢ]	6/15 [Ⓢ]	12/15 [Ⓢ]	12/15 [Ⓢ]	94/75 [Ⓢ]	4 [Ⓢ]	1 [Ⓢ]	3.0 [Ⓢ]	2.0 [Ⓢ]	12 [Ⓢ]	67 [Ⓢ]
3 [Ⓢ]	15/15 [Ⓢ]	9/15 [Ⓢ]	64 [Ⓢ]	15/9 [Ⓢ]	30/15 [Ⓢ]	30/15 [Ⓢ]	$\beta_{ed1}:47/15$ [Ⓢ] $\beta_{ed2}:47/15$ [Ⓢ]	4 [Ⓢ]	2 [Ⓢ]	2.0 [Ⓢ]	1.0 [Ⓢ]	15 [Ⓢ]	92 [Ⓢ]
4 [Ⓢ]	2/15 [Ⓢ]	15/15 [Ⓢ]	64 [Ⓢ]	2/15 [Ⓢ]	4/15 [Ⓢ]	2/15 [Ⓢ]	56/75 [Ⓢ]	4 [Ⓢ]	1 [Ⓢ]	3.0 [Ⓢ]	2.0 [Ⓢ]	17 [Ⓢ]	71 [Ⓢ]
5 [Ⓢ]	15/15 ⁽⁴⁾ [Ⓢ]	15/15 ⁽⁴⁾ [Ⓢ]	64 [Ⓢ]	15/15 ⁽⁴⁾ [Ⓢ]	30/15 [Ⓢ]	24/15 [Ⓢ]	134/15 [Ⓢ]	4 [Ⓢ]	1 [Ⓢ]	1.0 [Ⓢ]	0.0 [Ⓢ]	21 [Ⓢ]	81 [Ⓢ]
Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference[Ⓢ] Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$[Ⓢ] Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$[Ⓢ] Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g[Ⓢ] Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.[Ⓢ]													

HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?

Note:

- When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

7.2. LTE Test Configuration

Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3-6.2.5 under Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of "NS=01" on the base station simulator.

4) SAR test requirements

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to Figure 4.2-1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below. The count of Uplink subframes are according to Table 4.2-2:

$$\text{Duty cycle} = (30720T_s \cdot \text{Ups} + \text{Uplink Component} \cdot \text{Specials}) / (307200T_s)$$

About the uplink component of Special subframes, we can figure out by Table 4.2-1:

$$\text{Uplink Component} = \text{UpPTS}$$

In conclusion, for the TDD LTE Band, Duty Cycle can be calculated with formula as below. all these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720T_s \cdot \text{Ups}) + \text{UpPTS} \cdot \text{Specials}] / (307200T_s)$$

And we can get different Duty cycles under different configurations:

Uplink-downlink configuration	Subframe number			Configuration of special subframe							
				Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
				Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		Normal cyclic prefix in uplink		Extended cyclic prefix in uplink	
	D	S	U	configuration 0-4	configuration 5-9	configuration 0-4	configuration 5-9	configuration 0-3	configuration 4-7	configuration 0-3	configuration 4-7
0	2	2	6	61.43%	62.85%	61.67%	63.33%	61.43%	62.85%	61.67%	63.33%
1	4	2	4	41.43%	42.85%	41.67%	43.33%	41.43%	42.85%	41.67%	43.33%
2	6	2	2	21.43%	22.85%	21.67%	23.33%	21.43%	22.85%	21.67%	23.33%
3	6	1	3	30.71%	31.43%	30.83%	31.67%	30.71%	31.43%	30.83%	31.67%
4	7	1	2	20.71%	21.43%	20.83%	21.67%	20.71%	21.43%	20.83%	21.67%
5	8	1	1	10.71%	11.43%	10.83%	11.67%	10.71%	11.43%	10.83%	11.67%
6	3	2	5	51.43%	52.85%	51.67%	53.33%	51.43%	52.85%	51.67%	53.33%

For TDD LTE, SAR should be tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type 2.

Maximum Output Power for LTE

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power for the smaller band must be less than or equal to the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

LTE Band 2 (1850-1910 MHz) is covered by LTE Band 25 (1850-1915 MHz)

LTE Band 4 (1710-1755 MHz) is covered by LTE Band 66 (1710-1780 MHz)

7.3. Wi-Fi Test Configuration

For Wi-Fi SAR testing, a communication link is set up with the testing software for Wi-Fi mode test. During the test, at each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227D01 are applied.

7.3.1. Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

7.3.2. Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is $> 0.8\text{ W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

7.3.3. Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$, SAR is not required for that subsequent test configuration.

7.3.4. 2.4GHz Wi-Fi SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1 of KDB 248227D01) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of KDB 248227D01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.3.5. OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.3.6. 2.4GHz BT/BLE SAR Test Requirements

2.4GHz BT operating modes are tested independently according to the service requirements in each frequency band for each antenna. DH5 / 3DH5 / 1M SISO modes are tested on the maximum average output power mode.

7.4. Repeated measurements

Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg.¹⁸ If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties. The following procedures are applied to determine if repeated measurements are required. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.¹⁹ The repeated measurement results must be clearly identified in the SAR report. All measured SAR, including the repeated results, must be considered to determine compliance and for reporting according to KDB Publication 690783.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

8. Conducted Output Power Measurement and tune-up tolerance

8.1. GSM850

GSM850		Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)	Division Factor	Channel	Channel	Channel	Tune-up Limit (dBm)
		128	190	251			128	190	251	
		Fre. (MHz)	Fre. (MHz)	Fre. (MHz)			Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
		824.2	836.6	848.8			824.2	836.6	848.8	
CS		31.95	31.99	31.96	32.0	\	\	\	\	32.0
GPRS	1 TimeSlot	31.92	31.98	31.97	32.0	-9.03	22.89	22.95	22.94	23.0
	2 TimeSlots	31.22	31.29	31.29	31.5	-6.02	25.20	25.27	25.27	25.5
	3 TimeSlots	29.44	29.57	29.58	30.0	-4.26	25.18	25.31	25.32	25.7
	4 TimeSlots	28.09	28.22	28.23	28.5	-3.01	25.08	25.21	25.22	25.5

8.2. GSM1900

GSM1900		Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)	Division Factor	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
		512	661	810			512	661	810	
		Fre. (MHz)	Fre. (MHz)	Fre. (MHz)			Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
		1850.2	1880	1909.8			1850.2	1880	1909.8	
CS		25.09	24.75	25.10	25.5	\	\	\	\	25.5
GPRS	1 TimeSlot	25.12	24.78	25.15	25.5	-9.03	16.09	15.75	16.12	16.5
	2 TimeSlots	24.94	24.61	24.95	25.0	-6.02	18.92	18.59	18.93	19.0
	3 TimeSlots	24.69	24.35	24.70	25.0	-4.26	20.43	20.09	20.44	20.7
	4 TimeSlots	23.75	23.59	23.58	24.0	-3.01	20.74	20.58	20.57	21.0

8.3. WCDMA Band 2

Band II		Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
		9262	9400	9538	
		Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
		1852.4	1880	1907.6	
WCDMA	12.2kbps RMC	19.26	19.32	19.31	19.5
HSDPA	Subtest 1	18.40	18.46	18.50	19.0
	Subtest 2	18.15	18.23	18.32	18.5
	Subtest 3	17.73	17.85	17.90	18.0
	Subtest 4	17.73	17.85	17.91	18.0
HSUPA	Subtest 1	17.60	17.75	17.83	18.0
	Subtest 2	18.32	18.42	18.51	19.0
	Subtest 3	17.27	17.38	17.53	18.0
	Subtest 4	18.38	18.47	18.53	19.0
	Subtest 5	17.24	17.37	17.51	18.0

8.4. WCDMA Band 4

Band IV		Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
		1312	1413	1513	
		Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
		1712.4	1732.6	1752.6	
WCDMA	12.2kbps RMC	18.43	18.46	18.38	18.5
HSDPA	Subtest 1	17.64	17.56	17.51	18.0
	Subtest 2	17.41	17.36	17.34	17.5
	Subtest 3	17.03	16.95	16.92	17.5
	Subtest 4	17.01	16.94	16.93	17.5
HSUPA	Subtest 1	16.94	16.85	16.82	17.0
	Subtest 2	17.59	17.50	17.49	18.0
	Subtest 3	16.54	16.46	16.46	17.0
	Subtest 4	17.63	17.57	17.55	18.0
	Subtest 5	16.52	16.46	16.44	17.0

8.5. WCDMA Band 5

Band V		Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
		4132	4182	4233	
		Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
		826.4	836.4	846.6	
WCDMA	12.2kbps RMC	21.92	21.84	21.97	22.0
HSDPA	Subtest 1	21.05	21.07	21.06	21.5
	Subtest 2	20.83	20.84	20.82	21.0
	Subtest 3	20.44	20.45	20.42	20.5
	Subtest 4	20.42	20.43	20.41	20.5
HSUPA	Subtest 1	20.30	20.90	20.82	21.0
	Subtest 2	21.01	21.02	21.01	21.5
	Subtest 3	20.35	20.46	20.51	21.0
	Subtest 4	21.04	21.06	21.05	21.5
	Subtest 5	20.47	20.78	20.45	21.0

8.6. LTE Band 2

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				18607	18900	19193	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1850.70	1880.00	1909.30	
1.4MHz	QPSK	1	0	19.48	19.27	19.38	20.0
		1	2	19.32	19.05	19.69	
		1	5	19.29	19.19	19.40	
		3	0	18.72	18.33	18.99	20.0
		3	1	18.71	18.41	18.56	
		3	3	18.86	18.34	18.59	
	16QAM	6	0	18.34	18.14	18.86	19.0
		1	0	18.95	18.12	18.63	19.0
		1	2	18.94	18.84	18.78	
		1	5	18.70	18.46	18.72	
		3	0	17.52	17.26	17.86	19.0
		3	1	17.12	17.20	17.70	
		3	3	17.33	17.16	17.79	
		6	0	17.38	17.07	17.85	18.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				18615	18900	19185	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1851.50	1880.00	1908.50	
3MHz	QPSK	1	0	19.43	19.12	19.32	20.0
		1	8	19.28	19.10	19.67	
		1	14	19.28	19.17	19.34	
		8	0	18.63	18.29	18.94	19.0
		8	4	18.79	18.43	18.64	
		8	7	18.83	18.23	18.50	
	16QAM	15	0	18.37	18.14	18.83	19.0
		1	0	18.80	18.09	18.56	19.0
		1	8	18.83	18.79	18.83	
		1	14	18.79	18.34	18.65	
		8	0	17.42	17.33	17.78	18.0
		8	4	17.12	17.07	17.64	
		8	7	17.37	17.03	17.83	
		15	0	17.33	17.07	17.88	18.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				18625	18900	19175	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1852.50	1880.00	1907.50	
5MHz	QPSK	1	0	19.35	18.98	19.32	20.0
		1	12	19.30	19.16	19.69	
		1	24	19.28	19.07	19.30	
		12	0	18.66	18.15	18.85	19.0
		12	6	18.76	18.36	18.49	
		12	13	18.71	18.28	18.55	
	16QAM	25	0	18.44	18.09	18.71	19.0
		1	0	18.83	18.04	18.54	19.0
		1	12	18.94	18.88	18.92	
		1	24	18.78	18.23	18.55	
		12	0	17.46	17.28	17.71	18.0
		12	6	17.13	17.07	17.67	
		12	13	17.45	17.10	17.72	
		25	0	17.38	17.11	17.82	18.0
Bandwidth	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit

(MHz)				18650	18900	19150	(dBm)
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1855.00	1880.00	1905.00	
10MHz	QPSK	1	0	19.22	18.99	19.23	20.0
		1	24	19.39	19.23	19.56	
		1	49	19.24	19.00	19.16	
		25	0	18.56	18.09	18.77	19.0
		25	12	18.63	18.30	18.51	
		25	25	18.64	18.17	18.46	
	16QAM	50	0	18.34	18.11	18.61	19.0
		1	0	18.70	17.98	18.53	19.0
		1	24	18.81	18.76	18.97	
		1	49	18.66	18.24	18.53	
		25	0	17.45	17.14	17.69	18.0
		25	12	17.22	17.17	17.65	
		25	25	17.54	17.17	17.64	
		50	0	17.27	17.21	17.68	18.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				18675	18900	19125	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1857.50	1880.00	1902.50	
15MHz	QPSK	1	0	19.11	18.96	19.26	20.0
		1	38	19.29	19.28	19.50	
		1	74	19.14	18.95	19.17	
		36	0	18.44	18.14	18.65	19.0
		36	18	18.50	18.19	18.46	
		36	37	18.52	18.14	18.52	
	16QAM	75	0	18.39	18.04	18.54	19.0
		1	0	18.65	18.03	18.53	19.0
		1	38	18.88	18.69	18.92	
		1	74	18.59	18.30	18.39	
		36	0	17.33	17.04	17.62	18.0
		36	18	17.31	17.14	17.66	
		36	37	17.43	17.07	17.60	
		75	0	17.36	17.11	17.69	18.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				18700	18900	19100	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1860.00	1880.00	1900.00	
20MHz	QPSK	1	0	19.15	18.99	19.27	20.0
		1	49	19.33	19.34	19.52	
		1	99	19.07	18.99	19.07	
		50	0	18.36	18.13	18.50	19.0
		50	25	18.38	18.12	18.52	
		50	50	18.37	18.11	18.51	
	16QAM	100	0	18.27	18.07	18.52	19.0
		1	0	18.71	18.13	18.52	19.0
		1	49	18.95	18.55	18.88	
		1	99	18.61	18.16	18.47	
		50	0	17.38	17.13	17.58	18.0
		50	25	17.37	17.18	17.60	
		50	50	17.38	17.13	17.57	
		100	0	17.33	17.11	17.57	18.0

8.7. LTE Band 4

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				19957	20175	20393	

				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1710.70	1732.50	1754.30	
1.4MHz	QPSK	1	0	18.35	18.33	18.62	19.0
		1	2	18.93	18.53	18.52	
		1	5	18.70	18.46	18.56	
		3	0	17.62	18.00	17.70	19.0
		3	1	17.67	18.03	17.52	
		3	3	18.06	17.62	17.97	
	16QAM	6	0	17.54	17.68	17.83	18.0
		1	0	17.52	17.24	17.25	18.0
		1	2	17.67	17.96	17.36	
		1	5	17.94	17.49	17.51	
		3	0	17.03	16.74	16.99	18.0
		3	1	17.06	16.80	17.20	
		3	3	16.69	16.86	17.27	
		6	0	16.66	17.17	17.13	17.5
Bandwidth	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				19965	20175	20385	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1711.50	1732.50	1753.50	
3MHz	QPSK	1	0	18.23	18.34	18.64	19.0
		1	8	18.88	18.57	18.60	
		1	14	18.57	18.43	18.49	
		8	0	17.49	17.90	17.78	18.0
		8	4	17.73	17.93	17.62	
		8	7	17.93	17.51	17.86	
	16QAM	15	0	17.59	17.64	17.80	18.0
		1	0	18.04	17.33	17.99	18.5
		1	8	18.22	17.92	18.31	
		1	14	18.03	17.55	17.61	
		8	0	16.94	16.66	16.87	17.5
		8	4	17.00	16.74	17.10	
		8	7	16.78	16.87	17.12	
		15	0	16.57	17.03	17.04	17.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				19975	20175	20375	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1712.50	1732.50	1752.50	
5MHz	QPSK	1	0	18.31	18.40	18.57	19.0
		1	12	18.95	18.50	18.60	
		1	24	18.43	18.50	18.56	
		12	0	17.51	17.92	17.87	18.0
		12	6	17.69	17.83	17.65	
		12	13	17.99	17.54	17.97	
	16QAM	25	0	17.62	17.63	17.69	18.0
		1	0	18.08	17.33	17.85	18.5
		1	12	18.49	17.91	18.25	
		1	24	17.91	17.54	17.70	
		12	0	16.86	16.51	16.80	17.5
		12	6	16.91	16.66	16.96	
		12	13	16.80	16.79	17.12	
		25	0	16.67	17.03	17.04	17.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				20000	20175	20350	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1715.00	1732.50	1750.00	
10MHz	QPSK	1	0	18.28	18.38	18.49	19.0

		1	24	18.88	18.49	18.60	18.0
		1	49	18.53	18.44	18.58	
		25	0	17.55	17.84	17.74	
		25	12	17.67	17.70	17.57	
		25	25	17.88	17.60	17.83	
		50	0	17.65	17.51	17.76	
	16QAM	1	0	18.00	17.43	17.87	18.5
		1	24	18.39	17.86	18.13	
		1	49	17.78	17.44	17.63	
		25	0	16.76	16.58	16.75	17.5
		25	12	16.90	16.75	16.83	
		25	25	16.67	16.86	17.14	
		50	0	16.56	16.90	17.08	17.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				20025	20175	20325	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1717.50	1732.50	1747.50	
15MHz	QPSK	1	0	18.33	18.32	18.47	19.0
		1	38	18.73	18.55	18.70	
		1	74	18.48	18.30	18.46	
		36	0	17.59	17.74	17.66	18.0
		36	18	17.76	17.75	17.61	
		36	37	17.77	17.63	17.73	
		75	0	17.69	17.46	17.67	18.0
	16QAM	1	0	17.87	17.48	17.82	18.5
		1	38	18.30	17.80	18.14	
		1	74	17.82	17.45	17.64	
		36	0	16.80	16.63	16.73	17.5
		36	18	16.79	16.83	16.75	
		36	37	16.75	16.80	17.12	
		75	0	16.62	16.93	16.95	17.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				20050	20175	20300	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1720.00	1732.50	1745.00	
20MHz	QPSK	1	0	18.34	18.24	18.40	19.0
		1	49	18.66	18.59	18.66	
		1	99	18.33	18.23	18.37	
		50	0	17.65	17.59	17.59	18.0
		50	25	17.67	17.60	17.59	
		50	50	17.66	17.59	17.62	
		100	0	17.64	17.56	17.53	18.0
	16QAM	1	0	17.93	17.48	17.72	18.5
		1	49	18.26	17.76	18.05	
		1	99	17.92	17.40	17.70	
		50	0	16.68	16.62	16.63	17.5
		50	25	16.68	16.77	16.81	
		50	50	16.67	16.74	17.02	
		100	0	16.69	16.84	16.97	17.5

8.8. LTE Band 5

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				20407	20525	20643	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				824.70	836.50	848.30	
1.4MHz	QPSK	1	0	21.38	21.46	21.21	22.0

		1	2	21.49	21.57	21.61	22.0
		1	5	21.53	21.29	21.40	
		3	0	21.21	21.38	21.22	
		3	1	21.42	21.62	21.65	
		3	3	21.43	21.24	21.31	
		6	0	20.45	20.54	20.32	
	16QAM	1	0	20.43	20.44	20.54	21.0
		1	2	20.60	20.44	20.62	
		1	5	20.33	20.33	20.49	
		3	0	20.47	20.48	20.32	21.0
		3	1	20.47	20.47	20.65	
		3	3	20.45	20.37	20.51	
		6	0	19.55	19.70	19.53	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				20415	20525	20635	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				825.50	836.50	847.50	
3MHz	QPSK	1	0	21.35	21.29	21.24	22.0
		1	8	21.30	21.58	21.43	
		1	14	21.39	21.26	21.35	
		8	0	20.40	20.38	20.51	21.0
		8	4	20.54	20.61	20.58	
		8	7	20.33	20.51	20.65	
		15	0	20.65	20.48	20.49	21.0
	16QAM	1	0	19.99	20.54	20.95	21.5
		1	8	20.50	20.73	21.12	
		1	14	20.08	20.39	20.59	
		8	0	19.62	19.68	19.55	20.0
		8	4	19.62	19.74	19.47	
		8	7	19.38	19.63	19.48	
		15	0	19.44	19.45	19.60	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				20425	20525	20625	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				826.50	836.50	846.50	
5MHz	QPSK	1	0	21.42	21.50	21.31	22.0
		1	12	21.37	21.63	21.50	
		1	24	21.41	21.17	21.41	
		12	0	20.46	20.66	20.59	21.0
		12	6	20.35	20.44	20.50	
		12	13	20.54	20.38	20.52	
		25	0	20.37	20.64	20.45	21.0
	16QAM	1	0	20.04	20.51	20.92	21.5
		1	12	20.30	20.72	21.19	
		1	24	20.08	20.54	20.58	
		12	0	19.62	19.60	19.52	20.0
		12	6	19.55	19.70	19.60	
		12	13	19.62	19.62	19.67	
		25	0	19.57	19.63	19.47	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				20450	20525	20600	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				829.00	836.50	844.00	
10MHz	QPSK	1	0	21.36	21.36	21.34	22.0
		1	24	21.41	21.52	21.54	
		1	49	21.41	21.24	21.35	
		25	0	20.48	20.53	20.47	21.0

		25	12	20.49	20.52	20.56	
		25	25	20.44	20.47	20.55	
		50	0	20.50	20.53	20.53	
	16QAM	1	0	20.09	20.58	20.87	21.0
		1	24	20.37	20.64	21.05	
		1	49	20.17	20.43	20.71	
		25	0	19.56	19.58	19.60	21.5
		25	12	19.58	19.61	19.53	
		25	25	19.50	19.60	19.63	
		50	0	19.56	19.53	19.58	20.0

8.9. LTE Band 12

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				23017	23095	23173	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				699.70	707.50	715.30	
1.4MHz	QPSK	1	0	21.56	21.47	21.52	22.0
		1	2	21.56	21.52	21.68	
		1	5	21.36	21.28	21.56	
		3	0	21.36	21.49	21.52	22.0
		3	1	21.56	21.69	21.67	
		3	3	21.34	21.46	21.32	
	16QAM	6	0	20.61	20.63	20.46	21.0
		1	0	20.54	20.67	20.73	21.0
		1	2	20.56	20.75	20.66	
		1	5	20.68	20.57	20.64	
		3	0	20.51	20.52	20.69	21.0
		3	1	20.49	20.48	20.69	
		3	3	20.53	20.60	20.48	
		6	0	19.52	19.65	19.73	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				23025	23095	23165	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				700.50	707.50	714.50	
3MHz	QPSK	1	0	21.52	21.43	21.29	22.0
		1	8	21.51	21.64	21.68	
		1	14	21.43	21.39	21.51	
		8	0	20.57	20.46	20.68	21.0
		8	4	20.46	20.47	20.60	
		8	7	20.55	20.46	20.71	
	16QAM	15	0	20.58	20.62	20.77	21.0
		1	0	20.33	20.33	20.85	21.0
		1	8	20.39	20.67	20.94	
		1	14	20.08	20.45	20.72	
		8	0	19.76	19.65	19.59	20.0
		8	4	19.72	19.58	19.74	
		8	7	19.56	19.79	19.82	
		15	0	19.62	19.65	19.72	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				23035	23095	23155	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				701.50	707.50	713.50	
5MHz	QPSK	1	0	21.35	21.46	21.28	22.0
		1	12	21.57	21.66	21.60	
		1	24	21.43	21.52	21.32	
		12	0	20.44	20.62	20.73	21.0
		12	6	20.54	20.72	20.57	
		12	13	20.56	20.35	20.54	
	16QAM	25	0	20.63	20.69	20.67	21.0
		1	0	20.10	20.40	20.75	21.0
		1	12	20.40	20.86	20.85	
		1	24	20.24	20.50	20.94	
		12	0	19.71	19.56	19.64	20.0
		12	6	19.50	19.59	19.82	
		12	13	19.60	19.72	19.72	
		25	0	19.74	19.59	19.67	20.0
Bandwidth	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit

(MHz)				23060	23095	23130	(dBm)
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				704.00	707.50	711.00	
10MHz	QPSK	1	0	21.41	21.35	21.43	22.0
		1	24	21.46	21.57	21.53	
		1	49	21.34	21.37	21.43	
		25	0	20.56	20.60	20.60	21.0
		25	12	20.54	20.62	20.64	
		25	25	20.54	20.49	20.63	
	16QAM	50	0	20.53	20.66	20.63	21.0
		1	0	20.22	20.48	20.89	21.0
		1	24	20.29	20.73	20.91	
		1	49	20.15	20.50	20.81	
		25	0	19.65	19.68	19.73	20.0
		25	12	19.64	19.67	19.72	
		25	25	19.67	19.70	19.72	
		50	0	19.62	19.52	19.68	20.0

8.10. LTE Band 25

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26047	26365	26683	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1850.70	1882.50	1914.30	
1.4MHz	QPSK	1	0	18.02	18.19	18.01	18.5
		1	2	17.47	18.46	18.50	
		1	5	18.09	17.98	18.19	
		3	0	17.20	17.44	17.59	18.5
		3	1	17.42	17.45	17.51	
		3	3	17.67	17.33	17.37	
	16QAM	6	0	17.39	16.89	17.26	17.5
		1	0	17.38	16.91	17.18	17.5
		1	2	17.26	17.12	17.45	
		1	5	17.49	16.98	17.41	
		3	0	16.57	16.11	16.26	17.5
		3	1	16.31	16.23	16.48	
		3	3	16.92	16.55	16.45	
		6	0	16.48	16.49	16.43	16.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26055	26365	26675	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1851.50	1882.50	1913.50	
3MHz	QPSK	1	0	17.91	18.13	18.09	18.5
		1	8	18.47	18.45	18.36	
		1	14	17.96	17.84	18.24	
		8	0	17.30	17.35	17.46	17.5
		8	4	17.46	17.30	17.47	
		8	7	17.41	17.35	17.29	
	16QAM	15	0	17.41	16.97	17.27	17.5
		1	0	17.74	17.21	17.54	18.5
		1	8	18.21	17.80	17.80	
		1	14	17.87	17.36	17.88	
		8	0	16.64	16.15	16.26	16.5
		8	4	16.30	16.19	16.50	
		8	7	16.79	16.52	16.38	
		15	0	16.38	16.40	16.40	16.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26065	26365	26665	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1852.50	1882.50	1912.50	
5MHz	QPSK	1	0	17.99	18.11	18.02	18.5
		1	12	18.48	18.37	18.40	
		1	24	18.04	17.89	18.31	
		12	0	17.34	17.26	17.43	17.5
		12	6	17.41	17.16	17.40	
		12	13	17.48	17.20	17.36	
	16QAM	25	0	17.31	17.03	17.31	17.5
		1	0	17.59	17.12	17.61	18.5
		1	12	18.12	17.82	17.84	
		1	24	17.74	17.21	17.81	
		12	0	16.56	16.12	16.18	16.5
		12	6	16.32	16.11	16.38	
		12	13	16.66	16.39	16.38	
		25	0	16.31	16.39	16.26	16.5
Bandwidth	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit

(MHz)				26090	26365	26640	(dBm)
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1855.00	1882.50	1910.00	
10MHz	QPSK	1	0	18.03	18.04	18.06	18.5
		1	24	18.34	18.22	18.35	
		1	49	18.13	17.95	18.26	
		25	0	17.30	17.22	17.45	17.5
		25	12	17.30	17.10	17.25	
		25	25	17.36	17.29	17.37	
		50	0	17.29	17.07	17.27	17.5
	16QAM	1	0	17.62	17.11	17.63	18.5
		1	24	18.09	17.67	17.85	
		1	49	17.70	17.19	17.66	
		25	0	16.48	16.18	16.16	16.5
		25	12	16.40	16.19	16.28	
		25	25	16.44	16.46	16.38	
		50	0	16.23	16.35	16.21	16.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26115	26365	26615	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1857.50	1882.50	1907.50	
15MHz	QPSK	1	0	18.07	17.92	18.00	18.5
		1	38	18.46	18.27	18.40	
		1	74	18.01	17.94	18.15	
		36	0	17.29	17.11	17.37	17.5
		36	18	17.29	17.02	17.27	
		36	37	17.39	17.28	17.24	
		75	0	17.37	16.98	17.28	17.5
	16QAM	1	0	17.70	17.13	17.61	18.5
		1	38	17.94	17.65	17.89	
		1	74	17.62	17.11	17.53	
		36	0	16.46	16.10	16.18	16.5
		36	18	16.29	16.15	16.33	
		36	37	16.47	16.31	16.37	
		75	0	16.15	16.35	16.21	16.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26140	26365	26590	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1860.00	1882.50	1905.00	
20MHz	QPSK	1	0	18.04	17.94	18.07	18.5
		1	49	18.43	18.36	18.45	
		1	99	18.02	17.92	18.11	
		50	0	17.33	17.14	17.22	17.5
		50	25	17.26	17.12	17.22	
		50	50	17.30	17.13	17.22	
		100	0	17.29	17.04	17.24	17.5
	16QAM	1	0	17.61	17.18	17.47	18.5
		1	49	18.02	17.52	17.85	
		1	99	17.58	17.15	17.42	
		50	0	16.31	16.15	16.26	16.5
		50	25	16.30	16.14	16.23	
		50	50	16.32	16.25	16.26	
		100	0	16.22	16.26	16.27	16.5

8.11. LTE Band 26

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26697	26865	27033	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				814.70	831.50	848.30	
1.4	QPSK	1	0	21.37	21.45	21.40	21.5
		1	2	21.35	21.38	21.44	
		1	5	21.35	21.33	21.26	
		3	0	21.42	21.49	21.30	21.5
		3	1	21.38	21.36	21.37	
		3	3	21.23	21.33	21.34	
	16QAM	6	0	20.32	20.40	20.21	21.0
		1	0	20.56	20.47	20.52	21.0
		1	2	20.43	20.28	20.41	
		1	5	20.35	20.43	20.37	
		3	0	20.82	20.73	20.89	21.0
		3	1	20.83	20.89	20.86	
		3	3	20.76	20.78	20.92	
		6	0	19.52	19.59	19.42	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26705	26865	27025	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				815.50	831.50	847.50	
3	QPSK	1	0	21.38	21.36	21.48	21.5
		1	8	21.38	21.48	21.25	
		1	14	21.23	21.33	21.26	
		8	0	20.24	20.38	20.38	21.0
		8	4	20.48	20.37	20.51	
		8	7	20.28	20.25	20.21	
	16QAM	15	0	20.59	20.56	20.35	21.0
		1	0	20.91	20.85	20.90	21.5
		1	8	20.91	21.10	21.15	
		1	14	20.66	20.74	20.80	
		8	0	19.30	19.47	19.44	20.0
		8	4	19.58	19.63	19.45	
		8	7	19.40	19.35	19.56	
		15	0	19.40	19.46	19.45	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26715	26865	27015	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				816.50	831.50	846.50	
5	QPSK	1	0	21.43	21.46	21.30	21.5
		1	12	21.44	21.34	21.42	
		1	24	21.12	21.11	21.28	
		12	0	20.28	20.22	20.32	21.0
		12	6	20.55	20.43	20.38	
		12	13	20.32	20.44	20.25	
	16QAM	25	0	20.40	20.62	20.47	21.0
		1	0	20.86	20.90	20.87	21.5
		1	12	21.09	21.04	21.13	
		1	24	20.72	20.82	20.83	
		12	0	19.48	19.46	19.40	20.0
		12	6	19.60	19.56	19.54	
		12	13	19.46	19.29	19.59	
		25	0	19.45	19.37	19.48	20.0
Bandwidth	Modulation	RB	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit

(MHz)		size		26740	26865	26990	(dBm)
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				819.00	831.50	844.00	
10	QPSK	1	0	21.31	21.37	21.42	21.5
		1	24	21.27	21.48	21.38	
		1	49	21.29	21.09	21.08	
		25	0	20.39	20.37	20.36	21.0
		25	12	20.56	20.66	20.36	
		25	25	20.29	20.43	20.23	
		50	0	20.58	20.55	20.52	21.0
	16QAM	1	0	20.94	20.87	20.78	21.5
		1	24	20.94	21.10	20.97	
		1	49	20.74	20.84	20.95	
		25	0	19.36	19.48	19.41	20.0
		25	12	19.69	19.58	19.62	
		25	25	19.48	19.52	19.41	
		50	0	19.41	19.51	19.40	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				26765	26865	26965	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
15	QPSK	1	0	21.42	21.41	21.37	21.5
		1	38	21.33	21.41	21.39	
		1	74	21.26	21.23	21.19	
		36	0	20.36	20.28	20.29	21.0
		36	18	20.42	20.52	20.42	
		36	37	20.41	20.40	20.34	
		75	0	20.47	20.54	20.38	21.0
	16QAM	1	0	20.90	20.81	20.90	21.5
		1	38	20.95	21.04	21.03	
		1	74	20.77	20.71	20.86	
		36	0	19.45	19.48	19.51	20.0
		36	18	19.59	19.68	19.52	
		36	37	19.49	19.41	19.54	
		75	0	19.49	19.44	19.55	20.0

8.12. LTE Band 41

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				39675	40620	41565	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				2498.50	2593.00	2687.50	
5MHz	QPSK	1	0	20.45	21.03	20.97	21.5
		1	12	20.93	21.35	21.43	
		1	24	20.51	20.97	21.14	
		12	0	19.83	20.21	20.20	20.5
		12	6	19.90	20.29	20.25	
		12	13	19.98	20.16	20.02	
	16QAM	25	0	19.90	20.06	20.14	20.5
		1	0	19.52	20.15	20.29	21.0
		1	12	20.08	20.82	20.73	
		1	24	19.39	20.32	20.17	
		12	0	19.00	19.18	19.10	19.5
		12	6	19.06	19.22	19.16	
		12	13	18.99	18.97	19.14	
		25	0	18.70	19.20	19.05	19.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				39700	40620	41540	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				2501.00	2593.00	2685.00	
10MHz	QPSK	1	0	20.58	21.02	21.12	21.5
		1	24	21.09	21.34	21.49	
		1	49	20.66	20.94	20.98	
		25	0	19.99	20.16	20.25	20.5
		25	12	19.84	20.12	20.23	
		25	25	19.98	20.33	20.15	
	16QAM	50	0	20.00	20.30	19.99	20.5
		1	0	19.66	20.17	20.25	21.0
		1	24	19.94	20.79	20.73	
		1	49	19.56	20.35	20.32	
		25	0	18.97	19.11	19.18	19.5
		25	12	18.79	19.16	18.99	
		25	25	18.81	19.00	18.99	
		50	0	18.91	19.10	19.18	19.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				39725	40620	41515	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				2503.50	2593.00	2682.50	
15MHz	QPSK	1	0	20.69	20.79	21.11	21.5
		1	38	21.16	21.36	21.46	
		1	74	20.49	20.85	20.99	
		36	0	19.74	20.11	19.97	20.5
		36	18	19.83	20.09	20.10	
		36	37	19.84	20.33	20.19	
	16QAM	75	0	19.90	20.15	20.20	20.5
		1	0	19.63	20.35	20.07	21.0
		1	38	19.95	20.62	20.64	
		1	74	19.52	20.24	20.15	
		36	0	18.78	19.28	19.12	19.5
		36	18	19.07	19.05	18.93	
		36	37	18.85	18.95	19.18	
		75	0	18.80	19.06	19.12	19.5
Bandwidth	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit

(MHz)				39750	40620	41490	(dBm)
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				2506.00	2593.00	2680.00	
20MHz	QPSK	1	0	20.58	20.92	21.02	21.5
		1	49	21.01	21.39	21.47	
		1	99	20.52	20.91	21.00	
		50	0	19.85	20.18	20.12	20.5
		50	25	19.86	20.15	20.12	
		50	50	19.86	20.19	20.12	
		100	0	19.87	20.19	20.12	20.5
	16QAM	1	0	19.53	20.27	20.20	21.0
		1	49	19.98	20.74	20.66	
		1	99	19.45	20.29	20.20	
		50	0	18.91	19.13	19.08	19.5
		50	25	18.93	19.11	19.03	
		50	50	18.92	19.09	19.08	
		100	0	18.81	19.14	19.05	19.5

8.13. LTE Band 66

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				131979	132322	132665	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1710.70	1745.00	1779.30	
1.4	QPSK	1	0	18.62	18.55	18.15	19.0
		1	2	18.81	18.75	18.60	
		1	5	18.35	18.46	18.01	
		3	0	17.73	17.68	17.98	19.0
		3	1	17.64	17.57	17.69	
		3	3	17.87	17.95	17.61	
	16QAM	6	0	17.95	17.72	17.39	18.0
		1	0	17.66	17.38	17.63	18.0
		1	2	17.95	17.93	17.95	
		1	5	17.58	17.58	17.84	
		3	0	17.08	17.02	16.55	18.0
		3	1	16.85	17.39	16.64	
		3	3	16.93	17.35	16.82	
		6	0	17.13	17.29	16.64	17.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				131987	132322	132657	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1711.50	1745.00	1778.50	
3	QPSK	1	0	18.58	18.43	18.25	19.0
		1	8	18.69	18.71	18.68	
		1	14	18.30	18.34	18.10	
		8	0	17.59	17.66	17.99	18.0
		8	4	17.68	17.58	17.57	
		8	7	17.86	17.82	17.70	
	16QAM	15	0	17.58	17.70	17.32	18.0
		1	0	18.01	17.44	17.51	18.5
		1	8	18.21	18.21	18.03	
		1	14	18.02	17.50	17.76	
		8	0	16.97	17.08	16.56	17.5
		8	4	16.76	17.29	16.60	
		8	7	16.78	17.30	16.68	
		15	0	17.04	17.23	16.49	17.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				131997	132322	132647	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1712.50	1745.00	1777.50	
5	QPSK	1	0	18.55	18.32	18.35	19.0
		1	12	18.77	18.61	18.62	
		1	24	18.35	18.23	18.14	
		12	0	17.52	17.68	17.89	18.0
		12	6	17.62	17.58	17.67	
		12	13	17.86	17.69	17.59	
	16QAM	25	0	17.86	17.73	17.28	18.0
		1	0	17.90	17.41	17.60	18.5
		1	12	18.24	18.23	18.10	
		1	24	17.95	17.57	17.68	
		12	0	16.91	17.10	16.45	17.5
		12	6	16.86	17.20	16.63	
		12	13	16.88	17.35	16.60	
		25	0	16.95	17.19	16.55	17.5
Bandwidth	Modulation	RB	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit

(MHz)		size		132022	132322	132622	(dBm)
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				1715.00	1745.00	1775.00	
10	QPSK	1	0	18.47	18.21	18.42	19.0
		1	24	18.74	18.65	18.61	
		1	49	18.39	18.08	18.09	
		25	0	17.62	17.66	17.92	18.0
		25	12	17.65	17.63	17.53	
		25	25	17.75	17.56	17.65	
		50	0	17.85	17.82	17.30	18.0
	16QAM	1	0	17.91	17.45	17.55	18.5
		1	24	18.29	18.17	18.10	
		1	49	17.95	17.62	17.68	
		25	0	16.81	17.20	16.49	17.5
		25	12	16.91	17.07	16.63	
		25	25	16.84	17.34	16.46	
		50	0	17.05	17.08	16.56	17.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				132047	132322	132597	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
15	QPSK	1	0	18.50	18.23	18.40	19.0
		1	38	18.83	18.54	18.71	
		1	74	18.28	18.14	18.13	
		36	0	17.66	17.75	17.83	18.0
		36	18	17.72	17.67	17.44	
		36	37	17.82	17.54	17.55	
		75	0	17.95	17.84	17.37	18.0
	16QAM	1	0	18.00	17.46	17.60	18.5
		1	38	18.37	18.12	18.04	
		1	74	18.04	17.53	17.73	
		36	0	16.88	17.09	16.43	17.5
		36	18	16.83	17.15	16.61	
		36	37	16.82	17.30	16.40	
		75	0	16.99	16.97	16.57	17.5
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				132072	132322	132572	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
20	QPSK	1	0	18.40	18.24	18.33	19.0
		1	49	18.71	18.61	18.72	
		1	99	18.33	18.18	18.23	
		50	0	17.71	17.62	17.73	18.0
		50	25	17.70	17.64	17.44	
		50	50	17.67	17.62	17.47	
		100	0	17.81	17.79	17.45	18.0
	16QAM	1	0	17.98	17.50	17.67	18.5
		1	49	18.33	18.11	17.95	
		1	99	18.02	17.44	17.60	
		50	0	16.80	17.02	16.49	17.5
		50	25	16.80	17.14	16.52	
		50	50	16.88	17.17	16.49	
		100	0	17.03	17.03	16.63	17.5

8.14. LTE Band 71

Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				133147	133297	133447	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				665.50	680.50	695.50	
5MHz	QPSK	1	0	21.16	21.34	21.31	22.0
		1	12	21.57	21.58	21.59	
		1	24	21.40	21.10	21.48	
		12	0	20.51	20.58	20.51	21.0
		12	6	20.68	20.38	20.55	
		12	13	20.57	20.34	20.61	
	16QAM	25	0	20.66	20.58	20.37	21.0
		1	0	20.51	20.26	20.47	21.0
		1	12	20.89	20.38	20.96	
		1	24	20.41	20.05	20.83	
		12	0	19.69	19.58	19.54	20.0
		12	6	19.55	19.68	19.36	
		12	13	19.59	19.70	19.35	
		25	0	19.59	19.35	19.46	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				133172	133297	133422	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				668.00	680.50	693.00	
10MHz	QPSK	1	0	21.17	21.35	21.43	22.0
		1	24	21.70	21.56	21.58	
		1	49	21.35	21.39	21.37	
		25	0	20.51	20.43	20.64	21.0
		25	12	20.70	20.57	20.58	
		25	25	20.49	20.36	20.67	
	16QAM	50	0	20.62	20.56	20.43	21.0
		1	0	20.55	20.05	20.70	21.0
		1	24	20.78	20.34	20.81	
		1	49	20.54	20.24	20.83	
		25	0	19.70	19.46	19.36	20.0
		25	12	19.58	19.57	19.49	
		25	25	19.60	19.62	19.50	
		50	0	19.43	19.58	19.59	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				133197	133297	133397	
				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				670.50	680.50	690.50	
15MHz	QPSK	1	0	21.32	21.08	21.36	22.0
		1	38	21.49	21.55	21.80	
		1	74	21.23	21.20	21.45	
		36	0	20.43	20.29	20.61	21.0
		36	18	20.51	20.55	20.61	
		36	37	20.57	20.60	20.59	
	16QAM	75	0	20.64	20.42	20.61	21.0
		1	0	20.43	20.01	20.73	21.0
		1	38	20.75	20.47	20.99	
		1	74	20.44	20.08	20.76	
		36	0	19.74	19.55	19.47	20.0
		36	18	19.49	19.54	19.42	
		36	37	19.45	19.55	19.51	
		75	0	19.49	19.61	19.56	20.0
Bandwidth (MHz)	Modulation	RB size	RB offset	Channel No.	Channel No.	Channel No.	Tune-up Limit (dBm)
				133222	133322	133372	

				Fre. (MHz)	Fre. (MHz)	Fre. (MHz)	
				673.00	683.00	688.00	
20MHz	QPSK	1	0	21.29	21.20	21.33	22.0
		1	49	21.63	21.52	21.71	
		1	99	21.26	21.24	21.43	
		50	0	20.55	20.44	20.51	21.0
		50	25	20.55	20.48	20.49	
		50	50	20.57	20.48	20.54	
	16QAM	100	0	20.56	20.47	20.49	21.0
		1	0	20.48	20.16	20.61	21.0
		1	49	20.84	20.47	20.96	
		1	99	20.42	20.18	20.72	
		50	0	19.60	19.53	19.49	20.0
		50	25	19.57	19.56	19.51	
		50	50	19.58	19.55	19.49	
		100	0	19.56	19.47	19.54	20.0

8.15. 2.4GHz Wi-Fi

Mode	Frequency (MHz)	AV Power [dBm]	Tune-up Limit (dBm)
11B	2412	16.56	17.0
	2437	16.24	
	2462	16.22	
11G	2412	12.50	14.0
	2437	13.23	
	2462	13.25	
11n20	2412	12.55	14.0
	2437	13.13	
	2462	13.26	
11n40	2422	13.41	14.0
	2437	13.57	
	2452	13.41	


8.16. 5GHz Wi-Fi

Mode	Frequency (MHz)	AV Power [dBm]	Tune-up Limit (dBm)
11A	5180	12.90	13.0
	5200	12.69	
	5240	12.35	
11n20	5180	12.82	13.0
	5200	12.78	
	5240	12.44	
11n40	5190	12.94	13.0
	5230	12.54	

8.17. BT

Mode	Frequency (MHz)	AV Power [dBm]	Tune-up Limit (dBm)
DH5	2402	4.89	6.0
	2441	5.78	
	2480	5.94	
3DH5	2402	3.72	4.0
	2441	3.59	
	2480	3.23	
BLE_1M	2402	4.70	6.0
	2440	5.50	
	2480	5.94	

8.18. Duty Cycle

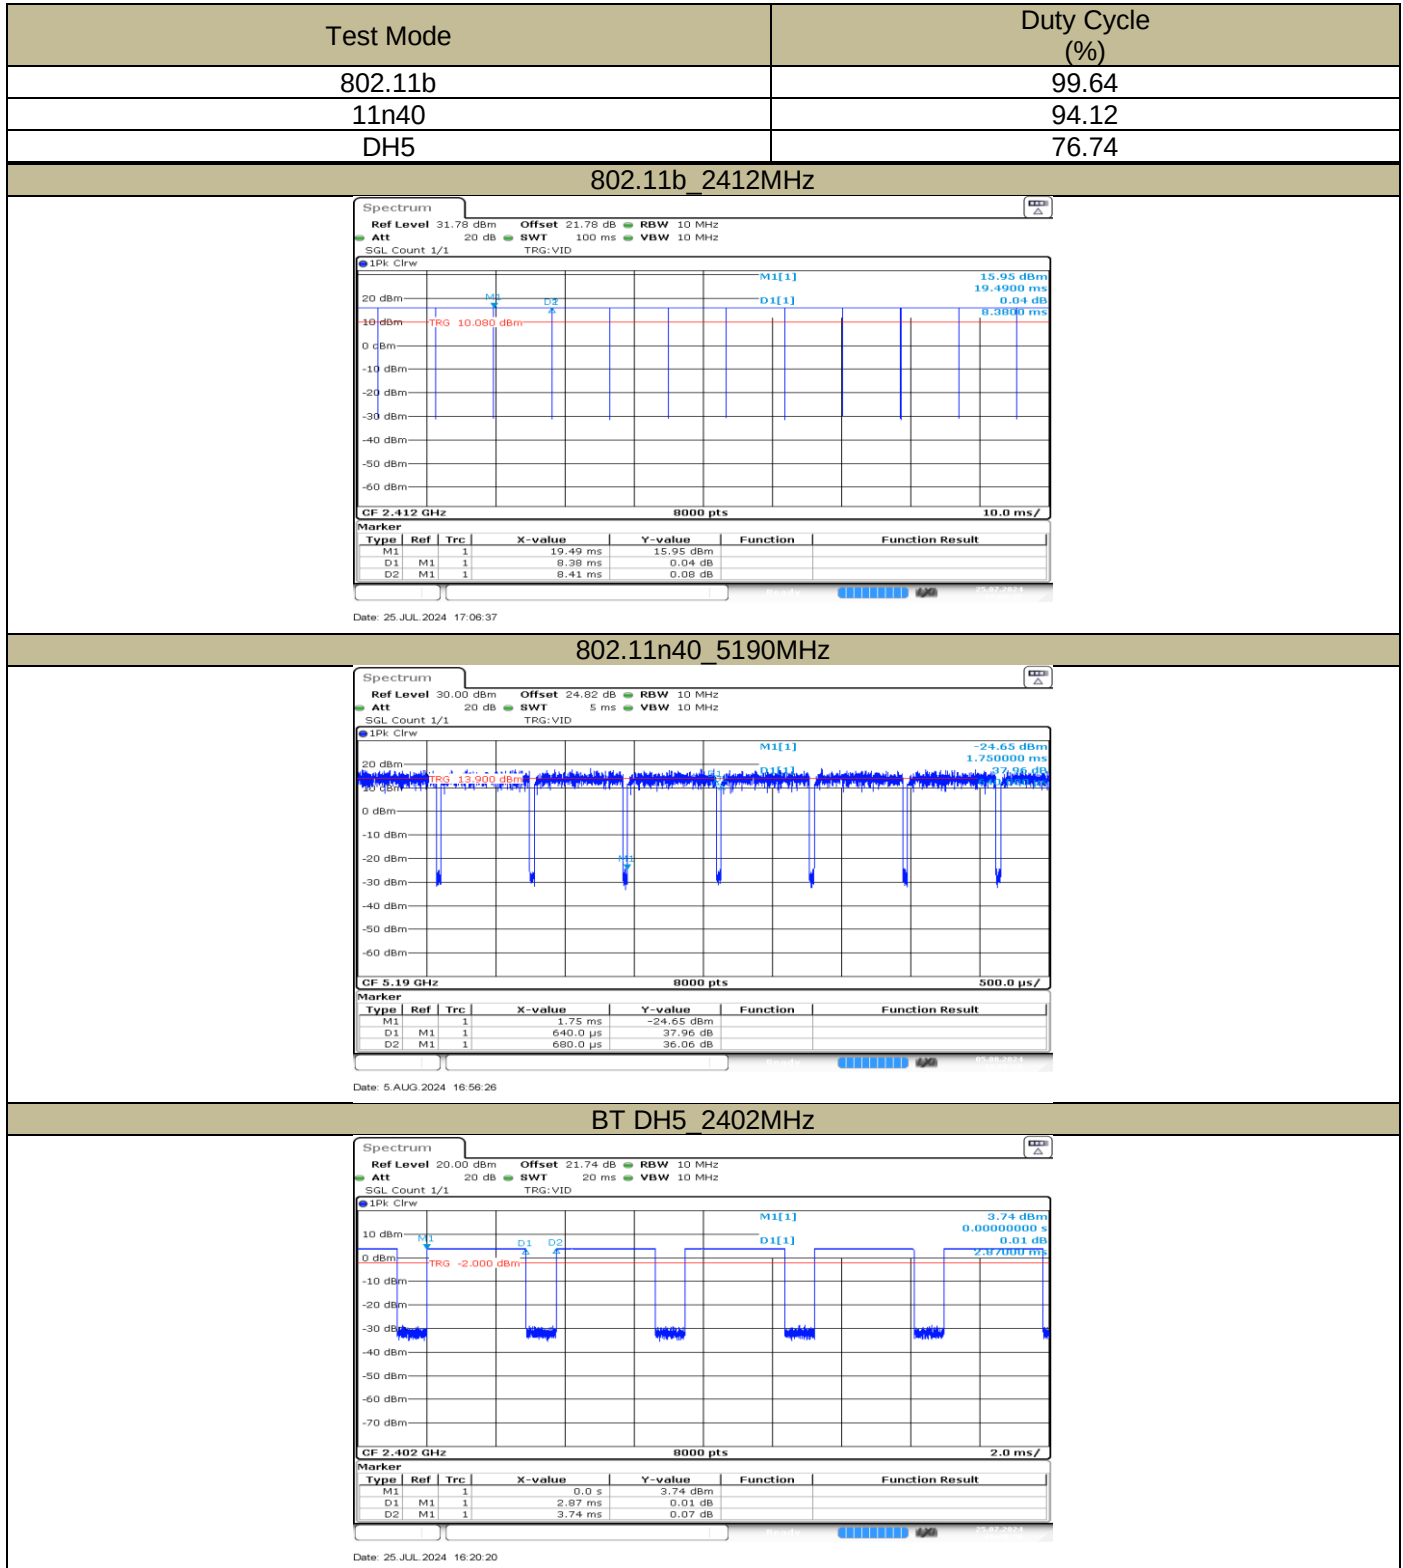

9. RF Exposure Conditions

Refer to the diagram inside the device which attached below for the specific details of the antenna-to-edges distances. As per KDB 941225 D06, when the antenna to-edge-distance is greater than 2.5 cm, SAR evaluation is not required for the corresponding position.

Antenna location detail referred to 4791434720-1-SAR-1_App A Photo.

Antenna	Front Surface	Back Surface	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN	Yes	Yes	Yes	Yes	No	Yes
Wi-Fi/BT	Yes	Yes	Yes	No	Yes	No

10. Dielectric Property Measurements & System Check

10.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

Liquid	Freq.	Liquid Parameters				Deviation(%)		Limit (%)	Temp. (°C)	Test Date
		Measured		Target						
		ϵ _r	σ	ϵ _r	σ	ϵ _r	σ			
Head 750	695	42.980	0.846	42.23	0.89	1.78	-4.94	±5	21.5	August 2, 2024
	750	42.310	0.898	41.94	0.89	0.88	0.90			
	790	41.720	0.934	41.73	0.90	-0.02	3.78			
Head 750	695	43.060	0.848	42.23	0.89	1.97	-4.72	±5	22.9	August 8, 2024
	750	42.400	0.900	41.94	0.89	1.10	1.12			
	790	41.810	0.936	41.73	0.90	0.19	4.00			
Head 835	805	42.760	0.865	41.66	0.90	2.64	-3.89	±5	21.5	August 2, 2024
	835	42.370	0.895	41.50	0.90	2.10	-0.56			
	905	41.430	0.956	41.50	0.97	-0.17	-1.44			
Head 835	805	42.850	0.867	41.66	0.90	2.86	-3.67	±5	22.2	August 5, 2024
	835	42.450	0.897	41.50	0.90	2.29	-0.33			
	905	41.520	0.958	41.50	0.97	0.05	-1.24			
Head 1800	1720	40.630	1.347	40.13	1.35	1.25	-0.22	±5	21.5	August 2, 2024
	1800	39.950	1.427	40.00	1.40	-0.12	1.93			
	1780	39.580	1.439	40.03	1.39	-1.12	3.53			
Head 1800	1720	40.970	1.350	40.13	1.35	2.09	0.00	±5	22.2	August 5, 2024
	1800	40.260	1.426	40.00	1.40	0.65	1.86			
	1890	39.810	1.408	40.00	1.40	-0.47	0.57			
Head 1800	1720	40.880	1.362	40.13	1.35	1.87	0.89	±5	22.9	August 8, 2024
	1800	40.150	1.445	40.00	1.40	0.37	3.21			
	1890	39.980	1.427	40.00	1.40	-0.05	1.93			
Head 1800	1720	39.090	1.398	40.13	1.35	-2.59	3.56	±5	21.3	August 13, 2024
	1800	39.090	1.437	40.00	1.40	-2.27	2.64			
	1890	39.060	1.451	40.00	1.40	-2.35	3.64			
Head 1900	1850	41.680	1.336	40.00	1.40	4.20	-4.57	±5	21.5	August 2, 2024
	1900	41.400	1.360	40.00	1.40	3.50	-2.86			
	1920	41.310	1.378	40.00	1.40	3.28	-1.57			
Head 1900	1850	41.760	1.339	40.00	1.40	4.40	-4.36	±5	22.9	August 8, 2024
	1900	41.490	1.366	40.00	1.40	3.73	-2.43			
	1920	41.400	1.383	40.00	1.40	3.50	-1.21			
Head 2450	2400	37.860	1.698	39.29	1.76	-3.64	-3.52	±5	22.9	August 8, 2024
	2450	37.880	1.748	39.20	1.80	-3.37	-2.89			
	2480	37.720	1.816	39.16	1.83	-3.68	-0.77			
Head 2600	2500	38.830	1.891	39.14	1.85	-0.79	2.22	±5	21.5	August 2, 2024
	2600	38.520	1.996	39.01	1.96	-1.26	1.84			
	2700	38.230	2.103	38.88	2.07	-1.67	1.59			
Head 2600	2500	38.910	1.898	39.14	1.85	-0.59	2.59	±5	22.2	August 5, 2024
	2600	38.610	2.003	39.01	1.96	-1.03	2.19			
	2700	38.320	2.111	38.88	2.07	-1.44	1.98			

Head 5250	5160	34.650	4.477	36.03	4.61	-3.83	-2.89	±5	22.9	August 8, 2024
	5250	34.500	4.675	35.93	4.71	-3.98	-0.74			
	5340	34.380	4.650	35.83	4.80	-4.05	-3.12			

10.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm (above 1GHz) and 15mm (below 1GHz) from dipole center to the simulating liquid surface.
- For area scan, standard grid spacing for head measurements is 15 mm in x- and y- dimension(≤2GHz), 12 mm in x- and y-dimension(2-4 GHz) and 10mm in x- and y- dimension(4-6GHz).
- For zoom scan, $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$.
- Distance between probe sensors and phantom surface was set to 3 mm except for 5 GHz band. For 5GHz band, Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was set to 100 mW or 250 mW depend on the certificate of the dipoles.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

T.S. Liquid		Measured Results		Target (Ref. value)	Delta (%)	Limit (%)	Temp. (°C)	Test Date
		Result of 0.1W input power (W/Kg)	Normalize to 1W (W/Kg)					
Head 750	1-g	0.829	8.29	8.50	-2.47	±10	21.5	August 2, 2024
	10-g	0.531	5.31	5.61	-5.35			
Head 750	1-g	0.831	8.31	8.50	-2.24	±10	22.6	August 8, 2024
	10-g	0.532	5.32	5.61	-5.17			
Head 835	1-g	0.965	9.65	9.64	0.10	±10	21.5	August 2, 2024
	10-g	0.608	6.08	6.26	-2.88			
Head 835	1-g	0.971	9.71	9.64	0.73	±10	22.2	August 5, 2024
	10-g	0.611	6.11	6.26	-2.40			
Head 1800	1-g	3.880	38.80	38.70	0.26	±10	21.5	August 2, 2024
	10-g	2.070	20.70	19.90	4.02			
Head 1800	1-g	4.070	40.70	38.70	5.17	±10	22.2	August 5, 2024
	10-g	2.120	21.20	19.90	6.53			
Head 1800	1-g	4.110	41.10	38.70	6.20	±10	22.6	August 8, 2024
	10-g	2.130	21.30	19.90	7.04			
Head 1800	1-g	4.080	40.80	38.70	5.43	±10	21.6	August 13, 2024
	10-g	2.090	20.90	19.90	5.03			
Head 1900	1-g	4.150	41.50	39.60	4.80	±10	21.5	August 2, 2024
	10-g	2.090	20.90	20.20	3.47			
Head 1900	1-g	4.060	40.60	39.60	2.53	±10	22.6	August 8, 2024
	10-g	2.050	20.50	20.20	1.49			
Head 2450	1-g	5.770	57.70	53.20	8.46	±10	22.6	August 8, 2024
	10-g	2.650	26.50	24.20	9.50			
Head 2600	1-g	5.420	54.20	55.40	-2.17	±10	21.5	August 2, 2024
	10-g	2.410	24.10	24.50	-1.63			
Head 2600	1-g	5.920	59.20	55.40	6.86	±10	22.2	August 5, 2024
	10-g	2.670	26.70	24.50	8.98			
Head 5250	1-g	8.530	85.30	77.90	9.50	±10	22.6	August 8, 2024
	10-g	2.480	24.80	22.60	9.73			

11. Measured and Reported (Scaled) SAR Results

General Notes:

- 1) As per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) As per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8 \text{ W/kg}$ for 1-g or 2.0 W/kg for 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$.
 - $\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$.When the maximum output power variation across the required test channels is $> \frac{1}{2} \text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 3) As per KDB865664 D01 for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8 \text{ W/kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45 \text{ W/kg}$, only one repeated measurement is required.
- 4) As per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is $> 1.5 \text{ W/kg}$, or $> 7.0 \text{ W/kg}$ for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for detailed SAR plots).
- 5) Additional SAR tests in simultaneous transmission fixed power reduction scenario are also tested in some frequency bands and required test positions for the SAR worst case, which are only used to ensure simultaneous transmission SAR test exclusion. The standalone SAR compliance still uses the SAR results tested at the maximum output power level.
- 6) As per 648474 D04, Handset SAR v01r03, The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions. The 1-g SAR at 5 mm for UMPC mini-tablets is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$.

11.1. SAR Test Results of GSM850

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	GPRS 3 Slots	Left Cheek	0	190	30.0	29.57	0.516	-0.09	0.569
Head	GPRS 3 Slots	Left Tilt	0	190	30.0	29.57	0.384	-0.02	0.424
Head	GPRS 3 Slots	Right Cheek	0	190	30.0	29.57	0.546	-0.01	0.603
Head	GPRS 3 Slots	Right Tilt	0	190	30.0	29.57	0.386	-0.02	0.426
Body-worn & Hotspot	GPRS 3 Slots	Front Surface	10	190	30.0	29.57	0.514	-0.09	0.567
Body-worn & Hotspot	GPRS 3 Slots	Back Surface	10	190	30.0	29.57	0.485	-0.02	0.536
Hotspot	GPRS 3 Slots	Left Edge	10	190	30.0	29.57	0.430	0.00	0.474
Hotspot	GPRS 3 Slots	Right Edge	10	190	30.0	29.57	0.097	-0.12	0.108
Hotspot	GPRS 3 Slots	Bottom Edge	10	190	30.0	29.57	0.098	-0.03	0.109

Notes:

- Based on the Maximum Output Power, GPRS/EDGE (GMSK) mode with 3 time slots have maximum frame-averaged power, cs mode is covered by 1 time slot, so 3 time slots mode is selected for SAR evaluation to represent the worst configuration.

11.2. SAR Test Results of GSM1900

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	GPRS 4 Slots	Left Cheek	0	661	24.0	23.59	0.340	-0.09	0.374
Head	GPRS 4 Slots	Left Tilt	0	661	24.0	23.59	0.188	-0.13	0.207
Head	GPRS 4 Slots	Right Cheek	0	661	24.0	23.59	0.287	-0.08	0.315
Head	GPRS 4 Slots	Right Tilt	0	661	24.0	23.59	0.128	-0.03	0.140
Body-worn & Hotspot	GPRS 4 Slots	Front Surface	10	661	24.0	23.59	0.393	-0.07	0.432
Body-worn & Hotspot	GPRS 4 Slots	Back Surface	10	661	24.0	23.59	0.708	-0.12	0.778
Hotspot	GPRS 4 Slots	Left Edge	10	661	24.0	23.59	0.180	-0.11	0.198
Hotspot	GPRS 4 Slots	Right Edge	10	661	24.0	23.59	0.077	-0.10	0.085
Hotspot	GPRS 4 Slots	Bottom Edge	10	661	24.0	23.59	1.080	-0.11	1.187
Hotspot	GPRS 4 Slots	Bottom Edge	10	512	24.0	23.75	1.120	-0.03	1.186
Hotspot	GPRS 4 Slots	Bottom Edge	10	810	24.0	23.58	0.853	-0.06	0.940
Worst mode retest									
Hotspot	GPRS 4 Slots	Bottom Edge	10	512	24.0	23.75	1.100	-0.02	1.165

Note:

1. Due to $1.120/1.100 = 1.02 < 1.20$, and SAR value of original and repeated measurement is ≤ 1.45 W/kg, so only one repeated measurement is required.
2. Based on the Maximum Output Power, GPRS/EDGE (GMSK) mode with 3 time slots have maximum frame-averaged power, cs mode is covered by 1 time slot, so 3 time slots mode is selected for SAR evaluation to represent the worst configuration.

11.3. SAR Test Results of WCDMA Band II

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	RMC 12.2kbps	Left Cheek	0	9400	19.5	19.32	0.310	-0.11	0.323
Head	RMC 12.2kbps	Left Tilt	0	9400	19.5	19.32	0.178	-0.06	0.185
Head	RMC 12.2kbps	Right Cheek	0	9400	19.5	19.32	0.284	-0.10	0.296
Head	RMC 12.2kbps	Right Tilt	0	9400	19.5	19.32	0.121	0.00	0.126
Body-worn & Hotspot	RMC 12.2kbps	Front Surface	10	9400	19.5	19.32	0.292	-0.07	0.304
Body-worn & Hotspot	RMC 12.2kbps	Back Surface	10	9400	19.5	19.32	0.601	-0.11	0.626
Hotspot	RMC 12.2kbps	Left Edge	10	9400	19.5	19.32	0.162	-0.01	0.169
Hotspot	RMC 12.2kbps	Right Edge	10	9400	19.5	19.32	0.070	-0.07	0.073
Hotspot	RMC 12.2kbps	Bottom Edge	10	9400	19.5	19.32	0.839	-0.05	0.874
Hotspot	RMC 12.2kbps	Bottom Edge	10	9262	19.5	19.26	0.904	-0.05	0.955
Hotspot	RMC 12.2kbps	Bottom Edge	10	9538	19.5	19.31	0.821	-0.03	0.858
Worst mode retest									
Hotspot	RMC 12.2kbps	Bottom Edge	10	9262	19.5	19.26	0.901	-0.01	0.952

Note:

- Due to $0.904/0.901 = 1.00 < 1.20$, and SAR value of original and repeated measurement is ≤ 1.45 W/kg, so only one repeated measurement is required.

11.4. SAR Test Results of WCDMA Band IV

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	RMC 12.2kbps	Left Cheek	0	1413	18.5	18.46	0.071	-0.03	0.072
Head	RMC 12.2kbps	Left Tilt	0	1413	18.5	18.46	0.036	-0.09	0.036
Head	RMC 12.2kbps	Right Cheek	0	1413	18.5	18.46	0.128	-0.05	0.129
Head	RMC 12.2kbps	Right Tilt	0	1413	18.5	18.46	0.038	-0.04	0.038
Body-worn & Hotspot	RMC 12.2kbps	Front Surface	10	1413	18.5	18.46	0.237	-0.03	0.240
Body-worn & Hotspot	RMC 12.2kbps	Back Surface	10	1413	18.5	18.46	0.535	0.00	0.540
Hotspot	RMC 12.2kbps	Left Edge	10	1413	18.5	18.46	0.037	-0.06	0.037
Hotspot	RMC 12.2kbps	Right Edge	10	1413	18.5	18.46	0.045	-0.01	0.045
Hotspot	RMC 12.2kbps	Bottom Edge	10	1413	18.5	18.46	0.636	-0.11	0.642
Hotspot	RMC 12.2kbps	Bottom Edge	10	1312	18.5	18.43	0.655	-0.03	0.666
Hotspot	RMC 12.2kbps	Bottom Edge	10	1513	18.5	18.38	0.644	-0.15	0.662

11.5. SAR Test Results of WCDMA Band V

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	RMC 12.2kbps	Left Cheek	0	4182	22.0	21.84	0.206	-0.08	0.214
Head	RMC 12.2kbps	Left Tilt	0	4182	22.0	21.84	0.160	-0.03	0.166
Head	RMC 12.2kbps	Right Cheek	0	4182	22.0	21.84	0.226	-0.14	0.234
Head	RMC 12.2kbps	Right Tilt	0	4182	22.0	21.84	0.169	-0.03	0.175
Body-worn & Hotspot	RMC 12.2kbps	Front Surface	10	4182	22.0	21.84	0.029	-0.03	0.030
Body-worn & Hotspot	RMC 12.2kbps	Back Surface	10	4182	22.0	21.84	0.226	-0.10	0.235
Hotspot	RMC 12.2kbps	Left Edge	10	4182	22.0	21.84	0.179	-0.03	0.185
Hotspot	RMC 12.2kbps	Right Edge	10	4182	22.0	21.84	0.236	-0.02	0.245
Hotspot	RMC 12.2kbps	Bottom Edge	10	4182	22.0	21.84	0.048	0.00	0.050

11.6. SAR Test Results of LTE B5

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	10M QPSK 1RB#24	Left Cheek	0	20600	22.0	21.54	0.177	-0.07	0.197
Head	10M QPSK 25RB#12	Left Cheek	0	20600	21.0	20.56	0.140	-0.02	0.155
Head	10M QPSK 1RB#24	Left Tilt	0	20600	22.0	21.54	0.121	-0.05	0.135
Head	10M QPSK 25RB#12	Left Tilt	0	20600	21.0	20.56	0.098	-0.04	0.108
Head	10M QPSK 1RB#24	Right Cheek	0	20600	22.0	21.54	0.204	-0.06	0.227
Head	10M QPSK 25RB#12	Right Cheek	0	20600	21.0	20.56	0.161	0.00	0.178
Head	10M QPSK 1RB#24	Right Tilt	0	20600	22.0	21.54	0.143	-0.05	0.159
Head	10M QPSK 25RB#12	Right Tilt	0	20600	21.0	20.56	0.101	-0.10	0.112
Body-worn & Hotspot	10M QPSK 1RB#24	Front Surface	10	20600	22.0	21.54	0.021	-0.05	0.023
Body-worn & Hotspot	10M QPSK 25RB#12	Front Surface	10	20600	21.0	20.56	0.016	-0.10	0.018
Body-worn & Hotspot	10M QPSK 1RB#24	Back Surface	10	20600	22.0	21.54	0.143	-0.12	0.158
Body-worn & Hotspot	10M QPSK 25RB#12	Back Surface	10	20600	21.0	20.56	0.105	-0.10	0.116
Hotspot	10M QPSK 1RB#24	Left Edge	10	20600	22.0	21.54	0.116	-0.13	0.129
Hotspot	10M QPSK 25RB#12	Left Edge	10	20600	21.0	20.56	0.102	-0.15	0.113
Hotspot	10M QPSK 1RB#24	Right Edge	10	20600	22.0	21.54	0.198	-0.14	0.220
Hotspot	10M QPSK 25RB#12	Right Edge	10	20600	21.0	20.56	0.168	-0.06	0.186
Hotspot	10M QPSK 1RB#24	Bottom Edge	10	20600	22.0	21.54	0.039	-0.01	0.043
Hotspot	10M QPSK 25RB#12	Bottom Edge	10	20600	21.0	20.56	0.031	-0.15	0.034

11.7. SAR Test Results of LTE B12

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured 1-g (W/Kg)	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.			
Head	10M QPSK 1RB#24	Left Cheek	0	23095	22.0	21.57	0.172	-0.04	0.190
Head	10M QPSK 25RB#12	Left Cheek	0	23130	21.0	20.64	0.165	-0.13	0.179
Head	10M QPSK 1RB#24	Left Tilt	0	23095	22.0	21.57	0.115	-0.04	0.127
Head	10M QPSK 25RB#12	Left Tilt	0	23130	21.0	20.64	0.091	-0.12	0.099
Head	10M QPSK 1RB#24	Right Cheek	0	23095	22.0	21.57	0.209	-0.08	0.231
Head	10M QPSK 25RB#12	Right Cheek	0	23130	21.0	20.64	0.169	-0.03	0.184
Head	10M QPSK 1RB#24	Right Tilt	0	23095	22.0	21.57	0.121	-0.08	0.134
Head	10M QPSK 25RB#12	Right Tilt	0	23130	21.0	20.64	0.089	-0.09	0.096
Body-worn & Hotspot	10M QPSK 1RB#24	Front Surface	10	23095	22.0	21.57	0.060	-0.03	0.067
Body-worn & Hotspot	10M QPSK 25RB#12	Front Surface	10	23130	21.0	20.64	0.049	-0.02	0.053
Body-worn & Hotspot	10M QPSK 1RB#24	Back Surface	10	23095	22.0	21.57	0.313	-0.04	0.346
Body-worn & Hotspot	10M QPSK 25RB#12	Back Surface	10	23130	21.0	20.64	0.263	-0.08	0.286
Hotspot	10M QPSK 1RB#24	Left Edge	10	23095	22.0	21.57	0.246	-0.12	0.272
Hotspot	10M QPSK 25RB#12	Left Edge	10	23130	21.0	20.64	0.213	-0.14	0.232
Hotspot	10M QPSK 1RB#24	Right Edge	10	23095	22.0	21.57	0.247	-0.08	0.273
Hotspot	10M QPSK 25RB#12	Right Edge	10	23130	21.0	20.64	0.208	-0.01	0.226
Hotspot	10M QPSK 1RB#24	Bottom Edge	10	23095	22.0	21.57	0.022	-0.14	0.025
Hotspot	10M QPSK 25RB#12	Bottom Edge	10	23130	21.0	20.64	0.017	-0.10	0.018

11.8. SAR Test Results of LTE B25

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	20M QPSK 1RB#49	Left Cheek	0	26590	18.5	18.45	0.287	-0.02	0.290
Head	20M QPSK 50RB#0	Left Cheek	0	26140	17.5	17.33	0.179	-0.02	0.186
Head	20M QPSK 1RB#49	Left Tilt	0	26590	18.5	18.45	0.203	0.00	0.205
Head	20M QPSK 50RB#0	Left Tilt	0	26140	17.5	17.33	0.137	-0.04	0.142
Head	20M QPSK 1RB#49	Right Cheek	0	26590	18.5	18.45	0.228	-0.10	0.231
Head	20M QPSK 50RB#0	Right Cheek	0	26140	17.5	17.33	0.173	-0.05	0.180
Head	20M QPSK 1RB#49	Right Tilt	0	26590	18.5	18.45	0.144	-0.08	0.146
Head	20M QPSK 50RB#0	Right Tilt	0	26140	17.5	17.33	0.124	-0.11	0.129
Body-worn & Hotspot	20M QPSK 1RB#49	Front Surface	10	26590	18.5	18.45	0.243	-0.11	0.246
Body-worn & Hotspot	20M QPSK 50RB#0	Front Surface	10	26140	17.5	17.33	0.208	-0.06	0.216
Body-worn & Hotspot	20M QPSK 1RB#49	Back Surface	10	26590	18.5	18.45	0.495	-0.03	0.501
Body-worn & Hotspot	20M QPSK 50RB#0	Back Surface	10	26140	17.5	17.33	0.471	-0.15	0.490
Hotspot	20M QPSK 1RB#49	Left Edge	10	26590	18.5	18.45	0.167	-0.15	0.169
Hotspot	20M QPSK 50RB#0	Left Edge	10	26140	17.5	17.33	0.145	-0.04	0.151
Hotspot	20M QPSK 1RB#49	Right Edge	10	26590	18.5	18.45	0.169	-0.13	0.171
Hotspot	20M QPSK 50RB#0	Right Edge	10	26140	17.5	17.33	0.140	-0.14	0.146
Hotspot	20M QPSK 1RB#49	Bottom Edge	10	26590	18.5	18.45	0.733	-0.15	0.742
Hotspot	20M QPSK 1RB#49	Bottom Edge	10	26140	18.5	18.43	0.742	-0.08	0.754
Hotspot	20M QPSK 1RB#49	Bottom Edge	10	26590	18.5	18.36	0.751	-0.14	0.776
Hotspot	20M QPSK 50RB#0	Bottom Edge	10	26140	17.5	17.33	0.641	-0.05	0.666
Hotspot	20M QPSK 100RB#0	Bottom Edge	10	26140	17.5	17.29	0.622	-0.11	0.653

11.9. SAR Test Results of LTE B26

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	15M QPSK 1RB#0	Left Cheek	0	26765	21.5	21.42	0.196	-0.13	0.200
Head	15M QPSK 36RB#18	Left Cheek	0	26865	21.0	20.52	0.145	-0.09	0.162
Head	15M QPSK 1RB#0	Left Tilt	0	26765	21.5	21.42	0.149	-0.07	0.152
Head	15M QPSK 36RB#18	Left Tilt	0	26865	21.0	20.52	0.104	-0.08	0.117
Head	15M QPSK 1RB#0	Right Cheek	0	26765	21.5	21.42	0.226	0.00	0.230
Head	15M QPSK 36RB#18	Right Cheek	0	26865	21.0	20.52	0.160	0.00	0.178
Head	15M QPSK 1RB#0	Right Tilt	0	26765	21.5	21.42	0.149	-0.06	0.152
Head	15M QPSK 36RB#18	Right Tilt	0	26865	21.0	20.52	0.124	-0.06	0.139
Body-worn & Hotspot	15M QPSK 1RB#0	Front Surface	10	26765	21.5	21.42	0.026	-0.15	0.026
Body-worn & Hotspot	15M QPSK 36RB#18	Front Surface	10	26865	21.0	20.52	0.019	-0.10	0.021
Body-worn & Hotspot	15M QPSK 1RB#0	Back Surface	10	26765	21.5	21.42	0.263	-0.05	0.268
Body-worn & Hotspot	15M QPSK 36RB#18	Back Surface	10	26865	21.0	20.52	0.211	-0.11	0.236
Hotspot	15M QPSK 1RB#0	Left Edge	10	26765	21.5	21.42	0.178	-0.07	0.181
Hotspot	15M QPSK 36RB#18	Left Edge	10	26865	21.0	20.52	0.133	-0.04	0.149
Hotspot	15M QPSK 1RB#0	Right Edge	10	26765	21.5	21.42	0.189	-0.05	0.193
Hotspot	15M QPSK 36RB#18	Right Edge	10	26865	21.0	20.52	0.182	-0.02	0.203
Hotspot	15M QPSK 1RB#0	Bottom Edge	10	26765	21.5	21.42	0.029	-0.13	0.030
Hotspot	15M QPSK 36RB#18	Bottom Edge	10	26865	21.0	20.52	0.032	-0.12	0.036

11.10. SAR Test Results of LTE B41

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	20M QPSK 1RB#49	Left Cheek	0	41490	21.5	21.47	0.129	0.09	0.130
Head	20M QPSK 50RB#50	Left Cheek	0	40620	20.5	20.19	0.095	-0.06	0.102
Head	20M QPSK 1RB#49	Left Tilt	0	41490	21.5	21.47	0.099	-0.11	0.100
Head	20M QPSK 50RB#50	Left Tilt	0	40620	20.5	20.19	0.073	-0.10	0.078
Head	20M QPSK 1RB#49	Right Cheek	0	41490	21.5	21.47	0.067	-0.06	0.067
Head	20M QPSK 50RB#50	Right Cheek	0	40620	20.5	20.19	0.048	-0.15	0.052
Head	20M QPSK 1RB#49	Right Tilt	0	41490	21.5	21.47	0.045	-0.05	0.045
Head	20M QPSK 50RB#50	Right Tilt	0	40620	20.5	20.19	0.037	-0.15	0.040
Body-worn & Hotspot	20M QPSK 1RB#49	Front Surface	10	41490	21.5	21.47	0.067	-0.11	0.068
Body-worn & Hotspot	20M QPSK 50RB#50	Front Surface	10	40620	20.5	20.19	0.056	-0.01	0.060
Body-worn & Hotspot	20M QPSK 1RB#49	Back Surface	10	41490	21.5	21.47	0.052	-0.13	0.052
Body-worn & Hotspot	20M QPSK 50RB#50	Back Surface	10	40620	20.5	20.19	0.044	-0.15	0.048
Hotspot	20M QPSK 1RB#49	Left Edge	10	41490	21.5	21.47	0.062	-0.13	0.062
Hotspot	20M QPSK 50RB#50	Left Edge	10	40620	20.5	20.19	0.045	-0.04	0.048
Hotspot	20M QPSK 1RB#49	Right Edge	10	41490	21.5	21.47	0.067	-0.06	0.068
Hotspot	20M QPSK 50RB#50	Right Edge	10	40620	20.5	20.19	0.058	-0.01	0.062
Hotspot	20M QPSK 1RB#49	Bottom Edge	10	41490	21.5	21.47	0.088	-0.05	0.089
Hotspot	20M QPSK 50RB#50	Bottom Edge	10	40620	20.5	20.19	0.060	-0.11	0.064

11.11. SAR Test Results of LTE B66

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	20M QPSK 1RB#49	Left Cheek	0	132572	19.0	18.72	0.114	0.09	0.122
Head	20M QPSK 50RB#0	Left Cheek	0	132572	18.0	17.73	0.084	-0.08	0.089
Head	20M QPSK 1RB#49	Left Tilt	0	132572	19.0	18.72	0.088	-0.15	0.094
Head	20M QPSK 50RB#0	Left Tilt	0	132572	18.0	17.73	0.054	-0.07	0.057
Head	20M QPSK 1RB#49	Right Cheek	0	132572	19.0	18.72	0.127	-0.04	0.135
Head	20M QPSK 50RB#0	Right Cheek	0	132572	18.0	17.73	0.101	-0.12	0.107
Head	20M QPSK 1RB#49	Right Tilt	0	132572	19.0	18.72	0.098	-0.02	0.105
Head	20M QPSK 50RB#0	Right Tilt	0	132572	18.0	17.73	0.067	-0.13	0.071
Body-worn & Hotspot	20M QPSK 1RB#49	Front Surface	10	132572	19.0	18.72	0.263	-0.07	0.281
Body-worn & Hotspot	20M QPSK 50RB#0	Front Surface	10	132572	18.0	17.73	0.232	-0.01	0.247
Body-worn & Hotspot	20M QPSK 1RB#49	Back Surface	10	132572	19.0	18.72	0.514	-0.03	0.548
Body-worn & Hotspot	20M QPSK 50RB#0	Back Surface	10	132572	18.0	17.73	0.464	-0.10	0.493
Hotspot	20M QPSK 1RB#49	Left Edge	10	132572	19.0	18.72	0.057	-0.06	0.061
Hotspot	20M QPSK 50RB#0	Left Edge	10	132572	18.0	17.73	0.049	-0.06	0.052
Hotspot	20M QPSK 1RB#49	Right Edge	10	132572	19.0	18.72	0.059	-0.08	0.063
Hotspot	20M QPSK 50RB#0	Right Edge	10	132572	18.0	17.73	0.045	-0.06	0.048
Hotspot	20M QPSK 1RB#49	Bottom Edge	10	132572	19.0	18.72	0.620	-0.07	0.661
Hotspot	20M QPSK 1RB#49	Bottom Edge	10	132072	19.0	18.71	0.712	-0.06	0.761
Hotspot	20M QPSK 1RB#49	Bottom Edge	10	132322	19.0	18.61	0.643	-0.13	0.703
Hotspot	20M QPSK 50RB#0	Bottom Edge	10	132572	18.0	17.73	0.505	-0.12	0.537
Hotspot	20M QPSK 50RB#0	Bottom Edge	10	132072	18.0	17.71	0.528	-0.10	0.564
Hotspot	20M QPSK 50RB#25	Bottom Edge	10	132322	18.0	17.64	0.523	-0.09	0.568
Hotspot	20M QPSK 100RB#0	Bottom Edge	10	132072	18.0	17.81	0.528	-0.03	0.551

11.12. SAR Test Results of LTE B71

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up Limit	Meas.	1-g (W/Kg)		
Head	20M QPSK 1RB#49	Left Cheek	0	133372	22.0	21.71	0.074	0.06	0.079
Head	20M QPSK 50RB#50	Left Cheek	0	133222	21.0	20.57	0.063	0.00	0.070
Head	20M QPSK 1RB#49	Left Tilt	0	133372	22.0	21.71	0.058	-0.02	0.062
Head	20M QPSK 50RB#50	Left Tilt	0	133222	21.0	20.57	0.040	-0.05	0.044
Head	20M QPSK 1RB#49	Right Cheek	0	133372	22.0	21.71	0.067	-0.14	0.072
Head	20M QPSK 50RB#50	Right Cheek	0	133222	21.0	20.57	0.049	-0.14	0.054
Head	20M QPSK 1RB#49	Right Tilt	0	133372	22.0	21.71	0.051	-0.05	0.054
Head	20M QPSK 50RB#50	Right Tilt	0	133222	21.0	20.57	0.040	-0.08	0.044
Body-worn & Hotspot	20M QPSK 1RB#49	Front Surface	10	133372	22.0	21.71	0.006	-0.08	0.006
Body-worn & Hotspot	20M QPSK 50RB#50	Front Surface	10	133222	21.0	20.57	0.005	-0.10	0.006
Body-worn & Hotspot	20M QPSK 1RB#49	Back Surface	10	133372	22.0	21.71	0.072	-0.07	0.077
Body-worn & Hotspot	20M QPSK 50RB#50	Back Surface	10	133222	21.0	20.57	0.062	-0.04	0.069
Hotspot	20M QPSK 1RB#49	Left Edge	10	133372	22.0	21.71	0.092	-0.04	0.098
Hotspot	20M QPSK 50RB#50	Left Edge	10	133222	21.0	20.57	0.068	-0.12	0.075
Hotspot	20M QPSK 1RB#49	Right Edge	10	133372	22.0	21.71	0.048	-0.11	0.051
Hotspot	20M QPSK 50RB#50	Right Edge	10	133222	21.0	20.57	0.034	-0.11	0.038
Hotspot	20M QPSK 1RB#49	Bottom Edge	10	133372	22.0	21.71	0.015	-0.03	0.016
Hotspot	20M QPSK 50RB#50	Bottom Edge	10	133222	21.0	20.57	0.011	-0.01	0.012

11.13. SAR Test Results of 2.4GHz Wi-Fi

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		DC. (%)	Measured 1-g (W/Kg)	Pwr. Drift	Scaled (W/Kg)
					Tune-up	Meas.				
Head	802.11 b	Left Cheek	0	1	17.0	16.56	99.64	0.468	-0.02	0.519
Head	802.11 b	Left Tilt	0	1	17.0	16.56	99.64	0.487	-0.03	0.541
Head	802.11 b	Right Cheek	0	1	17.0	16.56	99.64	0.849	-0.13	0.943
Head	802.11 b	Right Cheek	0	6	17.0	16.24	99.64	0.823	-0.13	0.984
Head	802.11 b	Right Cheek	0	11	17.0	16.22	99.64	0.821	-0.02	0.986
Head	802.11 b	Right Tilt	0	1	17.0	16.56	99.64	0.588	-0.10	0.653
Body-worn & Hotspot	802.11 b	Front Surface	10	1	17.0	16.56	99.64	0.216	-0.06	0.240
Body-worn & Hotspot	802.11 b	Back Surface	10	1	17.0	16.56	99.64	0.218	-0.02	0.242
Hotspot	802.11 b	Left Edge	10	1	17.0	16.56	99.64	0.217	-0.02	0.241
Hotspot	802.11 b	Top Edge	10	1	17.0	16.56	99.64	0.191	-0.12	0.212
Worst mode retest										
Head	802.11 b	Right Cheek	0	1	17.0	16.56	99.64	0.841	-0.02	0.934

Note:

- Due to $0.849/0.841 = 1.01 < 1.20$, and SAR value of original and repeated measurement is ≤ 1.45 W/kg, so only one repeated measurement is required.

11.14. SAR Test Results of U-NII-1

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		DC. (%)	Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up	Meas.		1-g (W/Kg)		
Head	802.11 n 40M	Left Cheek	0	38	13.0	12.94	94.12	0.705	0.03	0.759
Head	802.11 n 40M	Left Tilt	0	38	13.0	12.94	94.12	0.698	-0.06	0.752
Head	802.11 n 40M	Right Cheek	0	38	13.0	12.94	94.12	0.922	-0.03	0.993
Head	802.11 n 40M	Right Cheek	0	38	13.0	12.54	94.12	0.835	-0.08	0.986
Head	802.11 n 40M	Right Tilt	0	38	13.0	12.94	94.12	0.683	-0.13	0.736
Body-worn & Hotspot	802.11 n 40M	Front Surface	10	38	13.0	12.94	94.12	0.140	-0.08	0.151
Body-worn & Hotspot	802.11 n 40M	Back Surface	10	38	13.0	12.94	94.12	0.205	0.00	0.221
Hotspot	802.11 n 40M	Left Edge	10	38	13.0	12.94	94.12	0.153	-0.08	0.165
Hotspot	802.11 n 40M	Top Edge	10	38	13.0	12.94	94.12	0.058	-0.12	0.062
Worst mode retest										
Head	802.11 n 40M	Right Cheek	0	38	13.0	12.94	94.12	0.906	-0.11	0.976

Note:

- Due to $0.922/0.906 = 1.02 < 1.20$, and SAR value of original and repeated measurement is ≤ 1.45 W/kg, so only one repeated measurement is required.

11.15. SAR Test Results of Bluetooth

RF Exposure Condition	Test Mode	Test Position	Dist. (mm)	Channel	Pwr. (dBm)		DC. (%)	Measured	Pwr. Drift	Scaled (W/Kg)
					Tune-up	Meas.		1-g (W/Kg)		
Head	DH5	Left Cheek	0	39	6.0	5.94	76.74	0.026	0.04	0.034
Head	DH5	Left Tilt	0	39	6.0	5.94	76.74	0.029	-0.15	0.039
Head	DH5	Right Cheek	0	39	6.0	5.94	76.74	0.054	-0.03	0.071
Head	DH5	Right Tilt	0	39	6.0	5.94	76.74	0.034	-0.01	0.045
Body-worn & Hotspot	DH5	Front Surface	10	39	6.0	5.94	76.74	0.011	-0.09	0.015
Body-worn & Hotspot	DH5	Back Surface	10	39	6.0	5.94	76.74	0.012	-0.12	0.016
Hotspot	DH5	Left Edge	10	39	6.0	5.94	76.74	0.013	-0.05	0.017
Hotspot	DH5	Top Edge	10	39	6.0	5.94	76.74	0.012	-0.09	0.016

12. Simultaneous Transmission SAR Analysis

Simultaneous transmission possibilities				
NO	Simultaneous TX Combination	Head	Body- worn	Hotspot
1	WWAN+BT	Y	Y	Y
2	WWAN+2.4GHz Wi-Fi	Y	Y	Y
3	WWAN+U-NII	Y	Y	Y

12.1. Analysis for WWAN & Wi-Fi & U-NII-1 & BT

RF Exposure Condition	Test Position	WWAN Max	2.4G Wi-Fi	U-NII	BT	WWAN Max+2.4G Wi-Fi	WWAN Max+U-NII	WWAN Max+BT
Head	Left Cheek	0.569	0.519	0.759	0.034	1.088	1.328	0.603
	Left Tilt	0.424	0.541	0.752	0.039	0.965	1.176	0.463
	Right Cheek	0.603	0.986	0.993	0.071	1.589	1.596	0.674
	Right Tilt	0.426	0.653	0.736	0.045	1.079	1.162	0.471
Body-worn & Hotspot	Front Surface	0.567	0.24	0.151	0.015	0.807	0.718	0.582
	Back Surface	0.778	0.242	0.221	0.016	1.020	0.999	0.794
Hotspot	Left Edge	0.474	0.241	0.165	0.017	0.715	0.639	0.491
	Right Edge	0.273	/	/	/	0.273	0.273	0.273
	Top Edge	/	0.212	0.062	0.016	0.212	0.062	0.016
	Bottom Edge	1.187	/	/	/	1.187	1.187	1.187

Appendixes

Refer to separated files for the following appendixes.

4791394016-1-SAR-1_App A Photo

4791394016-1-SAR-1_App B System Check Plots

4791394016-1-SAR-1_App C Highest Test Plots

4791394016-1-SAR-1_App D Cal. Certificates

-----End of Report-----