

GSM 850 Head

Communication System: UID 0, GPRS 3TS (0); Communication System Band: GSM 850;

Frequency: 836.6 MHz;

Medium parameters used: $f = 837$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.455$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.688 W/kg

Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.08 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.399 W/kg

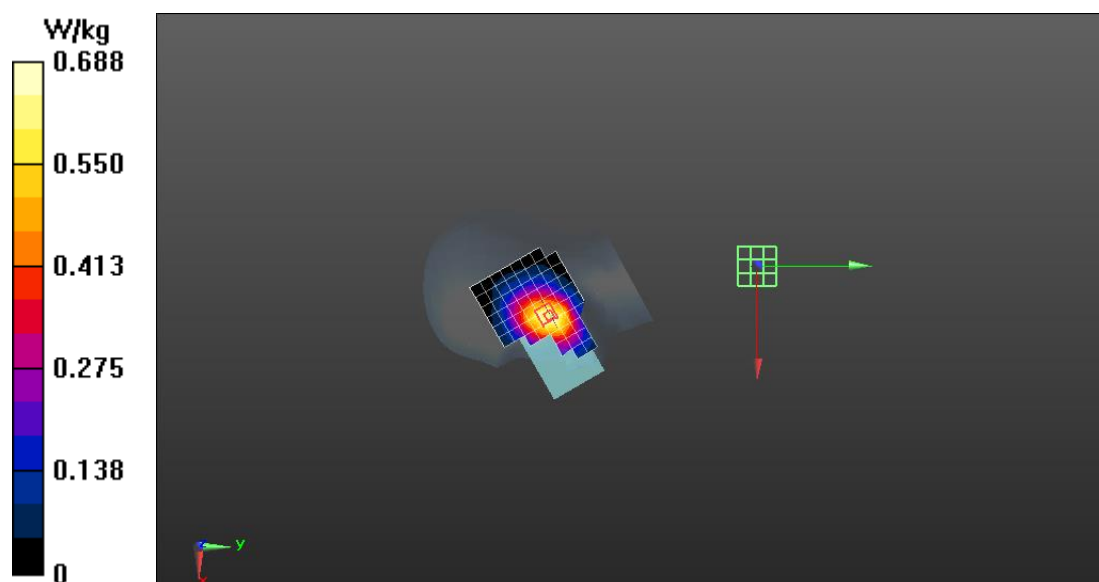

GSM 850 Body

Communication System: UID 0, GPRS 3TS (0); Communication System Band: GSM 850;

Frequency: 836.6 MHz;

Medium parameters used: $f = 837$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.455$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.654 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.71 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.729 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 0.652 W/kg

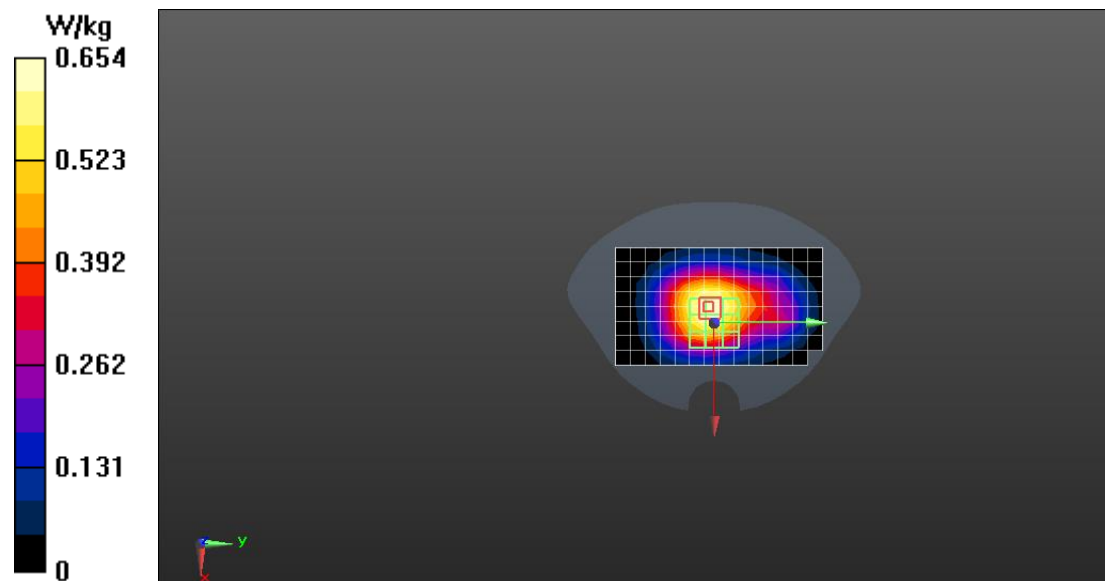

GSM 1900 Head

Communication System: UID 0, GPRS 2TS (0); Communication System Band: GSM 1900;

Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.916$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.412 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.160 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

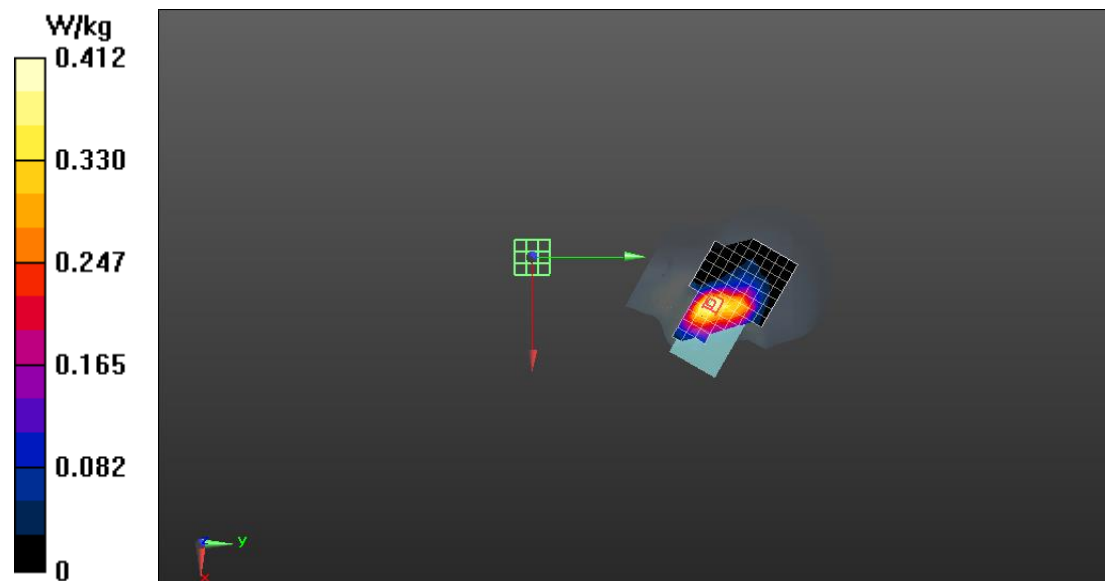

GSM 1900 Body

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 1900;

Frequency: 1850.2 MHz;

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.101$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.67 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 29.11 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.607 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

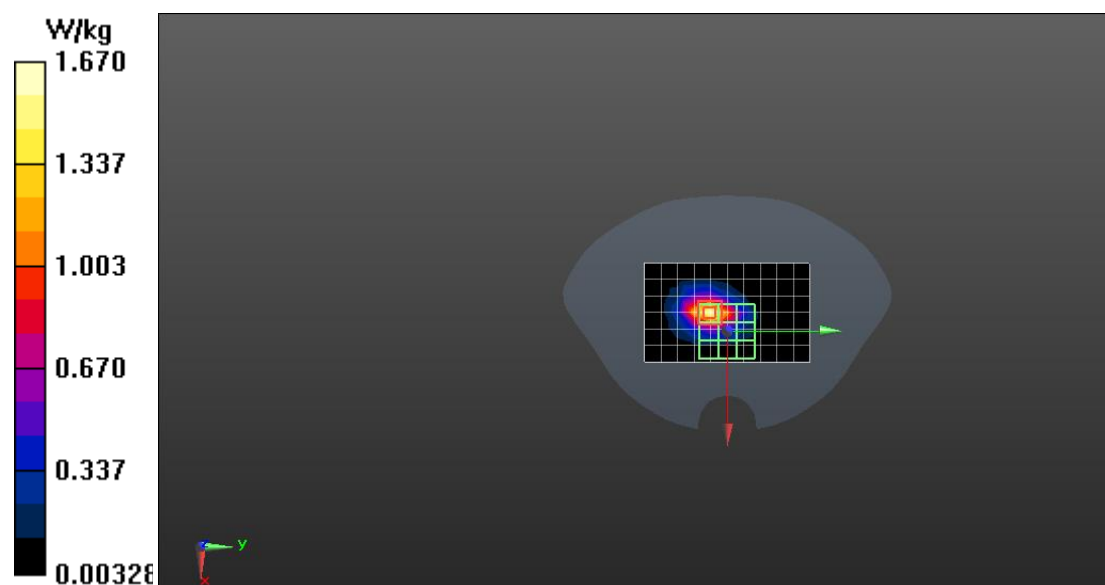

WCDMA B2 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.83$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.375 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.138 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.420 W/kg

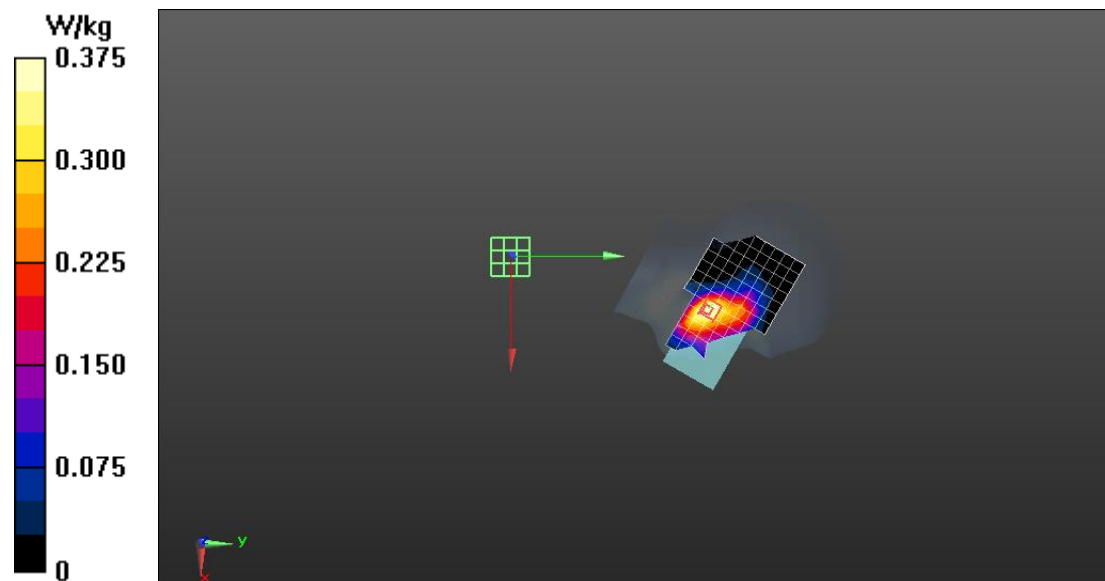

WCDMA B2 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1852.4 MHz;

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.224$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.26 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 25.82 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.904 W/kg; SAR(10 g) = 0.487 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

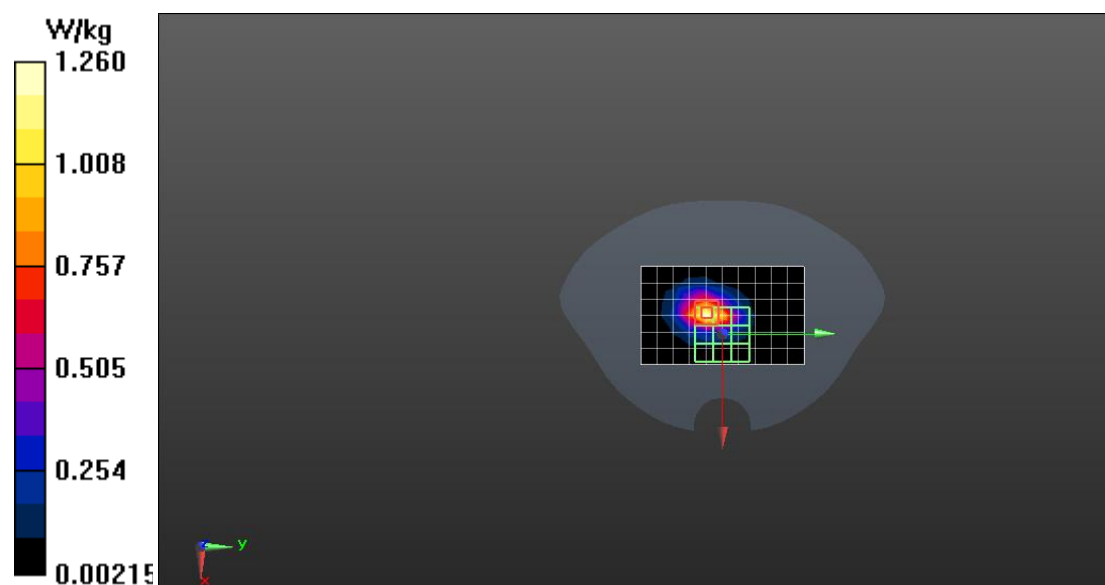

WCDMA B4 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1732.6 MHz;

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 40.806$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.151 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.655 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

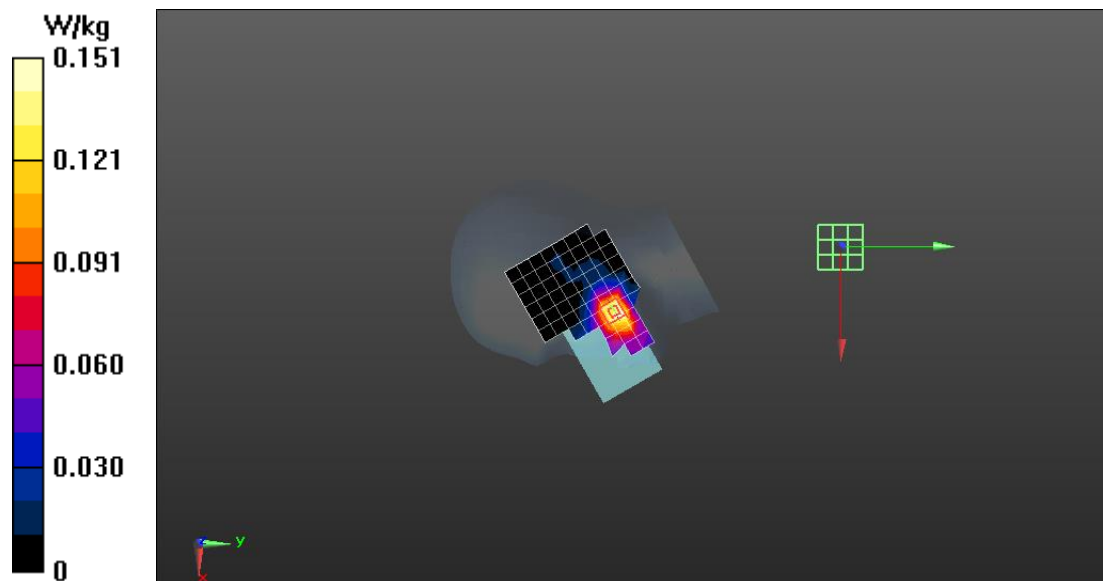

WCDMA B4 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1712.4 MHz;

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.969$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.853 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.44 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.361 W/kg

Maximum value of SAR (measured) = 0.929 W/kg

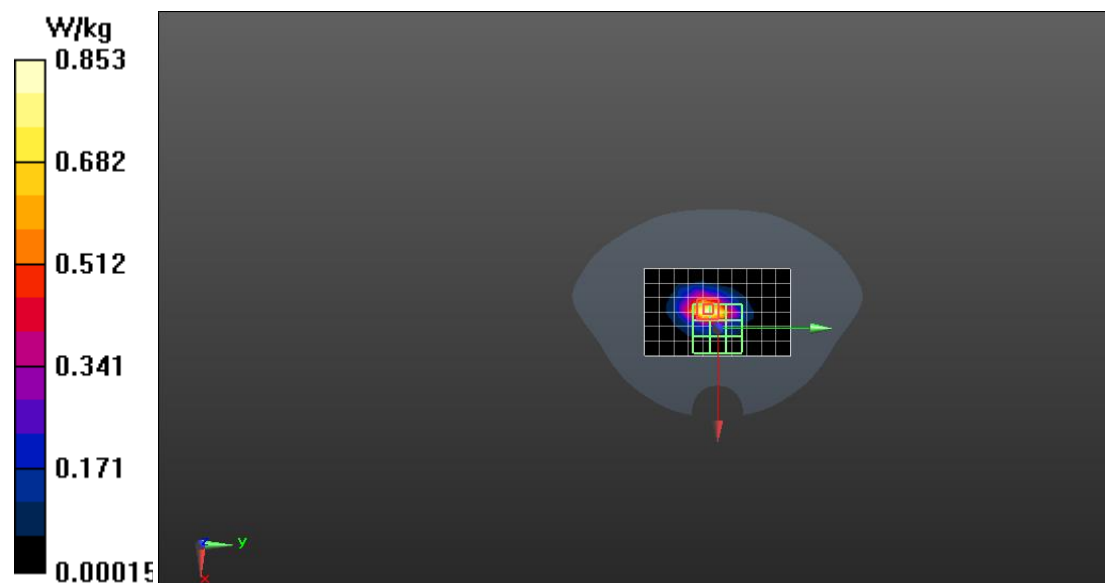

WCDMA B5 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.4 MHz;

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.348$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.288 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.536 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.283 W/kg

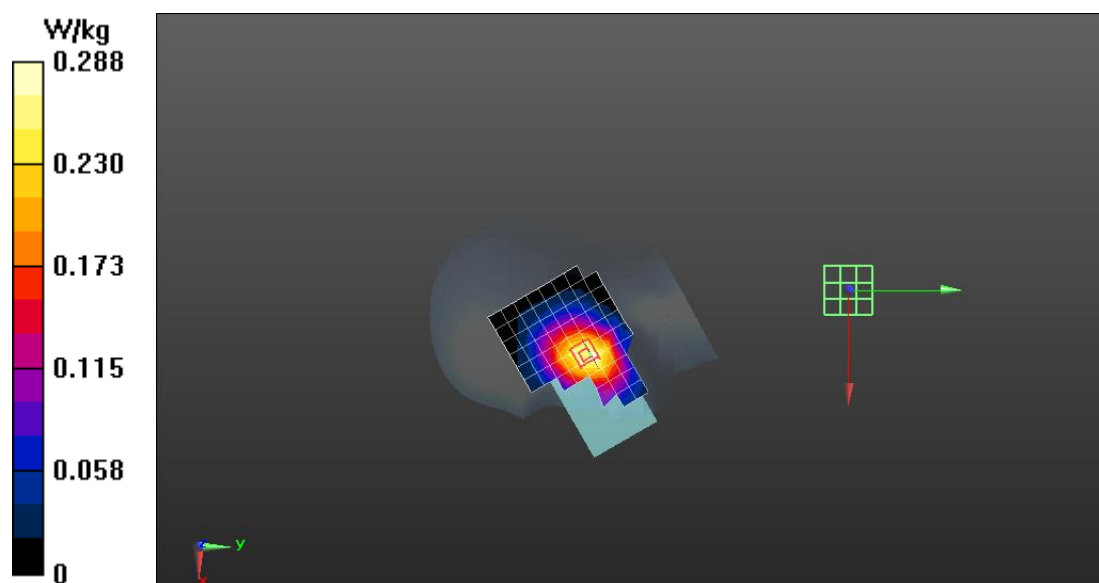

WCDMA B5 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.4 MHz;

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 42.434$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.311 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.67 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.321 W/kg

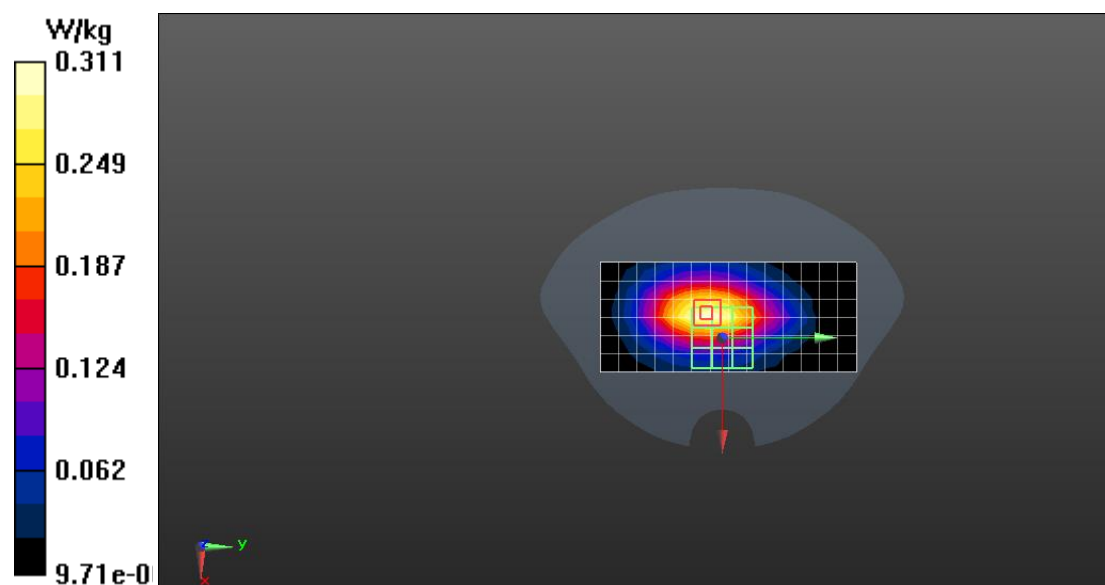

LTE B5 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 844 MHz;

Medium parameters used: $f = 844$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.246$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.259 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.861 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

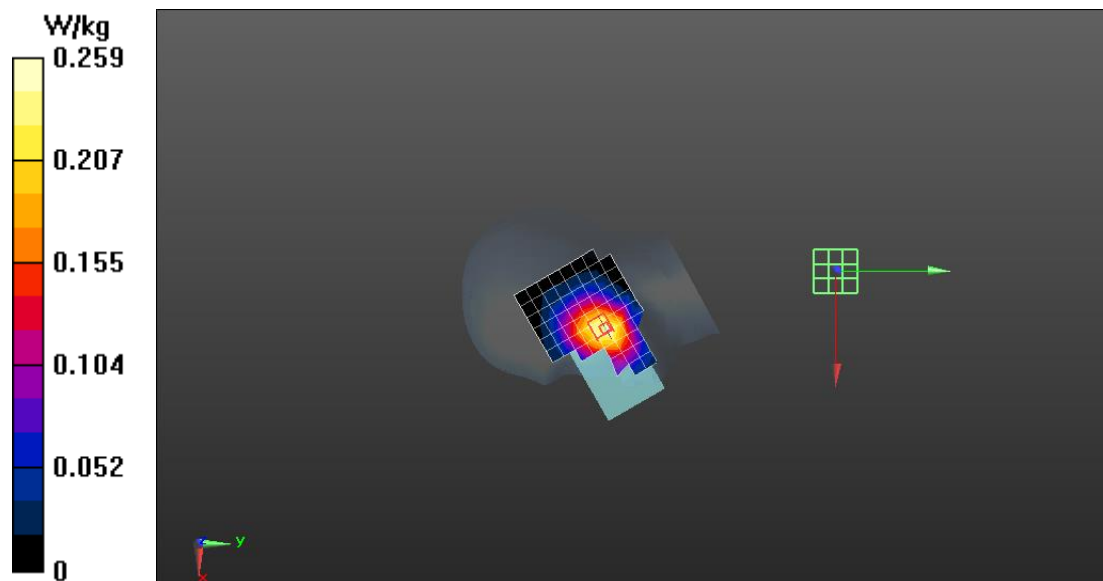

LTE B5 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 844 MHz;

Medium parameters used: $f = 844$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.333$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.260 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.02 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

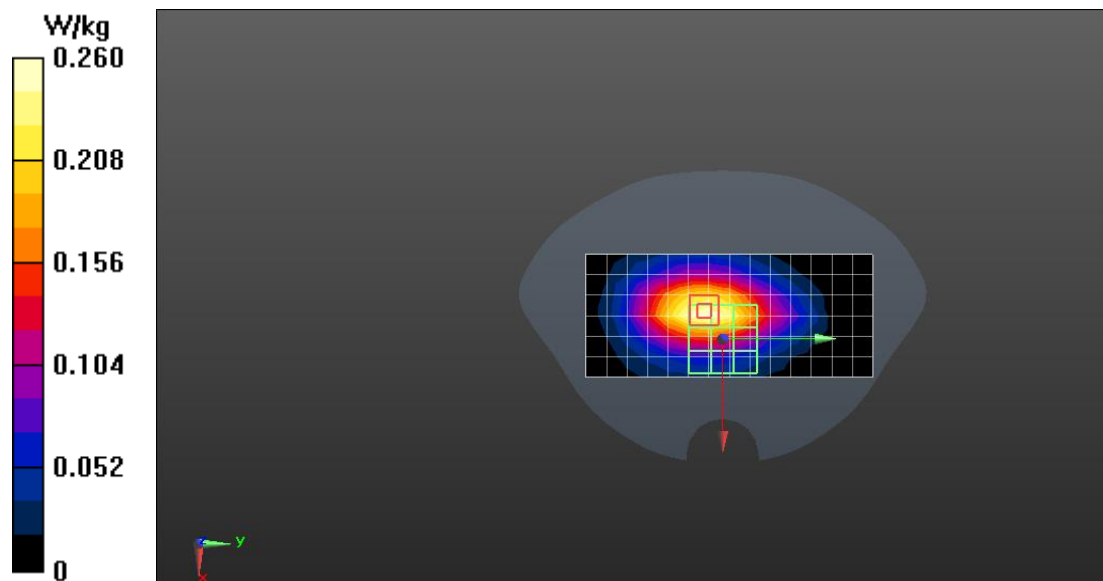

LTE B12 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 711 MHz;

Medium parameters used: $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.796$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.254 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.984 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

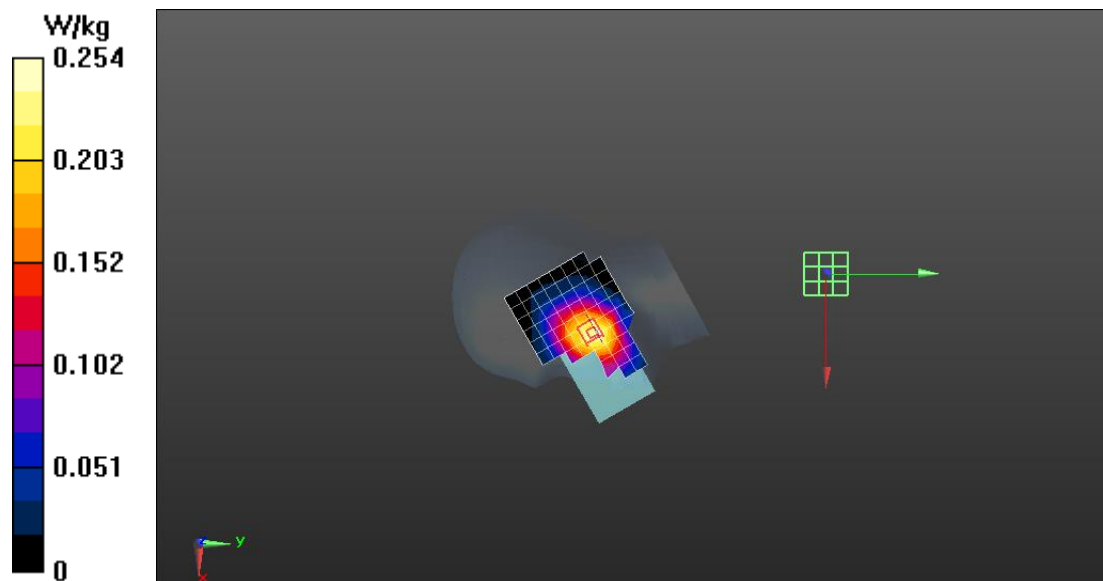

LTE B12 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 707.5 MHz;

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.391 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.41 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.388 W/kg

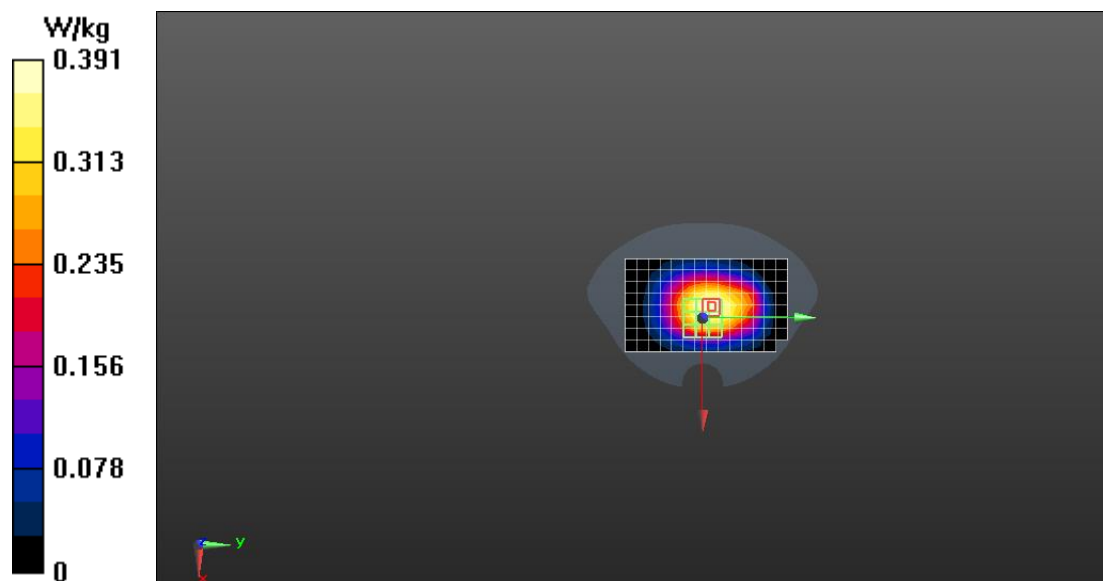

Date: 2024/8/2

LTE B25 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1905 MHz;

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.349 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.018 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.404 W/kg

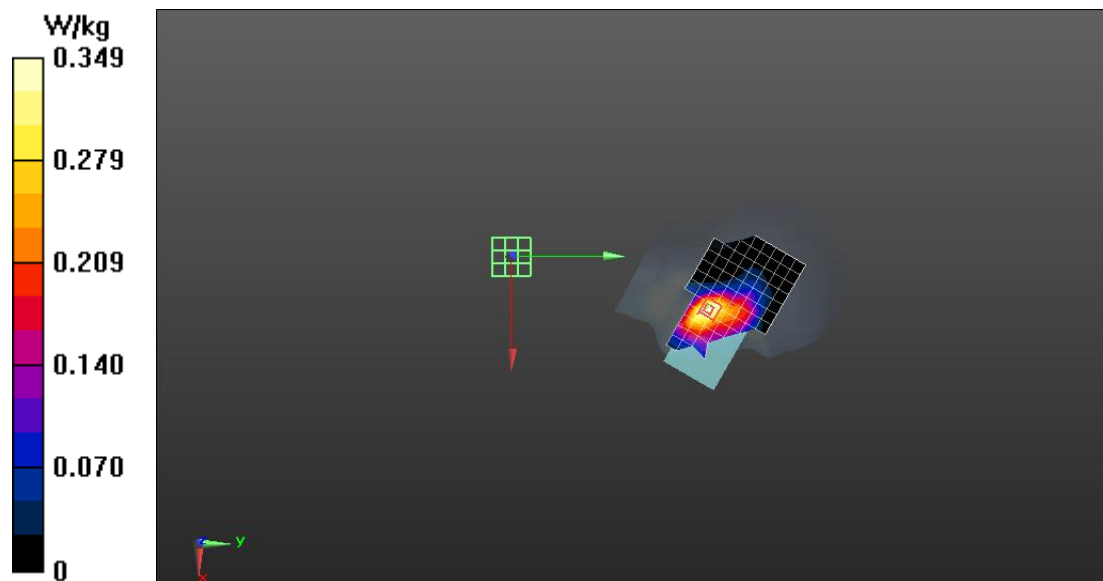

LTE B25 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1905 MHz;

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 41.469$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.08 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.02 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

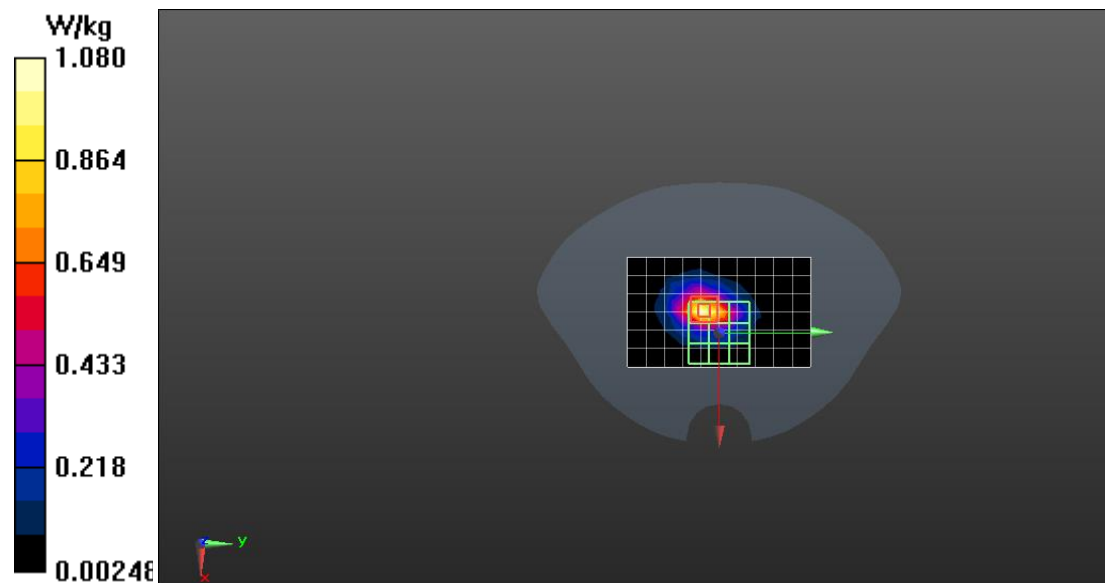

LTE B26 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 26; Frequency: 821.5 MHz;

Medium parameters used (interpolated): $f = 821.5$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.553$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.286 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.578 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.282 W/kg

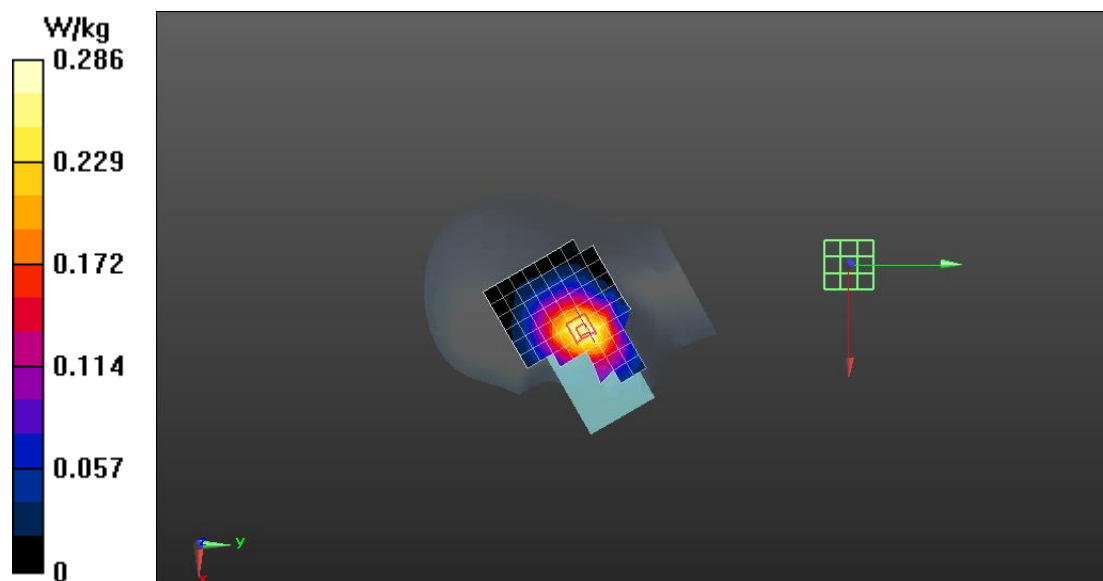

LTE B26 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 26; Frequency: 821.5 MHz;

Medium parameters used (interpolated): $f = 821.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.639$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.322 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.41 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

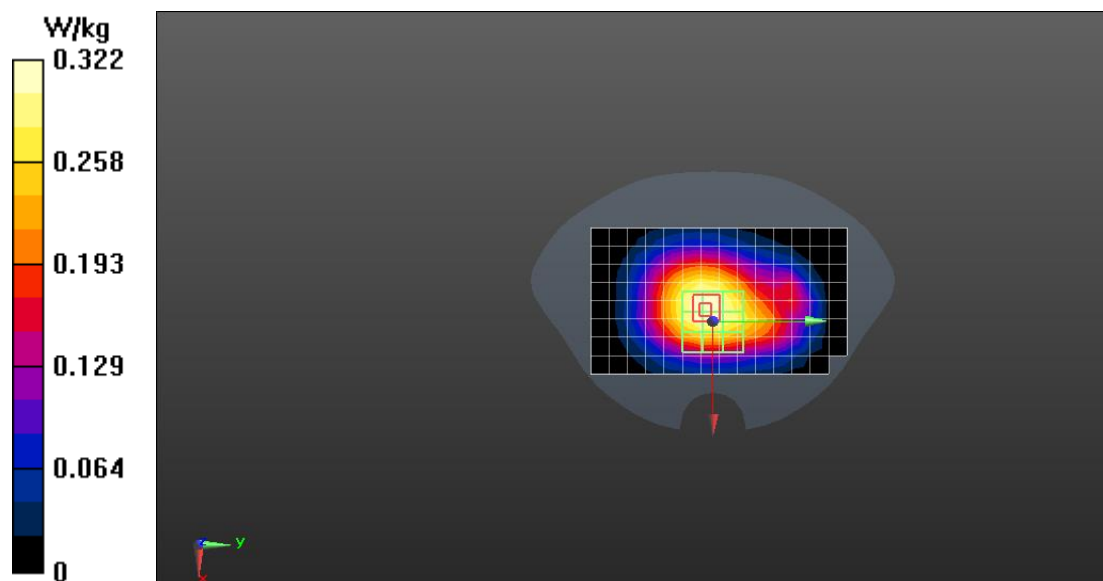

LTE B41 Head

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2680 MHz;

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.083$ S/m; $\epsilon_r = 38.263$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.202 W/kg


Configuration/Head/Zoom Scan (7x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.093 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

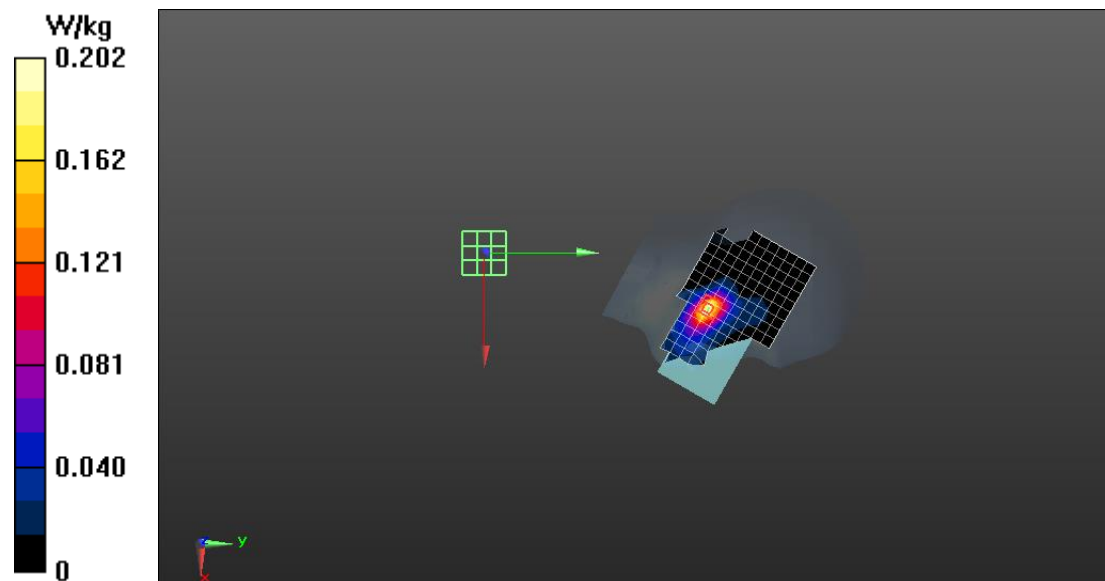

LTE B41 Body

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2680 MHz;

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.091$ S/m; $\epsilon_r = 38.349$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.147 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.460 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.152 W/kg

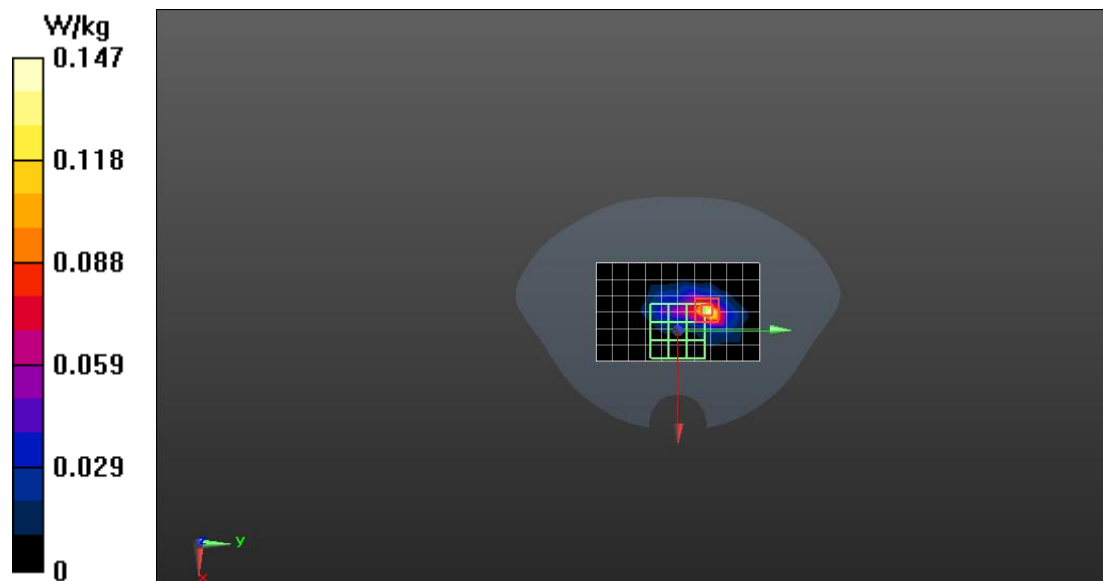

LTE B66 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1770 MHz;

Medium parameters used (extrapolated): $f = 1770$ MHz; $\sigma = 1.232$ S/m; $\epsilon_r = 41.971$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.142 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.699 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

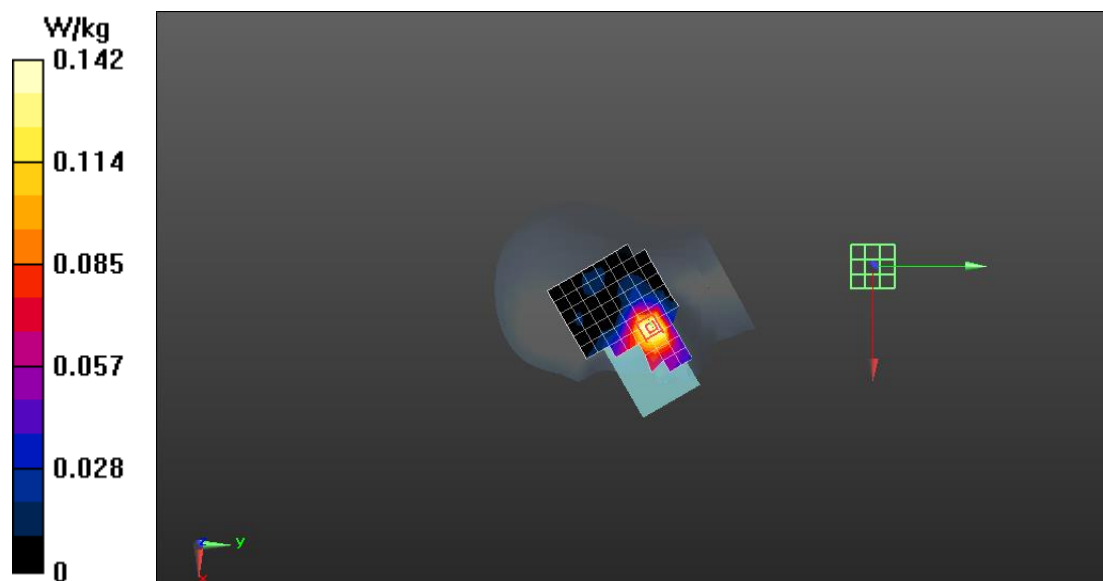

LTE B66 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.931 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.30 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.712 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

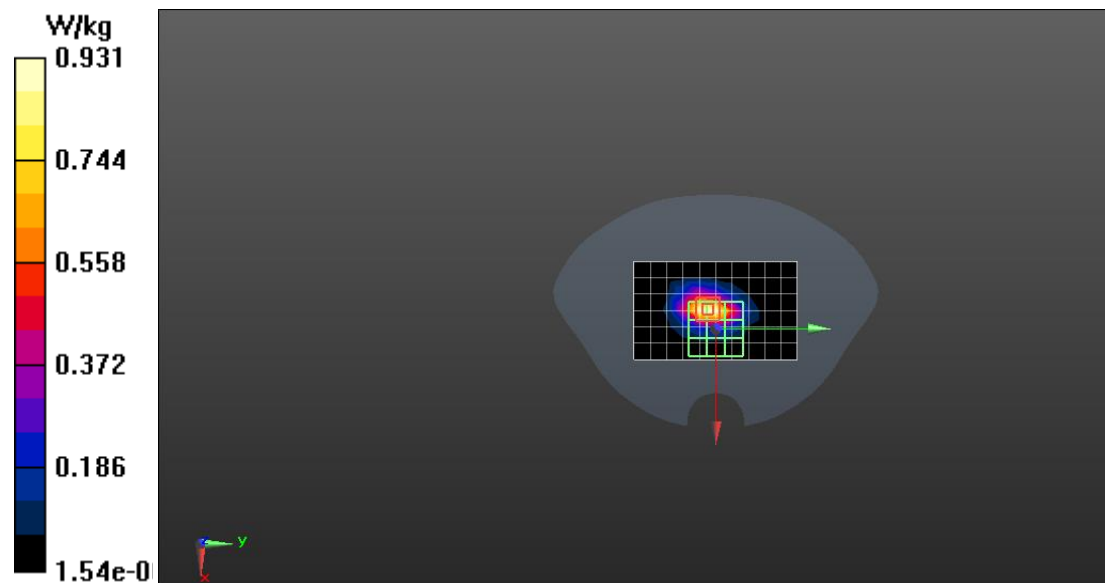

LTE B71 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 688 MHz;

Medium parameters used: $f = 688$ MHz; $\sigma = 0.841$ S/m; $\epsilon_r = 43.172$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0930 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.199 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.0921 W/kg

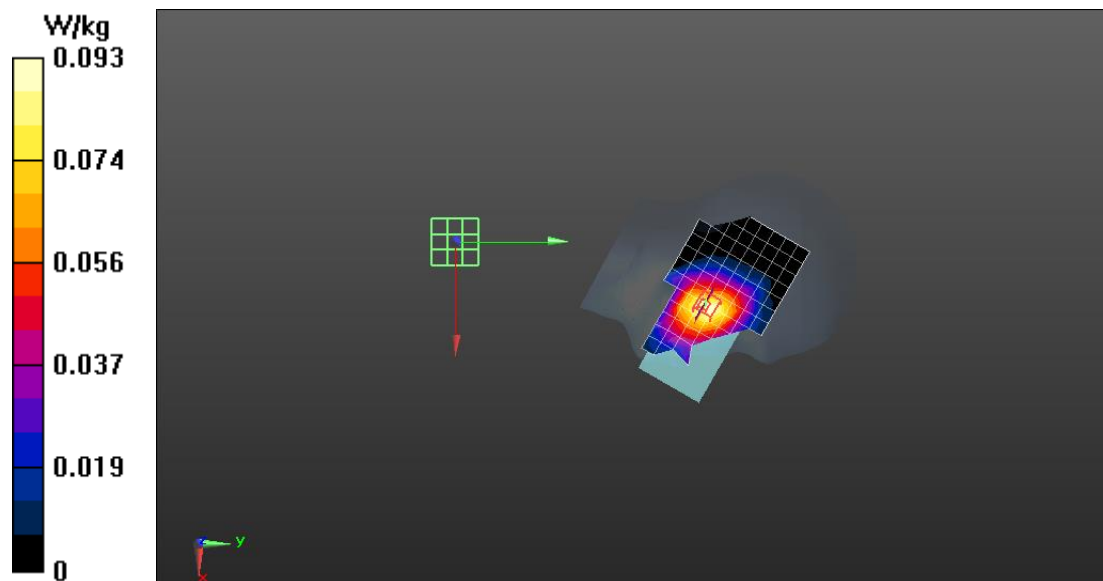

Date: 2024/8/2

LTE B71 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 688 MHz;

Medium parameters used: $f = 688$ MHz; $\sigma = 0.841$ S/m; $\epsilon_r = 43.172$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.122 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.46 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

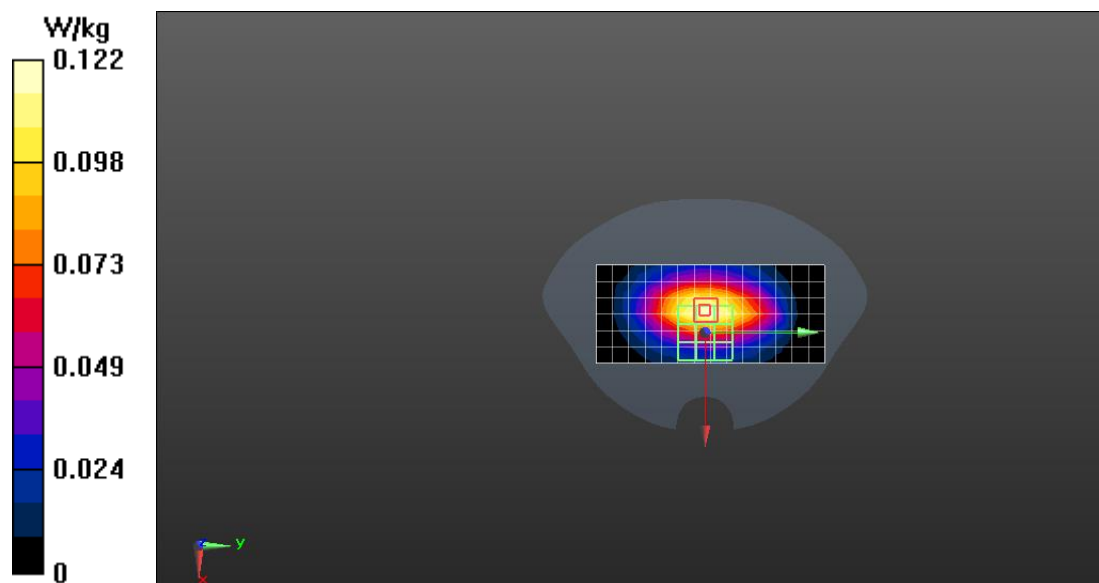

2.4G WIFI Head

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM

2.4GHz; Frequency: 2412 MHz;

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 37.867$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.21 W/kg


Configuration/Head/Zoom Scan (8x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.72 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 1.42 W/kg

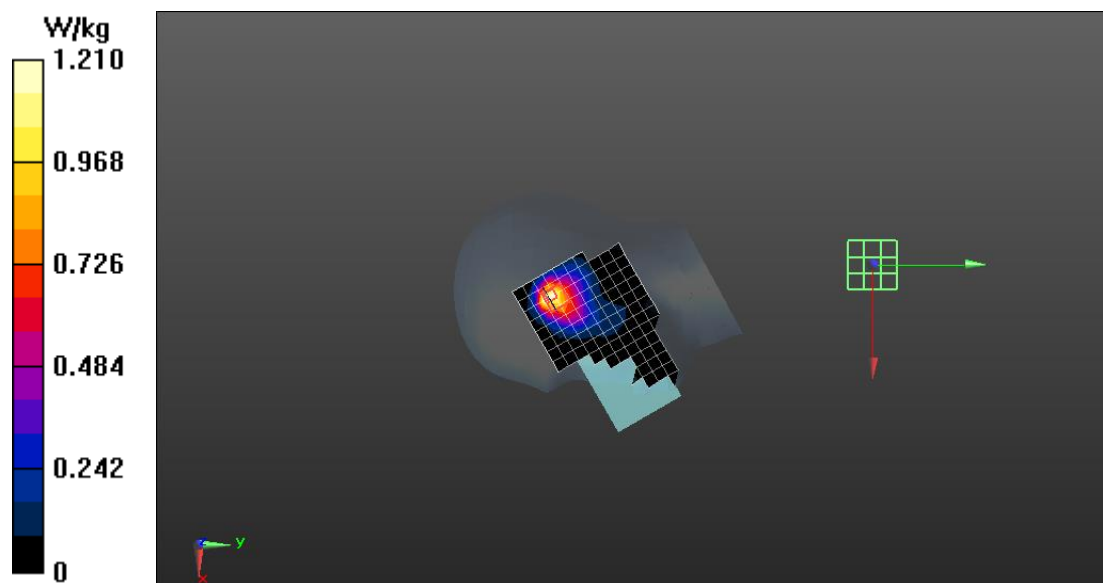

2.4G WIFI Body

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM

2.4GHz; Frequency: 2412 MHz;

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 37.867$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.332 W/kg


Configuration/Body/Zoom Scan (7x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.889 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

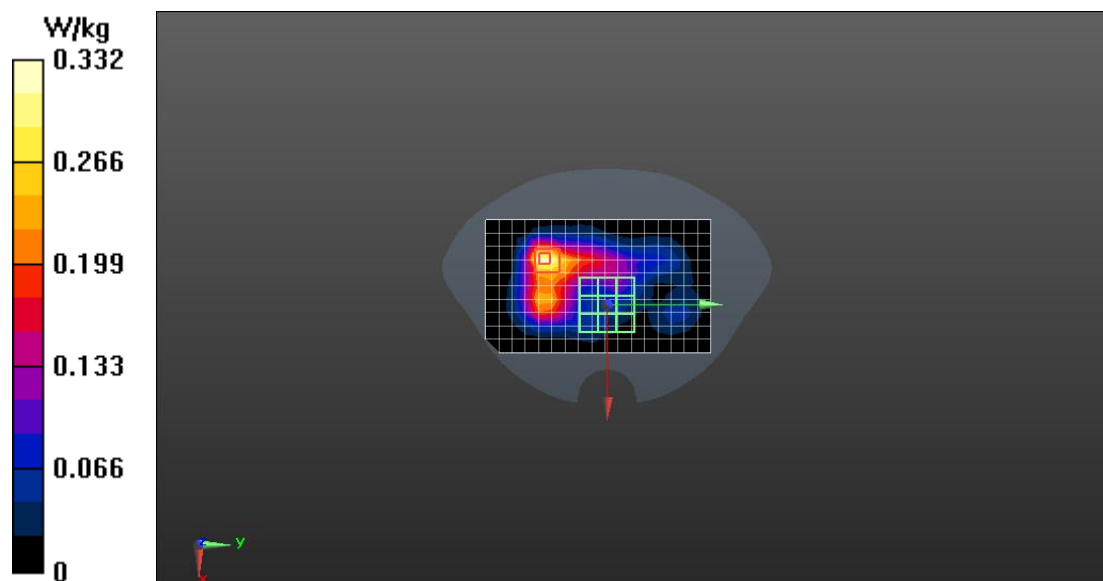

5.1G WIFI Head


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5190 MHz;
Medium parameters used: $f = 5190$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 34.657$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.31 W/kg

Configuration/Head/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.964 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 3.78 W/kg
SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.273 W/kg
Maximum value of SAR (measured) = 2.44 W/kg

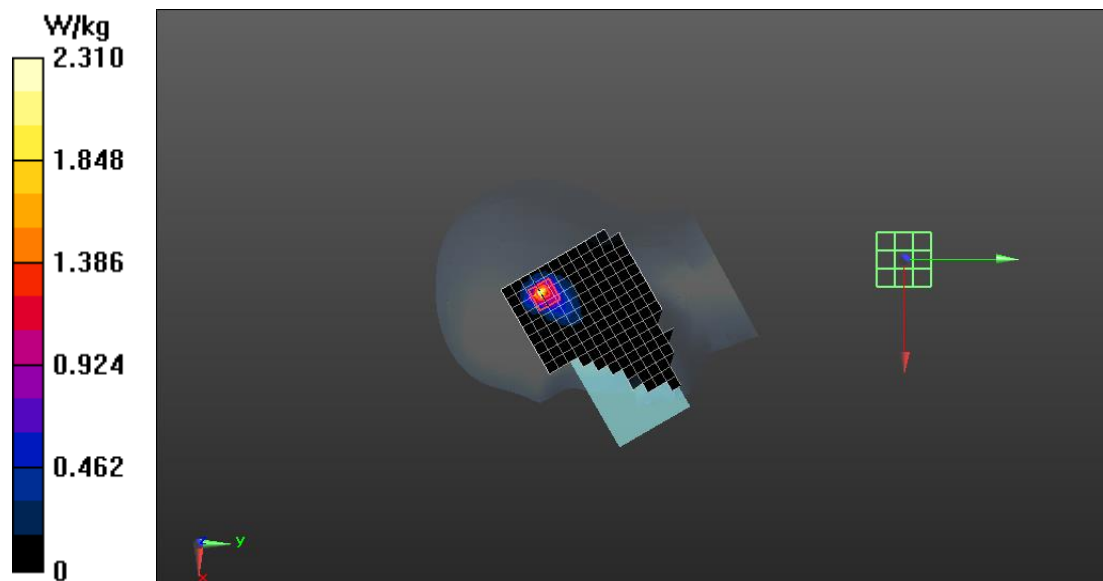

5.1G WIFI Body


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5190 MHz;
Medium parameters used: $f = 5190$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 34.657$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.469 W/kg

Configuration/Body/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.068 W/kg
Maximum value of SAR (measured) = 0.495 W/kg

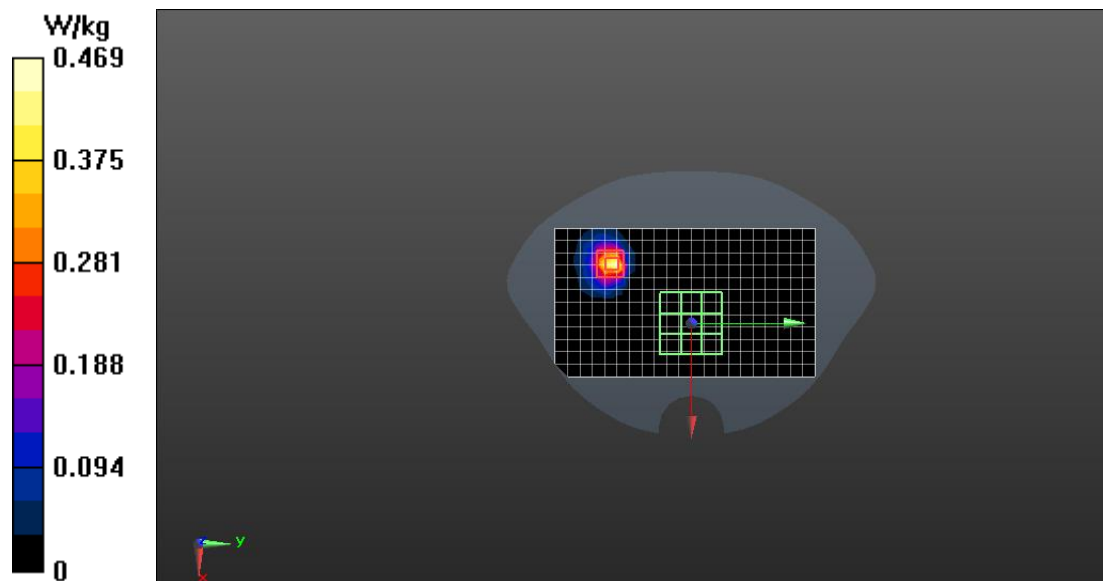

BT Head

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2441 MHz;

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.741$ S/m; $\epsilon_r = 37.867$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0748 W/kg


Configuration/Head/Zoom Scan (8x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.693 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0965 W/kg

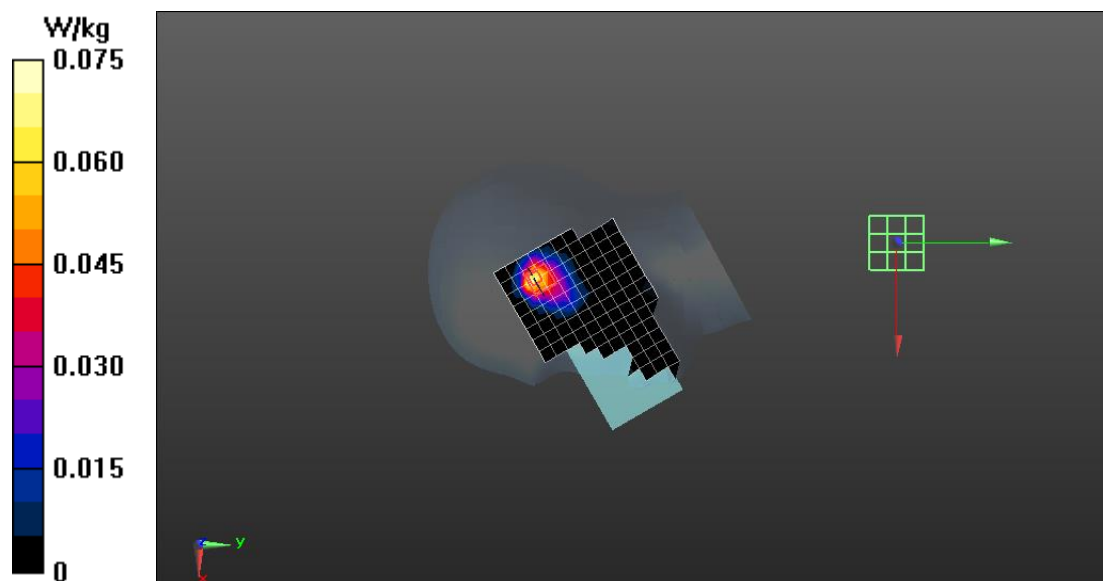

BT Body

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2441 MHz;

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.741$ S/m; $\epsilon_r = 37.867$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0188 W/kg

Configuration/Body/Zoom Scan (7x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.937 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00677 W/kg

Maximum value of SAR (measured) = 0.0235 W/kg

