



深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

天线测试报告

Antenna Test Report

TC: 盛安仕

MN: TU140

RF: 蔡林满

MD: 黄清清

MP: 19918388579

Date: 2024. 8. 9.

REV :V1. 0



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

测试信息

Test information

WIFI ANT Test information

Frequency

2. 4G (2402~2483) Mhz

5G (5150~5850) Mhz

Module
information



Driver version
information



Intel(R) Wi-Fi 6 AX101

Driver Provider: Intel

Driver Date: 8/7/2023


Driver Version: 22.250.1.2

Digital Signer: Microsoft Windows Hardware Compatibility
Publisher

测试环境

Test environment

	测试项目	测试设备
S参数 (S-parameter)	1. 电压驻波比 (VSWR) 2. 回波损耗 (Rrtun Loss)	网络分析仪: Agilent8753ES
2. 有源测试 (Active)	1. 发射功率 (TRP) 2. 接收灵敏度 (TIS) 3. 屏灭/屏亮	1. 暗室: 5*3*3m (3D) Chamber 2. 综测仪: Agilent8960 CMW500
3. 无源测试 (Passive)	1. 天线增益 (Gain) 2. 天线效率 (Efficiency)	1. 暗室: 5*3*3m (3D) Chamber 2. 网络分析仪: Agilent 8753ES

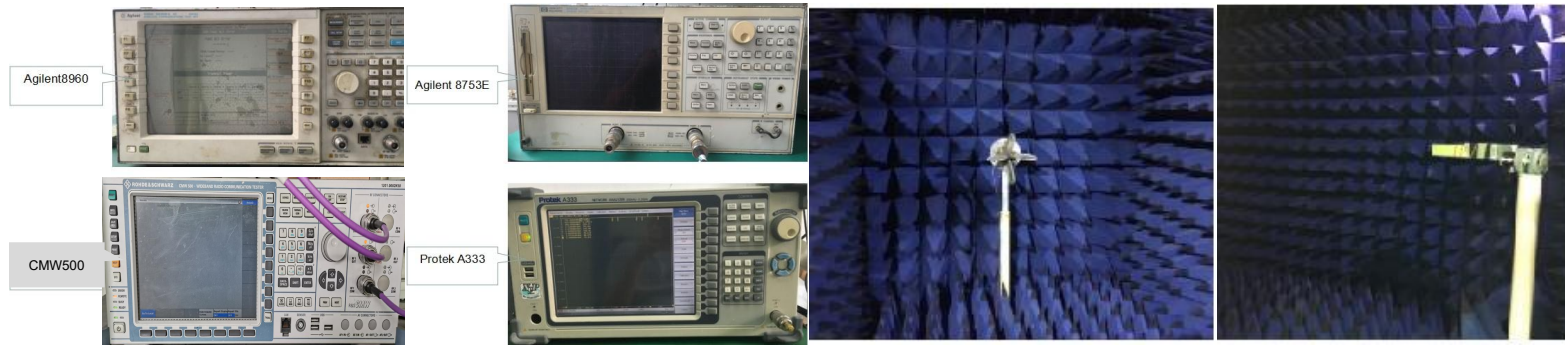



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

天线位置

Antenna position






ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

匹配电路
Matching circuit

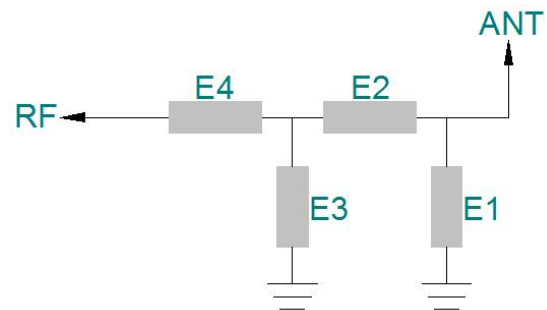


	电容 (PF)	电感 (NH)
E1(0402)		
E2(0402)		
E3(0402)		
E4(0402)		

Matching circuit schematic & bit number diagram



无源测试数据
Passive test data

MAIN ANT S11-VSWR&Return Loss

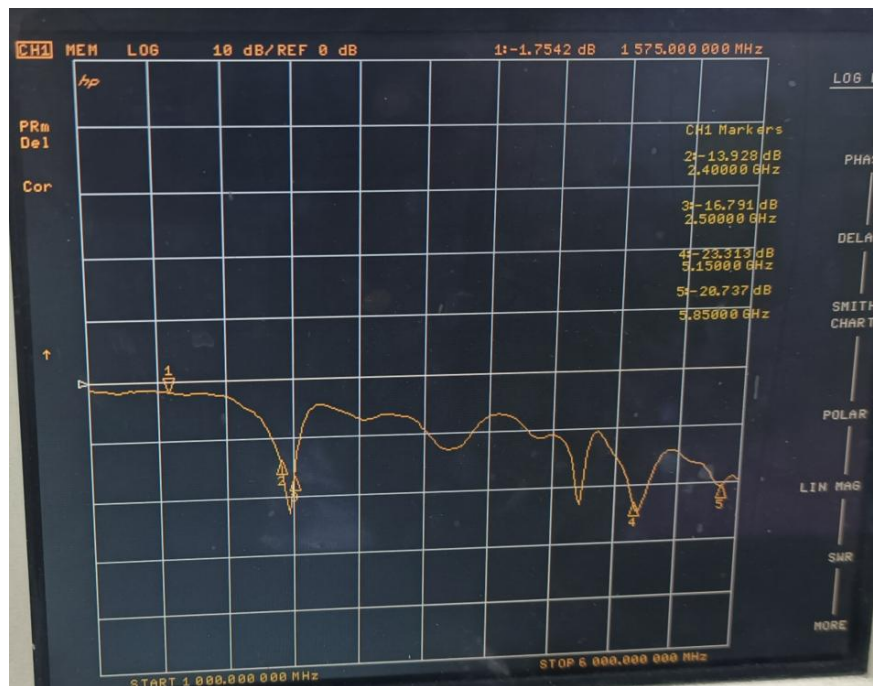

Frequency (MHZ)	2400	2500	5150	5850
Return Loss (DB)	-13.92	-16.79	-23.31	-20.73



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

无源测试数据

Passive test data

MAIN ANT GAIN&Efficiency-WIFI2.4G/BT

Passive Test For WIFI2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
2400	52.71	-2.78	1.32	-0.83	35.584	17.127	1.32	-17.37
2410	50.86	-2.94	1.08	-1.07	34.175	16.685	1.08	-17.01
2420	51.79	-2.86	1.18	-0.97	34.585	17.21	1.18	-15.88
2430	51.3	-2.9	1.06	-1.09	34.194	17.108	1.06	-15.06
2440	50.23	-2.99	0.92	-1.23	33.463	16.767	0.92	-14.11
2450	48.18	-3.17	0.87	-1.28	32.022	16.163	0.87	-13.28
2460	48.01	-3.19	1.05	-1.1	31.805	16.204	1.05	-13.19
2470	48.04	-3.18	1.24	-0.91	31.776	16.269	1.24	-12.45
2480	46.73	-3.3	1.19	-0.96	30.526	16.206	1.19	-12.17
2490	44.14	-3.55	0.92	-1.23	28.553	15.584	0.92	-12.33
2500	44.45	-3.52	1.04	-1.11	28.629	15.823	1.04	-12.8



ANTENNA


深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD


无源测试数据
Passive test data

MAIN ANT Direction of figure(2.4/BT)


2400.000MHz




2400.000MHz H




2450.000MHz




2450.000MHz H




2500.000MHz




2500.000MHz H




2400.000MHz E1




2400.000MHz E2




2450.000MHz E1




2450.000MHz E2



2500.000MHz E1



2500.000MHz E2





ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

无源测试数据
Passive test data

MAIN ANT GAIN&Efficiency-WIFI 5G

Passive Test For WIFI5G								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
5150	27.46	-5.61	0.55	-1.6	13.501	13.959	0.55	-16.22
5170	25.6	-5.92	0.57	-1.58	12.441	13.16	0.57	-15.1
5190	28.77	-5.41	1.24	-0.91	13.849	14.921	1.24	-16.38
5210	28.38	-5.47	0.86	-1.29	13.64	14.742	0.86	-18.16
5230	31.88	-4.96	0.98	-1.17	15.263	16.621	0.98	-16.96
5250	31.55	-5.01	0.74	-1.41	14.884	16.661	0.74	-19.18
5270	36.72	-4.35	1.21	-0.94	17.067	19.65	1.21	-21.34
5290	35.93	-4.45	1.04	-1.11	16.574	19.355	1.04	-19.24
5310	35.5	-4.5	0.77	-1.38	16.475	19.028	0.77	-16.29
5330	37.5	-4.26	0.67	-1.48	17.504	19.997	0.67	-15.76
5350	39.4	-4.05	0.65	-1.5	18.509	20.887	0.65	-14.63
5370	40.02	-3.98	0.68	-1.47	18.844	21.177	0.68	-15.24
5390	36.19	-4.41	0.67	-1.48	17.053	19.136	0.67	-19.04
5410	44.23	-3.54	1.9	-0.25	20.866	23.369	1.9	-17.56
5430	39.1	-4.08	1.33	-0.82	18.599	20.499	1.33	-17.19
5450	43.51	-3.61	1.49	-0.66	20.754	22.761	1.49	-15.52
5470	41.09	-3.86	1.32	-0.83	19.368	21.719	1.32	-15.41
5490	41.11	-3.86	1.72	-0.43	19.27	21.839	1.72	-15.42
5510	41.62	-3.81	1.72	-0.43	19.561	22.06	1.72	-16.19
5530	40.63	-3.91	1.55	-0.6	19.017	21.612	1.55	-17.92
5550	43.41	-3.62	2.27	0.12	19.903	23.504	2.27	-18.36
5570	38.53	-4.14	2	-0.15	17.353	21.178	2	-17.98
5590	40.09	-3.97	2.06	-0.09	17.835	22.252	2.06	-17.07
5610	36.37	-4.39	1.54	-0.61	16.191	20.18	1.54	-18.04
5630	39.69	-4.01	1.95	-0.2	17.419	22.267	1.95	-17.32
5650	38.27	-4.17	1.85	-0.3	16.524	21.747	1.85	-17.16
5670	38.26	-4.17	1.67	-0.48	16.455	21.804	1.67	-17.06
5690	39.85	-4	1.46	-0.69	17.349	22.498	1.46	-17.51
5710	37.49	-4.26	1.16	-0.99	16.467	21.02	1.16	-18.7
5730	44.65	-3.5	2.03	-0.12	19.466	25.181	2.03	-17.96
5750	38.54	-4.14	1.2	-0.95	16.963	21.573	1.2	-18.94
5770	43.3	-3.63	1.45	-0.7	19.557	23.746	1.45	-16.79
5790	39.51	-4.03	1.21	-0.94	18.299	21.206	1.21	-17.05
5810	43.43	-3.62	1.56	-0.59	20.293	23.134	1.56	-17.1
5830	42.45	-3.72	1.41	-0.74	20.093	22.36	1.41	-15.99
5850	47.37	-3.24	2	-0.15	22.594	24.779	2	-14.04



ANTENNA



深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD


无源测试数据
Passive test data

MAIN ANT Direction of figure(5G)



5150.000MHz




5150.000MHz H





5490.000MHz




5490.000MHz H




5850.000MHz




5850.000MHz H




5150.000MHz E1




5150.000MHz E2




5490.000MHz E1




5490.000MHz E2



5850.000MHz E1




5850.000MHz E2





无源测试数据
Passive test data

AUX ANT S11-VSWR&Return Loss

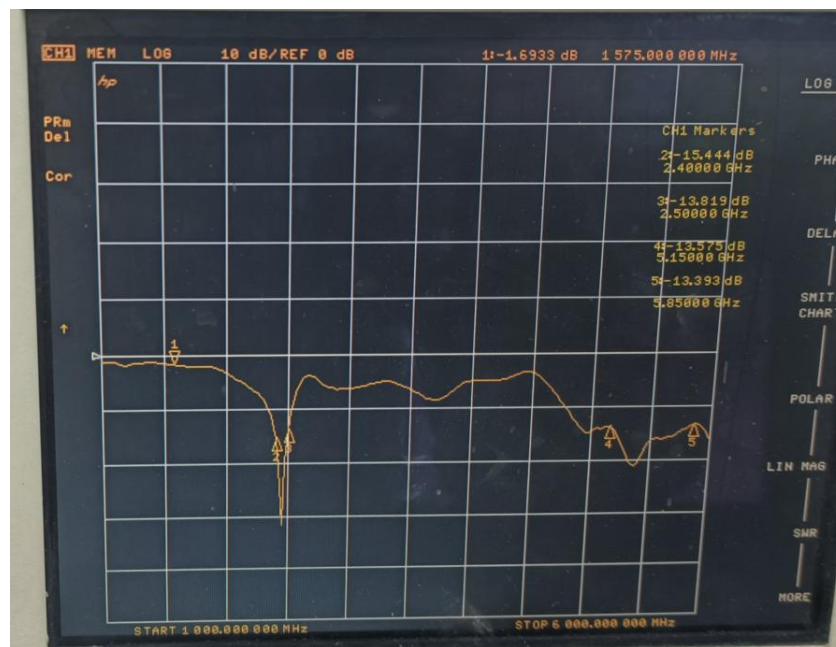

Frequency (MHZ)	2400	2500	5150	5850
Return Loss (DB)	-15.44	-13.81	-13.57	-13.39



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

无源测试数据

Passive test data

AUX ANT GAIN&Efficiency-WIFI2.4G/BT

Passive Test For WIFI2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
2400	54.11	-2.67	3.25	1.1	35.724	18.384	3.25	-14.26
2410	53.43	-2.72	3.14	0.99	35.112	18.322	3.14	-13.55
2420	52.83	-2.77	2.85	0.7	33.943	18.89	2.85	-13.44
2430	51.63	-2.87	2.48	0.33	32.861	18.773	2.48	-13.78
2440	52.36	-2.81	2.85	0.7	33.366	18.99	2.85	-14.31
2450	52.16	-2.83	3.11	0.96	33.475	18.682	3.11	-14.73
2460	51.12	-2.91	2.68	0.53	32.639	18.48	2.68	-14.69
2470	50.05	-3.01	2.51	0.36	31.788	18.258	2.51	-14.33
2480	50.78	-2.94	2.9	0.75	32.476	18.304	2.9	-14.22
2490	51	-2.92	3.37	1.22	32.863	18.134	3.37	-14.39
2500	49.87	-3.02	3	0.85	31.372	18.501	3	-13.9




ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

无源测试数据
Passive test data

AUX ANT Direction of figure(2.4/BT)

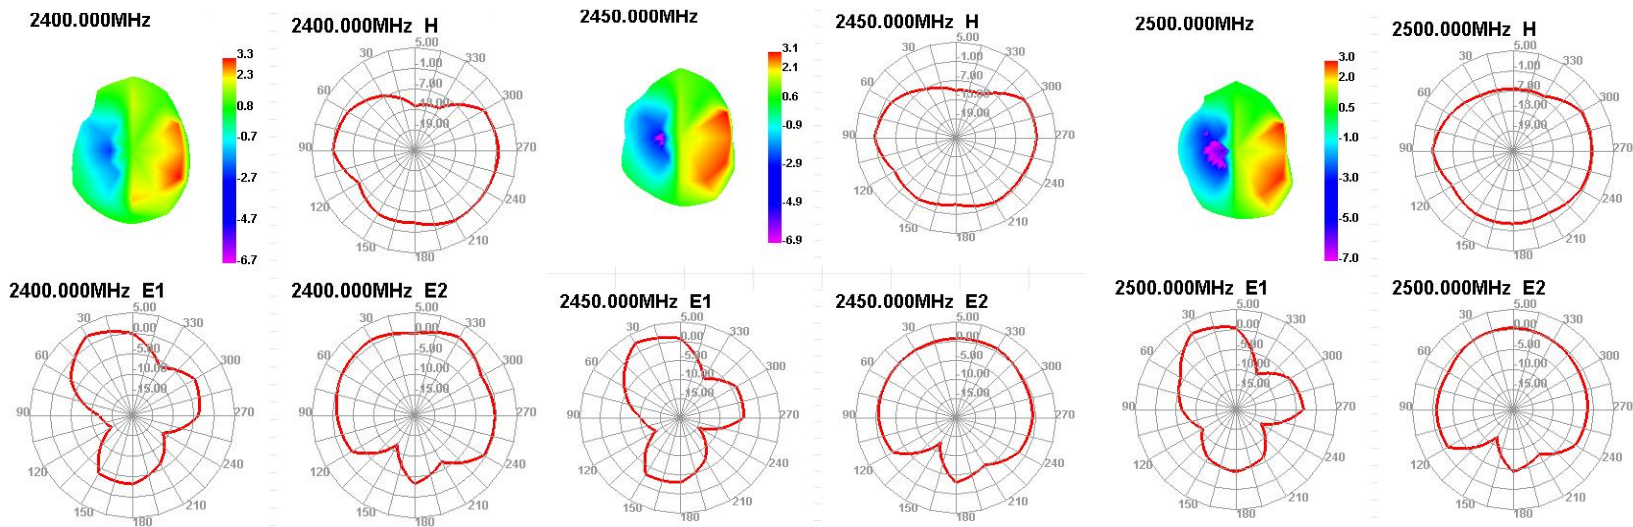



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

无源测试数据

Passive test data

AUX ANT GAIN&Efficiency-WIFI 5G

Passive Test For WIFI5G								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
5150	26.31	-5.8	-0.34	-2.49	9.955	16.352	-0.34	-16.8
5170	28.86	-5.4	0.32	-1.83	11.357	17.498	0.32	-16.31
5190	28.05	-5.52	-0.33	-2.48	11.29	16.756	-0.33	-16.26
5210	32.52	-4.88	0.08	-2.07	13.722	18.795	0.08	-15.86
5230	30.27	-5.19	-0.55	-2.7	12.803	17.469	-0.55	-16.47
5250	32.7	-4.85	-0.32	-2.47	14.102	18.603	-0.32	-17.12
5270	33.88	-4.7	-0.15	-2.3	14.436	19.441	-0.15	-20.3
5290	33.8	-4.71	-0.43	-2.58	14.329	19.473	-0.43	-23.42
5310	31.57	-5.01	-0.85	-3	13.277	18.29	-0.85	-24.82
5330	31.06	-5.08	-0.81	-2.96	13.05	18.007	-0.81	-22.7
5350	33.06	-4.81	-0.47	-2.62	13.947	19.117	-0.47	-24.88
5370	31.72	-4.99	-0.64	-2.79	13.266	18.455	-0.64	-23.57
5390	28.09	-5.51	-1.11	-3.26	11.791	16.303	-1.11	-24.34
5410	32.56	-4.87	-0.12	-2.27	14.247	18.316	-0.12	-22.1
5430	29.81	-5.26	-0.24	-2.39	13.36	16.449	-0.24	-19.33
5450	33.69	-4.72	0.22	-1.93	15.18	18.512	0.22	-15.86
5470	31.71	-4.99	-0.46	-2.61	14.343	17.37	-0.46	-15.55
5490	33.66	-4.73	-0.25	-2.4	15.319	18.336	-0.25	-15.11
5510	34.3	-4.65	-0.01	-2.16	15.661	18.643	-0.01	-15.62
5530	36.9	-4.33	0.08	-2.07	17.09	19.81	0.08	-14.39
5550	39.18	-4.07	0.16	-1.99	18.475	20.703	0.16	-13.72
5570	38.96	-4.09	0.39	-1.76	18.645	20.314	0.39	-15.41
5590	41.56	-3.81	0.72	-1.43	19.886	21.673	0.72	-16.8
5610	38.02	-4.2	0.59	-1.56	18.365	19.654	0.59	-19.58
5630	40.66	-3.91	0.81	-1.34	19.819	20.837	0.81	-15.92
5650	36.37	-4.39	0.29	-1.86	17.466	18.9	0.29	-15.12
5670	37.84	-4.22	0.4	-1.75	18.065	19.776	0.4	-15.75
5690	34.22	-4.66	0.24	-1.91	16.112	18.105	0.24	-18.04
5710	33.2	-4.79	-0.06	-2.21	15.566	17.63	-0.06	-16.87
5730	36.48	-4.38	0.47	-1.68	16.98	19.5	0.47	-15.49
5750	31.76	-4.98	-0.37	-2.52	14.789	16.975	-0.37	-20.01
5770	35.68	-4.48	0.17	-1.98	16.724	18.958	0.17	-15.23
5790	32.5	-4.88	-0.29	-2.44	15.41	17.094	-0.29	-14.67
5810	36.48	-4.38	0.13	-2.02	17.448	19.033	0.13	-13.77
5830	35.52	-4.5	0.5	-1.65	17.066	18.455	0.5	-14.13
5850	39.83	-4	1.23	-0.92	19.19	20.642	1.23	-14.09




ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuan Chuang TECHNOLOGY CO., LTD

无源测试数据
Passive test data

AUX ANT Direction of figure(5G)

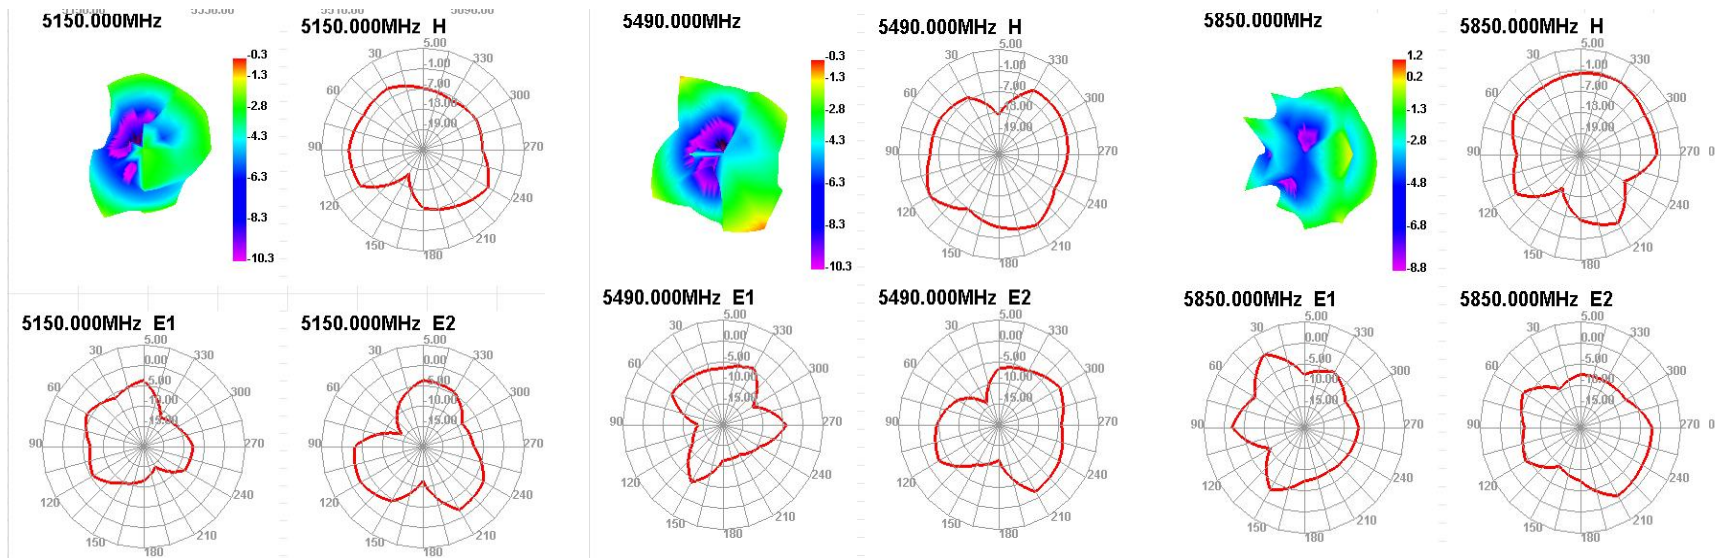



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

有源测试数据
Active test data

802.11b	Frequency	TRP		TIS	
	2412	CH1 11Mbps	12.45	CH1 11Mbps	-76.32
	2437	CH6 11Mbps	12.05	CH6 11Mbps	-74.69
	2467	CH11 11Mbps	11.24	CH11 11Mbps	-72.57
802.11a		TRP		TIS	
	5180	CH36 6Mbps	9.18	CH36 54Mbps	-66.84
	5300	CH60 6Mbps	10.06	CH60 54Mbps	-66.52
	5805	CH161 6Mbps	11.55	CH161 54Mbps	-69.52

吞吐量测试 Throughput test

2.4G wifi The vomiting test			
up	103M	Go down	150M
	<pre> [ID] Interval Transfer Bandwidth [392] 17.0-18.0 sec 12.5 MBytes 105 Mbits/sec [ID] Interval Transfer Bandwidth [392] 18.0-19.0 sec 12.9 MBytes 108 Mbits/sec [ID] Interval Transfer Bandwidth [392] 19.0-20.0 sec 9.42 MBytes 79.0 Mbits/sec [ID] Interval Transfer Bandwidth [392] 20.0-21.0 sec 10.4 MBytes 87.0 Mbits/sec [ID] Interval Transfer Bandwidth [392] 21.0-22.0 sec 11.8 MBytes 99.4 Mbits/sec [ID] Interval Transfer Bandwidth [392] 22.0-23.0 sec 9.85 MBytes 82.6 Mbits/sec [ID] Interval Transfer Bandwidth [392] 23.0-24.0 sec 14.5 MBytes 121 Mbits/sec [ID] Interval Transfer Bandwidth [392] 24.0-25.0 sec 14.6 MBytes 123 Mbits/sec [ID] Interval Transfer Bandwidth [392] 25.0-26.0 sec 14.9 MBytes 125 Mbits/sec [ID] Interval Transfer Bandwidth [392] 26.0-27.0 sec 12.6 MBytes 106 Mbits/sec [ID] Interval Transfer Bandwidth [392] 27.0-28.0 sec 11.5 MBytes 96.1 Mbits/sec [ID] Interval Transfer Bandwidth [392] 28.0-29.0 sec 12.5 MBytes 105 Mbits/sec [ID] Interval Transfer Bandwidth [392] 29.0-30.0 sec 12.6 MBytes 106 Mbits/sec [ID] Interval Transfer Bandwidth [392] 0.0-30.0 sec 368 MBytes 103 Mbits/sec </pre>		<pre> [ID] Interval Transfer Bandwidth [356] 17.0-18.0 sec 17.6 MBytes 148 Mbits/sec [ID] Interval Transfer Bandwidth [356] 18.0-19.0 sec 19.1 MBytes 161 Mbits/sec [ID] Interval Transfer Bandwidth [356] 19.0-20.0 sec 18.9 MBytes 158 Mbits/sec [ID] Interval Transfer Bandwidth [356] 20.0-21.0 sec 19.9 MBytes 167 Mbits/sec [ID] Interval Transfer Bandwidth [356] 21.0-22.0 sec 17.6 MBytes 147 Mbits/sec [ID] Interval Transfer Bandwidth [356] 22.0-23.0 sec 16.6 MBytes 139 Mbits/sec [ID] Interval Transfer Bandwidth [356] 23.0-24.0 sec 17.0 MBytes 142 Mbits/sec [ID] Interval Transfer Bandwidth [356] 24.0-25.0 sec 18.4 MBytes 154 Mbits/sec [ID] Interval Transfer Bandwidth [356] 25.0-26.0 sec 16.4 MBytes 138 Mbits/sec [ID] Interval Transfer Bandwidth [356] 26.0-27.0 sec 17.3 MBytes 145 Mbits/sec [ID] Interval Transfer Bandwidth [356] 27.0-28.0 sec 18.8 MBytes 158 Mbits/sec [ID] Interval Transfer Bandwidth [356] 28.0-29.0 sec 19.3 MBytes 162 Mbits/sec [ID] Interval Transfer Bandwidth [356] 29.0-30.0 sec 18.6 MBytes 156 Mbits/sec [ID] Interval Transfer Bandwidth [356] 0.0-30.0 sec 536 MBytes 150 Mbits/sec </pre>




ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

吞吐量测试

Throughput test

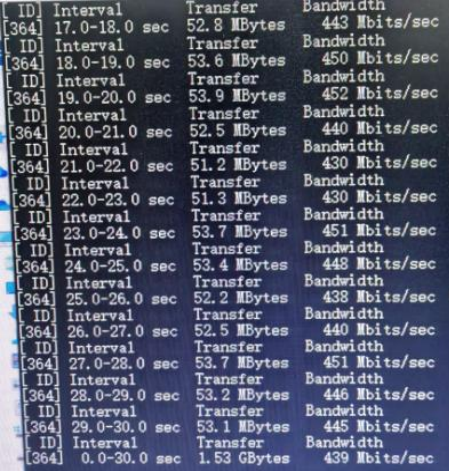5G wifi The vomiting test			
up	248M	Go down	439M
	 <pre> [ID] Interval Transfer Bandwidth [384] 17.0-18.0 sec 30.0 MBytes 252 Mbits/sec [ID] Interval Transfer Bandwidth [384] 18.0-19.0 sec 31.3 MBytes 263 Mbits/sec [ID] Interval Transfer Bandwidth [384] 19.0-20.0 sec 37.5 MBytes 314 Mbits/sec [ID] Interval Transfer Bandwidth [384] 20.0-21.0 sec 28.7 MBytes 241 Mbits/sec [ID] Interval Transfer Bandwidth [384] 21.0-22.0 sec 23.1 MBytes 193 Mbits/sec [ID] Interval Transfer Bandwidth [384] 22.0-23.0 sec 32.2 MBytes 270 Mbits/sec [ID] Interval Transfer Bandwidth [384] 23.0-24.0 sec 32.8 MBytes 275 Mbits/sec [ID] Interval Transfer Bandwidth [384] 24.0-25.0 sec 35.2 MBytes 295 Mbits/sec [ID] Interval Transfer Bandwidth [384] 25.0-26.0 sec 31.4 MBytes 264 Mbits/sec [ID] Interval Transfer Bandwidth [384] 26.0-27.0 sec 31.0 MBytes 260 Mbits/sec [ID] Interval Transfer Bandwidth [384] 27.0-28.0 sec 26.2 MBytes 219 Mbits/sec [ID] Interval Transfer Bandwidth [384] 28.0-29.0 sec 27.8 MBytes 233 Mbits/sec [ID] Interval Transfer Bandwidth [384] 29.0-30.0 sec 29.8 MBytes 250 Mbits/sec [ID] Interval Transfer Bandwidth [384] 30.0-31.0 sec 887 MBytes 248 Mbits/sec </pre>		 <pre> [ID] Interval Transfer Bandwidth [364] 17.0-18.0 sec 52.8 MBytes 443 Mbits/sec [ID] Interval Transfer Bandwidth [364] 18.0-19.0 sec 53.6 MBytes 450 Mbits/sec [ID] Interval Transfer Bandwidth [364] 19.0-20.0 sec 53.9 MBytes 452 Mbits/sec [ID] Interval Transfer Bandwidth [364] 20.0-21.0 sec 52.5 MBytes 440 Mbits/sec [ID] Interval Transfer Bandwidth [364] 21.0-22.0 sec 51.2 MBytes 430 Mbits/sec [ID] Interval Transfer Bandwidth [364] 22.0-23.0 sec 51.3 MBytes 430 Mbits/sec [ID] Interval Transfer Bandwidth [364] 23.0-24.0 sec 53.7 MBytes 451 Mbits/sec [ID] Interval Transfer Bandwidth [364] 24.0-25.0 sec 53.4 MBytes 448 Mbits/sec [ID] Interval Transfer Bandwidth [364] 25.0-26.0 sec 52.2 MBytes 438 Mbits/sec [ID] Interval Transfer Bandwidth [364] 26.0-27.0 sec 52.5 MBytes 440 Mbits/sec [ID] Interval Transfer Bandwidth [364] 27.0-28.0 sec 53.7 MBytes 451 Mbits/sec [ID] Interval Transfer Bandwidth [364] 28.0-29.0 sec 53.2 MBytes 446 Mbits/sec [ID] Interval Transfer Bandwidth [364] 29.0-30.0 sec 53.1 MBytes 445 Mbits/sec [ID] Interval Transfer Bandwidth [364] 30.0-31.0 sec 1.53 GBytes 439 Mbits/sec </pre>

合作共赢

