

TEST REPORT

FCC ID:2BLYK-K118

Report No. : SSP24120134-1E

Applicant : Minnie (Shenzhen) E-commerce Co., Ltd

Product Name : Bluetooth headset

Model Name : K118

Test Standard : FCC Part 15 Subpart B

Date of Issue : 2024-12-16



Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	Minnie (Shenzhen) E-commerce Co., Ltd 502, 5th Floor, China Zhenhua Industrial Park Building, No. 64 Heping Road, Qinghua Community, Longhua Street, Longhua District, Shenzhen, China
Manufacturer:	Minnie (Shenzhen) E-commerce Co., Ltd 502, 5th Floor, China Zhenhua Industrial Park Building, No. 64 Heping Road, Qinghua Community, Longhua Street, Longhua District, Shenzhen, China
Product Name:	Bluetooth headset
Brand Name:	-
Main Model:	K118 Y113S, Y115, K121, K120S, K122, T5, T6, N113S, N115S, NK120, NK121,
Series Models:	NK118, NT5, APN01
Test Standard:	FCC Part 15 Subpart B ANSI C63.4-2014
Date of Test	2024-12-12 to 2024-12-16
Test Result:	PASS
Tested By	<u>Coke Huang</u> (Coke Huang)
Reviewed By:	<u>Lieber Ouyang</u> (Lieber Ouyang)
Authorized Signatory:	<u>Lahm Peng</u> (Lahm Peng)



Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.

CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	5
1.3 Compliance Standards.....	6
1.4 Test Facilities.....	6
1.5 Measurement Uncertainty.....	6
1.6 List of Test and Measurement Instruments	7
2. Summary of Test Results	8
3. Conducted Emissions	9
3.1 Standard and Limit.....	9
3.2 Test Procedure.....	9
3.3 Test Data and Results	9
4. Radiated Disturbance.....	12
4.1 Standard and Limit.....	12
4.2 Test Procedure.....	12
4.3 Test Data and Results	12

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2024-12-16	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	Bluetooth headset
Trade Name:	-
Main Model:	K118
Series Models:	Y113S, Y115, K121, K120S, K122, T5, T6, N113S, N115S, NK120, NK121, NK118, NT5, APN01
Class of Equipment:	<input type="checkbox"/> Class A <input checked="" type="checkbox"/> Class B
Highest Internal Frequency:	<108MHz
Rated Voltage:	DC 3.7V by battery, USB 5V Charing
Battery:	DC 3.7V, 50mAh
<p>Note 1: The test data is gathered from a production sample, provided by the manufacturer.</p> <p>Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.</p>	

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Working	DC 3.7V	
TM2	Charging	AC 120V/60Hz	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
USB cable	100	Unshielded	Without Ferrite
-	-	-	-
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Adapter	HUAWEI	HW-110600C02	JL28L4P2D06114
-	-	-	-
-	-	-	-
<p>The equipment under test (EUT) was configured to measure its highest possible emission and immunity level. The test modes were adapted according to the operation manual for use.</p>			

1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart B	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Unintentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart B	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Unintentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

1.4 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No.:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.5 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Disturbance	9kHz ~30MHz	±1.64 dB
Radiated Disturbance	30MHz ~ 1GHz	±3.32 dB
Radiated Disturbance	1GHz ~ 18GHz	±3.50 dB

1.6 List of Test and Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2024-08-07	2025-08-06
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2024-08-07	2025-08-06
Amplifier	SCHWARZBECK	BBV 9743B	00251	2024-08-07	2025-08-06
Amplifier	HUABO	YXL0518-2.5-45	--	2024-08-07	2025-08-06
Loop Antenna	DAZE	ZN30900C	21104	2024-08-03	2025-08-02
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2024-08-03	2025-08-02
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2024-08-03	2025-08-02
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A

2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.107	Conducted Emissions	Passed
FCC Part 15.109	Radiated Emissions	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

3. Conducted Emissions

3.1 Standard and Limit


According to the rule FCC Part 15.107, Conducted limit, the limit for a class A and class B device as below:

Frequency of Emission (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	79	66	66 to 56	56 to 46
0.5-5	73	60	56	46
5-30	73	60	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz
 Note 2: The lower limit applies at the band edges

3.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

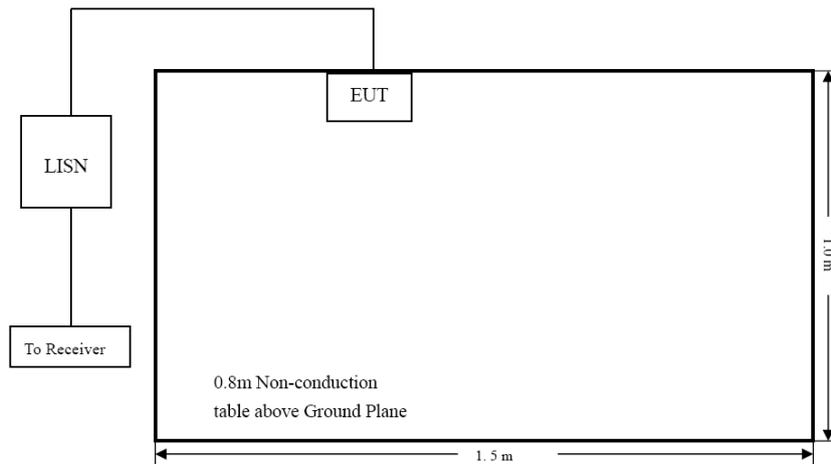


Test Setup Block Diagram

3.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.107 standard limit for a Class B device, and with the worst case as below:


Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions	
Tested Model:	K118
Tested Mode:	TM2
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

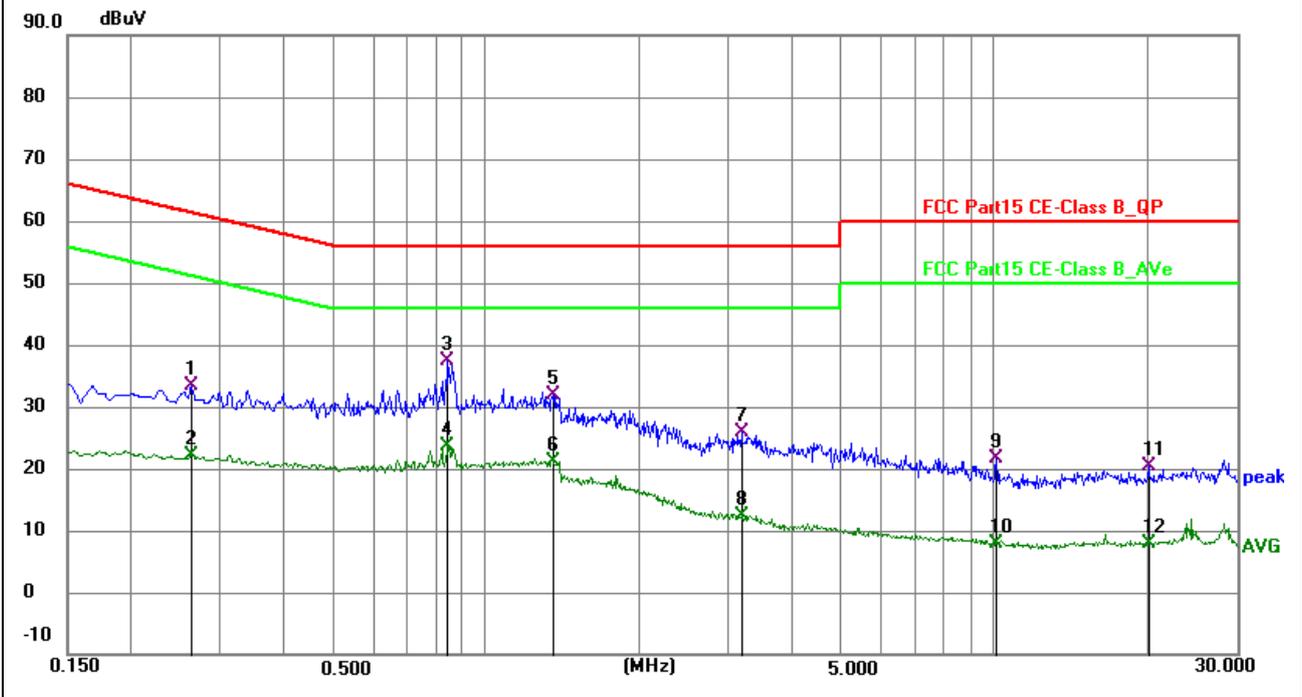

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2625	23.95	9.33	33.28	61.35	-28.07	QP	P	
2	0.2625	12.80	9.33	22.13	51.35	-29.22	AVG	P	
3 *	0.8430	28.00	9.40	37.40	56.00	-18.60	QP	P	
4	0.8430	14.27	9.40	23.67	46.00	-22.33	AVG	P	
5	1.3560	22.39	9.44	31.83	56.00	-24.17	QP	P	
6	1.3560	11.61	9.44	21.05	46.00	-24.95	AVG	P	
7	3.1785	16.43	9.50	25.93	56.00	-30.07	QP	P	
8	3.1785	2.93	9.50	12.43	46.00	-33.57	AVG	P	
9	10.0905	11.96	9.56	21.52	60.00	-38.48	QP	P	
10	10.0905	-1.62	9.56	7.94	50.00	-42.06	AVG	P	
11	20.0805	10.29	9.99	20.28	60.00	-39.72	QP	P	
12	20.0805	-2.19	9.99	7.80	50.00	-42.20	AVG	P	

Test Plots and Data of Conducted Emissions	
Tested Model:	K118
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

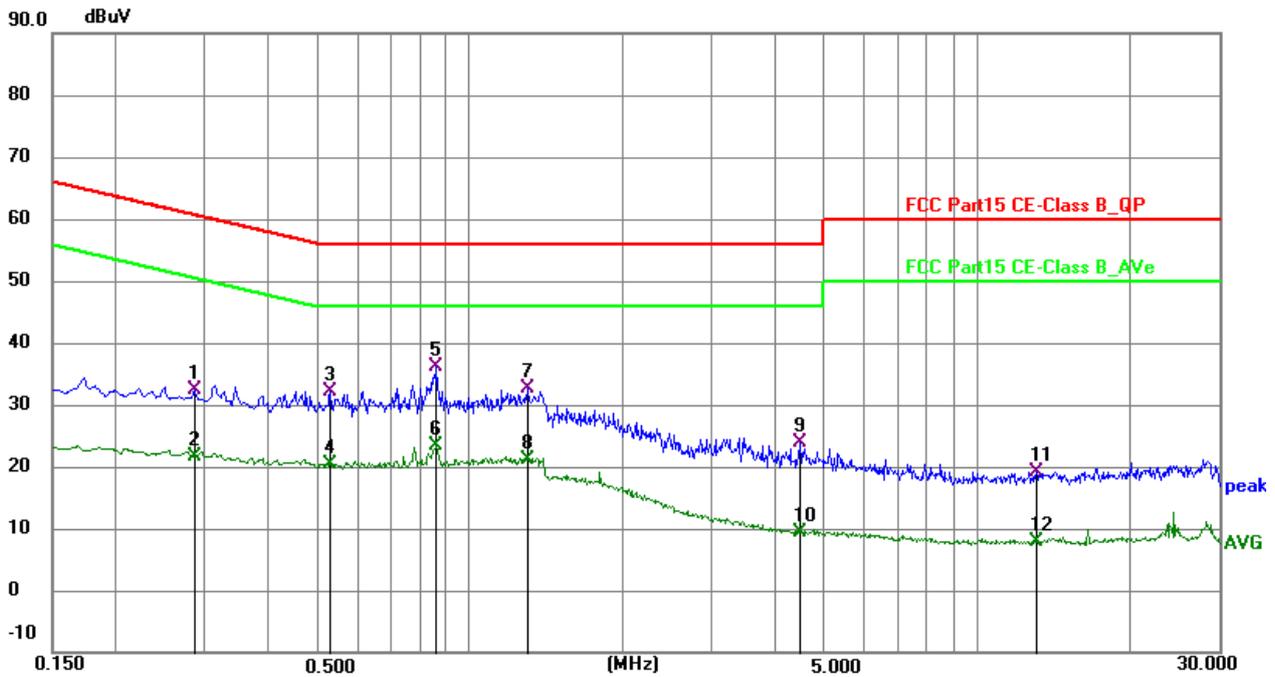

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2850	22.71	9.56	32.27	60.67	-28.40	QP	P	
2	0.2850	12.04	9.56	21.60	50.67	-29.07	AVG	P	
3	0.5280	22.49	9.58	32.07	56.00	-23.93	QP	P	
4	0.5280	10.87	9.58	20.45	46.00	-25.55	AVG	P	
5 *	0.8610	26.43	9.58	36.01	56.00	-19.99	QP	P	
6	0.8610	13.74	9.58	23.32	46.00	-22.68	AVG	P	
7	1.2975	22.88	9.63	32.51	56.00	-23.49	QP	P	
8	1.2975	11.55	9.63	21.18	46.00	-24.82	AVG	P	
9	4.4925	14.09	9.74	23.83	56.00	-32.17	QP	P	
10	4.4925	-0.38	9.74	9.36	46.00	-36.64	AVG	P	
11	13.0740	9.44	9.74	19.18	60.00	-40.82	QP	P	
12	13.0740	-1.92	9.74	7.82	50.00	-42.18	AVG	P	

4. Radiated Disturbance

4.1 Standard and Limit


According to the rule FCC Part 15.109, Radiated emission limit for a class A and class B device as below:

Frequency of Emission (MHz)	Class A (3m)	Class B (3m)
	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)
30-88	50	40
88-216	54.0	43.5
216-960	57.0	46
Above 960	60	54

Note: The more stringent limit applies at transition frequencies.

4.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

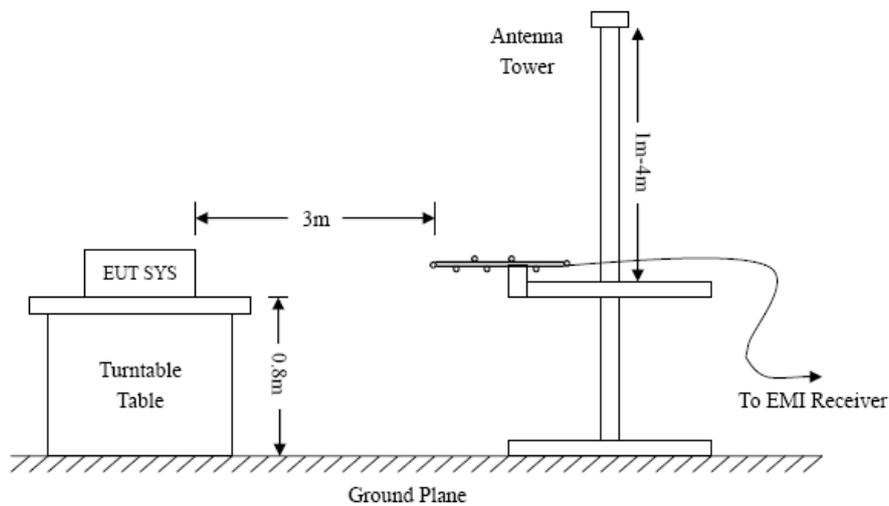


Test Setup Block Diagram

4.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.109 standard limit for a Class B device, and with the worst case as below:


Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Radiated Emissions	
Tested Model:	K118
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Horizontal
Remark:	

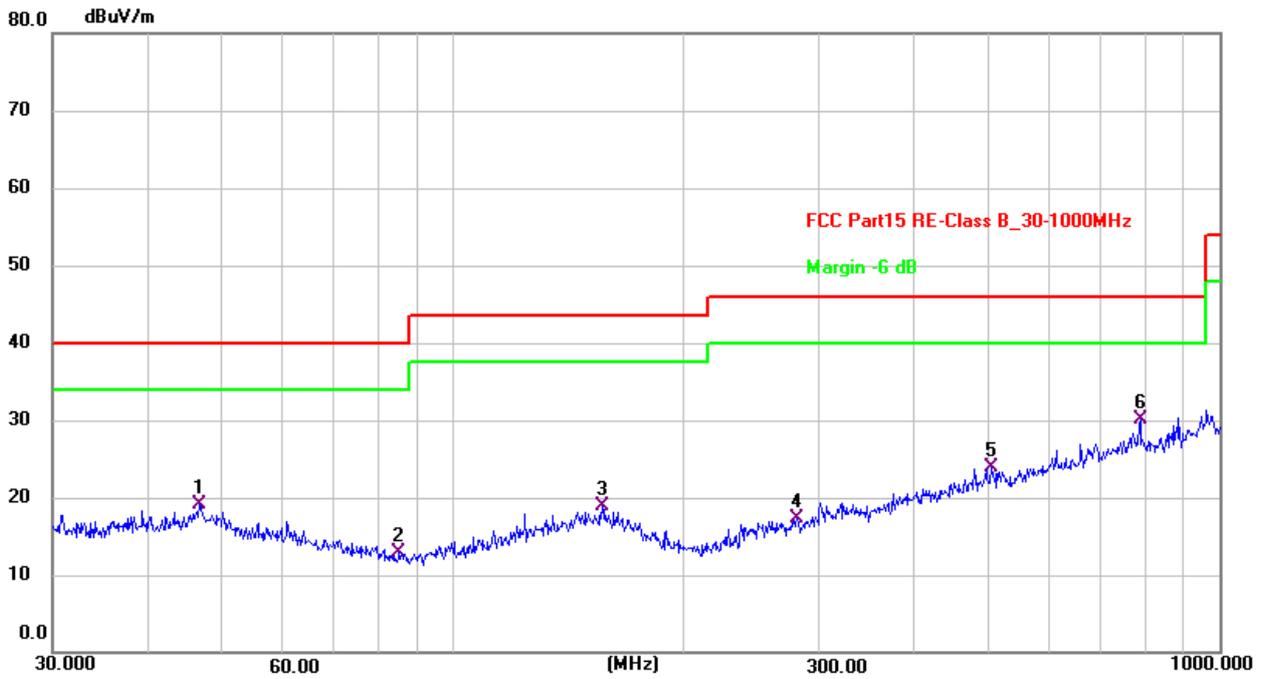

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	46.6664	27.43	-8.30	19.13	40.00	-20.87	QP	100	71	P	
2	84.9995	25.82	-12.97	12.85	40.00	-27.15	QP	100	10	P	
3	156.4578	26.74	-7.82	18.92	43.50	-24.58	QP	100	276	P	
4	281.0075	26.37	-9.02	17.35	46.00	-28.65	QP	100	276	P	
5	502.9395	27.19	-3.23	23.96	46.00	-22.04	QP	100	132	P	
6 *	787.8513	28.79	1.36	30.15	46.00	-15.85	QP	100	10	P	

Test Plots and Data of Radiated Emissions	
Tested Model:	K118
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Vertical
Remark:	

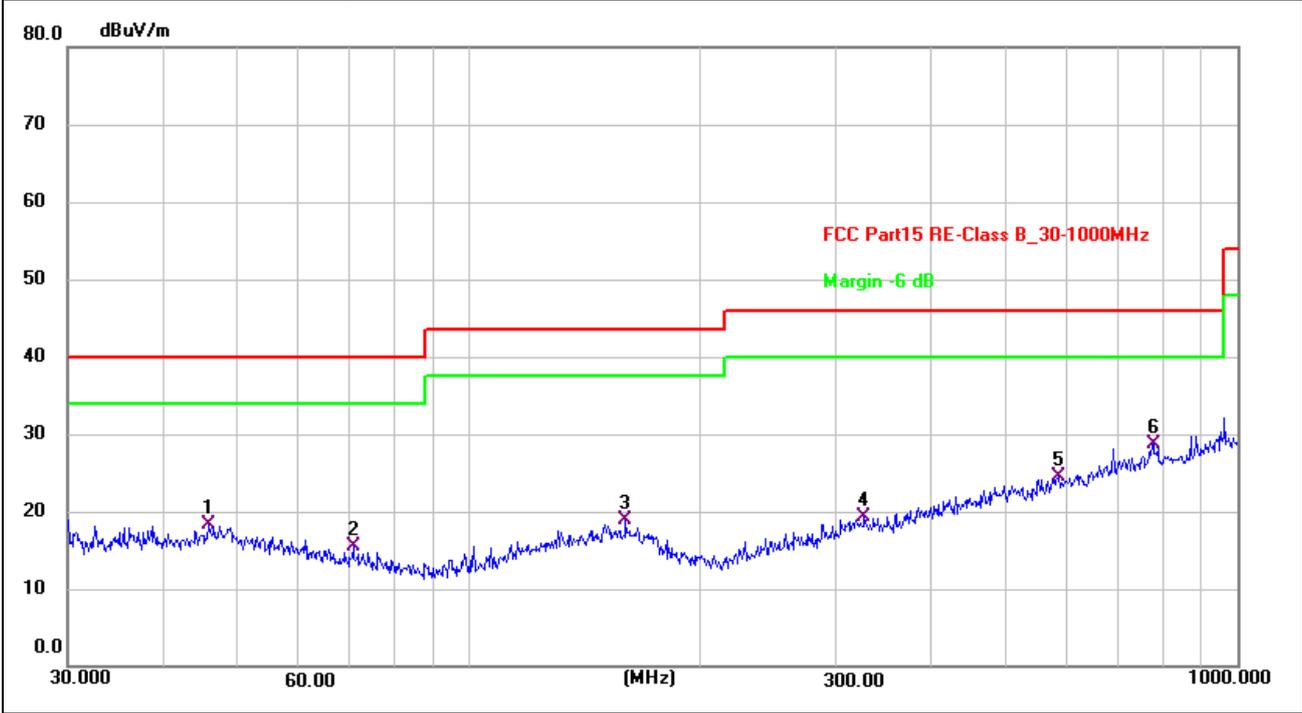

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	45.6948	26.63	-8.28	18.35	40.00	-21.65	QP	100	33	P	
2	70.5836	27.34	-11.78	15.56	40.00	-24.44	QP	100	63	P	
3	159.7844	26.78	-7.87	18.91	43.50	-24.59	QP	100	0	P	
4	326.7395	26.35	-7.11	19.24	46.00	-26.76	QP	100	177	P	
5	584.7895	26.46	-1.96	24.50	46.00	-21.50	QP	100	2	P	
6 *	776.8778	27.47	1.22	28.69	46.00	-17.31	QP	100	2	P	