



TEST REPORT

Report No. : **CTC2025405103**

FCC ID..... : **2BM2I-LC2418**

Applicant : **Shenzhen Xiaopai Technology Co., Ltd.**

Address..... : Unit A 8F 806, skyworth bldg, Gaoxin Ave. 1.S., Nanshan District, Shenzhen, Guangdong Province, China

Manufacturer..... : Shenzhen Xiaopai Technology Co., Ltd.

Address..... : Unit A 8F 806, skyworth bldg, Gaoxin Ave. 1.S., Nanshan District, Shenzhen, Guangdong Province, China

Product Name : **Smart Camera**

Trade Mark : XPAI

Model/Type reference..... : LC2418

Listed Model(s) : /

Standard : **FCC CFR Title 47 Part 15 Subpart E Section 15.407**

Test Report Form No : CTC-TR-062_A2

Master TRF : Dated 2025-05-12

Date of receipt of test sample..... : Jul. 03, 2025

Date of testing..... : Jul. 03, 2025 ~ Jul. 15, 2025

Date of issue..... : Jul. 18, 2025

Result..... : **PASS**

Compiled by:

(Printed name+signature)

Lucy Lan

Supervised by:

(Printed name+signature)

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents****Page**

1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS.....	7
2. GENERAL INFORMATION	8
2.1. CLIENT INFORMATION	8
2.2. GENERAL DESCRIPTION OF EUT	8
2.3. ACCESSORY EQUIPMENT INFORMATION	10
2.4. OPERATION STATE	11
2.5. MEASUREMENT INSTRUMENTS LIST	14
3. TEST ITEM AND RESULTS	16
3.1. CONDUCTED EMISSION.....	16
3.2. RADIATED EMISSION.....	19
3.3. BAND EDGE EMISSIONS	78
3.4. BANDWIDTH.....	140
3.5. PEAK OUTPUT POWER	185
3.6. POWER SPECTRAL DENSITY	188
3.7. FREQUENCY STABILITY	209
3.8. ANTENNA REQUIREMENT.....	214
3.9. DYNAMIC FREQUENCY SELECTION.....	215

CTC Laboratories, Inc.Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict,
Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of China Inspection And Testing
Society : yz.cncaq.com



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): for 802.11a/n/ac/ax, the test procedure follows the FCC KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2025405103	Jul. 18, 2025	Original



1.3. Test Description

FCC Part 15 Subpart E (15.407)			
Test Item	Standard Section	Result	Test Engineer
Antenna Requirement	15.203	Pass	Marrow
Conducted Emission	15.207	Pass	Marrow
Band Edge Emissions	15.407(b)	Pass	Marrow
26dB Bandwidth & 99% Bandwidth	15.407(a)	Pass	Marrow
6dB Bandwidth (only for UNII-3)	15.407(e)	Pass	Marrow
Peak Output Power	15.407(a)	Pass	Marrow
Power Spectral Density	15.407(a)	Pass	Marrow
Transmitter Radiated Spurious Emission	15.407(b) & 15.209	Pass	Marrow
Frequency Stability	15.407(g)	Pass	Marrow
Dynamic Frequency Selection (DFS)	15.407(h)	Pass	Marrow
Automatically Discontinue Transmission	15.407(c)	Pass	Note 3

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.
3. During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
Emission Bandwidth	$\pm 0.0196\%$	(1)
Maximum Conduct Output Power	$\pm 0.766\text{dB}$	(1)
Power Spectral Density	$\pm 1.22\text{dB}$	(1)
Band Edge Measurements	$\pm 1.328\text{dB}$	(1)
Unwanted Emissions Measurement	9kHz-1GHz: $\pm 0.746\text{dB}$ 1GHz-26GHz: $\pm 1.328\text{dB}$	(1)
Frequency Stability	$\pm 2.76\%$	(1)
Conducted Emissions 9kHz~30MHz	$\pm 3.08\text{ dB}$	(1)
Radiated Emissions 30~1000MHz	$\pm 4.51\text{ dB}$	(1)
Radiated Emissions 1~18GHz	$\pm 5.84\text{ dB}$	(1)
Radiated Emissions 18~40GHz	$\pm 6.12\text{ dB}$	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



1.6. Environmental Conditions

Normal Condition	Temperature	15 °C to 35 °C
	Relative Humidity	20 % to 75 %
	Air Pressure	101 kPa
	Voltage	The normal test voltage for the equipment shall be the nominal voltage for which the equipment was designed.
Extreme Condition	Temperature	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.
	Voltage	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

Normal Condition	T _N =Normal Temperature	25 °C
Extreme Condition	T _L =Lower Temperature	-10 °C
	T _H =Higher Temperature	40 °C



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen Xiaopai Technology Co., Ltd.
Address:	Unit A 8F 806, skyworth bldg, Gaoxin Ave. 1.S., Nanshan District, Shenzhen, Guangdong Province, China
Manufacturer:	Shenzhen Xiaopai Technology Co., Ltd.
Address:	Unit A 8F 806, skyworth bldg, Gaoxin Ave. 1.S., Nanshan District, Shenzhen, Guangdong Province, China
Factory:	Shenzhen Skyworth Digital Technology Co., Ltd. Bao'an Factory
Address:	2-5F, Integration Multi-Storied Building, Skyworth Science and Technology Industrial Park, Tangtou Industrial Zone, Shiyan Street, Baoan District, Shenzhen city, China.

2.2. General Description of EUT

Product Name:	Smart Camera				
Trade Mark:	XPAI				
Model/Type reference:	LC2418				
Listed Model(s):	/				
Model Difference:	/				
Sample ID:	CTC250626-008-S004				
Power Supply:	DC 5V 1.5A from AC/DC Adapter				
Adapter Model	F10L1-050150SPAV-U Input: 100-240V~ 50/60Hz 0.3A Output: 5Vdc/1.5A 7.5W				
Hardware Version:	5800-2ALCR40				
Software Version:	V00001				
5G Wi-Fi					
Operation Band:	☒ U-NII-1	☒ U-NII-2A	☒ U-NII-2C	☒ U-NII-3	
Operation Frequency:	U-NII-1	5150MHz~5250MHz			
	U-NII-2A	5250MHz~5350MHz			
	U-NII-2C	5470MHz~5725MHz			
	U-NII-3	5725MHz~5850MHz			
Support Bandwidth:	802.11a	☒ 20MHz			
	802.11n	☒ 20MHz	☒ 40MHz		
	802.11ac	☒ 20MHz	☒ 40MHz		
	802.11ax	☒ 20MHz	☒ 40MHz		
Modulation:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM)				

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



	802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Antenna Type:	Internal Antenna
Antenna Gain:	3dBi



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
/	/	/	/
Test Software Information			
Name	Version	/	/
SecureCRT	/	/	/

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting.

Operation Frequency List:

Operating Band	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth		160MHz Bandwidth			
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
U-NII-1	36	5180	38	5190	42	5210	50	5250		
	40	5200								
	44	5220	46	5230						
	48	5240								
U-NII-2A	52	5260	54	5270	58	5290				
	56	5280								
	60	5300	62	5310						
	64	5320								
U-NII-2C	100	5500	102	5510	106	5530	114	5570		
	104	5520								
	108	5540	110	5550						
	112	5560								
	116	5580	118	5590	122	5610				
	120	5600								
	124	5620	126	5630						
	128	5640								
	132	5660	134	5670						
	136	5680								
	140	5700								
U-NII-3	149	5745	151	5755	155	5775	/			
	153	5765								
	157	5785	159	5795						
	161	5805								
	165	5825								



Test channel is below:

Operating Band	Test Channel	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth		160MHz Bandwidth	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	CH _L	36	5180	38	5190	/	/	50	5250
	CH _M	40	5200	/	/	42	5210		
	CH _H	48	5240	46	5230	/	/		
U-NII-2A	CH _L	52	5260	54	5270	/	/		
	CH _M	56	5280	/	/	58	5290		
	CH _H	64	5320	62	5310	/	/		
U-NII-2C	CH _L	100	5500	102	5510	106	5530	/	/
	CH _M	116	5580	110	5550	/	/	114	5570
	CH _H	140	5700	134	5670	122	5610	/	/
U-NII-3	CH _L	149	5745	151	5755	/	/	/	/
	CH _M	157	5785	/	/	155	5775	/	/
	CH _H	165	5825	159	5795	/	/	/	/

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Test Mode	Data Rate (worst mode)
802.11a	6Mbps
802.11n(HT20)/ 802.11n(HT40)	HT-MCS0
802.11ac(VHT20)/ 802.11ac(VHT40)	VHT-MCS0
802.11ax(HE20)/ 802.11ax(HE40)	HE-MCS0



Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.
For DFS test items:
The EUT has been tested under test mode condition. The Applicant provides software to control the EUT for staying in DFS mode for testing.



2.5. Measurement Instruments List

RF Test System - SRD						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 13, 2024	Dec. 12, 2025
2	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 13, 2024	Dec. 12, 2025
3	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 13, 2024	Dec. 12, 2025
4	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 13, 2024	Dec. 12, 2025
5	RF Control Unit	Tonscend	JS0806-2	/	Dec. 13, 2024	Dec. 12, 2025
6	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 25, 2025	Mar. 24, 2026
7	RF Cable	HUBER+SUHNER	SUCOFLEX101PE	RF-09	Apr. 16, 2025	Apr. 15, 2026
Test Software						
Name		Manufacturer		Software Version		
JS1120-3		Tonscend		V3.3.38		

Radiated emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 25, 2024	Dec. 24, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 26, 2024	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 13, 2024	Dec. 12, 2025
4	Broadband Amplifier	Schwarzbeck	BBV9743B	259	Dec. 13, 2024	Dec. 12, 2025
5	Mirowave Broadband Amplifier	Schwarzbeck	BBV9718C	111	Dec. 13, 2024	Dec. 12, 2025
6	RE33L-001	COMM	/	014 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
7	RE33L-002	COMM	/	015 (9kHz-1GHz)	Feb. 09, 2025	Feb. 08, 2026
8	RE33H-001	SUHB SUCOFLEX	/	016 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
9	RE33H-002	HUBENR	/	017 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
10	RE33H-003	HUBENR	/	018 (1GHz-18GHz)	Feb. 09, 2025	Feb. 08, 2026
11	RE33H-003	HUBENR	/	019 (18GHz-40GHz)	Feb. 09, 2025	Feb. 08, 2026
12	3m chamber 3	YIHENG	EE106	/	Aug. 29, 2023	Aug. 28, 2026
13	SHF-EHF Horn Antenna	Schwarzbeck	BBHA 9170	013551	Dec. 13, 2024	Dec. 12, 2025
14	Low noise Amplifier	Tonscend	TAP180040048	AP24C8060348	Dec. 13, 2024	Dec. 12, 2025
Test Software						
Name		Manufacturer		Software Version		
EZ-EMC		FARA		FA-03A2		

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



Conducted emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	LISN	R&S	ENV216	101112	Dec. 13, 2024	Dec. 12, 2025
2	LISN	R&S	ENV216	101113	Dec. 13, 2024	Dec. 12, 2025
3	EMI Test Receiver	R&S	ESCI	100524	Dec. 13, 2024	Dec. 12, 2025
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 13, 2024	Dec. 12, 2025
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 13, 2024	Dec. 12, 2025
6	CE-001	COMM	/	001	Feb. 09, 2025	Feb. 08, 2026
Test Software						
Name		Manufacturer		Software Version		
EMC32		R&S		6.10.10		

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

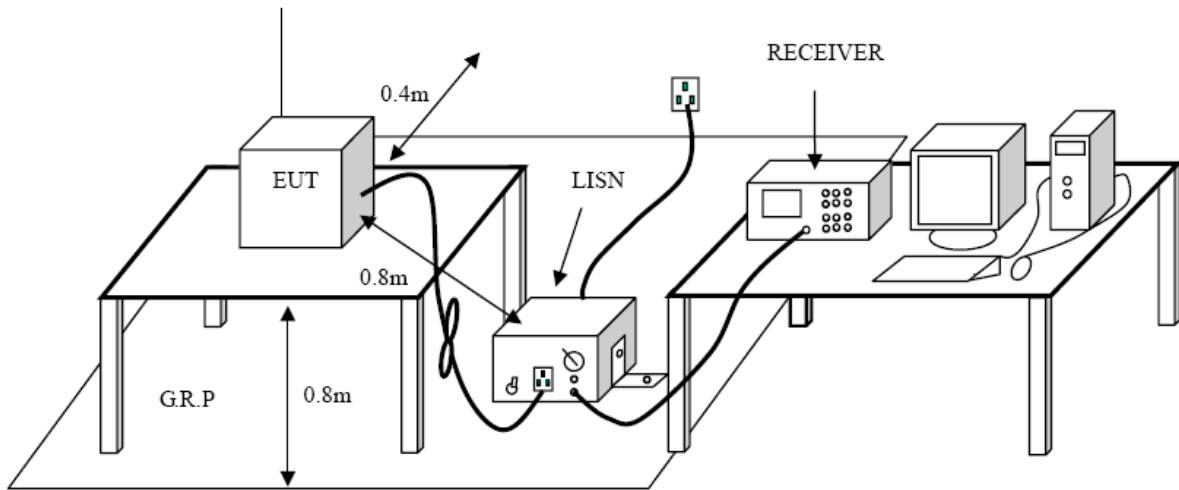

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

CTC Laboratories, Inc.


Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

**Test Result**

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported

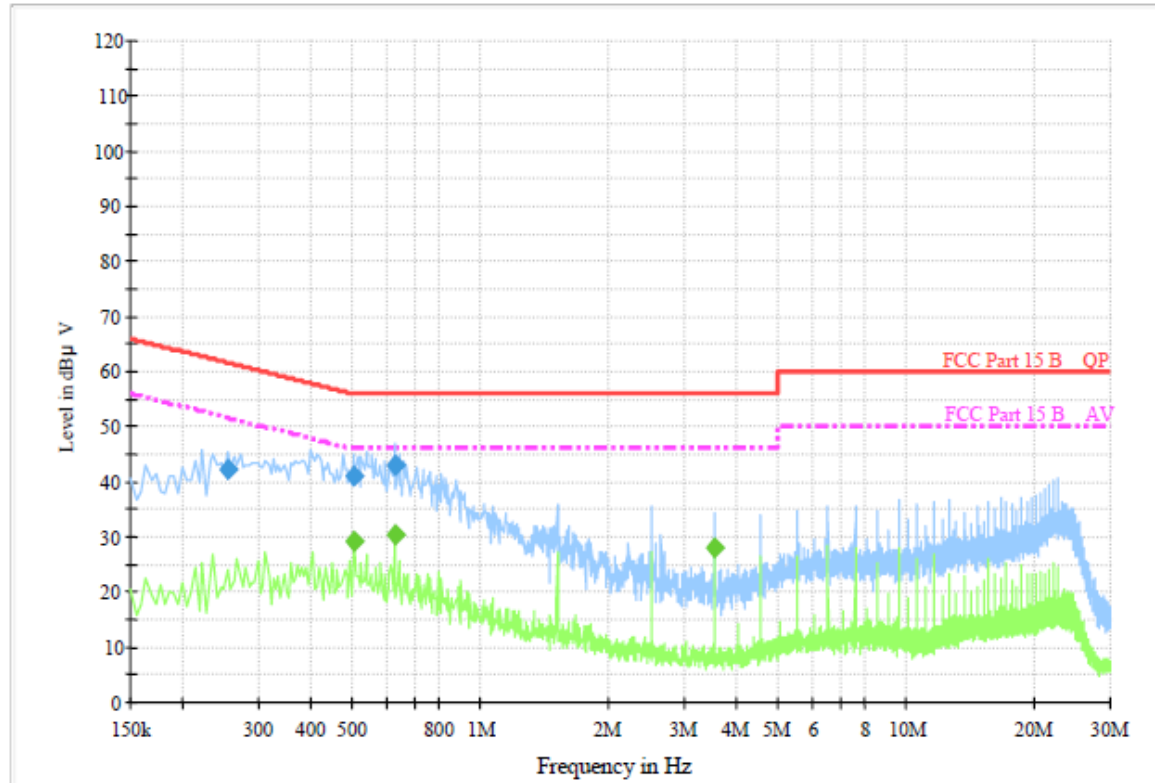**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.253500	42.4	1000.00	9.000	On	L1	9.5	19.2	61.6	
0.501000	41.0	1000.00	9.000	On	L1	9.4	15.0	56.0	
0.627000	43.0	1000.00	9.000	On	L1	9.5	13.0	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.505500	29.1	1000.00	9.000	On	L1	9.4	16.9	46.0	
0.627000	30.4	1000.00	9.000	On	L1	9.5	15.6	46.0	
3.525000	27.9	1000.00	9.000	On	L1	9.4	18.1	46.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported

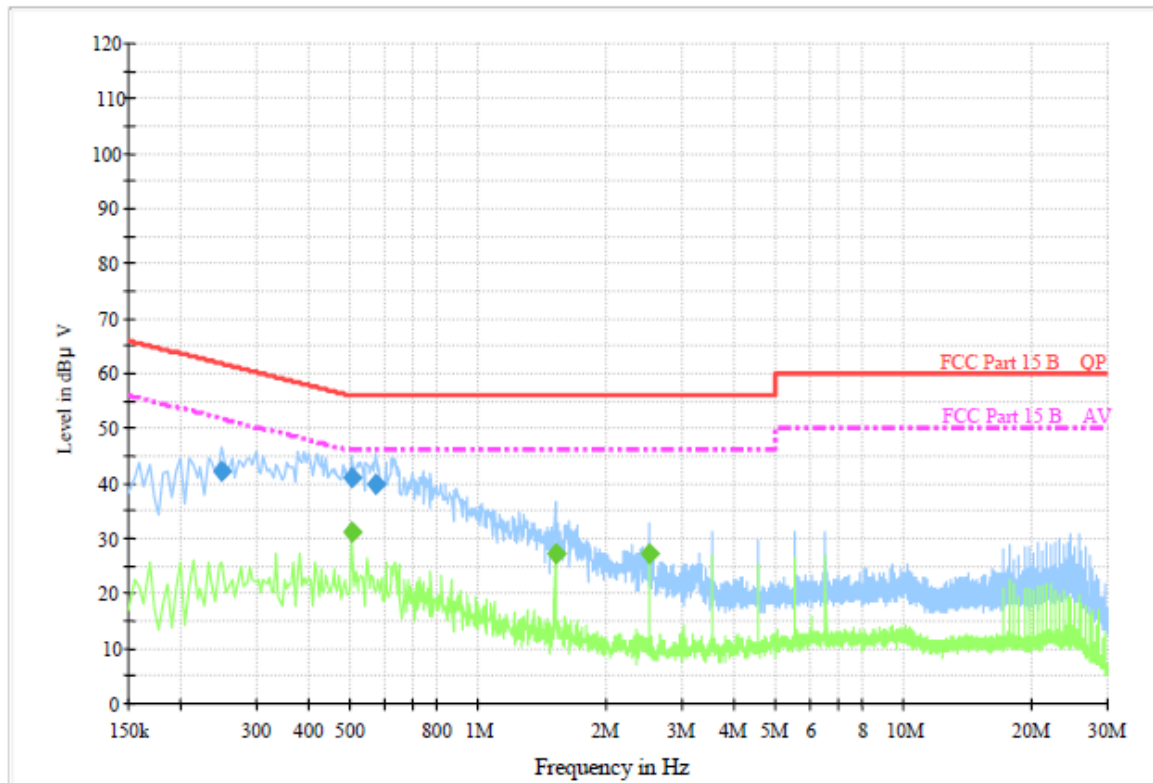

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.249000	42.4	1000.00	9.000	On	N	9.4	19.4	61.8	
0.501000	41.0	1000.00	9.000	On	N	9.6	15.0	56.0	
0.573000	39.8	1000.00	9.000	On	N	9.5	16.2	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.501000	31.3	1000.00	9.000	On	N	9.6	14.7	46.0	
1.509000	27.3	1000.00	9.000	On	N	9.5	18.7	46.0	
2.517000	27.1	1000.00	9.000	On	N	9.5	18.9	46.0	

Emission Level = Read Level + Correct Factor



3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBμV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBμV/m)=20log Emission Level (μV/m).

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart E Section 15. 407(b)

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27 (Note 2)	68.2
	10 (Note 2)	105.2
	15.6 (Note 2)	110.8
	27 (Note 2)	122.2

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts).

2. According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

CTC Laboratories, Inc.


Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2


For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com




Test Configuration

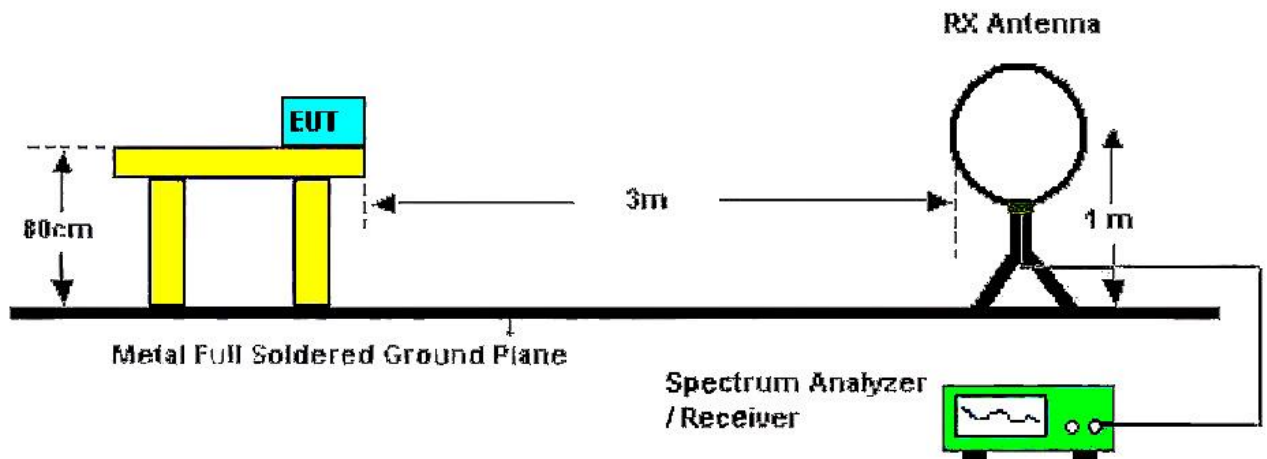

Below 30MHz Test Setup

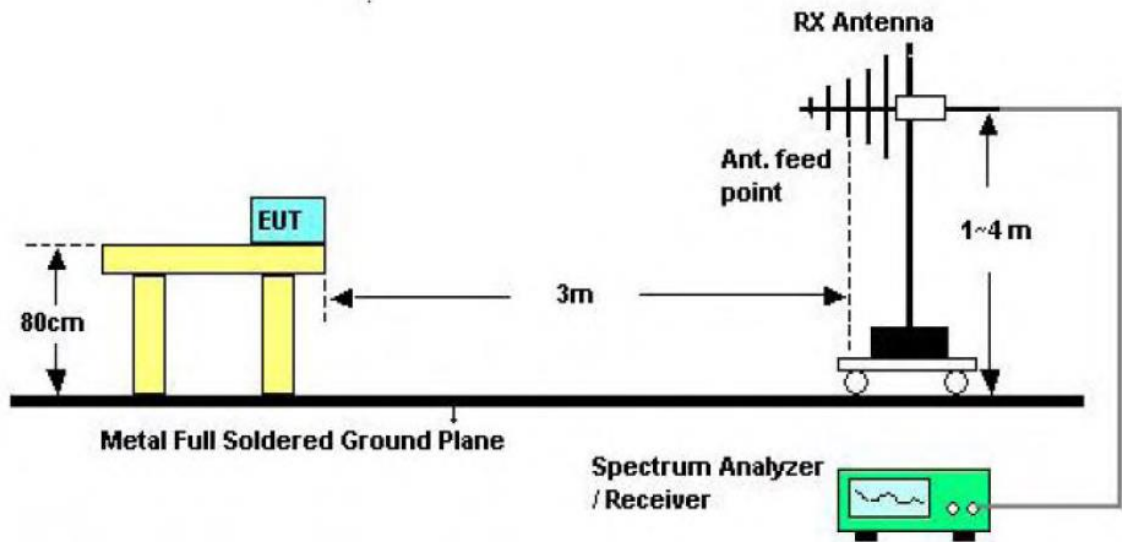

30-1000MHz Test Setup

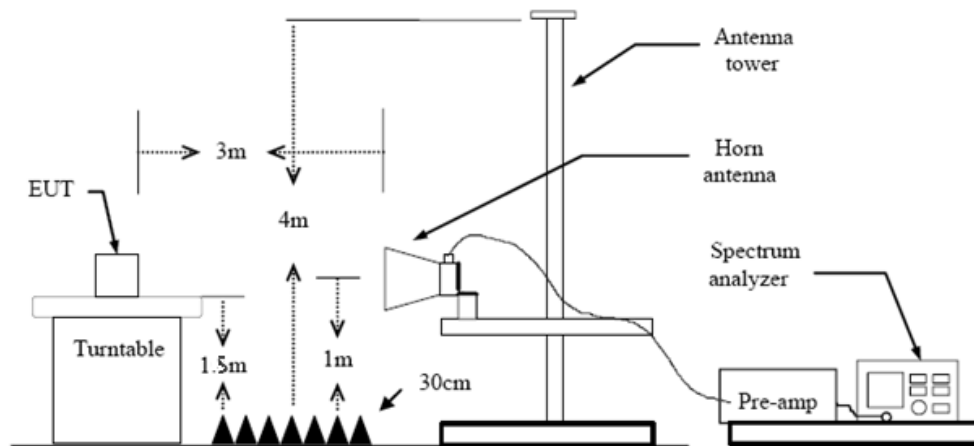

Above 1GHz Test Setup

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luh Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-062_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz:
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz:
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max holdIf the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- (5) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.
Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 kHz~30 MHz


From 9 kHz to 30 MHz: The conclusion is PASS.

Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported.

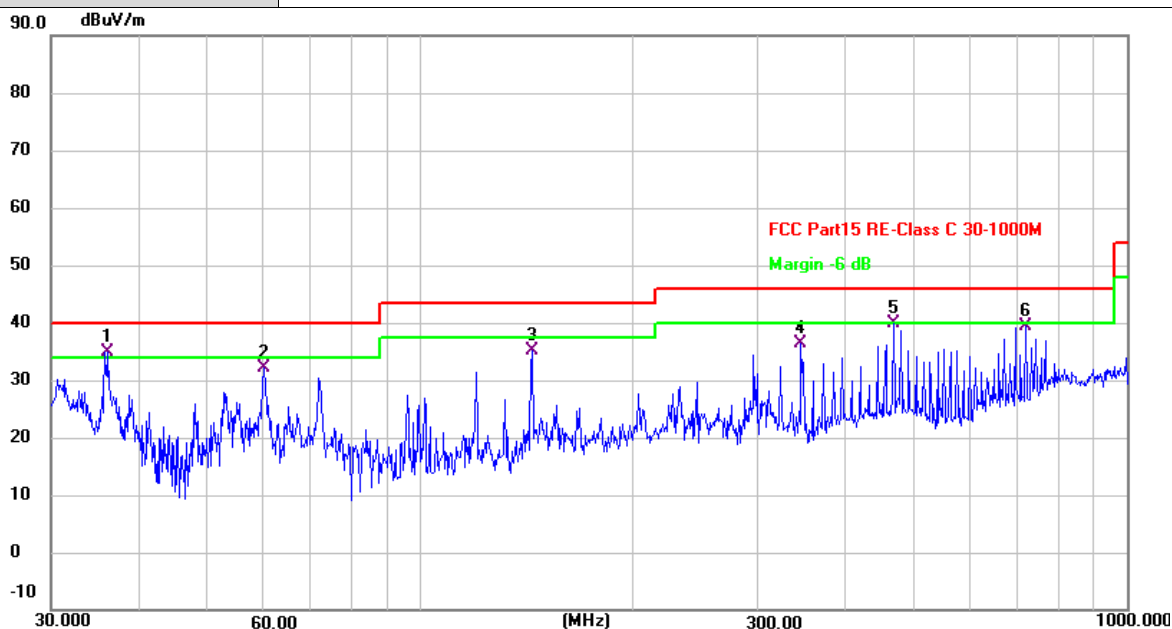

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	36.1271	50.71	-15.79	34.92	40.00	-5.08	QP
2	60.0691	49.74	-17.73	32.01	40.00	-7.99	QP
3	143.8295	51.61	-16.60	35.01	43.50	-8.49	QP
4	345.5952	51.14	-14.76	36.38	46.00	-9.62	QP
5	467.2349	50.76	-10.79	39.97	46.00	-6.03	QP
6	719.1995	44.73	-5.27	39.46	46.00	-6.54	QP


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported.

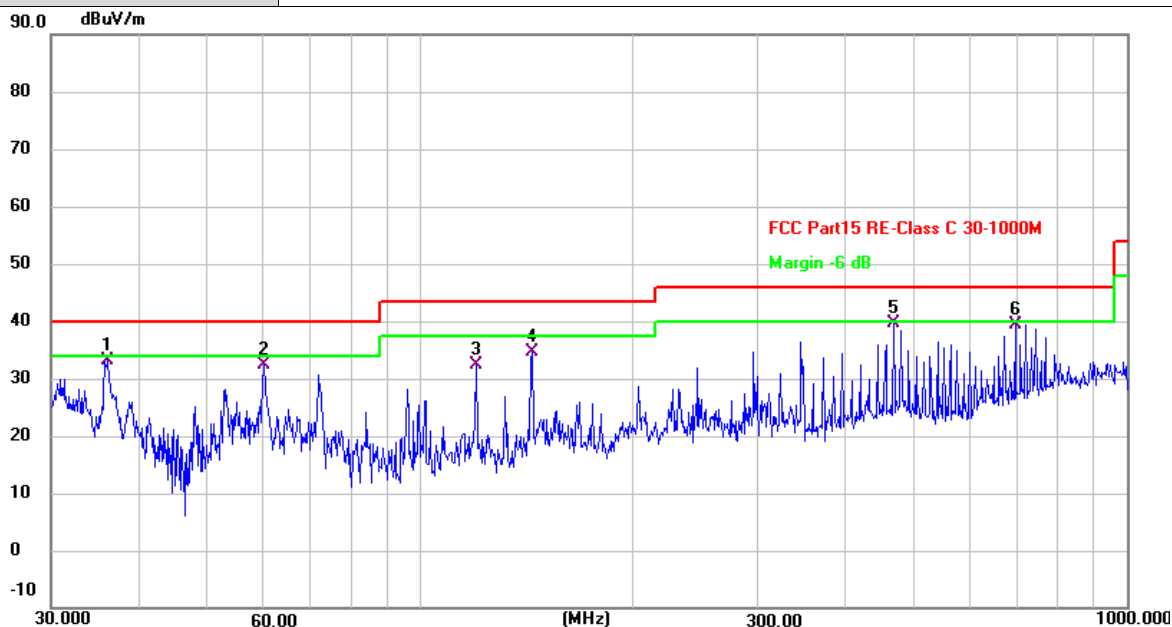

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.1272	48.97	-15.79	33.18	40.00	-6.82	QP
2	60.0691	50.03	-17.73	32.30	40.00	-7.70	QP
3	119.8556	50.75	-18.40	32.35	43.50	-11.15	QP
4	143.8295	51.34	-16.60	34.74	43.50	-8.76	QP
5 *	467.2349	50.40	-10.79	39.61	46.00	-6.39	QP
6	694.4174	45.04	-5.76	39.28	46.00	-6.72	QP

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Above 1GHz

Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10360.533	38.87	13.74	52.61	74.00	-21.39	peak
2 *	10360.898	24.43	13.74	38.17	54.00	-15.83	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10360.221	37.84	13.75	51.59	74.00	-22.41	peak
2 *	10360.299	24.28	13.75	38.03	54.00	-15.97	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.859	24.93	13.79	38.72	54.00	-15.28	AVG
2	10400.579	39.79	13.79	53.58	74.00	-20.42	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.244	25.09	13.79	38.88	54.00	-15.12	AVG
2	10399.393	38.50	13.79	52.29	74.00	-21.71	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10480.614	39.89	13.87	53.76	74.00	-20.24	peak
2 *	10480.847	24.22	13.87	38.09	54.00	-15.91	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10479.779	39.97	13.87	53.84	74.00	-20.16	peak
2 *	10479.995	24.40	13.87	38.27	54.00	-15.73	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10359.125	38.72	13.75	52.47	74.00	-21.53	peak
2 *	10359.126	24.33	13.75	38.08	54.00	-15.92	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10359.022	38.11	13.75	51.86	74.00	-22.14	peak
2 *	10360.725	24.61	13.74	38.35	54.00	-15.65	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10399.329	38.85	13.79	52.64	74.00	-21.36	peak
2 *	10399.988	24.65	13.79	38.44	54.00	-15.56	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10399.250	40.28	13.79	54.07	74.00	-19.93	peak
2 *	10399.488	24.76	13.79	38.55	54.00	-15.45	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

Ant. No.	Ant 1																														
Ant. Pol.	Vertical																														
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																														
<table><tr><td>No.</td><td>Frequency (MHz)</td><td>Reading (dBUV)</td><td>Factor (dB/m)</td><td>Level (dBUV/m)</td><td>Limit (dBUV/m)</td><td>Margin (dB)</td><td>Detector</td></tr><tr><td>1</td><td>10479.345</td><td>38.22</td><td>13.87</td><td>52.09</td><td>74.00</td><td>-21.91</td><td>peak</td></tr><tr><td>2 *</td><td>10479.556</td><td>24.14</td><td>13.87</td><td>38.01</td><td>54.00</td><td>-15.99</td><td>AVG</td></tr></table>								No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	1	10479.345	38.22	13.87	52.09	74.00	-21.91	peak	2 *	10479.556	24.14	13.87	38.01	54.00	-15.99	AVG
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector																								
1	10479.345	38.22	13.87	52.09	74.00	-21.91	peak																								
2 *	10479.556	24.14	13.87	38.01	54.00	-15.99	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10379.146	24.43	13.77	38.20	54.00	-15.80	AVG
2	10380.684	38.89	13.77	52.66	74.00	-21.34	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10379.429	38.73	13.77	52.50	74.00	-21.50	peak
2 *	10380.197	24.85	13.77	38.62	54.00	-15.38	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10460.069	38.05	13.85	51.90	74.00	-22.10	peak
2 *	10460.095	24.32	13.85	38.17	54.00	-15.83	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10460.623	24.56	13.85	38.41	54.00	-15.59	AVG
2	10460.647	38.32	13.85	52.17	74.00	-21.83	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10379.429	38.03	13.77	51.80	74.00	-22.20	peak
2 *	10379.607	24.62	13.77	38.39	54.00	-15.61	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.999	24.56	13.75	38.31	54.00	-15.69	AVG
2	10360.592	39.13	13.74	52.87	74.00	-21.13	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10399.134	25.00	13.79	38.79	54.00	-15.21	AVG
2	10400.880	38.45	13.79	52.24	74.00	-21.76	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.417	25.25	13.79	39.04	54.00	-14.96	AVG
2	10400.378	38.33	13.79	52.12	74.00	-21.88	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10479.481	24.34	13.87	38.21	54.00	-15.79	AVG
2	10480.977	38.96	13.87	52.83	74.00	-21.17	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10479.201	24.43	13.87	38.30	54.00	-15.70	AVG
2	10480.689	38.18	13.87	52.05	74.00	-21.95	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10379.149	25.19	13.77	38.96	54.00	-15.04	AVG
2	10379.532	39.32	13.77	53.09	74.00	-20.91	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10379.102	24.78	13.77	38.55	54.00	-15.45	AVG
2	10379.515	38.82	13.77	52.59	74.00	-21.41	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10459.020	25.28	13.85	39.13	54.00	-14.87	AVG
2	10460.563	38.32	13.85	52.17	74.00	-21.83	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10459.431	38.59	13.85	52.44	74.00	-21.56	peak
2 *	10460.419	25.38	13.85	39.23	54.00	-14.77	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10519.530	37.60	13.92	51.52	74.00	-22.48	peak
2 *	10520.378	23.74	13.92	37.66	54.00	-16.34	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10519.039	23.77	13.92	37.69	54.00	-16.31	AVG
2	10519.893	37.65	13.92	51.57	74.00	-22.43	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10560.117	38.26	13.98	52.24	74.00	-21.76	peak
2 *	10560.409	23.58	13.98	37.56	54.00	-16.44	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10559.208	23.82	13.98	37.80	54.00	-16.20	AVG
2	10560.010	37.34	13.98	51.32	74.00	-22.68	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10639.137	38.14	14.11	52.25	74.00	-21.75	peak
2 *	10639.721	23.78	14.11	37.89	54.00	-16.11	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10640.086	37.66	14.11	51.77	74.00	-22.23	peak
2 *	10640.967	23.98	14.11	38.09	54.00	-15.91	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10520.606	23.61	13.92	37.53	54.00	-16.47	AVG
2	10520.661	40.17	13.92	54.09	74.00	-19.91	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.616	38.20	13.92	52.12	74.00	-21.88	peak
2 *	10520.937	24.14	13.92	38.06	54.00	-15.94	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10559.987	37.99	13.98	51.97	74.00	-22.03	peak
2 *	10560.031	23.74	13.98	37.72	54.00	-16.28	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10559.387	38.16	13.98	52.14	74.00	-21.86	peak
2 *	10559.395	23.54	13.98	37.52	54.00	-16.48	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10640.324	38.81	14.11	52.92	74.00	-21.08	peak
2 *	10640.649	24.07	14.11	38.18	54.00	-15.82	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.299	38.25	14.11	52.36	74.00	-21.64	peak
2 *	10640.656	23.91	14.11	38.02	54.00	-15.98	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10539.171	38.23	13.95	52.18	74.00	-21.82	peak
2 *	10540.578	23.74	13.95	37.69	54.00	-16.31	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10539.296	24.07	13.95	38.02	54.00	-15.98	AVG
2	10540.525	39.51	13.95	53.46	74.00	-20.54	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10619.743	38.28	14.07	52.35	74.00	-21.65	peak
2 *	10620.047	23.58	14.07	37.65	54.00	-16.35	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10620.040	23.47	14.07	37.54	54.00	-16.46	AVG
2	10620.615	37.46	14.07	51.53	74.00	-22.47	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10519.154	37.60	13.92	51.52	74.00	-22.48	peak
2 *	10519.293	23.71	13.92	37.63	54.00	-16.37	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.815	38.24	13.92	52.16	74.00	-21.84	peak
2 *	10520.089	23.68	13.92	37.60	54.00	-16.40	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10559.219	23.73	13.98	37.71	54.00	-16.29	AVG
2	10559.658	38.33	13.98	52.31	74.00	-21.69	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10559.232	23.68	13.98	37.66	54.00	-16.34	AVG
2	10559.798	38.84	13.98	52.82	74.00	-21.18	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.304	38.41	14.11	52.52	74.00	-21.48	peak
2 *	10640.603	24.08	14.11	38.19	54.00	-15.81	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10639.821	24.05	14.11	38.16	54.00	-15.84	AVG
2	10640.272	38.11	14.11	52.22	74.00	-21.78	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10539.319	38.91	13.95	52.86	74.00	-21.14	peak
2 *	10539.542	23.61	13.95	37.56	54.00	-16.44	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10539.313	39.48	13.95	53.43	74.00	-20.57	peak
2 *	10540.930	24.64	13.95	38.59	54.00	-15.41	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10619.071	23.44	14.07	37.51	54.00	-16.49	AVG
2	10620.949	38.45	14.07	52.52	74.00	-21.48	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10619.148	37.94	14.07	52.01	74.00	-21.99	peak
2 *	10619.470	24.30	14.07	38.37	54.00	-15.63	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.668	24.92	14.57	39.49	54.00	-14.51	AVG
2	11000.611	39.13	14.57	53.70	74.00	-20.30	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.767	24.79	14.57	39.36	54.00	-14.64	AVG
2	11000.441	39.05	14.57	53.62	74.00	-20.38	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11159.064	24.91	14.66	39.57	54.00	-14.43	AVG
2	11160.388	39.23	14.66	53.89	74.00	-20.11	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11160.228	24.69	14.66	39.35	54.00	-14.65	AVG
2	11160.287	39.18	14.66	53.84	74.00	-20.16	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11399.447	23.64	14.85	38.49	54.00	-15.51	AVG
2	11399.496	39.08	14.85	53.93	74.00	-20.07	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11399.514	37.89	14.85	52.74	74.00	-21.26	peak
2 *	11400.342	23.68	14.85	38.53	54.00	-15.47	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.517	38.76	14.57	53.33	74.00	-20.67	peak
2 *	11000.585	24.17	14.57	38.74	54.00	-15.26	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11000.571	24.16	14.57	38.73	54.00	-15.27	AVG
2	11000.813	39.18	14.57	53.75	74.00	-20.25	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11160.319	39.00	14.66	53.66	74.00	-20.34	peak
2 *	11160.773	25.29	14.66	39.95	54.00	-14.05	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11159.248	24.92	14.66	39.58	54.00	-14.42	AVG
2	11160.169	38.74	14.66	53.40	74.00	-20.60	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11399.519	23.95	14.85	38.80	54.00	-15.20	AVG
2	11400.723	38.13	14.85	52.98	74.00	-21.02	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11399.040	23.75	14.85	38.60	54.00	-15.40	AVG
2	11399.651	37.95	14.85	52.80	74.00	-21.20	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11020.496	38.77	14.59	53.36	74.00	-20.64	peak
2 *	11020.809	24.62	14.59	39.21	54.00	-14.79	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11019.427	23.95	14.59	38.54	54.00	-15.46	AVG
2	11019.439	38.88	14.59	53.47	74.00	-20.53	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11099.673	25.11	14.67	39.78	54.00	-14.22	AVG
2	11100.615	38.76	14.67	53.43	74.00	-20.57	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11099.299	24.31	14.67	38.98	54.00	-15.02	AVG
2	11099.785	39.36	14.67	54.03	74.00	-19.97	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11339.403	38.50	14.80	53.30	74.00	-20.70	peak
2 *	11339.768	24.83	14.80	39.63	54.00	-14.37	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11339.482	38.31	14.80	53.11	74.00	-20.89	peak
2 *	11339.691	24.74	14.80	39.54	54.00	-14.46	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10999.990	24.49	14.57	39.06	54.00	-14.94	AVG
2	11000.554	38.24	14.57	52.81	74.00	-21.19	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.819	24.40	14.57	38.97	54.00	-15.03	AVG
2	11000.701	39.38	14.57	53.95	74.00	-20.05	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11159.375	39.22	14.66	53.88	74.00	-20.12	peak
2 *	11160.317	24.87	14.66	39.53	54.00	-14.47	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11159.252	38.88	14.66	53.54	74.00	-20.46	peak
2 *	11160.427	24.83	14.66	39.49	54.00	-14.51	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11400.067	37.63	14.85	52.48	74.00	-21.52	peak
2 *	11400.823	23.69	14.85	38.54	54.00	-15.46	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11400.096	23.76	14.85	38.61	54.00	-15.39	AVG
2	11400.743	37.53	14.85	52.38	74.00	-21.62	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11019.115	24.33	14.59	38.92	54.00	-15.08	AVG
2	11019.287	38.14	14.59	52.73	74.00	-21.27	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11019.107	38.76	14.59	53.35	74.00	-20.65	peak
2 *	11020.416	24.13	14.59	38.72	54.00	-15.28	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11099.541	38.01	14.67	52.68	74.00	-21.32	peak
2 *	11100.679	25.32	14.67	39.99	54.00	-14.01	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11099.940	38.62	14.67	53.29	74.00	-20.71	peak
2 *	11100.533	24.32	14.67	38.99	54.00	-15.01	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11340.437	25.01	14.80	39.81	54.00	-14.19	AVG
2	11340.664	38.42	14.80	53.22	74.00	-20.78	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11340.454	38.61	14.80	53.41	74.00	-20.59	peak
2 *	11340.667	23.93	14.80	38.73	54.00	-15.27	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11489.053	38.02	14.93	52.95	74.00	-21.05	peak
2 *	11490.386	23.87	14.95	38.82	54.00	-15.18	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11489.492	23.72	14.94	38.66	54.00	-15.34	AVG
2	11490.445	38.32	14.95	53.27	74.00	-20.73	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.497	39.57	15.00	54.57	74.00	-19.43	peak
2 *	11570.708	24.02	15.01	39.03	54.00	-14.97	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11570.091	24.32	15.01	39.33	54.00	-14.67	AVG
2	11570.994	39.22	15.01	54.23	74.00	-19.77	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.013	24.36	15.01	39.37	54.00	-14.63	AVG
2	11649.027	38.50	15.01	53.51	74.00	-20.49	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.639	24.03	15.01	39.04	54.00	-14.96	AVG
2	11650.759	37.63	15.03	52.66	74.00	-21.34	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11490.244	23.83	14.95	38.78	54.00	-15.22	AVG
2	11490.805	38.13	14.95	53.08	74.00	-20.92	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11490.235	23.54	14.95	38.49	54.00	-15.51	AVG
2	11490.817	38.53	14.95	53.48	74.00	-20.52	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11570.232	24.29	15.01	39.30	54.00	-14.70	AVG
2	11570.829	39.08	15.01	54.09	74.00	-19.91	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.561	39.28	15.00	54.28	74.00	-19.72	peak
2 *	11569.710	24.01	15.00	39.01	54.00	-14.99	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11650.009	37.96	15.02	52.98	74.00	-21.02	peak
2 *	11650.159	23.89	15.03	38.92	54.00	-15.08	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.905	24.07	15.01	39.08	54.00	-14.92	AVG
2	11650.621	38.16	15.03	53.19	74.00	-20.81	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11510.544	38.57	14.96	53.53	74.00	-20.47	peak
2 *	11510.956	24.78	14.96	39.74	54.00	-14.26	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11509.891	38.00	14.95	52.95	74.00	-21.05	peak
2 *	11510.848	24.97	14.96	39.93	54.00	-14.07	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11589.253	38.53	15.02	53.55	74.00	-20.45	peak
2 *	11589.321	23.95	15.02	38.97	54.00	-15.03	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11590.320	25.53	15.03	40.56	54.00	-13.44	AVG
2	11590.962	37.67	15.03	52.70	74.00	-21.30	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11489.321	37.64	14.94	52.58	74.00	-21.42	peak
2 *	11490.653	23.73	14.95	38.68	54.00	-15.32	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11490.529	23.96	14.95	38.91	54.00	-15.09	AVG
2	11490.982	37.63	14.95	52.58	74.00	-21.42	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.492	37.72	15.00	52.72	74.00	-21.28	peak
2 *	11570.751	24.32	15.01	39.33	54.00	-14.67	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11569.351	39.27	15.00	54.27	74.00	-19.73	peak
2 *	11569.868	24.04	15.00	39.04	54.00	-14.96	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11650.223	38.51	15.03	53.54	74.00	-20.46	peak
2 *	11650.389	24.19	15.03	39.22	54.00	-14.78	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11649.169	38.77	15.01	53.78	74.00	-20.22	peak
2 *	11650.994	24.02	15.03	39.05	54.00	-14.95	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11509.218	38.96	14.95	53.91	74.00	-20.09	peak
2 *	11510.466	24.96	14.96	39.92	54.00	-14.08	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11510.695	25.27	14.96	40.23	54.00	-13.77	AVG
2	11510.793	39.09	14.96	54.05	74.00	-19.95	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant. No.	Ant 1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11589.487	24.98	15.02	40.00	54.00	-14.00	AVG
2	11590.288	39.24	15.03	54.27	74.00	-19.73	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. No.	Ant 1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11590.224	26.02	15.03	41.05	54.00	-12.95	AVG
2	11590.317	39.83	15.03	54.86	74.00	-19.14	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

3.3. Band Edge Emissions

Limit

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart E Section 15. 407(b)

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27 (Note 2)	68.2
	10 (Note 2)	105.2
	15.6 (Note 2)	110.8
	27 (Note 2)	122.2


Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts).

2. According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Test Configuration

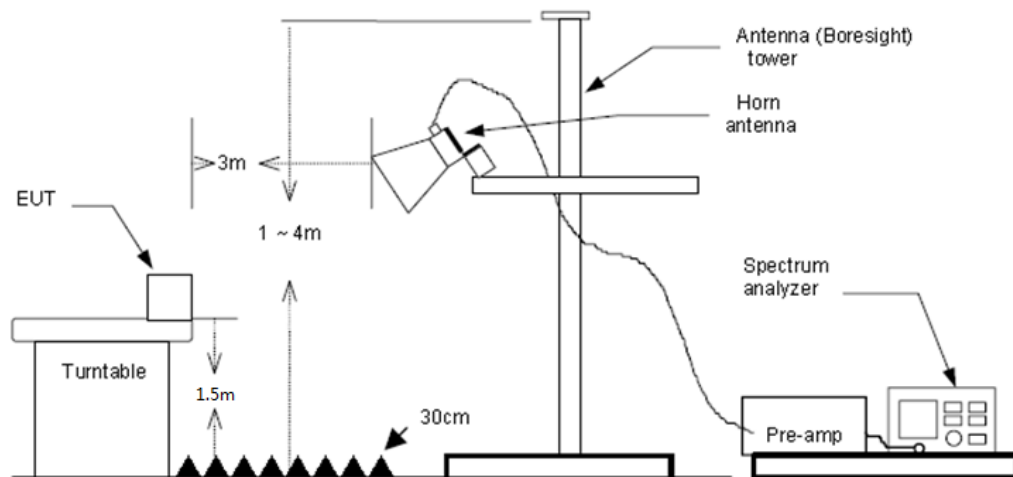



Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Duty Cycle.

Test Mode

Please refer to the clause 2.4.



Test Result

Note: 1. Pre-scan both 4500-5150MHz, 5350-5460MHz were investigated, report only shows the test data for worst case.

