

样品承认书

SPECIFICATION FOR APPROVAL

State		trial-produce	
Supplier Name	Shenzhen Tao soft electronics Co., LTD		
Supplier Number	A28		
Supplier Code	166630250315		
name of material	A28 twin coil		
Specification description	Magnetic separator 93*52*0.8mm upper coil diameter 17.2*26.2mm, sensitivity 6.5uH/+10%, distance from the upper edge of the high separation disc 6.5mm, coil diameter 17.2*26.2mm, sensitivity 6.5mm / +10%, distance from the edge of the high separation disc 6.5mm, silk-covered wire 0.08x105p with adhesive backing, The outlet length is 40mm, the tin is 3mm, and the outside line of the lead is dyed and marked		
Version	V1.0		
environmental requirement	ROHS		
date	2023/06/24		
Address	701, Building 10, Zone B, Wujie Industrial Zone, Shangcun Community, Gongming Street, Guangming District, Shenzhen		
Tel:	13824883512		
website	891950131@QQ.com		

Antenna Manufacturer:

Name: Guanyu (Dongguan) Intelligent Technology Co., LTD

Address: 10 / F, Building b, Building 3, Boteng Industrial Park, No.36 Fuxing Road, Chang'an Town, Dongguan City.

版本變更履歷


Version Change History

版本 Rev.	變更前 Before Change	變更後 After Change	更改日期 Change Date	批准 Approved By
A.0	新发行	----	2023/06/24	钱立谋

SPECIFICATION

产品型号: DESC	93x52-9Ts-0.08x105-40mm-CLB	版本 Rev: A 0	客户 CUST: 淘软料号 Fine P/N: 客户料号 CUST P/N:	
---------------	-----------------------------	----------------	--	--

一、尺寸 DIMENSION:(mm)

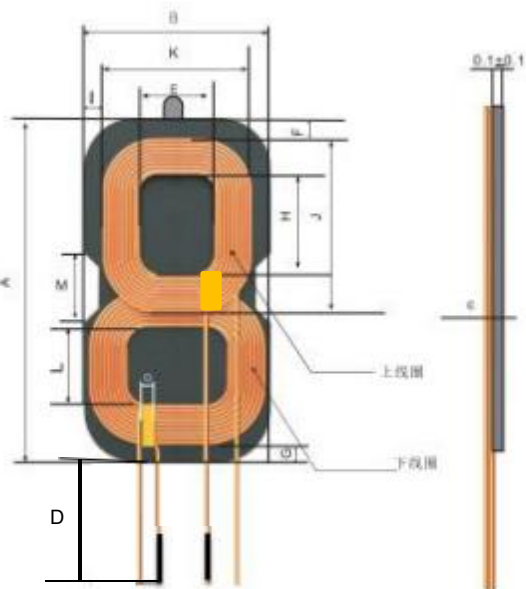

A	93.0±1.0
B	52±1
C	3.6±0.2
D	40±2
E	17.2
F	6.5±0.5
G	6.5±0.5
H	26.2
K	38±2
J	48±2
L	17.2

注:

1. Coil attached magnetic disc, magnetic disc size 93*52mm, thickness 0.8+0.1mm
2. Wrap the upper and lower coil outlet with a width of 6 mm ±0.5 high temperature adhesive paper.
3. The back of the magnetic disc is affixed with a hand-torn circular diameter of 92*51mm(ref), ordinary double-sided tape
4. Mark the outer cables of the upper and lower coils in black

二、原理图 SCHEMATIC DIAGRAM:



三、绕线参数 Winding Specification:

序号 NO	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	丝包线 0.08*105P	9Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25 ± 10°C, 湿度 RELATIVE HUMIDITY:65 ±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20%单独线圈	100KHz/ 1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ± 10%加磁片	100KHz/ 1.0V	LCZ METER 1062B
3	Q 值	S-F	100(ref) 加磁片	100KHz/ 1.0V	LCZ METER 1062B
4	DCR	S-F	≤70m Ω		LCZ METER 502B

拟制/日期 PREPARED BY/DATE

审核/日期 CHECKED BY/DATE

冯伯群 2023/06/24


苏燕平 2023/06/24

SPECIFICATION

產品型號: DESC	93x52-9Ts-0.08x105-40mm-CLB	版本 Rev: A 0	客戶 CUST: 淘软料号 Fine P/N: 客户料号 CUST P/N:
---------------	------------------------------------	----------------	--

五、包装 PACKONG:

5.1 包装图片 Packing pictures:

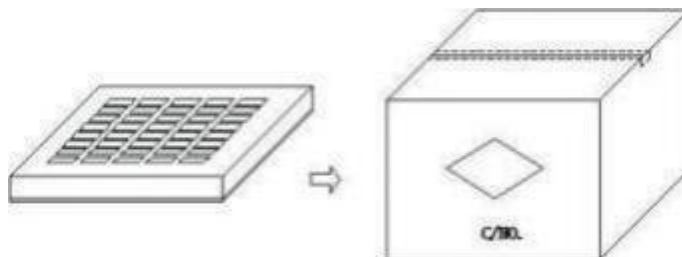

5.2 包装数量及规格 Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	150 Pcs	410*265*55mm
箱 Big Carton	600 Pcs	420*270*240mm

5.3 包装以现有包装盘为参照标准，以实际出货包装为准,如有特需要求可以定制。

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

六、材料清单 Material list:

序号 number	材料名称 Material name	品名描述 Description	制造商 Manufacturer
1	Silk covered thread 0.08*105 strands	Acetone silk-covered wire 0.08*105 strands	
2	Lead-free Solder Bar	Lead-free Solder Bar	
3	magnetic sheet	Φ93*52*0.8mm Manganese zinc hard disk	
4	glue	201 glue	
5	high-temperature adhesive tape	6mm Wide high temperature adhesive paper	
6	Double-sided tape with holes	With hand tear position round diameter 92*51 adhesive backing	

拟制/日期 PREPARED BY/DATE 冯伯群 2023/06/24	审核/日期 CHECKED BY/DATE 苏燕平 2023/06/24
--	---