

Test Report

Report No. : MTi241217015-08E3

Date of issue : 2025-02-18

Applicant : Hamilton Rotax, LLC

Product : Car Multimedia Player

Model(s) : 16GX-HMC-L1, 07LC-HMC-L1, 09LC-HMC-L1,
12LC-HMC-L1, 16LC-HMC-L1, 16LX-HMC-L1,
16GSH-HMC-L1, 16RX-HMC-L1, 16RXH-HMC-L1,
16RCH-HMC-L1, 19ISH-HMC-L1, 09GX-HMC-L1,
13LX-HMC-L1, 20ES-HMC-L1, 184R-HMC-L1,
16TCM-HMC-L1, 16CMR-HMC-L1, 16TD-HMC-L1,
16HLD-HMC-L1, 16SQ-HMC-L1, 16SN-HMC-L1,
14PRD-HMC-L1, 18PRD-HMC-L1, 16AVA-HMC-
L1, 16GR86-HMC-L1, 15CR-HMC-L1, 15CRH-
HMC-L1

FCC ID : 2BNAW-CP-MODULE

Shenzhen Microtest Co., Ltd.

TEST REPORT


Report No.: MTI241217015-08E3

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes.....	4
1.3	Environmental Conditions	6
1.4	Description of support units	6
1.5	Measurement uncertainty.....	6
2	Summary of Test Result	7
3	Test Facilities and accreditations	8
3.1	Test laboratory.....	8
4	List of test equipment	9
5	Evaluation Results (Evaluation)	10
5.1	Antenna requirement.....	10
6	Radio Spectrum Matter Test Results (RF)	11
6.1	6dB Bandwidth	11
6.2	Maximum Conducted Output Power	12
6.3	Power Spectral Density	13
6.4	RF conducted spurious emissions and band edge measurement	14
6.5	Band edge emissions (Radiated).....	15
6.6	Radiated emissions (below 1GHz).....	20
6.7	Radiated emissions (above 1GHz).....	24
	Photographs of the test setup	28
	Photographs of the EUT	29
	Appendix A: DTS Bandwidth	31
	Appendix B: Maximum conducted output power	37
	Appendix C: Maximum power spectral density	38
	Appendix D: Band edge measurements	44
	Appendix E: Conducted Spurious Emission.....	47
	Appendix F: Duty Cycle	60

TEST REPORT

Report No.: MTI241217015-08E3

Test Result Certification		
Applicant	Hamilton Rotax, LLC	
Applicant Address	3434 Edwards Mill Rd Suite 112-132 Raleigh, NC 27612, United States	
Manufacturer	Shenzhen Binary Technology Co., Ltd.	
Manufacturer Address	Third Floor No.C, Second Floor B209 and B211, HANG TIAN KE GONG YUAN, NO.8 Min Huan road, Fu Kang community, Longhua district, shenzhen city, Guangdong Province, China	
Product description		
Product name	Car Multimedia Player	
Trademark	Hamilton Motor Company	
Model name	16GX-HMC-L1	
Series Model(s)	07LC-HMC-L1, 09LC-HMC-L1, 12LC-HMC-L1, 16LC-HMC-L1, 16LX-HMC-L1, 16GSH-HMC-L1, 16RX-HMC-L1, 16RXH-HMC-L1, 16RCH-HMC-L1, 19ISH-HMC-L1, 09GX-HMC-L1, 13LX-HMC-L1, 20ES-HMC-L1, 184R-HMC-L1, 16TCM-HMC-L1, 16CMR-HMC-L1, 16TD-HMC-L1, 16HLD-HMC-L1, 16SQ-HMC-L1, 16SN-HMC-L1, 14PRD-HMC-L1, 18PRD-HMC-L1, 16AVA-HMC-L1, 16GR86-HMC-L1, 15CR-HMC-L1, 15CRH-HMC-L1	
Standards	47 CFR Part 15.247	
Test Method	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	
Testing Information		
Date of test	2025-01-17 to 2025-02-11	
Test result	Pass	
Prepared by:	Maleah Deng	
Reviewed by:	David Lee	
Approved by:	Leon Chen	

TEST REPORT

Report No.: MTi241217015-08E3

1 General Description

1.1 Description of the EUT

Product name:	Car Multimedia Player
Model name:	16GX-HMC-L1
Series Model(s):	07LC-HMC-L1, 09LC-HMC-L1, 12LC-HMC-L1, 16LC-HMC-L1, 16LX-HMC-L1, 16GSH-HMC-L1, 16RX-HMC-L1, 16RXH-HMC-L1, 16RCH-HMC-L1, 19ISH-HMC-L1, 09GX-HMC-L1, 13LX-HMC-L1, 20ES-HMC-L1, 184R-HMC-L1, 16TCM-HMC-L1, 16CMR-HMC-L1, 16TD-HMC-L1, 16HLD-HMC-L1, 16SQ-HMC-L1, 16SN-HMC-L1, 14PRD-HMC-L1, 18PRD-HMC-L1, 16AVA-HMC-L1, 16GR86-HMC-L1, 15CR-HMC-L1, 15CRH-HMC-L1
Model difference:	All the models are the same circuit and module, except the model name and Accessories(LVDS Wire with vehicle docking port).
Electrical rating:	Input: DC 12V
Accessories:	Power Wire*1 USB Wire*1 WIFI ANT Wire*1 LVDS Wire*1
Hardware version:	V3
Software version:	V2.16
Test sample(s) number:	MTi241217015-08S1001
RF specification	
Operating frequency range:	802.11b/g/n20:2412~2462 MHz 802.11n40:2422~2452 MHz
Channel number:	11
Modulation type:	IEEE 802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20/HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna(s) type:	External antenna
Antenna(s) gain:	1.21dBi

1.2 Description of test modes

No.	Emission test modes
Mode1	TX-802.11b
Mode2	TX-802.11g
Mode3	TX-802.11n(HT20)
Mode4	TX-802.11 n(HT40)

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452

TEST REPORT

Report No.: MTI241217015-08E3

2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Test Channel List

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	2412	2437	2462
40	2422	2437	2452

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:

For power setting, refer to below table.

Test Software:	Bluetooth RF Test Tool		
Mode	2412MHz	2437MHz	2462MHz
802.11b	38	38	38
802.11g	35	35	35
802.11n(HT20)	35	35	35
Mode	2422MHz	2437MHz	2452MHz
802.11n(HT40)	35	35	35

TEST REPORT

Report No.: MTI241217015-08E3

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
DC power source	RNX-305D	/	SHENZHEN ZHAOXIN ELECTRONIC INSTRUMENT EQUIPMENT CO., LTD.
Display screen	86110-48620-E0	/	Panasonic Corporation
Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST REPORT

Report No.: MTI241217015-08E3

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	N/A
3	6dB Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
4	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
5	Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
6	RF conducted spurious emissions and band edge measurement	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
7	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
9	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

Note1: Since the EUT is the DC input, therefore AC power line conducted emissions test is not required.

TEST REPORT

Report No.: MTI241217015-08E3

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

TEST REPORT

Report No.: MTI241217015-08E3

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
6dB Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in non-restricted frequency bands						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2024-03-20	2025-03-19
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2024-03-21	2025-03-20
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2024-03-21	2025-03-20
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2024-03-21	2025-03-20
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2024-03-21	2025-03-20
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2024-03-21	2025-03-20
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2024-03-20	2025-03-19
9	DC Power Supply	Agilent	E3632A	MY40027695	2024-03-21	2025-03-20
Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-06-17	2025-06-16
3	Amplifier	Agilent	8449B	3008A01120	2024-03-20	2025-03-19
4	MXA signal analyzer	Agilent	N9020A	MY54440859	2024-03-21	2025-03-20
5	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2024-03-21	2025-03-20
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2023-06-17	2025-06-16
7	Pre-amplifier	Space-Dtronics	EWLAN1840G	210405001	2024-03-21	2025-03-20
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2024-03-20	2025-03-19
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2024-03-23	2025-03-22
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2024-03-20	2025-03-19

TEST REPORT

Report No.: MTI241217015-08E3

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

5.1.1 Conclusion:

The antenna of the EUT is permanently attached. The EUT complies with the requirement of FCC PART 15.203.
--

TEST REPORT

Report No.: MTI241217015-08E3

6 Radio Spectrum Matter Test Results (RF)


6.1 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.5 °C	Humidity:	53 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.1.2 Test Setup Diagram:

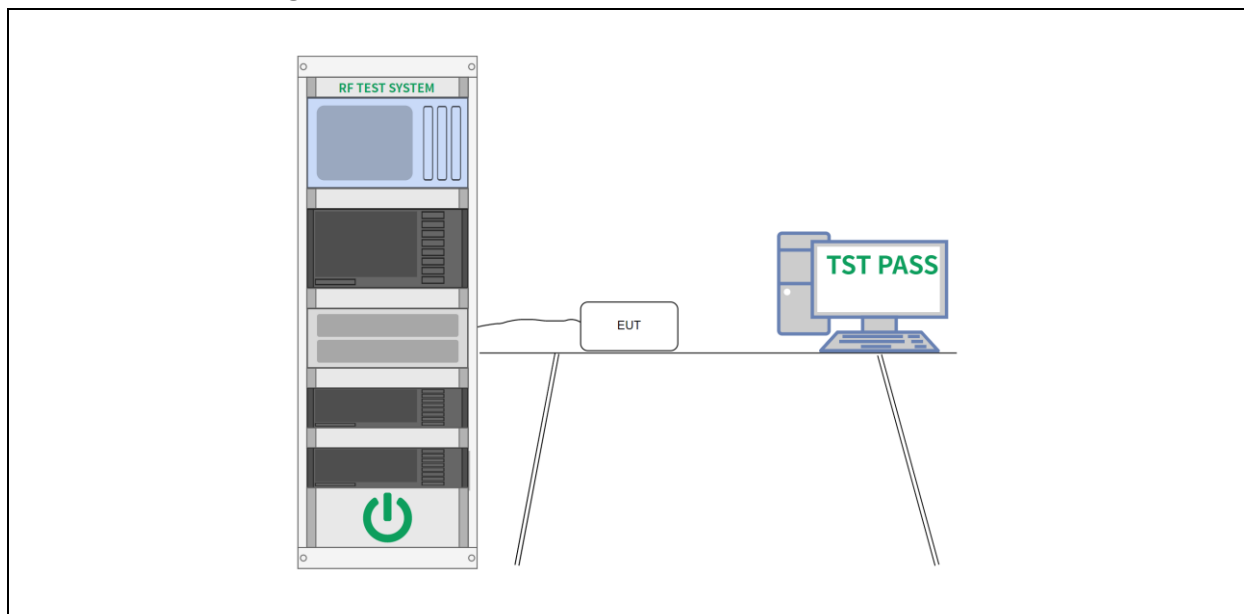

6.1.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTI241217015-08E3


6.2 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.5 °C	Humidity:	53 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.2.2 Test Setup Diagram:

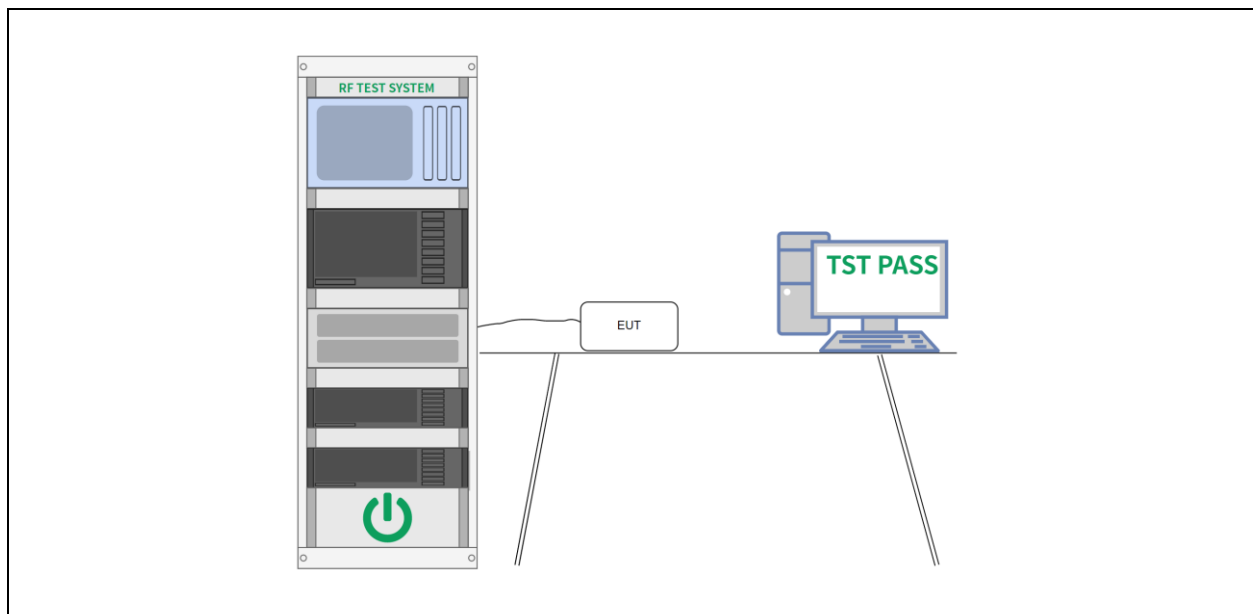

6.2.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTI241217015-08E3


6.3 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.5 °C	Humidity:	53 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.3.2 Test Setup Diagram:

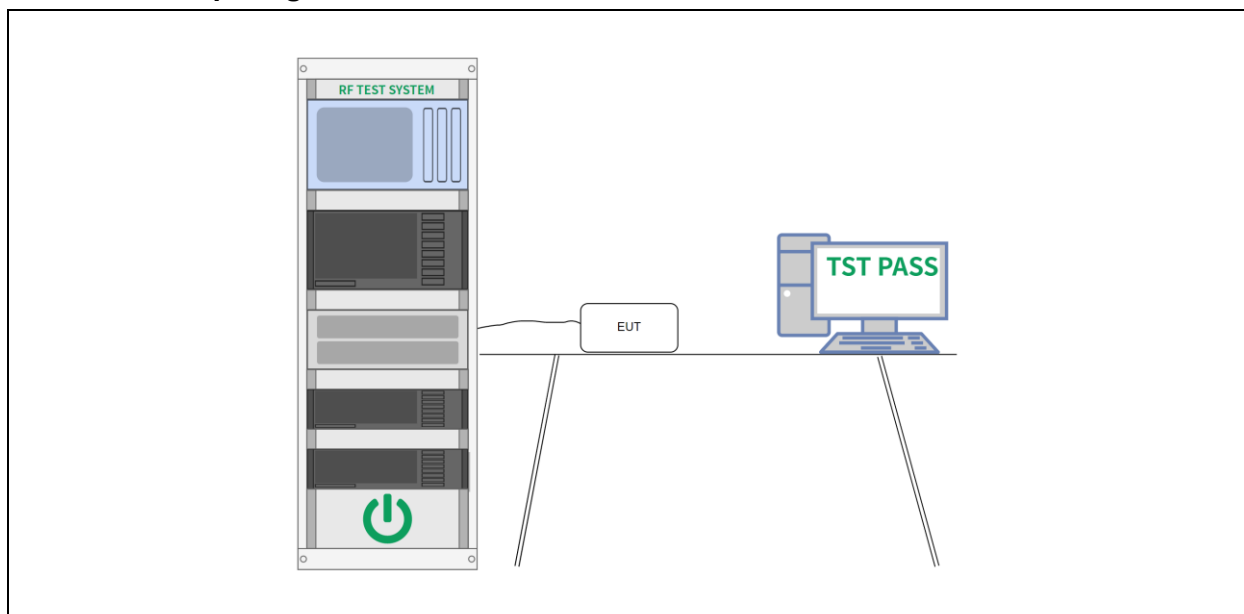

6.3.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTI241217015-08E3


6.4 RF conducted spurious emissions and band edge measurement

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.5 °C	Humidity:	53 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	Mode1, Mode2, Mode3, Mode4				

6.4.2 Test Setup Diagram:

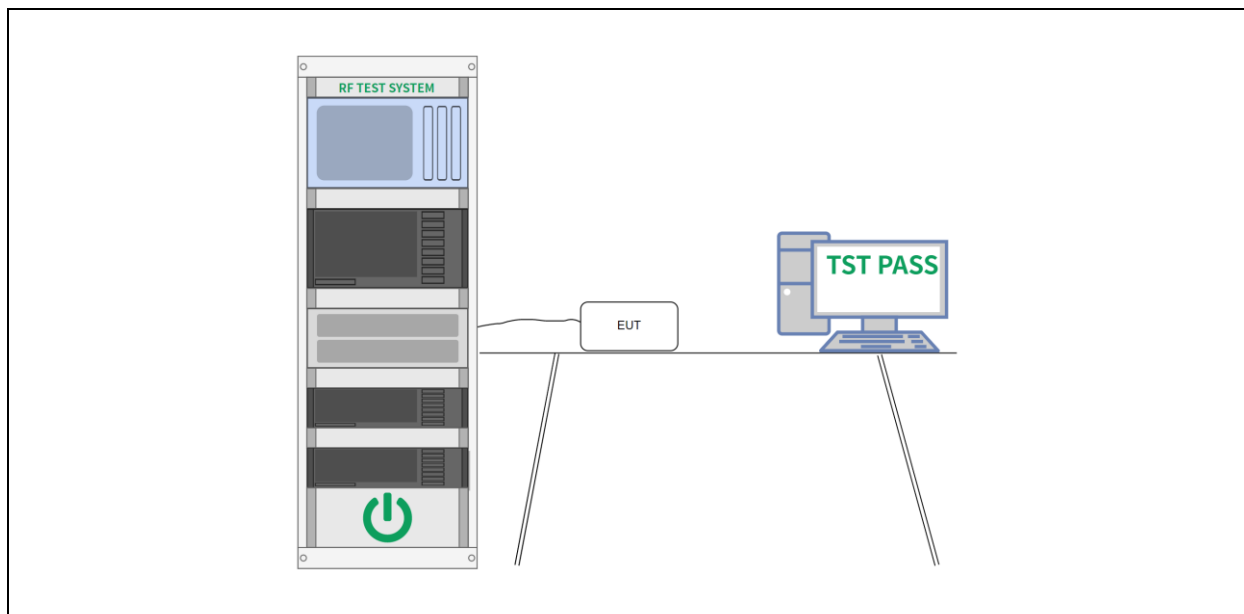

6.4.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTI241217015-08E3


6.5 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.10.5.2		

6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.3 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
Pre test mode:		Mode1, Mode2, Mode3, Mode4			
Final test mode:		All of the listed pre-test mode were tested, only the data of the worst mode (Mode3, Mode4) is recorded in the report			
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					

6.5.2 Test Setup Diagram:

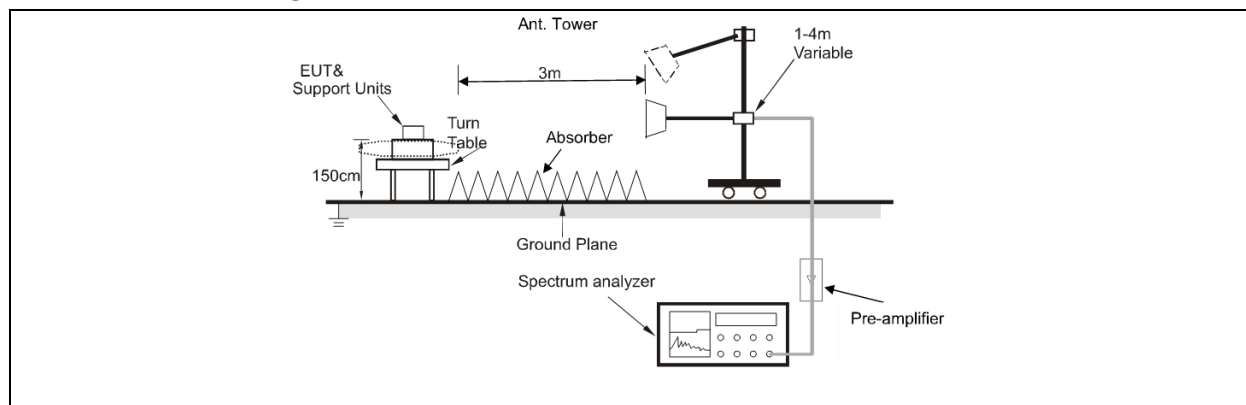

TEST REPORT

Report No.: MTI241217015-08E3

6.5.3 Test Data:

Mode3 / Polarization: Horizontal / CH: L							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	54.30	-4.83	49.47	74.00	-24.53 peak
2		2310.000	44.18	-4.83	39.35	54.00	-14.65 AVG
3		2390.000	67.59	-4.31	63.28	74.00	-10.72 peak
4	*	2390.000	50.69	-4.31	46.38	54.00	-7.62 AVG

Mode3 / Polarization: Vertical / CH: L							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	52.44	-4.83	47.61	74.00	-26.39 peak
2		2310.000	42.46	-4.83	37.63	54.00	-16.37 AVG
3		2390.000	61.43	-4.31	57.12	74.00	-16.88 peak
4	*	2390.000	45.96	-4.31	41.65	54.00	-12.35 AVG

TEST REPORT

Report No.: MTI241217015-08E3

Mode3 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	71.70	-4.21	67.49	74.00	-6.51	peak
2	*	2483.500	52.23	-4.21	48.02	54.00	-5.98	AVG
3		2500.000	56.81	-4.10	52.71	74.00	-21.29	peak
4		2500.000	45.08	-4.10	40.98	54.00	-13.02	AVG

Mode3 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	58.12	-4.21	53.91	74.00	-20.09	peak
2	*	2483.500	44.30	-4.21	40.09	54.00	-13.91	AVG
3		2500.000	51.61	-4.10	47.51	74.00	-26.49	peak
4		2500.000	43.04	-4.10	38.94	54.00	-15.06	AVG

TEST REPORT

Report No.: MTI241217015-08E3

Mode4 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.95	-4.83	48.12	74.00	-25.88	peak
2		2310.000	44.02	-4.83	39.19	54.00	-14.81	AVG
3		2390.000	72.31	-4.31	68.00	74.00	-6.00	peak
4	*	2390.000	55.30	-4.31	50.99	54.00	-3.01	AVG

Mode4 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.90	-4.83	47.07	74.00	-26.93	peak
2		2310.000	42.64	-4.83	37.81	54.00	-16.19	AVG
3		2390.000	65.88	-4.31	61.57	74.00	-12.43	peak
4	*	2390.000	48.49	-4.31	44.18	54.00	-9.82	AVG

TEST REPORT

Report No.: MTI241217015-08E3

Mode4 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	75.43	-4.21	71.22	74.00	-2.78	peak
2		2483.500	55.07	-4.21	50.86	54.00	-3.14	AVG
3		2500.000	62.42	-4.10	58.32	74.00	-15.68	peak
4		2500.000	48.70	-4.10	44.60	54.00	-9.40	AVG

Mode4 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	63.17	-4.21	58.96	74.00	-15.04	peak
2	*	2483.500	45.29	-4.21	41.08	54.00	-12.92	AVG
3		2500.000	52.93	-4.10	48.83	74.00	-25.17	peak
4		2500.000	43.42	-4.10	39.32	54.00	-14.68	AVG

TEST REPORT

Report No.: MTI241217015-08E3


6.6 Radiated emissions (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.6.1 E.U.T. Operation:


Operating Environment:					
Temperature:	24.3 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.					

6.6.2 Test Setup Diagram:

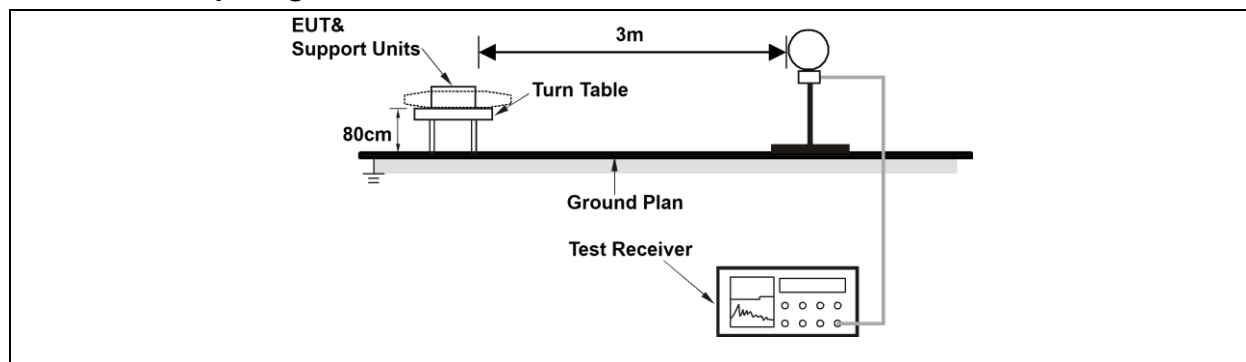

TEST REPORT

Report No.: MTi241217015-08E3

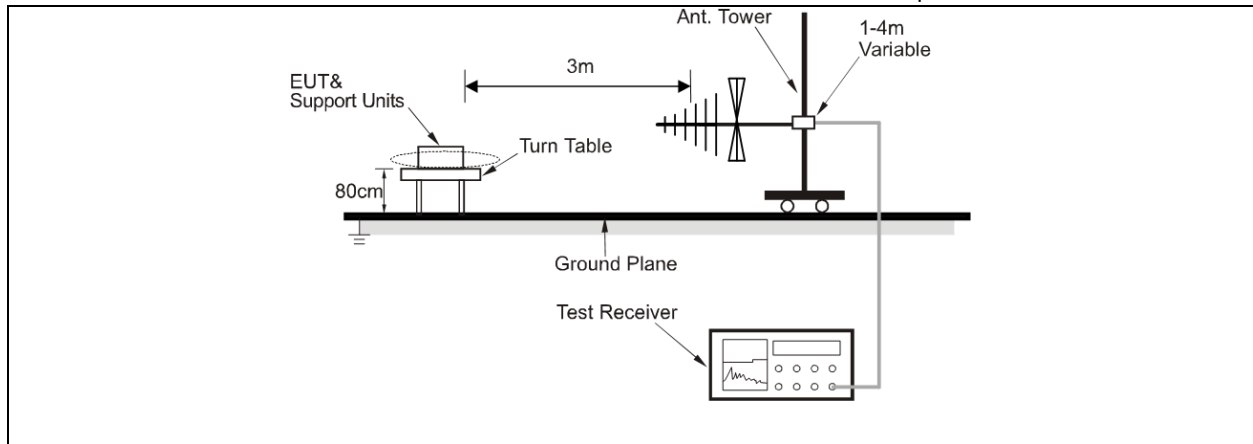


TEST REPORT

Report No.: MTI241217015-08E3

6.6.3 Test Data:

Mode1 / Polarization: Horizontal / CH: H

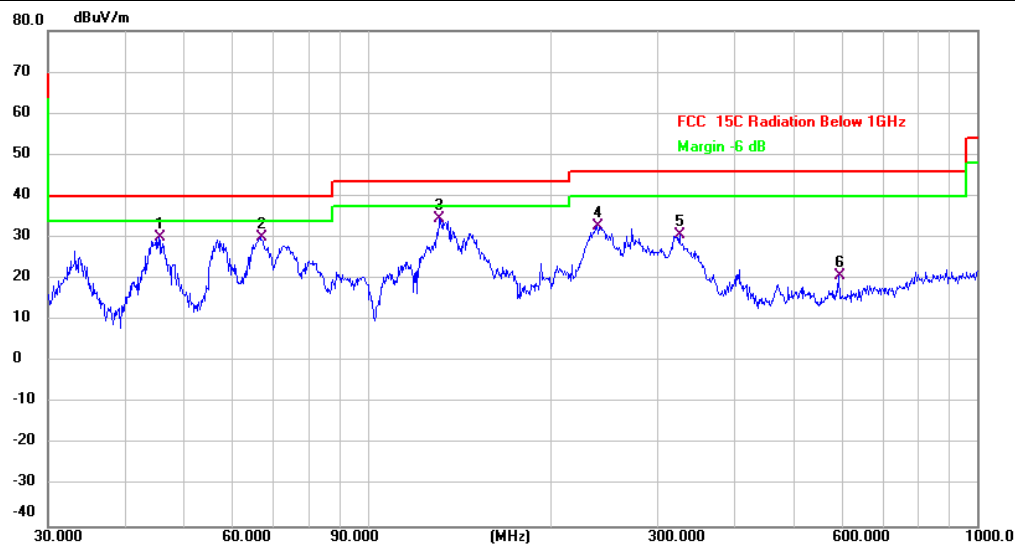


No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	45.5348	45.35	-15.25	30.10	40.00	-9.90	QP	
2	66.9669	49.02	-19.10	29.92	40.00	-10.08	QP	
3 *	131.2965	57.07	-22.64	34.43	43.50	-9.07	QP	
4	238.3102	47.56	-14.79	32.77	46.00	-13.23	QP	
5	325.5958	47.44	-16.78	30.66	46.00	-15.34	QP	
6	593.0497	31.52	-10.68	20.84	46.00	-25.16	QP	

TEST REPORT

Report No.: MTI241217015-08E3

Mode1 / Polarization: Vertical / CH: H

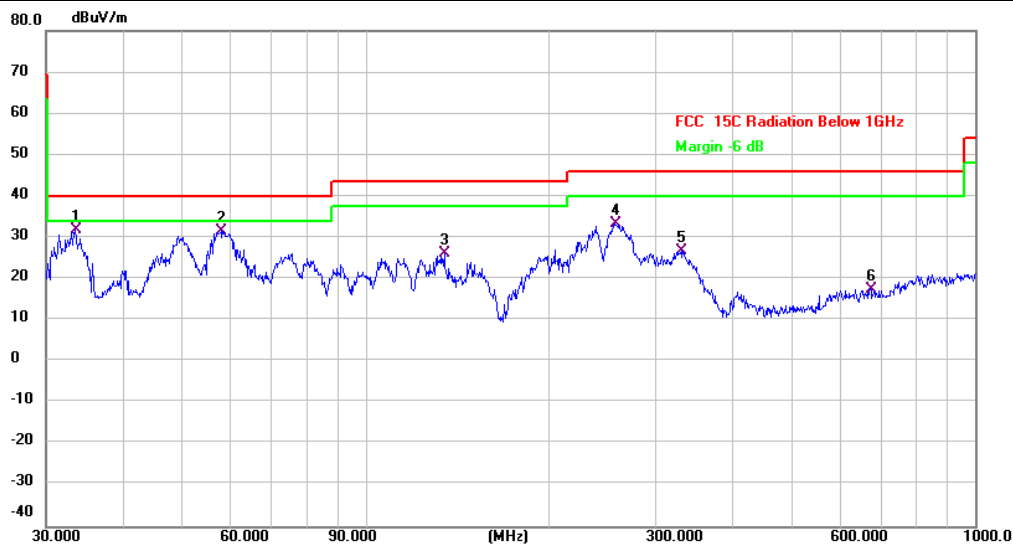

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	33.4449	56.84	-25.10	31.74	40.00	-8.26	QP
2		57.9993	53.03	-21.47	31.56	40.00	-8.44	QP
3		134.5592	42.12	-16.11	26.01	43.50	-17.49	QP
4		257.4222	51.03	-17.69	33.34	46.00	-12.66	QP
5		330.1949	40.69	-14.01	26.68	46.00	-19.32	QP
6		672.8444	26.66	-9.06	17.60	46.00	-28.40	QP

TEST REPORT

Report No.: MTI241217015-08E3


6.7 Radiated emissions (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24.3 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.					

6.7.2 Test Setup Diagram:

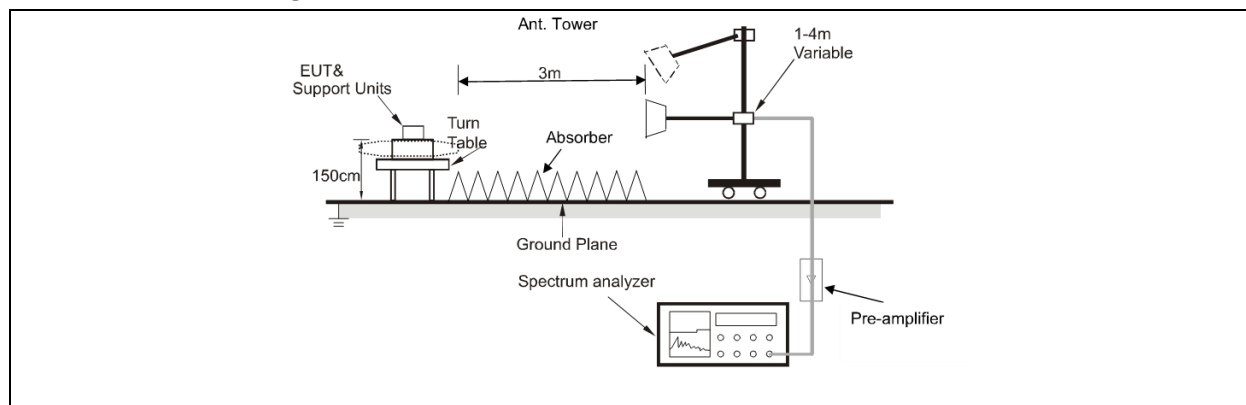

TEST REPORT

Report No.: MTI241217015-08E3

6.7.3 Test Data:

Mode1 / Polarization: Horizontal / CH: L							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4824.000	43.66	0.52	44.18	74.00	-29.82 peak
2		4824.000	37.74	0.52	38.26	54.00	-15.74 AVG
3		7236.000	43.74	7.63	51.37	74.00	-22.63 peak
4		7236.000	38.06	7.63	45.69	54.00	-8.31 AVG
5		9648.000	44.51	8.99	53.50	74.00	-20.50 peak
6	*	9648.000	38.60	8.99	47.59	54.00	-6.41 AVG

Mode1 / Polarization: Vertical / CH: L							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4824.000	42.83	0.52	43.35	74.00	-30.65 peak
2		4824.000	36.74	0.52	37.26	54.00	-16.74 AVG
3		7236.000	43.44	7.63	51.07	74.00	-22.93 peak
4		7236.000	37.63	7.63	45.26	54.00	-8.74 AVG
5		9648.000	44.94	8.99	53.93	74.00	-20.07 peak
6	*	9648.000	38.60	8.99	47.59	54.00	-6.41 AVG

TEST REPORT

Report No.: MTI241217015-08E3

Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	50.62	0.55	51.17	74.00	-22.83	peak
2		4874.000	45.07	0.55	45.62	54.00	-8.38	AVG
3		7311.000	44.06	7.46	51.52	74.00	-22.48	peak
4		7311.000	37.90	7.46	45.36	54.00	-8.64	AVG
5		9748.000	44.78	9.32	54.10	74.00	-19.90	peak
6	*	9748.000	39.15	9.32	48.47	54.00	-5.53	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	53.67	0.55	54.22	74.00	-19.78	peak
2	*	4874.000	49.10	0.55	49.65	54.00	-4.35	AVG
3		7311.000	44.28	7.46	51.74	74.00	-22.26	peak
4		7311.000	38.23	7.46	45.69	54.00	-8.31	AVG
5		9748.000	43.96	9.32	53.28	74.00	-20.72	peak
6		9748.000	38.25	9.32	47.57	54.00	-6.43	AVG

TEST REPORT

Report No.: MTI241217015-08E3

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	44.92	0.59	45.51	74.00	-28.49	peak
2		4924.000	38.67	0.59	39.26	54.00	-14.74	AVG
3		7386.000	43.48	7.93	51.41	74.00	-22.59	peak
4		7386.000	37.64	7.93	45.57	54.00	-8.43	AVG
5		9848.000	44.35	9.00	53.35	74.00	-20.65	peak
6	*	9848.000	38.26	9.00	47.26	54.00	-6.74	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	47.00	0.59	47.59	74.00	-26.41	peak
2		4924.000	40.77	0.59	41.36	54.00	-12.64	AVG
3		7386.000	43.81	7.93	51.74	74.00	-22.26	peak
4		7386.000	37.65	7.93	45.58	54.00	-8.42	AVG
5		9848.000	44.46	9.00	53.46	74.00	-20.54	peak
6	*	9848.000	38.56	9.00	47.56	54.00	-6.44	AVG

TEST REPORT

Report No.: MTi241217015-08E3

Photographs of the test setup

Refer to Appendix - Test Setup Photos

TEST REPORT

Report No.: MTi241217015-08E3

Photographs of the EUT

Refer to Appendix - EUT Photos

TEST REPORT

Report No.: MTi241217015-08E3

Appendix

TEST REPORT

Report No.: MTI241217015-08E3

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	10.080	0.5	PASS
		2437	10.040	0.5	PASS
		2462	10.080	0.5	PASS
11G	Ant1	2412	16.280	0.5	PASS
		2437	16.280	0.5	PASS
		2462	16.280	0.5	PASS
11N20SISO	Ant1	2412	17.560	0.5	PASS
		2437	16.920	0.5	PASS
		2462	17.120	0.5	PASS
11N40SISO	Ant1	2422	35.520	0.5	PASS
		2437	35.040	0.5	PASS
		2452	35.120	0.5	PASS

TEST REPORT

Report No.: MTI241217015-08E3

Test Graphs




TEST REPORT

Report No.: MTI241217015-08E3




TEST REPORT

Report No.: MTI241217015-08E3

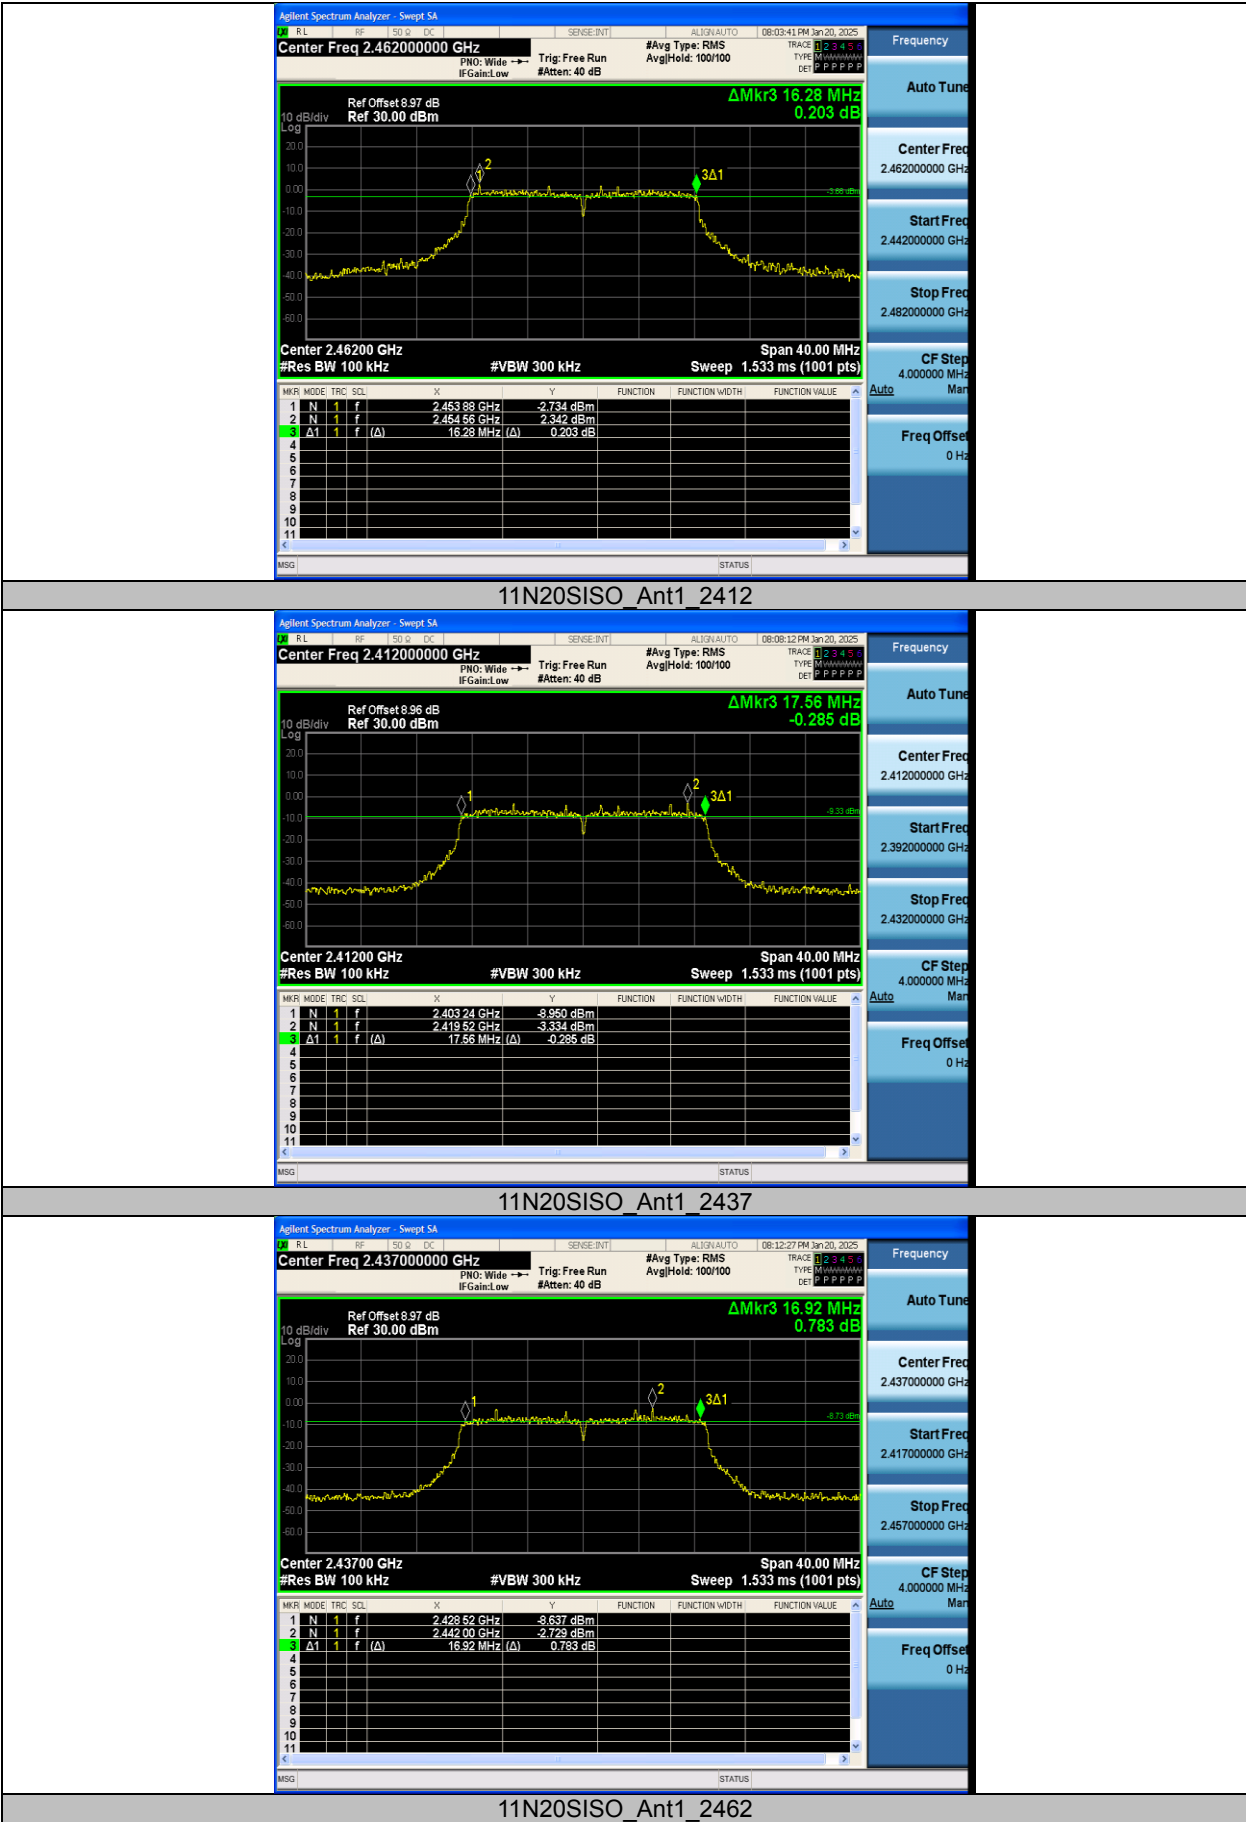


TEST REPORT

Report No.: MTI241217015-08E3

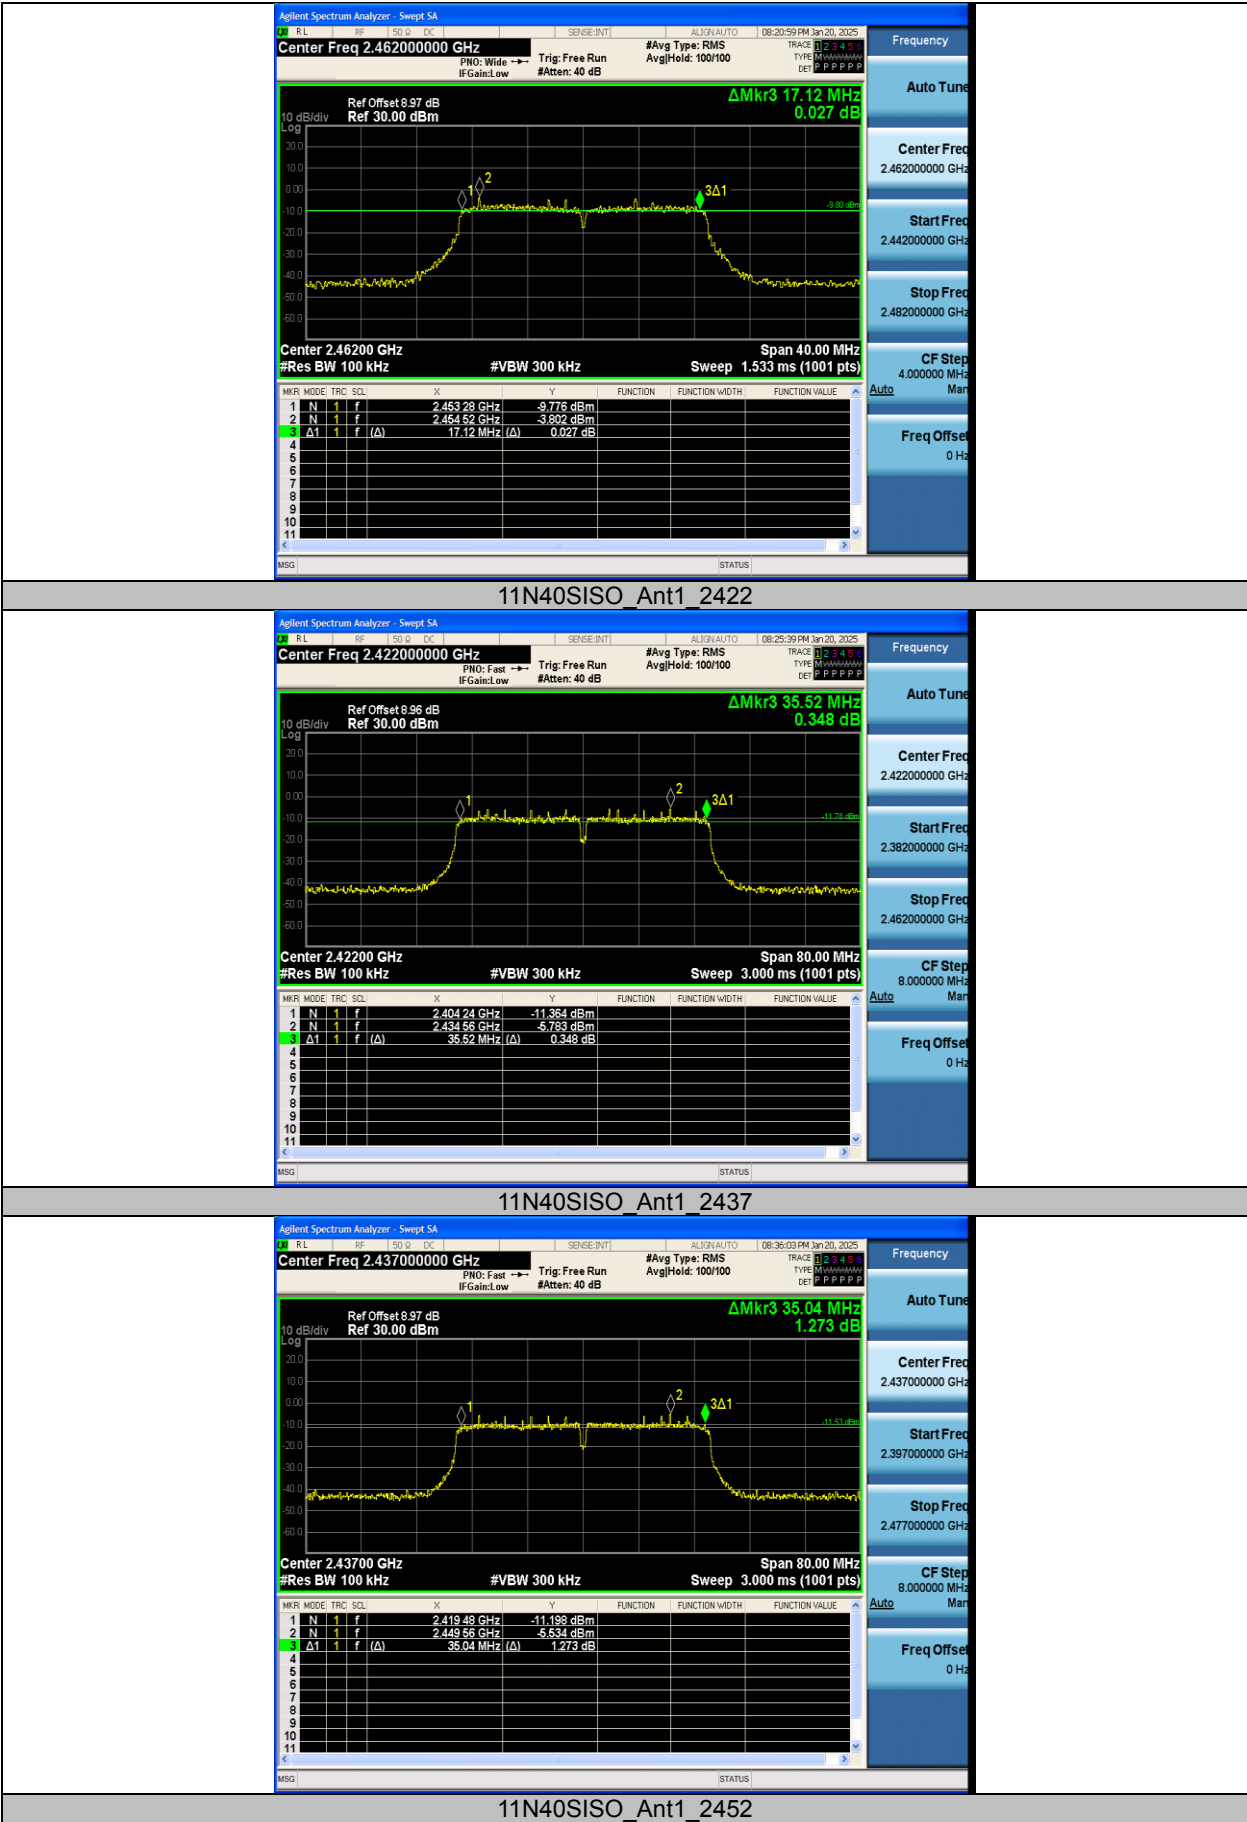

TEST REPORT

Report No.: MTi241217015-08E3

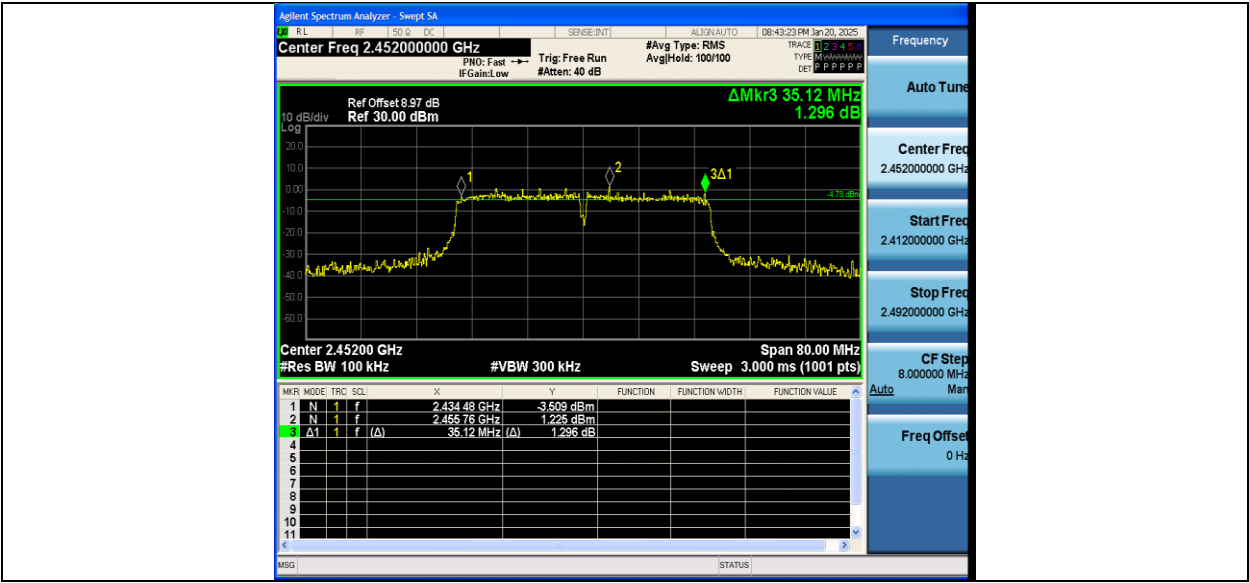

TEST REPORT

Report No.: MTI241217015-08E3

Appendix B: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	17.48	≤30.00	PASS
		2437	17.34	≤30.00	PASS
		2462	16.83	≤30.00	PASS
11G	Ant1	2412	15.91	≤30.00	PASS
		2437	15.80	≤30.00	PASS
		2462	15.00	≤30.00	PASS
11N20SISO	Ant1	2412	15.73	≤30.00	PASS
		2437	15.68	≤30.00	PASS
		2462	14.96	≤30.00	PASS
11N40SISO	Ant1	2422	15.78	≤30.00	PASS
		2437	15.81	≤30.00	PASS
		2452	15.44	≤30.00	PASS

TEST REPORT

Report No.: MTI241217015-08E3

Appendix C: Maximum power spectral density


Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-8.12	≤8.00	PASS
		2437	-7.66	≤8.00	PASS
		2462	-8.73	≤8.00	PASS
11G	Ant1	2412	-16.91	≤8.00	PASS
		2437	-10.05	≤8.00	PASS
		2462	-9.28	≤8.00	PASS
11N20SISO	Ant1	2412	-17.35	≤8.00	PASS
		2437	-16.75	≤8.00	PASS
		2462	-16.36	≤8.00	PASS
11N40SISO	Ant1	2422	-19.40	≤8.00	PASS
		2437	-18.68	≤8.00	PASS
		2452	-12.02	≤8.00	PASS

TEST REPORT


Report No.: MTI241217015-08E3

Test Graphs

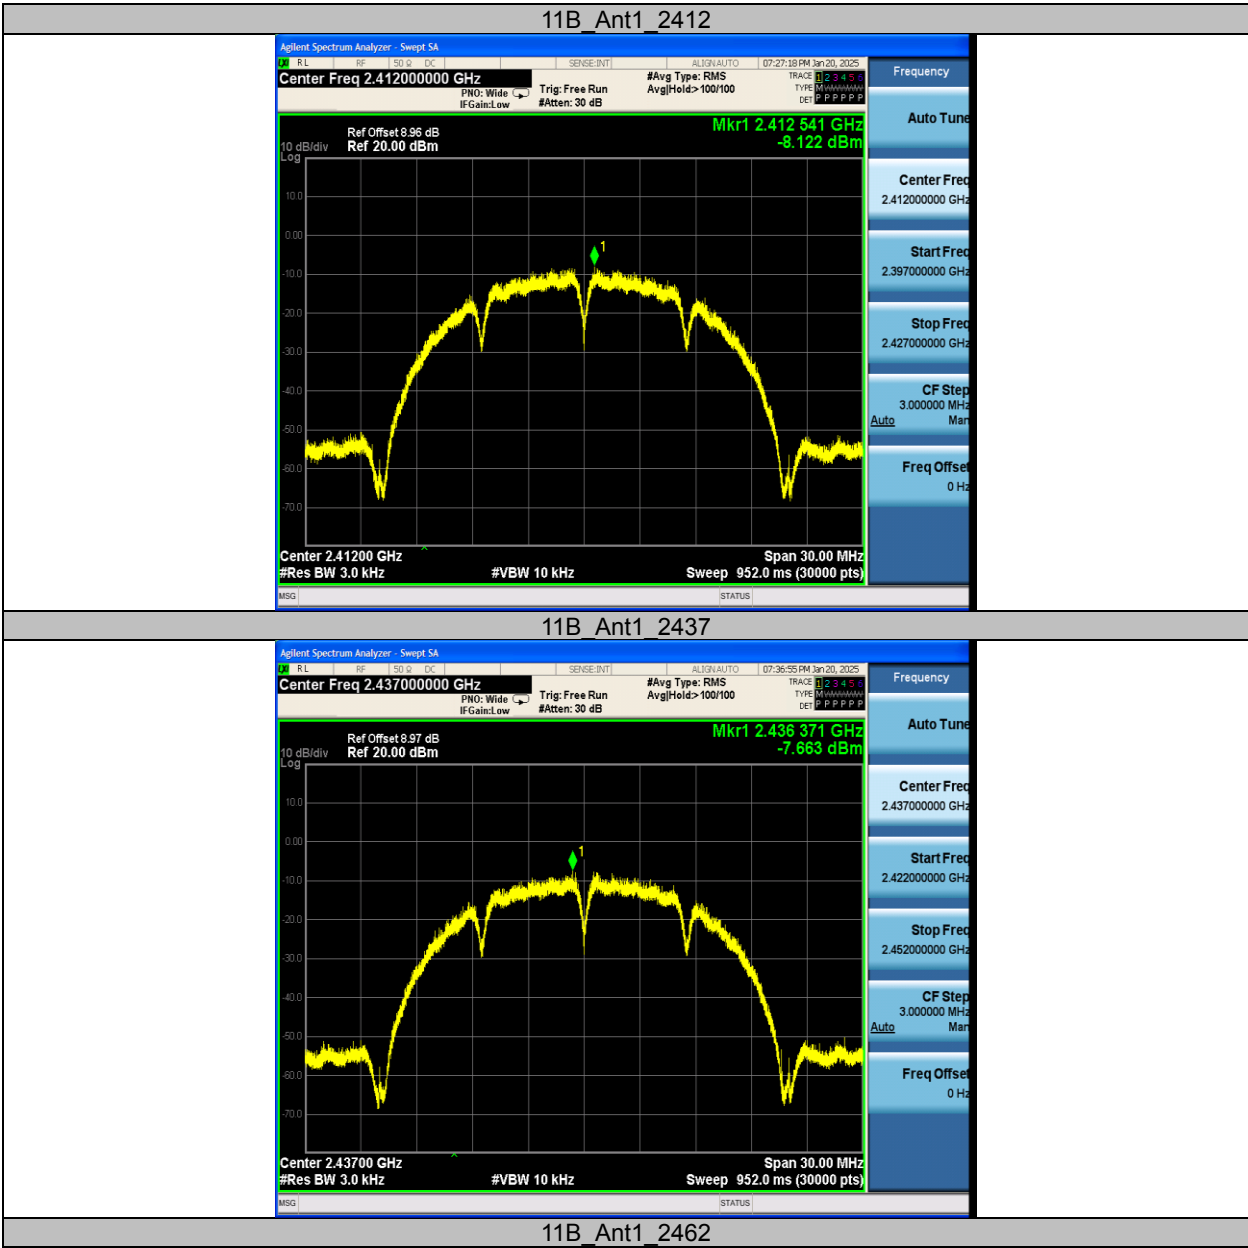


TEST REPORT

Report No.: MTI241217015-08E3

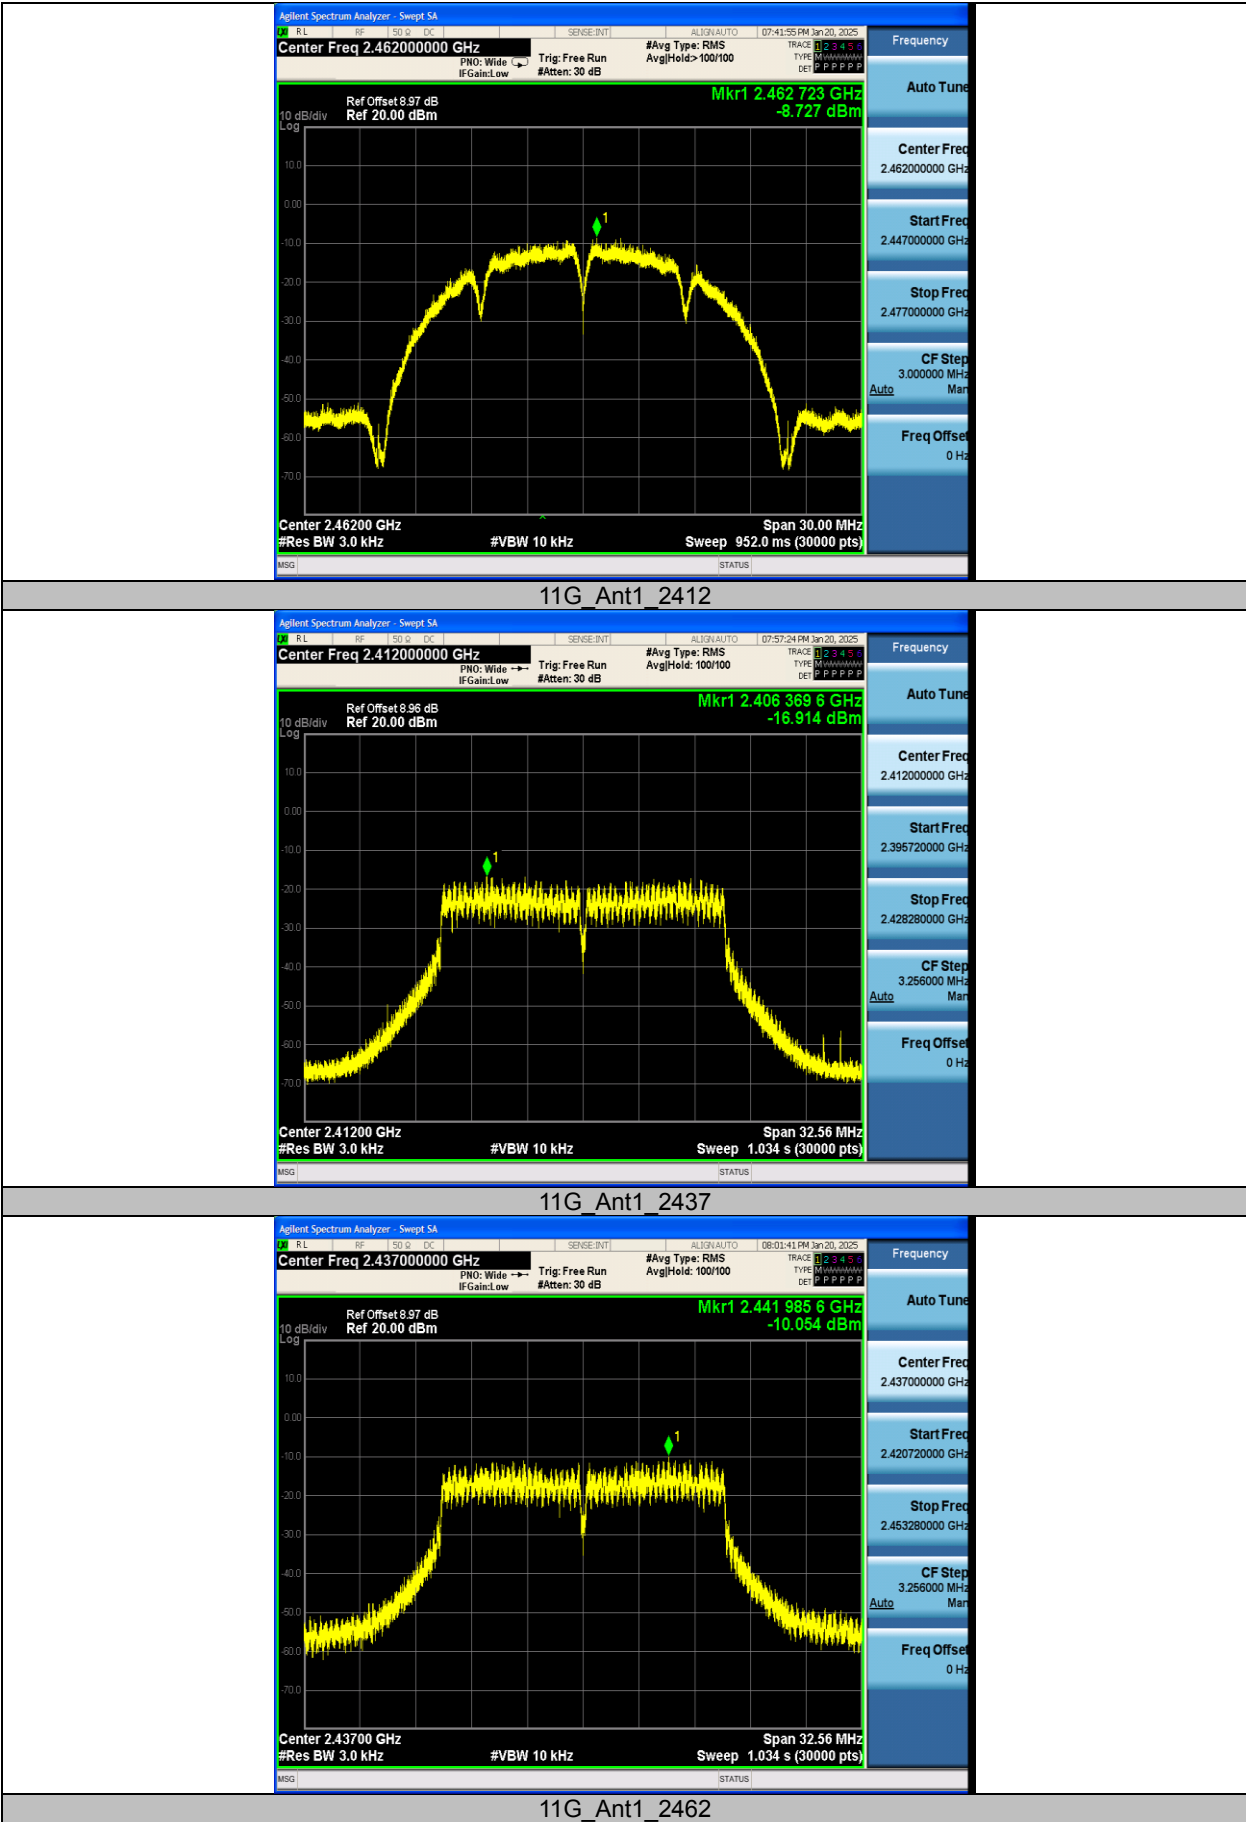


TEST REPORT

Report No.: MTI241217015-08E3

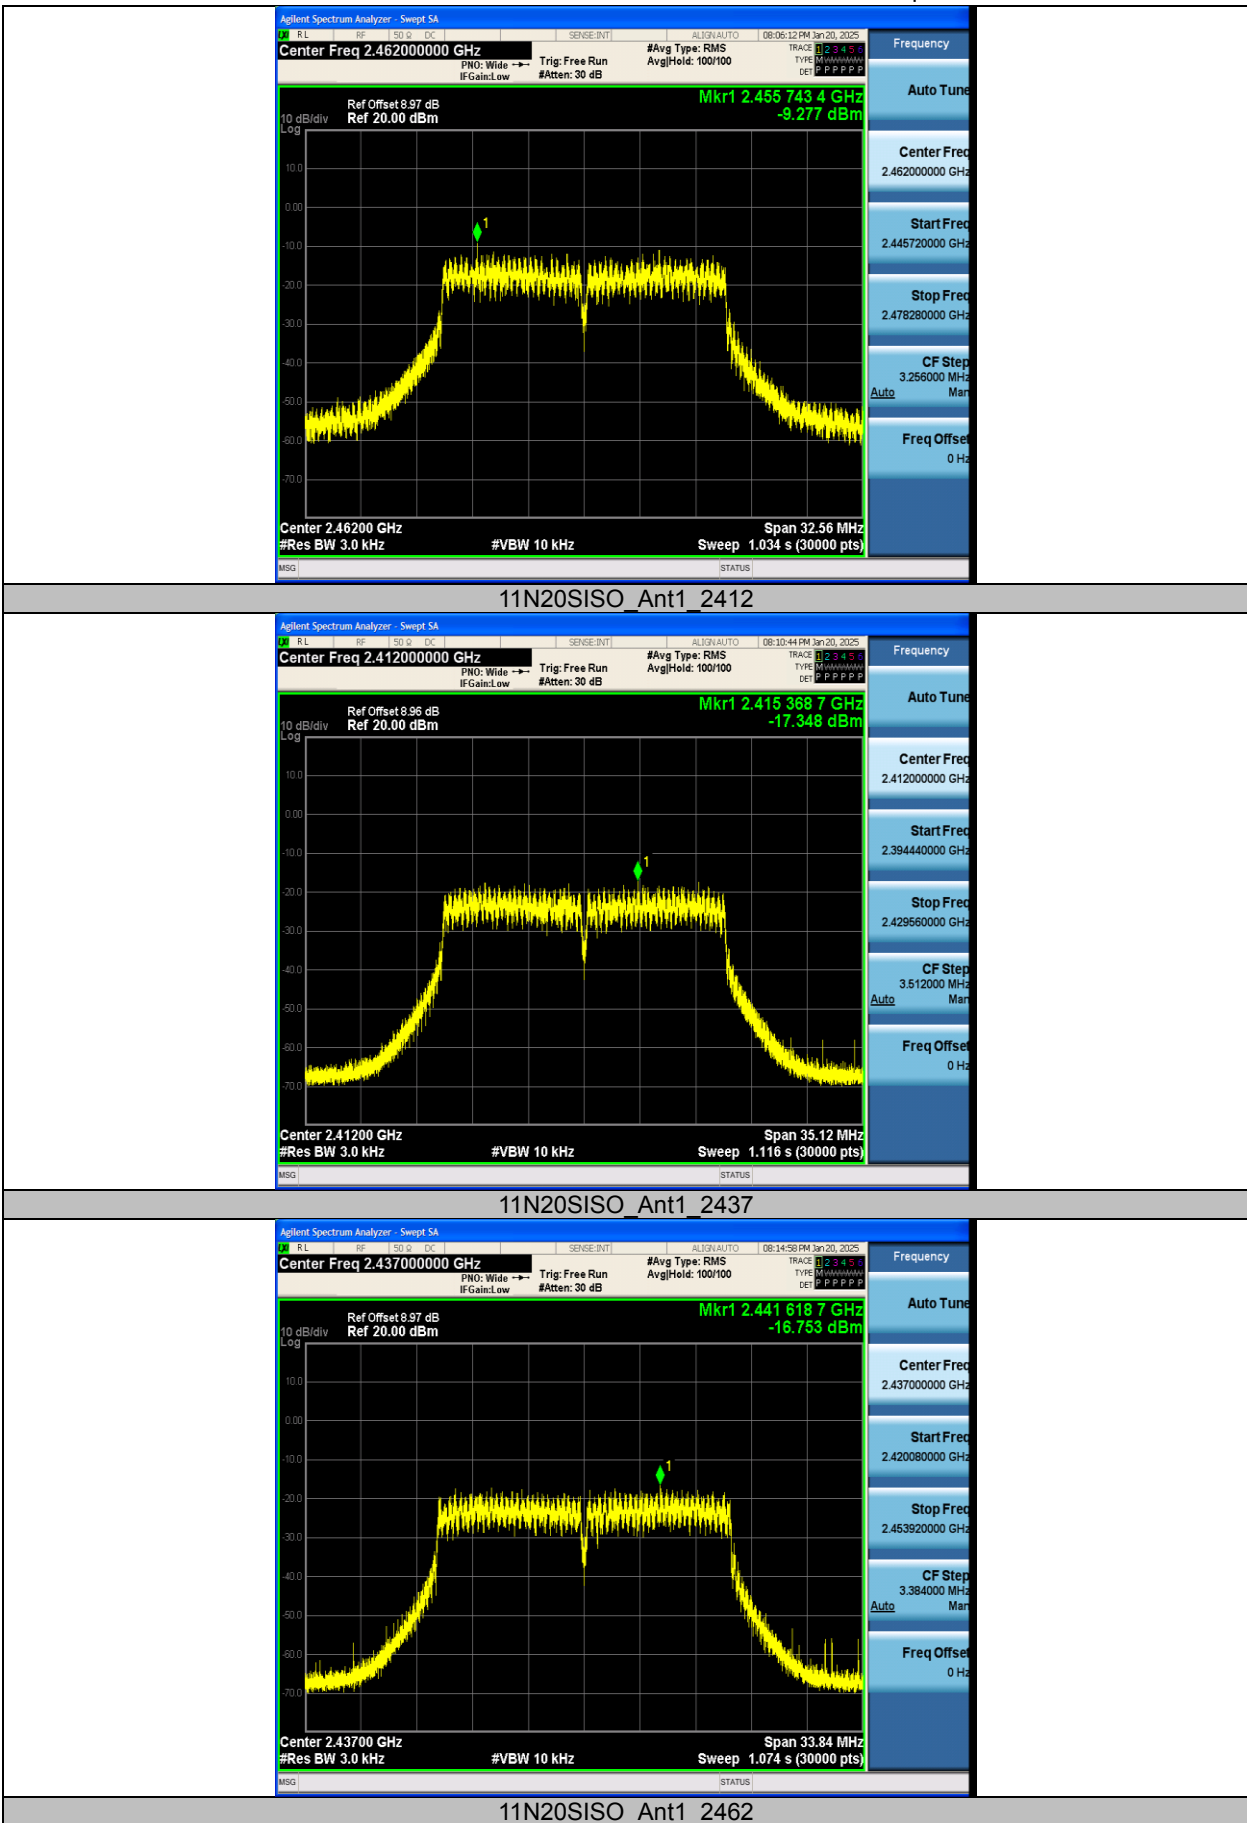


TEST REPORT

Report No.: MTI241217015-08E3

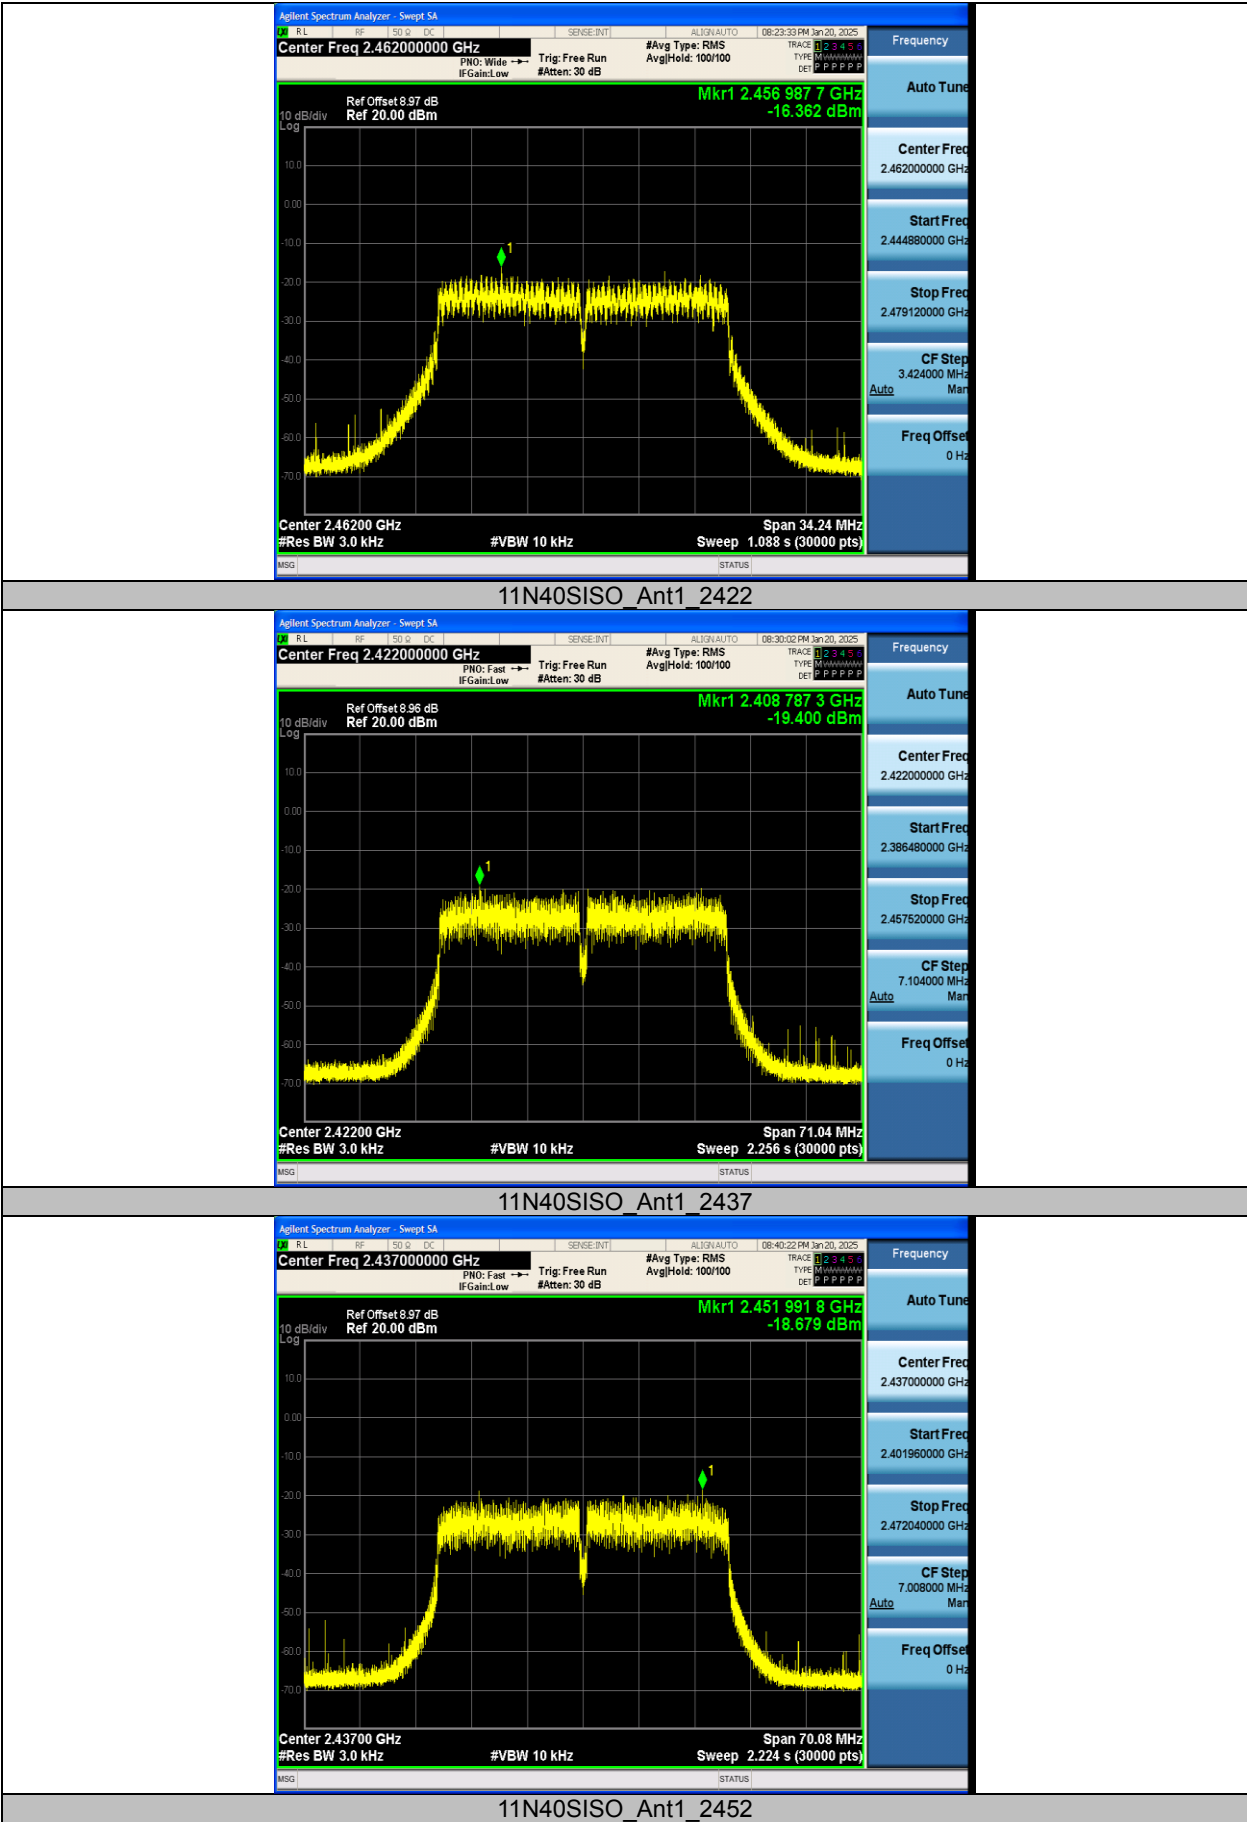

TEST REPORT


Report No.: MTI241217015-08E3

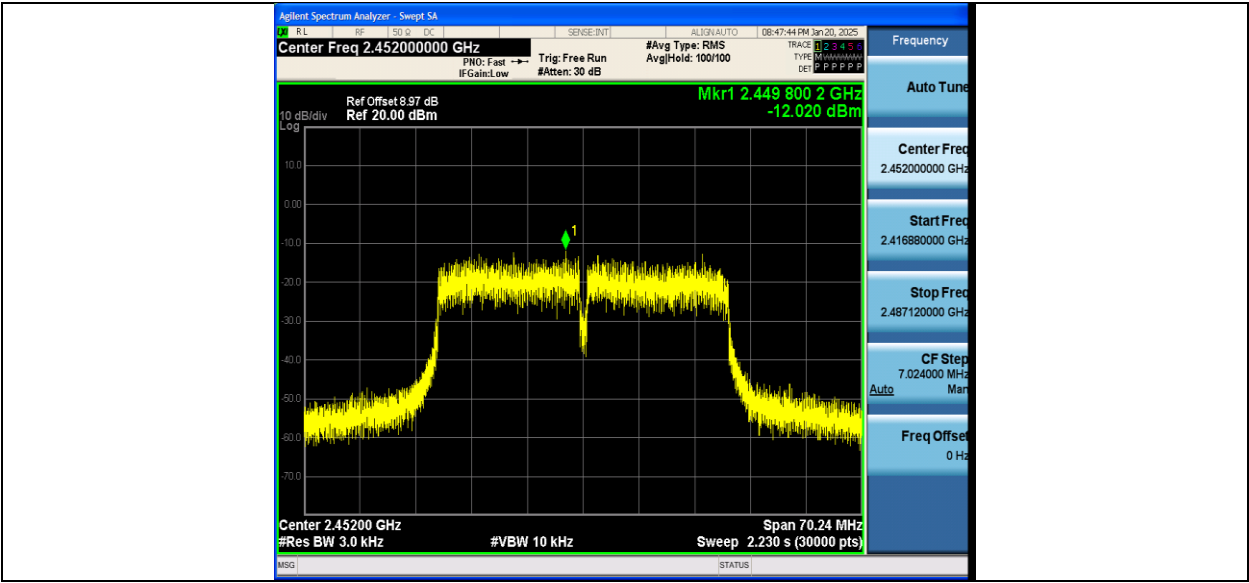

TEST REPORT


Report No.: MTI241217015-08E3

Appendix D: Band edge measurements

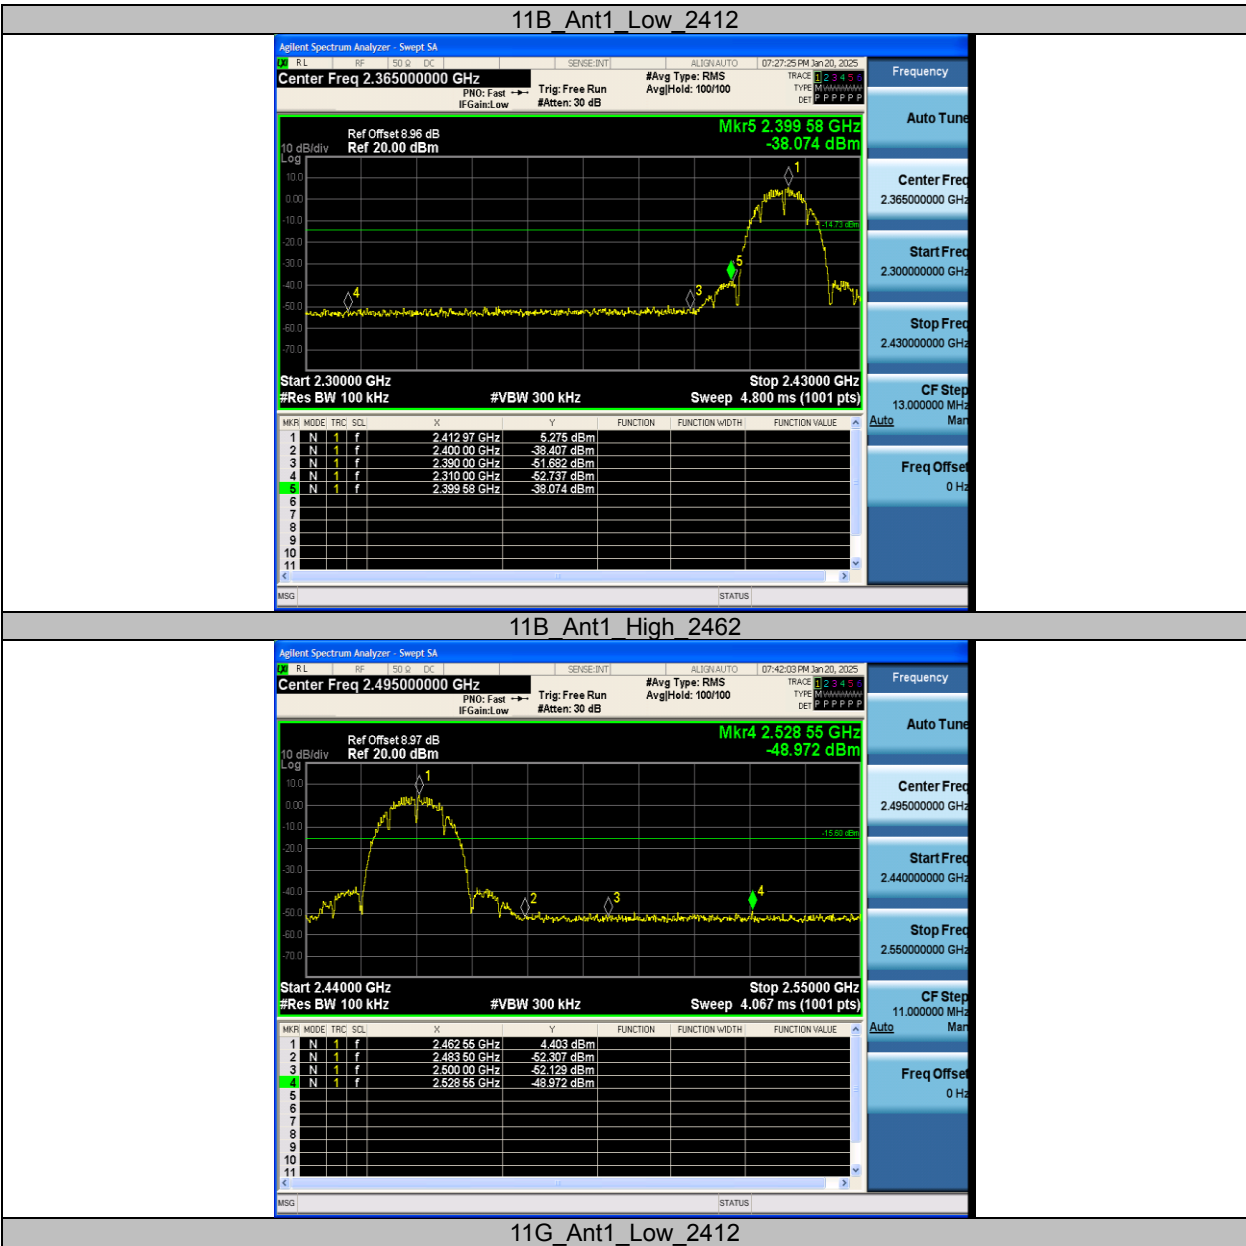


TEST REPORT

Report No.: MTI241217015-08E3

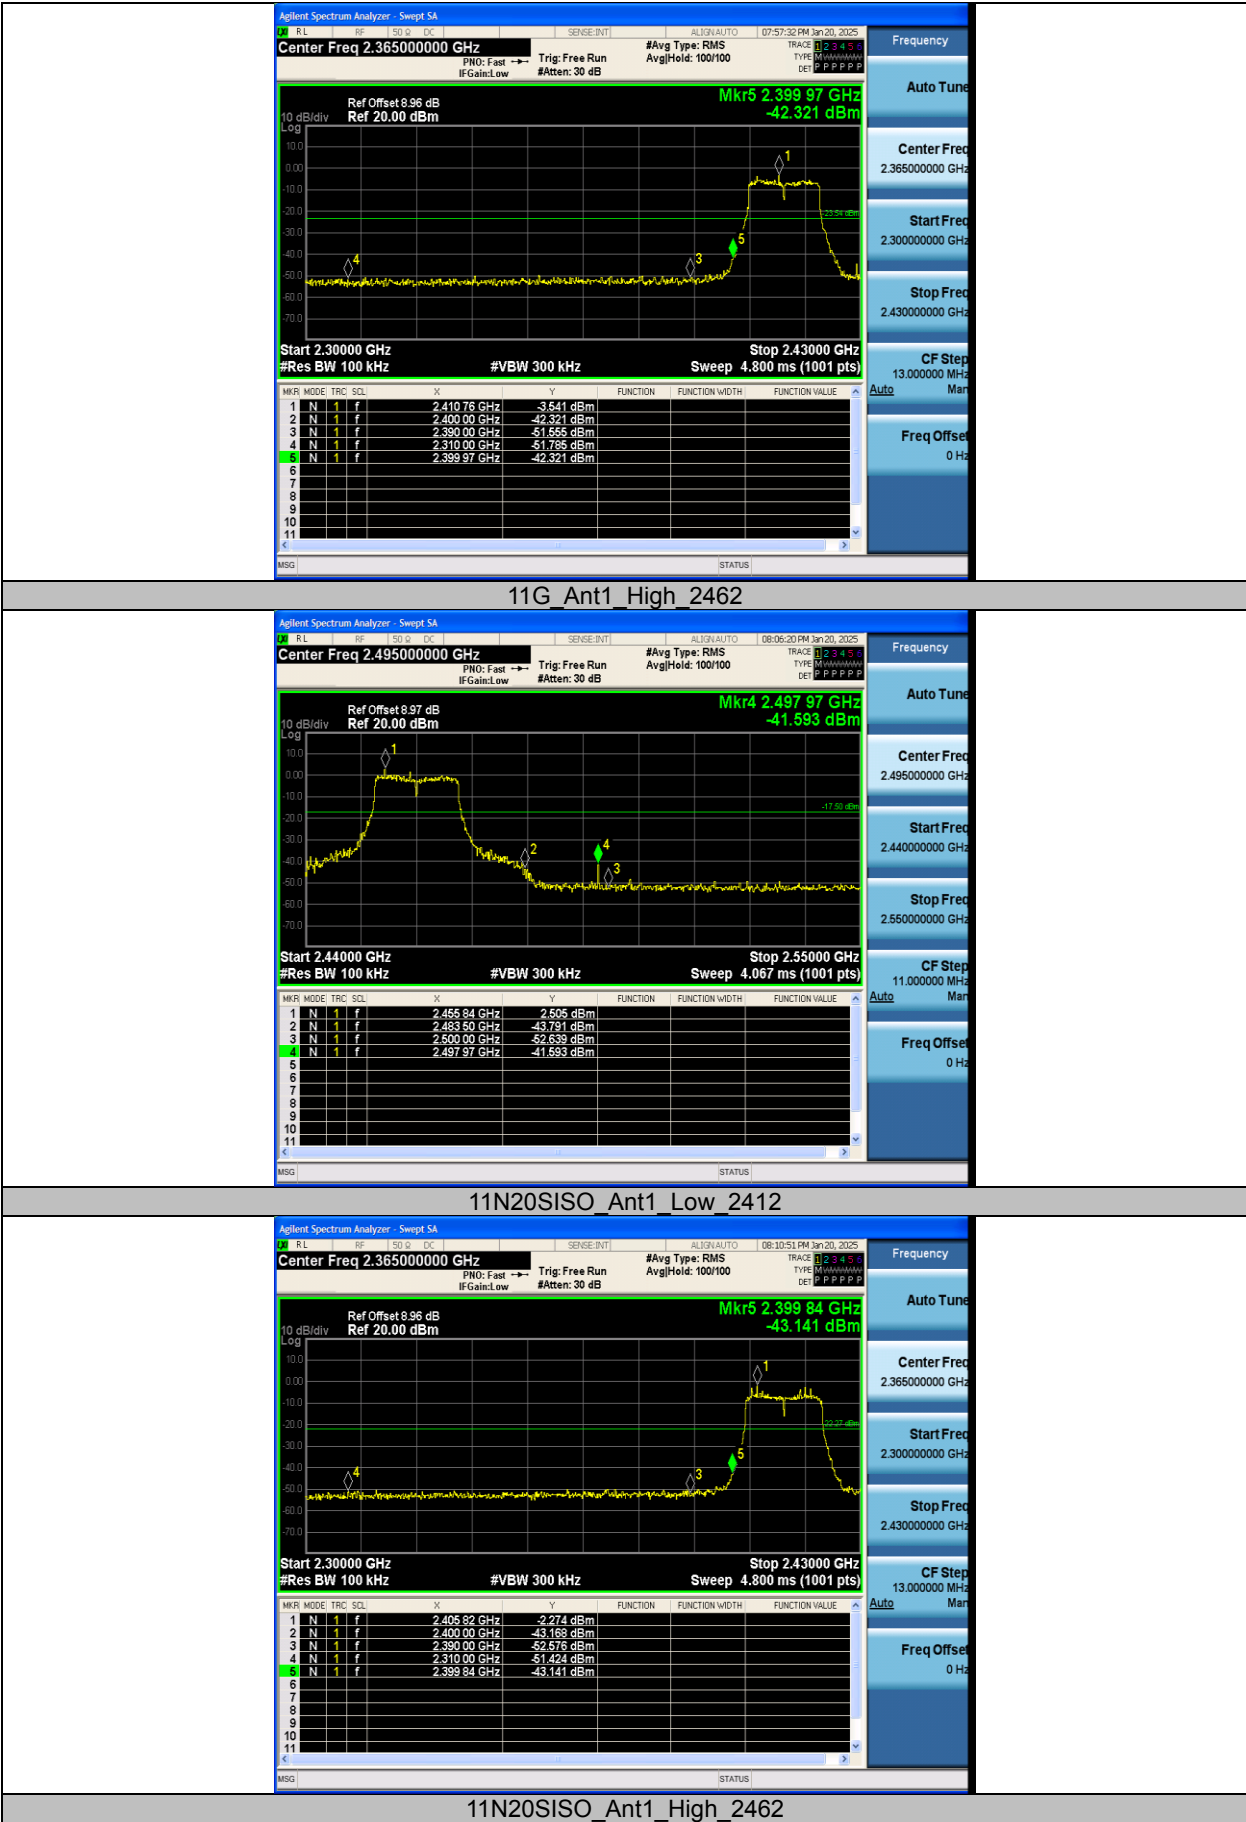

TEST REPORT

Report No.: MTI241217015-08E3

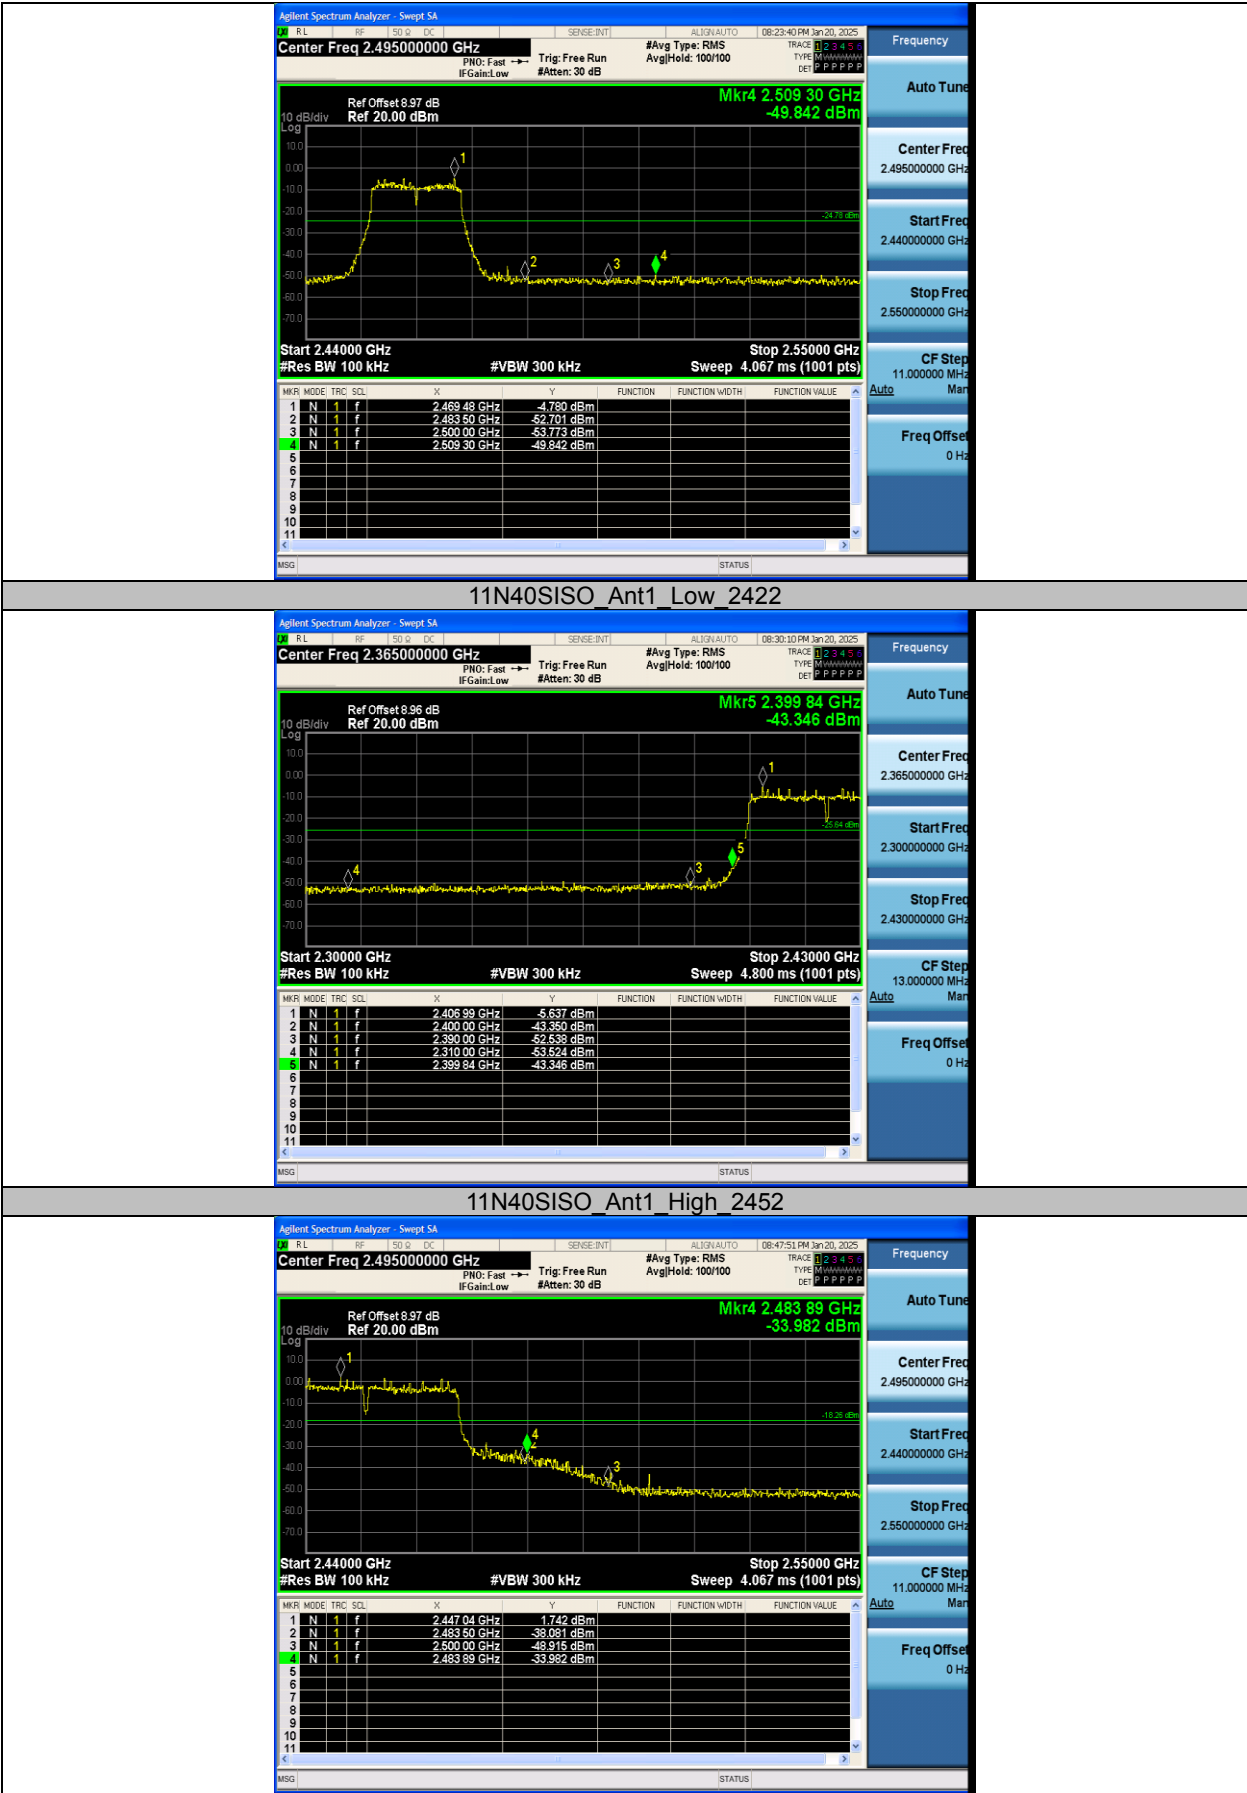

TEST REPORT

Report No.: MTI241217015-08E3

Appendix E: Conducted Spurious Emission

