

# acknowledgment

Customer name: Zhongshan yuansiwei technology co., Ltd

Customer data: 1T0011

Our model number: A11-G43\*5.3\*0.8-6.3UH-60MM

Sample delivery date: March and June, 2025

Supply side: Dongguan Jerice Technology Co. , Ltd.

Draw up	Audit	Permission granted
Wang Liying	Deng xianggui	

Client acknowledges:

Qualified	Disqualified	Admit it
Notes		

Dongguan Jerice Technology Co. , Ltd.



Tel: \_\_\_\_\_

Fax: 86+13632701380

Address: 96 Long Wu Road, Tai Ling Shan, Dongguan (3F, building L, Kam Hung Tat Science and Technology Park)

Customer name	Customer data	Our model number	Version	Date
yuansiwei	1T0011	A11-G43*5.3*0.8-6.3UH-60MM	A0	March and June, 2025

一、 Floor plan: unit: MM

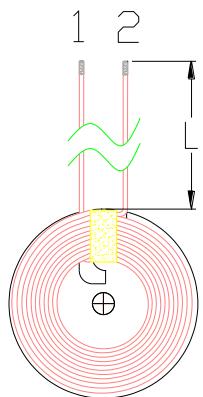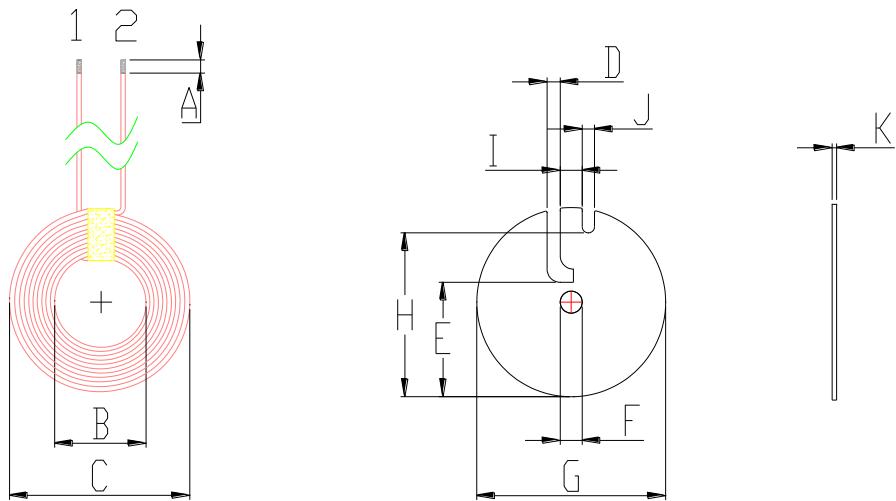

A	$3.0 \pm 1$
B	$20.5 \pm 0.5$
C	$41 \pm 1$
D	$3.0 \pm 0.3$
E	$26 \pm 0.3$
F	$5.3 \pm 0.2$
G	$43 \pm 0.3$
H	$36 \pm 0.5$
I	$5 \pm 0.3$
J	$3.0 \pm 0.3$
K	$0.8 \pm 0.1$
L	$60 \pm 2$

二、 Product parameters:

Feet	Line diameter	Number of turns	Notes
1- 2	0.08*105P	10T	silk covered wire

---

### 三、 Technical Requirements:

1. Fix the head and tail of the copper wire to prevent loose or broken copper wire.
2. According to customer requirements to cut the head of the excess copper wire, tinned, tinned depth of  $3\pm1\text{mm}$ .
3. Stick some white glue on the magnetic sheet and stick a copper coil to ensure that the surface of the product is clean and tidy in the process.
4. There is a round hole on the hard magnetic sheet without damage.
5. Additional process (according to customer's requirements): stick double-sided adhesive on the back of the finished product, and then install it.




### 四、 Electrical parameter:

#### 1. Inductance value,

$$\text{PIN 1} - 2 = 6.3\mu\text{H} \pm 0.3\mu\text{H}$$

$$Q \geq 45$$

The above inductances and Q values are based on Quanhua 1062A instrument and 100KHZ/1.0Vrms or equivalent instrument.

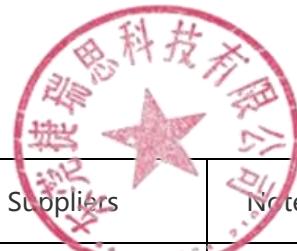

## 五、 Bill of materials:

NO	Name	Material Quality	Suppliers	Notes
1	silk covered wire	0.08X105P	Uyghur or equivalent	
2	Disk	G45*5.3*0.8	TX or equivalent	
3	Tin	High temperature environmental protection	Thond Island or equivalent	
4	White glue	BY882	Treasure month or equivalent	
5	Double-sided glue	Ø42*8	Hung Fai or equivalent	