

FCC TEST REPORT

FCC ID:2B07E-CK3-QC

Report No..... : ZHT-250327003W02-3

Product..... : Pathfinder Lite MotoNavAI

Trademark..... : Cokima

Model(s)..... : CK3-QC

Model Difference..... : /

Applicant..... : Cokima Technology(Shenzhen)Co.,Ltd

Address..... : 1805, Unit 2, Building 1, Lechuanghui Building, 1211, Guihua Community
Sightseeing Road, Guanlan Street, Longhua District, Shenzhen, China

Manufacturer..... : Cokima Technology(Shenzhen)Co.,Ltd

Address..... : 1805, Unit 2, Building 1, Lechuanghui Building, 1211, Guihua Community
Sightseeing Road, Guanlan Street, Longhua District, Shenzhen, China

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai
Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : May 7, 2025

Date of Test(s)..... : May 7, 2025 to Jun. 4, 2025

Date of Issue..... : Jun. 4, 2025

Test Standard(s)..... : FCC Part 15 Subpart E 15.407
KDB789033 D02 General U-NII Test Procedures New Rules v02r01

Test procedure..... ANSI C63.10:2013

In the configuration tested, the EUT complied with the standards specified above.

Tested by:

Reviewed by:

Approved by:

Leon Li

Leon Li/ Engineer

Baret Wu

Baret Wu/ Director

Levi Lee

Levi Lee/ Manager

Note: The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.

Table of Contents

Page

1. VERSION	4
2.SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4.EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 APPLICABLE STANDARD	15
4.2.2 CONFORMANCE LIMIT	15
4.2.3 MEASURING INSTRUMENTS	16
4.2.4 TEST CONFIGURATION	17
4.2.5 TEST PROCEDURE	18
5.POWER SPECTRAL DENSITY TEST	166
5.1 APPLIED PROCEDURES / LIMIT	166
5.2 TEST PROCEDURE	167
5.3 DEVIATION FROM STANDARD	167
5.4 TEST SETUP	167
5.5 EUT OPERATION CONDITIONS	167
5.6 TEST RESULTS	168
6. 26DB & 6DB &99% EMISSION BANDWIDTH	169
6.1 APPLIED PROCEDURES / LIMIT	169
6.2 TEST PROCEDURE	169
6.3 EUT OPERATION CONDITIONS	170
6.4 TEST RESULTS	170
7.MAXIMUM CONDUCTED OUTPUT POWER	171
7.1 PLIED PROCEDURES / LIMIT	171

Table of Contents	Page
7.2 TEST PROCEDURE	172
7.3 DEVIATION FROM STANDARD	172
7.4 TEST SETUP	173
7.5 EUT OPERATION CONDITIONS	173
7.6 TEST RESULTS	173
8.OUT OF BAND EMISSIONS	174
8.1 APPLICABLE STANDARD	174
8.2 TEST PROCEDURE	175
8.3 DEVIATION FROM STANDARD	175
8.4 TEST SETUP	175
8.5 EUT OPERATION CONDITIONS	175
8.6 TEST RESULTS	175
9.SPURIOUS RF CONDUCTED EMISSIONS	176
9.1 CONFORMANCE LIMIT	176
9.3 TEST SETUP	176
9.4 TEST PROCEDURE	176
9.5 TEST RESULTS	177
10.FREQUENCY STABILITY MEASUREMENT	178
10.1 LIMIT	178
10.2 TEST PROCEDURES	178
10.3 TEST SETUP LAYOUT	178
10.4 EUT OPERATION DURING TEST	179
10.5 TEST RESULTS	179
11.ANTENNA REQUIREMENT	180
11. TEST SETUP PHOTO	181
12. EUT CONSTRUCTIONAL DETAILS	181

1. VERSION

Report No.	Version	Description	Approved
ZHT-250327003W02-3	Rev.01	Initial issue of report	Jun. 4, 2025

2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.209 (a), 15.407 (b) 15.407 (b)	Spurious Radiated Emissions	PASS	
15.207	Conducted Emission	N/A	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407 (b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	
15.407 (g)	Frequency Stability	PASS	
15.407 (c)	Automatically Discontinue Transmission	NOTE(2)	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2)WIFI antenna 1 and antenna 2 cannot be transmitted at the same time

(3)The product meets the requirements of 15.407 (C) standard

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

2.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add. : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.3\text{dB}$
2	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=4.5\text{dB}$
3	3m chamber Radiated spurious emission(18GHz-40GHz)	$U=3.34\text{dB}$
4	Conducted Adjacent channel power	$U=1.38\text{dB}$
5	All emissions radiated(9k-30MHz)	$U=4.68\text{dB}$
6	Conducted output power uncertainty Above 1G	$U=1.576\text{dB}$
7	Conducted output power uncertainty below 1G	$U=1.28\text{dB}$
8	humidity uncertainty	$U=5.3\%$
9	Temperature uncertainty	$U=0.59^{\circ}\text{C}$
10	Radiated disturbance(30MHz-1000MHz)	$U=4.8\text{dB}$
11	Radiated disturbance(1GHz-6GHz)	$U=4.9\text{dB}$
12	Radiated disturbance(1GHz-18GHz)	$U=5.0\text{dB}$
13	Occupied Bandwidth	$U=4.96\text{dB}$
14	RF Power Density	$U=0.77\text{dB}$

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Pathfinder Lite MotoNavAI	
Test Model No.:	CK3-QC	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth) ☒ 802.11n/ac (40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n/ac(HT20/HT40):MCS0-MCS7; 802.11ac(VHT80):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; ☒ 5745-5825 MHz for802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230 MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795 MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
Channel List	Please refer to the Note 2.	
Antenna Type and Antenna gain:	FPC antenna; 5180-5240MHz: 3.11dBi, 5745-5825 MHz: 2.94dBi	
Power supply:	Input: DC 12 V	
Sample Number:	250327003YP-001	
Remark:The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.		

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Note 2:

802.11a/n/ac(20MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	149	5745	153	5765
40	5200	48	5240	157	5785	161	5805
165	5825			165	5825		

802.11n(40MHz) Frequency Channel

802.11n /ac(40MHz)Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755				
46	5230	159	5795				

802.11ac(80MHz) Frequency Channel

Channel	Frequency (MHz)
42	5210
155	5775

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Pretest Mode	Description
Mode 1	802.11a / n20/ac 20/ CH36/ CH40/ CH48/ CH149 / CH157 / CH165
Mode 2	802.11n 40/ac40 CH38/ CH46/ CH151/ CH159
Mode 3	802.11 ac80 CH42/ CH155
Mode 4	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n20/ac 20/ CH36/ CH40/ CH48/ CH149 / CH157 / CH165
Mode 2	802.11n 40/ac40 CH38/ CH46/ CH151/ CH159
Mode 3	802.11 ac80 CH42/ CH155

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
 - (2) The test software is the SecureCRTPortable.exe FX_HH_x86_7.0.0.326 which can set the EUT into the individual test modes.
- 802.11a/802.11n(HT20)/802.11ac(HT20) Power set point:Default
802.11n /ac(40MHz)Power set point:Default
802.11ac(80MHz)Power set point:Default

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
2	Loop Antenna	TESEQ	HLA6121	58357	Oct. 11, 2024	Oct. 10, 2025
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 6, 2025	May 5, 2026
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 7, 2025	May 6, 2026
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 15, 2025	May 14, 2026
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 15, 2025	May 14, 2026
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 21, 2024	Oct. 20, 2025
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 21, 2024	Oct. 20, 2025
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 21, 2024	Oct. 20, 2025
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 7, 2025	May 6, 2026
12	Single Generator	Agilent	N5182A	MY48180575	May 7, 2025	May 6, 2026
13	MWRF Power Meter Test system	MW	MW100-RFCB	/	May 7, 2025	May 6, 2026
14	CABLE	EMToni	DA800-NM-NM-11000MM	/	May 6, 2025	May 5, 2026

Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
LISN	R&S	ENV216	102794	May 6, 2025	May 5, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 7, 2025	May 6, 2026
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 7, 2025	May 6, 2026
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2025	May 7, 2026
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2025	May 7, 2026
CABLE	EMToni	G223-NM-BNCM -2000MM	/	May 7, 2025	May 6, 2026

Conducted Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 21, 2024	Oct. 20, 2025
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
3	Power Sensor	MWRFTtest	MW100-RFCB	/	May 7, 2025	May 6, 2026

Testing software

Project	Software name	Edition
RF Conducted	MTS 8310	2.0.0.0
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen 8.8
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

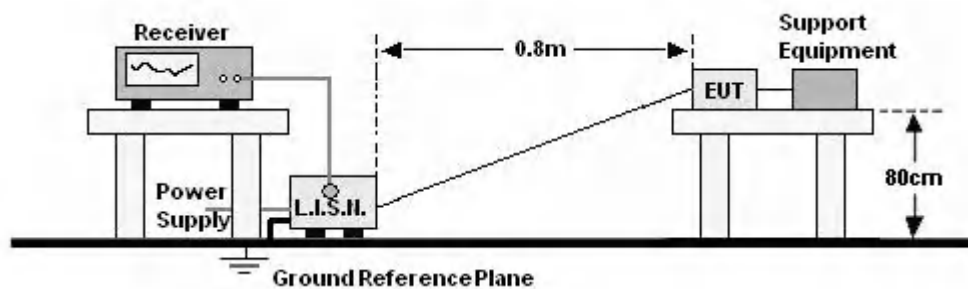

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 TEST RESULTS

The Product is powered by the DC only, the test item is not applicable.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209, RSS-247 6.2.1.2, RSS-Gen

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

RSS-Gen 8.10 Restricted frequency bands

MHz	MHz	MHz	GHz
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475-156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614		

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

Limits of unwanted emission out of the restricted bands

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5850	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2

NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$

2, According to FCC 16-24,All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to RSS-Gen§8.9: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field

strength limits specified in RSS-Gen Issue 5 is not required.

In case the emission fall within the restricted band specified on RSS-Gen Issue 5, then the RSS-Gen Issue 5 limit in the table below has to be followed.


Frequency (MHz)	Distance (Meters)	Radiated (dBuV/m)	Radiated (uV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	2400/F(KHz)
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	24000/F(KHz)
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

4.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

4.2.4 TEST CONFIGURATION


1. For radiated emissions below 30MHz

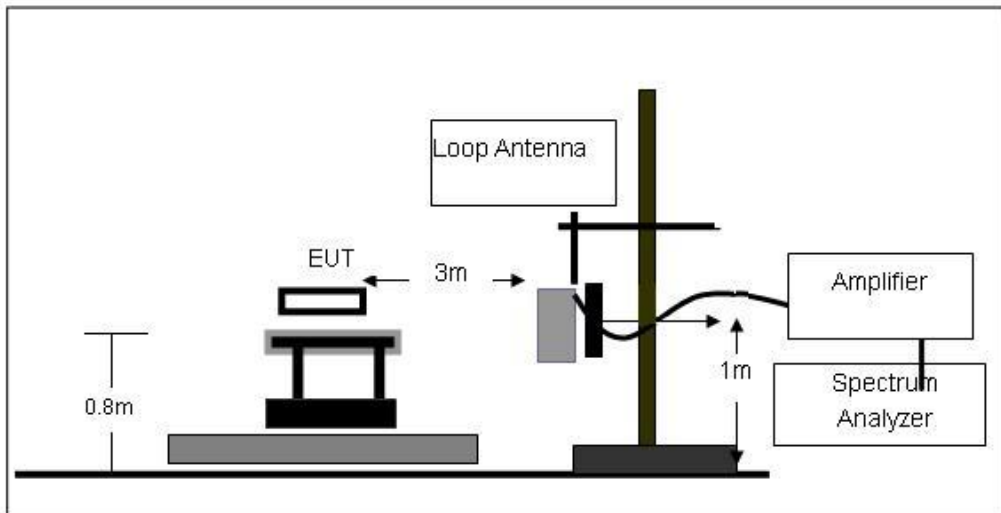

2. For radiated emissions from 30MHz to 1000MHz

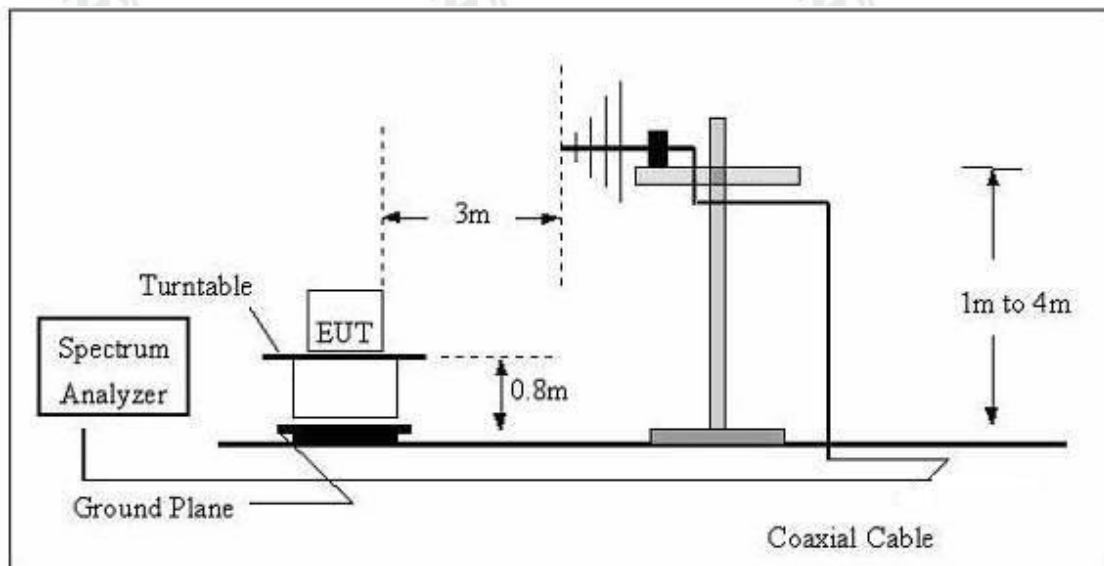

3. Radiated Emission Test-Up Frequency Above 1GHz

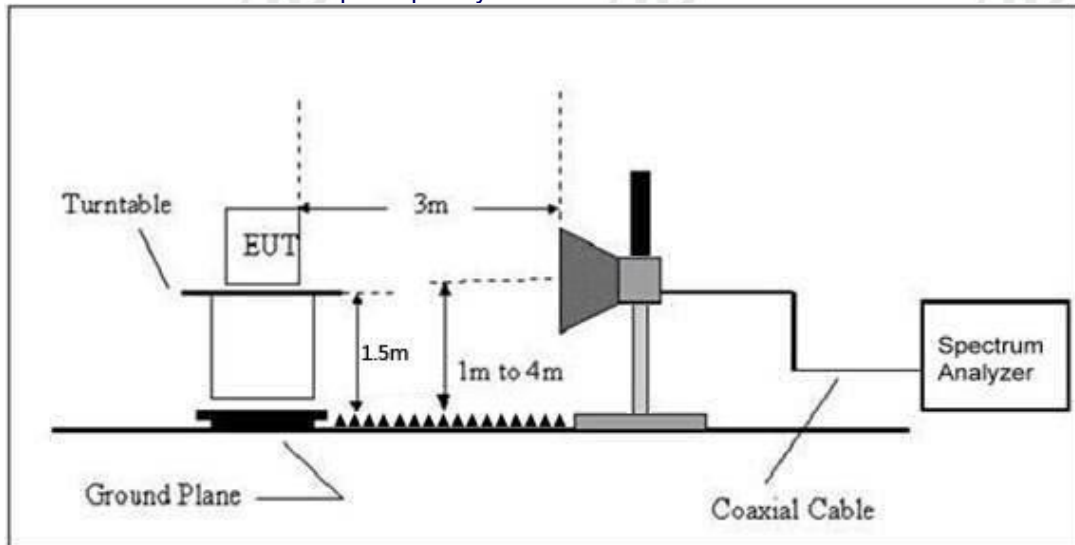

4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

4.2.6 TEST RESULT(Between 9KHz – 30MHz)

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




ZHONGHAN

Between 30MHz – 1GHz

Project No.: ZHT-250327003W02-3

Page 19 of 181


Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V		

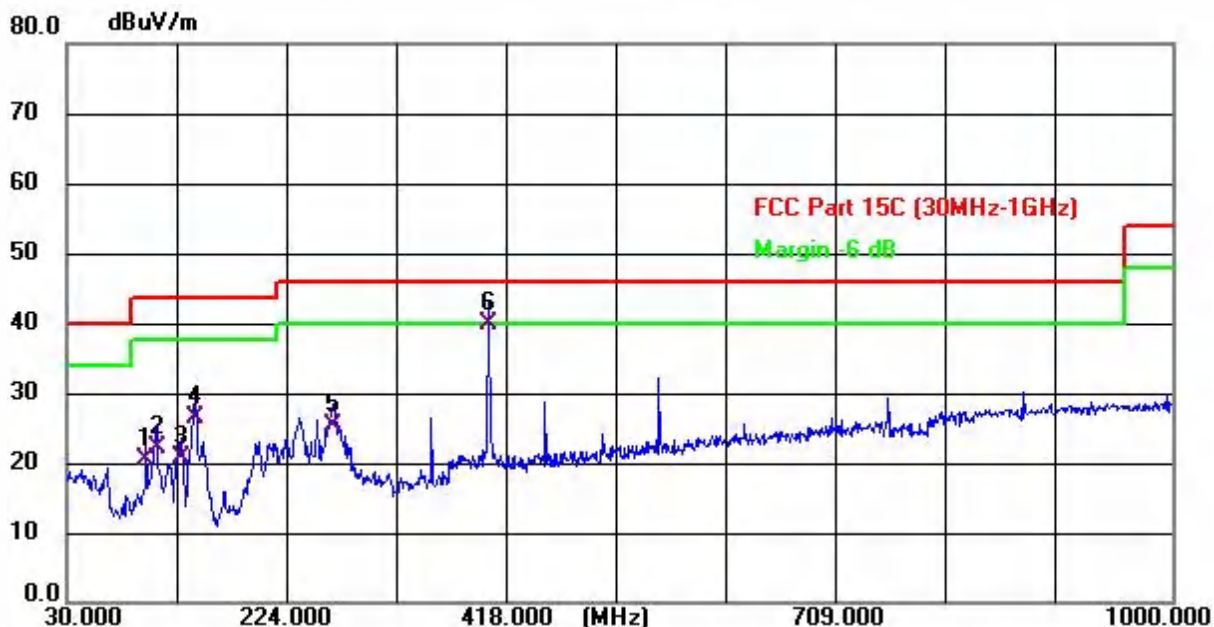

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	99.840	31.60	-11.27	20.33	43.50	-23.17	QP
2	109.540	34.12	-12.04	22.08	43.50	-21.42	QP
3	130.880	34.07	-13.36	20.71	43.50	-22.79	QP
4	142.520	40.23	-13.85	26.38	43.50	-17.12	QP
5	263.770	34.33	-8.97	25.36	46.00	-20.64	QP
6 *	399.570	45.84	-5.96	39.88	46.00	-6.12	QP



Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V		

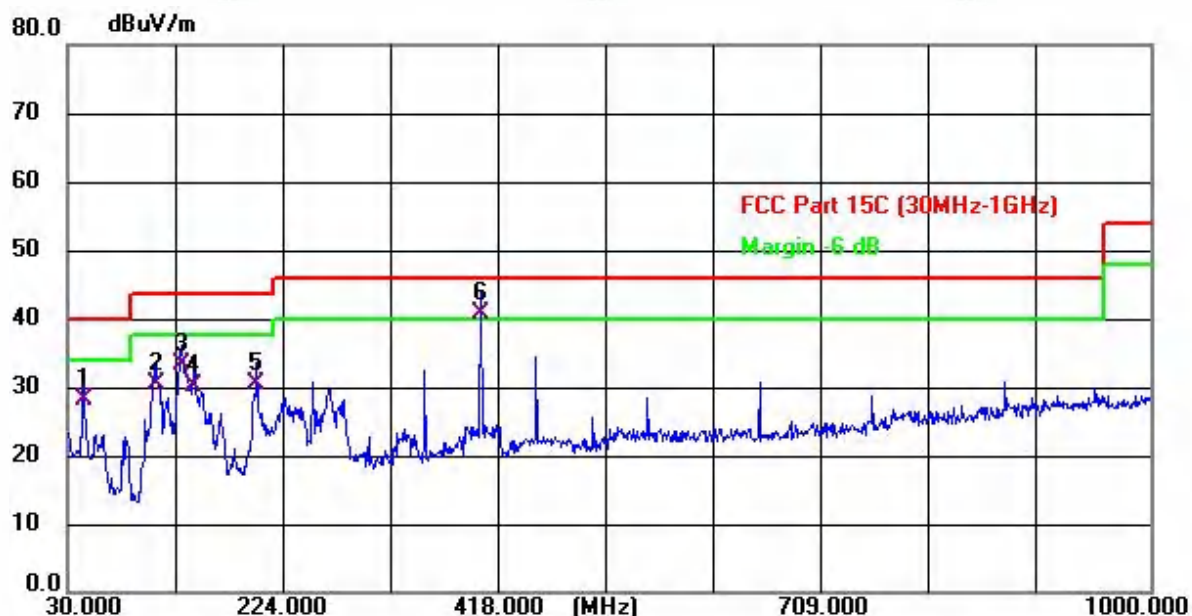

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.550	37.16	-8.91	28.25	40.00	-11.75	QP
2	109.540	42.36	-12.04	30.32	43.50	-13.18	QP
3	131.850	46.55	-13.40	33.15	43.50	-10.35	QP
4	143.490	43.98	-13.88	30.10	43.50	-13.40	QP
5	199.750	41.70	-11.17	30.53	43.50	-12.97	QP
6 *	399.570	46.79	-5.96	40.83	46.00	-5.17	QP


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. 5.2G and 5.8G All modes have been tested, The test data shows only the worst case (5.2GWIFI n40 5190MHz).




1GHz-40GHz:

Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11a-5180

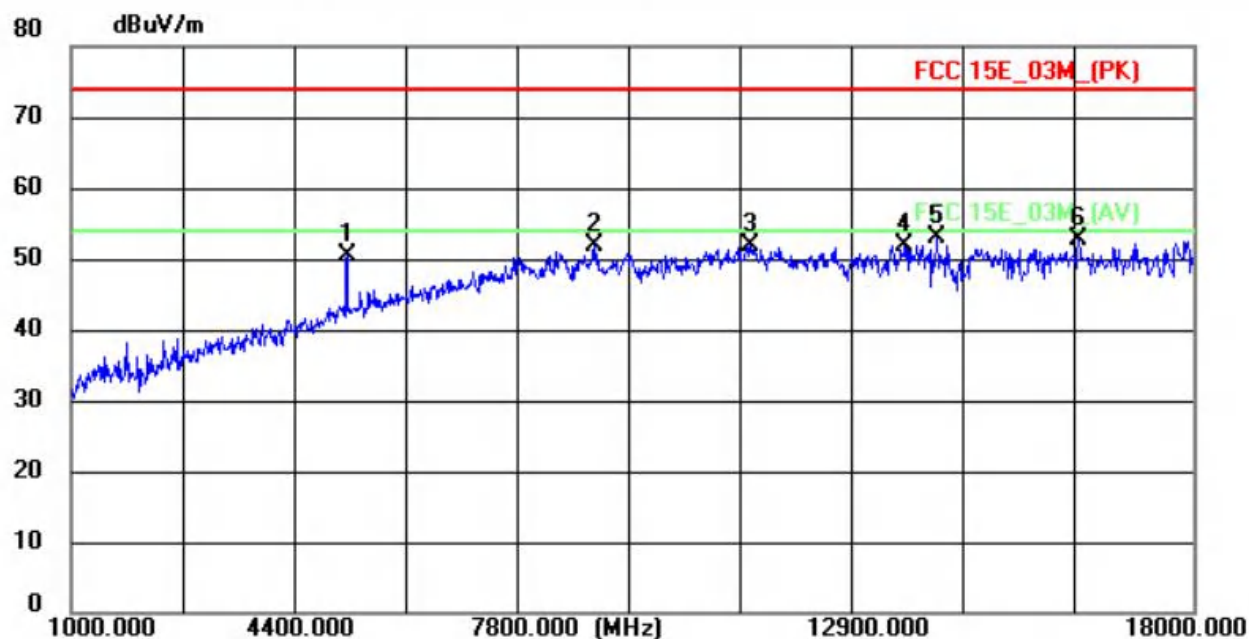


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5182.0000	56.88	-6.44	50.44	74.00	-23.56	peak
2	8939.0000	50.28	1.54	51.82	74.00	-22.18	peak
3	11285.0000	48.06	3.66	51.72	74.00	-22.28	peak
4	13631.0000	45.05	6.86	51.91	74.00	-22.09	peak
5 *	14124.0000	45.53	7.58	53.11	74.00	-20.89	peak
6	16266.0000	42.69	10.14	52.83	74.00	-21.17	peak

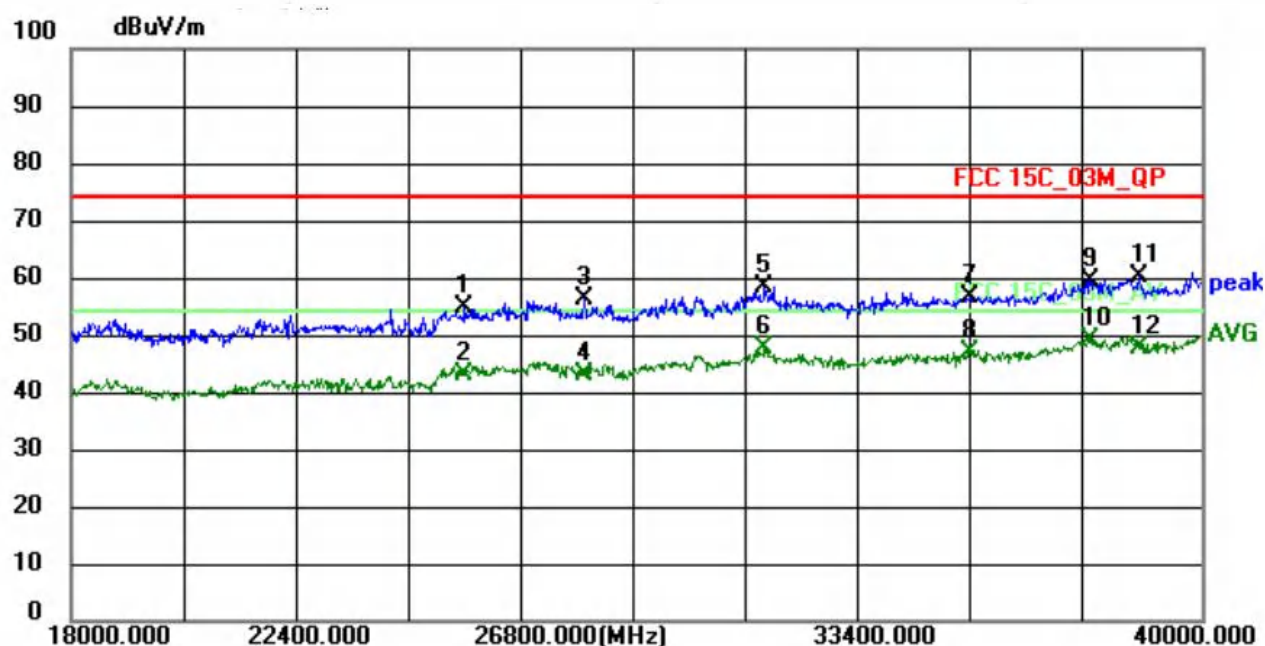


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25656.0000	48.82	5.91	54.73	74.00	-19.27	peak
2	25656.0000	37.02	5.91	42.93	54.00	-11.07	AVG
3	27988.0000	48.76	7.60	56.36	74.00	-17.64	peak
4	27988.0000	35.47	7.60	43.07	54.00	-10.93	AVG
5	31486.0000	49.22	9.32	58.54	74.00	-15.46	peak
6	31486.0000	38.20	9.32	47.52	54.00	-6.48	AVG
7	35512.0000	46.45	10.27	56.72	74.00	-17.28	peak
8	35512.0000	36.73	10.27	47.00	54.00	-7.00	AVG
9	37844.0000	49.68	9.89	59.57	74.00	-14.43	peak
10 *	37844.0000	39.27	9.89	49.16	54.00	-4.84	AVG
11	38790.0000	51.17	9.06	60.23	74.00	-13.77	peak
12	38790.0000	38.68	9.06	47.74	54.00	-6.26	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11a-5180

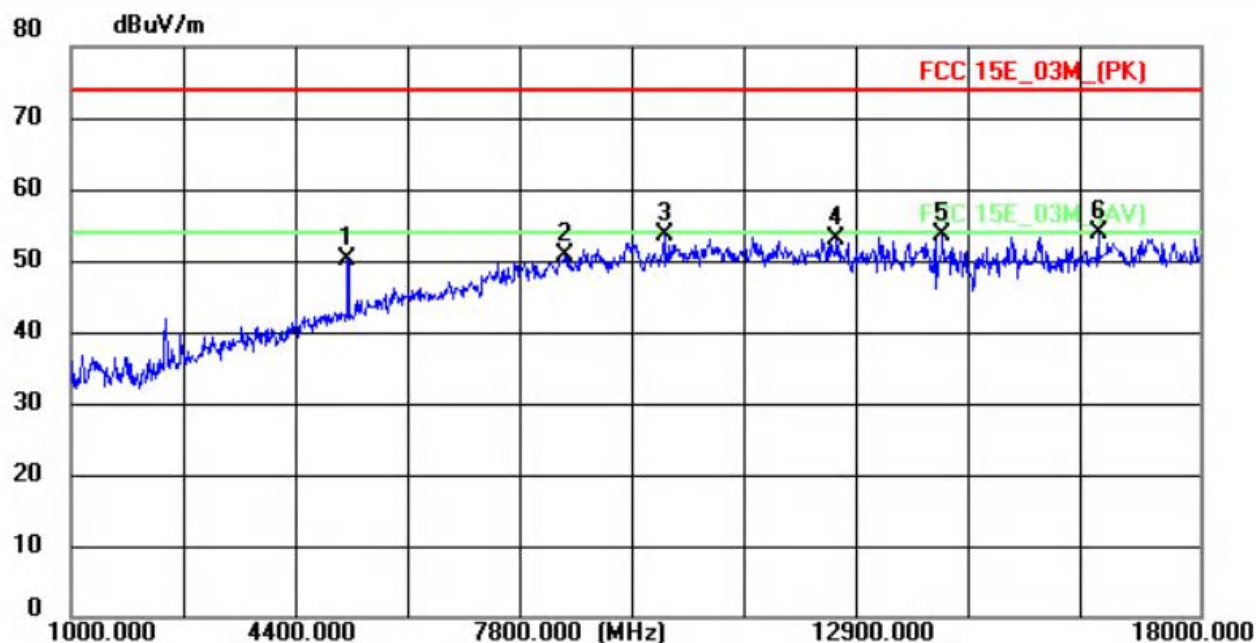


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5165.0000	56.50	-6.46	50.04	74.00	-23.96	peak
2	8446.0000	49.83	0.91	50.74	74.00	-23.26	peak
3	9942.0000	51.35	2.17	53.52	74.00	-20.48	peak
4	12526.0000	47.71	5.24	52.95	74.00	-21.05	peak
5	14124.0000	45.87	7.58	53.45	74.00	-20.55	peak
6 *	16470.0000	43.43	10.35	53.78	74.00	-20.22	peak

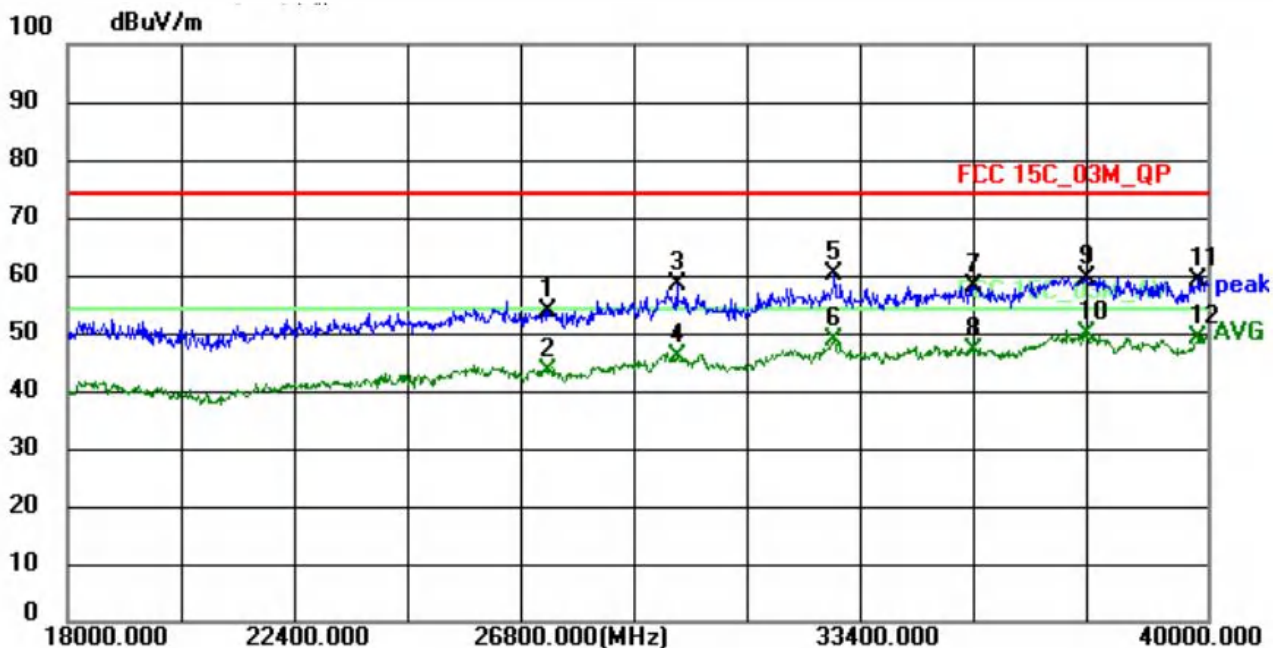


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27284.0000	46.89	7.01	53.90	74.00	-20.10	peak
2	27284.0000	36.26	7.01	43.27	54.00	-10.73	AVG
3	29770.0000	49.13	9.14	58.27	74.00	-15.73	peak
4	29770.0000	36.83	9.14	45.97	54.00	-8.03	AVG
5	32806.0000	50.88	9.25	60.13	74.00	-13.87	peak
6	32806.0000	39.58	9.25	48.83	54.00	-5.17	AVG
7	35512.0000	47.87	10.27	58.14	74.00	-15.86	peak
8	35512.0000	36.77	10.27	47.04	54.00	-6.96	AVG
9	37668.0000	49.73	9.86	59.59	74.00	-14.41	peak
10 *	37668.0000	40.03	9.86	49.89	54.00	-4.11	AVG
11	39824.0000	49.32	9.94	59.26	74.00	-14.74	peak
12	39824.0000	39.00	9.94	48.94	54.00	-5.06	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11a-5200

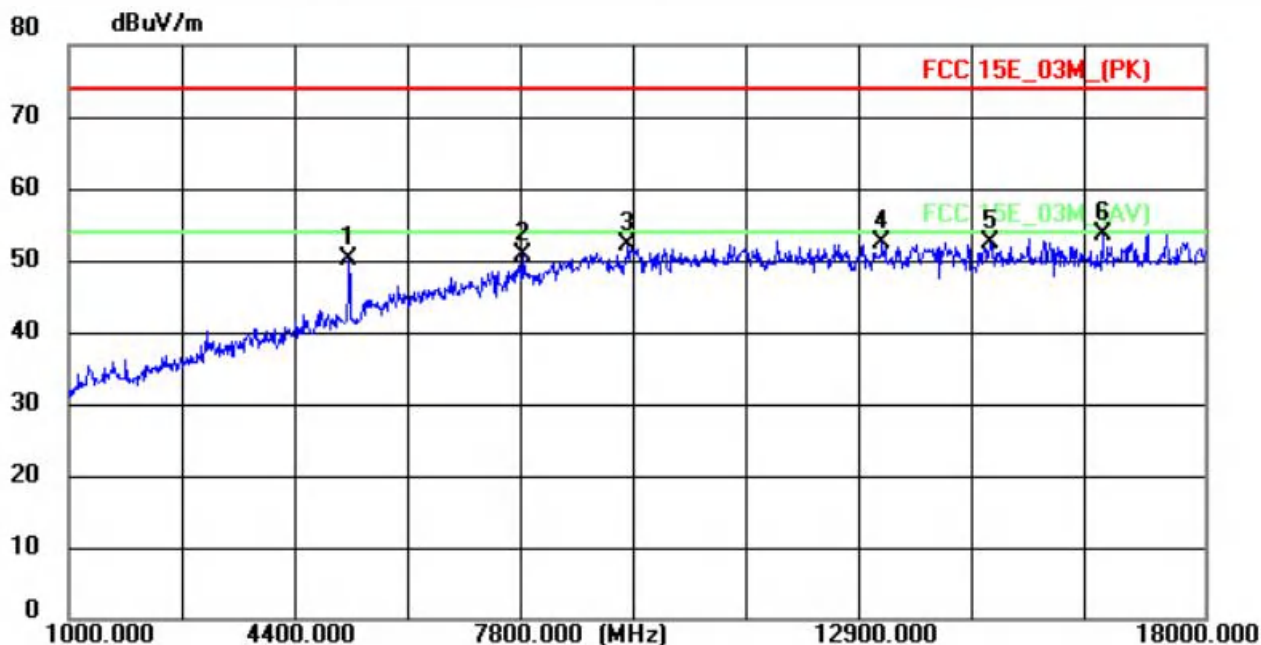


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.0000	56.66	-6.41	50.25	74.00	-23.75	peak
2	7783.0000	50.85	-0.14	50.71	74.00	-23.29	peak
3	9364.0000	50.28	1.83	52.11	74.00	-21.89	peak
4	13172.0000	46.18	6.18	52.36	74.00	-21.64	peak
5	14804.0000	43.99	8.56	52.55	74.00	-21.45	peak
6 *	16470.0000	43.19	10.35	53.54	74.00	-20.46	peak

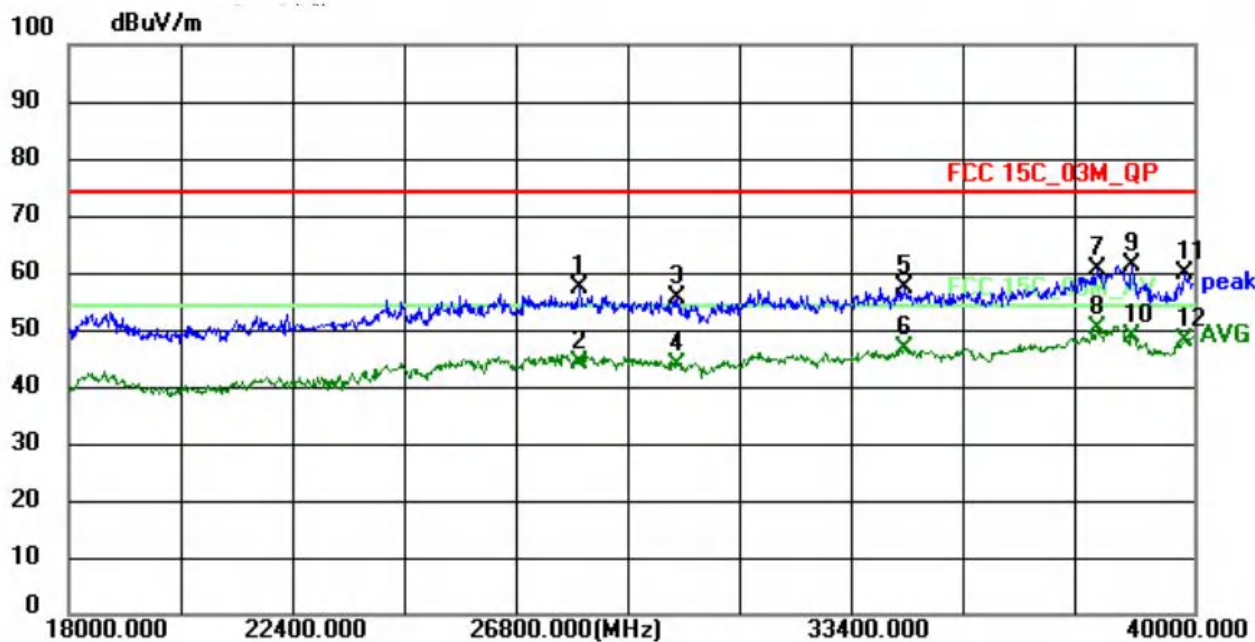


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27988.0000	49.76	7.60	57.36	74.00	-16.64	peak
2	27988.0000	36.47	7.60	44.07	54.00	-9.93	AVG
3	29902.0000	46.56	9.10	55.66	74.00	-18.34	peak
4	29902.0000	34.69	9.10	43.79	54.00	-10.21	AVG
5	34324.0000	47.43	9.73	57.16	74.00	-16.84	peak
6	34324.0000	36.82	9.73	46.55	54.00	-7.45	AVG
7	38130.0000	50.73	9.69	60.42	74.00	-13.58	peak
8 *	38130.0000	40.35	9.69	50.04	54.00	-3.96	AVG
9	38790.0000	52.17	9.06	61.23	74.00	-12.77	peak
10	38790.0000	39.68	9.06	48.74	54.00	-5.26	AVG
11	39802.0000	49.90	9.92	59.82	74.00	-14.18	peak
12	39802.0000	37.94	9.92	47.86	54.00	-6.14	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11a-5200

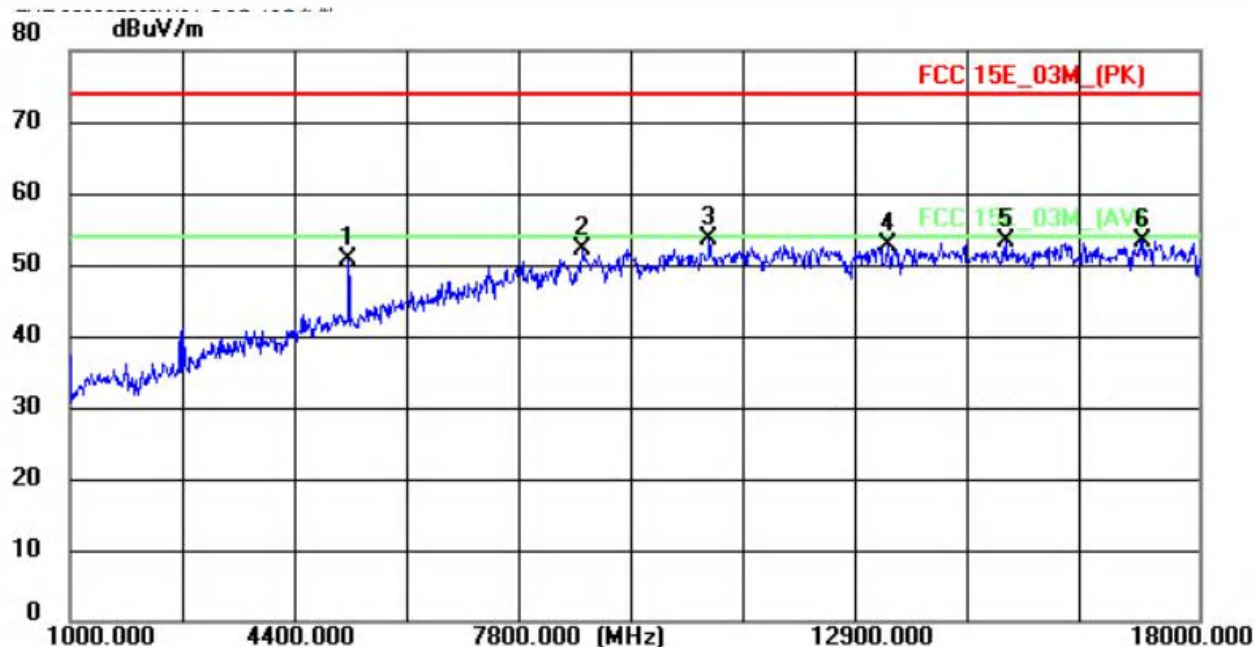


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.0000	56.99	-6.41	50.58	74.00	-23.42	peak
2	8718.0000	50.86	1.26	52.12	74.00	-21.88	peak
3 *	10622.0000	50.67	2.90	53.57	74.00	-20.43	peak
4	13308.0000	46.31	6.38	52.69	74.00	-21.31	peak
5	15093.0000	44.28	8.94	53.22	74.00	-20.78	peak
6	17150.0000	42.19	11.05	53.24	74.00	-20.76	peak

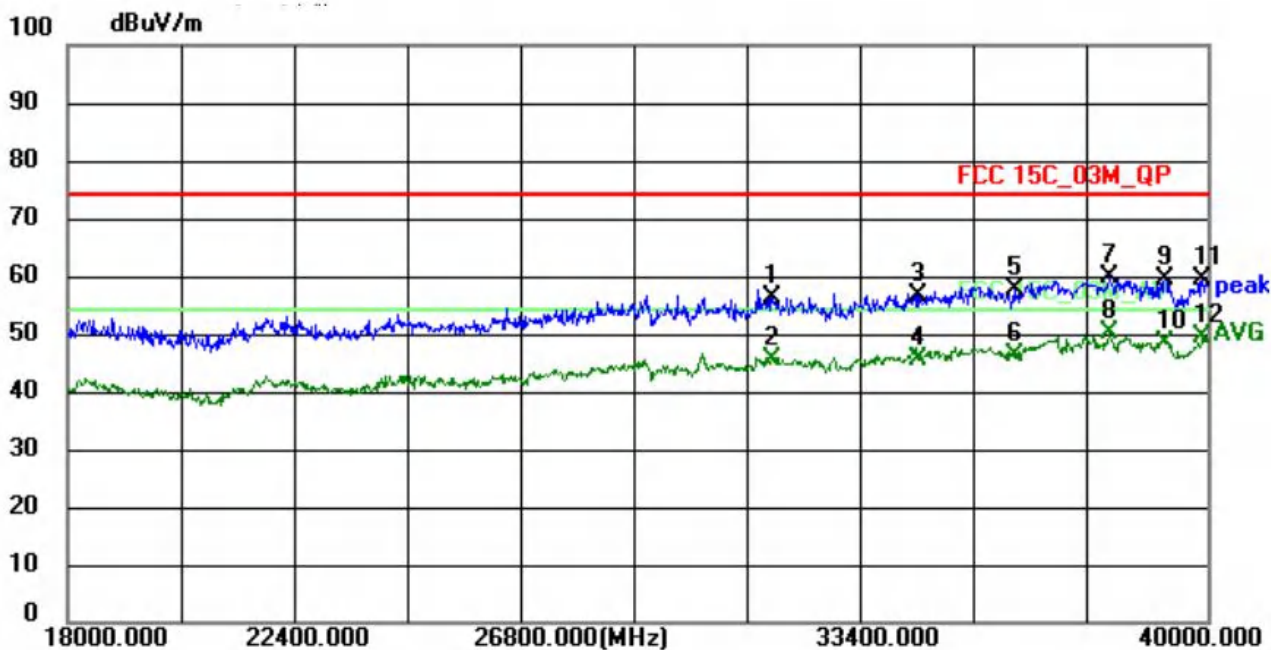


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31618.0000	46.99	9.35	56.34	74.00	-17.66	peak
2	31618.0000	36.28	9.35	45.63	54.00	-8.37	AVG
3	34412.0000	47.00	9.77	56.77	74.00	-17.23	peak
4	34412.0000	35.93	9.77	45.70	54.00	-8.30	AVG
5	36282.0000	47.74	9.83	57.57	74.00	-16.43	peak
6	36282.0000	36.55	9.83	46.38	54.00	-7.62	AVG
7	38108.0000	49.97	9.72	59.69	74.00	-14.31	peak
8 *	38108.0000	40.35	9.72	50.07	54.00	-3.93	AVG
9	39186.0000	50.09	9.28	59.37	74.00	-14.63	peak
10	39186.0000	39.14	9.28	48.42	54.00	-5.58	AVG
11	39912.0000	49.38	10.04	59.42	74.00	-14.58	peak
12	39912.0000	39.27	10.04	49.31	54.00	-4.69	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11a-5240

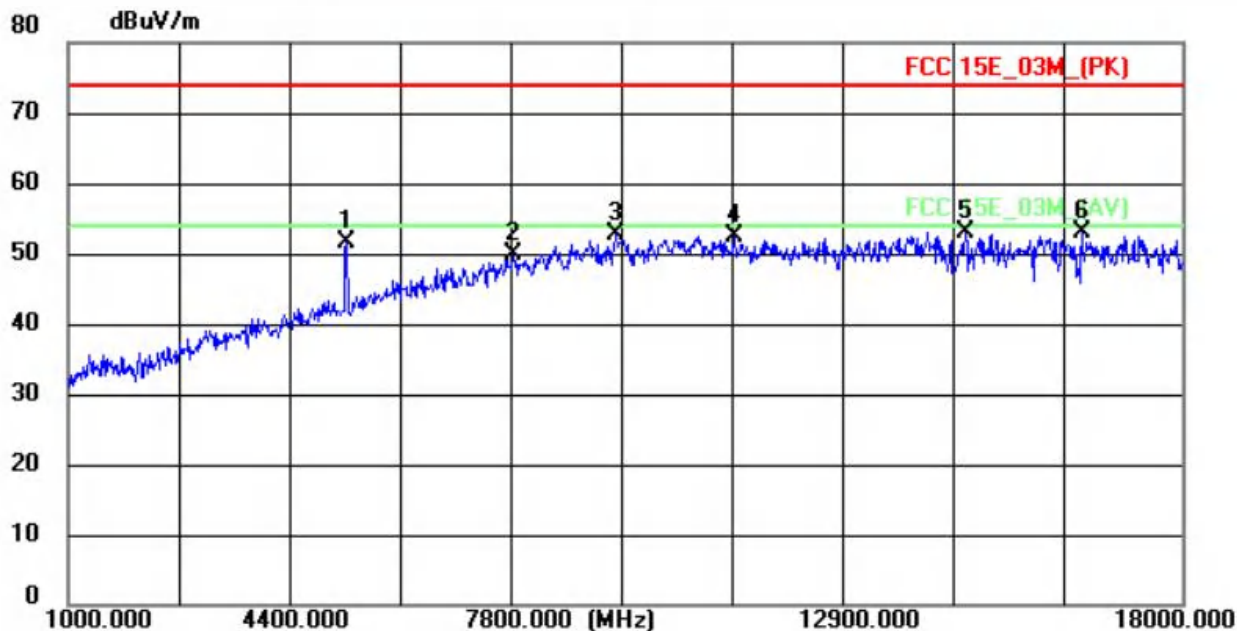


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5250.0000	57.92	-6.33	51.59	74.00	-22.41	peak
2	7783.0000	50.00	-0.14	49.86	74.00	-24.14	peak
3	9364.0000	50.89	1.83	52.72	74.00	-21.28	peak
4	11166.0000	48.83	3.51	52.34	74.00	-21.66	peak
5	14702.0000	44.72	8.41	53.13	74.00	-20.87	peak
6 *	16470.0000	42.79	10.35	53.14	74.00	-20.86	peak

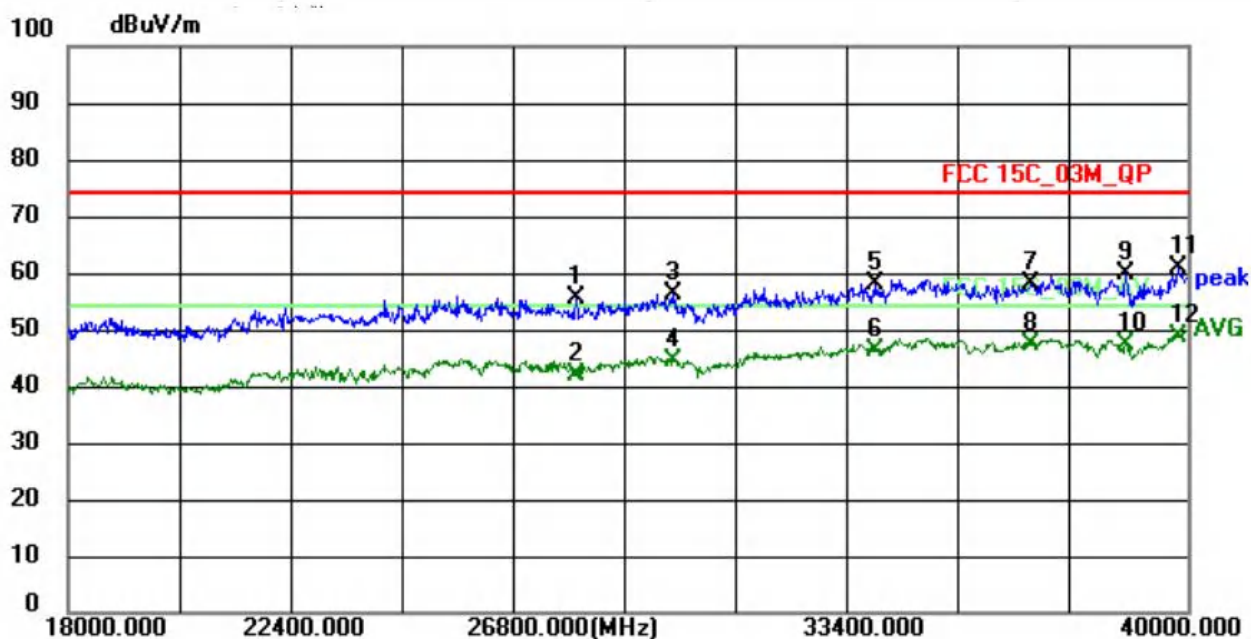


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27988.0000	47.76	7.60	55.36	74.00	-18.64	peak
2	27988.0000	34.47	7.60	42.07	54.00	-11.93	AVG
3	29902.0000	47.06	9.10	56.16	74.00	-17.84	peak
4	29902.0000	35.19	9.10	44.29	54.00	-9.71	AVG
5	33884.0000	48.66	9.49	58.15	74.00	-15.85	peak
6	33884.0000	36.81	9.49	46.30	54.00	-7.70	AVG
7	36942.0000	48.12	9.74	57.86	74.00	-16.14	peak
8	36942.0000	37.69	9.74	47.43	54.00	-6.57	AVG
9	38790.0000	50.67	9.06	59.73	74.00	-14.27	peak
10	38790.0000	38.18	9.06	47.24	54.00	-6.76	AVG
11	39802.0000	50.90	9.92	60.82	74.00	-13.18	peak
12 *	39802.0000	38.94	9.92	48.86	54.00	-5.14	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11a-5240

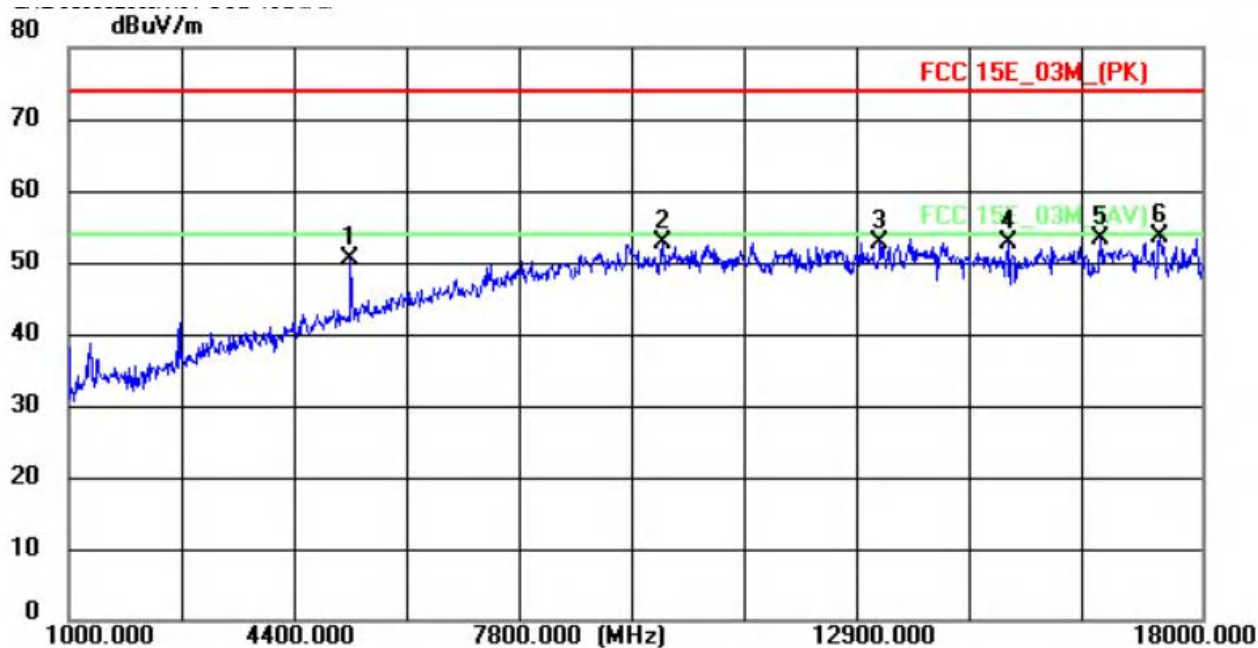


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5233.0000	56.77	-6.35	50.42	74.00	-23.58	peak
2	9908.0000	50.53	2.14	52.67	74.00	-21.33	peak
3	13172.0000	46.59	6.18	52.77	74.00	-21.23	peak
4	15093.0000	43.81	8.94	52.75	74.00	-21.25	peak
5	16470.0000	42.82	10.35	53.17	74.00	-20.83	peak
6 *	17371.0000	42.29	11.27	53.56	74.00	-20.44	peak

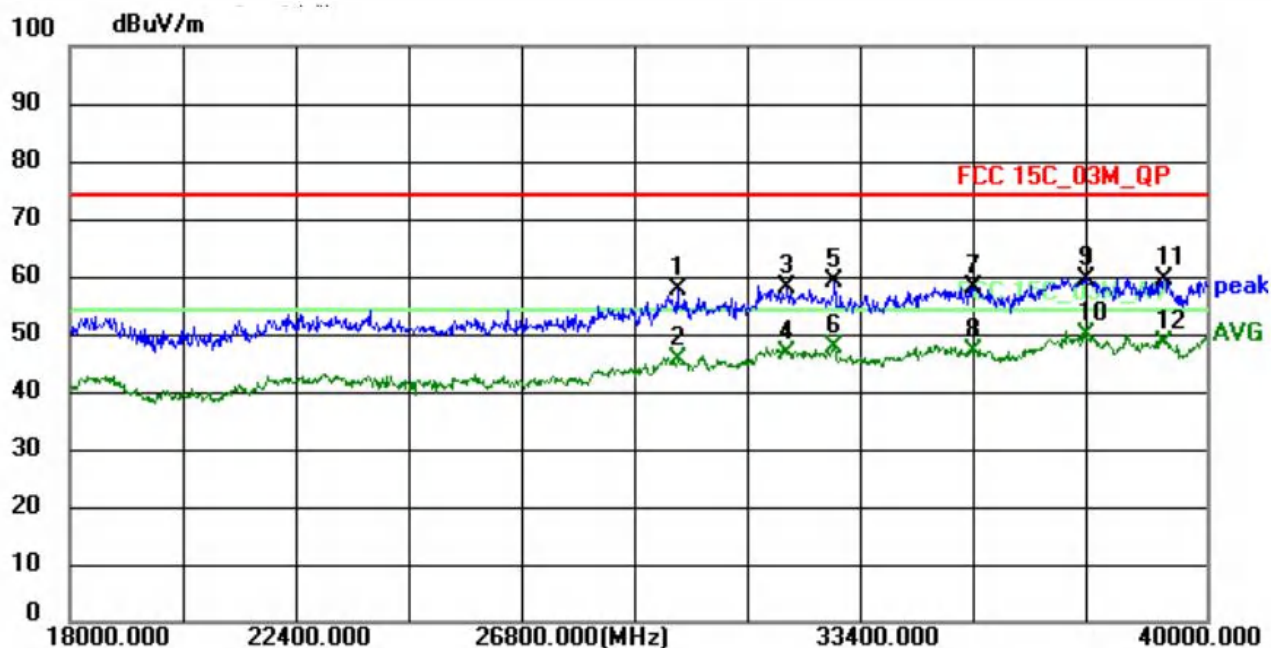


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	29770.0000	48.63	9.14	57.77	74.00	-16.23	peak
2	29770.0000	36.33	9.14	45.47	54.00	-8.53	AVG
3	31882.0000	48.78	9.40	58.18	74.00	-15.82	peak
4	31882.0000	37.37	9.40	46.77	54.00	-7.23	AVG
5	32806.0000	49.88	9.25	59.13	74.00	-14.87	peak
6	32806.0000	38.58	9.25	47.83	54.00	-6.17	AVG
7	35512.0000	47.87	10.27	58.14	74.00	-15.86	peak
8	35512.0000	36.77	10.27	47.04	54.00	-6.96	AVG
9	37668.0000	49.73	9.86	59.59	74.00	-14.41	peak
10 *	37668.0000	40.03	9.86	49.89	54.00	-4.11	AVG
11	39186.0000	50.09	9.28	59.37	74.00	-14.63	peak
12	39186.0000	39.14	9.28	48.42	54.00	-5.58	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11n20-5180

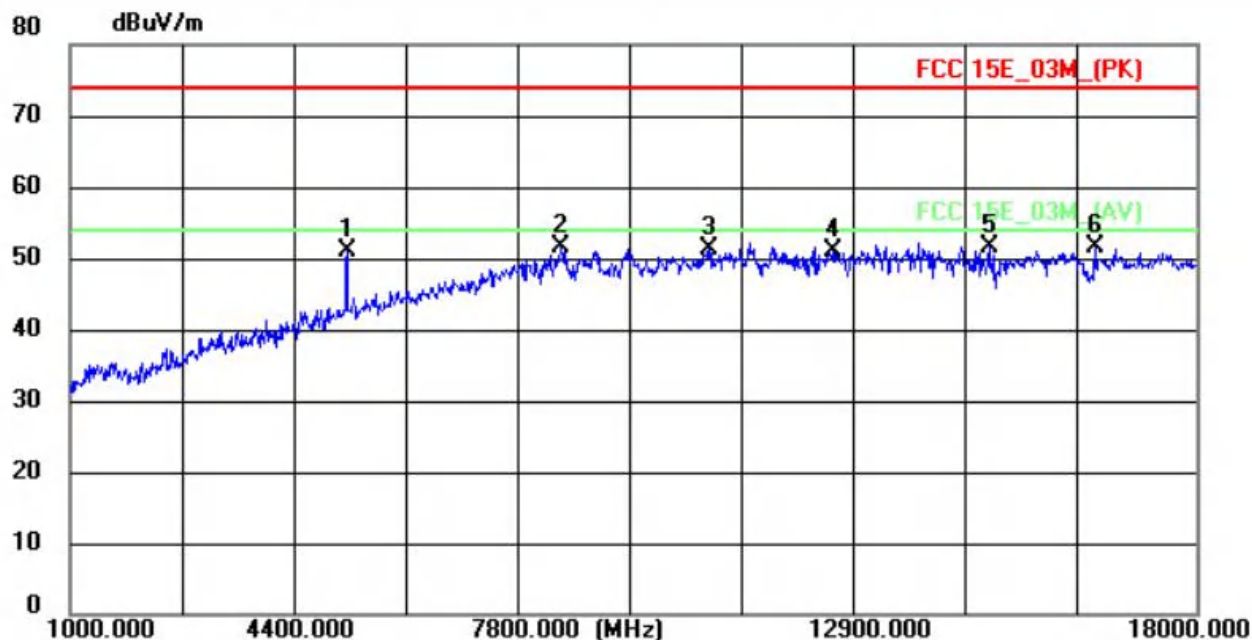


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5182.0000	57.32	-6.44	50.88	74.00	-23.12	peak
2	8412.0000	50.61	0.87	51.48	74.00	-22.52	peak
3	10656.0000	48.31	2.94	51.25	74.00	-22.75	peak
4	12526.0000	45.88	5.24	51.12	74.00	-22.88	peak
5	14872.0000	42.84	8.66	51.50	74.00	-22.50	peak
6 *	16470.0000	41.34	10.35	51.69	74.00	-22.31	peak

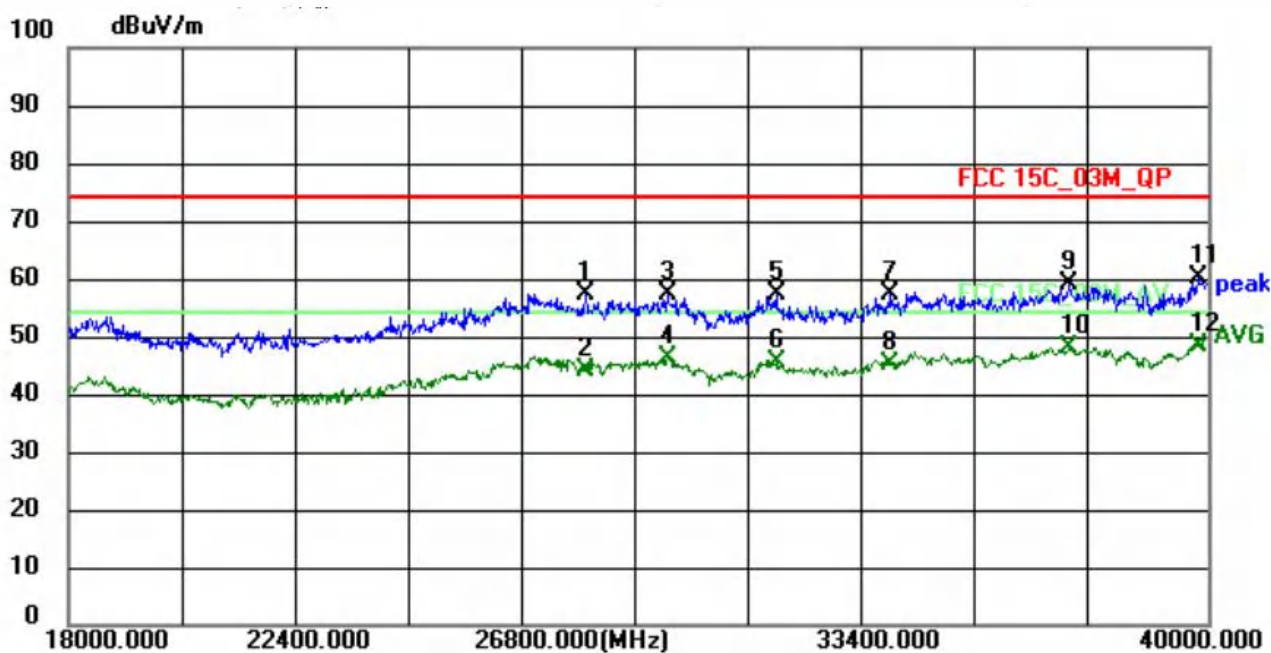


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27988.0000	49.76	7.60	57.36	74.00	-16.64	peak
2	27988.0000	36.47	7.60	44.07	54.00	-9.93	AVG
3	29572.0000	48.13	9.19	57.32	74.00	-16.68	peak
4	29572.0000	36.91	9.19	46.10	54.00	-7.90	AVG
5	31662.0000	47.93	9.35	57.28	74.00	-16.72	peak
6	31662.0000	36.34	9.35	45.69	54.00	-8.31	AVG
7	33884.0000	47.66	9.49	57.15	74.00	-16.85	peak
8	33884.0000	35.81	9.49	45.30	54.00	-8.70	AVG
9	37338.0000	49.20	9.80	59.00	74.00	-15.00	peak
10	37338.0000	38.08	9.80	47.88	54.00	-6.12	AVG
11	39802.0000	50.40	9.92	60.32	74.00	-13.68	peak
12 *	39802.0000	38.44	9.92	48.36	54.00	-5.64	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11n20-5180

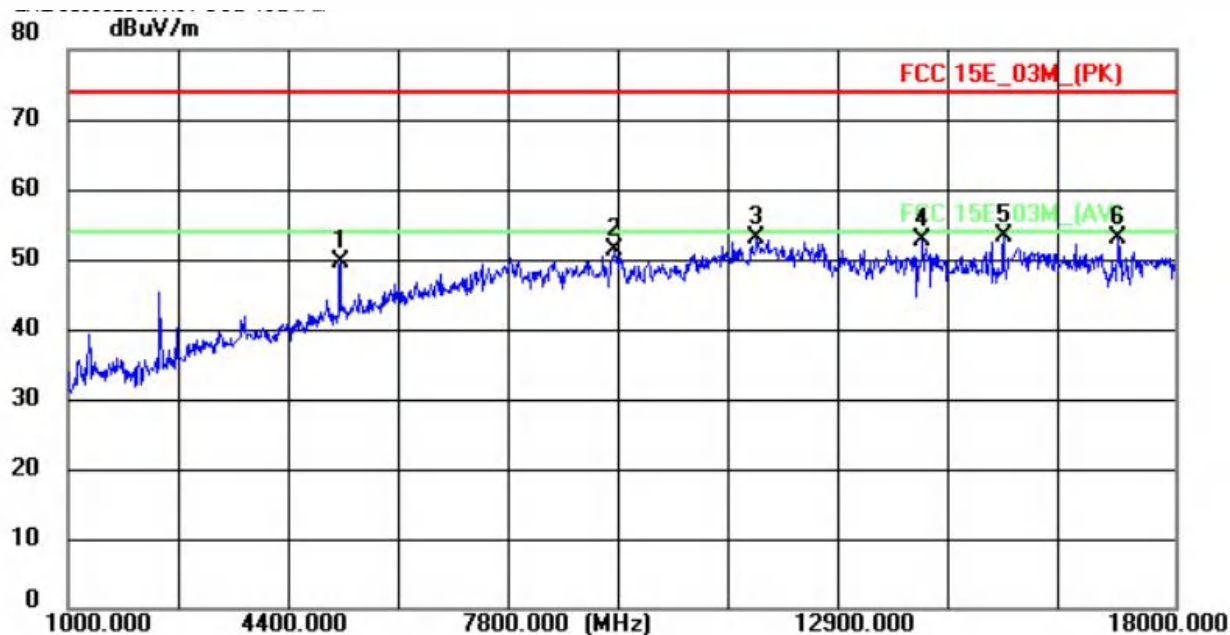


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5182.0000	56.06	-6.44	49.62	74.00	-24.38	peak
2	9398.0000	49.56	1.85	51.41	74.00	-22.59	peak
3	11574.0000	48.94	3.98	52.92	74.00	-21.08	peak
4	14124.0000	45.09	7.58	52.67	74.00	-21.33	peak
5 *	15365.0000	43.95	9.22	53.17	74.00	-20.83	peak
6	17133.0000	41.83	11.04	52.87	74.00	-21.13	peak

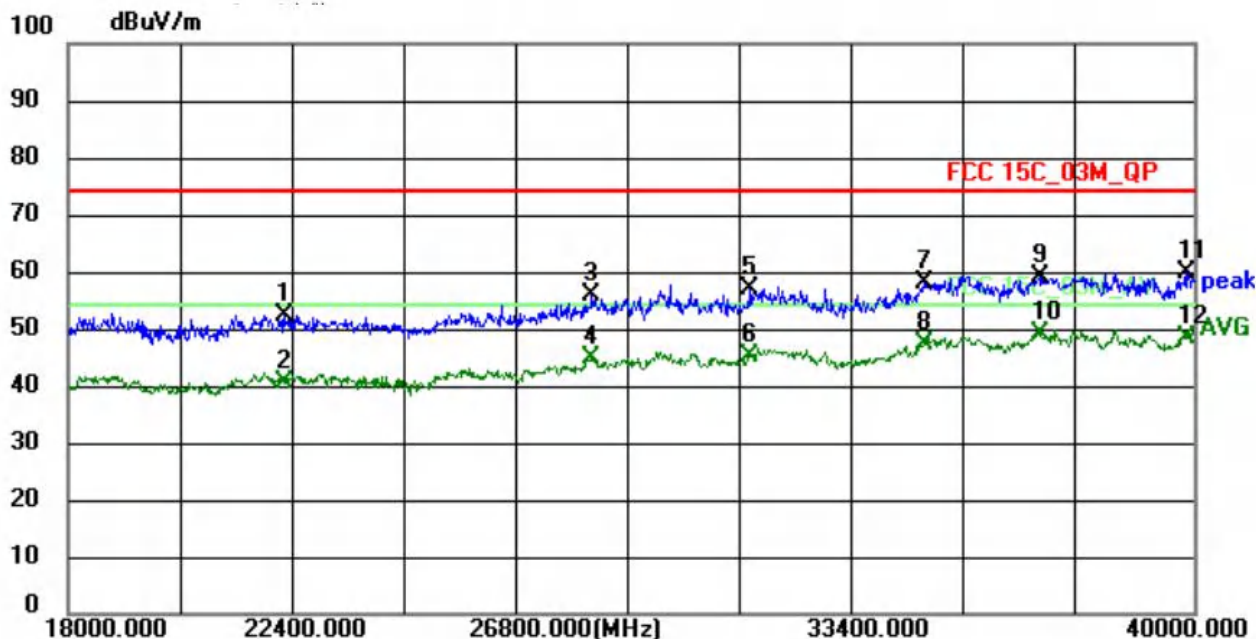


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	22224.0000	48.84	3.59	52.43	74.00	-21.57	peak
2	22224.0000	37.01	3.59	40.60	54.00	-13.40	AVG
3	28230.0000	47.91	7.97	55.88	74.00	-18.12	peak
4	28230.0000	36.78	7.97	44.75	54.00	-9.25	AVG
5	31332.0000	47.82	9.23	57.05	74.00	-16.95	peak
6	31332.0000	35.92	9.23	45.15	54.00	-8.85	AVG
7	34720.0000	48.20	9.95	58.15	74.00	-15.85	peak
8	34720.0000	37.34	9.95	47.29	54.00	-6.71	AVG
9	36986.0000	49.31	9.74	59.05	74.00	-14.95	peak
10 *	36986.0000	39.39	9.74	49.13	54.00	-4.87	AVG
11	39868.0000	49.73	10.00	59.73	74.00	-14.27	peak
12	39868.0000	38.55	10.00	48.55	54.00	-5.45	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11n20-5200

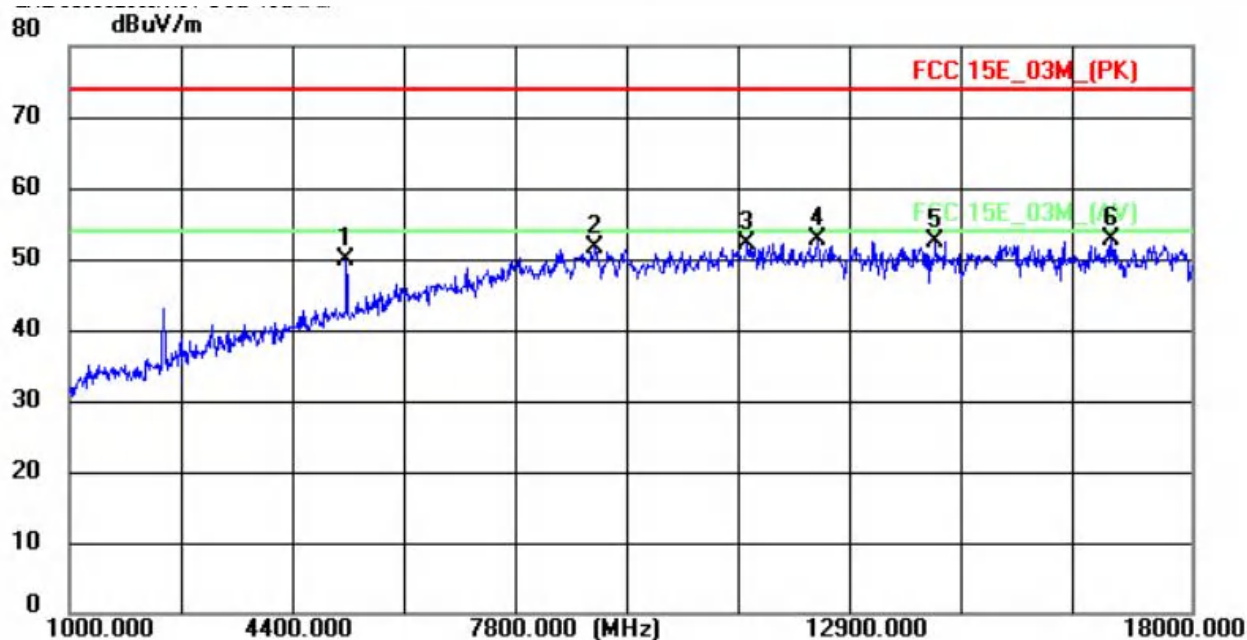


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.0000	56.29	-6.41	49.88	74.00	-24.12	peak
2	8973.0000	50.01	1.58	51.59	74.00	-22.41	peak
3	11268.0000	48.43	3.64	52.07	74.00	-21.93	peak
4	12339.0000	47.63	4.97	52.60	74.00	-21.40	peak
5	14124.0000	44.98	7.58	52.56	74.00	-21.44	peak
6 *	16776.0000	42.01	10.67	52.68	74.00	-21.32	peak

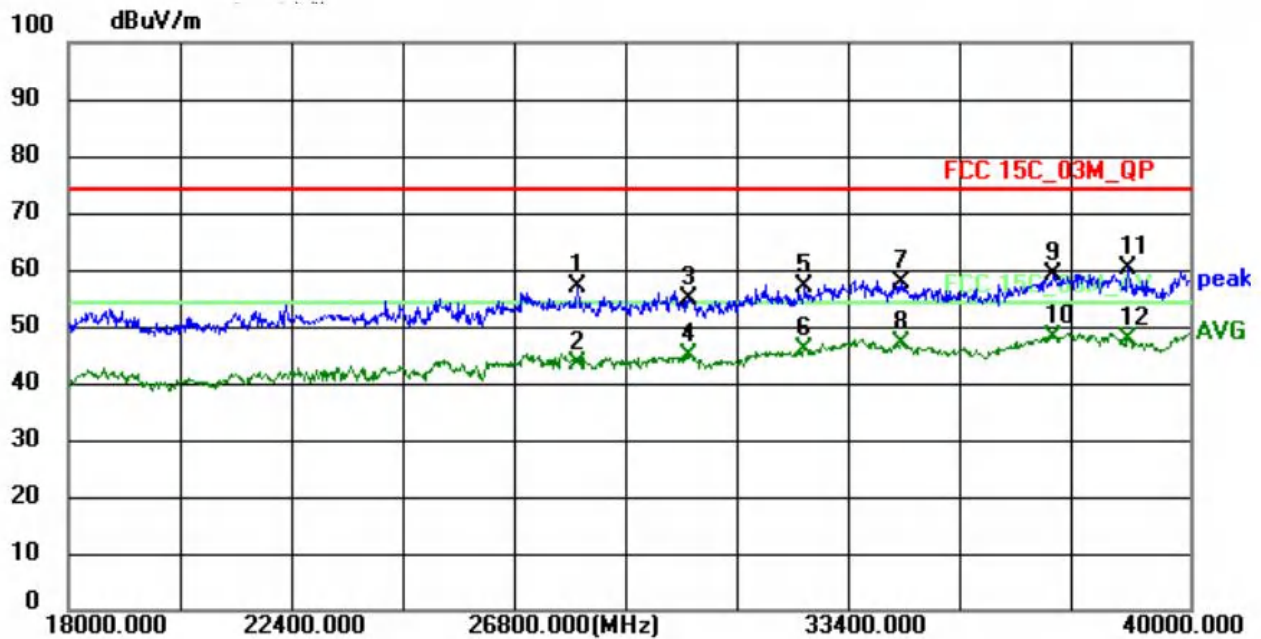


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27988.0000	49.26	7.60	56.86	74.00	-17.14	peak
2	27988.0000	35.97	7.60	43.57	54.00	-10.43	AVG
3	30188.0000	45.96	9.03	54.99	74.00	-19.01	peak
4	30188.0000	35.78	9.03	44.81	54.00	-9.19	AVG
5	32454.0000	47.70	9.35	57.05	74.00	-16.95	peak
6	32454.0000	36.63	9.35	45.98	54.00	-8.02	AVG
7	34324.0000	47.93	9.73	57.66	74.00	-16.34	peak
8	34324.0000	37.32	9.73	47.05	54.00	-6.95	AVG
9	37316.0000	49.32	9.80	59.12	74.00	-14.88	peak
10 *	37316.0000	38.27	9.80	48.07	54.00	-5.93	AVG
11	38790.0000	51.17	9.06	60.23	74.00	-13.77	peak
12	38790.0000	38.68	9.06	47.74	54.00	-6.26	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11n20-5200

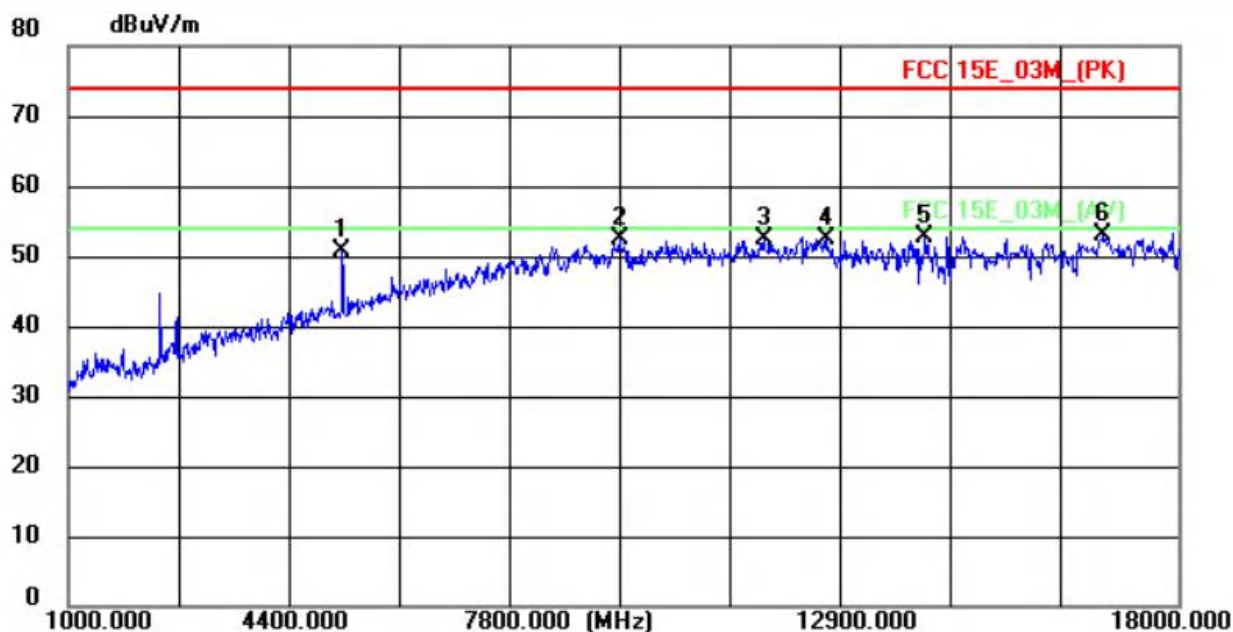


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.0000	57.02	-6.41	50.61	74.00	-23.39	peak
2	9449.0000	50.52	1.87	52.39	74.00	-21.61	peak
3	11659.0000	48.45	4.07	52.52	74.00	-21.48	peak
4	12611.0000	47.10	5.36	52.46	74.00	-21.54	peak
5	14124.0000	45.08	7.58	52.66	74.00	-21.34	peak
6 *	16861.0000	42.26	10.75	53.01	74.00	-20.99	peak

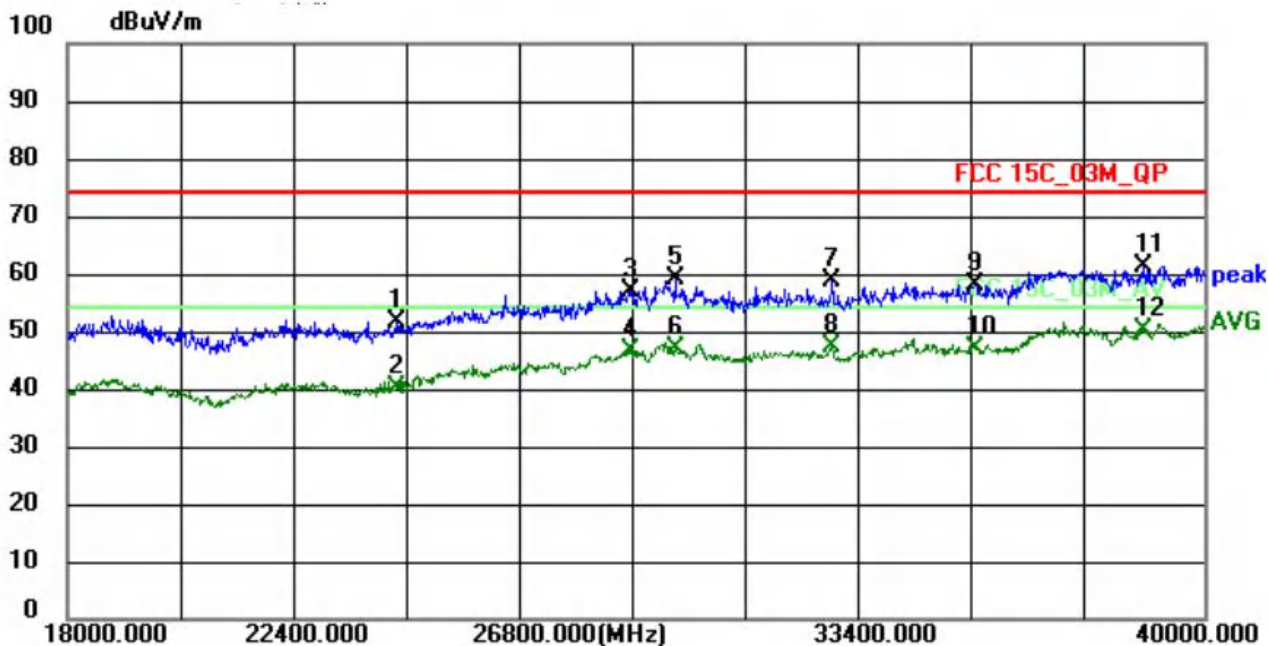


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	24380.0000	46.97	4.79	51.76	74.00	-22.24	peak
2	24380.0000	35.31	4.79	40.10	54.00	-13.90	AVG
3	28912.0000	48.09	9.00	57.09	74.00	-16.91	peak
4	28912.0000	37.58	9.00	46.58	54.00	-7.42	AVG
5	29770.0000	50.13	9.14	59.27	74.00	-14.73	peak
6	29770.0000	37.83	9.14	46.97	54.00	-7.03	AVG
7	32806.0000	49.38	9.25	58.63	74.00	-15.37	peak
8	32806.0000	38.08	9.25	47.33	54.00	-6.67	AVG
9	35578.0000	47.88	10.23	58.11	74.00	-15.89	peak
10	35578.0000	36.85	10.23	47.08	54.00	-6.92	AVG
11	38812.0000	52.06	9.06	61.12	74.00	-12.88	peak
12 *	38812.0000	41.04	9.06	50.10	54.00	-3.90	AVG



Temperature:	25.2°C	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11n20-5240

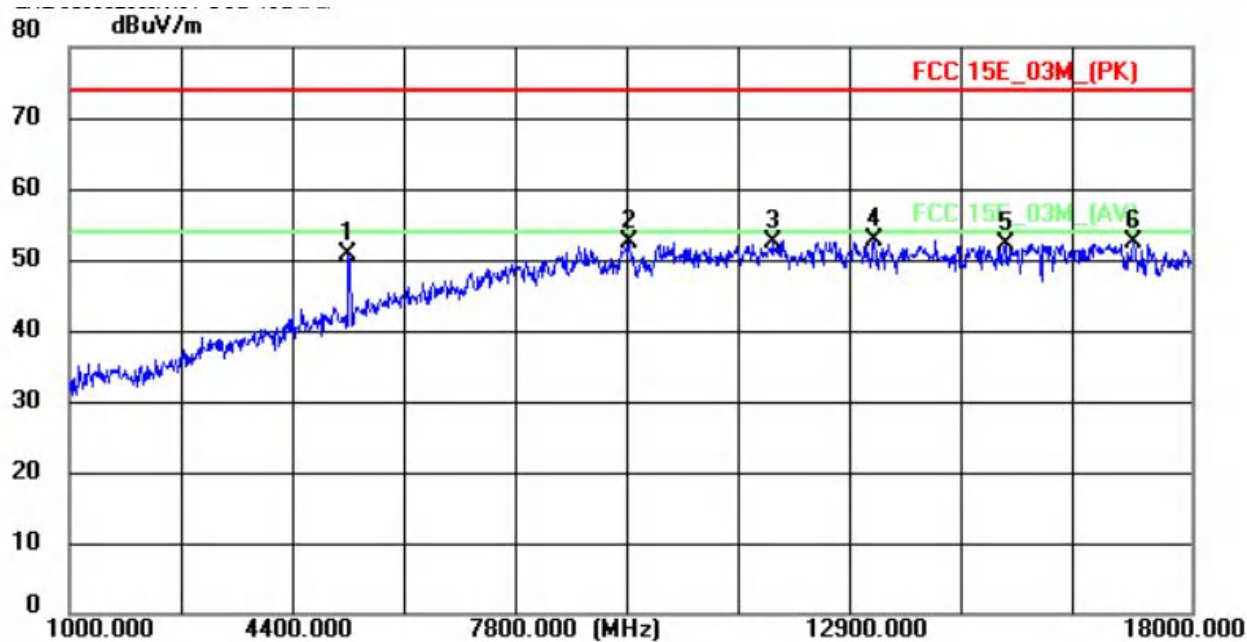


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5233.0000	57.10	-6.35	50.75	74.00	-23.25	peak
2	9483.0000	50.49	1.90	52.39	74.00	-21.61	peak
3	11676.0000	48.19	4.10	52.29	74.00	-21.71	peak
4 *	13189.0000	46.60	6.20	52.80	74.00	-21.20	peak
5	15178.0000	43.14	9.03	52.17	74.00	-21.83	peak
6	17116.0000	41.48	11.01	52.49	74.00	-21.51	peak

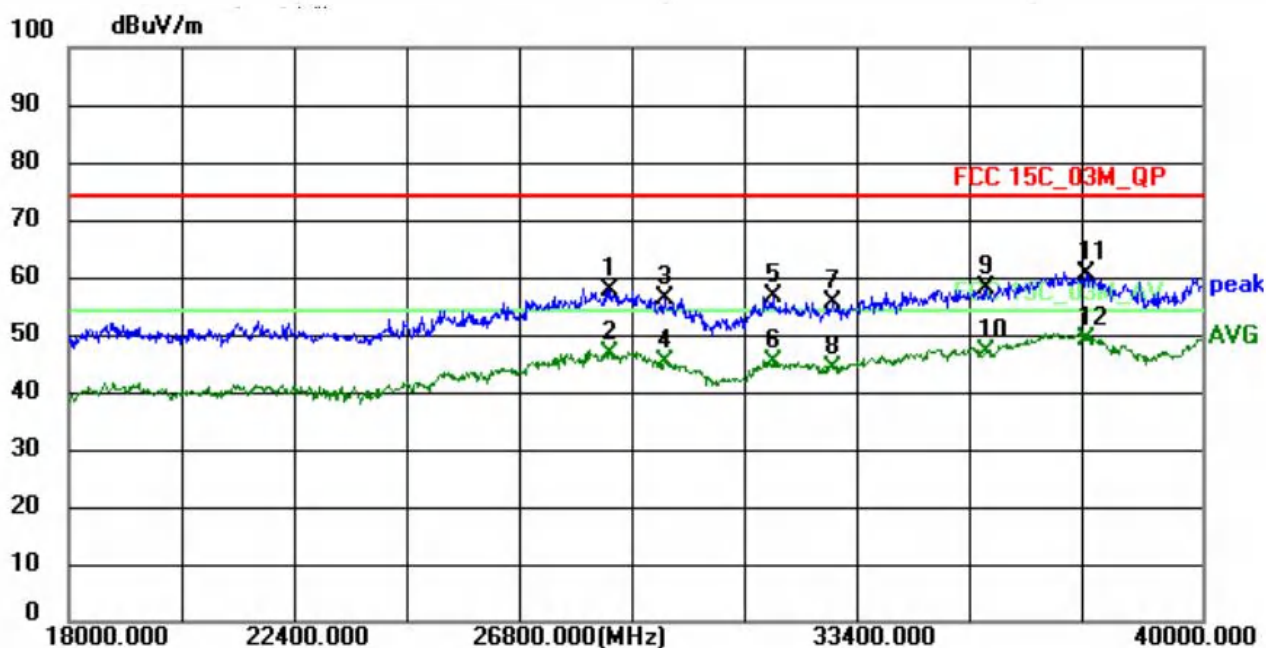


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	28516.0000	49.39	8.39	57.78	74.00	-16.22	peak
2	28516.0000	38.30	8.39	46.69	54.00	-7.31	AVG
3	29572.0000	47.13	9.19	56.32	74.00	-17.68	peak
4	29572.0000	35.91	9.19	45.10	54.00	-8.90	AVG
5	31662.0000	47.43	9.35	56.78	74.00	-17.22	peak
6	31662.0000	35.84	9.35	45.19	54.00	-8.81	AVG
7	32850.0000	46.21	9.23	55.44	74.00	-18.56	peak
8	32850.0000	34.99	9.23	44.22	54.00	-9.78	AVG
9	35798.0000	47.94	10.08	58.02	74.00	-15.98	peak
10	35798.0000	37.06	10.08	47.14	54.00	-6.86	AVG
11	37756.0000	50.68	9.87	60.55	74.00	-13.45	peak
12 *	37756.0000	39.32	9.87	49.19	54.00	-4.81	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11n20-5240

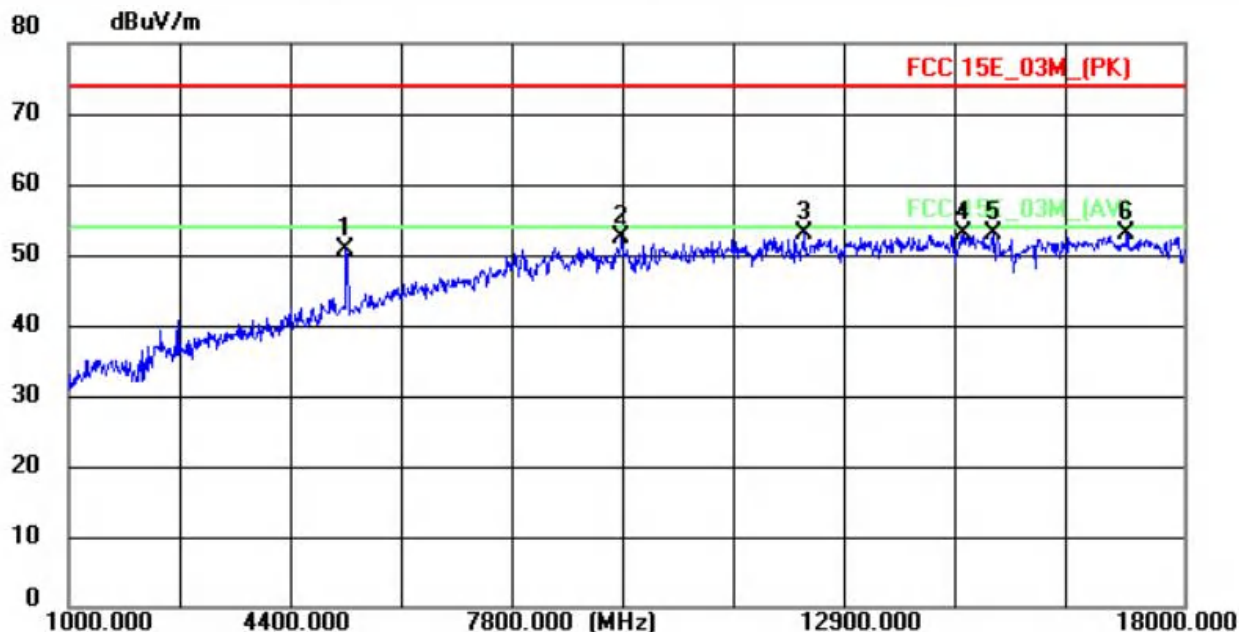


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5233.0000	57.01	-6.35	50.66	74.00	-23.34	peak
2	9432.0000	50.62	1.87	52.49	74.00	-21.51	peak
3	12203.0000	48.15	4.77	52.92	74.00	-21.08	peak
4 *	14634.0000	44.64	8.32	52.96	74.00	-21.04	peak
5	15093.0000	43.96	8.94	52.90	74.00	-21.10	peak
6	17133.0000	41.92	11.04	52.96	74.00	-21.04	peak

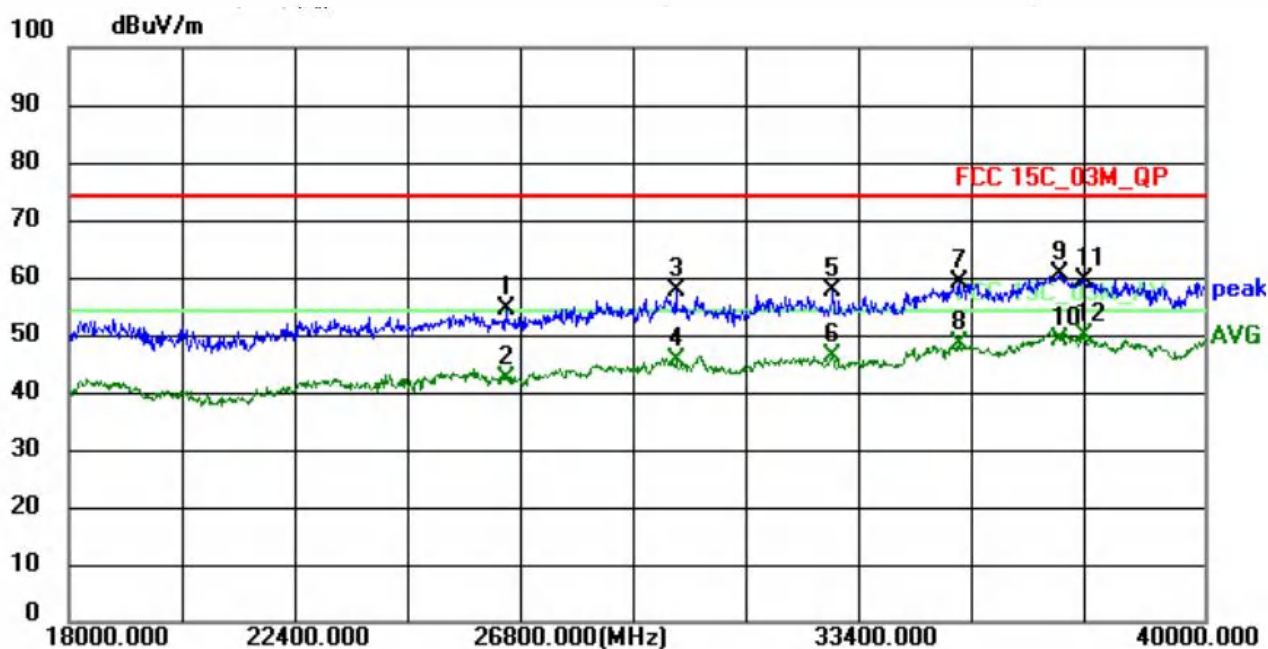


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	26470.0000	48.36	6.28	54.64	74.00	-19.36	peak
2	26470.0000	36.16	6.28	42.44	54.00	-11.56	AVG
3	29770.0000	48.63	9.14	57.77	74.00	-16.23	peak
4	29770.0000	36.33	9.14	45.47	54.00	-8.53	AVG
5	32806.0000	48.38	9.25	57.63	74.00	-16.37	peak
6	32806.0000	37.08	9.25	46.33	54.00	-7.67	AVG
7	35248.0000	48.92	10.18	59.10	74.00	-14.90	peak
8	35248.0000	38.18	10.18	48.36	54.00	-5.64	AVG
9	37184.0000	50.61	9.76	60.37	74.00	-13.63	peak
10	37184.0000	39.52	9.76	49.28	54.00	-4.72	AVG
11	37668.0000	49.73	9.86	59.59	74.00	-14.41	peak
12 *	37668.0000	40.03	9.86	49.89	54.00	-4.11	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11ac20-5180

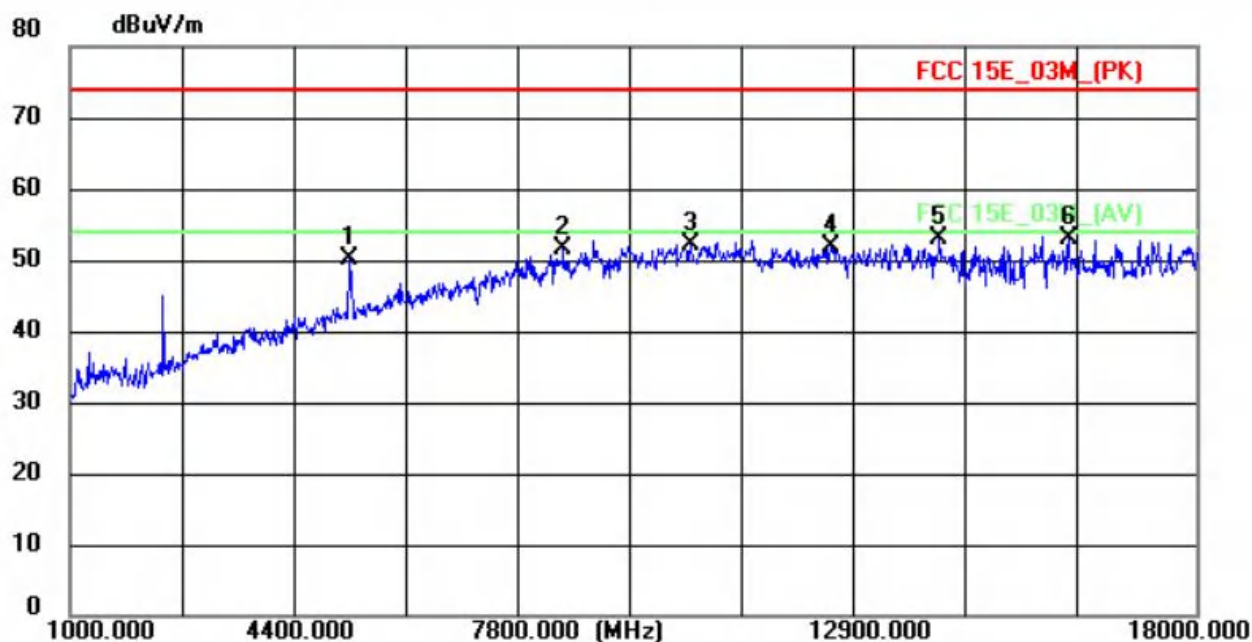


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5233.0000	56.38	-6.35	50.03	74.00	-23.97	peak
2	8446.0000	50.61	0.91	51.52	74.00	-22.48	peak
3	10367.0000	49.47	2.62	52.09	74.00	-21.91	peak
4	12492.0000	46.61	5.19	51.80	74.00	-22.20	peak
5 *	14124.0000	45.51	7.58	53.09	74.00	-20.91	peak
6	16079.0000	42.96	9.96	52.92	74.00	-21.08	peak

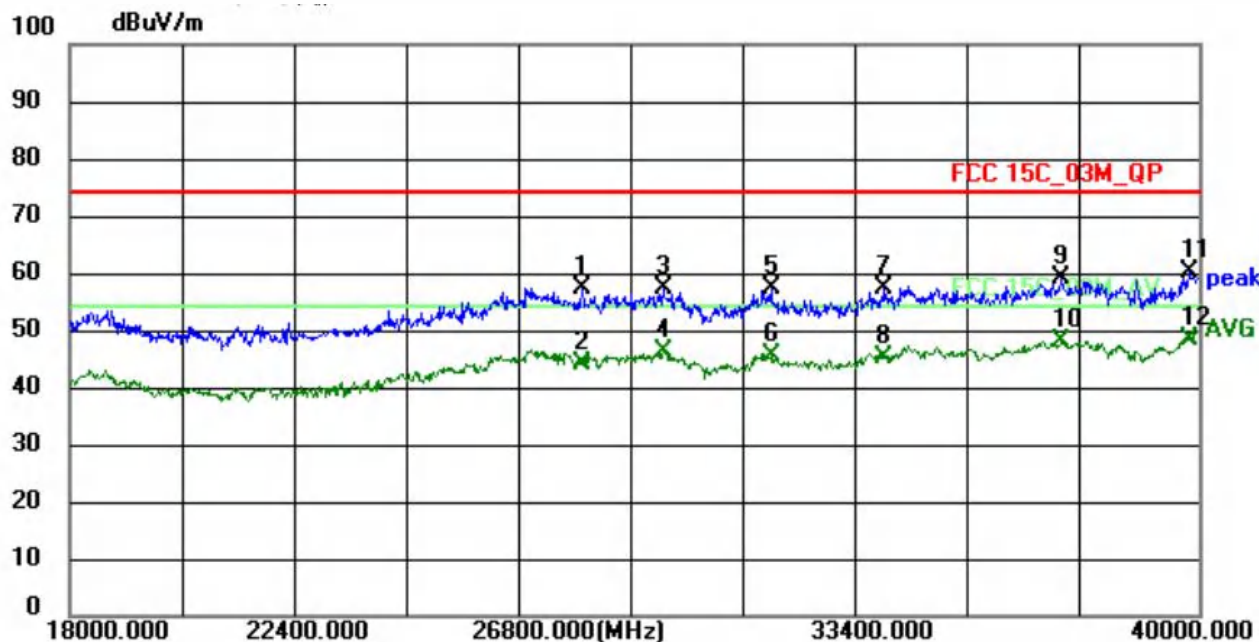


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27988.0000	49.76	7.60	57.36	74.00	-16.64	peak
2	27988.0000	36.47	7.60	44.07	54.00	-9.93	AVG
3	29572.0000	48.13	9.19	57.32	74.00	-16.68	peak
4	29572.0000	36.91	9.19	46.10	54.00	-7.90	AVG
5	31662.0000	47.93	9.35	57.28	74.00	-16.72	peak
6	31662.0000	36.34	9.35	45.69	54.00	-8.31	AVG
7	33884.0000	47.66	9.49	57.15	74.00	-16.85	peak
8	33884.0000	35.81	9.49	45.30	54.00	-8.70	AVG
9	37338.0000	49.20	9.80	59.00	74.00	-15.00	peak
10	37338.0000	38.08	9.80	47.88	54.00	-6.12	AVG
11	39802.0000	50.40	9.92	60.32	74.00	-13.68	peak
12 *	39802.0000	38.44	9.92	48.36	54.00	-5.64	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11ac20-5180

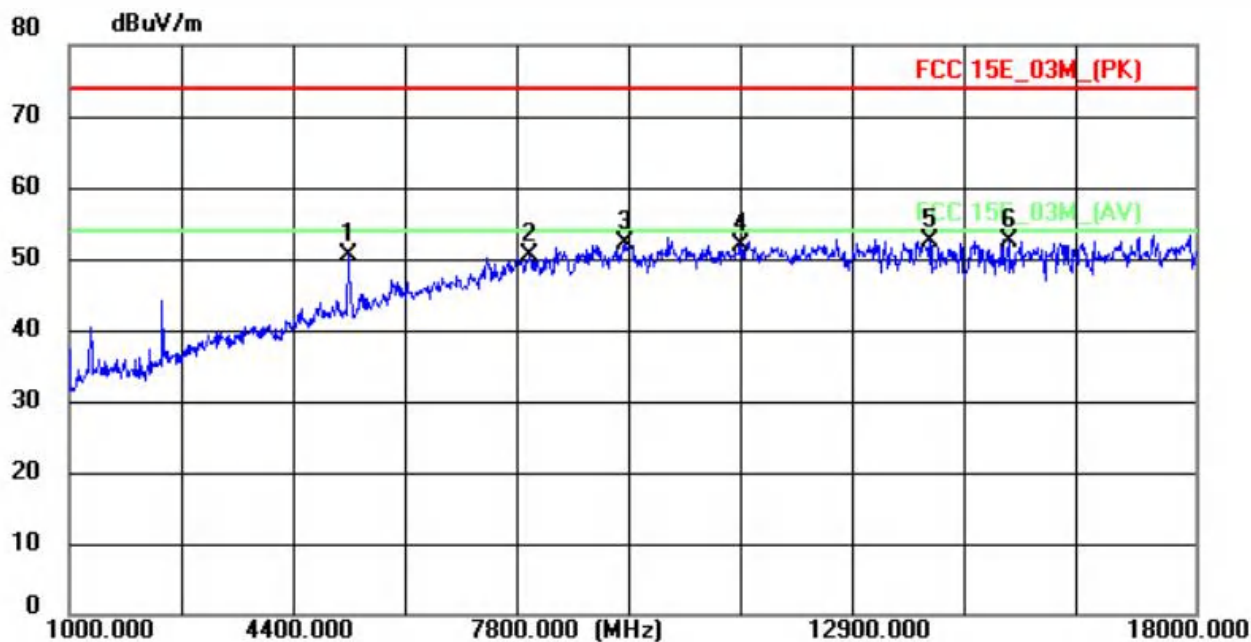


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5216.0000	56.71	-6.38	50.33	74.00	-23.67	peak
2	7936.0000	50.22	0.21	50.43	74.00	-23.57	peak
3	9398.0000	50.27	1.85	52.12	74.00	-21.88	peak
4	11149.0000	48.46	3.50	51.96	74.00	-22.04	peak
5	14005.0000	44.99	7.40	52.39	74.00	-21.61	peak
6 *	15178.0000	43.45	9.03	52.48	74.00	-21.52	peak

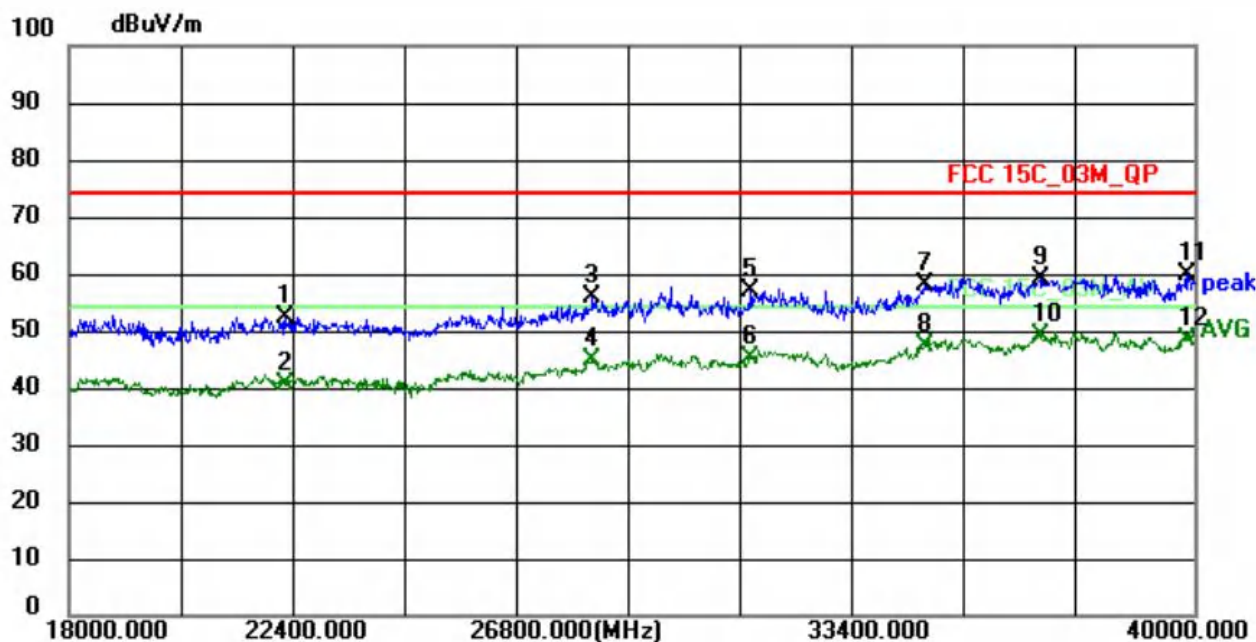


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	22224.0000	48.84	3.59	52.43	74.00	-21.57	peak
2	22224.0000	37.01	3.59	40.60	54.00	-13.40	AVG
3	28230.0000	47.91	7.97	55.88	74.00	-18.12	peak
4	28230.0000	36.78	7.97	44.75	54.00	-9.25	AVG
5	31332.0000	47.82	9.23	57.05	74.00	-16.95	peak
6	31332.0000	35.92	9.23	45.15	54.00	-8.85	AVG
7	34720.0000	48.20	9.95	58.15	74.00	-15.85	peak
8	34720.0000	37.34	9.95	47.29	54.00	-6.71	AVG
9	36986.0000	49.31	9.74	59.05	74.00	-14.95	peak
10 *	36986.0000	39.39	9.74	49.13	54.00	-4.87	AVG
11	39868.0000	49.73	10.00	59.73	74.00	-14.27	peak
12	39868.0000	38.55	10.00	48.55	54.00	-5.45	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11ac20-5200

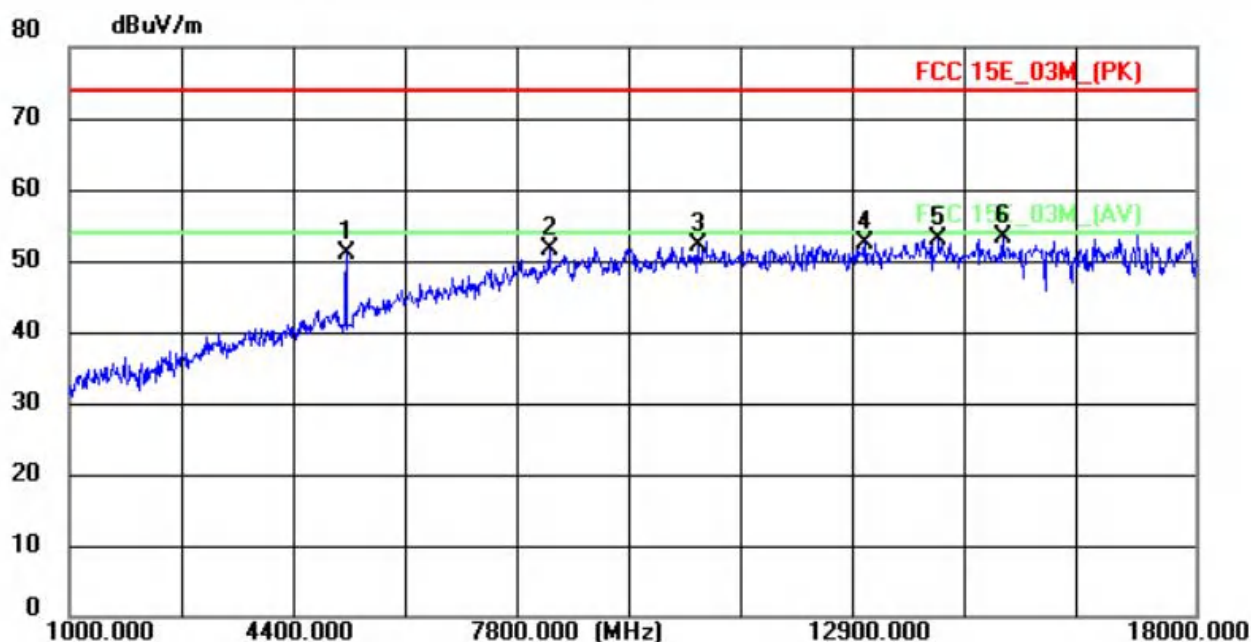


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5182.0000	57.50	-6.44	51.06	74.00	-22.94	peak
2	8242.0000	50.84	0.66	51.50	74.00	-22.50	peak
3	10486.0000	49.29	2.74	52.03	74.00	-21.97	peak
4	13002.0000	46.43	5.93	52.36	74.00	-21.64	peak
5	14124.0000	45.52	7.58	53.10	74.00	-20.90	peak
6 *	15093.0000	44.22	8.94	53.16	74.00	-20.84	peak

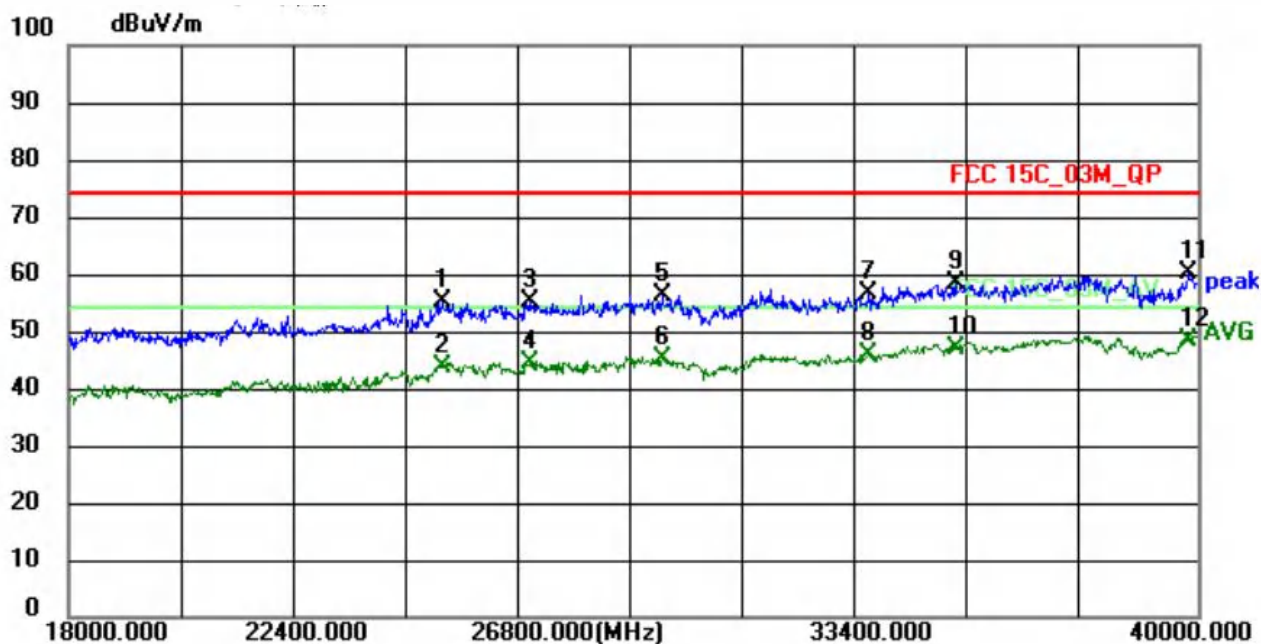


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25282.0000	49.49	5.68	55.17	74.00	-18.83	peak
2	25282.0000	37.97	5.68	43.65	54.00	-10.35	AVG
3	26976.0000	48.46	6.84	55.30	74.00	-18.70	peak
4	26976.0000	37.79	6.84	44.63	54.00	-9.37	AVG
5	29572.0000	47.13	9.19	56.32	74.00	-17.68	peak
6	29572.0000	35.91	9.19	45.10	54.00	-8.90	AVG
7	33598.0000	47.24	9.36	56.60	74.00	-17.40	peak
8	33598.0000	36.41	9.36	45.77	54.00	-8.23	AVG
9	35292.0000	48.09	10.20	58.29	74.00	-15.71	peak
10	35292.0000	36.94	10.20	47.14	54.00	-6.86	AVG
11	39802.0000	50.40	9.92	60.32	74.00	-13.68	peak
12 *	39802.0000	38.44	9.92	48.36	54.00	-5.64	AVG



Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11ac20-5200

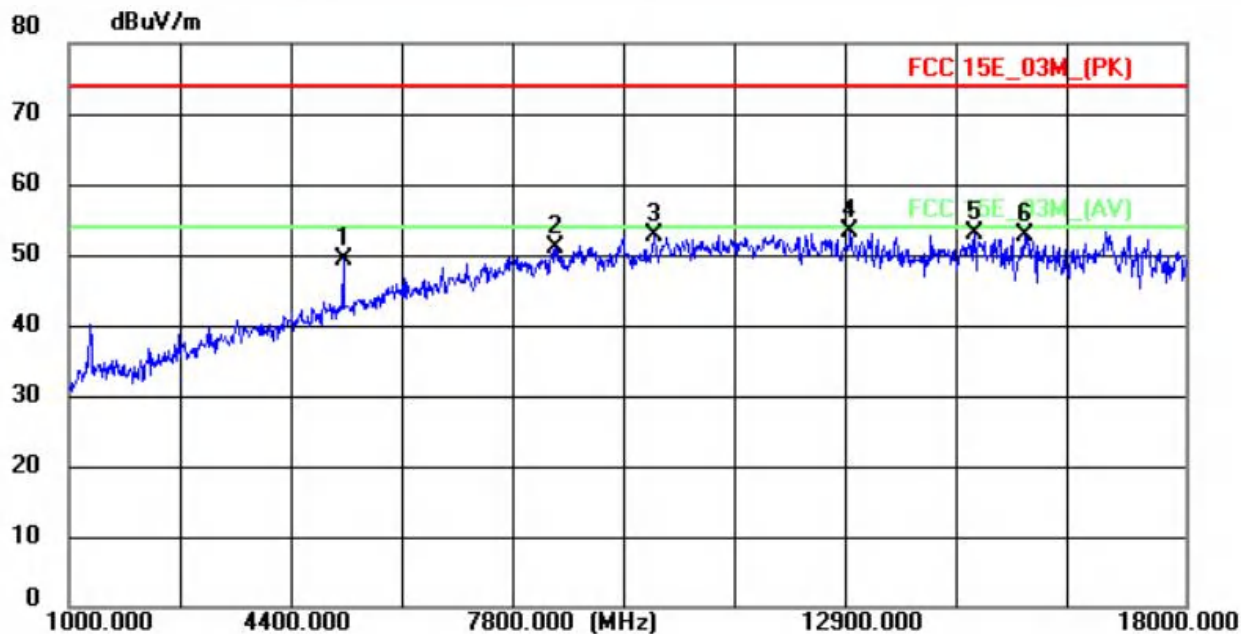


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5182.0000	55.67	-6.44	49.23	74.00	-24.77	peak
2	8412.0000	50.02	0.87	50.89	74.00	-23.11	peak
3	9908.0000	50.44	2.14	52.58	74.00	-21.42	peak
4 *	12900.0000	47.49	5.78	53.27	74.00	-20.73	peak
5	14804.0000	44.44	8.56	53.00	74.00	-21.00	peak
6	15569.0000	43.33	9.43	52.76	74.00	-21.24	peak

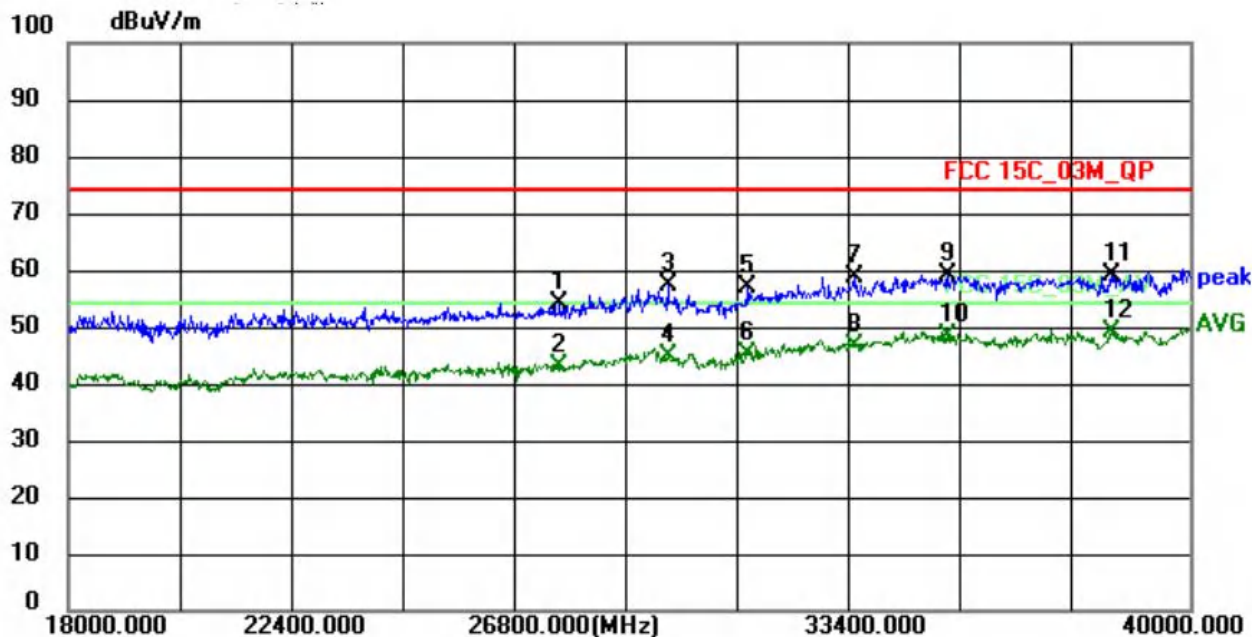


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27636.0000	46.76	7.27	54.03	74.00	-19.97	peak
2	27636.0000	35.82	7.27	43.09	54.00	-10.91	AVG
3	29770.0000	48.13	9.14	57.27	74.00	-16.73	peak
4	29770.0000	35.83	9.14	44.97	54.00	-9.03	AVG
5	31332.0000	47.82	9.23	57.05	74.00	-16.95	peak
6	31332.0000	35.92	9.23	45.15	54.00	-8.85	AVG
7	33444.0000	49.43	9.31	58.74	74.00	-15.26	peak
8	33444.0000	37.42	9.31	46.73	54.00	-7.27	AVG
9	35248.0000	48.92	10.18	59.10	74.00	-14.90	peak
10	35248.0000	38.18	10.18	48.36	54.00	-5.64	AVG
11	38460.0000	50.07	9.08	59.15	74.00	-14.85	peak
12 *	38460.0000	40.16	9.08	49.24	54.00	-4.76	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11ac20-5240

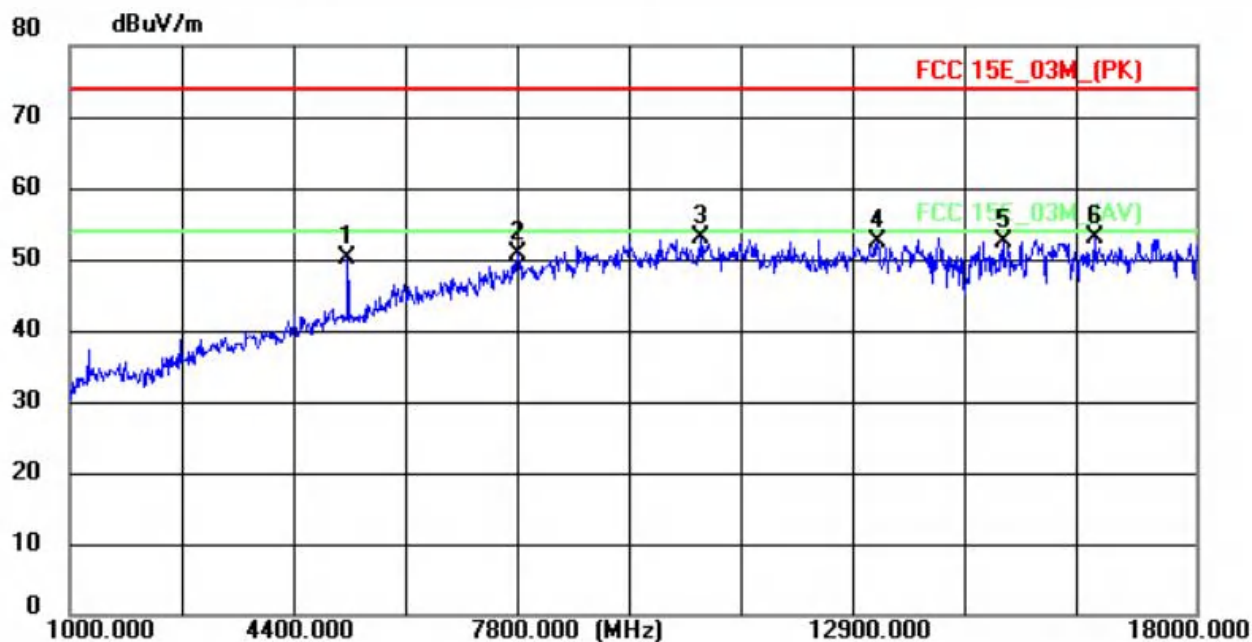


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.0000	56.45	-6.41	50.04	74.00	-23.96	peak
2	7766.0000	50.98	-0.18	50.80	74.00	-23.20	peak
3 *	10520.0000	50.18	2.79	52.97	74.00	-21.03	peak
4	13206.0000	46.24	6.23	52.47	74.00	-21.53	peak
5	15093.0000	43.57	8.94	52.51	74.00	-21.49	peak
6	16470.0000	42.54	10.35	52.89	74.00	-21.11	peak

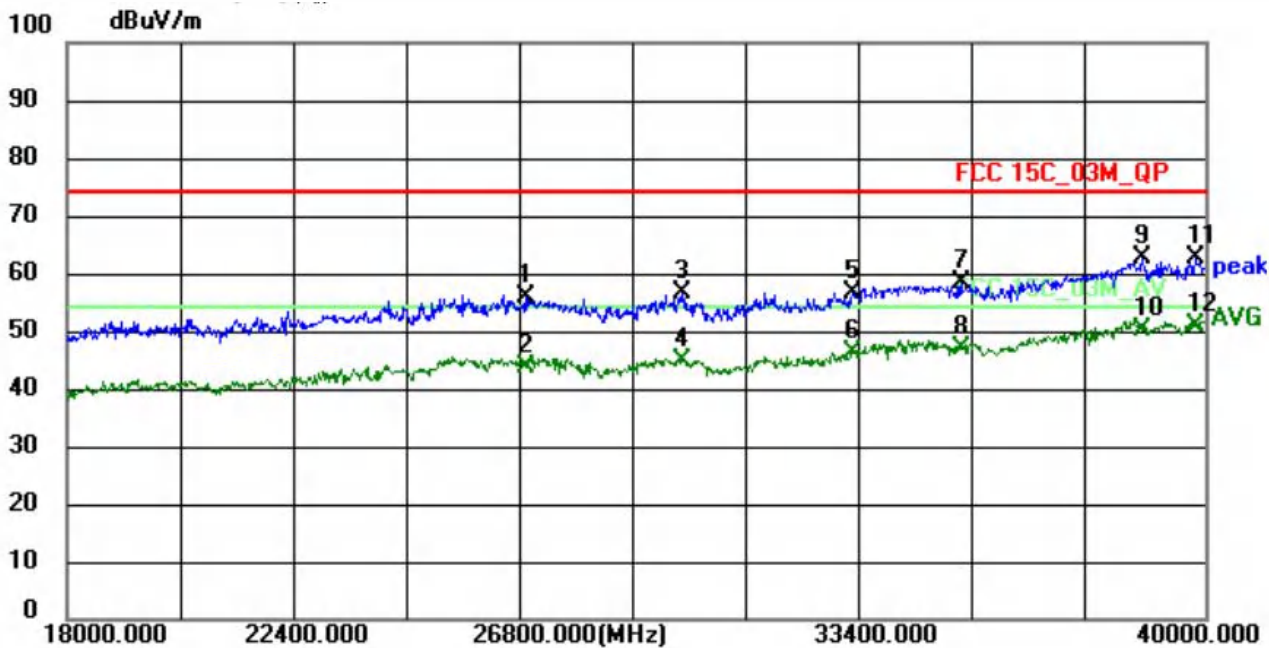


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	26888.0000	49.04	6.73	55.77	74.00	-18.23	peak
2	26888.0000	37.08	6.73	43.81	54.00	-10.19	AVG
3	29902.0000	47.56	9.10	56.66	74.00	-17.34	peak
4	29902.0000	35.69	9.10	44.79	54.00	-9.21	AVG
5	33180.0000	47.55	9.23	56.78	74.00	-17.22	peak
6	33180.0000	37.00	9.23	46.23	54.00	-7.77	AVG
7	35292.0000	48.09	10.20	58.29	74.00	-15.71	peak
8	35292.0000	36.94	10.20	47.14	54.00	-6.86	AVG
9	38790.0000	53.67	9.06	62.73	74.00	-11.27	peak
10	38790.0000	41.18	9.06	50.24	54.00	-3.76	AVG
11	39802.0000	52.90	9.92	62.82	74.00	-11.18	peak
12 *	39802.0000	40.94	9.92	50.86	54.00	-3.14	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11ac20-5240

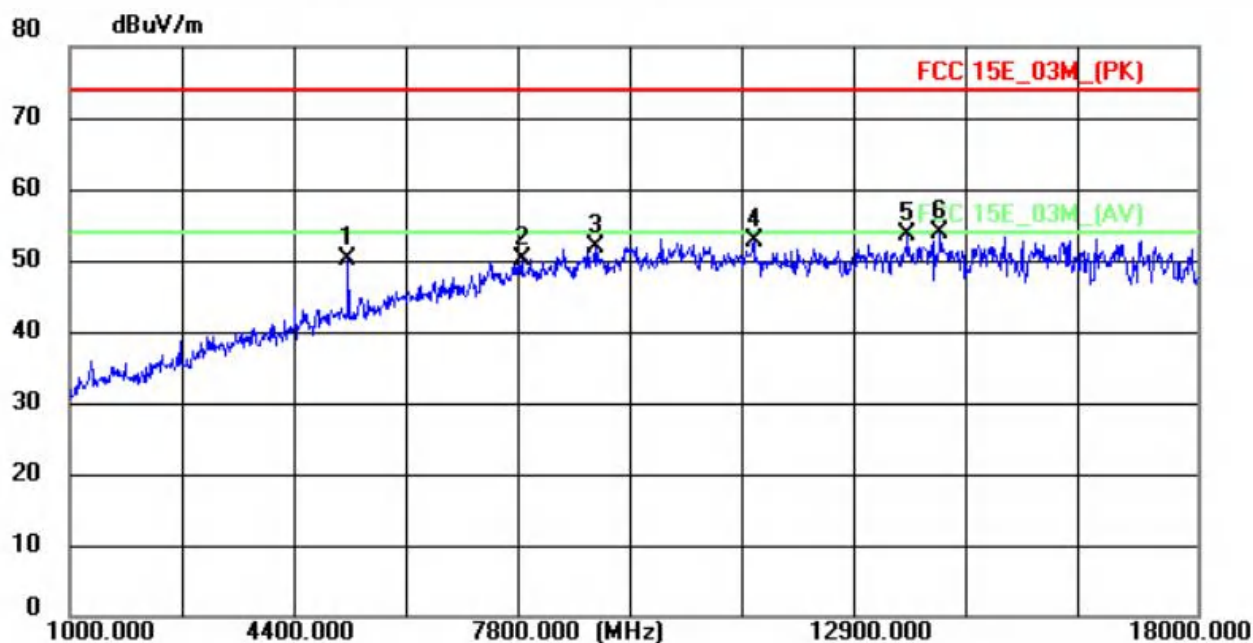


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.0000	56.49	-6.41	50.08	74.00	-23.92	peak
2	7817.0000	50.33	-0.07	50.26	74.00	-23.74	peak
3	8939.0000	50.41	1.54	51.95	74.00	-22.05	peak
4	11319.0000	49.12	3.70	52.82	74.00	-21.18	peak
5	13631.0000	46.64	6.86	53.50	74.00	-20.50	peak
6 *	14124.0000	46.38	7.58	53.96	74.00	-20.04	peak

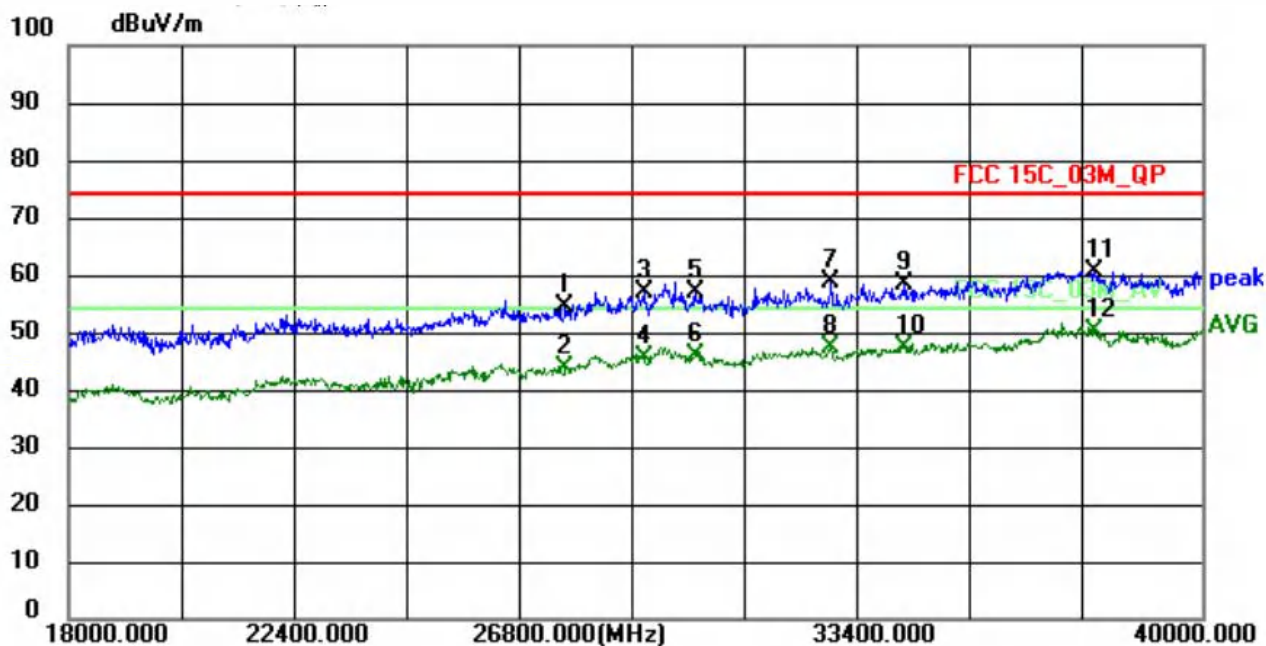


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27636.0000	47.26	7.27	54.53	74.00	-19.47	peak
2	27636.0000	36.32	7.27	43.59	54.00	-10.41	AVG
3	29176.0000	47.93	9.15	57.08	74.00	-16.92	peak
4	29176.0000	36.30	9.15	45.45	54.00	-8.55	AVG
5	30166.0000	48.06	9.05	57.11	74.00	-16.89	peak
6	30166.0000	36.78	9.05	45.83	54.00	-8.17	AVG
7	32806.0000	49.38	9.25	58.63	74.00	-15.37	peak
8	32806.0000	38.08	9.25	47.33	54.00	-6.67	AVG
9	34214.0000	48.69	9.67	58.36	74.00	-15.64	peak
10	34214.0000	37.55	9.67	47.22	54.00	-6.78	AVG
11	37932.0000	50.50	9.90	60.40	74.00	-13.60	peak
12 *	37932.0000	40.41	9.90	50.31	54.00	-3.69	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11n40-5190

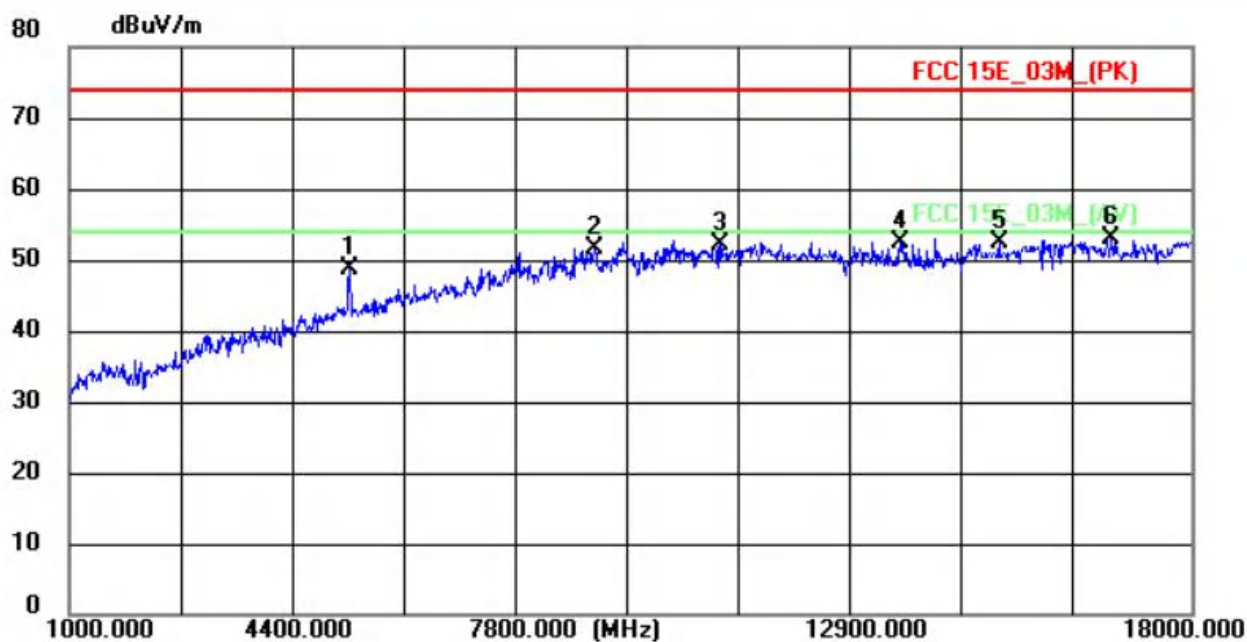


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5250.0000	54.96	-6.33	48.63	74.00	-25.37	peak
2	8973.0000	50.02	1.58	51.60	74.00	-22.40	peak
3	10877.0000	48.87	3.20	52.07	74.00	-21.93	peak
4	13597.0000	45.51	6.80	52.31	74.00	-21.69	peak
5	15093.0000	43.39	8.94	52.33	74.00	-21.67	peak
6 *	16793.0000	42.40	10.68	53.08	74.00	-20.92	peak

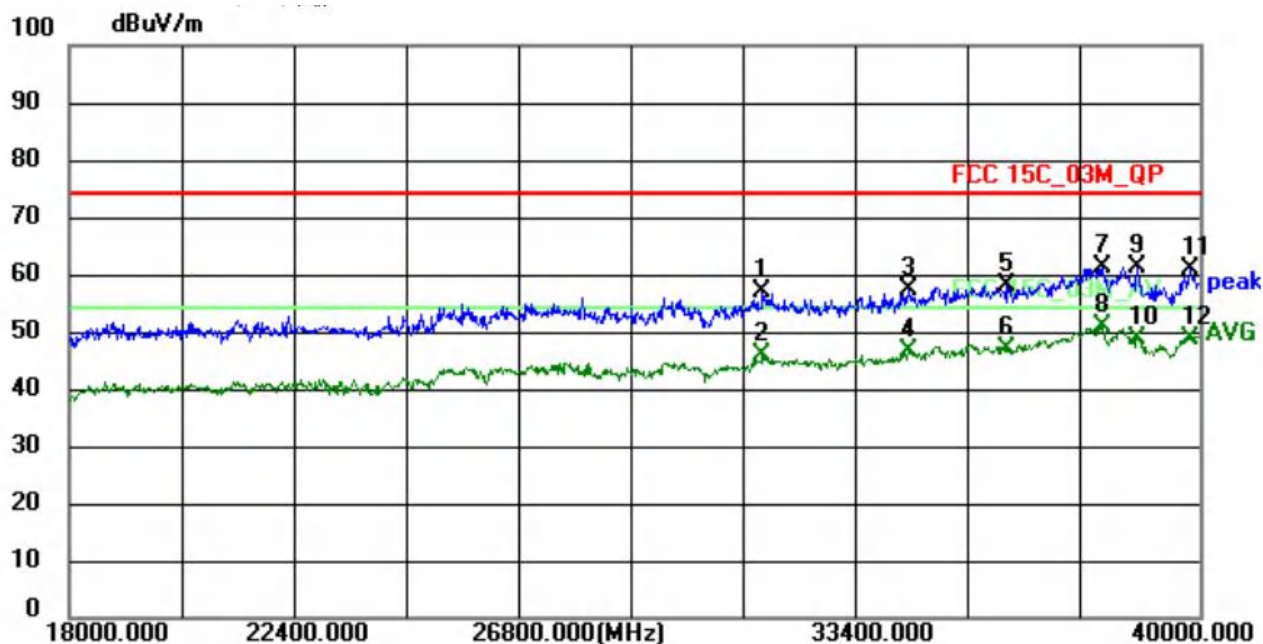


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31486.0000	47.72	9.32	57.04	74.00	-16.96	peak
2	31486.0000	36.70	9.32	46.02	54.00	-7.98	AVG
3	34324.0000	47.43	9.73	57.16	74.00	-16.84	peak
4	34324.0000	36.82	9.73	46.55	54.00	-7.45	AVG
5	36260.0000	48.35	9.85	58.20	74.00	-15.80	peak
6	36260.0000	37.28	9.85	47.13	54.00	-6.87	AVG
7	38130.0000	51.73	9.69	61.42	74.00	-12.58	peak
8 *	38130.0000	41.35	9.69	51.04	54.00	-2.96	AVG
9	38790.0000	52.17	9.06	61.23	74.00	-12.77	peak
10	38790.0000	39.68	9.06	48.74	54.00	-5.26	AVG
11	39802.0000	50.90	9.92	60.82	74.00	-13.18	peak
12	39802.0000	38.94	9.92	48.86	54.00	-5.14	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11n40-5190

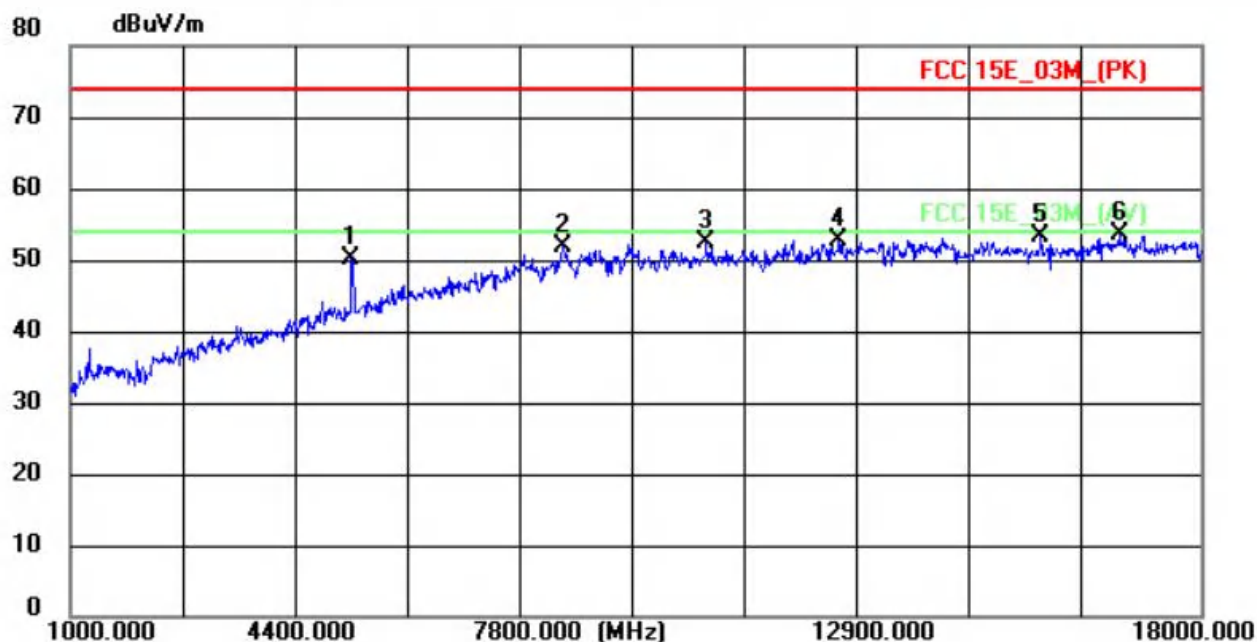


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5233.0000	56.59	-6.35	50.24	74.00	-23.76	peak
2	8412.0000	50.85	0.87	51.72	74.00	-22.28	peak
3	10571.0000	49.63	2.85	52.48	74.00	-21.52	peak
4	12560.0000	47.33	5.28	52.61	74.00	-21.39	peak
5	15603.0000	43.71	9.46	53.17	74.00	-20.83	peak
6 *	16776.0000	42.84	10.67	53.51	74.00	-20.49	peak

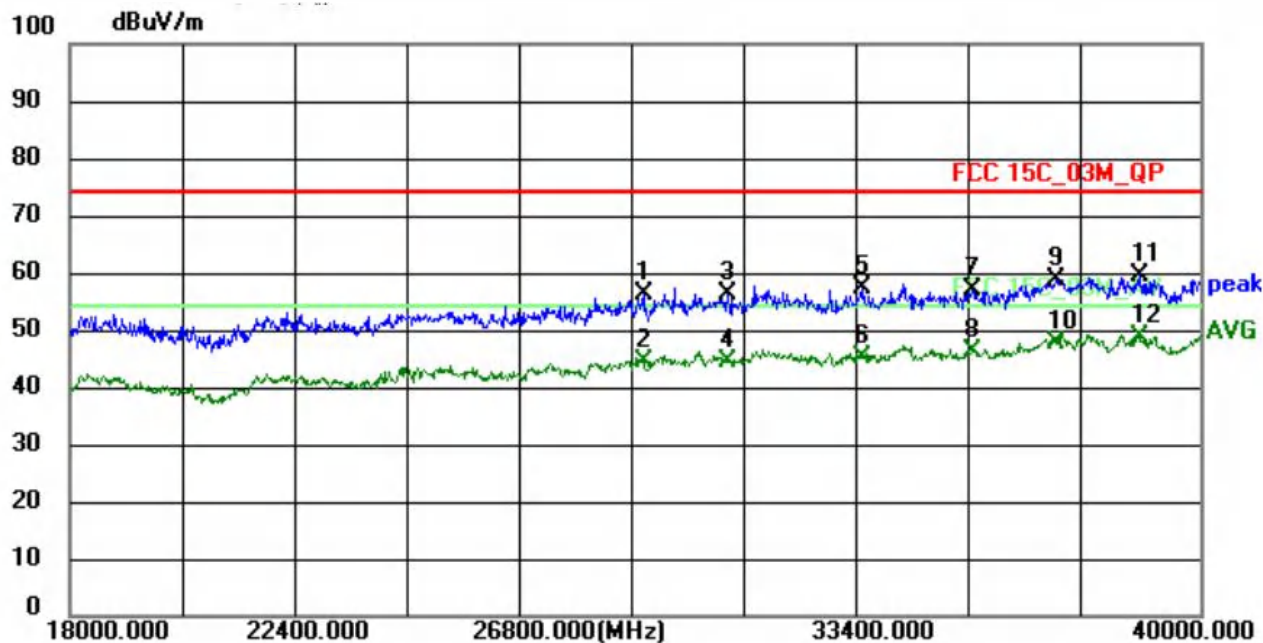


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	29176.0000	46.93	9.15	56.08	74.00	-17.92	peak
2	29176.0000	35.30	9.15	44.45	54.00	-9.55	AVG
3	30826.0000	47.28	9.02	56.30	74.00	-17.70	peak
4	30826.0000	35.50	9.02	44.52	54.00	-9.48	AVG
5	33444.0000	47.93	9.31	57.24	74.00	-16.76	peak
6	33444.0000	35.92	9.31	45.23	54.00	-8.77	AVG
7	35578.0000	46.88	10.23	57.11	74.00	-16.89	peak
8	35578.0000	35.85	10.23	46.08	54.00	-7.92	AVG
9	37184.0000	49.11	9.76	58.87	74.00	-15.13	peak
10	37184.0000	38.02	9.76	47.78	54.00	-6.22	AVG
11	38812.0000	50.56	9.06	59.62	74.00	-14.38	peak
12 *	38812.0000	39.54	9.06	48.60	54.00	-5.40	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11n40-5230

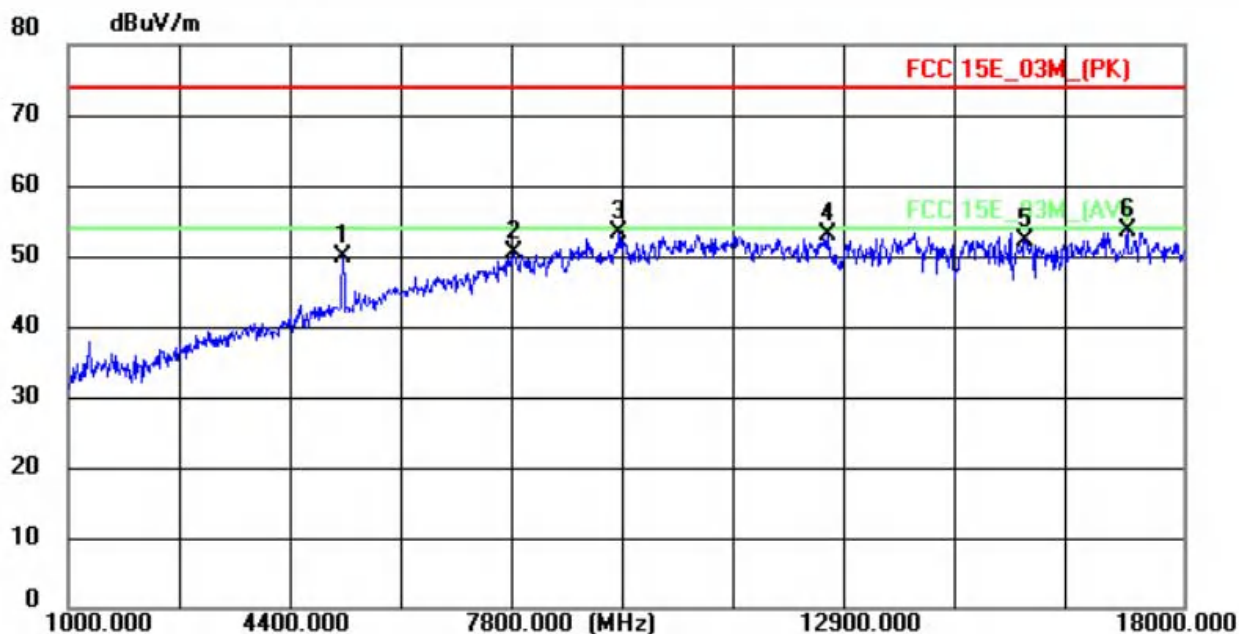


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5182.0000	56.26	-6.44	49.82	74.00	-24.18	peak
2	7800.0000	50.63	-0.10	50.53	74.00	-23.47	peak
3	9381.0000	51.54	1.84	53.38	74.00	-20.62	peak
4	12577.0000	47.58	5.31	52.89	74.00	-21.11	peak
5	15603.0000	42.81	9.46	52.27	74.00	-21.73	peak
6 *	17150.0000	42.56	11.05	53.61	74.00	-20.39	peak

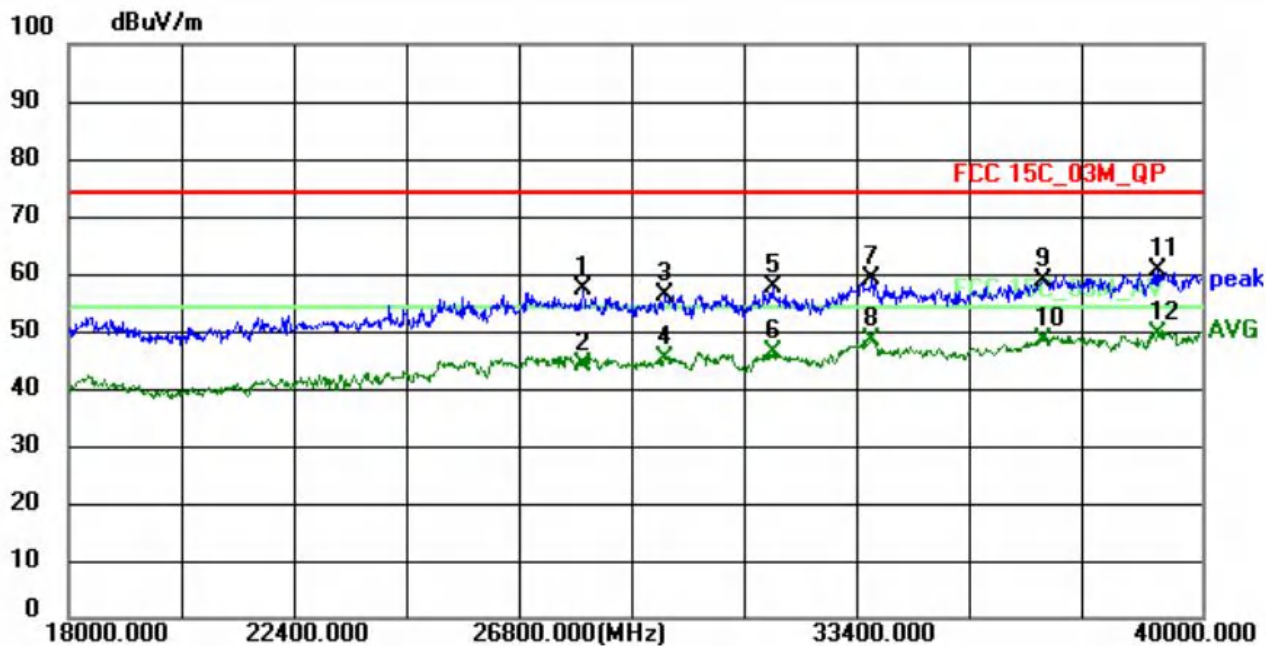


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27988.0000	49.76	7.60	57.36	74.00	-16.64	peak
2	27988.0000	36.47	7.60	44.07	54.00	-9.93	AVG
3	29572.0000	47.13	9.19	56.32	74.00	-17.68	peak
4	29572.0000	35.91	9.19	45.10	54.00	-8.90	AVG
5	31662.0000	48.43	9.35	57.78	74.00	-16.22	peak
6	31662.0000	36.84	9.35	46.19	54.00	-7.81	AVG
7	33598.0000	49.74	9.36	59.10	74.00	-14.90	peak
8	33598.0000	38.91	9.36	48.27	54.00	-5.73	AVG
9	36942.0000	49.12	9.74	58.86	74.00	-15.14	peak
10	36942.0000	38.69	9.74	48.43	54.00	-5.57	AVG
11	39164.0000	51.15	9.25	60.40	74.00	-13.60	peak
12 *	39164.0000	40.18	9.25	49.43	54.00	-4.57	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11n40-5230

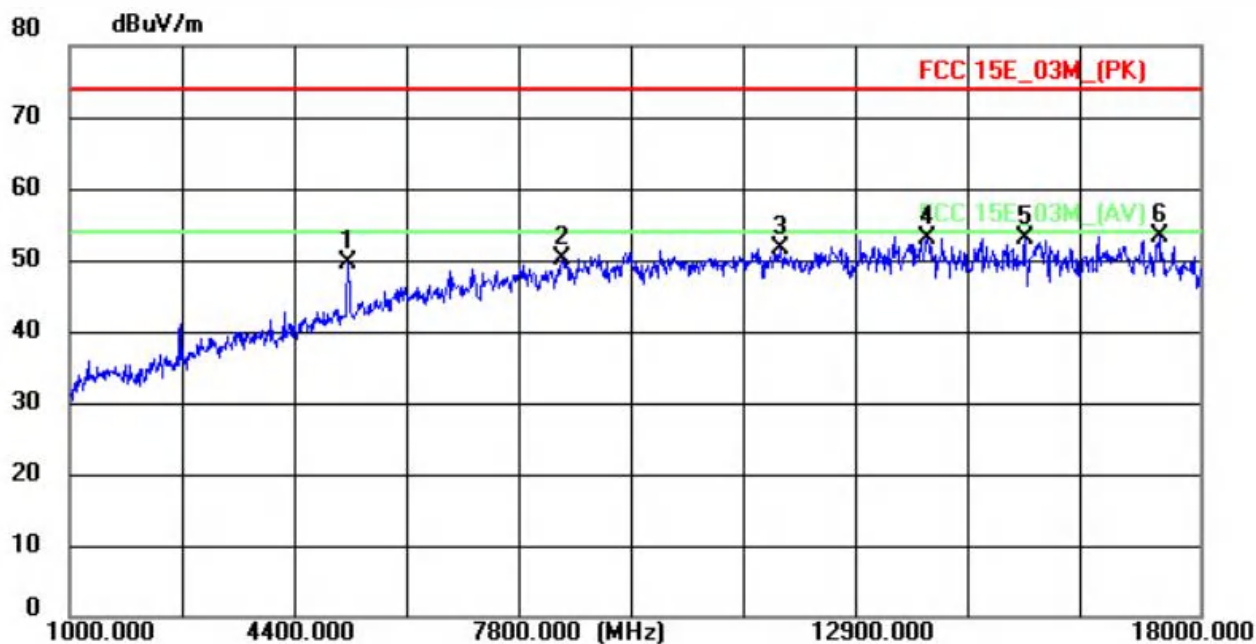


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.0000	56.10	-6.41	49.69	74.00	-24.31	peak
2	8412.0000	49.32	0.87	50.19	74.00	-23.81	peak
3	11693.0000	47.53	4.12	51.65	74.00	-22.35	peak
4	13903.0000	45.63	7.25	52.88	74.00	-21.12	peak
5	15365.0000	43.76	9.22	52.98	74.00	-21.02	peak
6 *	17388.0000	41.88	11.29	53.17	74.00	-20.83	peak

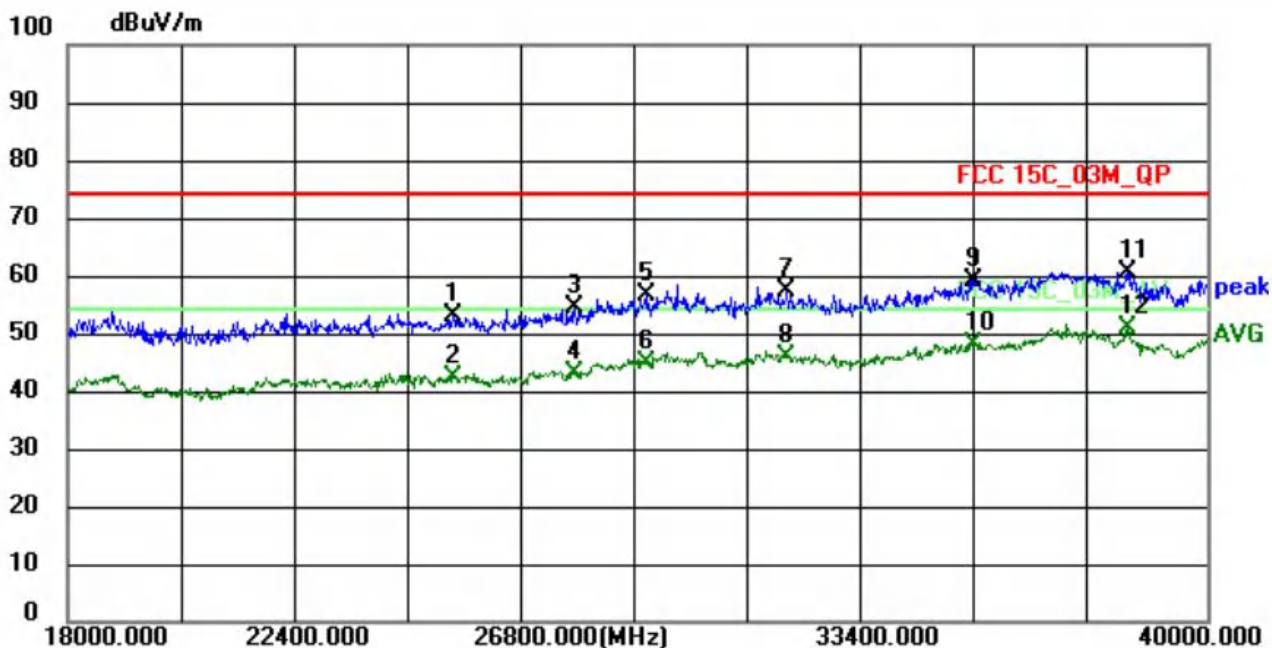


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25458.0000	47.07	5.81	52.88	74.00	-21.12	peak
2	25458.0000	36.60	5.81	42.41	54.00	-11.59	AVG
3	27790.0000	46.94	7.41	54.35	74.00	-19.65	peak
4	27790.0000	35.77	7.41	43.18	54.00	-10.82	AVG
5	29176.0000	47.43	9.15	56.58	74.00	-17.42	peak
6	29176.0000	35.80	9.15	44.95	54.00	-9.05	AVG
7	31882.0000	47.78	9.40	57.18	74.00	-16.82	peak
8	31882.0000	36.37	9.40	45.77	54.00	-8.23	AVG
9	35512.0000	48.87	10.27	59.14	74.00	-14.86	peak
10	35512.0000	37.77	10.27	48.04	54.00	-5.96	AVG
11	38460.0000	51.57	9.08	60.65	74.00	-13.35	peak
12 *	38460.0000	41.66	9.08	50.74	54.00	-3.26	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11ac40-5190

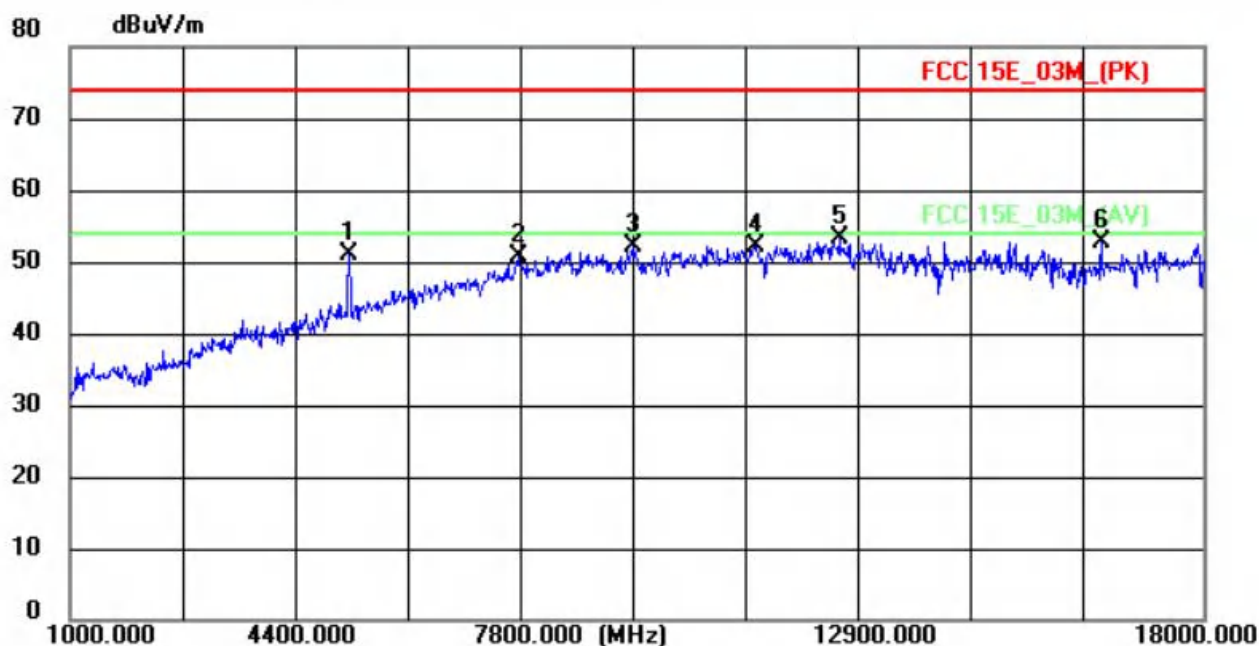


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.0000	57.33	-6.41	50.92	74.00	-23.08	peak
2	7732.0000	50.88	-0.25	50.63	74.00	-23.37	peak
3	9449.0000	50.28	1.87	52.15	74.00	-21.85	peak
4	11302.0000	48.52	3.68	52.20	74.00	-21.80	peak
5 *	12543.0000	48.07	5.27	53.34	74.00	-20.66	peak
6	16470.0000	42.29	10.35	52.64	74.00	-21.36	peak

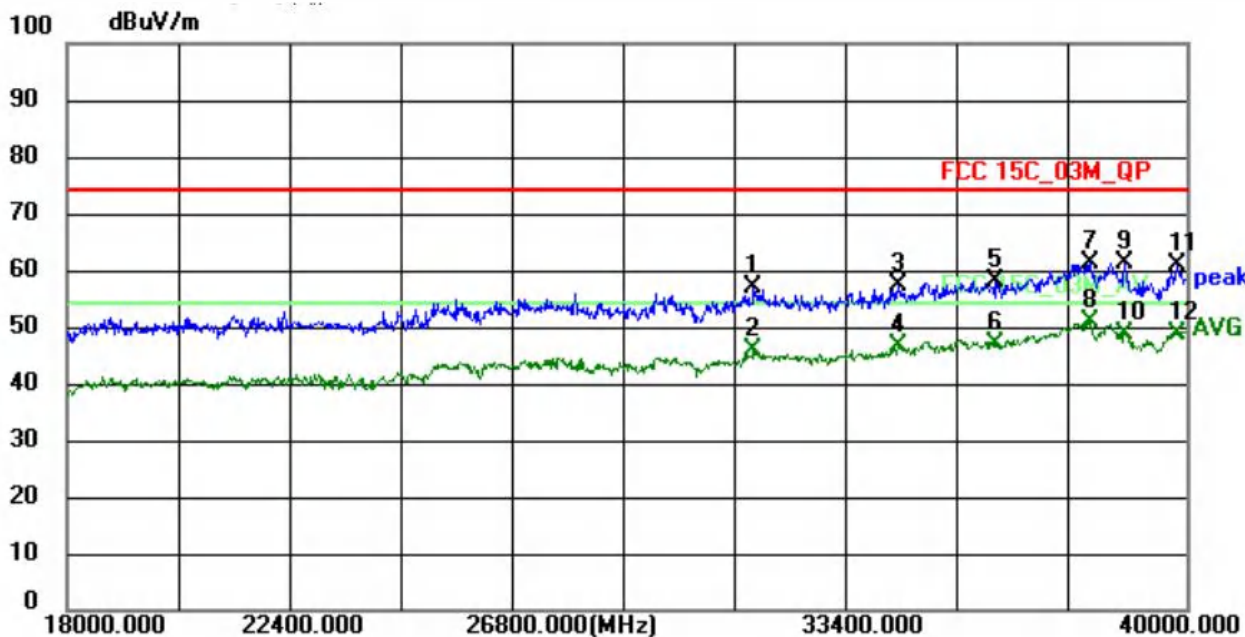


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	31486.0000	47.72	9.32	57.04	74.00	-16.96	peak
2	31486.0000	36.70	9.32	46.02	54.00	-7.98	AVG
3	34324.0000	47.43	9.73	57.16	74.00	-16.84	peak
4	34324.0000	36.82	9.73	46.55	54.00	-7.45	AVG
5	36260.0000	48.35	9.85	58.20	74.00	-15.80	peak
6	36260.0000	37.28	9.85	47.13	54.00	-6.87	AVG
7	38130.0000	51.73	9.69	61.42	74.00	-12.58	peak
8 *	38130.0000	41.35	9.69	51.04	54.00	-2.96	AVG
9	38790.0000	52.17	9.06	61.23	74.00	-12.77	peak
10	38790.0000	39.68	9.06	48.74	54.00	-5.26	AVG
11	39802.0000	50.90	9.92	60.82	74.00	-13.18	peak
12	39802.0000	38.94	9.92	48.86	54.00	-5.14	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11ac40-5190

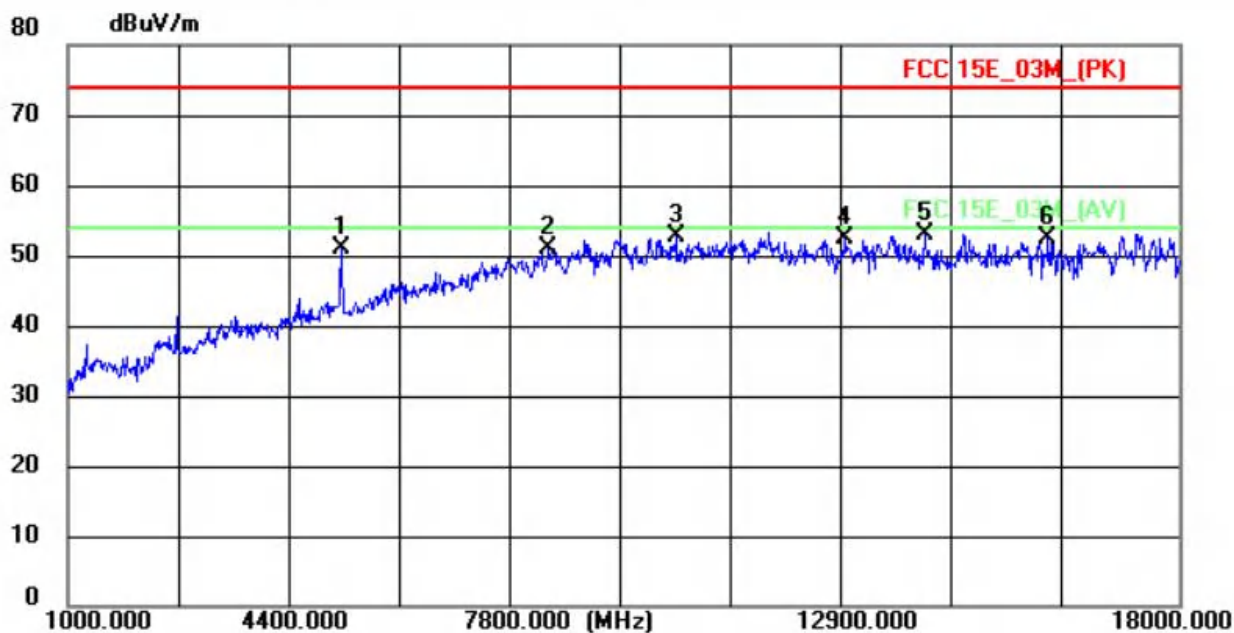


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5182.0000	57.31	-6.44	50.87	74.00	-23.13	peak
2	8361.0000	50.12	0.81	50.93	74.00	-23.07	peak
3	10299.0000	50.12	2.54	52.66	74.00	-21.34	peak
4	12900.0000	46.57	5.78	52.35	74.00	-21.65	peak
5 *	14107.0000	45.52	7.55	53.07	74.00	-20.93	peak
6	15994.0000	42.65	9.86	52.51	74.00	-21.49	peak

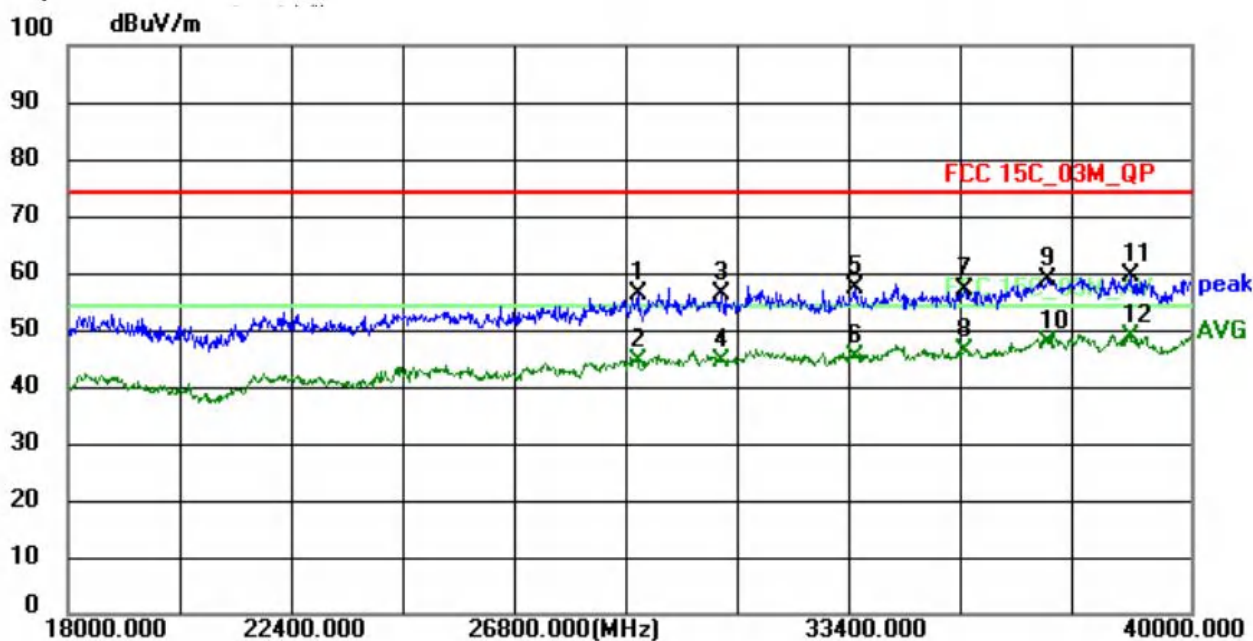


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	29176.0000	46.93	9.15	56.08	74.00	-17.92	peak
2	29176.0000	35.30	9.15	44.45	54.00	-9.55	AVG
3	30826.0000	47.28	9.02	56.30	74.00	-17.70	peak
4	30826.0000	35.50	9.02	44.52	54.00	-9.48	AVG
5	33444.0000	47.93	9.31	57.24	74.00	-16.76	peak
6	33444.0000	35.92	9.31	45.23	54.00	-8.77	AVG
7	35578.0000	46.88	10.23	57.11	74.00	-16.89	peak
8	35578.0000	35.85	10.23	46.08	54.00	-7.92	AVG
9	37184.0000	49.11	9.76	58.87	74.00	-15.13	peak
10	37184.0000	38.02	9.76	47.78	54.00	-6.22	AVG
11	38812.0000	50.56	9.06	59.62	74.00	-14.38	peak
12 *	38812.0000	39.54	9.06	48.60	54.00	-5.40	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11ac40-5230

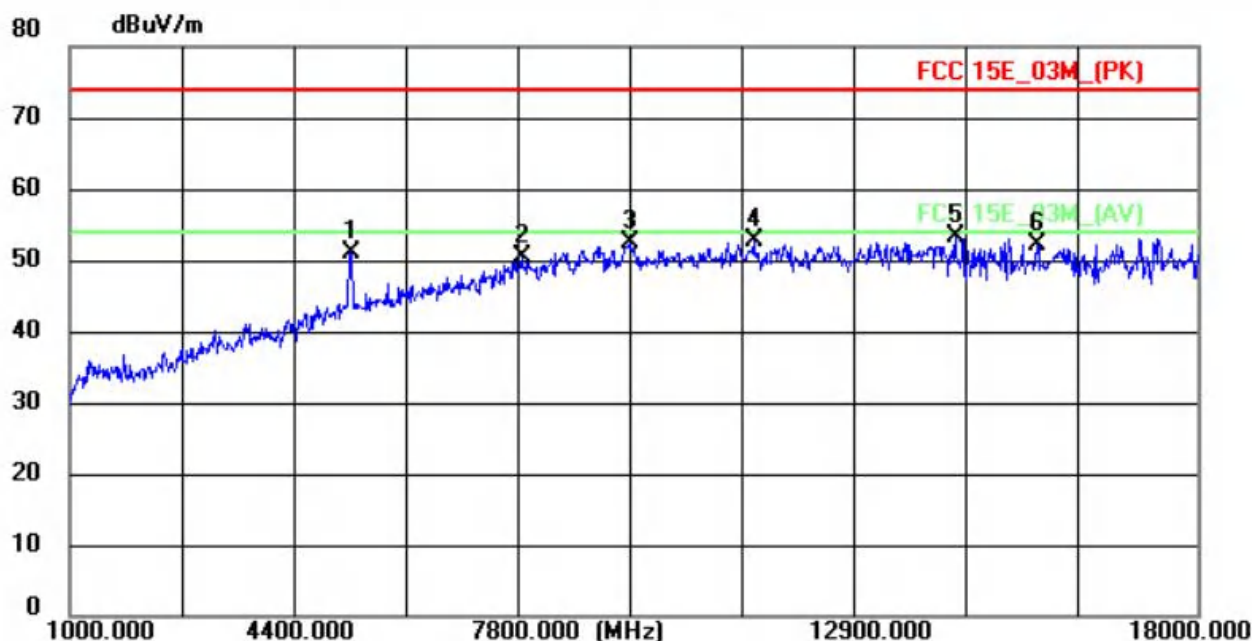


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5250.0000	57.31	-6.33	50.98	74.00	-23.02	peak
2	7817.0000	50.41	-0.07	50.34	74.00	-23.66	peak
3	9449.0000	50.65	1.87	52.52	74.00	-21.48	peak
4	11319.0000	48.99	3.70	52.69	74.00	-21.31	peak
5 *	14362.0000	45.26	7.91	53.17	74.00	-20.83	peak
6	15603.0000	42.70	9.46	52.16	74.00	-21.84	peak

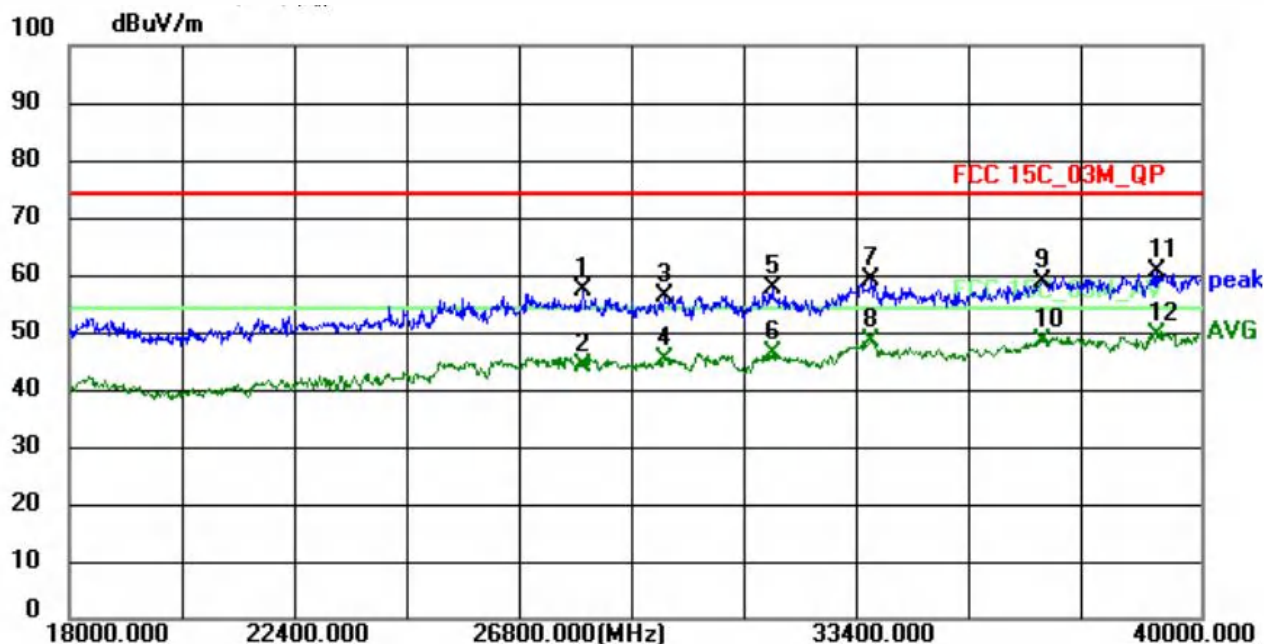


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27988.0000	49.76	7.60	57.36	74.00	-16.64	peak
2	27988.0000	36.47	7.60	44.07	54.00	-9.93	AVG
3	29572.0000	47.13	9.19	56.32	74.00	-17.68	peak
4	29572.0000	35.91	9.19	45.10	54.00	-8.90	AVG
5	31662.0000	48.43	9.35	57.78	74.00	-16.22	peak
6	31662.0000	36.84	9.35	46.19	54.00	-7.81	AVG
7	33598.0000	49.74	9.36	59.10	74.00	-14.90	peak
8	33598.0000	38.91	9.36	48.27	54.00	-5.73	AVG
9	36942.0000	49.12	9.74	58.86	74.00	-15.14	peak
10	36942.0000	38.69	9.74	48.43	54.00	-5.57	AVG
11	39164.0000	51.15	9.25	60.40	74.00	-13.60	peak
12 *	39164.0000	40.18	9.25	49.43	54.00	-4.57	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11ac40-5230

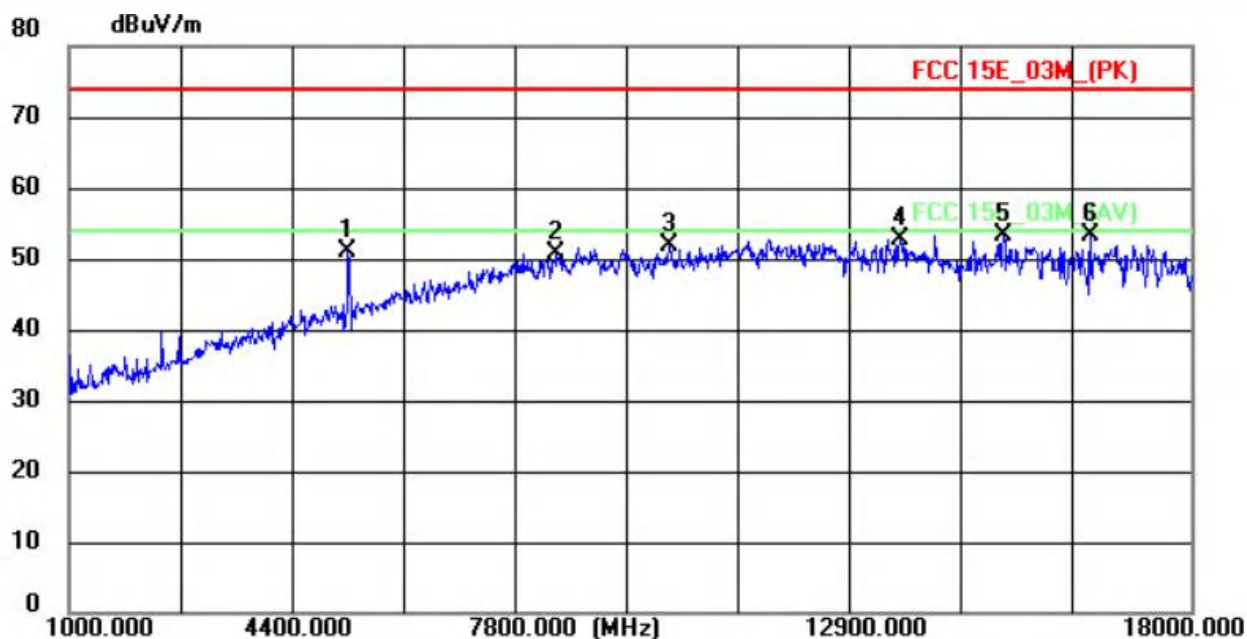


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5233.0000	57.37	-6.35	51.02	74.00	-22.98	peak
2	8395.0000	49.79	0.85	50.64	74.00	-23.36	peak
3	10112.0000	49.46	2.32	51.78	74.00	-22.22	peak
4	13597.0000	45.95	6.80	52.75	74.00	-21.25	peak
5 *	15161.0000	44.33	9.01	53.34	74.00	-20.66	peak
6	16470.0000	42.81	10.35	53.16	74.00	-20.84	peak

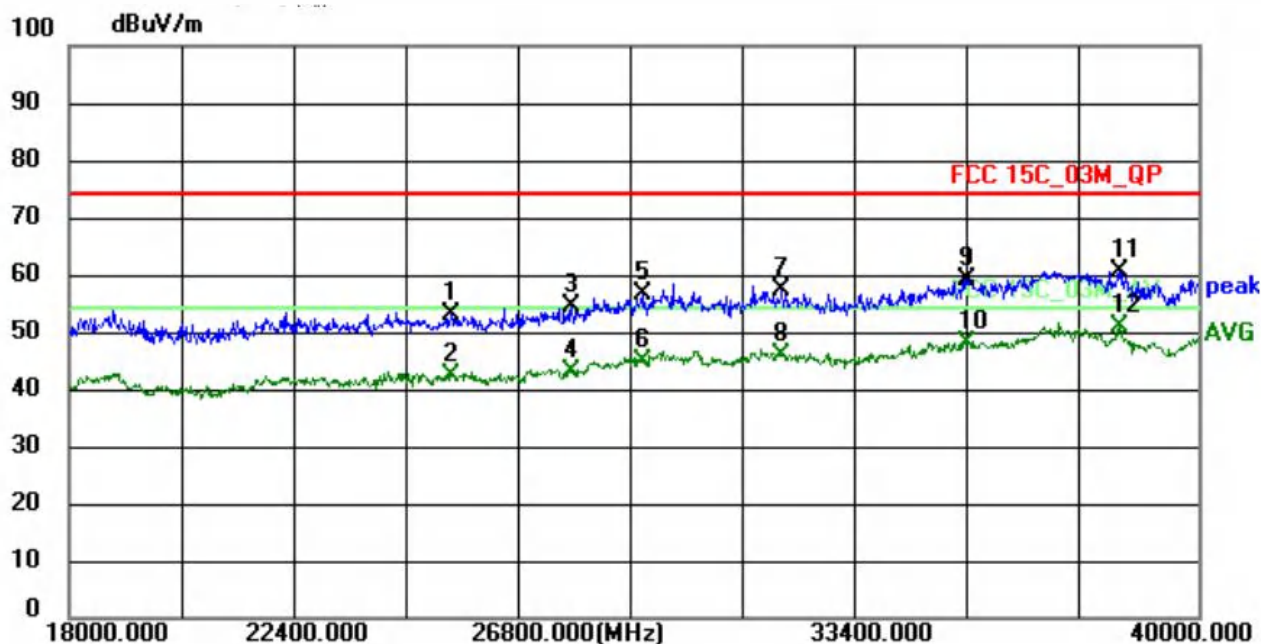


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25458.0000	47.07	5.81	52.88	74.00	-21.12	peak
2	25458.0000	36.60	5.81	42.41	54.00	-11.59	AVG
3	27790.0000	46.94	7.41	54.35	74.00	-19.65	peak
4	27790.0000	35.77	7.41	43.18	54.00	-10.82	AVG
5	29176.0000	47.43	9.15	56.58	74.00	-17.42	peak
6	29176.0000	35.80	9.15	44.95	54.00	-9.05	AVG
7	31882.0000	47.78	9.40	57.18	74.00	-16.82	peak
8	31882.0000	36.37	9.40	45.77	54.00	-8.23	AVG
9	35512.0000	48.87	10.27	59.14	74.00	-14.86	peak
10	35512.0000	37.77	10.27	48.04	54.00	-5.96	AVG
11	38460.0000	51.57	9.08	60.65	74.00	-13.35	peak
12 *	38460.0000	41.66	9.08	50.74	54.00	-3.26	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11a-5745

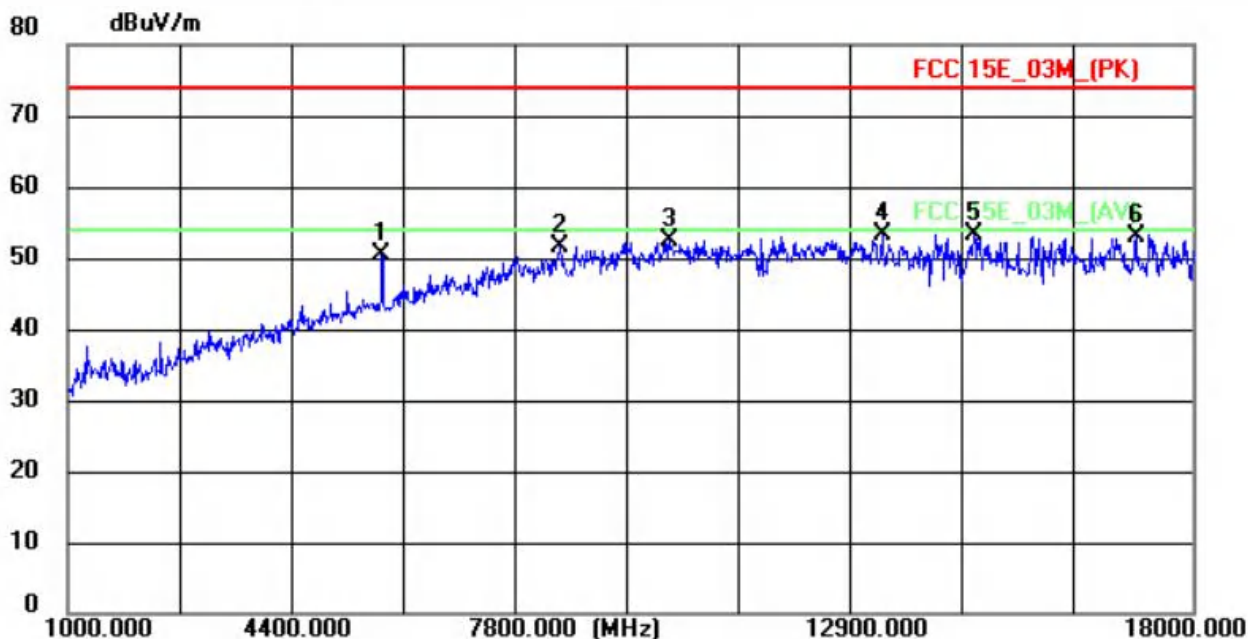


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5743.0000	55.48	-5.00	50.48	74.00	-23.52	peak
2	8429.0000	50.62	0.89	51.51	74.00	-22.49	peak
3	10095.0000	50.12	2.30	52.42	74.00	-21.58	peak
4 *	13308.0000	47.03	6.38	53.41	74.00	-20.59	peak
5	14702.0000	44.99	8.41	53.40	74.00	-20.60	peak
6	17150.0000	41.91	11.05	52.96	74.00	-21.04	peak

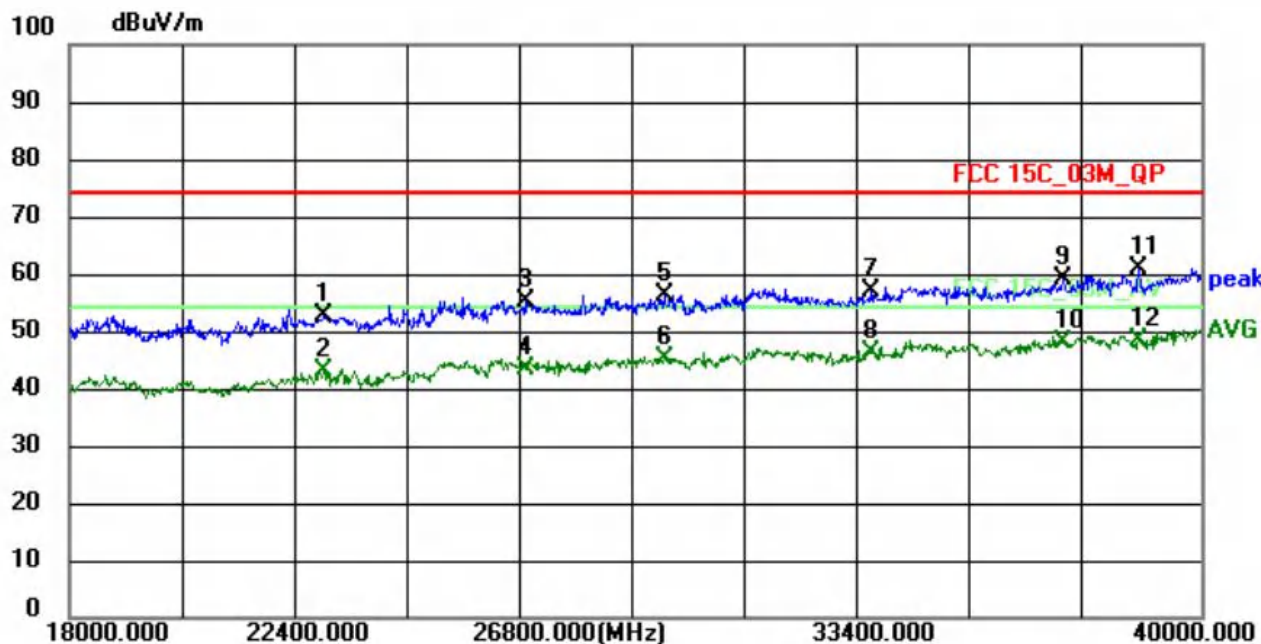


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	22950.0000	48.91	3.66	52.57	74.00	-21.43	peak
2	22950.0000	39.32	3.66	42.98	54.00	-11.02	AVG
3	26888.0000	48.54	6.73	55.27	74.00	-18.73	peak
4	26888.0000	36.58	6.73	43.31	54.00	-10.69	AVG
5	29572.0000	47.13	9.19	56.32	74.00	-17.68	peak
6	29572.0000	35.91	9.19	45.10	54.00	-8.90	AVG
7	33598.0000	47.74	9.36	57.10	74.00	-16.90	peak
8	33598.0000	36.91	9.36	46.27	54.00	-7.73	AVG
9	37316.0000	49.32	9.80	59.12	74.00	-14.88	peak
10	37316.0000	38.27	9.80	48.07	54.00	-5.93	AVG
11	38790.0000	51.67	9.06	60.73	74.00	-13.27	peak
12 *	38790.0000	39.18	9.06	48.24	54.00	-5.76	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11a-5745

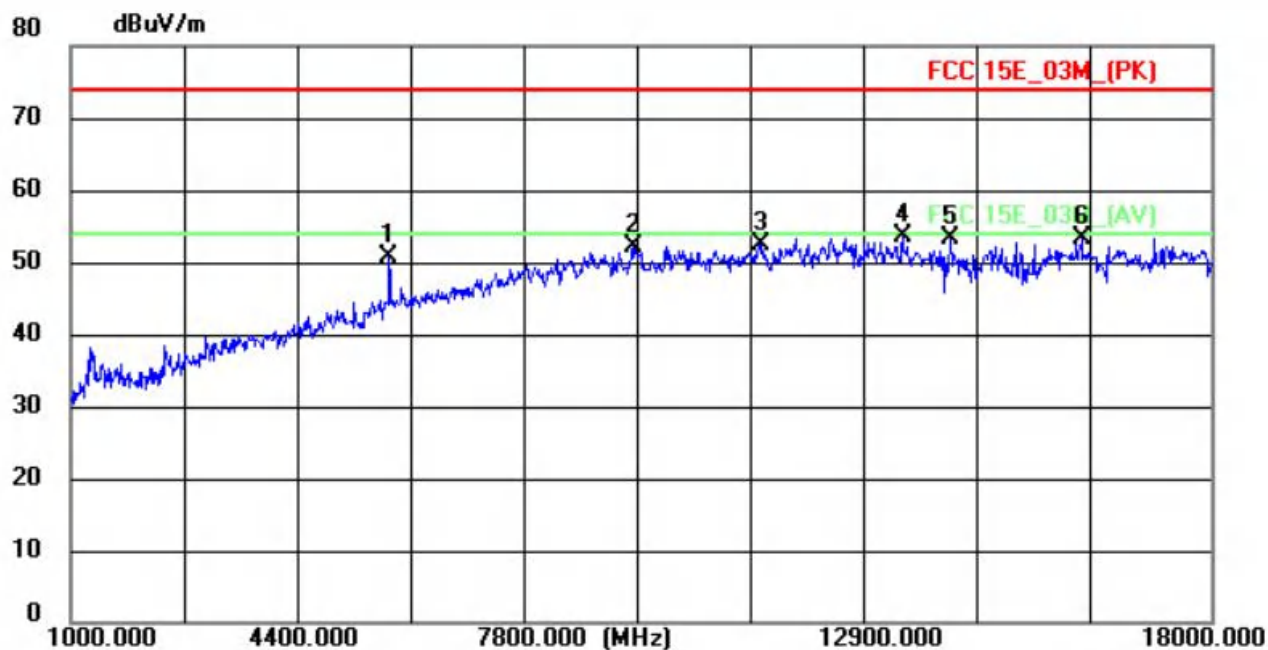


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5743.0000	55.69	-5.00	50.69	74.00	-23.31	peak
2	9381.0000	50.31	1.84	52.15	74.00	-21.85	peak
3	11285.0000	48.76	3.66	52.42	74.00	-21.58	peak
4 *	13410.0000	47.03	6.53	53.56	74.00	-20.44	peak
5	14124.0000	45.81	7.58	53.39	74.00	-20.61	peak
6	16079.0000	43.25	9.96	53.21	74.00	-20.79	peak

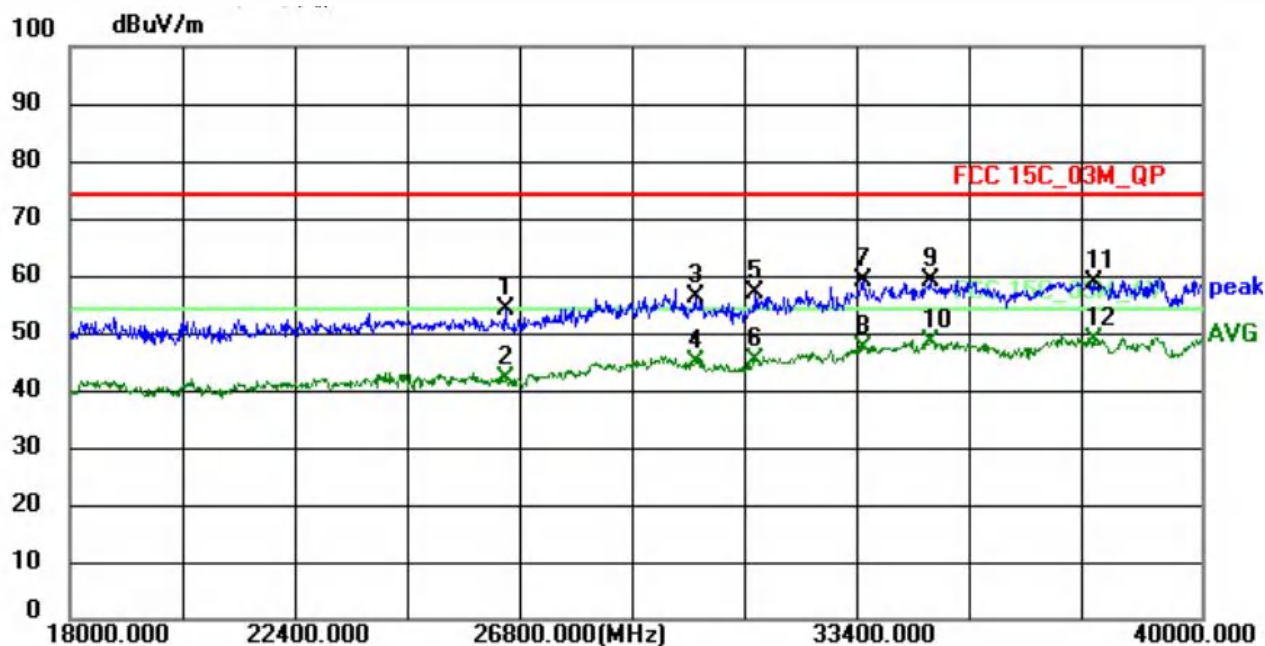


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	26470.0000	47.86	6.28	54.14	74.00	-19.86	peak
2	26470.0000	35.66	6.28	41.94	54.00	-12.06	AVG
3	30166.0000	47.06	9.05	56.11	74.00	-17.89	peak
4	30166.0000	35.78	9.05	44.83	54.00	-9.17	AVG
5	31332.0000	47.82	9.23	57.05	74.00	-16.95	peak
6	31332.0000	35.92	9.23	45.15	54.00	-8.85	AVG
7	33444.0000	49.93	9.31	59.24	74.00	-14.76	peak
8	33444.0000	37.92	9.31	47.23	54.00	-6.77	AVG
9	34720.0000	49.20	9.95	59.15	74.00	-14.85	peak
10	34720.0000	38.34	9.95	48.29	54.00	-5.71	AVG
11	37932.0000	49.00	9.90	58.90	74.00	-15.10	peak
12 *	37932.0000	38.91	9.90	48.81	54.00	-5.19	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11a-5785

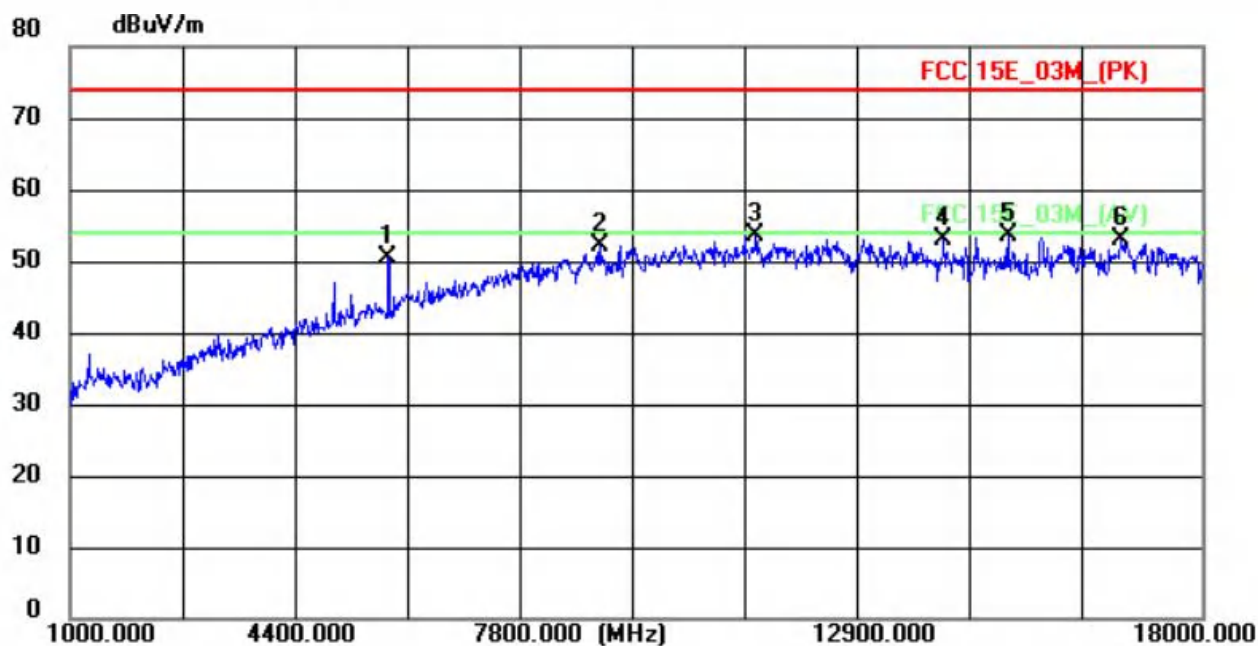


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5777.0000	55.29	-4.87	50.42	74.00	-23.58	peak
2	8956.0000	50.71	1.56	52.27	74.00	-21.73	peak
3 *	11302.0000	49.99	3.68	53.67	74.00	-20.33	peak
4	14124.0000	45.52	7.58	53.10	74.00	-20.90	peak
5	15093.0000	44.64	8.94	53.58	74.00	-20.42	peak
6	16776.0000	42.19	10.67	52.86	74.00	-21.14	peak

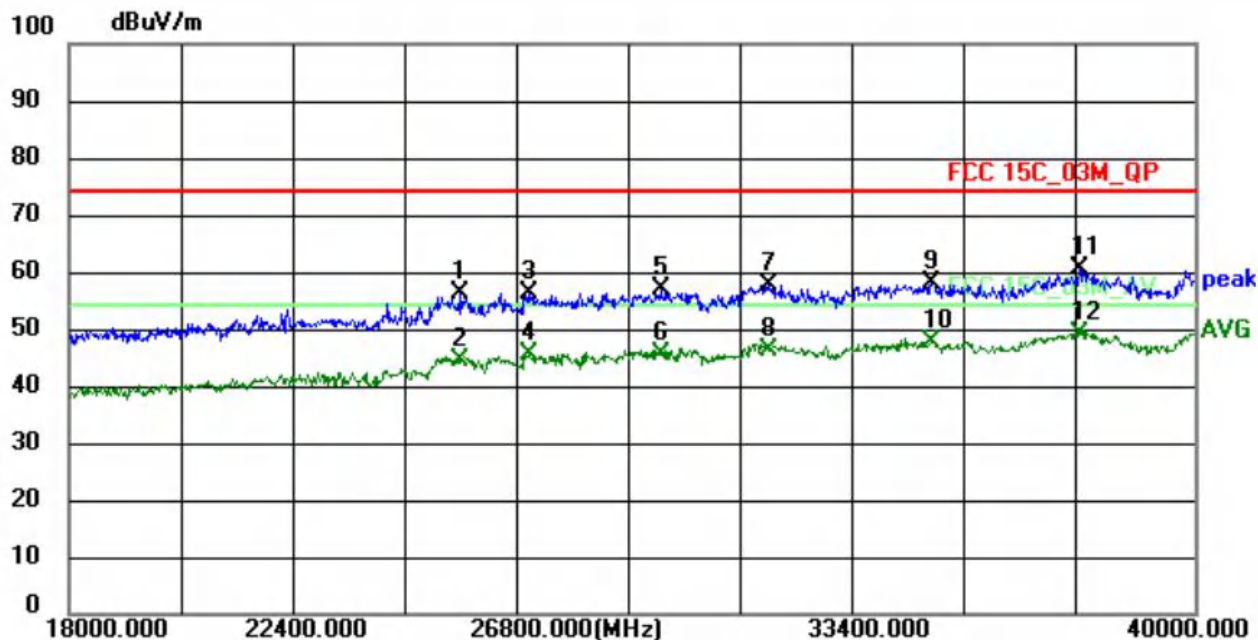


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25656.0000	50.32	5.91	56.23	74.00	-17.77	peak
2	25656.0000	38.52	5.91	44.43	54.00	-9.57	AVG
3	26976.0000	49.46	6.84	56.30	74.00	-17.70	peak
4	26976.0000	38.79	6.84	45.63	54.00	-8.37	AVG
5	29572.0000	47.63	9.19	56.82	74.00	-17.18	peak
6	29572.0000	36.41	9.19	45.60	54.00	-8.40	AVG
7	31662.0000	48.43	9.35	57.78	74.00	-16.22	peak
8	31662.0000	36.84	9.35	46.19	54.00	-7.81	AVG
9	34852.0000	48.17	10.02	58.19	74.00	-15.81	peak
10	34852.0000	37.71	10.02	47.73	54.00	-6.27	AVG
11	37756.0000	50.68	9.87	60.55	74.00	-13.45	peak
12 *	37756.0000	39.32	9.87	49.19	54.00	-4.81	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11a-5785

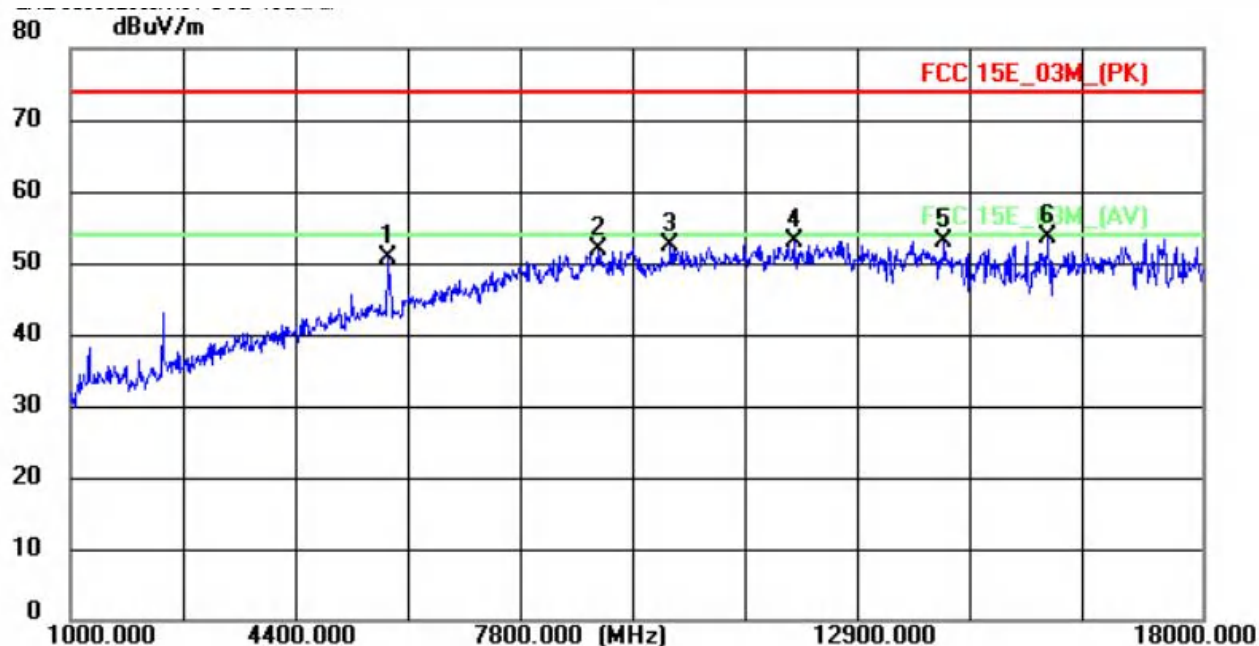


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5777.0000	55.63	-4.87	50.76	74.00	-23.24	peak
2	8939.0000	50.33	1.54	51.87	74.00	-22.13	peak
3	10010.0000	50.24	2.21	52.45	74.00	-21.55	peak
4	11863.0000	48.76	4.32	53.08	74.00	-20.92	peak
5	14124.0000	45.41	7.58	52.99	74.00	-21.01	peak
6 *	15671.0000	44.02	9.53	53.55	74.00	-20.45	peak

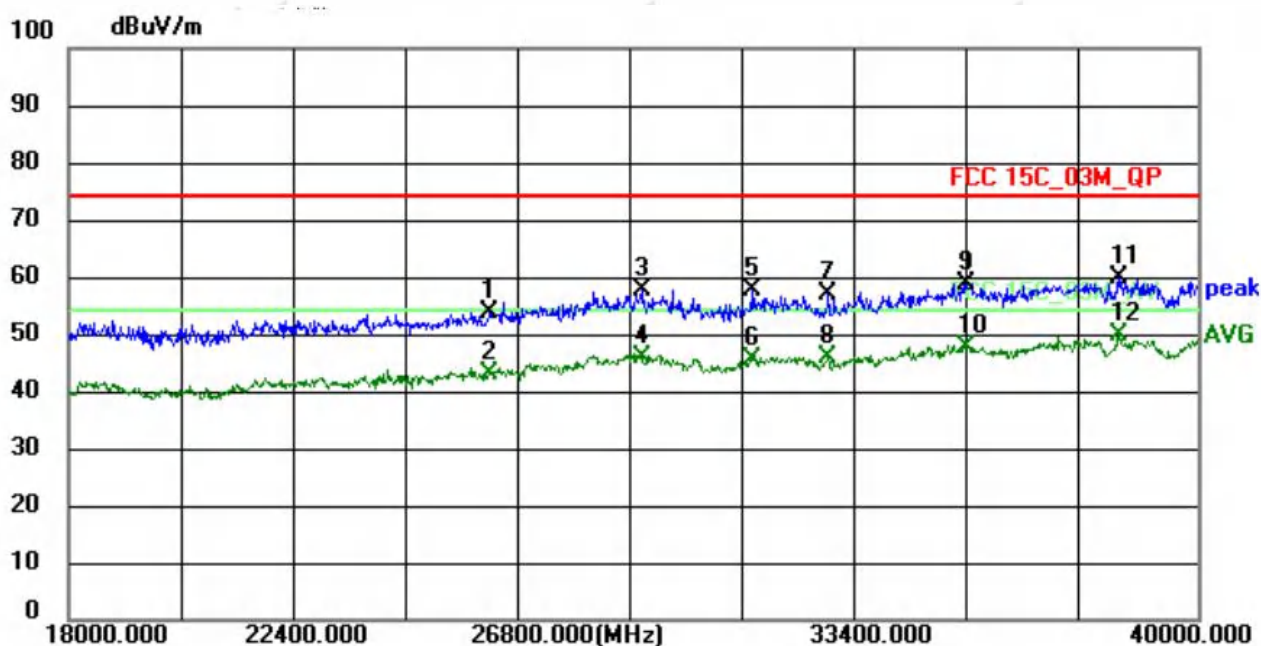


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	26206.0000	47.58	6.15	53.73	74.00	-20.27	peak
2	26206.0000	37.01	6.15	43.16	54.00	-10.84	AVG
3	29176.0000	48.43	9.15	57.58	74.00	-16.42	peak
4	29176.0000	36.80	9.15	45.95	54.00	-8.05	AVG
5	31332.0000	48.32	9.23	57.55	74.00	-16.45	peak
6	31332.0000	36.42	9.23	45.65	54.00	-8.35	AVG
7	32806.0000	47.88	9.25	57.13	74.00	-16.87	peak
8	32806.0000	36.58	9.25	45.83	54.00	-8.17	AVG
9	35512.0000	48.37	10.27	58.64	74.00	-15.36	peak
10	35512.0000	37.27	10.27	47.54	54.00	-6.46	AVG
11	38460.0000	50.57	9.08	59.65	74.00	-14.35	peak
12 *	38460.0000	40.66	9.08	49.74	54.00	-4.26	AVG


Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11a-5825

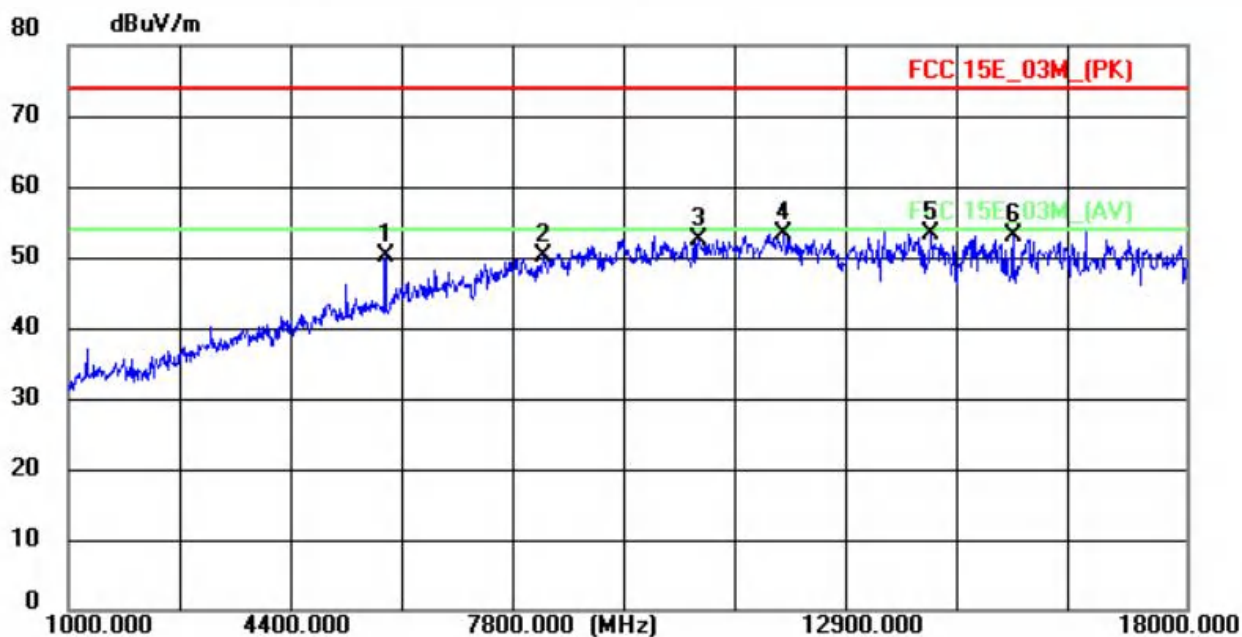

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5828.0000	54.74	-4.68	50.06	74.00	-23.94	peak
2	8225.0000	49.41	0.63	50.04	74.00	-23.96	peak
3	10588.0000	49.56	2.86	52.42	74.00	-21.58	peak
4	11880.0000	48.96	4.34	53.30	74.00	-20.70	peak
5 *	14124.0000	45.84	7.58	53.42	74.00	-20.58	peak
6	15365.0000	43.82	9.22	53.04	74.00	-20.96	peak

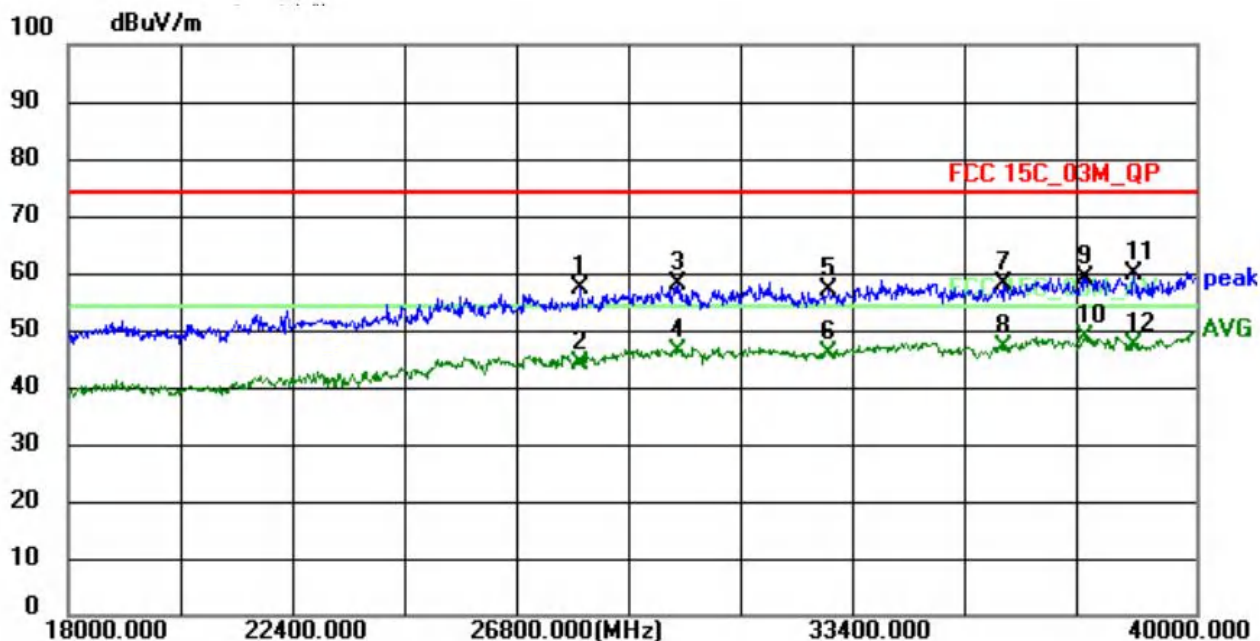


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27988.0000	49.76	7.60	57.36	74.00	-16.64	peak
2	27988.0000	36.47	7.60	44.07	54.00	-9.93	AVG
3	29902.0000	49.06	9.10	58.16	74.00	-15.84	peak
4	29902.0000	37.19	9.10	46.29	54.00	-7.71	AVG
5	32850.0000	47.71	9.23	56.94	74.00	-17.06	peak
6	32850.0000	36.49	9.23	45.72	54.00	-8.28	AVG
7	36260.0000	48.35	9.85	58.20	74.00	-15.80	peak
8	36260.0000	37.28	9.85	47.13	54.00	-6.87	AVG
9	37844.0000	49.18	9.89	59.07	74.00	-14.93	peak
10 *	37844.0000	38.77	9.89	48.66	54.00	-5.34	AVG
11	38790.0000	50.67	9.06	59.73	74.00	-14.27	peak
12	38790.0000	38.18	9.06	47.24	54.00	-6.76	AVG

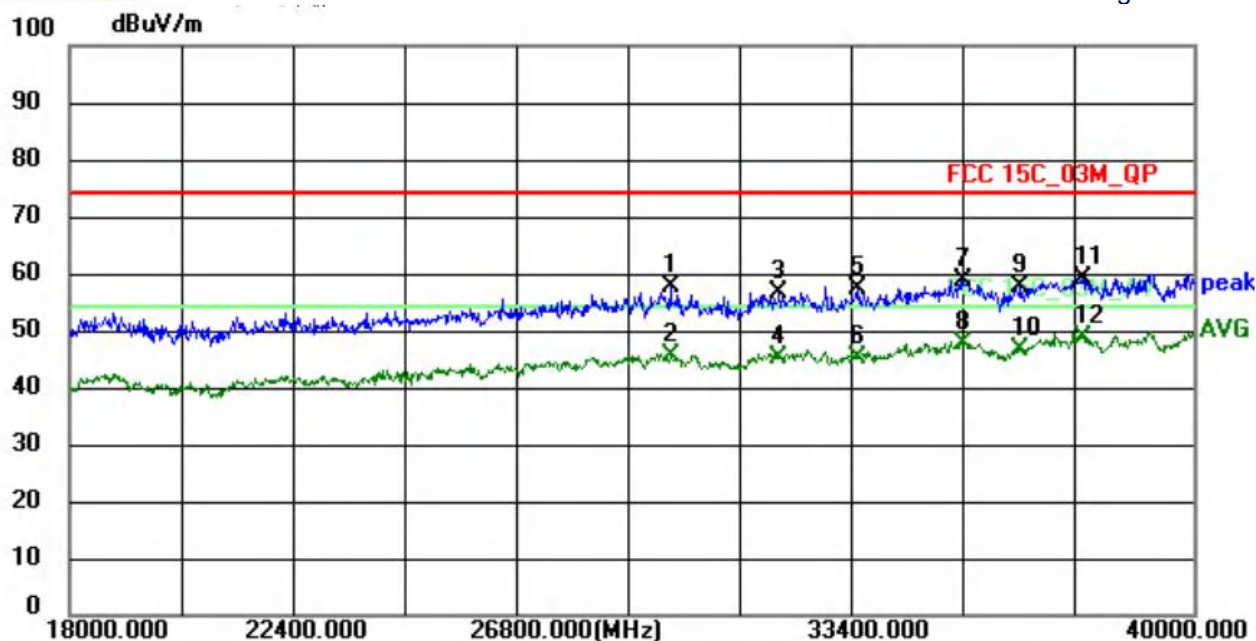


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	29770.0000	48.63	9.14	57.77	74.00	-16.23	peak
2	29770.0000	36.33	9.14	45.47	54.00	-8.53	AVG
3	31882.0000	47.28	9.40	56.68	74.00	-17.32	peak
4	31882.0000	35.87	9.40	45.27	54.00	-8.73	AVG
5	33444.0000	47.93	9.31	57.24	74.00	-16.76	peak
6	33444.0000	35.92	9.31	45.23	54.00	-8.77	AVG
7	35512.0000	48.37	10.27	58.64	74.00	-15.36	peak
8	35512.0000	37.27	10.27	47.54	54.00	-6.46	AVG
9	36612.0000	48.10	9.74	57.84	74.00	-16.16	peak
10	36612.0000	36.76	9.74	46.50	54.00	-7.50	AVG
11	37822.0000	49.33	9.89	59.22	74.00	-14.78	peak
12 *	37822.0000	38.90	9.89	48.79	54.00	-5.21	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11a-5825

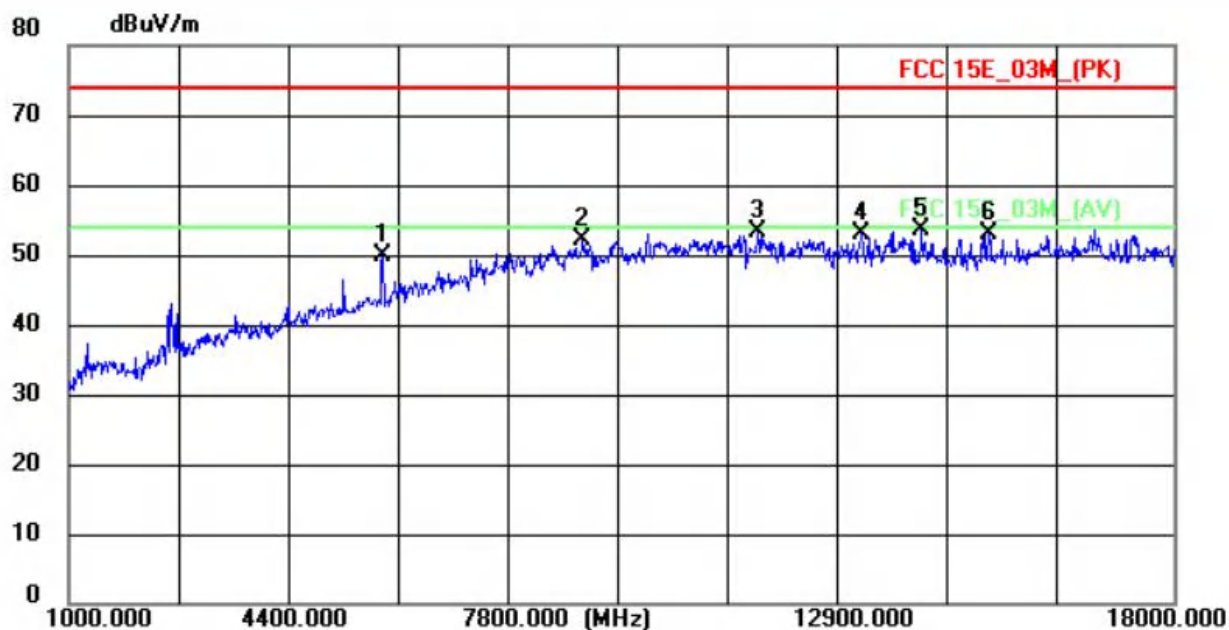


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5828.0000	54.64	-4.68	49.96	74.00	-24.04	peak
2	8905.0000	50.78	1.50	52.28	74.00	-21.72	peak
3	11608.0000	49.31	4.03	53.34	74.00	-20.66	peak
4	13206.0000	46.79	6.23	53.02	74.00	-20.98	peak
5 *	14124.0000	45.89	7.58	53.47	74.00	-20.53	peak
6	15161.0000	44.13	9.01	53.14	74.00	-20.86	peak

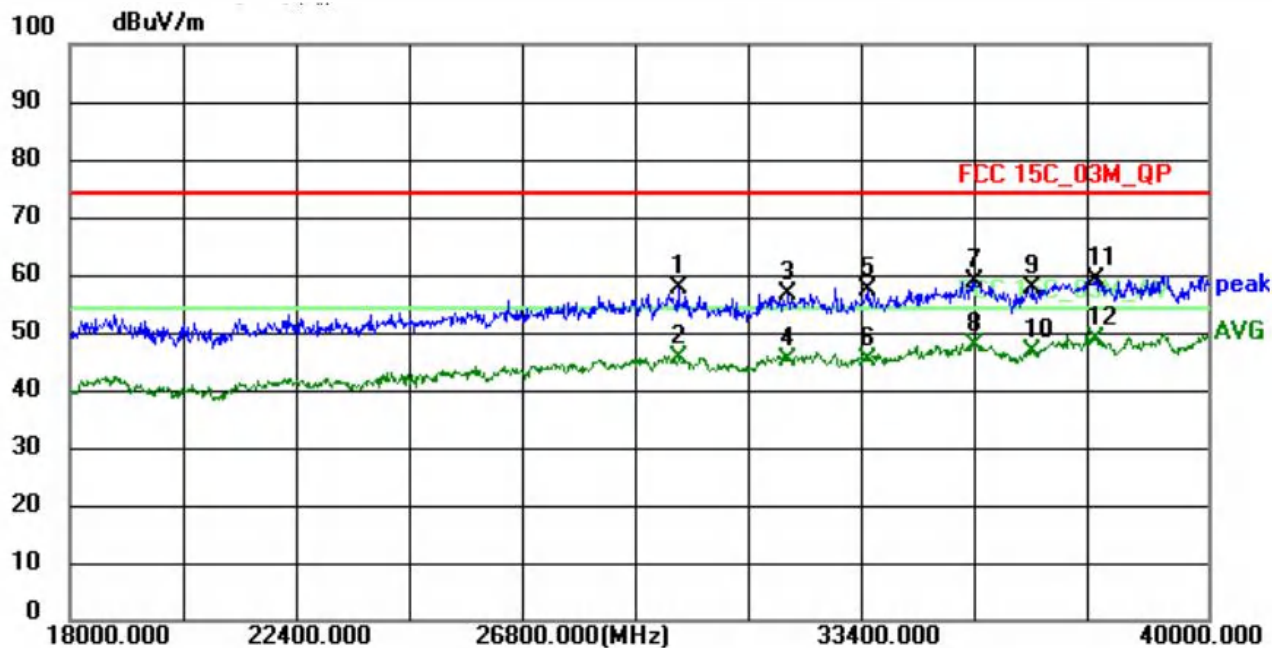


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	29770.0000	48.63	9.14	57.77	74.00	-16.23	peak
2	29770.0000	36.33	9.14	45.47	54.00	-8.53	AVG
3	31882.0000	47.28	9.40	56.68	74.00	-17.32	peak
4	31882.0000	35.87	9.40	45.27	54.00	-8.73	AVG
5	33444.0000	47.93	9.31	57.24	74.00	-16.76	peak
6	33444.0000	35.92	9.31	45.23	54.00	-8.77	AVG
7	35512.0000	48.37	10.27	58.64	74.00	-15.36	peak
8	35512.0000	37.27	10.27	47.54	54.00	-6.46	AVG
9	36612.0000	48.10	9.74	57.84	74.00	-16.16	peak
10	36612.0000	36.76	9.74	46.50	54.00	-7.50	AVG
11	37822.0000	49.33	9.89	59.22	74.00	-14.78	peak
12 *	37822.0000	38.90	9.89	48.79	54.00	-5.21	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11n20-5745

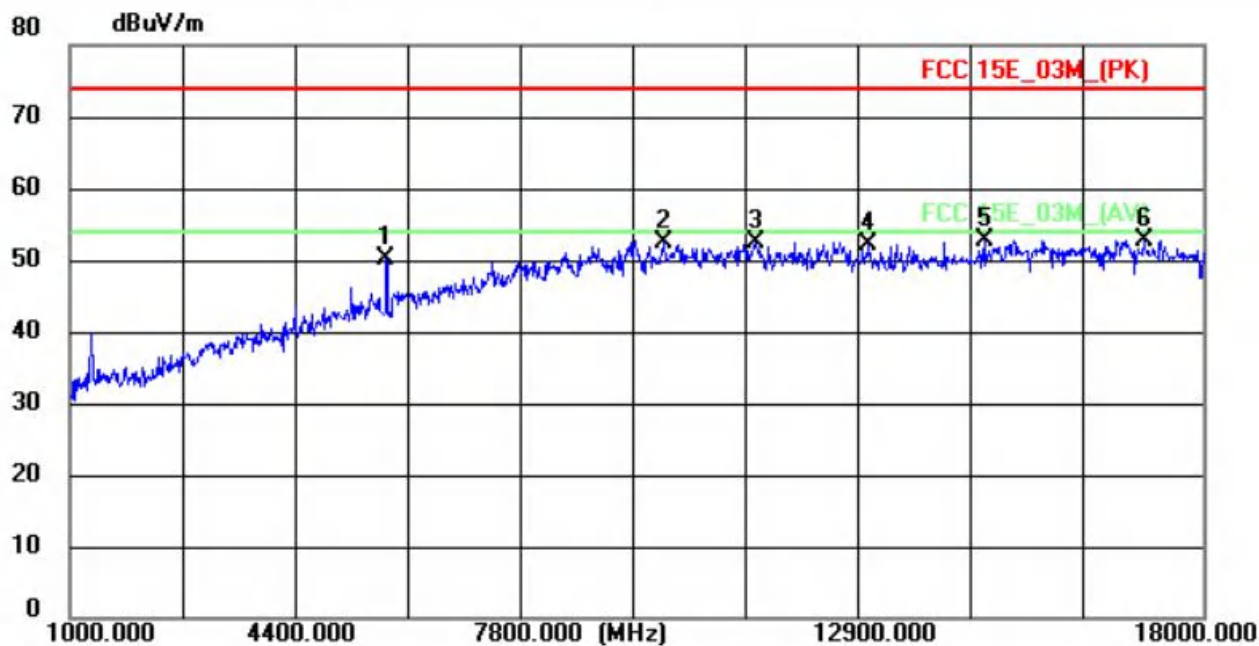


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5743.0000	55.23	-5.00	50.23	74.00	-23.77	peak
2	9908.0000	50.29	2.14	52.43	74.00	-21.57	peak
3	11285.0000	48.91	3.66	52.57	74.00	-21.43	peak
4	12985.0000	46.20	5.90	52.10	74.00	-21.90	peak
5 *	14719.0000	44.41	8.44	52.85	74.00	-21.15	peak
6	17116.0000	41.84	11.01	52.85	74.00	-21.15	peak

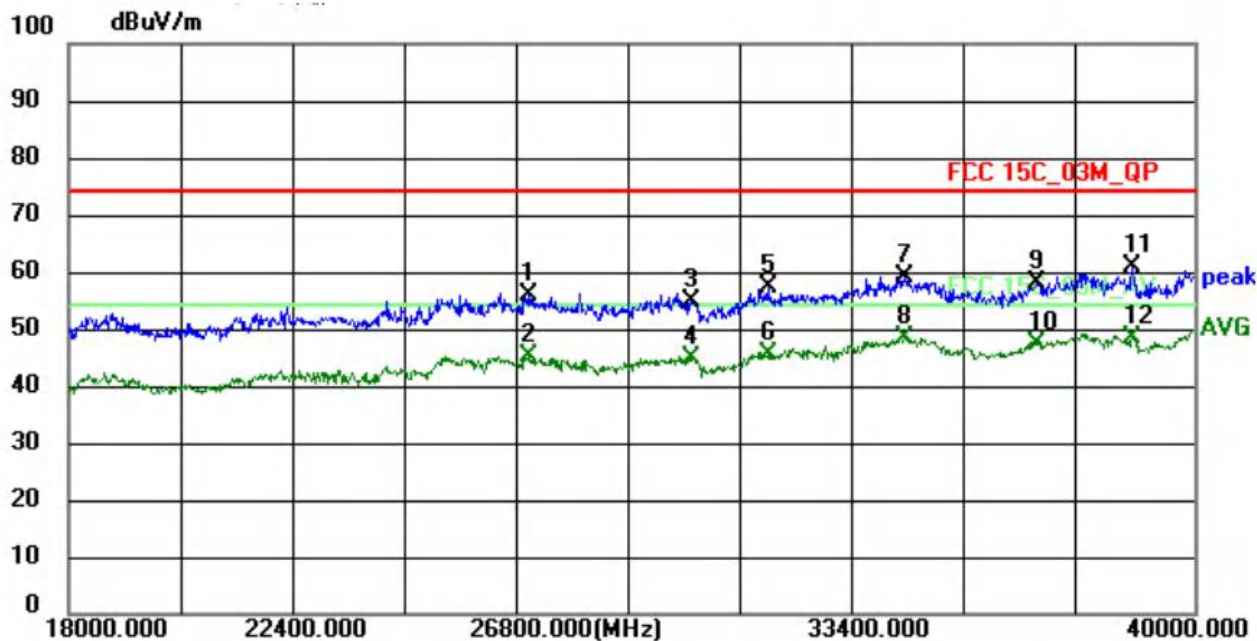


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	26976.0000	48.96	6.84	55.80	74.00	-18.20	peak
2	26976.0000	38.29	6.84	45.13	54.00	-8.87	AVG
3	30188.0000	45.96	9.03	54.99	74.00	-19.01	peak
4	30188.0000	35.78	9.03	44.81	54.00	-9.19	AVG
5	31662.0000	47.93	9.35	57.28	74.00	-16.72	peak
6	31662.0000	36.34	9.35	45.69	54.00	-8.31	AVG
7	34324.0000	49.43	9.73	59.16	74.00	-14.84	peak
8 *	34324.0000	38.82	9.73	48.55	54.00	-5.45	AVG
9	36942.0000	48.12	9.74	57.86	74.00	-16.14	peak
10	36942.0000	37.69	9.74	47.43	54.00	-6.57	AVG
11	38790.0000	51.67	9.06	60.73	74.00	-13.27	peak
12	38790.0000	39.18	9.06	48.24	54.00	-5.76	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11n20-5745

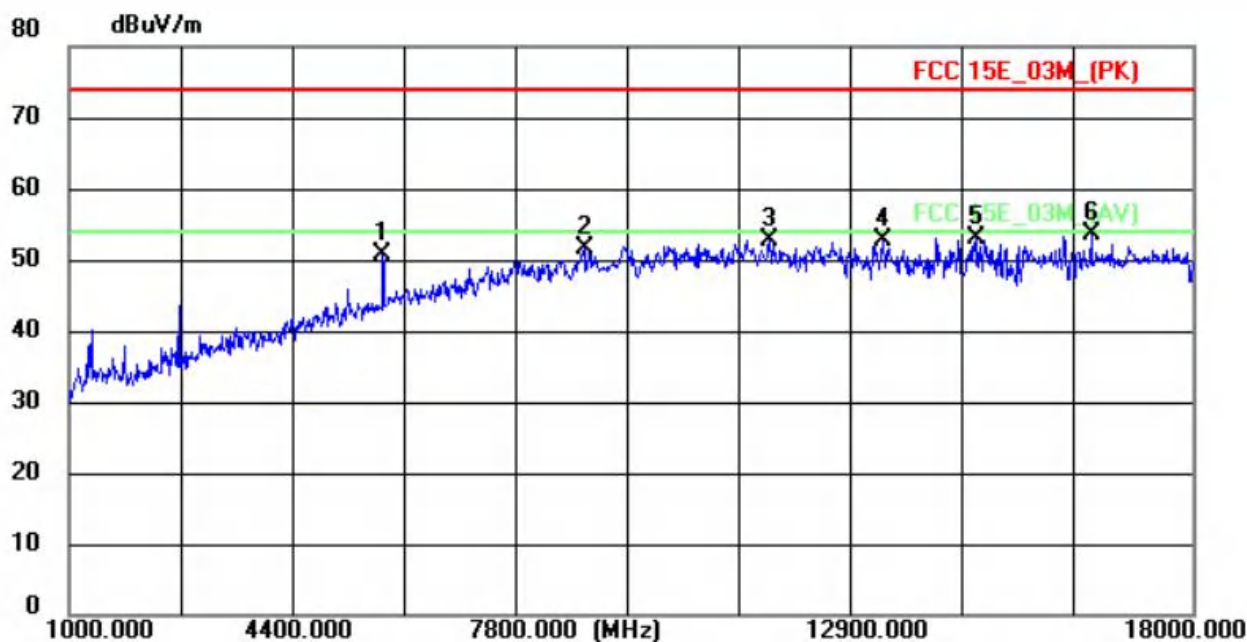


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5743.0000	55.63	-5.00	50.63	74.00	-23.37	peak
2	8803.0000	50.28	1.37	51.65	74.00	-22.35	peak
3	11608.0000	48.71	4.03	52.74	74.00	-21.26	peak
4	13325.0000	46.29	6.41	52.70	74.00	-21.30	peak
5	14719.0000	44.70	8.44	53.14	74.00	-20.86	peak
6 *	16470.0000	43.29	10.35	53.64	74.00	-20.36	peak

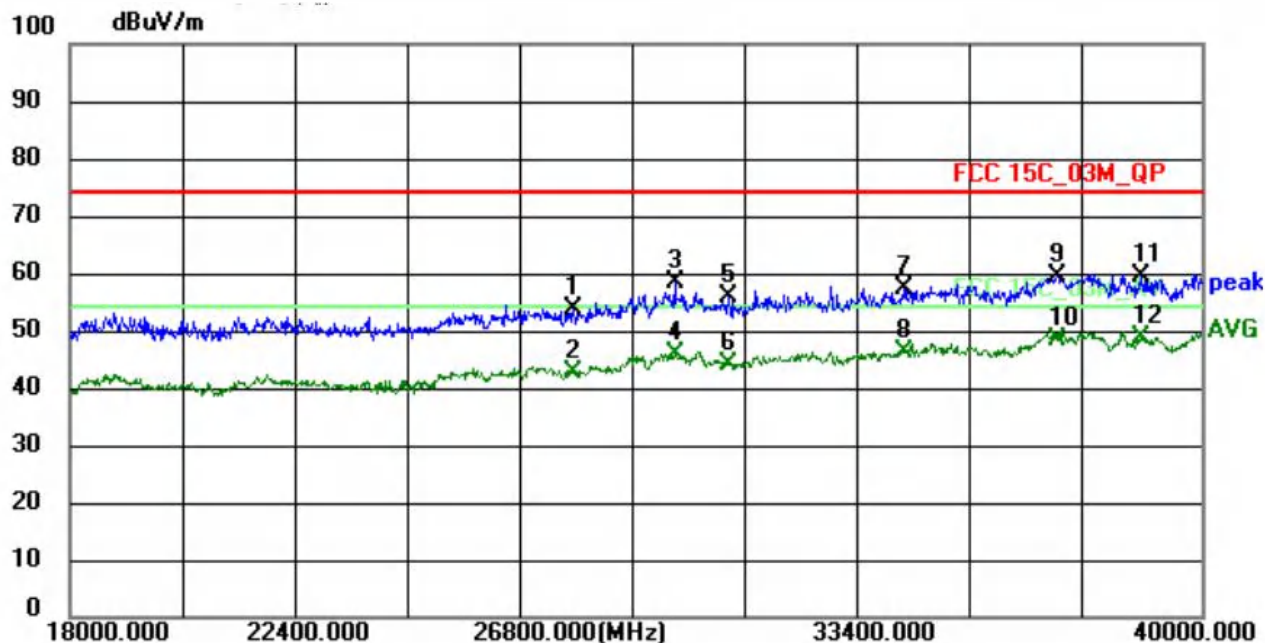


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	27790.0000	46.44	7.41	53.85	74.00	-20.15	peak
2	27790.0000	35.27	7.41	42.68	54.00	-11.32	AVG
3	29770.0000	49.13	9.14	58.27	74.00	-15.73	peak
4	29770.0000	36.83	9.14	45.97	54.00	-8.03	AVG
5	30826.0000	46.78	9.02	55.80	74.00	-18.20	peak
6	30826.0000	35.00	9.02	44.02	54.00	-9.98	AVG
7	34214.0000	47.69	9.67	57.36	74.00	-16.64	peak
8	34214.0000	36.55	9.67	46.22	54.00	-7.78	AVG
9	37184.0000	49.61	9.76	59.37	74.00	-14.63	peak
10	37184.0000	38.52	9.76	48.28	54.00	-5.72	AVG
11	38812.0000	50.56	9.06	59.62	74.00	-14.38	peak
12 *	38812.0000	39.54	9.06	48.60	54.00	-5.40	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test mode:	802.11n20-5785

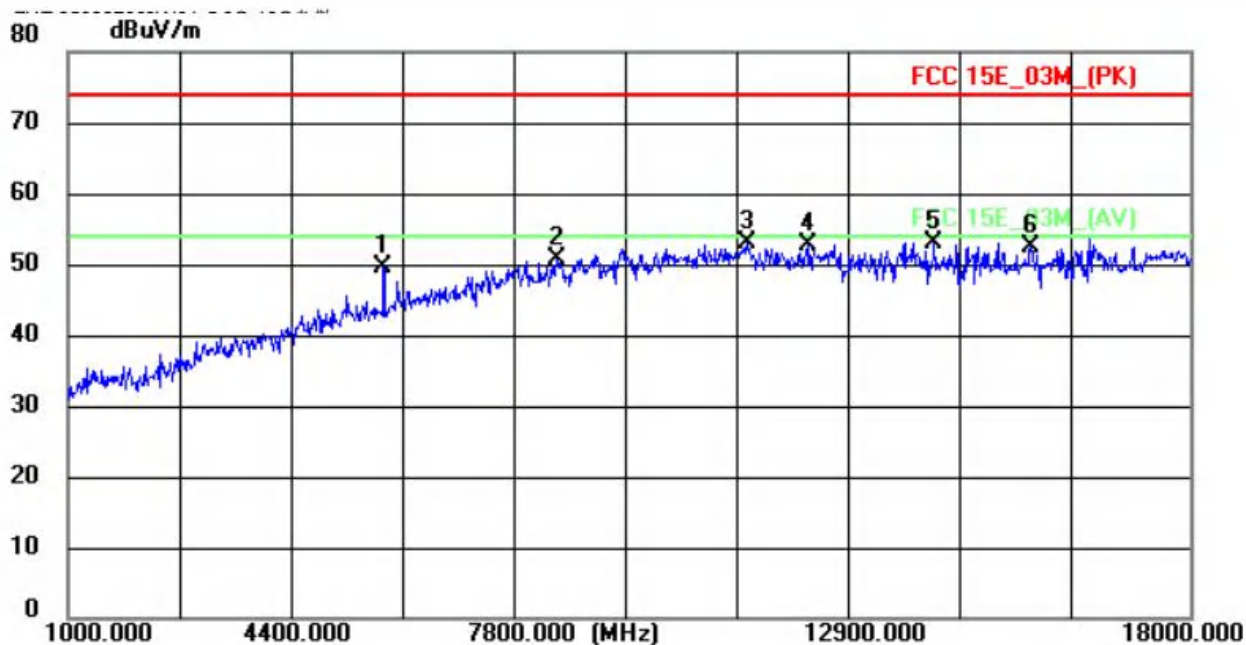


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5777.0000	54.57	-4.87	49.70	74.00	-24.30	peak
2	8412.0000	49.89	0.87	50.76	74.00	-23.24	peak
3	11285.0000	49.20	3.66	52.86	74.00	-21.14	peak
4	12220.0000	47.97	4.80	52.77	74.00	-21.23	peak
5 *	14124.0000	45.52	7.58	53.10	74.00	-20.90	peak
6	15586.0000	43.01	9.45	52.46	74.00	-21.54	peak

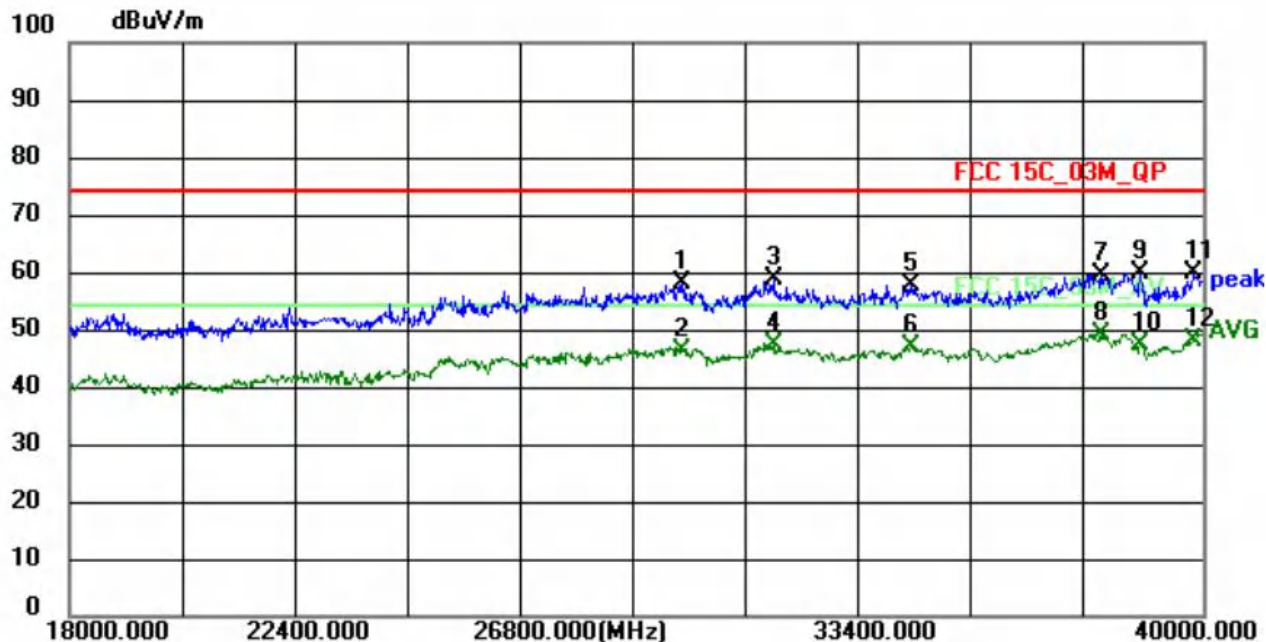


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	29902.0000	49.06	9.10	58.16	74.00	-15.84	peak
2	29902.0000	37.19	9.10	46.29	54.00	-7.71	AVG
3	31662.0000	49.43	9.35	58.78	74.00	-15.22	peak
4	31662.0000	37.84	9.35	47.19	54.00	-6.81	AVG
5	34324.0000	47.93	9.73	57.66	74.00	-16.34	peak
6	34324.0000	37.32	9.73	47.05	54.00	-6.95	AVG
7	38020.0000	49.75	9.88	59.63	74.00	-14.37	peak
8 *	38020.0000	39.17	9.88	49.05	54.00	-4.95	AVG
9	38790.0000	50.67	9.06	59.73	74.00	-14.27	peak
10	38790.0000	38.18	9.06	47.24	54.00	-6.76	AVG
11	39802.0000	49.90	9.92	59.82	74.00	-14.18	peak
12	39802.0000	37.94	9.92	47.86	54.00	-6.14	AVG

Temperature:	25.2℃	Relative Humidity:	50%
Pressure:	1010kPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test mode:	802.11n20-5785

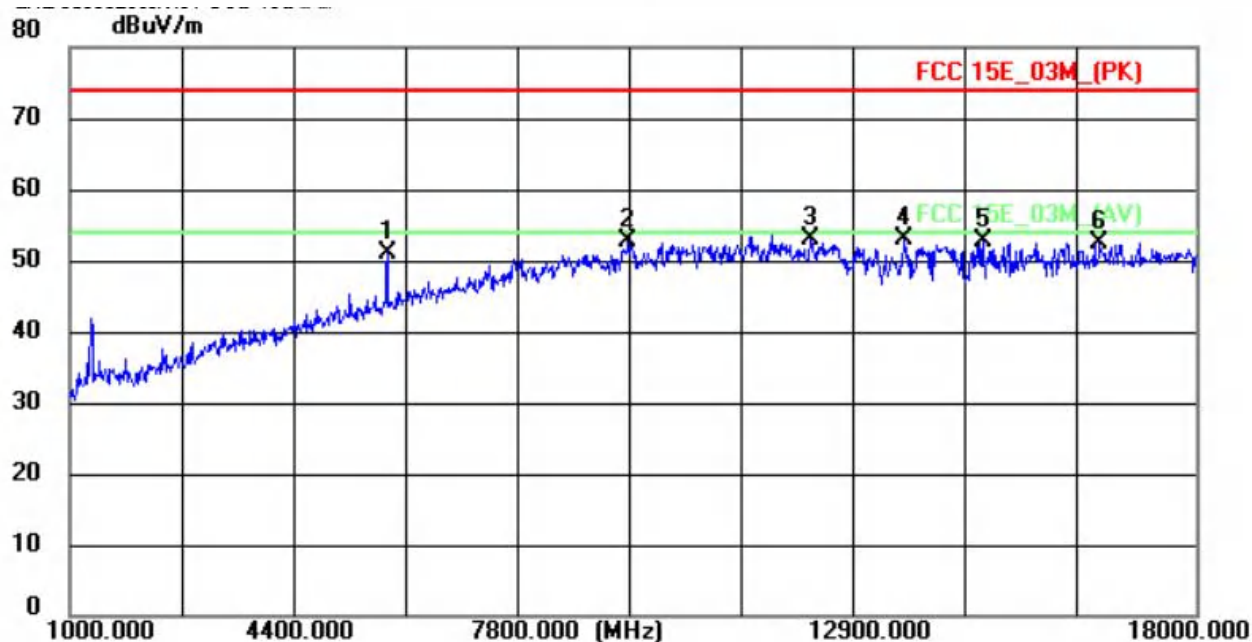

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5794.0000	55.84	-4.81	51.03	74.00	-22.97	peak
2	9432.0000	50.96	1.87	52.83	74.00	-21.17	peak
3	12186.0000	48.13	4.74	52.87	74.00	-21.13	peak
4 *	13597.0000	46.13	6.80	52.93	74.00	-21.07	peak
5	14787.0000	44.10	8.54	52.64	74.00	-21.36	peak
6	16555.0000	41.91	10.44	52.35	74.00	-21.65	peak

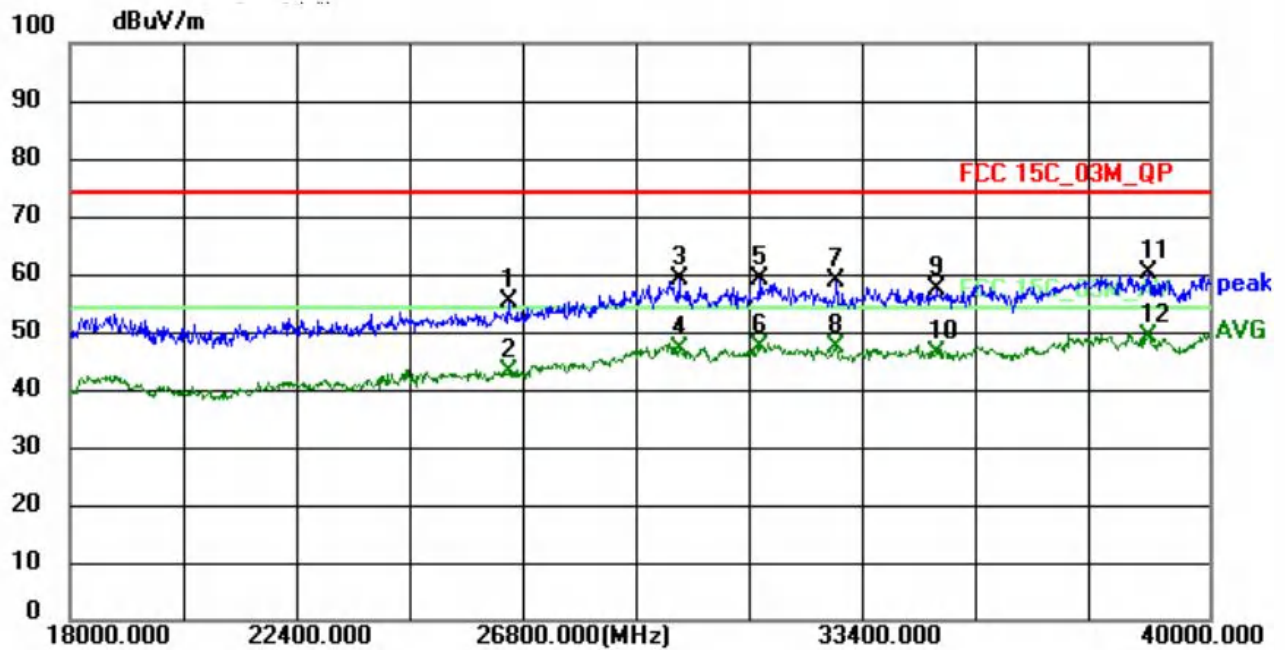

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	26470.0000	48.86	6.28	55.14	74.00	-18.86	peak
2	26470.0000	36.66	6.28	42.94	54.00	-11.06	AVG
3	29770.0000	50.13	9.14	59.27	74.00	-14.73	peak
4	29770.0000	37.83	9.14	46.97	54.00	-7.03	AVG
5	31332.0000	49.82	9.23	59.05	74.00	-14.95	peak
6	31332.0000	37.92	9.23	47.15	54.00	-6.85	AVG
7	32806.0000	49.38	9.25	58.63	74.00	-15.37	peak
8	32806.0000	38.08	9.25	47.33	54.00	-6.67	AVG
9	34720.0000	47.20	9.95	57.15	74.00	-16.85	peak
10	34720.0000	36.34	9.95	46.29	54.00	-7.71	AVG
11	38812.0000	51.06	9.06	60.12	74.00	-13.88	peak
12 *	38812.0000	40.04	9.06	49.10	54.00	-4.90	AVG