


EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

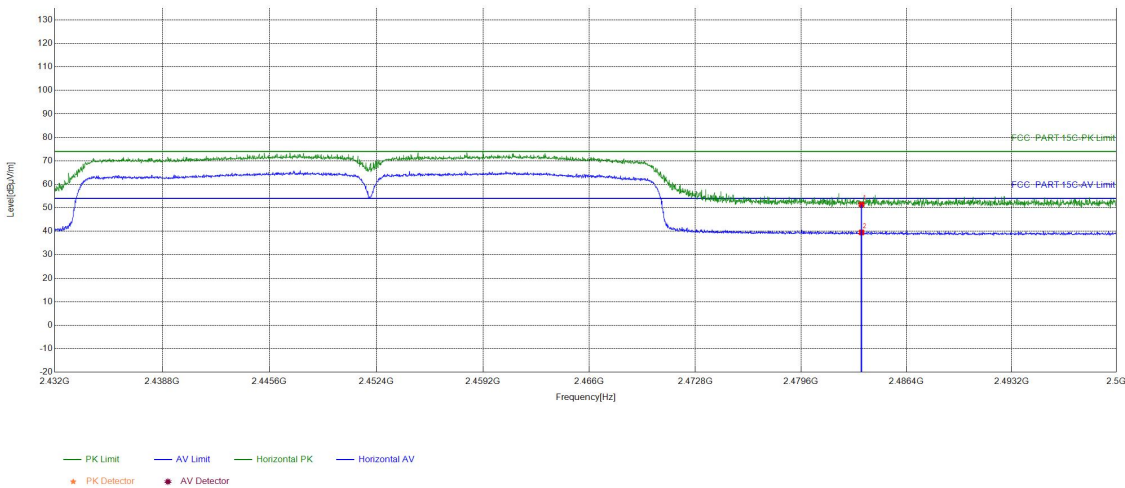

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.09	51.38	74.00	22.62	PASS	Horizontal	PK
2	2483.5	16.29	23.22	39.51	54.00	14.49	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

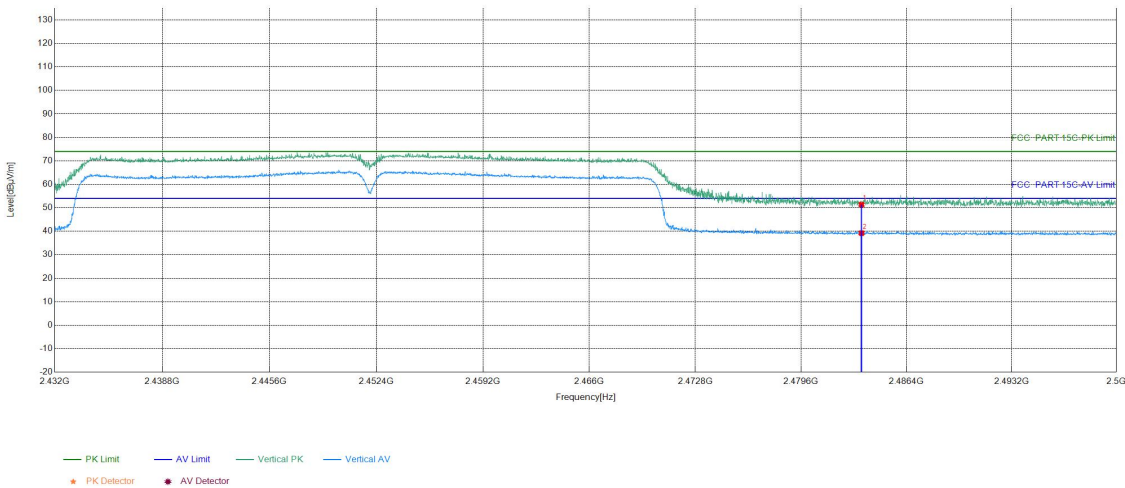

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.05	51.34	74.00	22.66	PASS	Vertical	PK
2	2483.5	16.29	22.91	39.20	54.00	14.80	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

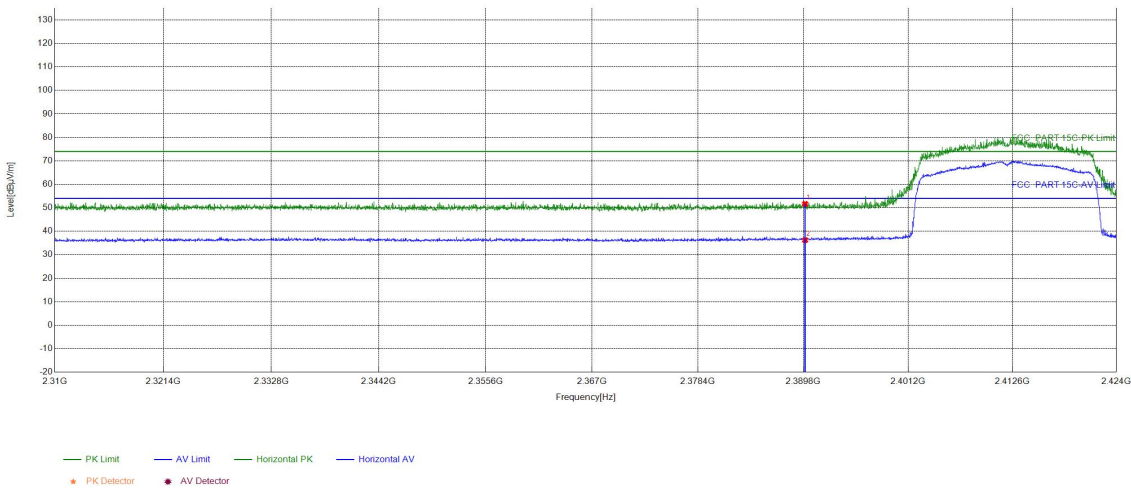

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.71	51.67	74.00	22.33	PASS	Horizontal	PK
2	2390	15.96	20.26	36.22	54.00	17.78	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

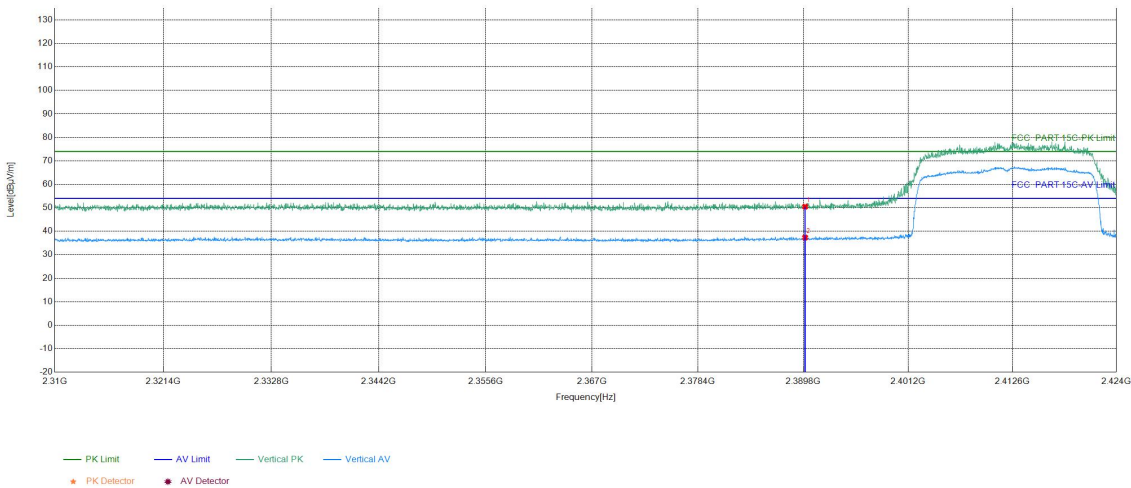

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.52	50.48	74.00	23.52	PASS	Vertical	PK
2	2390	15.96	21.37	37.33	54.00	16.67	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

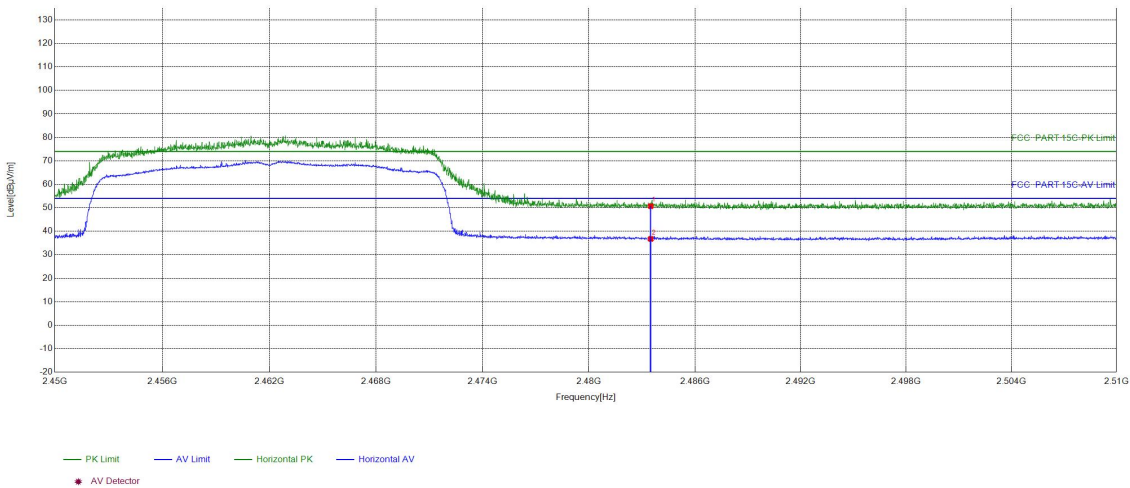

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.38	50.67	74.00	23.33	PASS	Horizontal	PK
2	2483.5	16.29	20.47	36.76	54.00	17.24	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

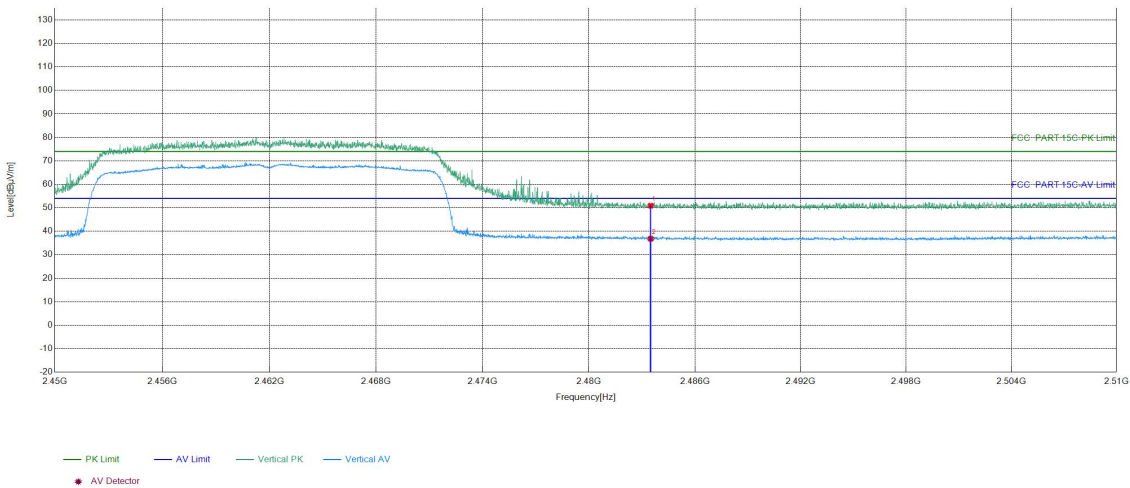

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.61	50.90	74.00	23.10	PASS	Vertical	PK
2	2483.5	16.29	20.54	36.83	54.00	17.17	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

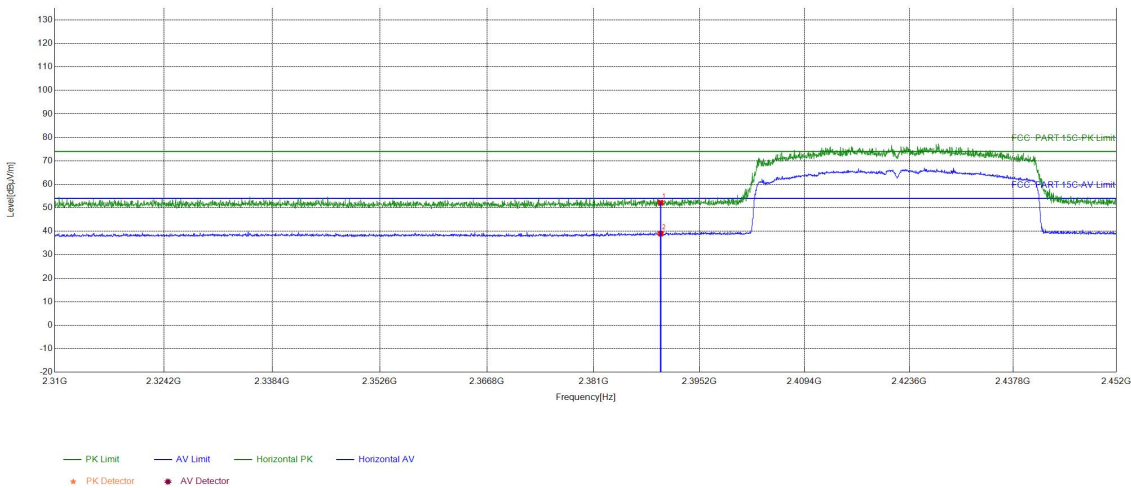

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.21	52.17	74.00	21.83	PASS	Horizontal	PK
2	2390	15.96	23.05	39.01	54.00	14.99	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

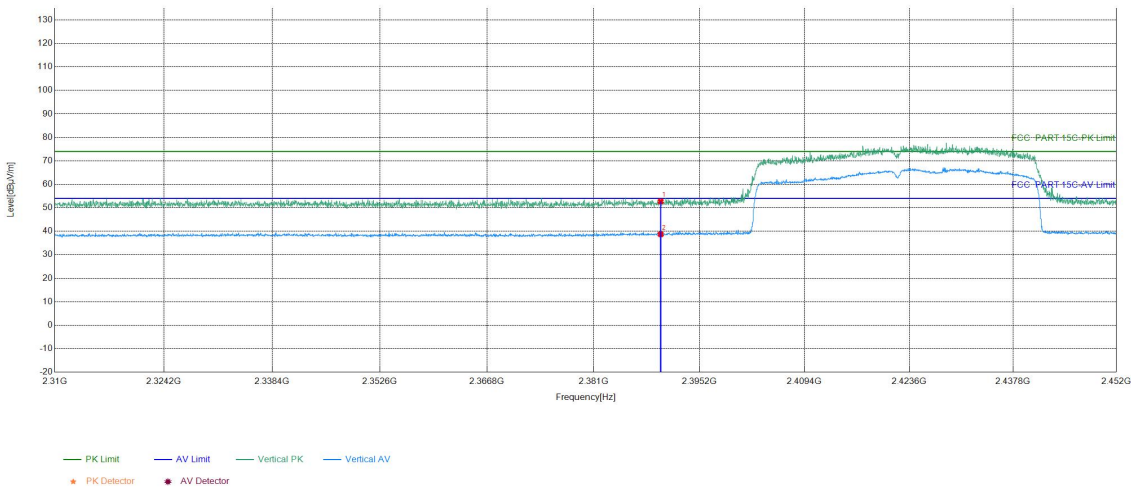

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.76	52.72	74.00	21.28	PASS	Vertical	PK
2	2390	15.96	22.75	38.71	54.00	15.29	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			


Test Graph

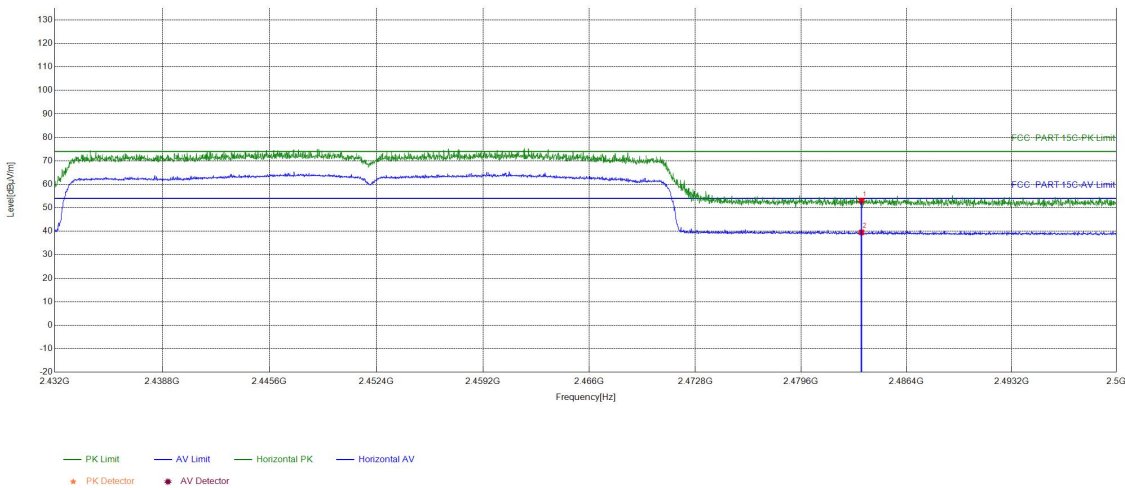

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.76	53.05	74.00	20.95	PASS	Horizontal	PK
2	2483.5	16.29	23.24	39.53	54.00	14.47	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/05
Remark			

Test Graph

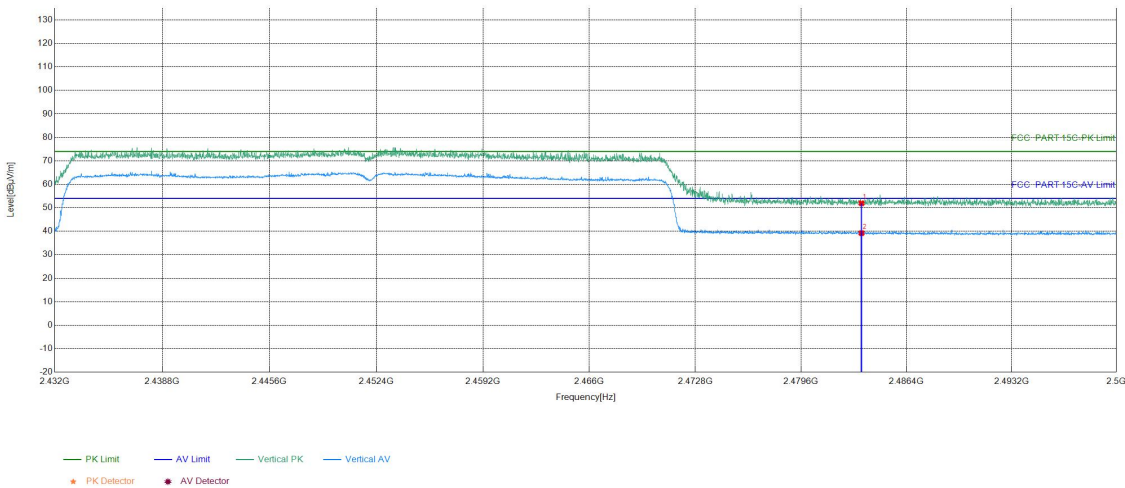

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.64	51.93	74.00	22.07	PASS	Vertical	PK
2	2483.5	16.29	22.92	39.21	54.00	14.79	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32R80609501

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***