

# EMC TEST REPORT

**FCC ID: 2BOMX-CR01**

**Report No.** : SSP25040016-1E

**Applicant** : Shenzhen Fuhongyuan Technology Co., Ltd

**Product Name** : Clock Radio

**Model Name** : CR-01

**Test Standard** : FCC Part 15 Subpart B

**Date of Issue** : 2025-04-09



**Shenzhen CCUT Quality Technology Co., Ltd.**

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China; (Tel.:+86-755-23406590 website: [www.ccuttest.com](http://www.ccuttest.com))

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

**Test Report Basic Information**

**Applicant**.....: Shenzhen Fuhongyuan Technology Co., Ltd  
Room A404, Shilongzai Rencaigongyu, Shiyan Street, Bao'an District,  
Address of Applicant.....: Shenzhen, China

**Manufacturer**.....: Shenzhen Fuhongyuan Technology Co., Ltd  
Room A404, Shilongzai Rencaigongyu, Shiyan Street, Bao'an District,  
Address of Manufacturer.....: Shenzhen, China

**Product Name**.....: Clock Radio  
**Brand Name**.....: RunningByte  
**Main Model**.....: CR-01  
**Series Models**.....: CR-01BLA, CR-01RED, CR-01WHI, CR-01GRE, CR-01RGB

FCC Part 15 Subpart B  
**Test Standard**.....: ANSI C63.4-2014  
**Date of Test** .....: 2025-04-01 to 2025-04-03  
**Test Result**.....: PASS

**Tested By** .....: Tate Chen (Tate Chen)  
**Reviewed By**.....: Lieber Ouyang (Lieber Ouyang)  
**Authorized Signatory**.....: Lahm Peng (Lahm Peng)



Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.

## CONTENTS

<b>1. General Information.....</b>	<b>5</b>
1.1 Product Information .....	5
1.2 Test Setup Information.....	5
1.3 Compliance Standards.....	6
1.4 Test Facilities.....	6
1.5 Measurement Uncertainty .....	6
1.6 List of Test and Measurement Instruments .....	7
<b>2. Summary of Test Results.....</b>	<b>8</b>
<b>3. Conducted Emissions .....</b>	<b>9</b>
3.1 Standard and Limit.....	9
3.2 Test Procedure.....	9
3.3 Test Data and Results .....	9
<b>4. Radiated Disturbance.....</b>	<b>16</b>
4.1 Standard and Limit.....	16
4.2 Test Procedure.....	16
4.3 Test Data and Results .....	16

### Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-04-09	Initial Release	Lahm Peng

## 1. General Information

---

### 1.1 Product Information

Product Name:	Clock Radio
Trade Name:	RunningByte
Main Model:	CR-01
Series Models:	CR-01BLA, CR-01RED, CR-01WHI, CR-01GRE, CR-01RGB
Class of Equipment:	<input type="checkbox"/> Class A <input checked="" type="checkbox"/> Class B
Highest Internal Frequency:	<108MHz
Rated Voltage:	Input: AC 120V/60Hz or DC 4.5V by AA*3 battery
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	

### 1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Alarm clock	AC 120V/60Hz	
TM2	FM reception	AC 120V/60Hz	
TM3	AUX output	AC 120V/60Hz	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Wired headset	Huawei	AM115	6901443288229
-	-	-	-
The equipment under test (EUT) was configured to measure its highest possible emission and immunity level. The test modes were adapted according to the operation manual for use.			

### 1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart B	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Unintentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart B	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Unintentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

### 1.4 Test Facilities

Laboratory Name:	<b>Shenzhen CCUT Quality Technology Co., Ltd.</b> 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No.:	583813
FCC Designation No.:	CN1373
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

### 1.5 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Disturbance	9kHz ~30MHz	±1.64 dB
Radiated Disturbance	30MHz ~ 1GHz	±3.32 dB
Radiated Disturbance	1GHz ~ 18GHz	±3.50 dB

## 1.6 List of Test and Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
<b>Conducted Emissions</b>					
AMN	ROHDE&SCHWARZ	ENV216	101097	2024-08-07	2025-08-06
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2024-08-07	2025-08-06
Test Cable	N/A	Cable 5	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
<b>Radiated Emissions</b>					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2024-08-07	2025-08-06
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40-N	101692	2024-08-07	2025-08-06
Amplifier	SCHWARZBECK	BBV 9743B	00251	2024-08-07	2025-08-06
Amplifier	HUABO	YXL0518-2.5-45	--	2024-08-07	2025-08-06
Amplifier	COM-MW	DLAN-18G-4G-02	10229104	2024-08-07	2025-08-06
Loop Antenna	DAZE	ZN30900C	21104	2024-08-03	2025-08-02
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2024-08-03	2025-08-02
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2024-08-03	2025-08-02
Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2024-08-03	2025-08-02
Attenuator	QUANJUDA	6dB	220731	2024-08-07	2025-08-06
Test Cable	N/A	Cable 1	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 2	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 3	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 4	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 8	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 9	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A

## 2. Summary of Test Results

---

FCC Rule	Description of Test Item	Result
FCC Part 15.107	Conducted Emissions	Passed
FCC Part 15.109	Radiated Emissions	Passed

Passed: The EUT complies with the essential requirements in the standard  
Failed: The EUT does not comply with the essential requirements in the standard  
N/A: Not applicable

## 3. Conducted Emissions

### 3.1 Standard and Limit


According to the rule FCC Part 15.107, Conducted limit, the limit for a class A and class B device as below:

Frequency of Emission (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	79	66	66 to 56	56 to 46
0.5-5	73	60	56	46
5-30	73	60	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz  
 Note 2: The lower limit applies at the band edges

### 3.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

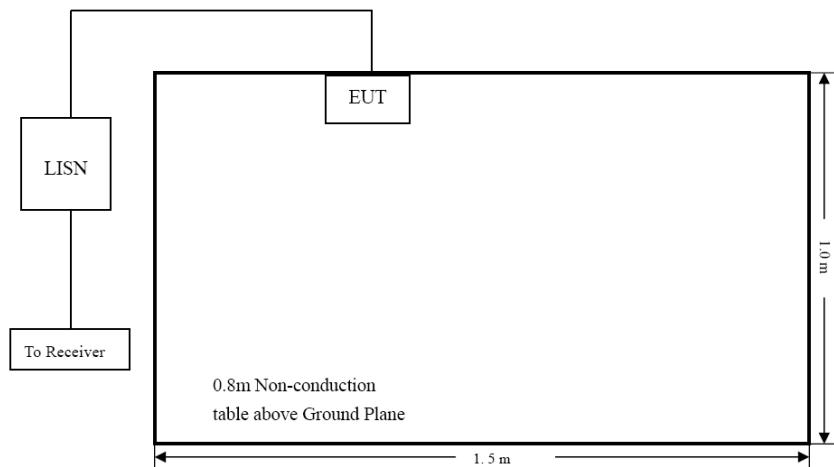


Test Setup Block Diagram

### 3.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.107 standard limit for a Class B device, and with the worst case as below:


Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions	
Tested Model:	CR-01
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

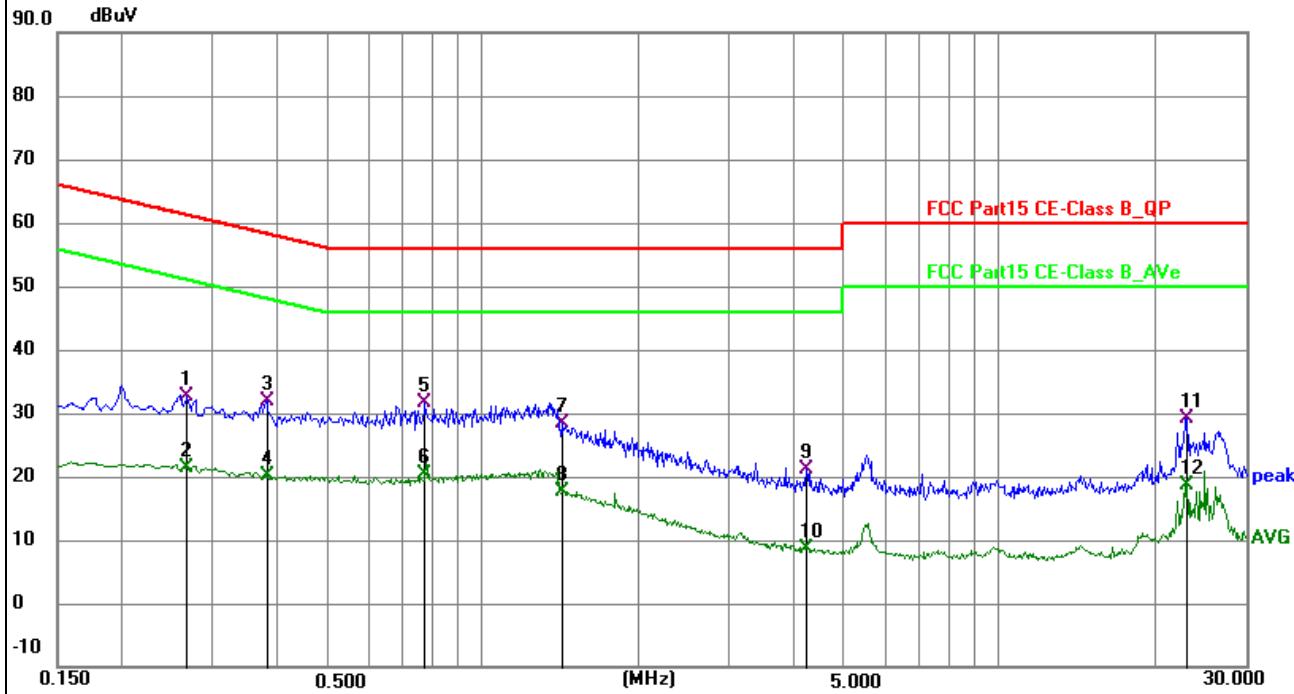


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2670	23.29	9.33	32.62	61.21	-28.59	QP	P	
2	0.2670	11.98	9.33	21.31	51.21	-29.90	AVG	P	
3	0.3795	22.58	9.38	31.96	58.29	-26.33	QP	P	
4	0.3795	10.75	9.38	20.13	48.29	-28.16	AVG	P	
5 *	0.7710	22.24	9.40	31.64	56.00	-24.36	QP	P	
6	0.7710	11.09	9.40	20.49	46.00	-25.51	AVG	P	
7	1.4235	18.82	9.44	28.26	56.00	-27.74	QP	P	
8	1.4235	8.14	9.44	17.58	46.00	-28.42	AVG	P	
9	4.2360	11.59	9.54	21.13	56.00	-34.87	QP	P	
10	4.2360	-0.83	9.54	8.71	46.00	-37.29	AVG	P	
11	23.0595	19.21	10.03	29.24	60.00	-30.76	QP	P	
12	23.0595	8.49	10.03	18.52	50.00	-31.48	AVG	P	

Test Plots and Data of Conducted Emissions	
Tested Model:	CR-01
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

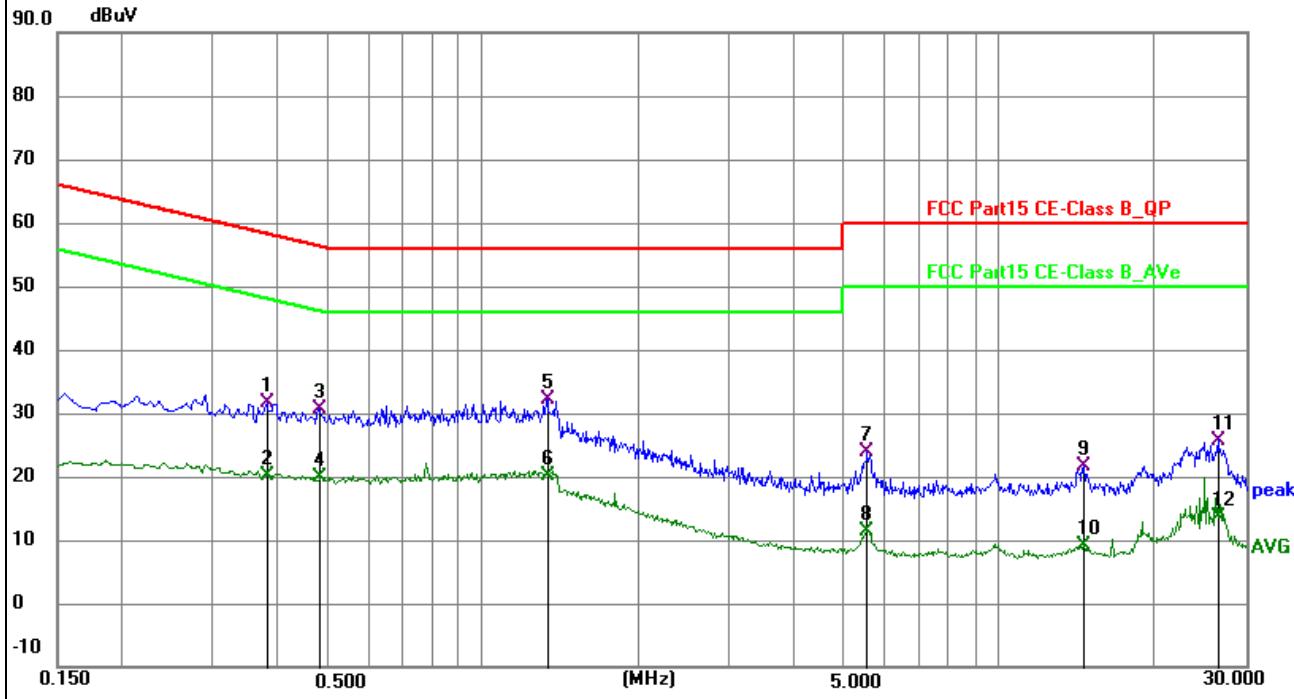


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3795	22.03	9.57	31.60	58.29	-26.69	QP	P	
2	0.3795	10.57	9.57	20.14	48.29	-28.15	AVG	P	
3	0.4830	21.08	9.58	30.66	56.29	-25.63	QP	P	
4	0.4830	10.35	9.58	19.93	46.29	-26.36	AVG	P	
5 *	1.3334	22.46	9.63	32.09	56.00	-23.91	QP	P	
6	1.3334	10.50	9.63	20.13	46.00	-25.87	AVG	P	
7	5.5453	14.07	9.76	23.83	60.00	-36.17	QP	P	
8	5.5453	1.67	9.76	11.43	50.00	-38.57	AVG	P	
9	14.5815	11.85	9.72	21.57	60.00	-38.43	QP	P	
10	14.5815	-0.58	9.72	9.14	50.00	-40.86	AVG	P	
11	26.4660	15.52	10.23	25.75	60.00	-34.25	QP	P	
12	26.4660	3.46	10.23	13.69	50.00	-36.31	AVG	P	

Test Plots and Data of Conducted Emissions	
Tested Model:	CR-01
Tested Mode:	TM2
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

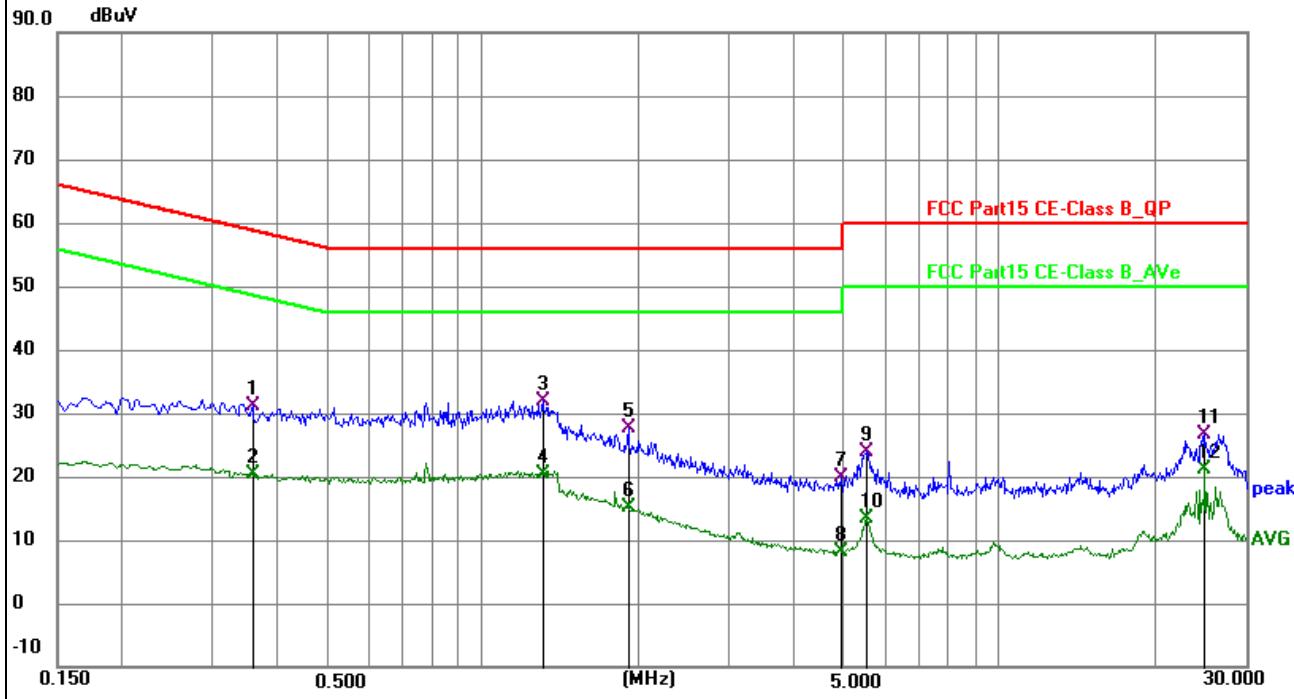


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3570	21.66	9.39	31.05	58.80	-27.75	QP	P	
2	0.3570	11.06	9.39	20.45	48.80	-28.35	AVG	P	
3 *	1.3065	22.45	9.44	31.89	56.00	-24.11	QP	P	
4	1.3065	11.05	9.44	20.49	46.00	-25.51	AVG	P	
5	1.9095	18.26	9.46	27.72	56.00	-28.28	QP	P	
6	1.9095	5.64	9.46	15.10	46.00	-30.90	AVG	P	
7	4.9380	10.32	9.57	19.89	56.00	-36.11	QP	P	
8	4.9380	-1.39	9.57	8.18	46.00	-37.82	AVG	P	
9	5.5230	14.21	9.57	23.78	60.00	-36.22	QP	P	
10	5.5230	3.71	9.57	13.28	50.00	-36.72	AVG	P	
11	24.9495	16.70	10.05	26.75	60.00	-33.25	QP	P	
12	24.9495	11.19	10.05	21.24	50.00	-28.76	AVG	P	

Test Plots and Data of Conducted Emissions	
Tested Model:	CR-01
Tested Mode:	TM2
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

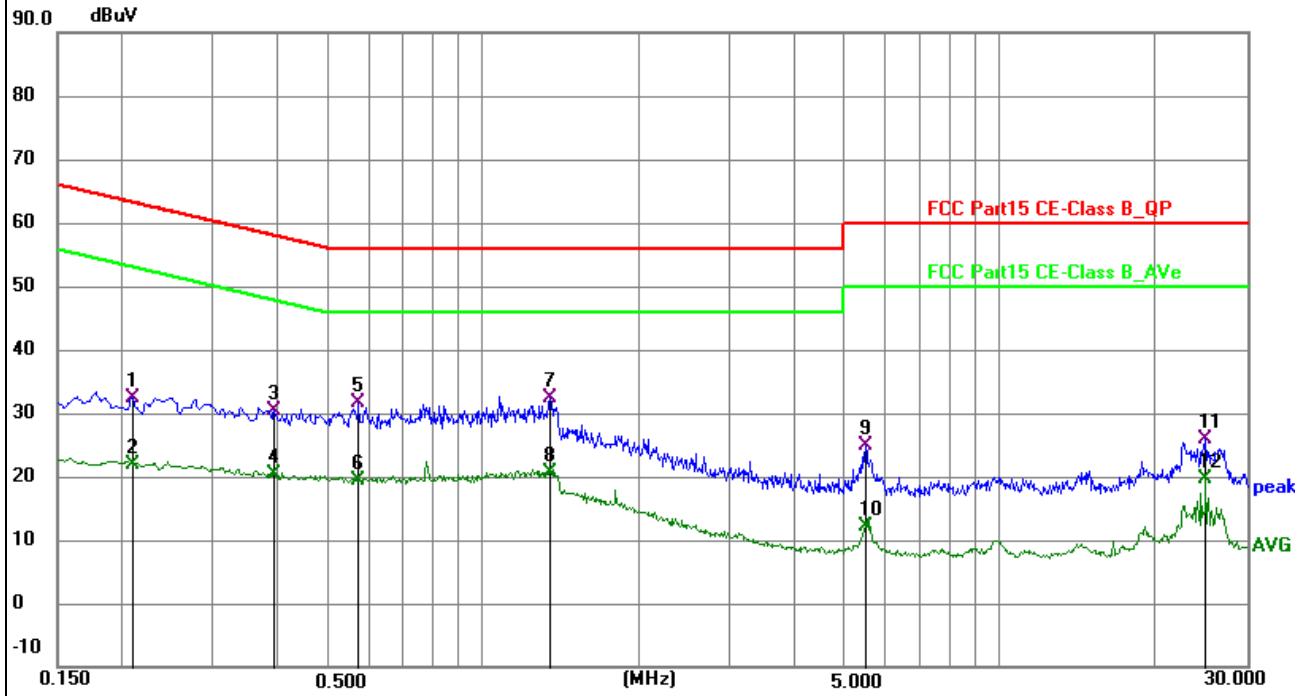


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2085	23.03	9.41	32.44	63.26	-30.82	QP	P	
2	0.2085	12.59	9.41	22.00	53.26	-31.26	AVG	P	
3	0.3930	20.89	9.57	30.46	58.00	-27.54	QP	P	
4	0.3930	10.82	9.57	20.39	48.00	-27.61	AVG	P	
5	0.5730	22.02	9.57	31.59	56.00	-24.41	QP	P	
6	0.5730	9.81	9.57	19.38	46.00	-26.62	AVG	P	
7 *	1.3515	22.76	9.63	32.39	56.00	-23.61	QP	P	
8	1.3515	11.05	9.63	20.68	46.00	-25.32	AVG	P	
9	5.5050	15.22	9.76	24.98	60.00	-35.02	QP	P	
10	5.5050	2.38	9.76	12.14	50.00	-37.86	AVG	P	
11	24.9495	15.77	10.19	25.96	60.00	-34.04	QP	P	
12	24.9495	9.55	10.19	19.74	50.00	-30.26	AVG	P	

Test Plots and Data of Conducted Emissions	
Tested Model:	CR-01
Tested Mode:	TM3
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

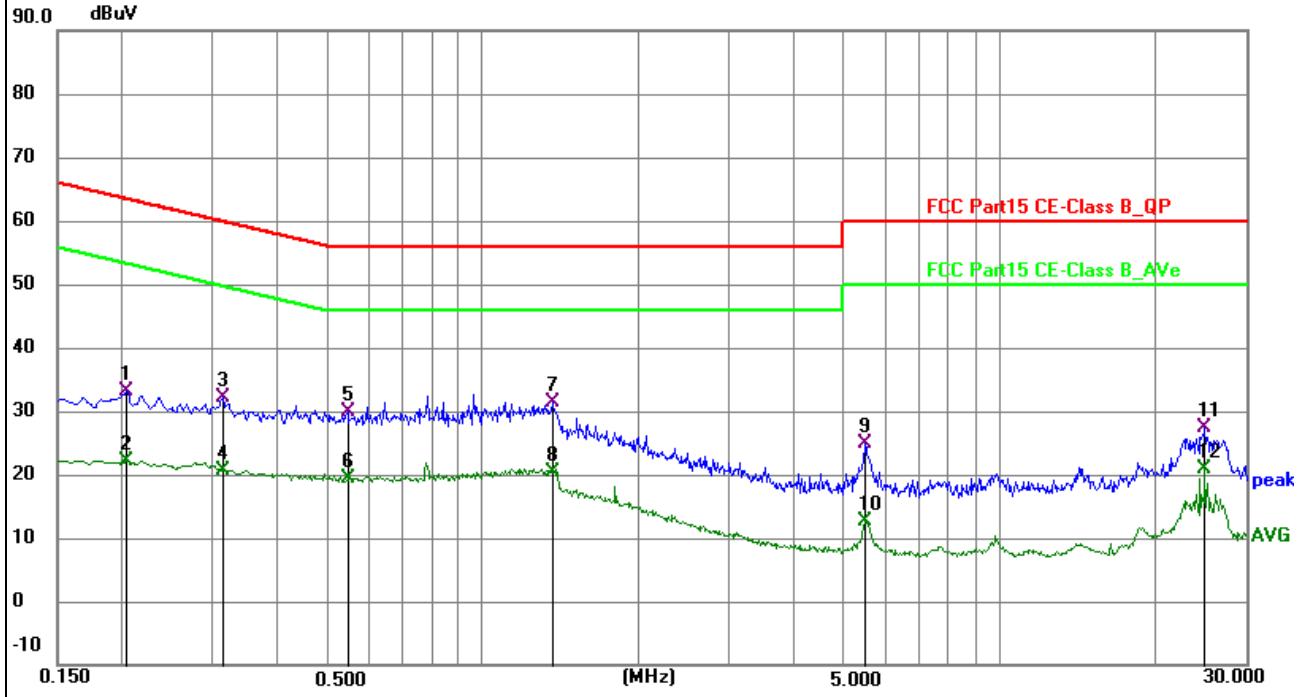

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2040	23.94	9.22	33.16	63.45	-30.29	QP	P	
2	0.2040	12.90	9.22	22.12	53.45	-31.33	AVG	P	
3	0.3120	22.70	9.40	32.10	59.92	-27.82	QP	P	
4	0.3120	11.20	9.40	20.60	49.92	-29.32	AVG	P	
5	0.5460	20.52	9.39	29.91	56.00	-26.09	QP	P	
6	0.5460	10.00	9.39	19.39	46.00	-26.61	AVG	P	
7 *	1.3650	21.89	9.44	31.33	56.00	-24.67	QP	P	
8	1.3650	10.85	9.44	20.29	46.00	-25.71	AVG	P	
9	5.5005	15.27	9.57	24.84	60.00	-35.16	QP	P	
10	5.5005	2.97	9.57	12.54	50.00	-37.46	AVG	P	
11	24.9495	17.39	10.05	27.44	60.00	-32.56	QP	P	
12	24.9495	10.88	10.05	20.93	50.00	-29.07	AVG	P	

Test Plots and Data of Conducted Emissions	
Tested Model:	CR-01
Tested Mode:	TM3
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

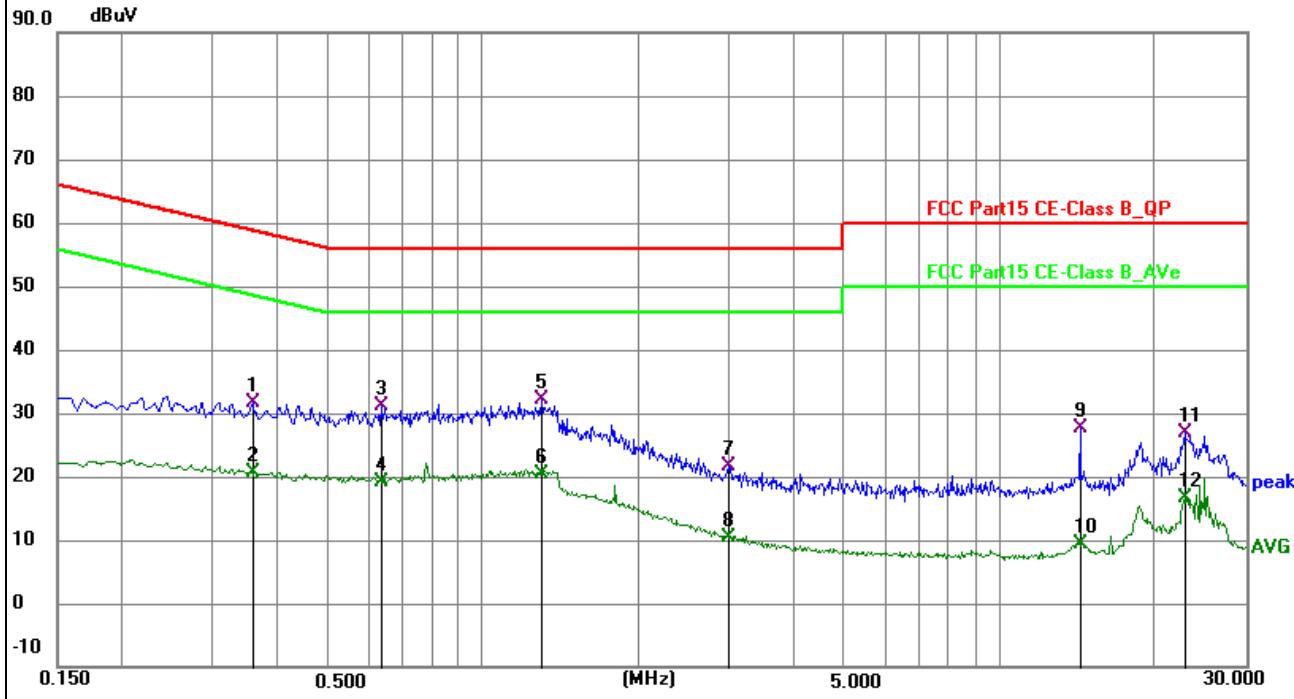

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3570	22.08	9.58	31.66	58.80	-27.14	QP	P	
2	0.3570	11.14	9.58	20.72	48.80	-28.08	AVG	P	
3	0.6360	21.54	9.56	31.10	56.00	-24.90	QP	P	
4	0.6360	9.53	9.56	19.09	46.00	-26.91	AVG	P	
5 *	1.2975	22.49	9.63	32.12	56.00	-23.88	QP	P	
6	1.2975	10.85	9.63	20.48	46.00	-25.52	AVG	P	
7	2.9805	12.03	9.69	21.72	56.00	-34.28	QP	P	
8	2.9805	0.75	9.69	10.44	46.00	-35.56	AVG	P	
9	14.2934	17.82	9.73	27.55	60.00	-32.45	QP	P	
10	14.2934	-0.24	9.73	9.49	50.00	-40.51	AVG	P	
11	22.8930	16.80	10.13	26.93	60.00	-33.07	QP	P	
12	22.8930	6.48	10.13	16.61	50.00	-33.39	AVG	P	

## 4. Radiated Disturbance

### 4.1 Standard and Limit


According to the rule FCC Part 15.109, Radiated emission limit for a class A and class B device as below:

Frequency of Emission (MHz)	Class A (3m)	Class B (3m)
	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)
30-88	50	40
88-216	54.0	43.5
216-960	57.0	46
Above 960	60	54

Note: The more stringent limit applies at transition frequencies.

### 4.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

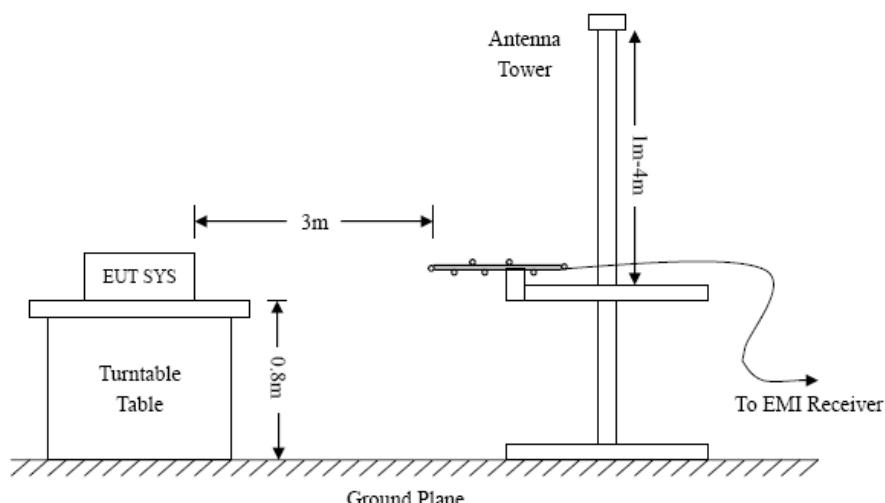


Test Setup Block Diagram

### 4.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.109 standard limit for a Class B device, and with the worst case as below:


Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Radiated Emissions	
Tested Model:	CR-01
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Horizontal
Remark:	

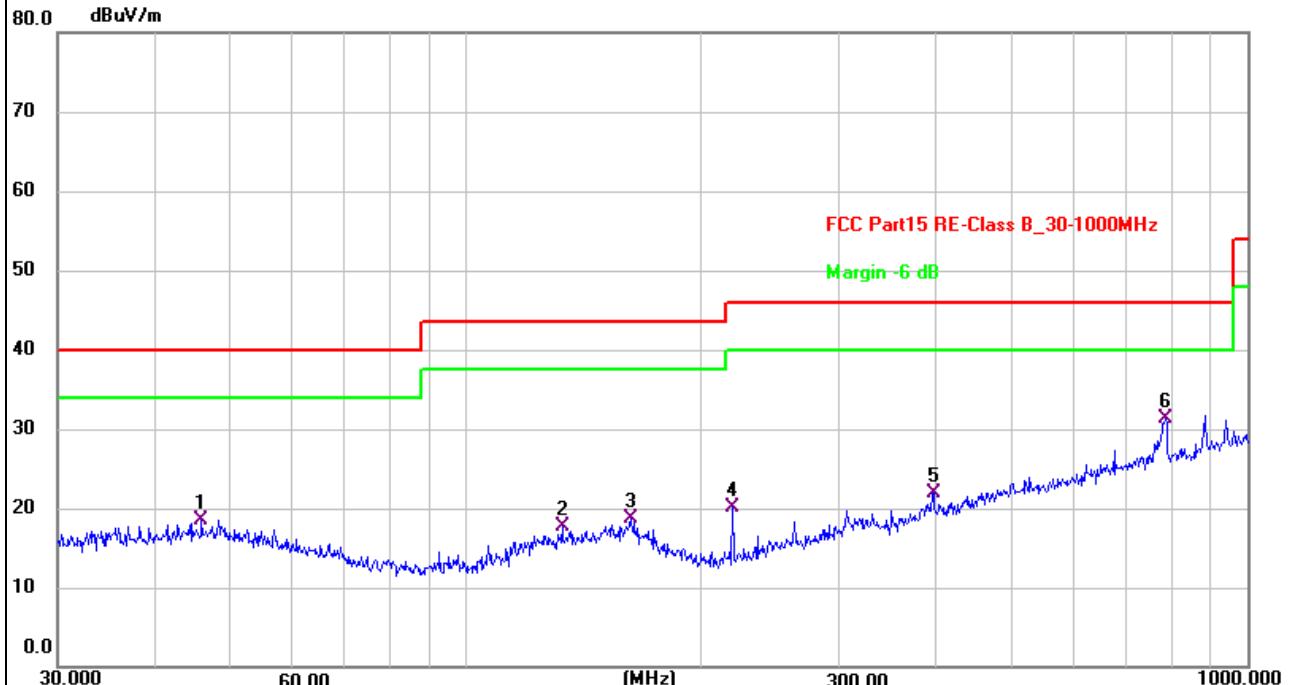


No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Factor (dB/m)	Level (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	45.8553	26.69	-8.27	18.42	40.00	-21.58	QP	100	93	P	
2	132.6850	26.40	-8.68	17.72	43.50	-25.78	QP	100	359	P	
3	162.6106	26.86	-8.10	18.76	43.50	-24.74	QP	100	268	P	
4	219.0753	31.89	-11.81	20.08	46.00	-25.92	QP	100	354	P	
5	396.2415	27.68	-5.70	21.98	46.00	-24.02	QP	100	124	P	
6 *	785.0935	30.06	1.33	31.39	46.00	-14.61	QP	100	227	P	

Test Plots and Data of Radiated Emissions	
Tested Model:	CR-01
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Vertical
Remark:	

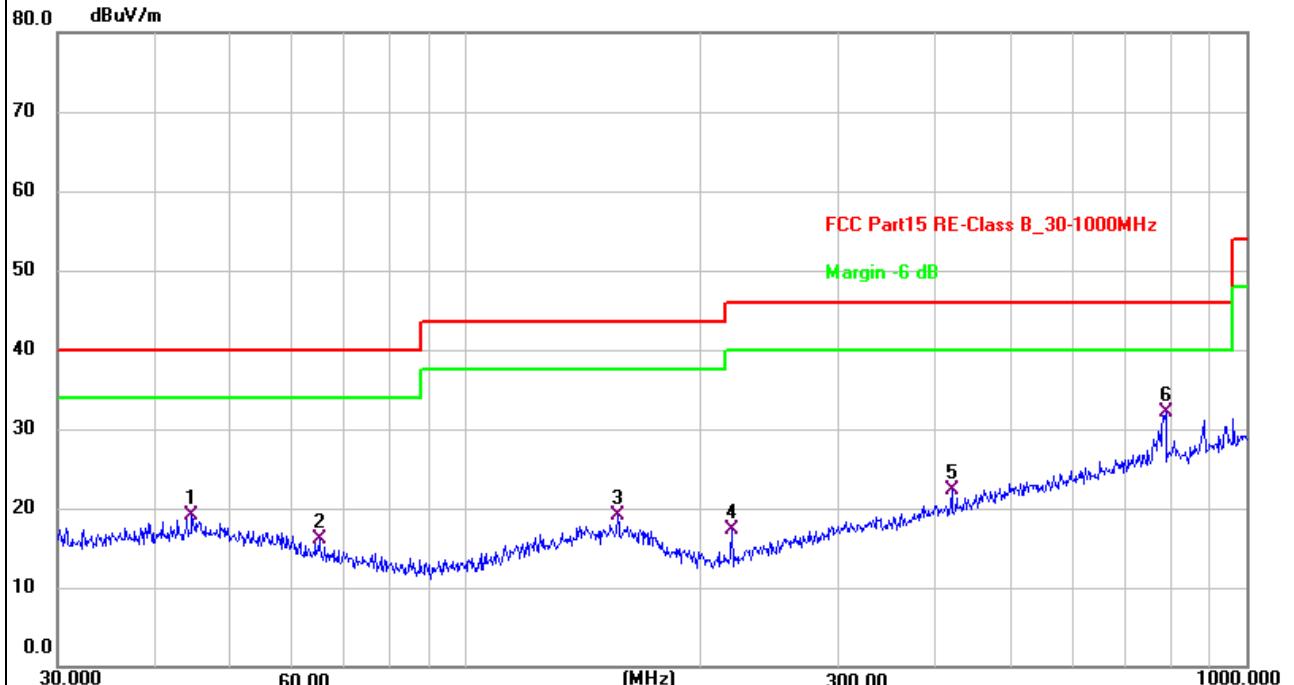


No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Factor (dB/m)	Level (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.5868	27.36	-8.25	19.11	40.00	-20.89	QP	100	102	P	
2	64.8865	26.91	-10.82	16.09	40.00	-23.91	QP	100	144	P	
3	156.4578	27.01	-7.82	19.19	43.50	-24.31	QP	100	329	P	
4	219.0753	29.17	-11.81	17.36	46.00	-28.64	QP	100	13	P	
5	419.1081	27.50	-5.18	22.32	46.00	-23.68	QP	100	124	P	
6 *	787.8513	30.68	1.36	32.04	46.00	-13.96	QP	100	320	P	

Test Plots and Data of Radiated Emissions	
Tested Model:	CR-01
Tested Mode:	TM2
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Horizontal
Remark:	

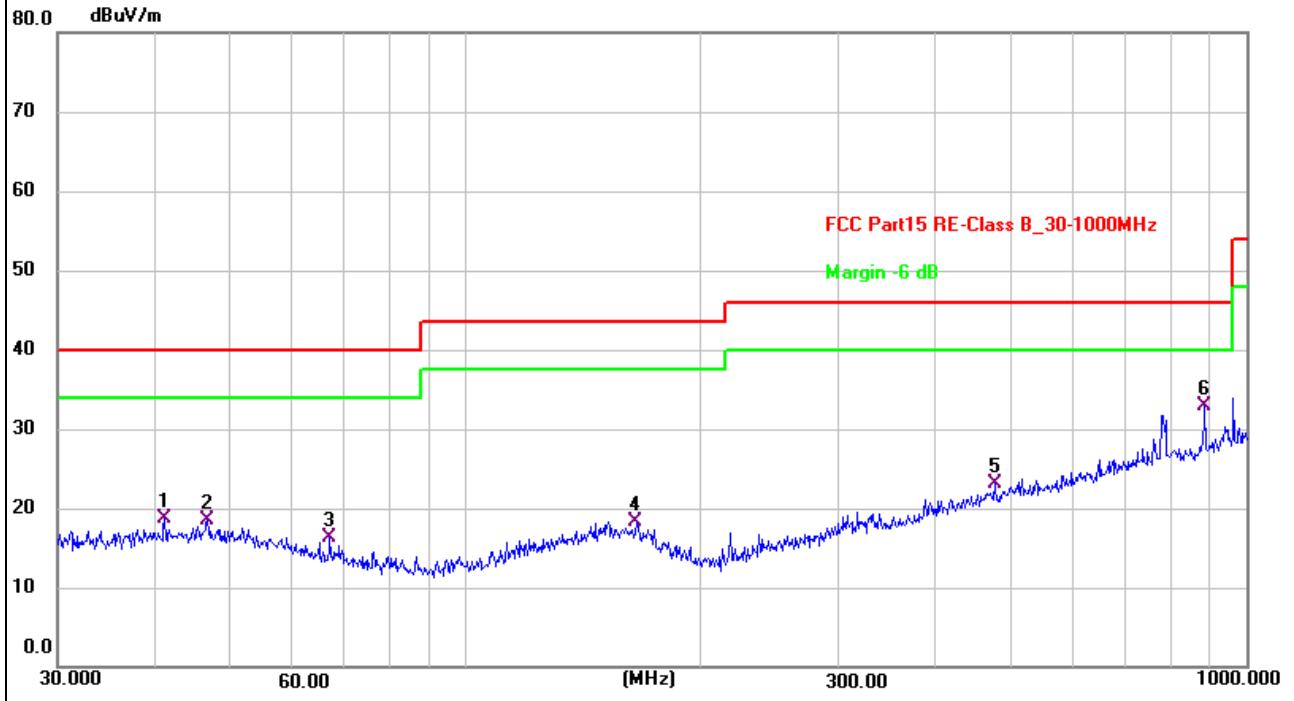


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	41.1320	27.08	-8.29	18.79	40.00	-21.21	QP	100	338	P	
2	46.6664	26.81	-8.30	18.51	40.00	-21.49	QP	100	100	P	
3	66.9669	27.38	-11.17	16.21	40.00	-23.79	QP	100	255	P	
4	165.4866	26.76	-8.37	18.39	43.50	-25.11	QP	100	184	P	
5	475.4991	27.07	-3.87	23.20	46.00	-22.80	QP	100	224	P	
6 *	884.5029	30.64	2.29	32.93	46.00	-13.07	QP	100	214	P	

Test Plots and Data of Radiated Emissions	
Tested Model:	CR-01
Tested Mode:	TM2
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Vertical
Remark:	

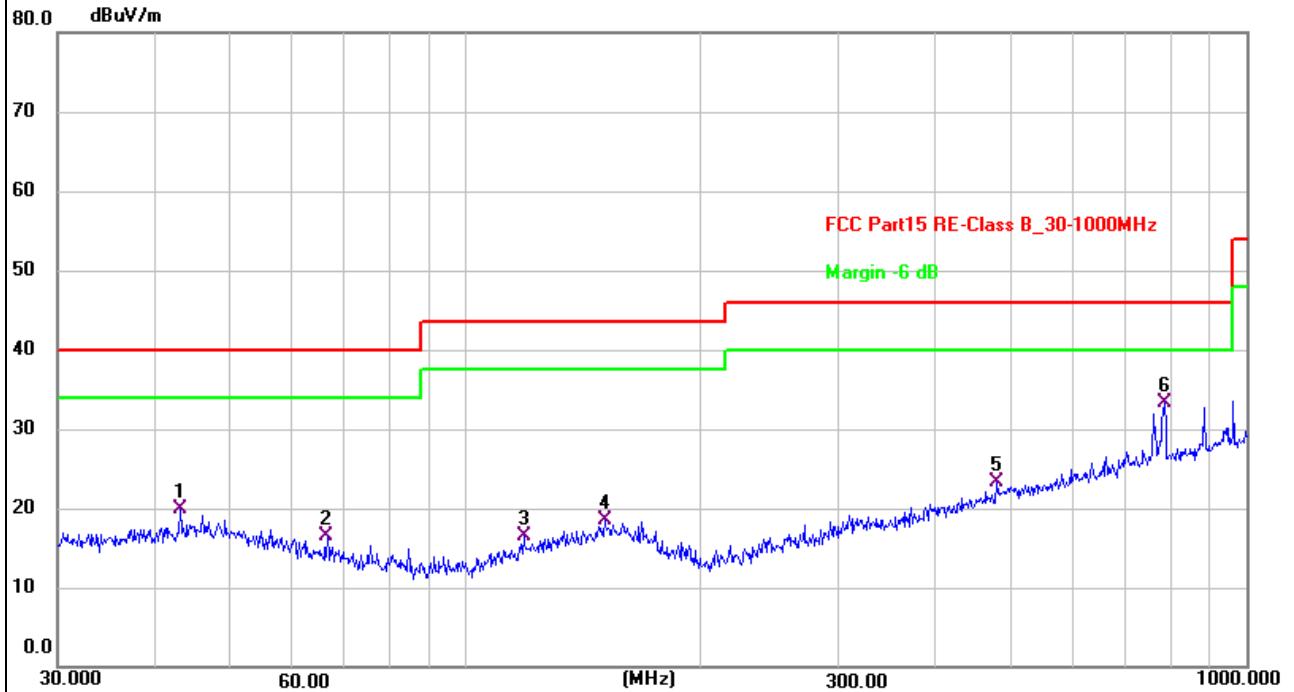


No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Factor (dB/m)	Level (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	43.0505	28.26	-8.28	19.98	40.00	-20.02	QP	100	320	P	
2	66.4989	27.60	-11.09	16.51	40.00	-23.49	QP	100	248	P	
3	118.6014	26.41	-9.91	16.50	43.50	-27.00	QP	100	311	P	
4	150.5378	26.24	-7.73	18.51	43.50	-24.99	QP	100	12	P	
5	478.8456	27.12	-3.79	23.33	46.00	-22.67	QP	100	348	P	
6 *	785.0935	32.00	1.33	33.33	46.00	-12.67	QP	100	198	P	

Test Plots and Data of Radiated Emissions	
Tested Model:	CR-01
Tested Mode:	TM3
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Horizontal
Remark:	

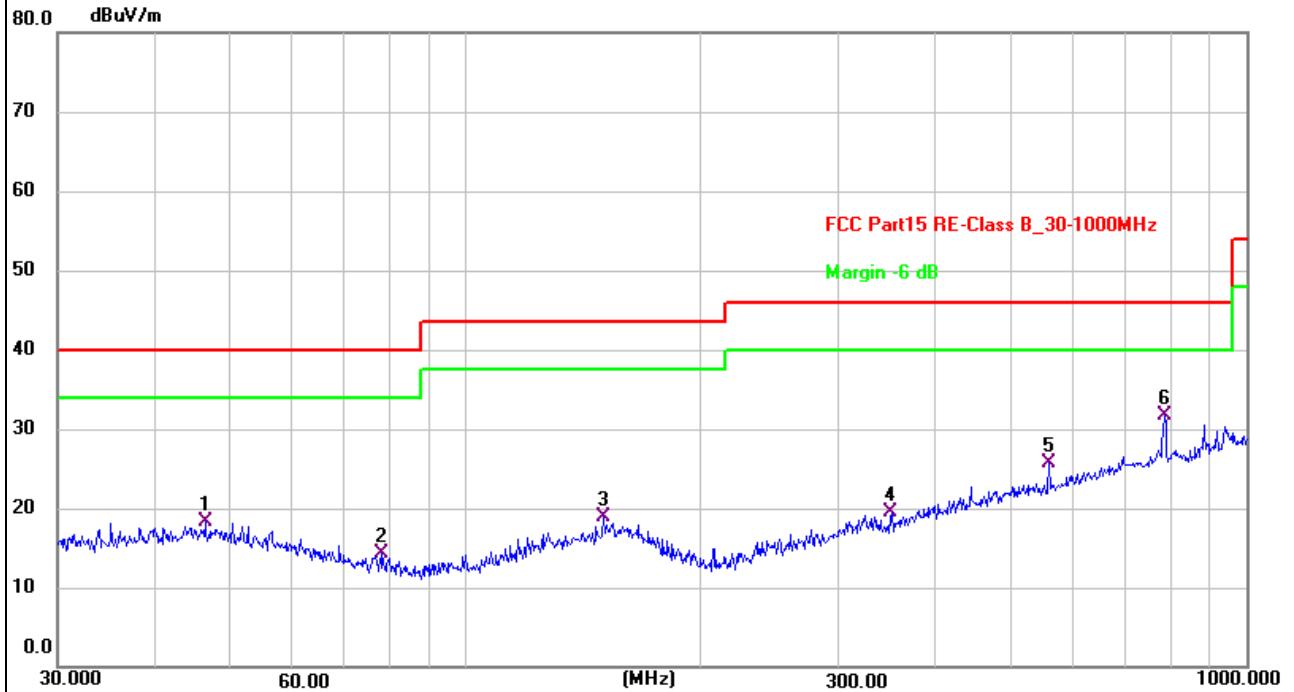

No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Factor (dB/m)	Level (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	46.3402	26.51	-8.28	18.23	40.00	-21.77	QP	100	360	P	
2	78.1389	26.91	-12.64	14.27	40.00	-25.73	QP	100	360	P	
3	150.0108	26.69	-7.72	18.97	43.50	-24.53	QP	100	360	P	
4	351.7079	26.86	-7.34	19.52	46.00	-26.48	QP	100	360	P	
5	558.7302	28.22	-2.57	25.65	46.00	-20.35	QP	100	360	P	
6 *	785.0935	30.37	1.33	31.70	46.00	-14.30	QP	100	360	P	

Test Plots and Data of Radiated Emissions	
Tested Model:	CR-01
Tested Mode:	TM3
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Vertical
Remark:	

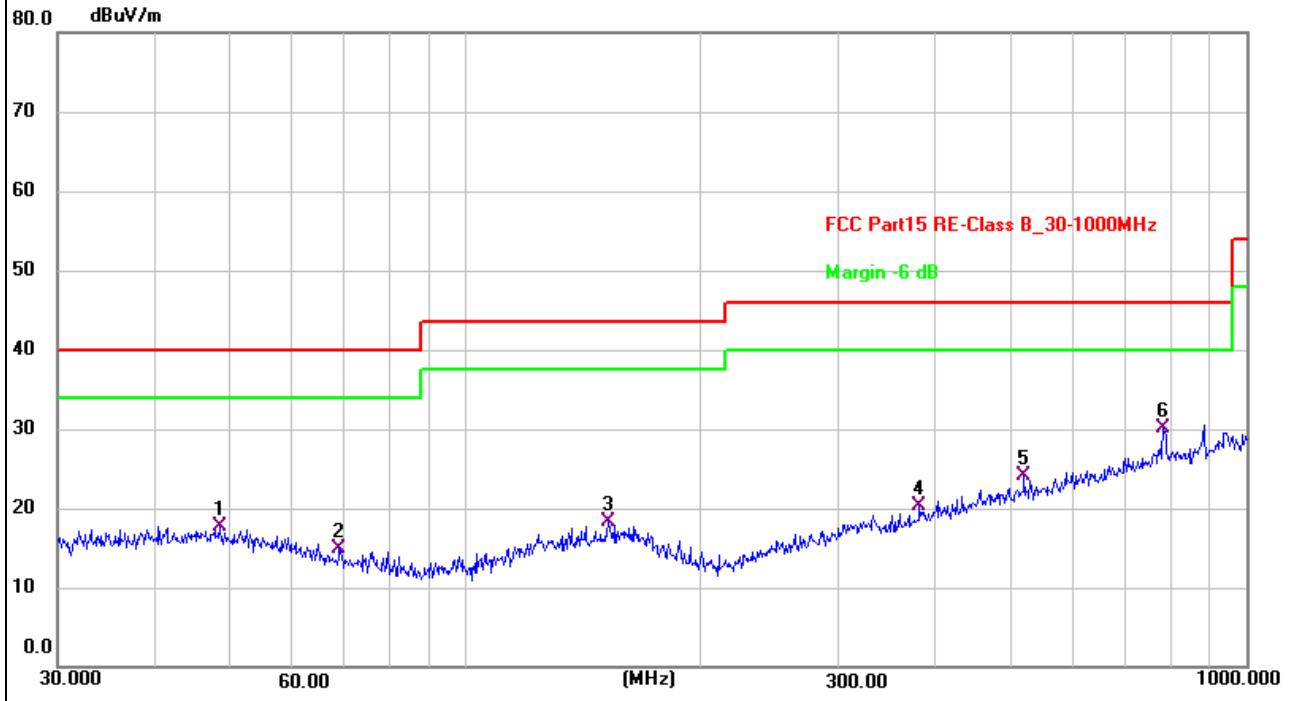

No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Factor (dB/m)	Level (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	48.3318	26.14	-8.35	17.79	40.00	-22.21	QP	100	0	P	
2	68.8721	26.35	-11.52	14.83	40.00	-25.17	QP	100	0	P	
3	152.1297	26.04	-7.75	18.29	43.50	-25.21	QP	100	0	P	
4	381.2487	26.52	-6.22	20.30	46.00	-25.70	QP	100	0	P	
5	519.0649	27.11	-3.07	24.04	46.00	-21.96	QP	100	0	P	
6 *	782.3453	28.78	1.30	30.08	46.00	-15.92	QP	100	0	P	

Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded in report.

\*\*\*\*\* END OF REPORT \*\*\*\*\*