

TEST REPORT

Applicant: Dagobah Systems Inc
Address: 651 N. Broad Street Suite 206 Middletown, DE
19709 United States
Equipment Type: ATA (Analog Telephone Adaptor) Gateway
Model Name: PC228
Brand Name: TELCLOUD / POTSCAST
FCC ID: 2BON3-PC228
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Mar. 31, 2025
Test Date: Apr. 01, 2025 - Apr. 02, 2025
Date of Issue: Apr. 22, 2025

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center



Prepared by: Chai Yong

Reviewed by: Huang Chengkun

Approved by: Chen Zidong
(Technical Director)

Chai Yong

Huang Chengkun

Chen Zidong

Revision History		
Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Apr. 22, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 Test Laboratory	4
1.2 Test Location	4
2 PRODUCT INFORMATION	5
2.1 Applicant Information	5
2.2 Manufacturer Information	5
2.3 General Description for Equipment under Test (EUT)	5
2.4 Ancillary Equipment	6
2.5 Technical Information	6
3 SUMMARY OF TEST RESULTS	7
3.1 Test Standards	7
3.2 Verdict	7
3.3 Decision Rule	7
3.4 Test Uncertainty	7
4 GENERAL TEST CONFIGURATIONS	8
4.1 Test Enclosure List	8
4.2 Test Configurations	8
4.3 Test Setups	9
5 TEST ITEMS	11
5.1 Emission Tests	11
5.1.1 Radiated emission	11
5.1.2 Conducted emission	13
ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST	14
A.1 Radiated emission	14
A.2 Conducted emission	21

ANNEX B TEST SETUP PHOTOS	25
ANNEX C EUT EXTERNAL PHOTOS	25
ANNEX D EUT INTERNAL PHOTOS	25

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1st to 2nd floors, Building 1, No. 222 Xuanlan Road, Xuanqiao Town, Pudong New District, Shanghai, China

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1st to 2nd floors, Building 1, No. 222 Xuanlan Road, Xuanqiao Town, Pudong New District, Shanghai
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Dagobah Systems Inc
Address	651 N. Broad Street Suite 206 Middletown, DE 19709 United States

2.2 Manufacturer Information

Manufacturer	Dagobah Systems Inc
Address	651 N. Broad Street Suite 206 Middletown, DE 19709 United States

2.3 General Description for Equipment under Test (EUT)

Equipment Type	ATA (Analog Telephone Adaptor) Gateway
Model Name Under Test	PC228
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	P3
Software Version	PC-228_v1.2
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	Yiwei Lithium
	Model No.	B0935 (EVE-INR21700/50E 4S2P)
	Serial No.	N/A
	Capacity	9600 mAh
	Rated Voltage	14.6 V
	Limit Charge Voltage	N/A
Ancillary Equipment 2	Adapter	
	Brand Name	Daikawa Technology
	Model No.	DCT65W220270ZZ-C21
	Serial No.	N/A
	Rated Input	100-240 V _{AC} ~, 50/60 Hz, 1.8 A max
	Rated Output	22.0 V _{DC} = 2.7 A
Ancillary Equipment 3	WIFI Antenna	
	Model No.	N/A
	Length (Approx.)	0.1 m
Ancillary Equipment 4	CELL Antenna	
	Model No.	N/A
	Length (Approx.)	0.1 m

2.5 Technical Information

Network and wireless connectivity	3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/12/13/14/66/71 2.4G WIFI, 5G WIFI
Classification of equipment	Class B
Highest frequency generated or used in the device or on which the device operates or tunes(MHz)	5850 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

3.3 Decision Rule

- No Need
 Use General conformity decision rule (Consider uncertainty or not No Yes)
 Use Special Conformity Decision Rule (Consider uncertainty or not No Yes)

3.4 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (150 kHz-30 MHz)-AMN	2.6 dB
Radiated emissions (30 MHz-1 GHz)-966#1	4.2 dB
Radiated emissions (1 GHz-18 GHz) -966#1	5.3 dB
Radiated emissions (18 GHz-40 GHz) -966#1	5.6 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Laptop	DELL	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
RJ45 Cable	N/A	N/A	N/A	1.5m	N/A	<input checked="" type="checkbox"/>
RJ12 Cable	N/A	N/A	N/A	1.5m	N/A	<input checked="" type="checkbox"/>
Telephone	N/A	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>


4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Full System Test Mode</u> EUT + RJ45 Cable + RJ12 Cable + Telephone +Laptop + Adapter + Battery + CELL Antenna + WIFI Antenna

4.3 Test Setups

Test Setup 1

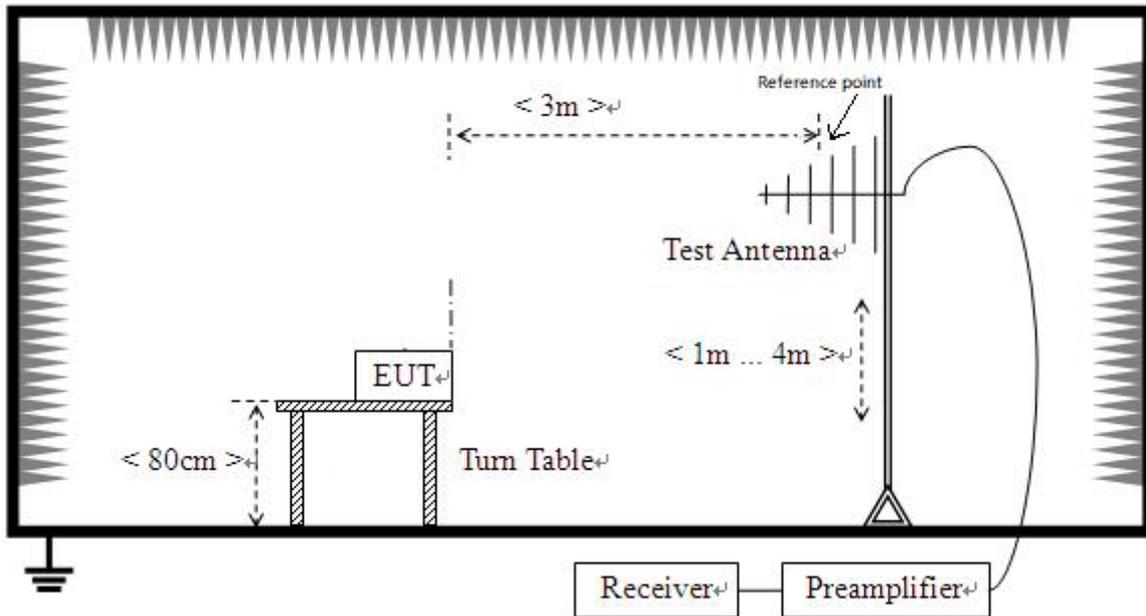


Radiated Emission (30 MHz-1 GHz)

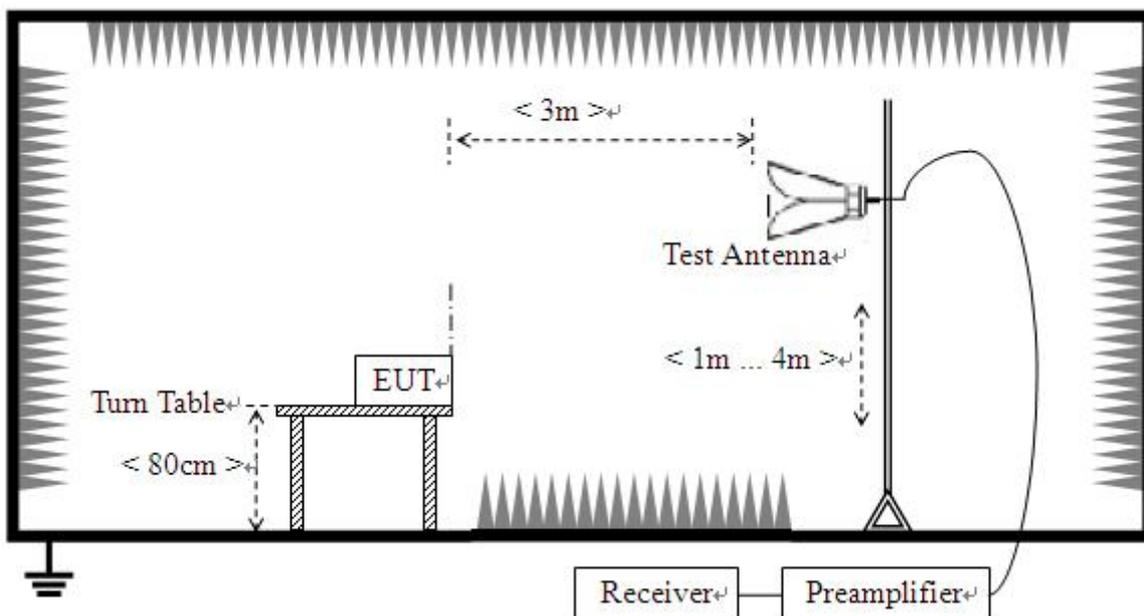

Radiated Emission (above 1 GHz)

Test Setup 2

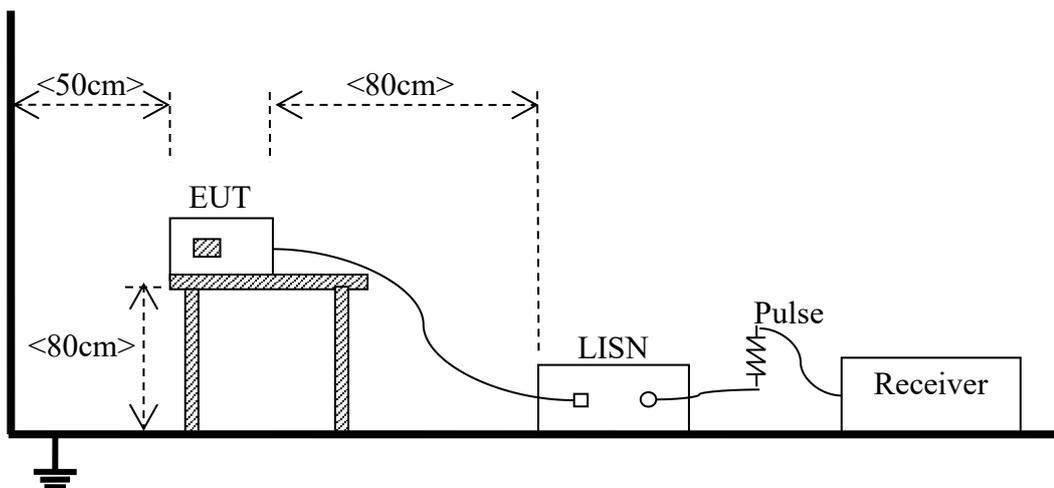

Conducted emission, AC ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

Note:

- 1) Field Strength (dB $\mu\text{V/m}$) = 20*log [Field Strength ($\mu\text{V/m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) The limits using ANSI C63.4-2014.
- 4) For 30-1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F _M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M, in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$
Where:
L_{3m} is Average Class A limit at 3m;
L_{10m} is Average Class A limit at 10m;
d_{10m} is Measurement distance in 10m;
d_{3m} is Measurement distance in 3m.
For this case: L_{3m} = 49.5 + 20*log(10/3)=60 (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108$ MHz	1 GHz
108 MHz $\leq F_X \leq 500$ MHz	2 GHz
500 MHz $\leq F_X \leq 1$ GHz	5 GHz
$F_X \geq 1$ GHz	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test setup

Please refer to 4.2 section description of test setup of test setup 1. The photo of test setup please refer to ANNEX B.

5.1.1.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.
3. An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.
4. The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.
5. Use the following spectrum analyzer settings:
 - Span = wide enough to fully capture the emission being measured
 - RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak for $f < 1$ GHz, peak & RMS Average for $f \geq 1$ GHz
 - Trace = max hold

5.1.1.4 Test result and test equipment list

Please refer to ANNEX A.1.

Note:

1. Results (dB μ V/m) = Reading (dB μ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)
3. Margin = Limit – Results

5.1.2 Conducted emission

5.1.2.1 Limit

Frequency range (MHz)	Class A		Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66	66 to 56	56 to 46
0.50 - 5	73	60	56	46
5 - 30	73	60	60	50

Note:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test setup

Please refer to 4.2 section description of test setup of test setup 2. The photo of test setup please refer to ANNEX B.

5.1.2.3 Test procedure

1. The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);
2. The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.
3. Use the following spectrum analyzer settings:
 - RBW = 9 kHz
 - VBW \geq RBW
 - Sweep = 10ms
 - Detector function = Peak & Average
 - Trace = max hold

5.1.2.4 Test result and test equipment list

Please refer to ANNEX A.2.

Note:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS AND TEST EQUIPMENT LIST

A.1 Radiated emission

Note 1: Measurements shall be made with a quasi-peak measuring receiver in the frequency range 30 MHz to 1000 MHz. To reduce the testing time, a peak measuring receiver may be used instead of a quasi-peak measuring receiver. In case of dispute, measurement with a quasi-peak measuring receiver will take precedence.

Note 2: When the EUT is on, it will automatically emit WIFI signal and cannot be turned off. So the marked spikes near 2400 MHz and 5200MHz with circle should be ignored because this is WIFI carrier frequencies.


Note 3: The Radiated Emission is required to be investigated to the upper frequency of 5th harmonic of the highest internal frequency of EUT or 40 GHz, whichever is lower. The test results above 18GHz are only noise and are not recorded in the report.

Sample No.	SC-SH2530042-S14	Temperature	22.4°C
Humidity	52%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2025.04.02

Test Mode 1


A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

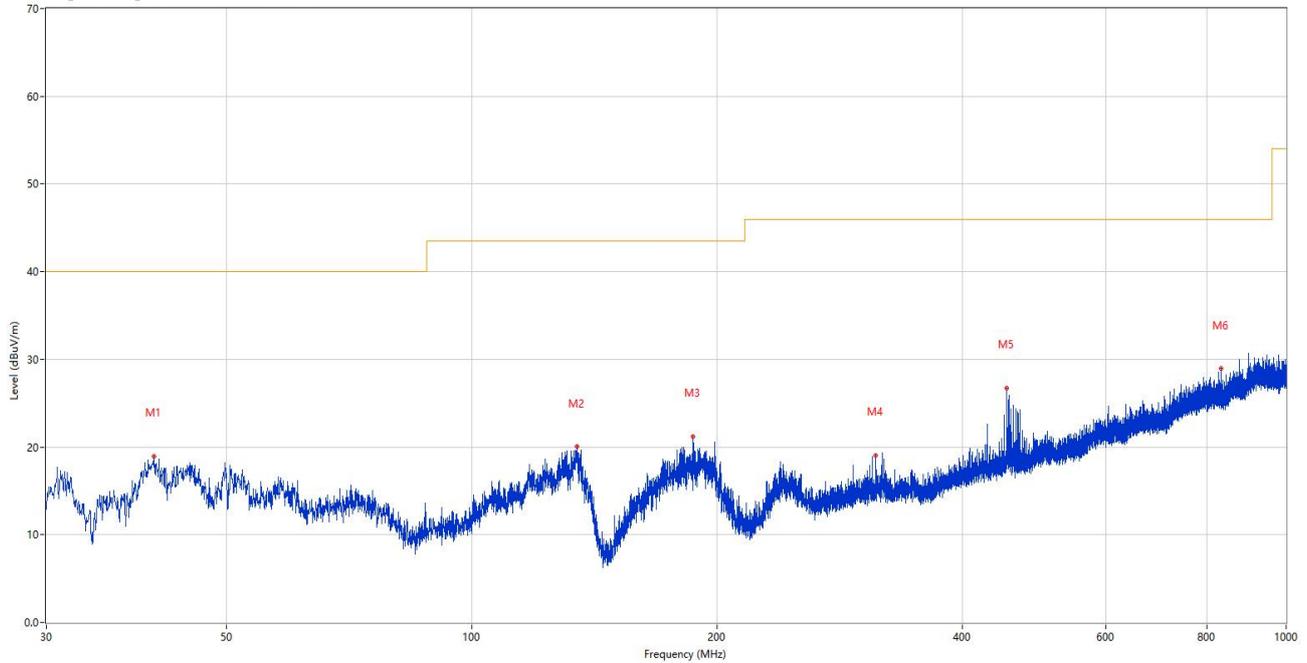

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.670	18.95	-27.00	40.0	21.05	Peak	243.00	100	Vertical	Pass
2	134.566	20.09	-30.10	43.5	23.41	Peak	293.00	100	Vertical	Pass
3	186.995	21.17	-27.69	43.5	22.33	Peak	303.00	100	Vertical	Pass
4	313.434	19.01	-23.63	46.0	26.99	Peak	77.00	100	Vertical	Pass
5	453.405	26.70	-19.97	46.0	19.30	Peak	160.00	100	Vertical	Pass
6	831.317	28.92	-11.71	46.0	17.08	Peak	308.00	200	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

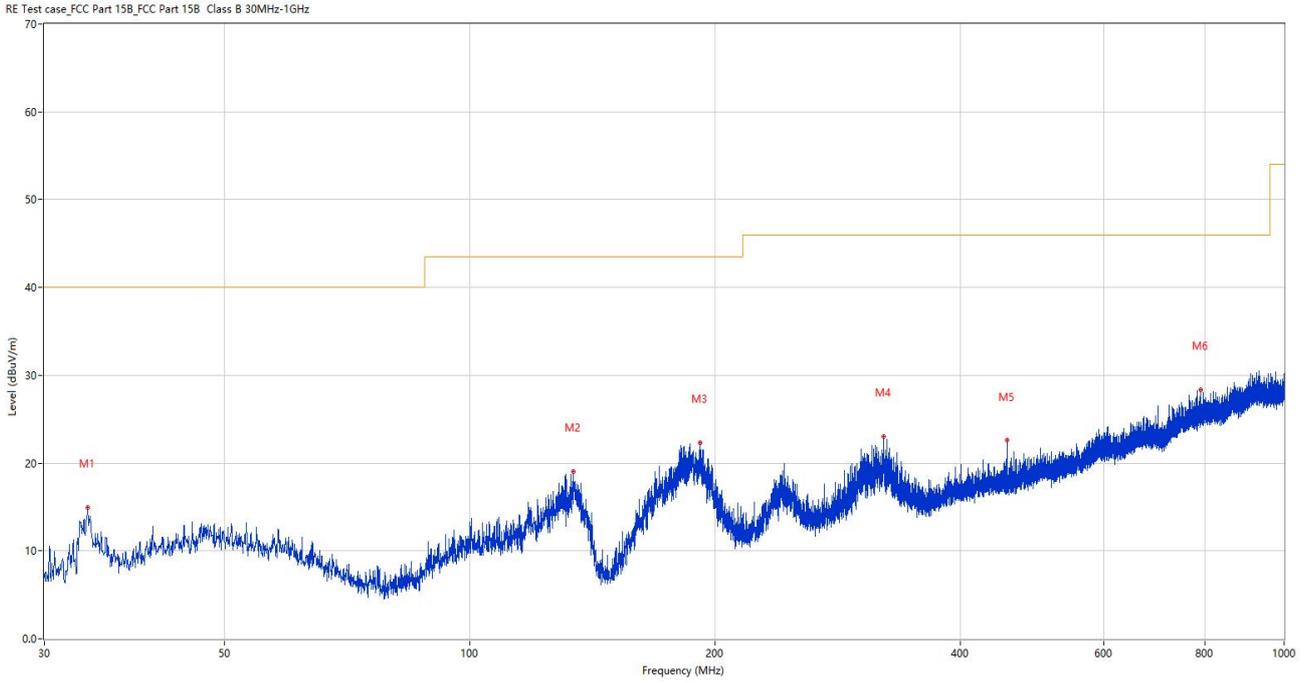


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.928	14.96	-29.40	40.0	25.04	Peak	219.00	100	Horizontal	Pass
2	133.984	19.00	-30.07	43.5	24.50	Peak	230.00	200	Horizontal	Pass
3	191.796	22.33	-26.90	43.5	21.17	Peak	210.00	200	Horizontal	Pass
4	322.116	23.06	-23.48	46.0	22.94	Peak	359.00	100	Horizontal	Pass
5	456.363	22.57	-20.00	46.0	23.43	Peak	162.00	200	Horizontal	Pass
6	789.462	28.38	-11.84	46.0	17.62	Peak	259.00	200	Horizontal	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2025.02.12	2026.02.11	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZB ECK	VULB 9163	BH-EMC-L132	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>

Sample No.	SC-SH2530042-S14	Temperature	22.4°C
Humidity	52%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Hao Longda	Test Date	2025.04.02


Test Mode 1

A.1.3 Test Antenna Vertical, 1 GHz – 18 GHz

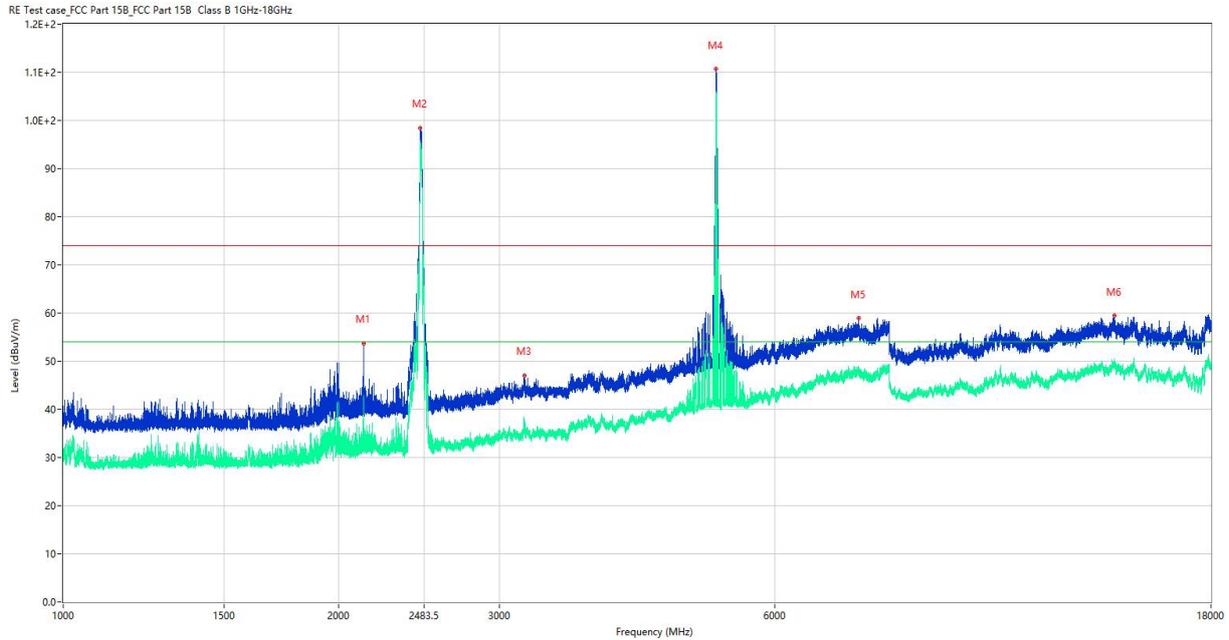

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2129.300	53.77	-13.23	74.0	20.23	Peak	182.00	100	Vertical	Pass
1**	2129.300	34.01	-13.23	54.0	19.99	AV	182.00	100	Vertical	Pass
2	2458.200	98.46	-11.60	74.0	-24.46	Peak	46.00	100	Vertical	N/A
2**	2458.200	94.98	-11.60	54.0	-40.98	AV	46.00	100	Vertical	N/A
3	3195.750	47.10	-7.15	74.0	26.90	Peak	137.00	100	Vertical	Pass
3**	3195.750	35.82	-7.15	54.0	18.18	AV	137.00	100	Vertical	Pass
4	5179.500	110.67	-0.29	74.0	-36.67	Peak	319.00	100	Vertical	N/A
4**	5179.500	105.14	-0.29	54.0	-51.14	AV	319.00	100	Vertical	N/A
5	7411.000	58.90	6.48	74.0	15.10	Peak	81.00	100	Vertical	Pass
5**	7411.000	48.57	6.48	54.0	5.43	AV	81.00	100	Vertical	Pass
6	14123.500	59.40	9.16	74.0	14.60	Peak	75.00	100	Vertical	Pass
6**	14123.500	49.20	9.16	54.0	4.80	AV	75.00	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 18 GHz

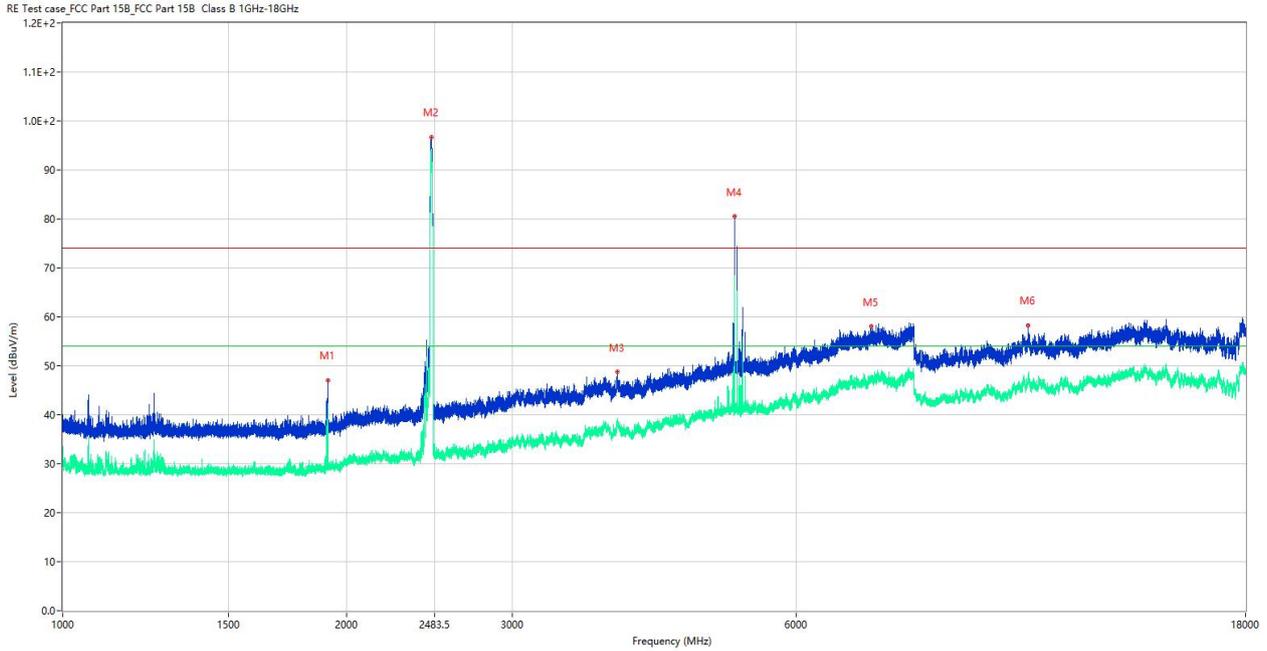

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1912.200	47.03	-15.40	74.0	26.97	Peak	323.00	100	Horizontal	Pass
1**	1912.200	42.27	-15.40	54.0	11.73	AV	323.00	100	Horizontal	Pass
2	2460.500	96.71	-11.55	74.0	-22.71	Peak	282.00	100	Horizontal	N/A
2**	2460.500	93.47	-11.55	54.0	-39.47	AV	282.00	100	Horizontal	N/A
3	3878.500	48.76	-2.66	74.0	25.24	Peak	132.00	100	Horizontal	Pass
3**	3878.500	37.86	-2.66	54.0	16.14	AV	132.00	100	Horizontal	Pass
4	5165.000	80.49	-0.55	74.0	-6.49	Peak	341.00	100	Horizontal	N/A
4**	5165.000	65.62	-0.55	54.0	-11.62	AV	341.00	100	Horizontal	N/A
5	7215.500	58.03	6.11	74.0	15.97	Peak	222.00	100	Horizontal	Pass
5**	7215.500	47.79	6.11	54.0	6.21	AV	222.00	100	Horizontal	Pass
6	10587.500	58.32	4.95	74.0	15.68	Peak	47.00	100	Horizontal	Pass
6**	10587.500	48.04	4.95	54.0	5.96	AV	47.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2025.02.12	2026.02.11	<input checked="" type="checkbox"/>
EMI Receiver	KEYSIGHT	N9010B	BH-EMC-L099	2025.02.12	2026.02.11	<input checked="" type="checkbox"/>
Test Antenna-Horn	SCHWARZB ECK	BBHA 9120D	BH-EMC-L111	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>
Test Antenna-Horn	A-INFO	LB-180400 -KF	BH-EMC-L061	2024.03.11	2027.03.10	<input checked="" type="checkbox"/>
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17	<input checked="" type="checkbox"/>
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>


A.2 Conducted emission

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	SC-SH2530042-S14	Temperature	23.0°C
Humidity	51%RH	Test Voltage	AC 120V/60Hz
Test Engineer	Xu Ying	Test Date	2025.04.01


Test Mode 1

A.2.1 AC ports - L Phase

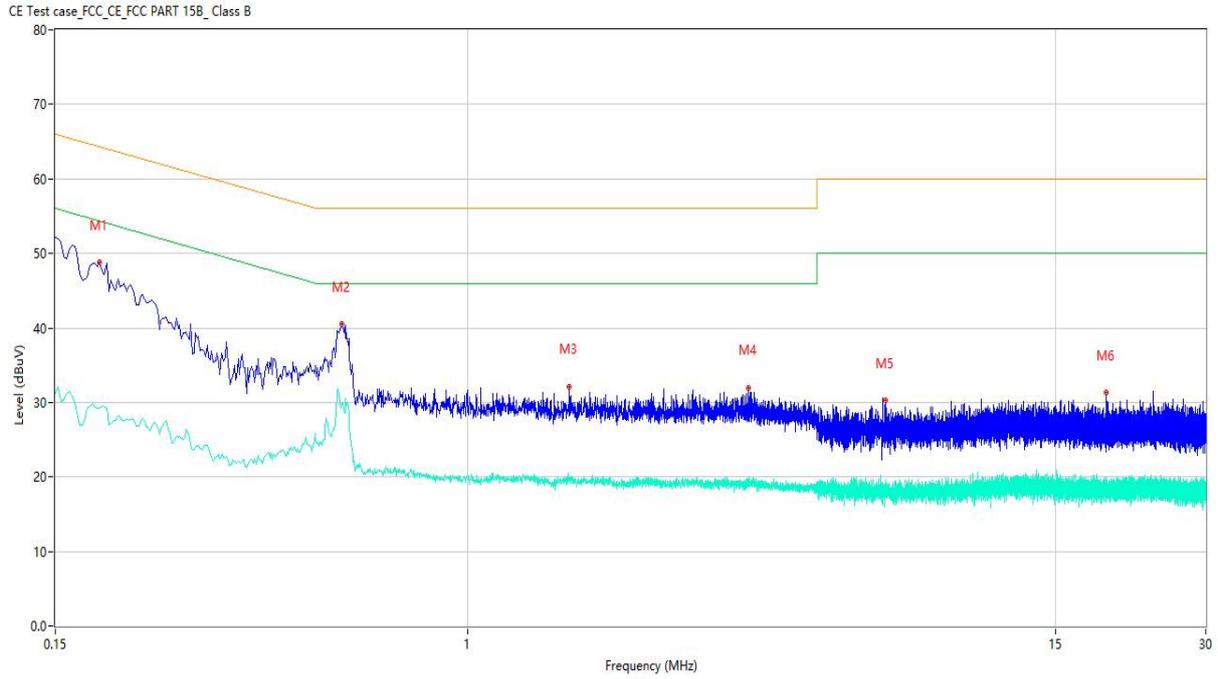

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.184	48.76	9.79	64.30	15.54	Peak	L	Pass
1**	0.184	29.19	9.79	54.30	25.11	AV	L	Pass
2	0.560	40.52	9.75	56.00	15.48	Peak	L	Pass
2**	0.560	29.76	9.75	46.00	16.24	AV	L	Pass
3	1.600	32.14	9.71	56.00	23.86	Peak	L	Pass
3**	1.600	19.69	9.71	46.00	26.31	AV	L	Pass
4	3.654	32.01	9.62	56.00	23.99	Peak	L	Pass
4**	3.654	19.04	9.62	46.00	26.96	AV	L	Pass
5	6.854	30.26	9.38	60.00	29.74	Peak	L	Pass
5**	6.854	17.99	9.38	50.00	32.01	AV	L	Pass
6	18.988	31.28	8.93	60.00	28.72	Peak	L	Pass
6**	18.988	19.26	8.93	50.00	30.74	AV	L	Pass

A.2.2 AC ports - N Phase

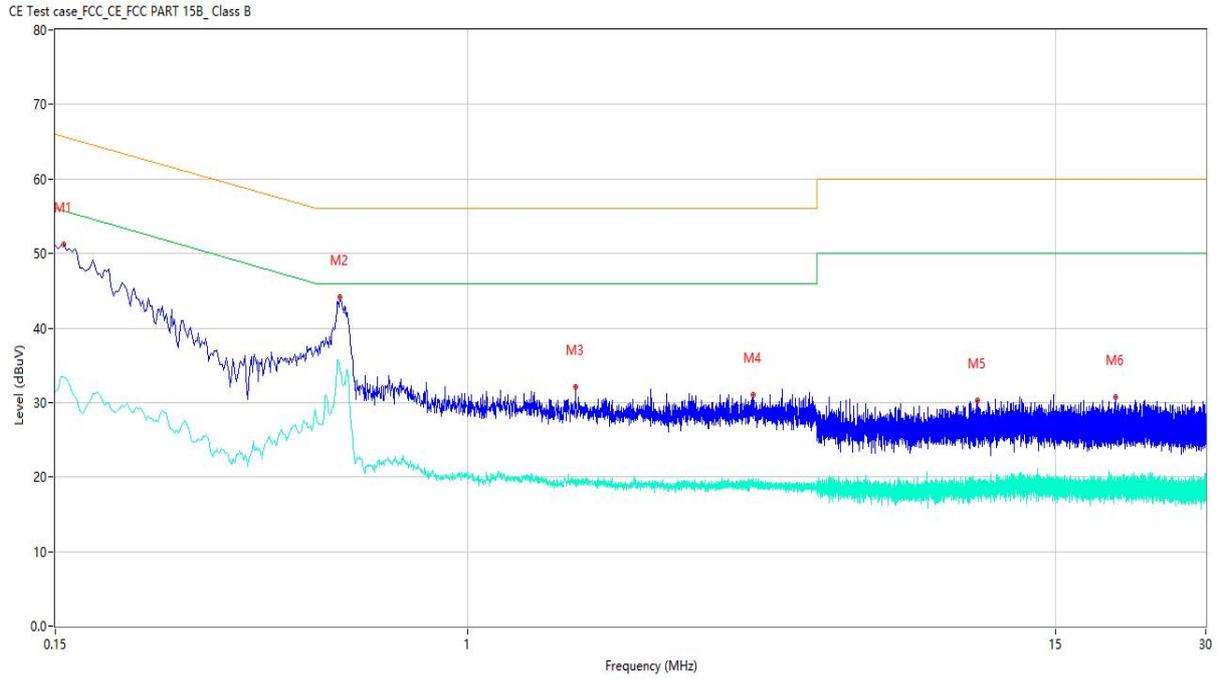

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	51.19	9.83	65.67	14.48	Peak	N	Pass
1**	0.156	33.41	9.83	55.67	22.26	AV	N	Pass
2	0.556	44.12	9.75	56.00	11.88	Peak	N	Pass
2**	0.556	34.36	9.75	46.00	11.64	AV	N	Pass
3	1.644	32.04	9.70	56.00	23.96	Peak	N	Pass
3**	1.644	19.79	9.70	46.00	26.21	AV	N	Pass
4	3.728	31.07	9.62	56.00	24.93	Peak	N	Pass
4**	3.728	18.99	9.62	46.00	27.01	AV	N	Pass
5	10.474	30.29	9.14	60.00	29.71	Peak	N	Pass
5**	10.474	19.64	9.14	50.00	30.36	AV	N	Pass
6	19.774	30.71	8.93	60.00	29.29	Peak	N	Pass
6**	19.774	18.65	8.93	50.00	31.35	AV	N	Pass

Equipment Information						
Equipment Name	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	TJEMC144	2024.04.06	2025.04.05	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NSLK 8127	BH-EMC-L011	2025.02.11	2026.02.10	<input checked="" type="checkbox"/>
10dB Limiter	SCHWARZBECK	VTSD 9561-F	BH-EMC-L014	2025.02.11	2026.02.10	<input checked="" type="checkbox"/>
Shielded Room	YiHeng	4.1m*4.0m*3.2m	BH-EMC-L006	2024.02.22	2027.02.21	<input checked="" type="checkbox"/>
Description	Manufacturer	Name	Version	/		Use
Test Software	BALUN	BL410-E	V21.919	/		<input checked="" type="checkbox"/>

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH2530225-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH2530225-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH2530225-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--