

EMC TEST REPORT

Applicant PATEO CONNECT Technology
(Shanghai) Corporation

FCC ID 2BOT7-PCM3-NA

Product Infotainment System

Brand PATEO

Model PCCM Plus 997/987 II;
PCCM Plus 991/981 I

Report No. EFTA25020036-IE-07-E1V1

Issue Date July 30, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2024)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Liu Wei

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	5
1.1	Notes of the Test Report.....	5
1.2	Test Facility.....	5
1.3	Testing Location.....	5
2	General Description of Equipment Under Test	6
2.1	Applicant and Manufacturer Information	6
2.2	General Information	6
2.3	Applied Standards	8
2.4	Test Mode	9
3	Test Case Results	10
3.1	Radiated Emission.....	10
3.2	Conducted Emission.....	17
4	Uncertainty Measurement.....	19
5	Main Test Instruments	20
	ANNEX A: The EUT Appearance	21
	ANNEX B: Test Setup Photos	22

Version	Revision Description	Issue Date
Rev.0	Initial issue of report.	July 14, 2025
Rev.1	Add data.	July 30, 2025

Note: This revised report (Report No.: EFTA25020036-IE-07-E1V1) supersedes and replaces the previously issued report (Report No.: EFTA25020036-IE-07-E1). Please discard or destroy the previously issued report and dispose of it accordingly.

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	NA ^{Note 1}
Date of Testing: March 5, 2025 ~ April 25, 2025 and July 29, 2025			
Date of Sample Received: February 11, 2025			
<p>Note:</p> <ol style="list-style-type: none"> The equipment is not connected to the public network, so test items do not apply. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. 			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	PATEO CONNECT Technology (Shanghai) Corporation
Applicant address	Room 3701, No. 866 Dongchangzhi Road, Hongkou District, Shanghai, 200080, PR.China
Manufacturer	PATEO CONNECT Technology (Shanghai) Corporation
Manufacturer address	Room 3701, No. 866 Dongchangzhi Road, Hongkou District, Shanghai, 200080, PR.China

2.2 General Information

EUT Description			
Device Type	Fixed Device		
Model	PCCM Plus 997/987 II; PCCM Plus 991/981 I		
Lab internal SN	EFTA25020036-IE-07/S01		
HW Version	V2.0		
SW Version	rc1.userdebug.PCM3		
Power Rating	DC 12V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	WWAN: External power supply WLAN: Internal Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 ~ 849	869 ~ 894
	GSM 1900	1850 ~ 1910	1930 ~ 1990
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 5	824 ~ 849	869 ~ 894
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	LTE Band 12	699 ~ 716	729 ~ 746
	LTE Band 13	777 ~ 787	746 ~ 756
	Bluetooth	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 2.4GHz	2400 ~ 2483.5	2400 ~ 2483.5
Wi-Fi 5GHz (U-NII-1)	5150 ~ 5250	5150 ~ 5250	

	Wi-Fi 5GHz (U-NII-3)	5725 ~ 5850	5725 ~ 5850
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. The customer declares that PCCM Plus 997/987 II and PCCM Plus 991/981 I are the same except for different appearance.			

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2024)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	External Power Supply + EUT with USB display
Mode 2	External Power Supply + EUT display with BT via mobile phone

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1, 2	Mode 2
Conducted Emission	--	--
After technical evaluation or/and preliminary test, the test data of the worst-case condition was recorded in this report.		

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

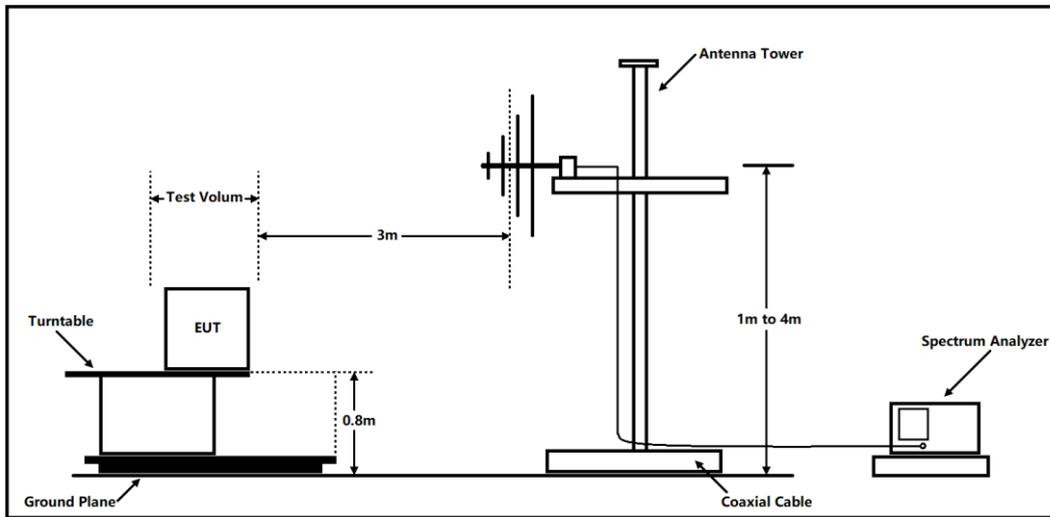

Above 1GHz

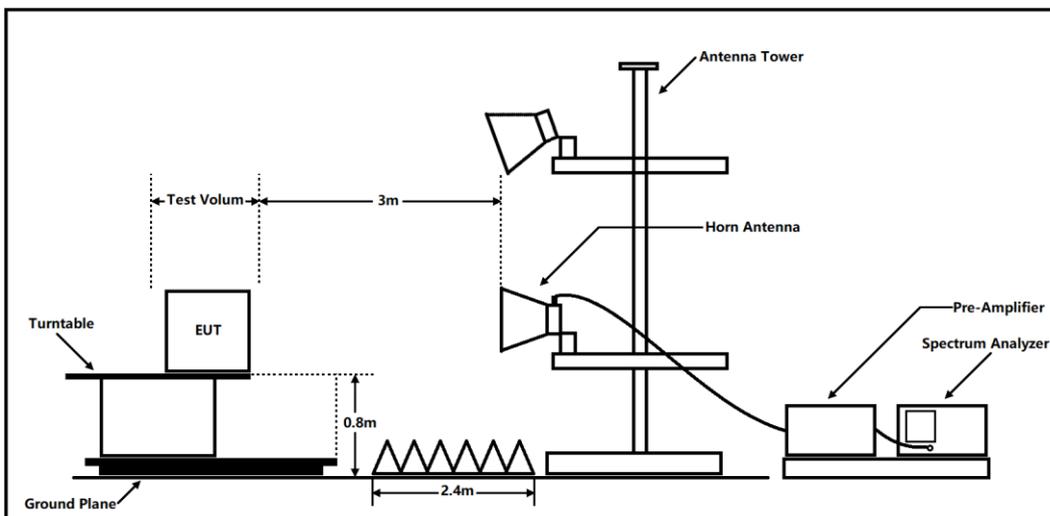

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits
Class B

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Class A

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	49.08	Quasi-peak
88-216	53.52	Quasi-peak
216 – 960	56.40	Quasi-peak
960-1000	59.50	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	59.50 79.50	Average Peak

Note: The EUT should meet CLASS B limit.

Frequency range of radiated measurements

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.


Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

PCCM Plus 991/981 I

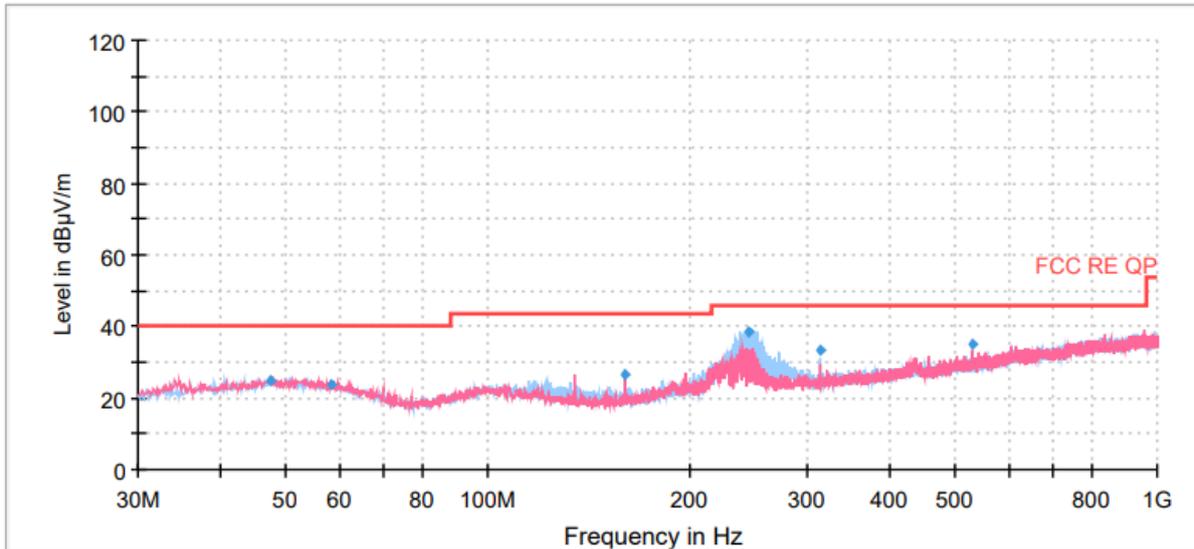


Radiated Emission from 30MHz to 1GHz

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.50	25.13	40.00	14.87	1000.00	120.000	123.0	V	176.00	20
58.46	23.98	40.00	16.02	1000.00	120.000	107.0	V	158.00	19
159.74	26.50	43.50	17.00	1000.00	120.000	100.0	V	1.00	16
245.99	38.60	46.00	7.40	1000.00	120.000	110.0	H	251.00	20
314.57	33.38	46.00	12.62	1000.00	120.000	101.0	H	102.00	21
528.42	35.02	46.00	10.98	1000.00	120.000	101.0	V	176.00	26

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

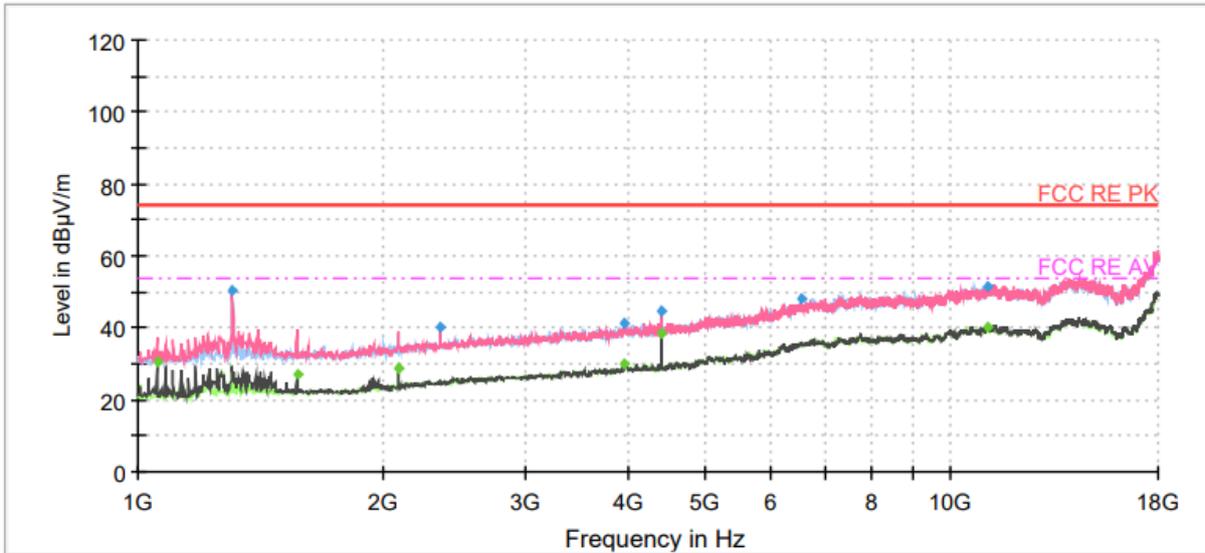

Radiated Emission from 1GHz to 18GHz


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1055.25	---	54.00	23.67	500.00	1000.000	113.0	V	0.00	-15
1306.00	50.55	74.00	23.45	500.00	1000.000	102.0	H	82.00	-14
1569.50	---	54.00	26.72	500.00	1000.000	231.0	V	14.00	-12
2092.25	---	54.00	25.25	500.00	1000.000	209.0	H	215.00	-10
2355.75	40.18	74.00	33.82	500.00	1000.000	133.0	V	0.00	-9
3964.38	41.47	74.00	32.53	500.00	1000.000	195.0	V	139.00	-4
3964.38	---	54.00	23.86	500.00	1000.000	101.0	H	8.00	-4
4408.50	---	54.00	15.74	500.00	1000.000	100.0	V	352.00	-3
4408.50	44.66	74.00	29.34	500.00	1000.000	120.0	V	352.00	-3
6550.50	48.39	74.00	25.61	500.00	1000.000	111.0	V	267.00	4
11070.38	51.74	74.00	22.26	500.00	1000.000	203.0	H	22.00	9
11104.38	---	54.00	13.69	500.00	1000.000	102.0	V	0.00	9

- Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
- 2. Margin = Limit – MaxPeak / Average

PCCM Plus 997/987 II

A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means (dB $\mu\text{V/m}$)

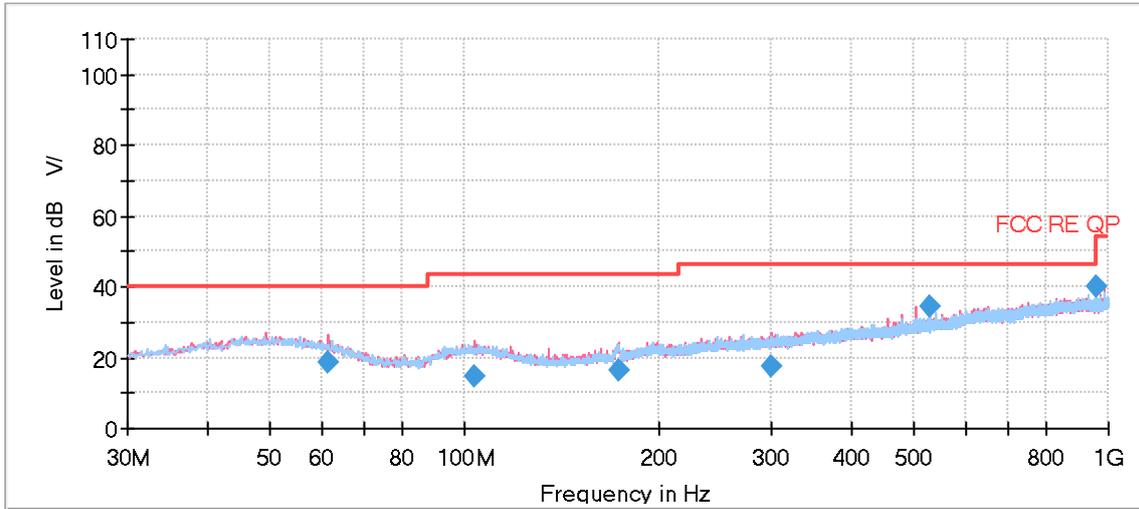


Radiated Emission from 30MHz to 1GHz

Final Result

Frequency (MHz)	QuasiPeak (dB $\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
61.443750	18.56	40.00	21.44	1000.0	175.0	V	113.0	19.3
103.718750	14.75	43.50	28.75	1000.0	175.0	V	84.0	19.2
173.997500	16.29	43.50	27.21	1000.0	175.0	V	268.0	20.2
299.990000	17.63	46.00	28.37	1000.0	110.0	V	64.0	21.1
528.378750	34.28	46.00	11.72	1000.0	100.0	V	285.0	26.0
958.452500	39.93	46.00	6.07	1000.0	109.0	V	36.0	30.6

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

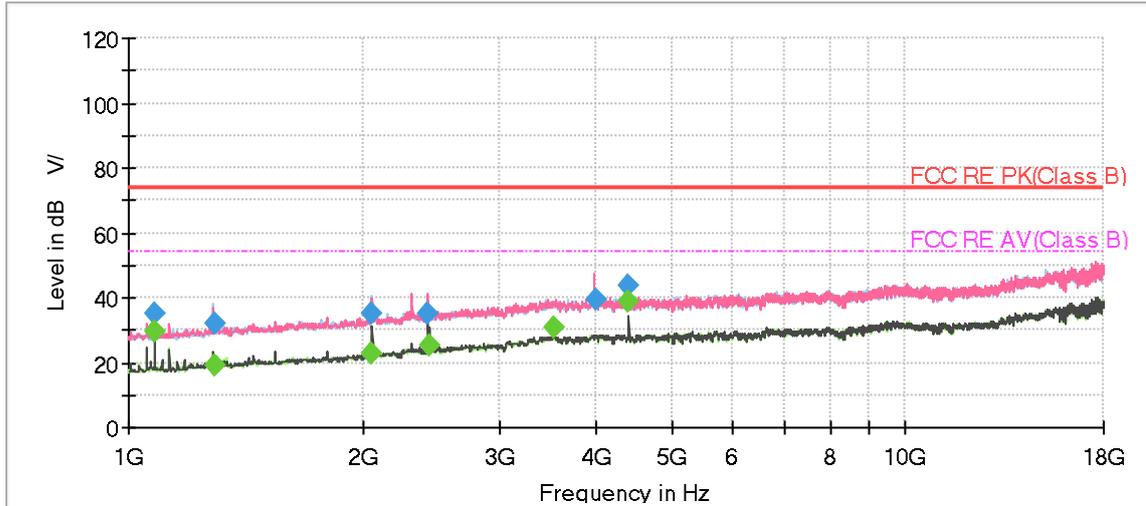

Radiated Emission from 1GHz to 18GHz

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1081.248750	34.86	---	74.00	39.14	500.0	100.0	V	80.0	-20.3
1081.395000	---	29.24	54.00	24.76	500.0	100.0	V	80.0	-20.3
1289.503750	---	19.38	54.00	34.62	500.0	100.0	H	6.0	-18.3
1289.598750	31.74	---	74.00	42.26	500.0	100.0	H	6.0	-18.3
2056.313750	---	23.00	54.00	31.00	500.0	200.0	V	188.0	-14.1
2059.556250	35.33	---	74.00	38.67	500.0	100.0	H	160.0	-14.2
2431.535000	34.93	---	74.00	39.07	500.0	200.0	V	325.0	-12.5
2433.427500	---	25.33	54.00	28.67	500.0	200.0	V	325.0	-12.5
3527.556250	---	30.85	54.00	23.15	500.0	200.0	V	213.0	-8.3
3988.477500	39.37	---	74.00	34.63	500.0	200.0	V	316.0	-6.8
4409.513750	---	38.94	54.00	15.06	500.0	200.0	V	173.0	-6.4
4409.600000	43.39	---	74.00	30.61	500.0	200.0	V	173.0	-6.4

- Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
 2. Margin = Limit – MaxPeak / Average

3.2 Conducted Emission


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

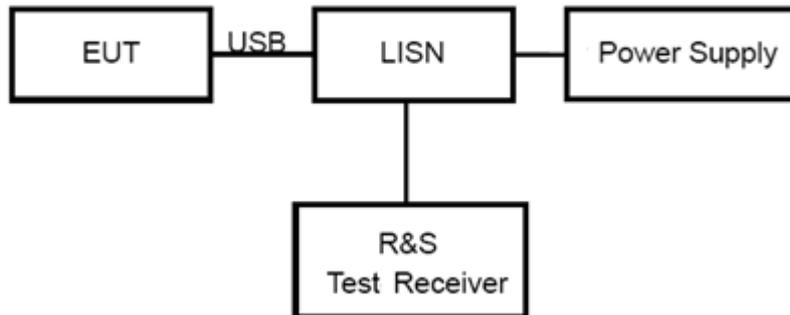

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Class A (dBµV)		Class B (dBµV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50

*: Decreases with the logarithm of the frequency.

Note: The EUT should meet CLASS B limit.

Test Results

The equipment is not connected to the public network, so test items do not apply.

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2024-05-07	2025-05-06
				2025-05-07	2026-05-06
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
EMI Test Receiver	R&S	ESR	102389	2024-05-07	2025-05-06
				2025-05-06	2026-05-05
Signal Analyzer	R&S	FSV40	101298	2024-05-07	2025-05-06
				2025-05-07	2026-05-06
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	R&S	HF 907	102723	2023-11-24	2026-11-23
Amplifier	R&S	SCU18	10034	2024-05-08	2025-05-07
				2025-05-06	2026-05-05
Horn Antenna	ETS-Lindgren	3160-09	00102643	2024-09-24	2027-09-23
Amplifier	MicroWave	KLNA-18040050	220826001	2024-05-08	2025-05-07
				2025-05-06	2026-05-05
Software	R&S	EMC32	9.26.01	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****