

RF Exposure Report

Report No.: AGC01741250501FH01

FCC ID : 2BPQB-LFP700

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Portable Power Station

BRAND NAME : DECOMIL

MODEL NAME : LFP700

APPLICANT: DECOMIL LLC

DATE OF ISSUE : Jun. 26, 2025

STANDARD(S) : 47 CFR FCC Part 2.1091 KDB 680106 D01 v04

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 17

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 26, 2025	Valid	Initial Release






Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 DUT Coil and Size Information	6
2.3 Related Submittal(S)/Grant (S)	7
2.4 Test Methodology	7
2.5 Equipment Approval Considerations	7
3. Test Environment	8
3.1 Address of The Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	g
3.4 Measurement Uncertainty	g
3.5 List of Equipment Used	g
4.System Test Configuration	10
4.1 Configuration of Tested System	10
4.2 Equipment Used in Tested System	10
5. Description of Test Modes	11
6. Maximum Permissible Exposure	12
6.1 Test Limits	12
6.2 Test Setup (Block Diagram of Configuration)	13
6.3 Test Procedures	14
6.4 Test Result	15
Appendix I: Photographs of Test Setup	16
Appendix II: Photographs of Test EUT	



Page 4 of 17

1. General Information

Applicant	DECOMIL LLC
Address	12 East 5th Street Paterson, NJ, 07524 United States
Manufacturer	DECOMIL LLC
Address	12 East 5th Street Paterson, NJ, 07524 United States
Factory	Huizhou PowerOak Innovation Co., Ltd
Address	(No.1 Workshop) Longsheng 5th Road, Laoshe Village, Dayawan West Zone, Huizhou, Guangdong, China
Product Designation	Portable Power Station
Brand Name	DECOMIL
Test Model	LFP700
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Jun. 10, 2025
Date of Test	Jun. 10, 2025 to Jun. 26, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-RFE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk Gai	
	Jack Gui (Project Engineer)	Jun. 26, 2025
Reviewed By	Bibo zhang	
Approved By	Bibo Zhang (Reviewer) Angol Li	Jun. 26, 2025
	Angela Li (Authorized Officer)	Jun. 26, 2025




Page 5 of 17

2. Product Information

2.1 Product Technical Description

Operation Frequency Band	110.5kHz-148kHz
Hardware Version	19.0601.1142-01
Software Version	2171-01
Modulation Type	FSK
Antenna Designation	Coil Antenna
Input Rating	AC: 120V~50/60Hz, 9A DC/PV: 12V-28V=8.5A, 200W Max.
Output Rating	AC: 120V~50/60Hz, 700W Total USB-A: 5V=3A USB-C: 5/9/12/15/20V=3A; 20V=3.25A each port (With E-Marker chip built in) Cigarette Lighter Port: 12V=10A Wireless Charging: 5/7.5/10/15W AC & DC Output: 700W Total





2.2 DUT Coil and Size Information

Output Power for Each Coil	5W/7.5W/10W/15W Max						
Distance to transmitter:	Top: 4mm;Bottom: 192mm;Left: 96mm;Right: 96mm;Front:56mm Rear:102mm						
DUT Size	B C A C						
	А	В	С	D	E	G	Н
Unit: mm	20.5±0.5	43.0±1	49±0.5	5±1.5	15±1.5	3±1.5	1±0.1
	I	/	/	/	/	1	/
	3.0max	1	/	/	/	/	/

Remark: The information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.



Page 7 of 17

2.3 Related Submittal(S)/Grant (S)

This submittal(s) (test report) is intended for **FCC ID: 2BPQB-LFP700**, filing to comply with Part 2.1091 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No	. Identity	Document Title
1	FCC 47 CFR Part 2.1091	Radiofrequency Radiation Exposure Evaluation: Mobile Devices.
2	KDB 680106	D01 RF Exposure Wireless Charging Base App v04

2.5 Equipment Approval Considerations

No.	Requirements	Conditions of the EUT
1	WPT operating frequency (or frequencies).	110.5kHz-148kHz
2	Number of radiating structure (Coil)	Only one coil
3	Conducted Power for each radiating structure	The maximum power is 15W
4	§2.1091-Mobile demonstrated scenarios of operation, including RF exposure compliance information	Mobile Device
5	Maximum distance from the WPT transmitter at which, by design, a load can be charged (including slow-charging operations)	Charging with the load contact directly



Page 8 of 17

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 17

3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions	
Temperature range ($^{\circ}\!\mathbb{C}$)	15 - 35	-20 - 50	
Relative humidity range	20 % - 75 %	20 % - 75 %	
Pressure range (kPa)	86 - 106	86 - 106	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
E-Field Strength (0.003-0.4MHz)	±1.5dB
E-Field Strength (0.4-10MHz)	±1.3dB
H-Field Strength (0.003-0.4MHz)	±1.3dB
H-Field Strength (0.4-10MHz)	±1.2dB

3.5 List of Equipment Used


Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-RF-011	Broadband Field Meter	WAVECONTROL	SMP2	J-0004	2026-06-05	2027-06-04
	AGC-RF-012	Probe FHP	WAVECONTROL	WP400	J-0015	2026-06-05	2027-06-04



Page 10 of 17

4.System Test Configuration

4.1 Configuration of Tested System

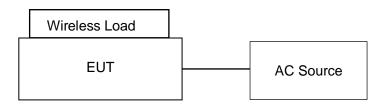

4.2 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Wireless Charging Load	YBZ	Q12	Support 5W,7.5W, 10W,15W	
2	Adapter	Xiaomi	DY-14-EU	Input: AC: 100V-240V 50/60Hz 2.0A Output: USB-A/C (DC 5V/3A;9V/3A;11V/6.1A;11V/6A; 20V2.25A)	
3	AC POWER LINE				1.2m,unshielded
4	DC Power Supply	ITECH	E3642A		

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1			-		



Page 11 of 17

5. Description of Test Modes

NO.	Test Mode Description	Exposure Conditions
1	AC input + EUT + Wireless load (Null load)	Mobile
2	AC input + EUT + Wireless load (15W)	Mobile
3	AC input + EUT + Wireless load (10W)	Mobile
4	AC input + EUT + Wireless load (7.5W)	Mobile
5	AC input + EUT + Wireless load (5W)	Mobile

Note:

- 1. Only the result of the worst case (mode 2- full load) was recorded in the report, if no other cases
- 2. The EUT supports 15W, 10W, 7.5W, 5W "wireless output, and all modes have been tested at full load, half load and null load, only the worst mode is reflected in the report.



Page 12 of 17

6. Maximum Permissible Exposure

6.1 Test Limits

Frequency Range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)			
(A) Limits for Occupational/Controlled Exposures							
0.3-3.0	614	1.63	*(100)	6			
3.0-30	1842/f	4.89/f	*(900/f2)	6			
30-300	61.4	0.163	1.0	6			
300-1500	/	/	f/300	6			
1500-100,000	/	/	5	6			
(B) Limits for General Population/Uncontrolled Exposure							
0.3-1.34	614	1.63	*(100)	30			
1.34-30	824/f	2.19/f	*(180/f2)	30			
30-300	27.5	0.073	0.2	30			
300-1500	/	/	f/1500	30			
1500-100,00	/	/	1.0	30			


- F=frequency in MHz
- *=Plane-wave equivalent power density
- RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz: 614V/m,1.63A/m).
- Per KDB 680106 D01 v04, RF exposure evaluation at 20cm surrounding the device and 20cm above the top surface. Emission between 50 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 1.63/Am and aggregate H-field strengths from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.



Page 13 of 17

6.2 Test Setup (Block Diagram of Configuration)

For Mobile Test Setup:

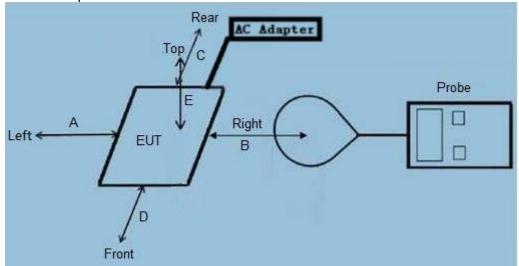

Note: The distance of the points A/B/C/D/E is 20cm.



Page 14 of 17

6.3 Test Procedures

- For Mobile Exposure Conditions:
- a) The RF exposure test was performed in anechoic chamber;
- b) E and H-field measurements should be made with the center of the probe at a distance of 20cm surrounding the EUT.
- c) The highest emission level was recorded and compared with limit.
- d) The EUT was measured according to the dictates of KDB 680106 v04.



6.4 Test Result

Mobile devices are evaluated as follows:

Worst Mode	Test Position	Distance (cm)	H-Field Strength (A/m)	Limit (A/m)	Result
Mode 2	Side A	20	0.265	1.63	Pass
Mode 2	Side B	20	0.214	1.63	Pass
Mode 2	Side C	20	0.195	1.63	Pass
Mode 2	Side D	20	0.223	1.63	Pass
Mode 2	Side E	20	0.187	1.63	Pass

Report No.: AGC01741250501FH01

Page 15 of 17

Worst Mode	Test Position	Distance (cm)	E-Field Strength (V/m)	Limit (V/m)	Result
Mode 2	Side A	20	0.842	614	Pass
Mode 2	Side B	20	0.851	614	Pass
Mode 2	Side C	20	0.786	614	Pass
Mode 2	Side D	20	0.689	614	Pass
Mode 2	Side E	20	0.647	614	Pass



Page 16 of 17

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01741250501AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01741250501AP02



Page 17 of 17

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

----End of Report----