



Radio Test Report

Report No.: STS2508054W01

Issued for

Raythink Technology Co.,Ltd.

No.5, Wanshoushan Road, Yantai, Shandong, P.R.China

Product Name: CX20 Series Handheld Thermal Camera

Brand Name: Raythink

Model Name: CX20 Ultra

Series Model(s): CX20 Pro, CX20

FCC ID: 2BPTH-CX20

Test Standards: FCC Part15.407

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: Raythink Technology Co.,Ltd.
Address: No.5, Wanshoushan Road, Yantai, Shandong, P.R.China
Manufacturer's Name: Raythink Technology Co.,Ltd.
Address: No.5, Wanshoushan Road, Yantai, Shandong, P.R.China

Product Description

Product Name: CX20 Series Handheld Thermal Camera
Brand Name: Raythink
Model Name: CX20 Ultra
Series Model(s): CX20 Pro, CX20

Test Standards: FCC Part15.407

Test Procedure ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item: 06 May 2025

Date (s) of performance of tests: 06 May 2025~11 June 2025

Date of Issue: 12 Aug. 2025

Test Result: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.6 EQUIPMENTS LIST	14
3. EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION AND MEASUREMENT	19
4. POWER SPECTRAL DENSITY TEST	35
4.1 LIMIT	35
4.2 TEST PROCEDURE	35
4.3 DEVIATION FROM STANDARD	36
4.4 TEST SETUP	36
4.5 EUT OPERATION CONDITIONS	36
4.6 TEST RESULTS	36
5. BANDWIDTH MEASUREMENT	37
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	37
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	38
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	39
6. MAXIMUM OUTPUT POWER	40
6.1 LIMIT	40
6.2 TEST PROCEDURE	40
6.3 DEVIATION FROM STANDARD	40
6.4 TEST SETUP	40
6.5 EUT OPERATION CONDITIONS	40
6.6 TEST RESULTS	40
7. AUTOMATICALLY DISCONTINUE TRANSMISSION	41
7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	41
7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	41
8. ANTENNA REQUIREMENT	42



Table of Contents	Page
8.1 STANDARD REQUIREMENT	42
8.2 EUT ANTENNA	42
APPENDIX 1-TEST DATA	43
APPENDIX - PHOTOS OF TEST SETUP	91

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	12 Aug. 2025	STS2508054W01	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

Note:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add.: 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	CX20 Series Handheld Thermal Camera															
Brand Name	Raythink															
Model Name	CX20 Ultra															
Series Model(s)	CX20 Pro, CX20															
Model Difference	The difference between CX20 Ultra and CX20 Pro/CX20 is the FOV. The CX20 does not have laser function, the CX20 Pro has laser pointer, the CX20 Ultra has laser pointer and laser ranging. All models have the same technical structure including circuit diagram, PCB Layout, components and component layout, etc. The differences do not affect the test results.															
Product Description	The EUT is CX20 Series Handheld Thermal Camera <table><tr><td rowspan="3">Operation Frequency:</td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz</td></tr><tr><td>IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz</td></tr><tr><td>IEEE 802.11ac(VHT80): 5.210GHz</td></tr><tr><td rowspan="3">Modulation Type:</td><td>IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz</td></tr><tr><td>IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz</td></tr><tr><td>IEEE 802.11ac(VHT80): 5.775GHz</td></tr><tr><td>Antenna Type:</td><td>Internal Antenna</td></tr><tr><td>Antenna Gain:</td><td>4.99dBi</td></tr><tr><td>Max.Output Power(Conducted):</td><td>UNII-1: 10.63dBm UNII-3: 7.58dBm</td></tr></table> More details of EUT technical specification, please refer to the User Manual.		Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz	IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz	IEEE 802.11ac(VHT80): 5.210GHz	Modulation Type:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz	IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz	IEEE 802.11ac(VHT80): 5.775GHz	Antenna Type:	Internal Antenna	Antenna Gain:	4.99dBi	Max.Output Power(Conducted):	UNII-1: 10.63dBm UNII-3: 7.58dBm
Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz															
	IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz															
	IEEE 802.11ac(VHT80): 5.210GHz															
Modulation Type:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz															
	IEEE 802.11n(HT40)/ac(VHT40): 5.755GHz-5.795GHz															
	IEEE 802.11ac(VHT80): 5.775GHz															
Antenna Type:	Internal Antenna															
Antenna Gain:	4.99dBi															
Max.Output Power(Conducted):	UNII-1: 10.63dBm UNII-3: 7.58dBm															
Test Channel	Please refer to the Note 3.															
Power Rating	N/A															
Adapter	Model: LX18AA-120300-ZX Manufacturer: Shenzhen LvXiangYuan Technology Co., Ltd. Brand: N/A Input: 100-240VAC 50/60Hz 0.7A Output: 5.0V 3.0A 9.0V 2.0A 12.0V 1.5A															
Battery	Model: B293-1 Brand: N/A Rated Voltage: 3.6V Capacity: 5000mAh/18Wh															
Hardware version number	V1_1															
Software version number	106															
Connecting I/O Port(s)	Please refer to the Note 1.															

Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna details in this report are based on the manufacturer provided antenna specification documents and apply only to the tested sample identified herein.
Any discrepancies in the antenna information may affect the accuracy of the test results, and the customer assumes responsibility for any related issues.

3.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	157	5785
44	5220	159	5795
46	5230	161	5805
48	5240	165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20)/ac(VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	155	5775

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 3	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 4	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 6	TX IEEE 802.11ac VHT20 CH149&CH157&CH165	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 8	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 10	TX IEEE 802.11ac VHT40 CH151&CH159	NSS1 MCS0
Mode 11	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 12	TX IEEE 802.11ac VHT80 CH155	NSS1 MCS0

Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 13: Keeping TX + WLAN Link

2.3 TEST SOFTWARE AND POWER LEVEL


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(5G)	U-NII-1 (5150MHz-5250MHz)	802.11a	4.99	Default	SecureCRT 7.0.0.326
		802.11n(HT20)		Default	
		802.11n(HT40)		Default	
		802.11ac(VHT20)		Default	
		802.11ac(VHT40)		Default	
		802.11ac(VHT80)		Default	


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(5G)	U-NII-3 (5725MHz-5895MHz)	802.11a	4.99	Default	SecureCR T 7.0.0.326
		802.11n(HT20)		Default	
		802.11n(HT40)		Default	
		802.11ac(VHT20)		Default	
		802.11ac(VHT40)		Default	
		802.11ac(VHT80)		Default	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Spurious Emission Test

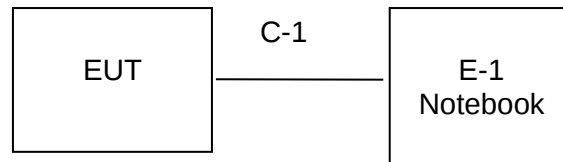

Conducted Emission Test

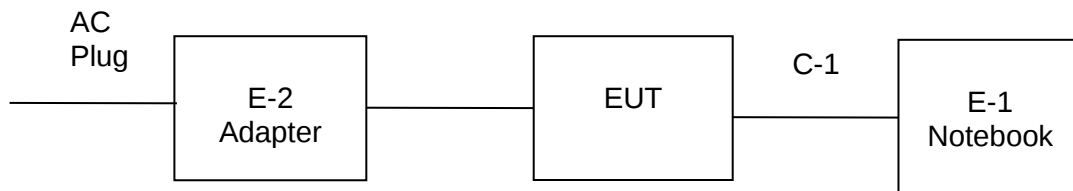

RF Conducted Test

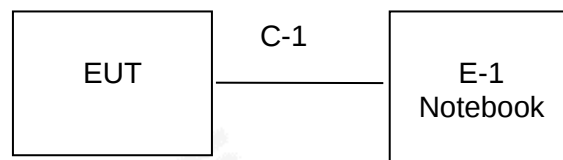

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Notebook	DELL	Inspiron 3501	N/A
E-2	Adapter	N/A	LX18AA-120300-ZX	N/A
C-1	Serial port board	XES	WTYZK	N/A

Item	Equipment	Mfr/Brand	Length	Note
N/A	N/A	N/A	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2024.09.23	2025.09.22
Pre-Amplifier(18G-40GHz)	SKET	LNPA 1840-50	SK2018101801	2025.02.22	2026.02.21
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2026.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2024.09.30	2025.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2024.09.23	2025.09.22
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFE NG	DPS-305AF	17064939	2024.09.23	2025.09.22
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2024.09.24	2025.09.23
Limtter	CYBERTEK	EM5010	N/A	2024.09.24	2025.09.23
LISN	R&S	ENV216	101242	2024.09.24	2025.09.23
LISN	EMCO	3810/2NM	23625	2024.09.24	2025.09.23
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Keysight	N9020A	MY50510102	2024.09.23	22025.09.22
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	MW	MTS 8310_2.0.0.0			

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

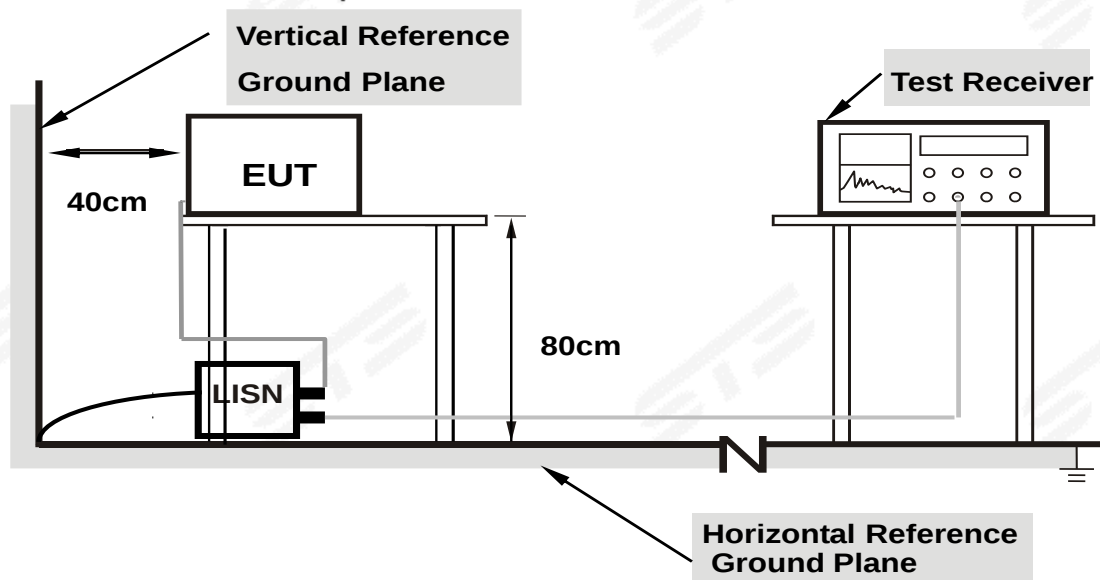

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 13		

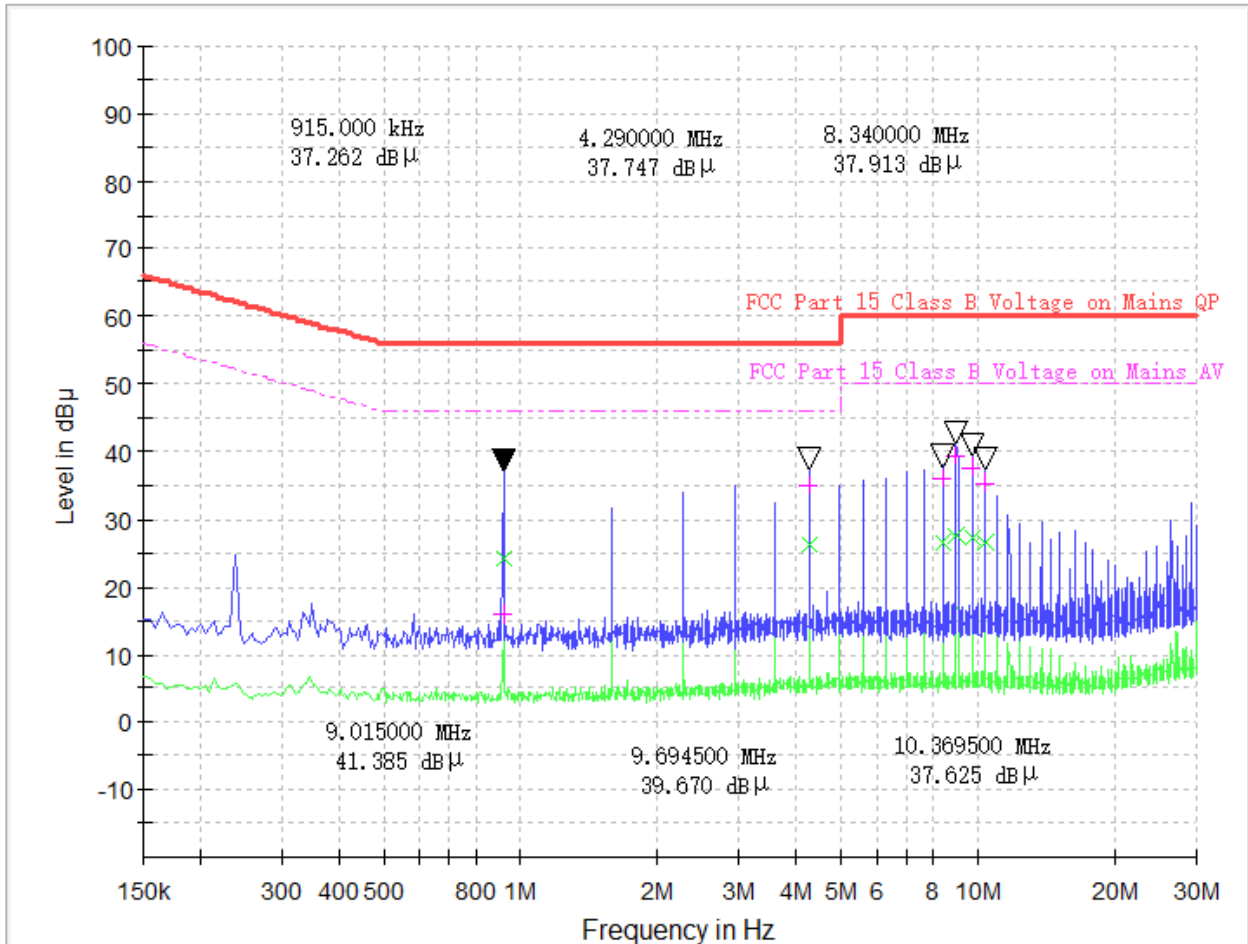


Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Corr.Factor (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)	Margin - AV (dB)	Limit - AV (dBμV)
0.915000	15.90	24.30	10.6	40.10	56.00	21.70	46.00
4.290000	35.10	26.28	10.2	20.90	56.00	19.72	46.00
8.340000	35.97	26.63	10.3	24.03	60.00	23.37	50.00
9.015000	39.48	27.73	10.4	20.52	60.00	22.27	50.00
9.694500	37.78	27.18	10.5	22.22	60.00	22.82	50.00
10.369500	35.46	26.55	10.5	24.54	60.00	23.45	50.00

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode :	Mode 13		

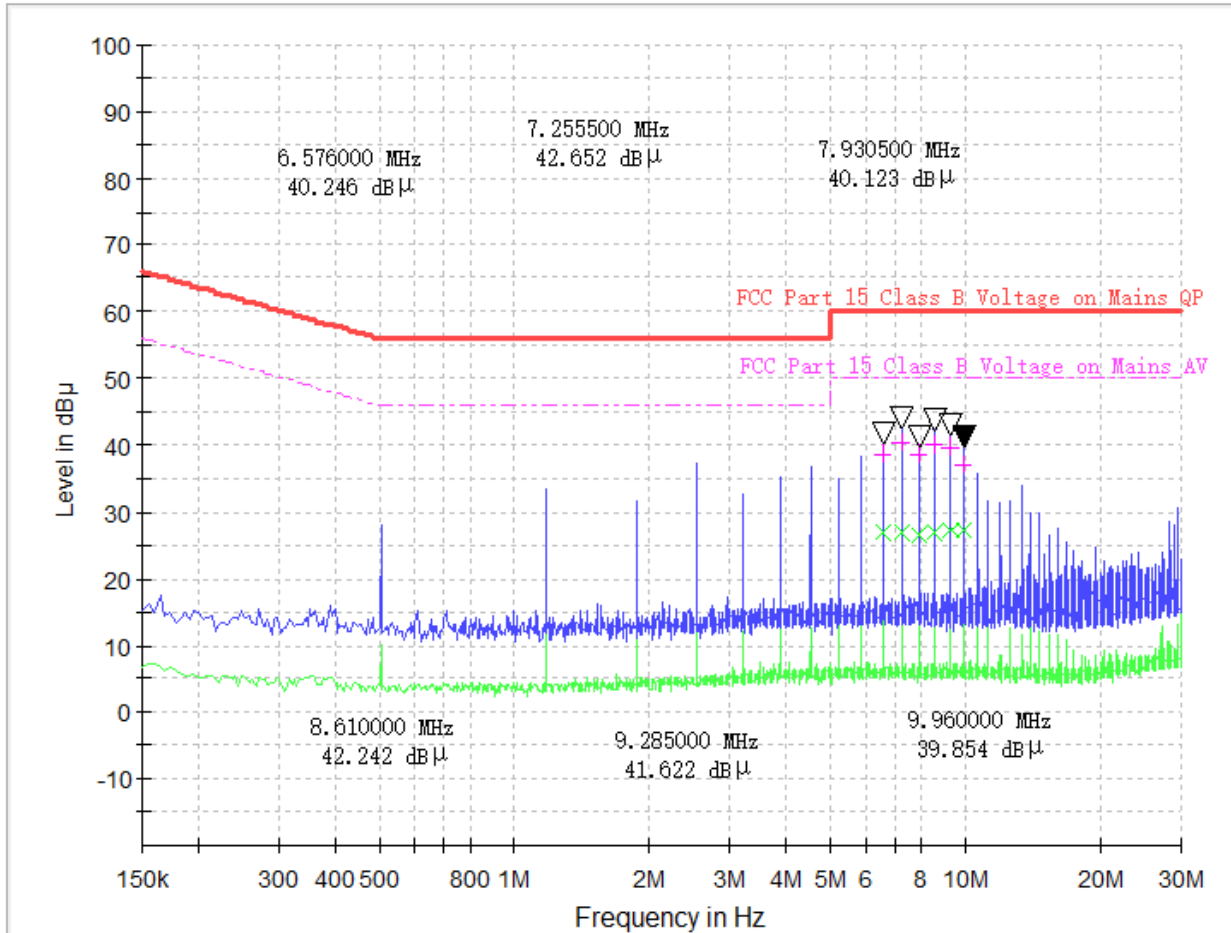

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Corr.Factor (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dBμV)
6.576000	38.80	26.85	10.2	21.20	60.00	23.15	50.00
7.255500	40.19	26.77	10.3	19.81	60.00	23.23	50.00
7.930500	38.62	26.53	10.3	21.38	60.00	23.47	50.00
8.610000	40.08	26.85	10.3	19.92	60.00	23.15	50.00
9.285000	39.58	27.42	10.4	20.42	60.00	22.58	50.00
9.960000	37.12	27.18	10.4	22.88	60.00	22.82	50.00

3.2 RADIATED EMISSION AND MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: dBuV/m(at 3M) = EIRP(dBm) + 95.2.

Peak Limit = -27dBm/MHz + 95.2 = 68.2 dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge



Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

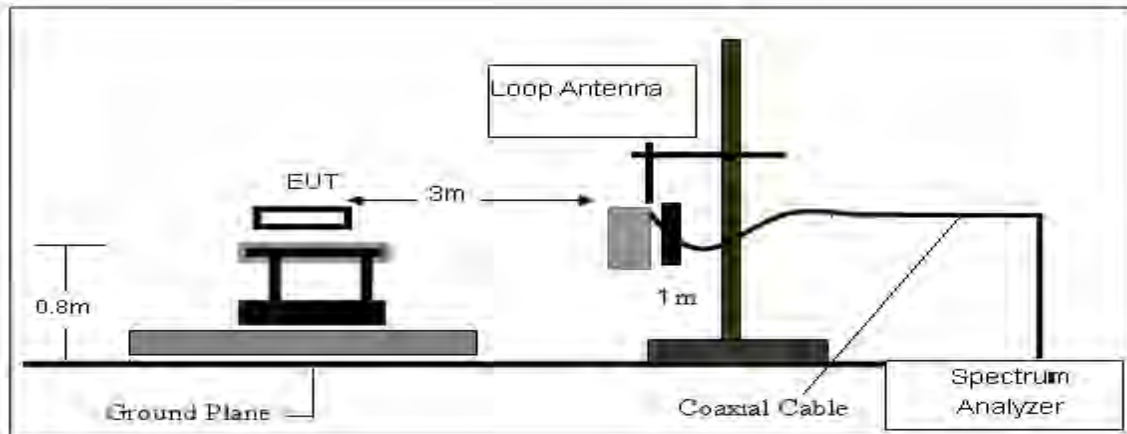

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

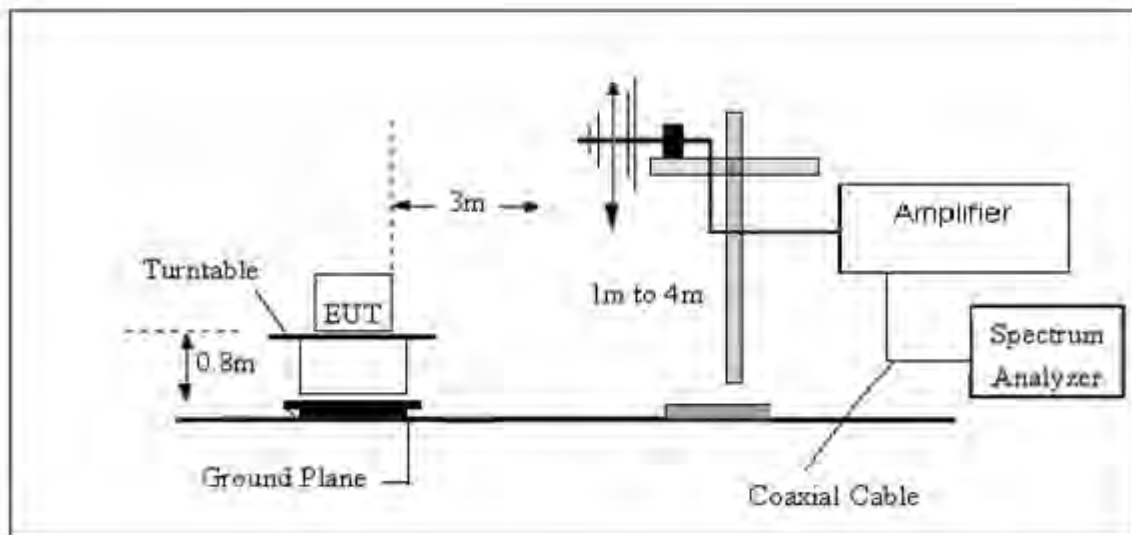

(C) Radiated Emission Test-Up Frequency Above 1GHz

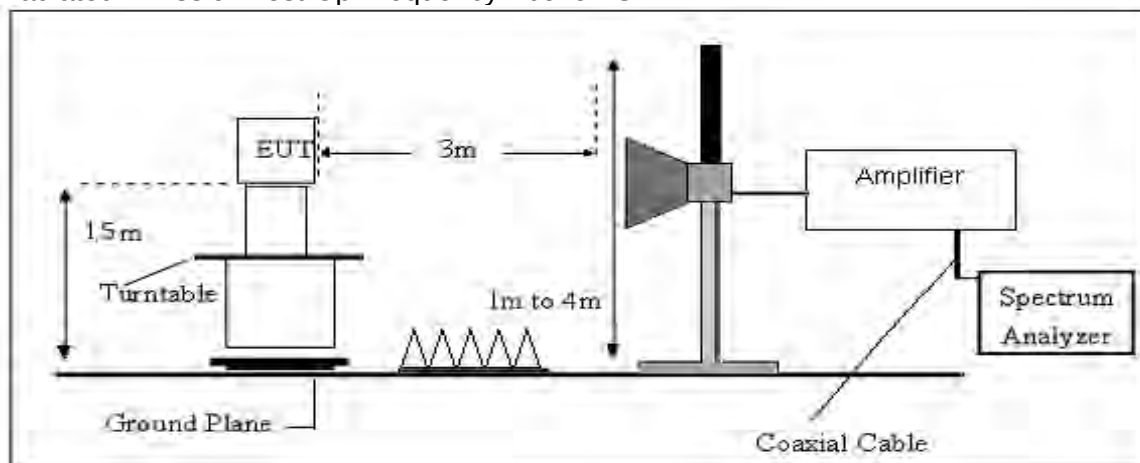

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.2.7 TEST RESULTS (Between 9KHz – 30 MHz)

Temperature:	24°C	Relative Humidity:	54%
Test Voltage:	DC 3.6V	Polarization :	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

3.2.8 TEST RESULTS (Between 30MHz – 1GHz)

Temperature	24°C	Relative Humidity:	54%
Test Voltage	DC 3.6V	Polarization:	Horizontal
Test Mode	5G WIFI - TX		

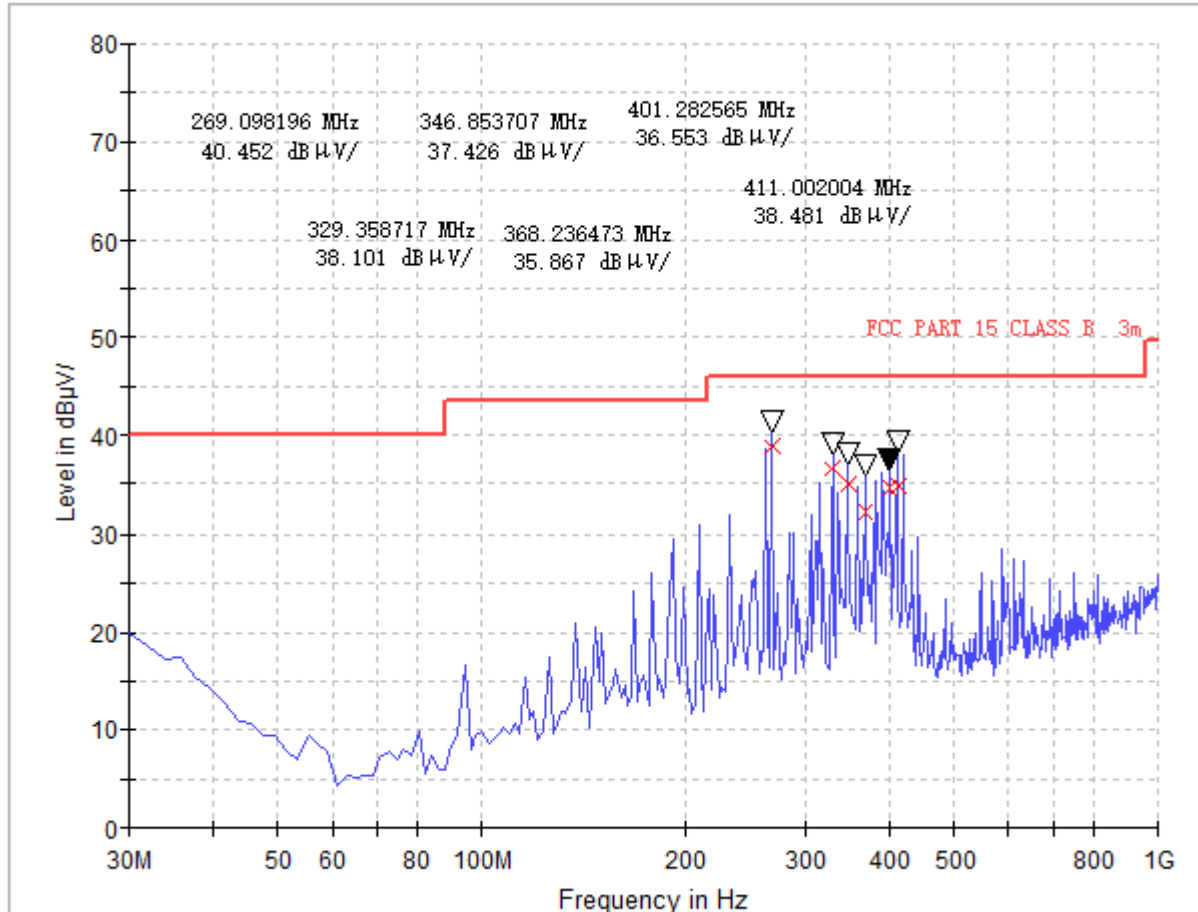


Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Polarity	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
269.080000	38.85	120.000	100.0	H	14.1	7.15	46.0
329.360000	36.65	120.000	100.0	H	15.6	9.35	46.0
346.840000	35.10	120.000	100.0	H	16.0	10.90	46.0
368.240000	32.14	120.000	100.0	H	16.4	13.86	46.0
401.280000	34.74	120.000	100.0	H	16.9	11.26	46.0
411.000000	34.83	120.000	100.0	H	17.1	11.17	46.0

Temperature	24°C	Relative Humidity:	54%
Test Voltage	DC 3.6V	Polarization:	Vertical
Test Mode	5G WIFI - TX		

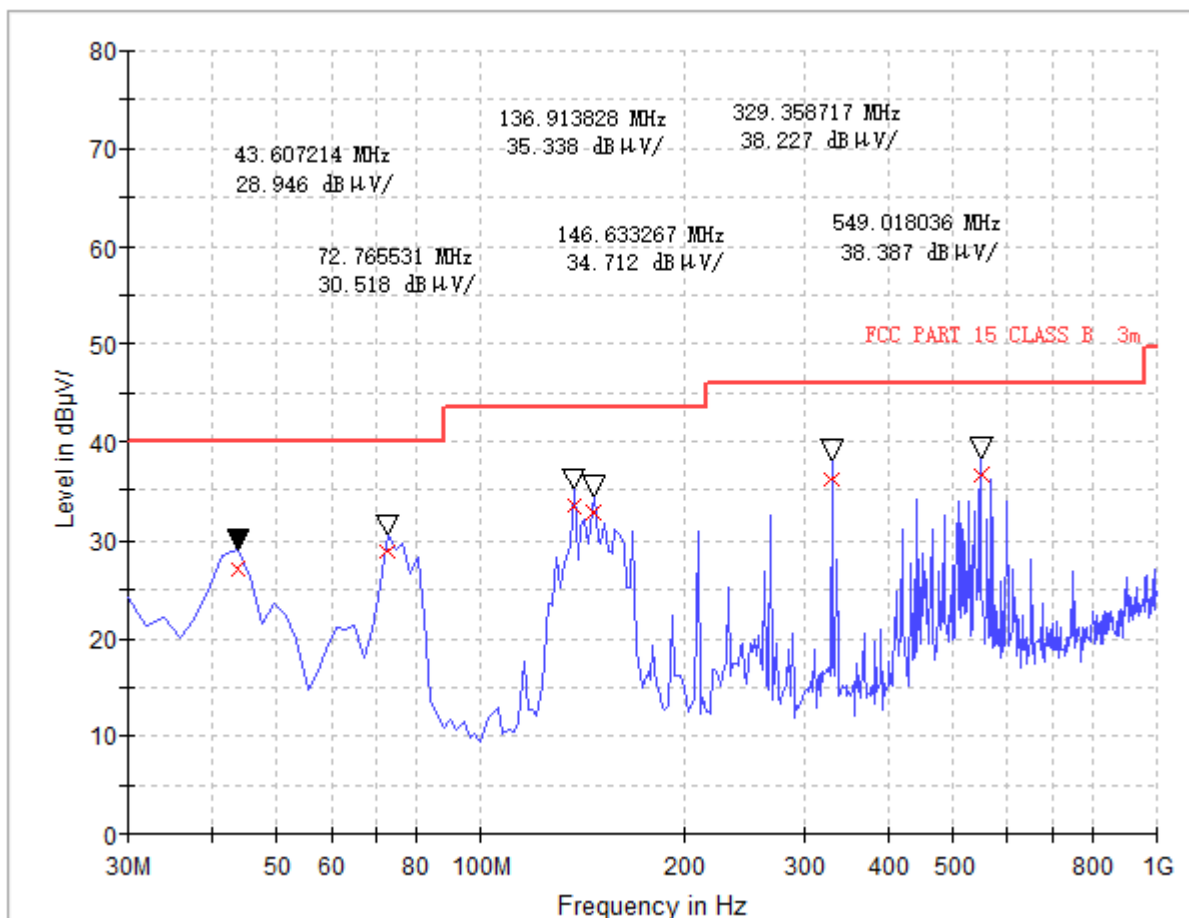

Remark:

3. Margin = Result (Result = Reading + Factor) - Limit

4. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Polarity	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
43.600000	27.06	120.000	100.0	V	12.2	12.94	40.0
72.760000	28.90	120.000	100.0	V	6.8	11.10	40.0
136.920000	33.52	120.000	100.0	V	11.7	9.98	43.5
146.640000	32.83	120.000	100.0	V	12.0	10.67	43.5
329.360000	36.30	120.000	100.0	V	15.6	9.70	46.0
549.000000	36.57	120.000	100.0	V	18.6	9.43	46.0

3.2.8 TEST RESULTS (Above 1000 MHz)

U-NII-1 5150-5250MHz

U-NII-1_802.11a_5180MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	49.93	68.20	-18.27	1.50	220	49.49	0.44	Horizontal	Peak
5150.00	40.51	54.00	-13.49	1.50	220	40.07	0.44	Horizontal	Average
10360.00	54.86	68.20	-13.34	1.50	220	44.40	10.46	Horizontal	Peak
10360.00	44.88	54.00	-9.12	1.50	220	34.42	10.46	Horizontal	Average
5150.00	51.60	68.20	-16.60	1.50	200	51.16	0.44	Vertical	Peak
5150.00	41.60	54.00	-12.40	1.50	200	41.16	0.44	Vertical	Average
10360.00	54.73	68.20	-13.47	1.50	200	44.27	10.46	Vertical	Peak
10360.00	44.49	54.00	-9.51	1.50	200	34.03	10.46	Vertical	Average
U-NII-1_802.11a_5220MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.60	68.20	-13.60	1.50	220	43.80	10.80	Horizontal	Peak
10440.00	45.08	54.00	-8.92	1.50	220	34.28	10.80	Horizontal	Average
10440.00	54.48	68.20	-13.72	1.50	200	43.68	10.80	Vertical	Peak
10440.00	44.16	54.00	-9.84	1.50	200	33.36	10.80	Vertical	Average
U-NII-1_802.11a_5240MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	49.04	68.20	-19.16	1.50	220	48.79	0.25	Horizontal	Peak
5350.00	40.52	54.00	-13.48	1.50	220	40.27	0.25	Horizontal	Average
10480.00	54.75	68.20	-13.45	1.50	220	43.75	11.00	Horizontal	Peak
10480.00	44.46	54.00	-9.54	1.50	220	33.46	11.00	Horizontal	Average
5350.00	49.00	68.20	-19.20	1.50	200	48.75	0.25	Vertical	Peak
5350.00	40.41	54.00	-13.59	1.50	200	40.16	0.25	Vertical	Average
10480.00	54.61	68.20	-13.59	1.50	200	43.61	11.00	Vertical	Peak
10480.00	44.58	54.00	-9.42	1.50	200	33.58	11.00	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. Only the antenna height (from 1m to 4m) and turntable angle (from 0 degrees to 360 degrees) at maximum reading are recorded.									

[illegible]



U-NII-1_802.11ac-VHT80_5210MHz

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	50.68	68.20	-17.52	1.50	220	50.24	0.44	Horizontal	Peak
5150.00	39.68	54.00	-14.32	1.50	220	39.24	0.44	Horizontal	Average
5350.00	49.71	68.20	-18.49	1.50	220	49.46	0.25	Horizontal	Peak
5350.00	39.15	54.00	-14.85	1.50	220	38.90	0.25	Horizontal	Average
10420.00	53.67	68.20	-14.53	1.50	220	42.96	10.71	Horizontal	Peak
10420.00	44.25	54.00	-9.75	1.50	220	33.54	10.71	Horizontal	Average
5150.00	51.88	68.20	-16.32	1.50	200	51.44	0.44	Vertical	Peak
5150.00	41.57	54.00	-12.43	1.50	200	41.13	0.44	Vertical	Average
5350.00	51.66	68.20	-16.54	1.50	200	51.41	0.25	Vertical	Peak
5350.00	41.48	54.00	-12.52	1.50	200	41.23	0.25	Vertical	Average
10420.00	53.84	68.20	-14.36	1.50	200	43.13	10.71	Vertical	Peak
10420.00	44.48	54.00	-9.52	1.50	200	33.77	10.71	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3 (5.725-5.850) GHz

U-NII-3_802.11a_5745MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	56.20	68.20	-12.00	1.50	230	55.40	0.80	Horizontal	Peak
5700.00	56.36	105.20	-48.84	1.50	230	55.12	1.24	Horizontal	Peak
5720.00	56.44	110.80	-54.36	1.50	230	55.16	1.28	Horizontal	Peak
5725.00	57.34	122.20	-64.86	1.50	230	56.04	1.30	Horizontal	Peak
11490.00	53.31	68.20	-14.89	1.50	230	41.76	11.55	Horizontal	Peak
11490.00	43.65	54.00	-10.35	1.50	230	32.10	11.55	Horizontal	Average
5650.00	55.53	68.20	-12.67	1.50	170	54.73	0.80	Vertical	Peak
5700.00	56.77	105.20	-48.43	1.50	170	55.53	1.24	Vertical	Peak
5720.00	57.50	110.80	-53.30	1.50	170	56.22	1.28	Vertical	Peak
5725.00	57.59	122.20	-64.61	1.50	170	56.29	1.30	Vertical	Peak
11490.00	52.74	68.20	-15.46	1.50	170	41.19	11.55	Vertical	Peak
11490.00	44.20	54.00	-9.80	1.50	170	32.65	11.55	Vertical	Average
U-NII-3_802.11a_5825MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	57.18	122.20	-65.02	1.50	230	55.36	1.82	Horizontal	Peak
5855.00	57.16	110.80	-53.64	1.50	230	55.31	1.85	Horizontal	Peak
5875.00	56.29	105.20	-48.91	1.50	230	54.31	1.98	Horizontal	Peak
5925.00	57.21	68.20	-10.99	1.50	230	55.09	2.12	Horizontal	Peak
11650.00	53.56	68.20	-14.64	1.50	230	41.92	11.64	Horizontal	Peak
11650.00	43.34	54.00	-10.66	1.50	230	31.70	11.64	Horizontal	Average
5850.00	56.64	122.20	-65.56	1.50	170	54.82	1.82	Vertical	Peak
5855.00	56.87	110.80	-53.93	1.50	170	55.02	1.85	Vertical	Peak
5875.00	56.18	105.20	-49.02	1.50	170	54.20	1.98	Vertical	Peak
5925.00	56.87	68.20	-11.33	1.50	170	54.75	2.12	Vertical	Peak
11650.00	52.61	68.20	-15.59	1.50	170	40.97	11.64	Vertical	Peak
11650.00	44.49	54.00	-9.51	1.50	170	32.85	11.64	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. Tnly the antenna height (from 1m to 4m) and turntable angle (from 0 degrees to 360 degrees) at maximum reading are recorded.									

[illegible]

U-NII-3_802.11ac-VHT80_5775MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	56.25	68.20	-11.95	1.50	230	55.45	0.80	Horizontal	Peak
5700.00	56.52	105.20	-48.68	1.50	230	55.28	1.24	Horizontal	Peak
5720.00	56.30	110.80	-54.50	1.50	230	55.02	1.28	Horizontal	Peak
5725.00	57.56	122.20	-64.64	1.50	230	56.26	1.30	Horizontal	Peak
5850.00	57.07	122.20	-65.13	1.50	230	55.25	1.82	Horizontal	Peak
5855.00	56.87	110.80	-53.93	1.50	230	55.02	1.85	Horizontal	Peak
5875.00	56.17	105.20	-49.03	1.50	230	54.19	1.98	Horizontal	Peak
5925.00	56.83	68.20	-11.37	1.50	230	54.71	2.12	Horizontal	Peak
11550.00	53.46	68.20	-14.74	1.50	230	41.92	11.54	Horizontal	Peak
11550.00	43.53	54.00	-10.47	1.50	230	31.99	11.54	Horizontal	Average
5650.00	56.13	68.20	-12.07	1.50	170	55.33	0.80	Vertical	Peak
5700.00	56.76	105.20	-48.44	1.50	170	55.52	1.24	Vertical	Peak
5720.00	58.12	110.80	-52.68	1.50	170	56.84	1.28	Vertical	Peak
5725.00	57.28	122.20	-64.92	1.50	170	55.98	1.30	Vertical	Peak
5850.00	55.81	122.20	-66.39	1.50	170	53.99	1.82	Vertical	Peak
5855.00	57.59	110.80	-53.21	1.50	170	55.74	1.85	Vertical	Peak
5875.00	56.59	105.20	-48.61	1.50	170	54.61	1.98	Vertical	Peak
5925.00	56.83	68.20	-11.37	1.50	170	54.71	2.12	Vertical	Peak
11550.00	52.25	68.20	-15.95	1.50	170	40.71	11.54	Vertical	Peak
11550.00	44.27	54.00	-9.73	1.50	170	32.73	11.54	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4.The emission levels of other frequencies are very lower than the limit and not show in test report.									



3.2.9 TEST RESULTS(Band edge Requirements)

Note: Please refer to APPENDIX A for detail.

4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

Note: Please refer to APPENDIX A for detail.

5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth

5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Note: Please refer to APPENDIX A for detail.

5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP

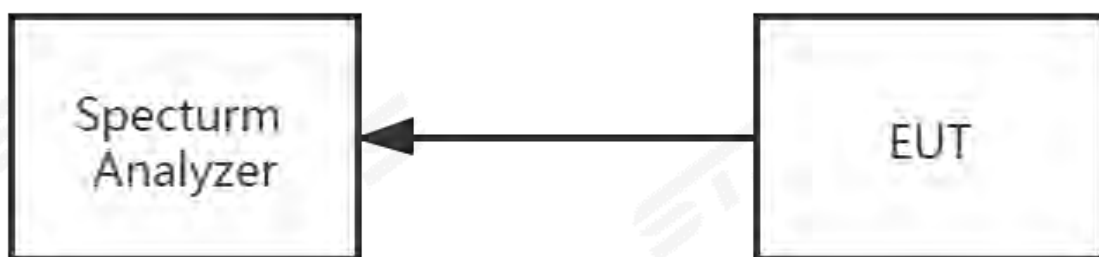

5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5 TEST RESULTS

Note: Please refer to APPENDIX A for detail.

5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.5 TEST RESULTS

Note: Please refer to APPENDIX A for detail.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Max Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5895	


6.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

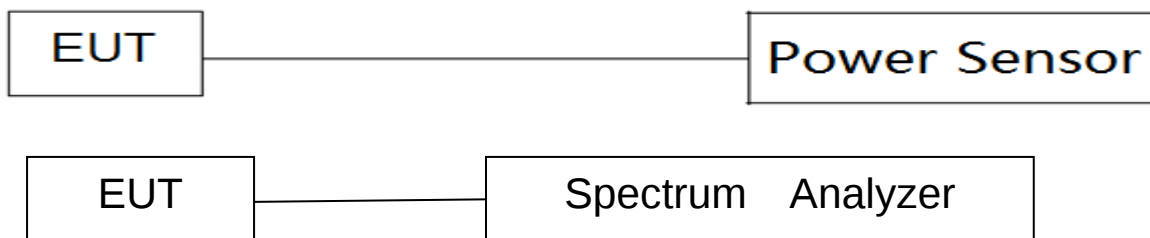

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Note: Please refer to APPENDIX A for detail.

7. AUTOMATICALLY DISCONTINUE TRANSMISSION

7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is Internal Antenna. It comply with the standard requirement.

**APPENDIX 1-TEST DATA****DUTY CYCLE****TEST RESULT AND DATA**

Test Mode	Antenna	Frequency[MHz]	ON Time[ms]	Period[ms]	Duty Cycle[%]	DC Factor
11A	Ant1	5180	0.25	0.40	62.50	2.04
11N20SISO	Ant1	5180	0.22	0.48	45.83	3.39
11N40SISO	Ant1	5190	0.13	0.30	43.33	3.63
11AC20SISO	Ant1	5180	0.20	0.34	58.82	2.30
11AC40SISO	Ant1	5190	0.11	0.26	42.31	3.74
11AC80SISO	Ant1	5210	0.07	0.33	21.21	6.73



TEST GRAPHS





**MAXIMUM CONDUCTED OUTPUT POWER****TEST RESULT AND DATA**


Test Mode	Antenna	Frequency [MHz]	SA Reading [dBm]	DC Factor [dBm]	Result [dBm]	Power Limit [dBm]	Verdict
11A	Ant1	5180	6.69	2.04	8.73	≤23.98	PASS
11A	Ant1	5200	6.91	2.04	8.95	≤23.98	PASS
11A	Ant1	5240	7.37	2.04	9.41	≤23.98	PASS
11N20SISO	Ant1	5180	5.93	3.39	9.32	≤23.98	PASS
11N20SISO	Ant1	5200	6.58	3.39	9.97	≤23.98	PASS
11N20SISO	Ant1	5240	7.24	3.39	10.63	≤23.98	PASS
11N40SISO	Ant1	5190	5.67	3.63	9.30	≤23.98	PASS
11N40SISO	Ant1	5230	6.21	3.63	9.84	≤23.98	PASS
11AC20SISO	Ant1	5180	4.24	2.30	6.54	≤23.98	PASS
11AC20SISO	Ant1	5200	4.49	2.30	6.79	≤23.98	PASS
11AC20SISO	Ant1	5240	5.05	2.30	7.35	≤23.98	PASS
11AC40SISO	Ant1	5190	3.76	3.74	7.50	≤23.98	PASS
11AC40SISO	Ant1	5230	4.09	3.74	7.83	≤23.98	PASS
11AC80SISO	Ant1	5210 ¹	2.22	6.73	8.95	≤23.98	PASS

Note : Result = SA Reading + DC Factor.

TEST GRAPHS

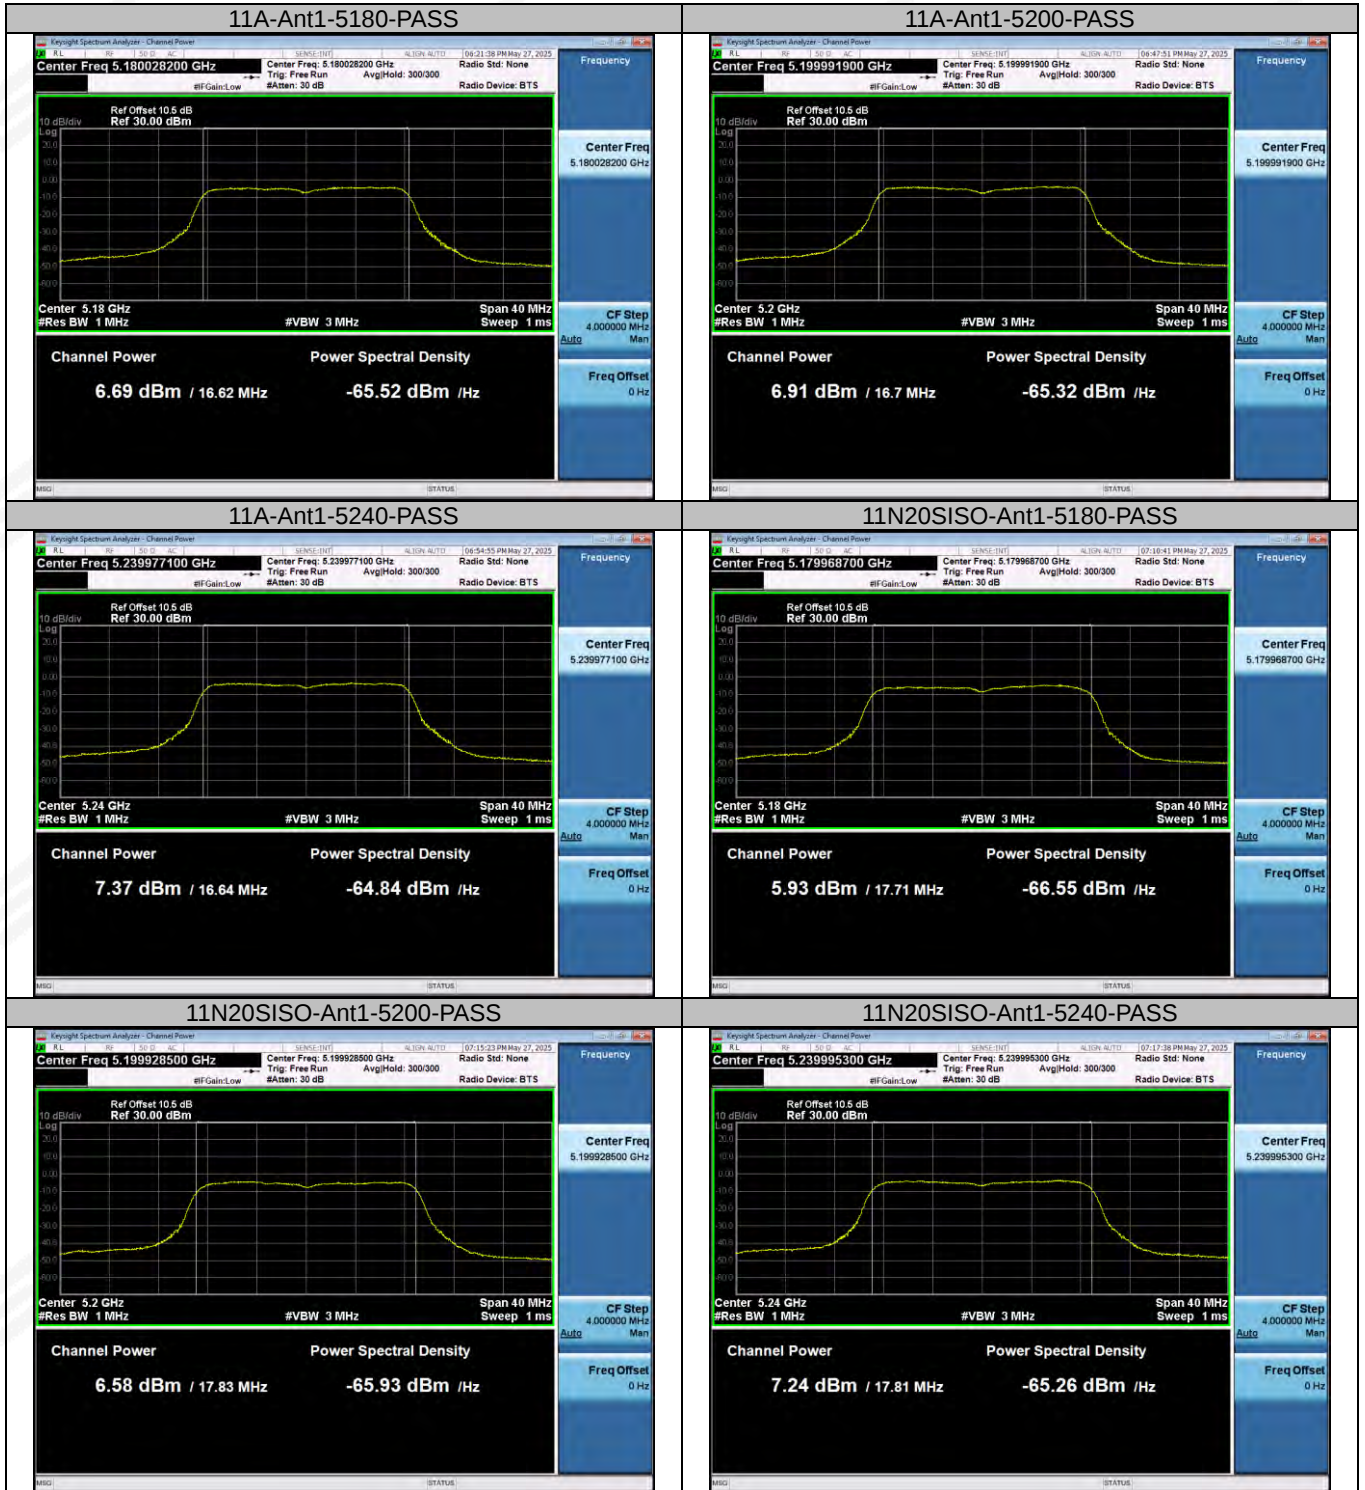

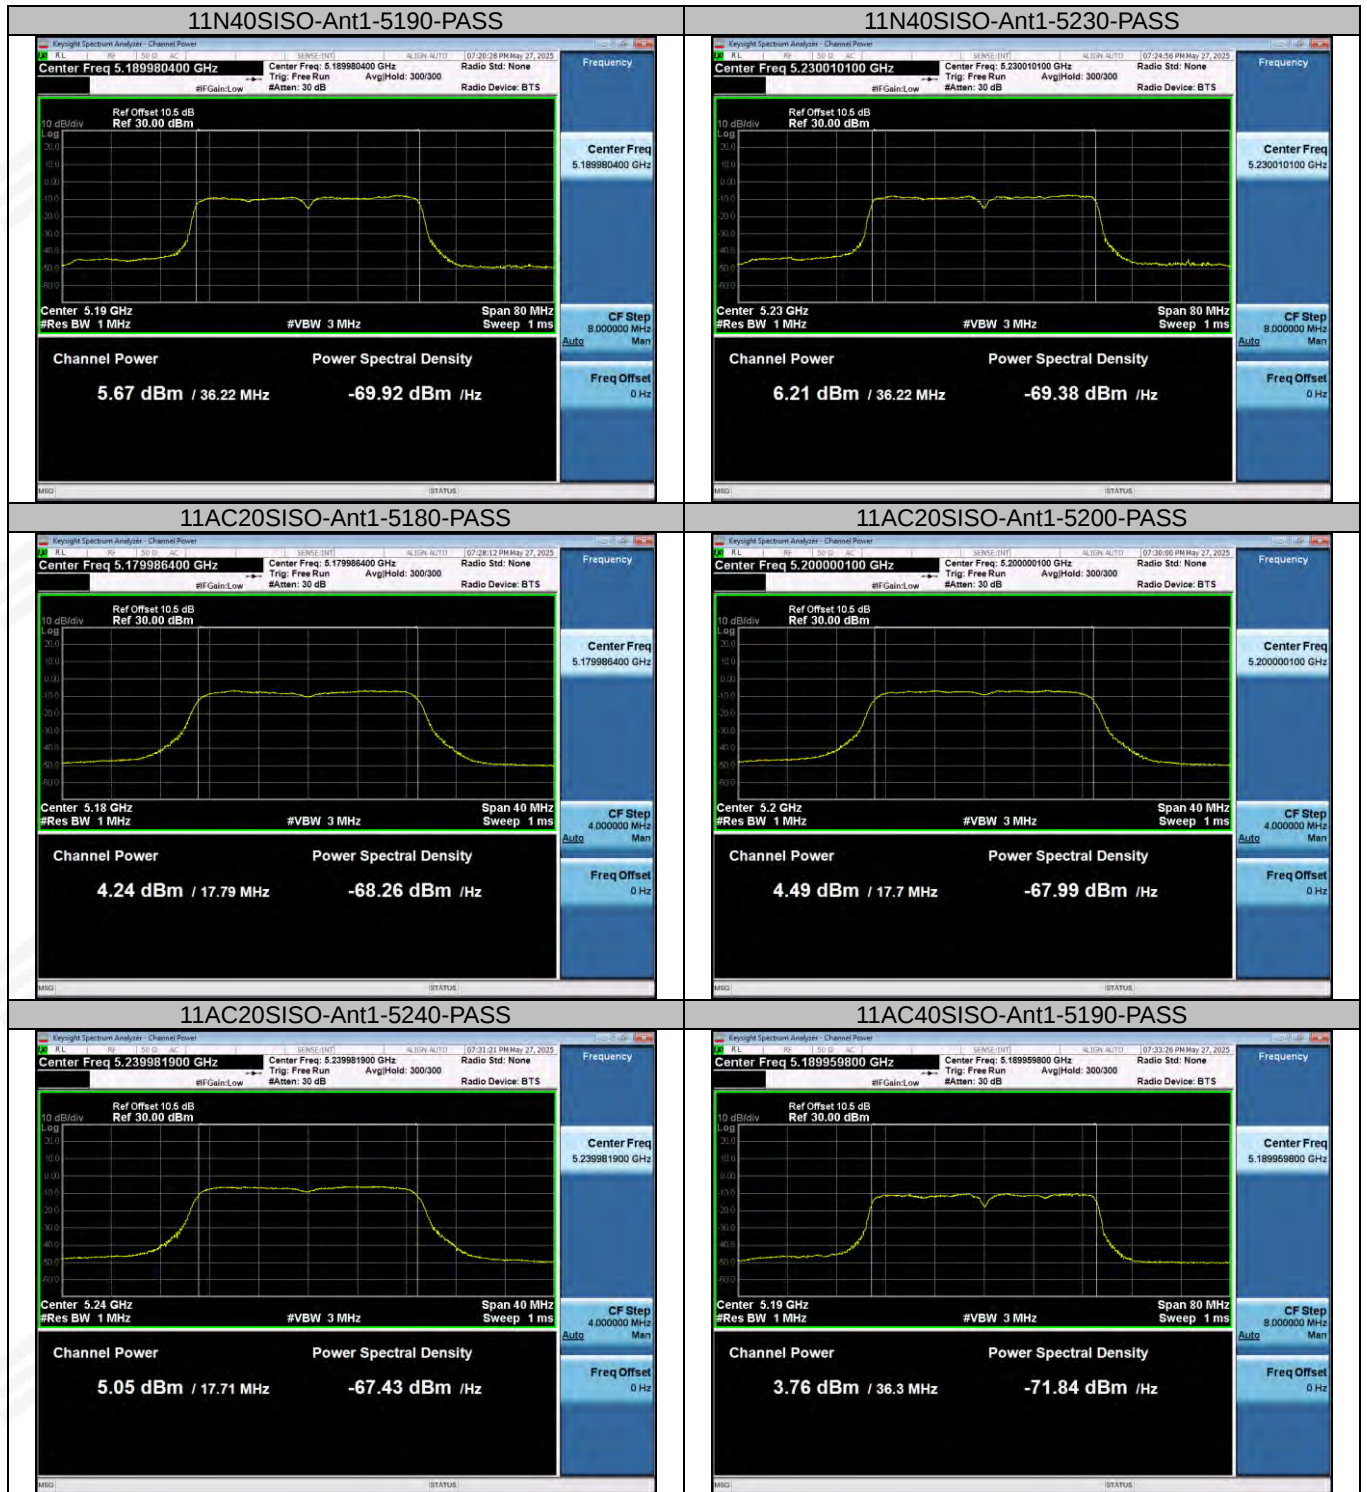

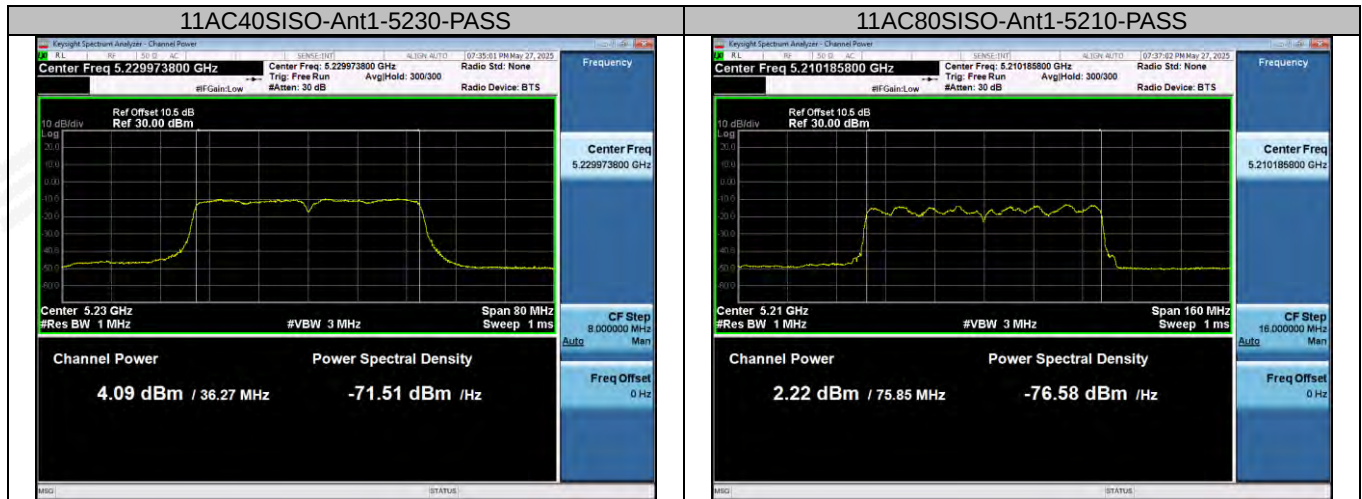


**POWER SPECTRAL DENSITY****TEST RESULT AND DATA**

Test Mode	Antenna	Frequency[MHz]	SA Reading [dBm/MHz]	DC Factor [dBm]	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	-3.565	2.04	-1.53	≤11.00	PASS
11A	Ant1	5200	-3.946	2.04	-1.91	≤11.00	PASS
11A	Ant1	5240	-2.671	2.04	-0.63	≤11.00	PASS
11N20SISO	Ant1	5180	-4.085	3.39	-0.70	≤11.00	PASS
11N20SISO	Ant1	5200	-4.265	3.39	-0.88	≤11.00	PASS
11N20SISO	Ant1	5240	-3.533	3.39	-0.14	≤11.00	PASS
11N40SISO	Ant1	5190	-7.975	3.63	-4.35	≤11.00	PASS
11N40SISO	Ant1	5230	-7.356	3.63	-3.73	≤11.00	PASS
11AC20SISO	Ant1	5180	-6.619	2.30	-4.32	≤11.00	PASS
11AC20SISO	Ant1	5200	-6.114	2.30	-3.81	≤11.00	PASS
11AC20SISO	Ant1	5240	-5.578	2.30	-3.28	≤11.00	PASS
11AC40SISO	Ant1	5190	-9.914	3.74	-6.17	≤11.00	PASS
11AC40SISO	Ant1	5230	-9.288	3.74	-5.55	≤11.00	PASS
11AC80SISO	Ant1	5210	-12.557	6.73	-5.83	≤11.00	PASS

Note : Result = SA Reading + DC Factor.




TEST GRAPHS

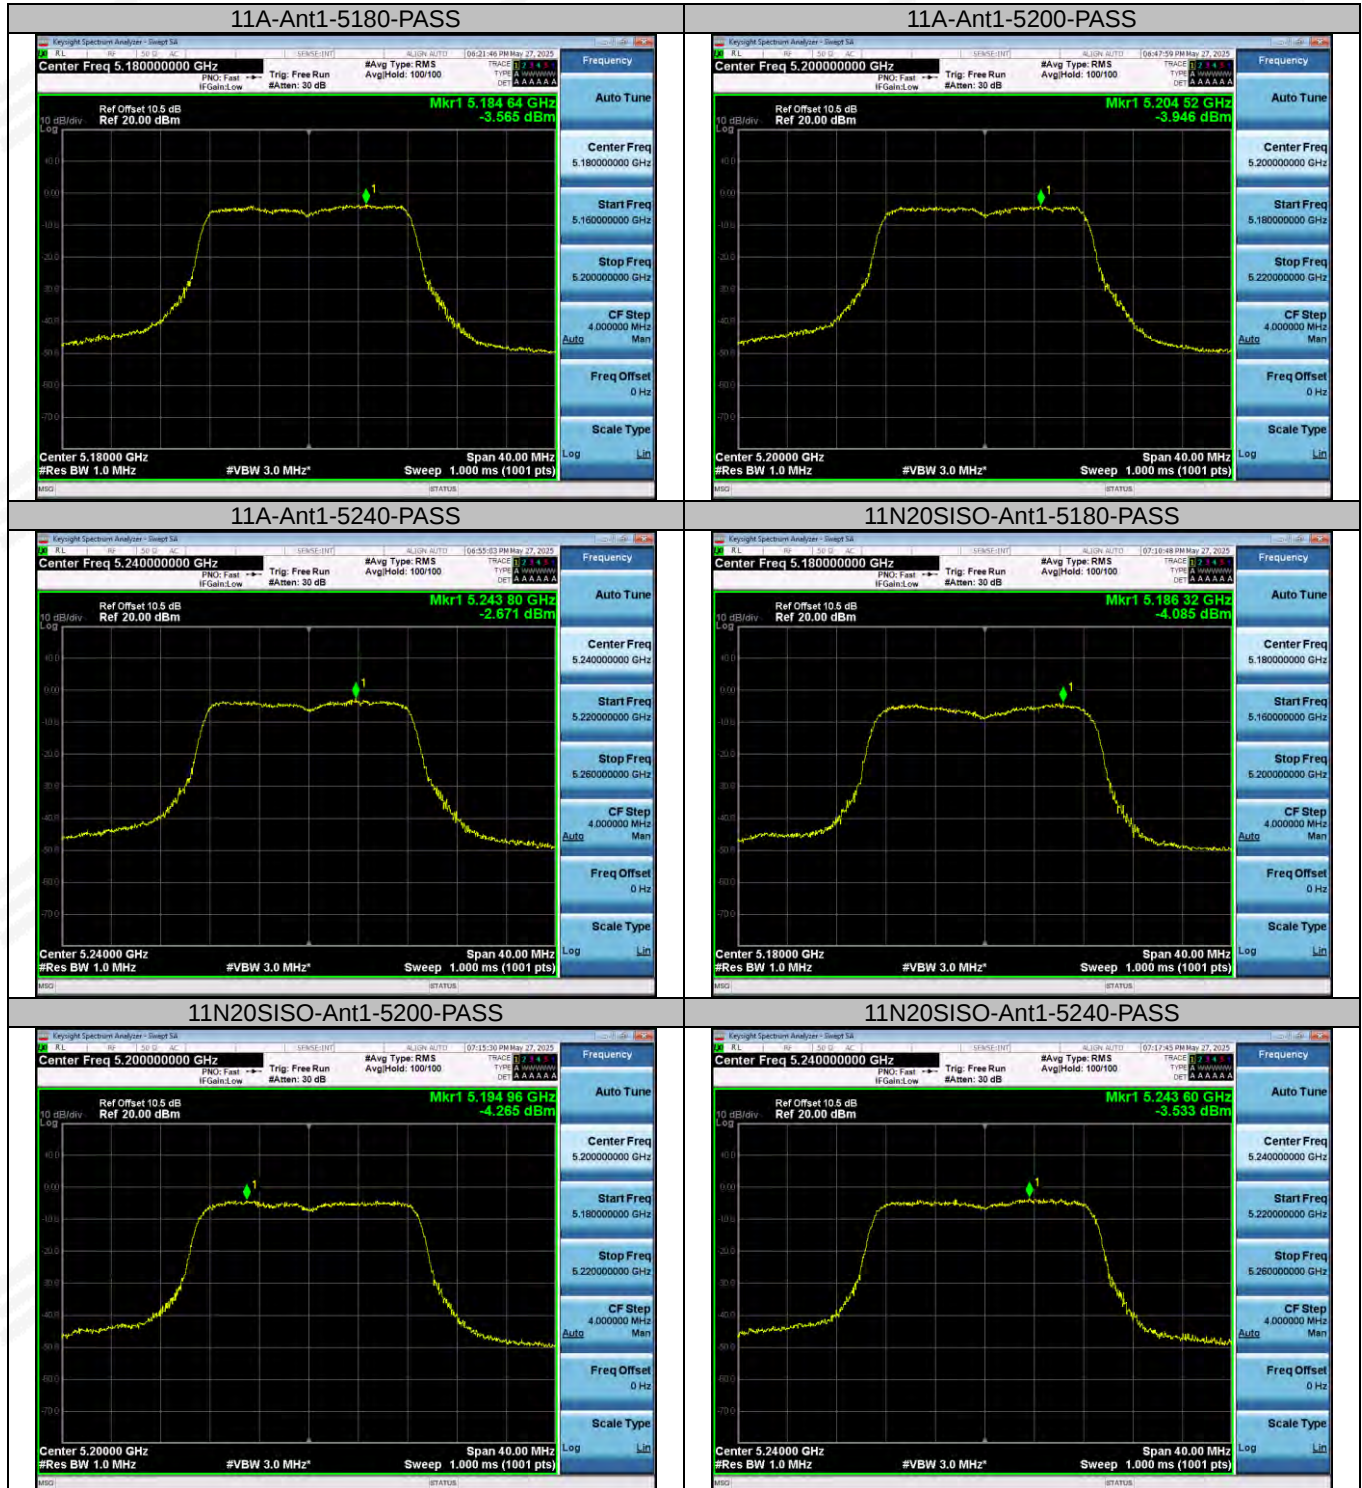




11N40SISO-Ant1-5190-PASS

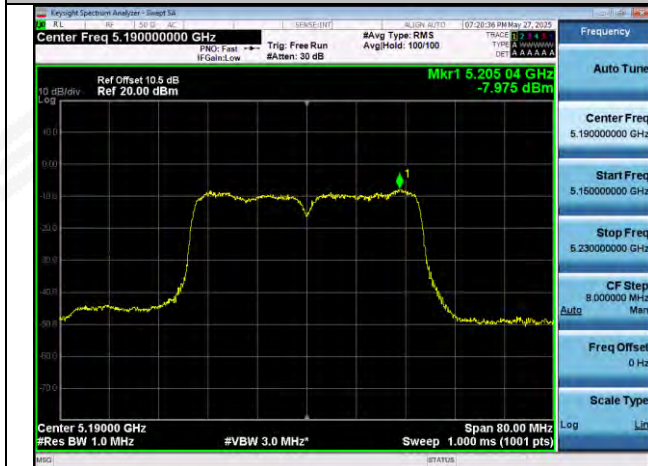

11N40SISO-Ant1-5230-PASS



11AC20SISO-Ant1-5180-PASS

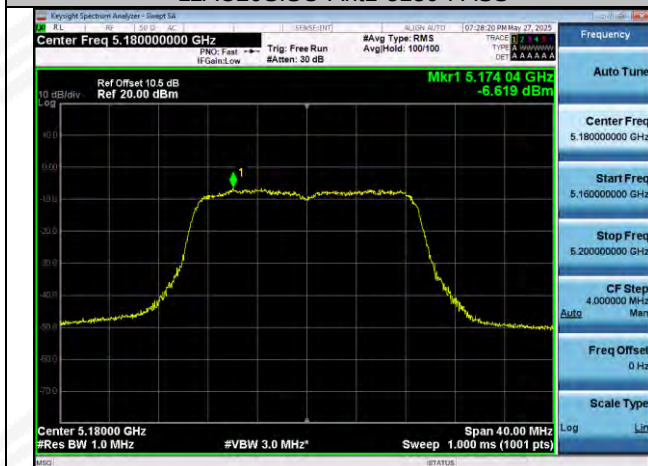

11AC20SISO-Ant1-5200-PASS



11AC20SISO-Ant1-5240-PASS



11AC40SISO-Ant1-5190-PASS






99% OCCUPIED BANDWIDTH


TEST RESULT AND DATA

Test Mode	Antenna	Frequency[MHz]	99% OBW[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.622	---	---
11A	Ant1	5200	16.698	---	---
11A	Ant1	5240	16.643	---	---
11N20SISO	Ant1	5180	17.708	---	---
11N20SISO	Ant1	5200	17.833	---	---
11N20SISO	Ant1	5240	17.812	---	---
11N40SISO	Ant1	5190	36.219	---	---
11N40SISO	Ant1	5230	36.222	---	---
11AC20SISO	Ant1	5180	17.789	---	---
11AC20SISO	Ant1	5200	17.704	---	---
11AC20SISO	Ant1	5240	17.710	---	---
11AC40SISO	Ant1	5190	36.295	---	---
11AC40SISO	Ant1	5230	36.270	---	---
11AC80SISO	Ant1	5210	75.853	---	---


TEST GRAPHS

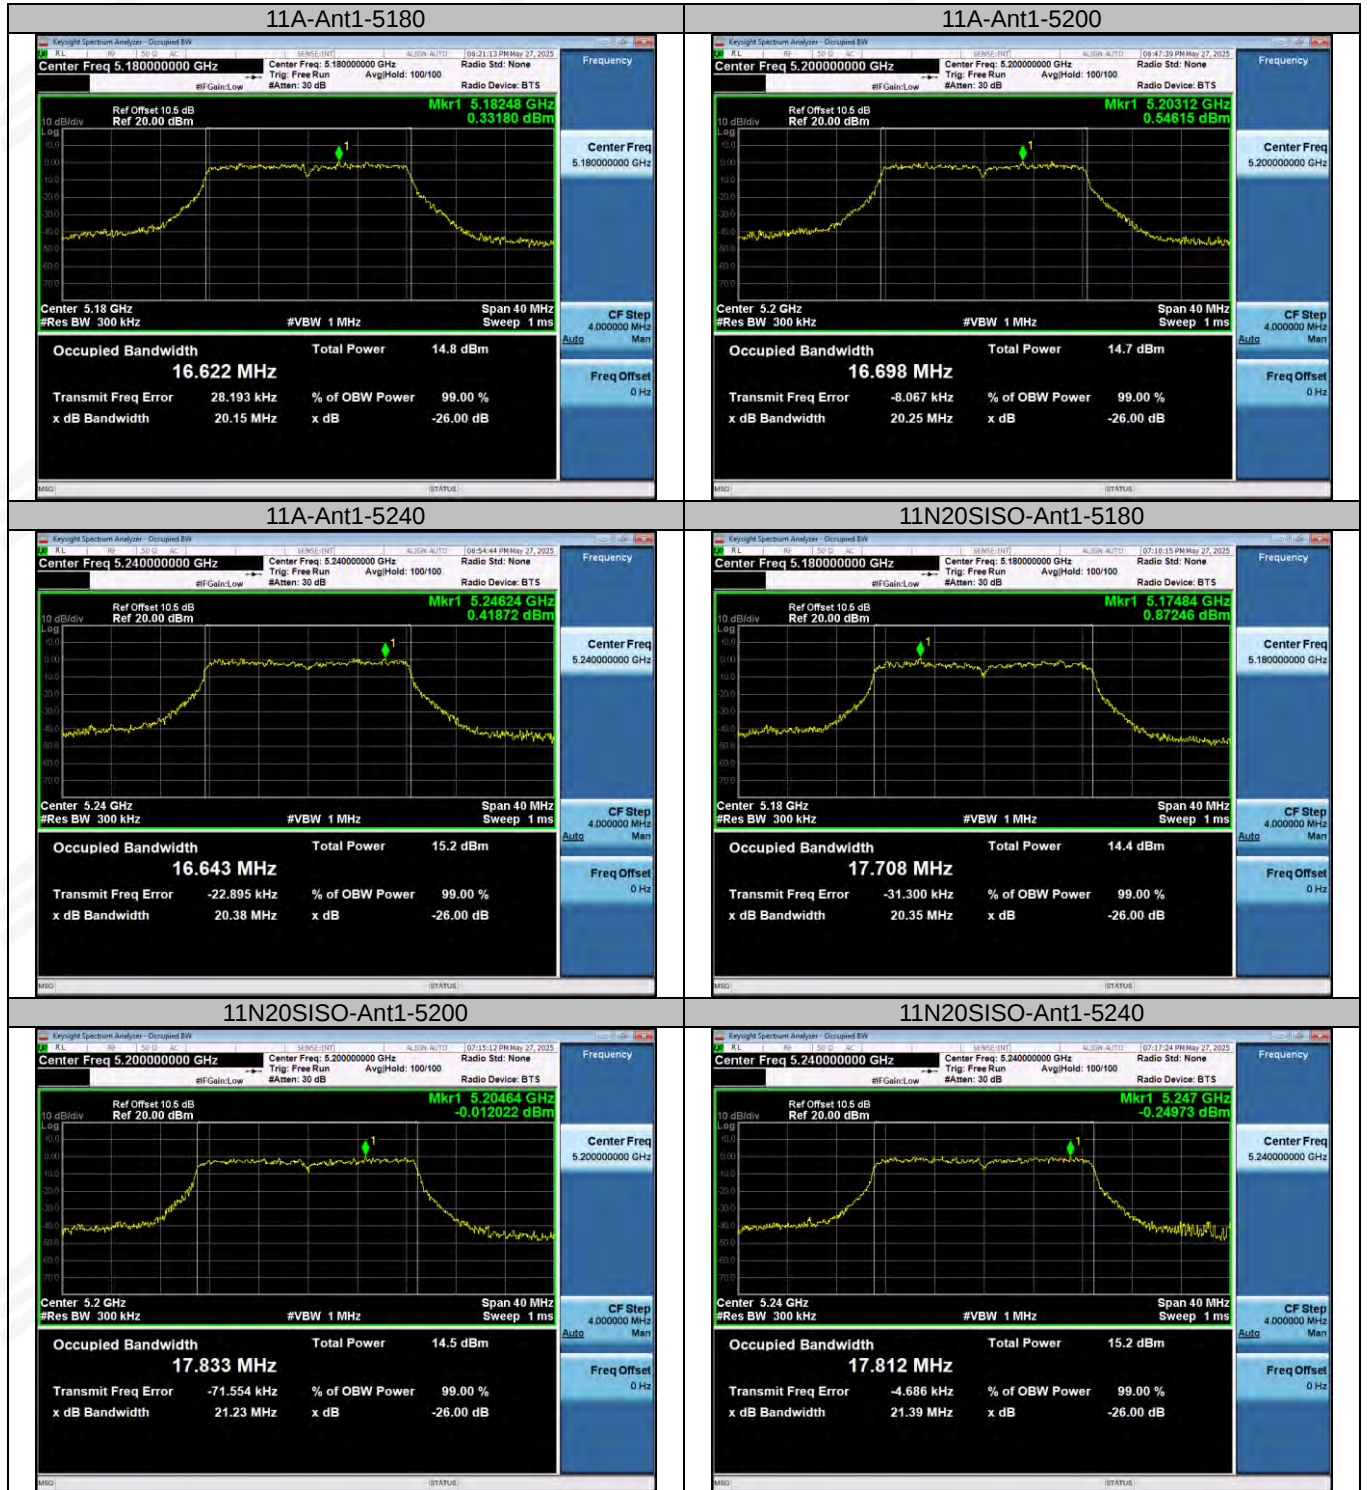


11N40SISO-Ant1-5190

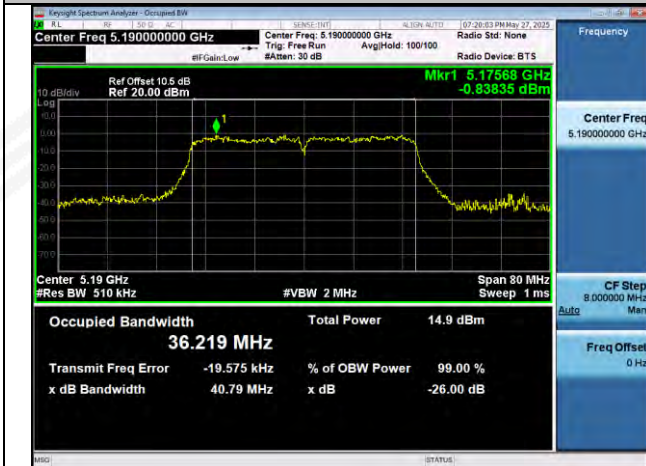

11N40SISO-Ant1-5230

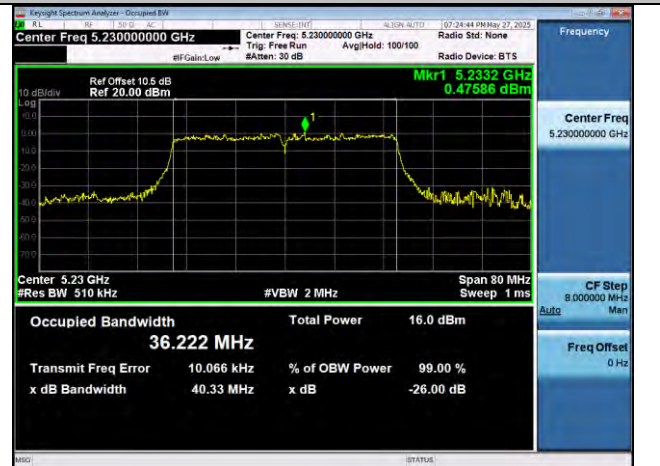


11AC20SISO-Ant1-5180

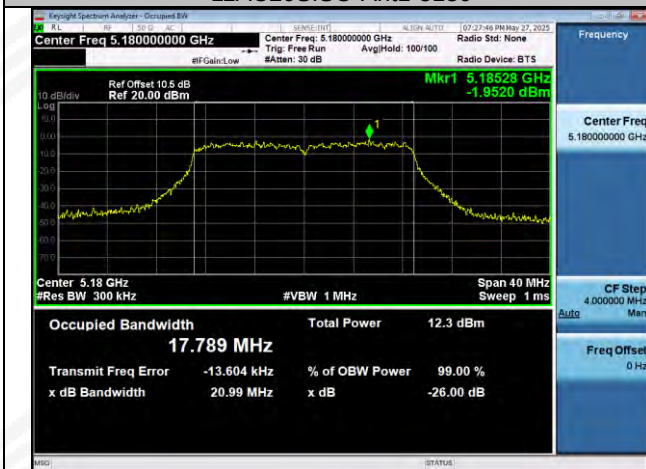


11AC20SISO-Ant1-5200




11AC20SISO-Ant1-5240

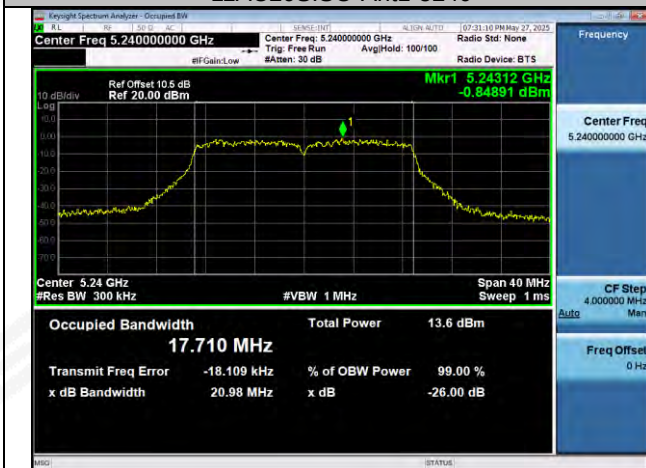

11AC40SISO-Ant1-5190

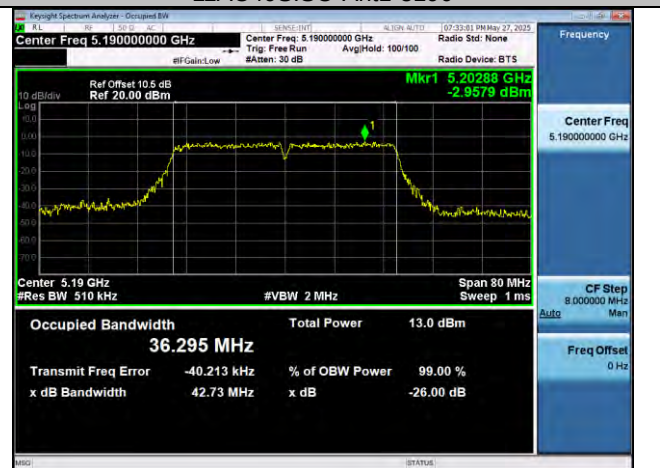

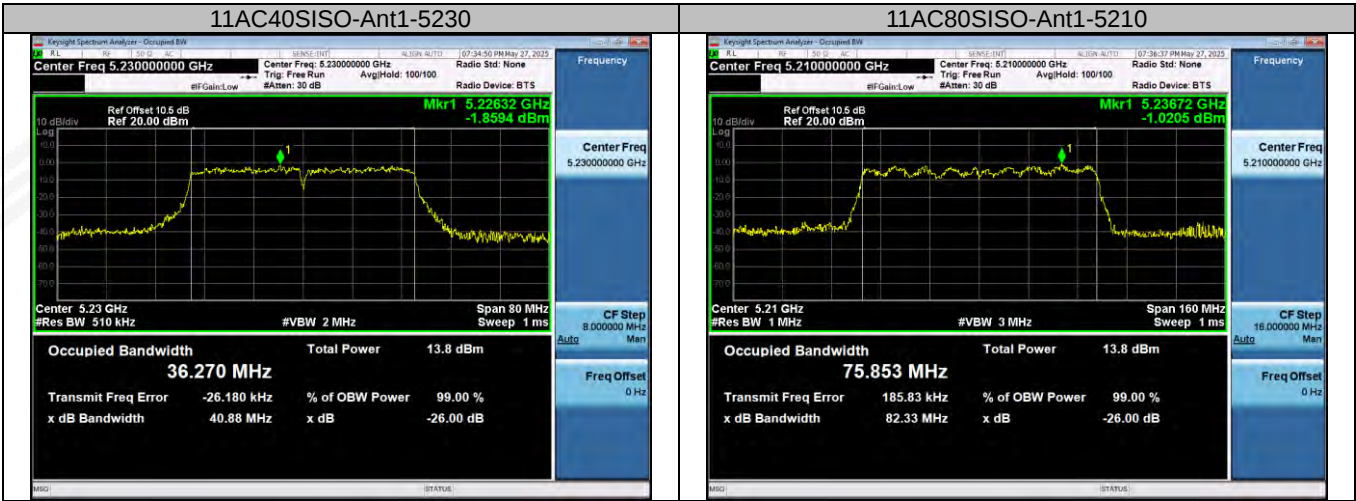


**26DB EMISSION BANDWIDTH****TEST RESULT AND DATA**

Test Mode	Antenna	Frequency[MHz]	26dB EBW[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.400	---	---
11A	Ant1	5200	20.240	---	---
11A	Ant1	5240	20.560	---	---
11N20SISO	Ant1	5180	20.280	---	---
11N20SISO	Ant1	5200	21.320	---	---
11N20SISO	Ant1	5240	21.520	---	---
11N40SISO	Ant1	5190	41.040	---	---
11N40SISO	Ant1	5230	40.160	---	---
11AC20SISO	Ant1	5180	20.920	---	---
11AC20SISO	Ant1	5200	21.440	---	---
11AC20SISO	Ant1	5240	20.720	---	---
11AC40SISO	Ant1	5190	42.480	---	---
11AC40SISO	Ant1	5230	41.680	---	---
11AC80SISO	Ant1	5210	82.560	---	---




TEST GRAPHS

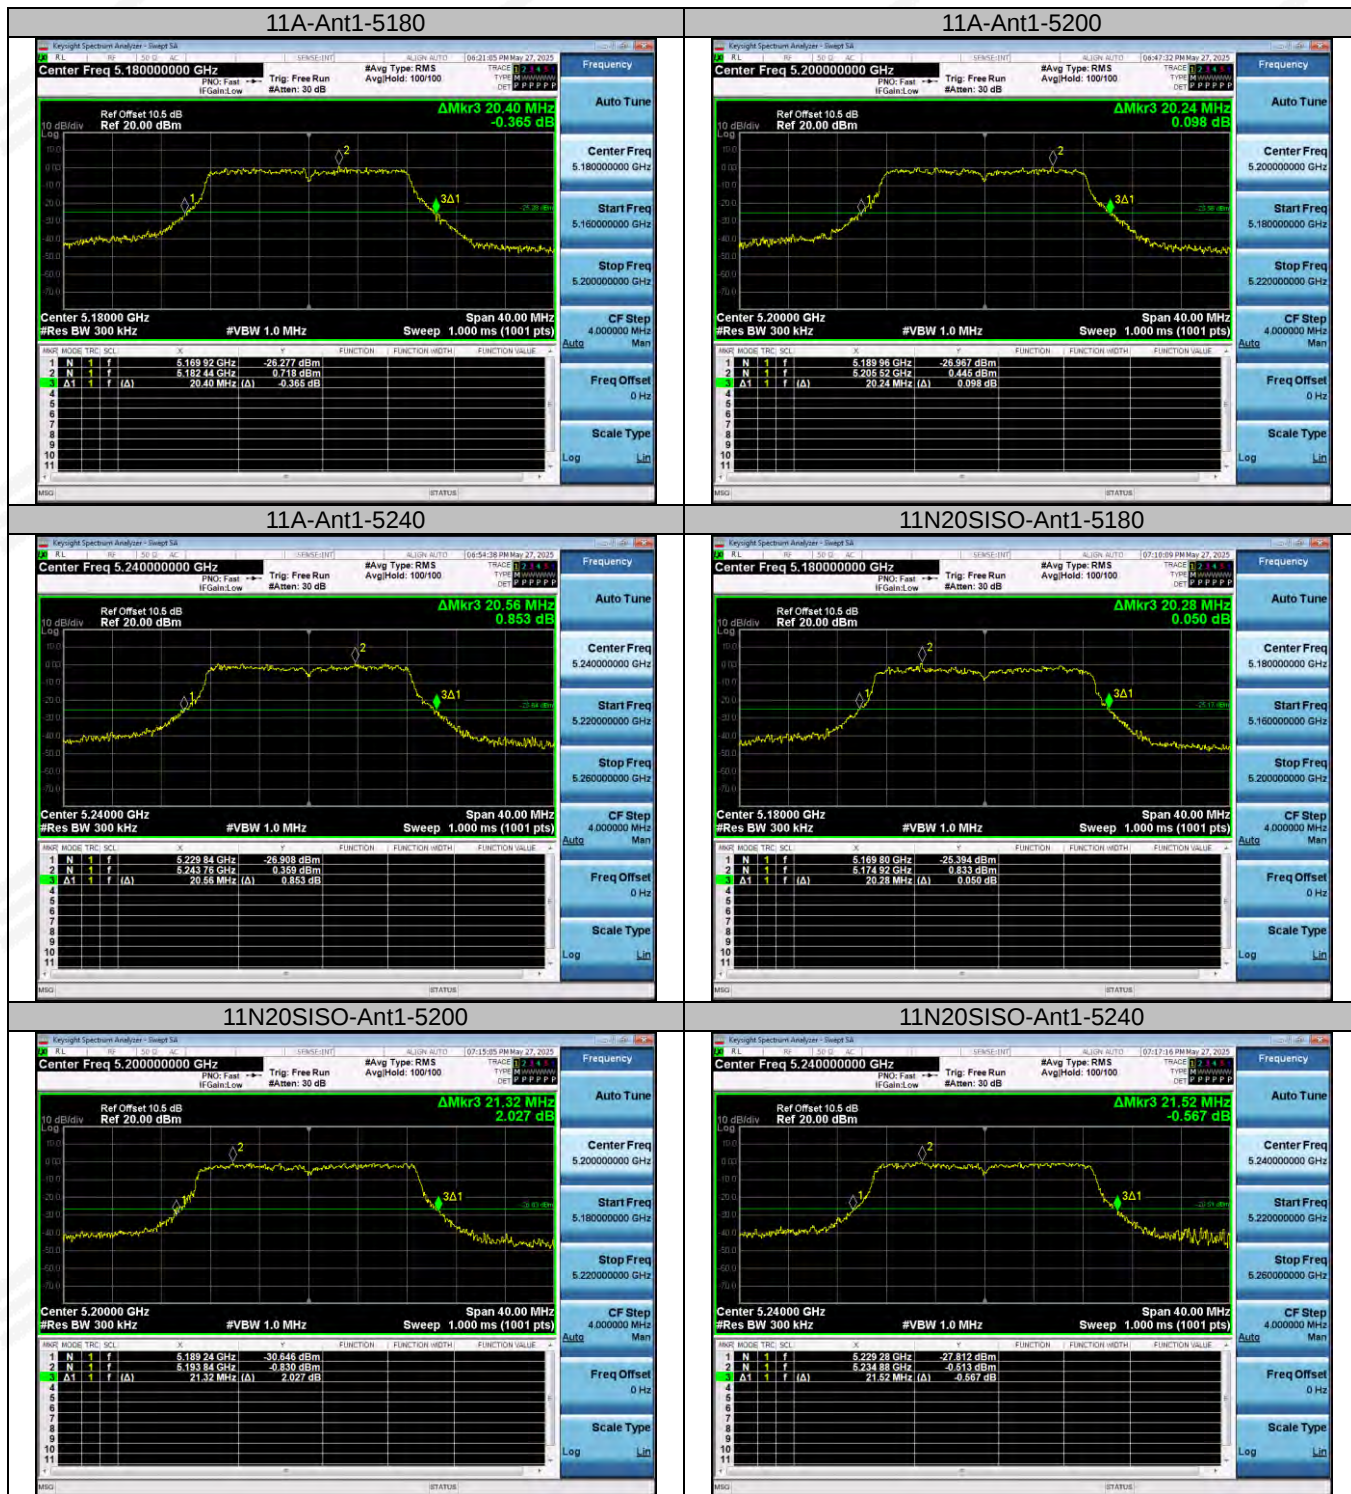



11N40SISO-Ant1-5190

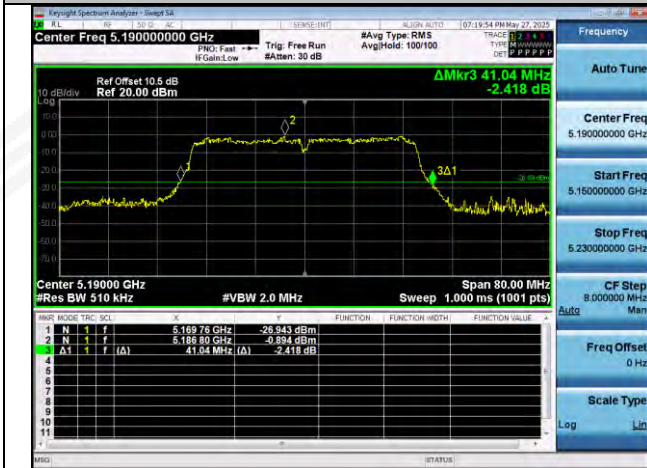

11N40SISO-Ant1-5230



11AC20SISO-Ant1-5180



11AC20SISO-Ant1-5200




11AC20SISO-Ant1-5240



11AC40SISO-Ant1-5190



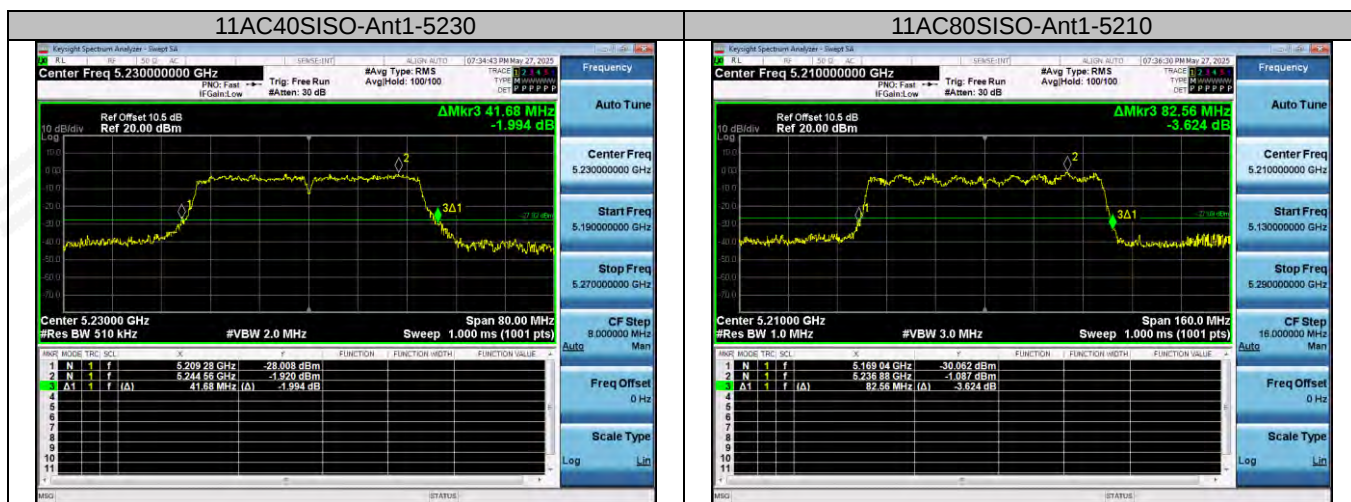



FREQUENCY STABILITY

TEST RESULT AND DATA

Test Mode	Antenna	Frequency[MHz]	Voltage[Vdc]	Temperature(°C)	Deviation(Hz)	Deviation(ppm)	Limit(ppm)	Verdict
11A	Ant1	5180	NV	NT	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	LV	NT	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	HV	NT	-20000.00	-3.861004	20	PASS

Test Mode	Antenna	Frequency[MHz]	Voltage[Vdc]	Temperature(°C)	Deviation(Hz)	Deviation(ppm)	Limit(ppm)	Verdict
11A	Ant1	5180	NV	-30	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	NV	-20	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	NV	-10	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	NV	0	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	NV	10	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	NV	20	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	NV	30	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	NV	40	-20000.00	-3.861004	20	PASS
11A	Ant1	5180	NV	50	-20000.00	-3.861004	20	PASS

Note 1: All of the EUT Configure Mode were tested, the worst case is recorded in this report.

**CONDUCTED BAND EDGES****TEST RESULT AND DATA**


Test Mode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-43.02	≤ -27	PASS
11A	Ant1	High	5240	-43.3	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-42.26	≤ -27	PASS
11N20SISO	Ant1	High	5240	-43.35	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-31.78	≤ -27	PASS
11N40SISO	Ant1	High	5230	-43.35	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-43.12	≤ -27	PASS
11AC20SISO	Ant1	High	5240	-43.37	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-36.2	≤ -27	PASS
11AC40SISO	Ant1	High	5230	-43.83	≤ -27	PASS
11AC80SISO	Ant1	Low	5210	-32.46	≤ -27	PASS
11AC80SISO	Ant1	High	5210	-43.05	≤ -27	PASS




TEST GRAPHS




11AC20SISO-Ant1-5180-PASS

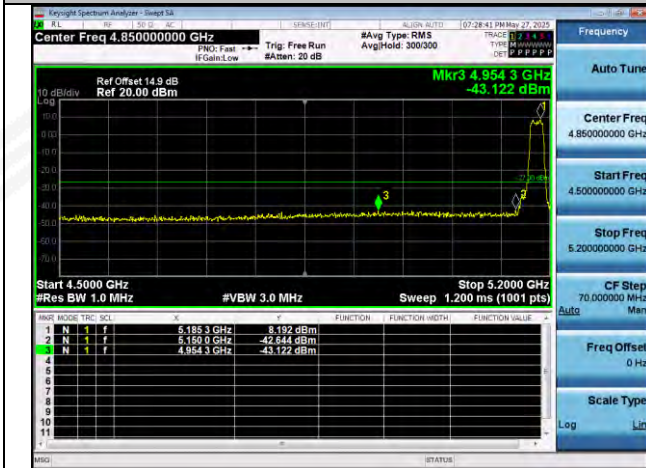

11AC20SISO-Ant1-5240-PASS

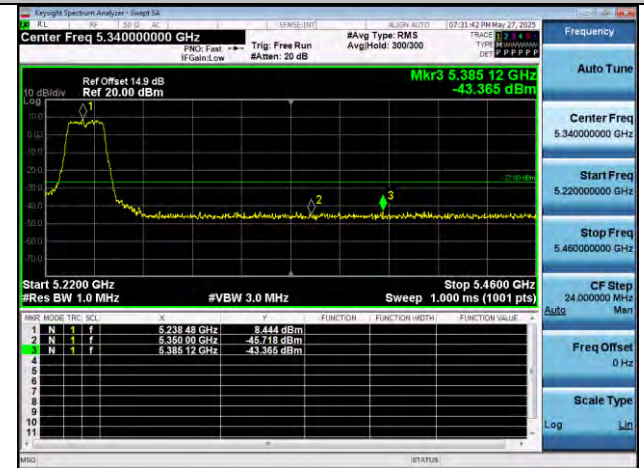

11AC40SISO-Ant1-5190-PASS

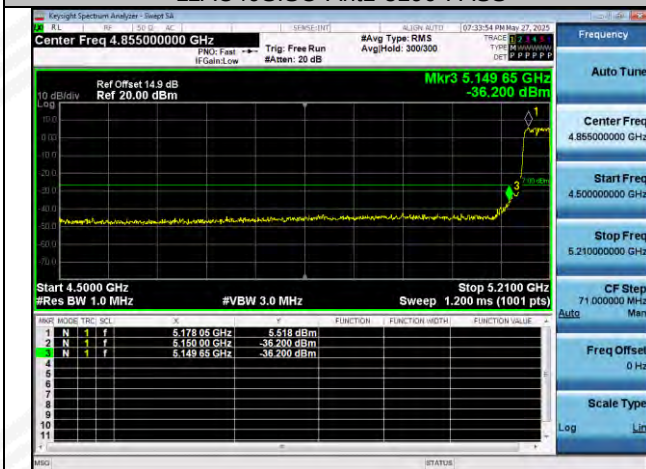

11AC40SISO-Ant1-5230-PASS



11AC80SISO-Ant1-5210-PASS



11AC80SISO-Ant1-5210-PASS

