



TEST REPORT

Report No.: **CTC2025452401**
FCC ID.....: **2BQ4R-A1**
Applicant: **Jinhua Jueyuan Chuangzhi Technology Co., Ltd**
Address.....: Room 503-505, Bld A3-a, Area A, Insigma Tech Industry
Incubation Park, Tangya Town, Jindong District, Jinhua, Zhejiang
China
Manufacturer.....: Jinhua Jueyuan Chuangzhi Technology Co., Ltd
Address.....: Room 503-505, Bld A3-a, Area A, Insigma Tech Industry
Incubation Park, Tangya Town, Jindong District, Jinhua, Zhejiang
China
Product Name: **Smart Glasses**
Trade Mark: /
Model/Type reference.....: Smart Glasses A1
Listed Model(s): /
Standard: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Test Report Form No: CTC-TR-058_A2
Master TRF: Dated 2025-05-12
Date of receipt of test sample.....: Jul. 21, 2025
Date of testing.....: Jul. 21, 2025 ~ Aug. 5, 2025
Date of issue.....: Aug. 18, 2025
Result.....: **PASS**

Compiled by:

(Printed name+signature)

Jim Jiang

Supervised by:

(Printed name+signature)

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents**

| | Page |
|--|-------------|
| 1. TEST SUMMARY | 3 |
| 1.1. TEST STANDARDS..... | 3 |
| 1.2. REPORT VERSION | 3 |
| 1.3. TEST DESCRIPTION..... | 4 |
| 1.4. TEST FACILITY | 5 |
| 1.5. MEASUREMENT UNCERTAINTY..... | 6 |
| 1.6. ENVIRONMENTAL CONDITIONS..... | 6 |
| 2. GENERAL INFORMATION | 7 |
| 2.1. CLIENT INFORMATION | 7 |
| 2.2. GENERAL DESCRIPTION OF EUT..... | 7 |
| 2.3. ACCESSORY EQUIPMENT INFORMATION | 8 |
| 2.4. OPERATION STATE | 9 |
| 2.5. MEASUREMENT INSTRUMENTS LIST | 10 |
| 3. TEST ITEM AND RESULTS | 12 |
| 3.1. CONDUCTED EMISSION..... | 12 |
| 3.2. RADIATED EMISSION..... | 15 |
| 3.3. BAND EDGE EMISSIONS (RADIATED) | 26 |
| 3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)..... | 35 |
| 3.5. DTS BANDWIDTH..... | 45 |
| 3.6. PEAK OUTPUT POWER | 50 |
| 3.7. POWER SPECTRAL DENSITY | 51 |
| 3.8. DUTY CYCLE | 54 |
| 3.9. ANTENNA REQUIREMENT..... | 57 |



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

RSS-247 Issue 3: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus.

ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

| Revised No. | Report No. | Date of issue | Description |
|-------------|---------------|---------------|-------------|
| 01 | CTC2025452401 | Aug. 18, 2025 | Original |
| | | | |
| | | | |



1.3. Test Description

| FCC Part 15 Subpart C (15.247) / RSS-247 Issue 3 | | | | |
|--|-------------------------|-------------------------|--------|---------------|
| Test Item | Standard Section | | Result | Test Engineer |
| | FCC | ISED | | |
| Antenna Requirement | 15.203 | RSS-Gen 6.8 | Pass | Jim Jiang |
| Conducted Emission | 15.207 | RSS-Gen 8.8 | Pass | Jim Jiang |
| Conducted Band Edge and Spurious Emissions | 15.247(d) | RSS-247 5.5 | Pass | Jim Jiang |
| Radiated Band Edge and Spurious Emissions | 15.205&15.209&15.247(d) | RSS-247 5.5 | Pass | Jim Jiang |
| 6dB Bandwidth | 15.247(a)(2) | RSS-247 5.2 (a) | Pass | Jim Jiang |
| Occupied Bandwidth | / | RSS-Gen 6.7 | Pass | Jim Jiang |
| Conducted Max Output Power | 15.247(b)(3) | RSS-247 5.4 (d) | Pass | Jim Jiang |
| Power Spectral Density | 15.247(e) | RSS-247 5.2 (b) | Pass | Jim Jiang |
| Transmitter Radiated Spurious | 15.209&15.247(d) | RSS-247 5.5&RSS-Gen 8.9 | Pass | Jim Jiang |

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Address: Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

| Test Items | Measurement Uncertainty | Notes |
|---|---|-------|
| DTS Bandwidth | ±0.0196% | (1) |
| Maximum Conducted Output Power | ±0.686 dB | (1) |
| Maximum Power Spectral Density Level | ±0.743 dB | (1) |
| Band-edge Compliance | ±1.328 dB | (1) |
| Unwanted Emissions In Non-restricted Freq Bands | 9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB | (1) |
| Conducted Emissions 9kHz~30MHz | ±3.08 dB | (1) |
| Radiated Emissions 30~1000MHz | ±4.51 dB | (1) |
| Radiated Emissions 1~18GHz | ±5.84 dB | (1) |
| Radiated Emissions 18~40GHz | ±6.12 dB | (1) |

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|--------------------|----------------|
| Temperature: | 15 °C to 35 °C |
| Relative Humidity: | 20 % to 75 % |
| Air Pressure: | 101 kPa |



2. GENERAL INFORMATION

2.1. Client Information

| | |
|---------------|--|
| Applicant: | Jinhua Jueyuan Chuangzhi Technology Co., Ltd |
| Address: | Room 503-505, Bld A3-a, Area A, Insigma Tech Industry Incubation Park, Tangya Town, Jindong District, Jinhua, Zhejiang China |
| Manufacturer: | Jinhua Jueyuan Chuangzhi Technology Co., Ltd |
| Address: | Room 503-505, Bld A3-a, Area A, Insigma Tech Industry Incubation Park, Tangya Town, Jindong District, Jinhua, Zhejiang China |

2.2. General Description of EUT

| | |
|----------------------------|--|
| Product Name: | Smart Glasses |
| Trade Mark: | / |
| Model/Type reference: | Smart Glasses A1 |
| Listed Model(s): | / |
| Model Difference: | / |
| Sample ID: | CTC250708-009-S001, CTC250708-009-S002 |
| Power Supply: | Input: 5.0V--- 0.1A |
| Hardware Version: | / |
| Software Version: | / |
| Bluetooth 5.4 / BLE | |
| Modulation: | GFSK |
| Operation Frequency: | BLE 1M: 2402MHz~2480MHz BLE 2M: 2404MHz~2478MHz |
| Channel Number: | 40 |
| Channel Separation: | 2MHz |
| Data Rate: | 1Mbps, 2Mbps |
| Antenna Type: | Ceramic Chip Antenna |
| Antenna Gain: | 5.05dBi |



2.3. Accessory Equipment Information

| Equipment Information | | | |
|----------------------------------|----------------|--------------|--------------|
| Name | Model | S/N | Manufacturer |
| Notebook | ThinkPad T460s | MP246QDR | Lenovo |
| AC Adapter | A2167 | / | Apple |
| Cable Information | | | |
| Name | Shielded Type | Ferrite Core | Length |
| USB Cable | Unshielded | NO | 50cm |
| Test Software Information | | | |
| Name | Version | / | / |
| BQB.exe | / | / | / |

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-058_A2



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT BLE, 40 channels are provided to the EUT. Channels 00/19/39 were selected for testing.

Operation Frequency List:

| Channel | Frequency (MHz) |
|---------|-----------------|
| 00 | 2402 |
| 01 | 2404 |
| : | : |
| 18 | 2438 |
| 19 | 2440 |
| 20 | 2442 |
| : | : |
| 38 | 2478 |
| 39 | 2480 |

Note: CH00~CH39 for BLE 1M, CH01~CH38 for BLE 2M.

Test Mode:

| |
|--|
| For RF test items: |
| The engineering test program was provided and enabled to make EUT continuous transmit. |
| For AC power line conducted emissions: |
| This EUT is powered through an adapter. |
| For Radiated spurious emissions test item: |
| The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report. |



2.5. Measurement Instruments List

| RF Test System – SRD | | | | | | |
|----------------------|---------------------------------------|--------------|---------------|------------|---------------|------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Calibrated Until |
| 1 | MXA Signal Analyzer | Keysight | N9020A | MY52091402 | Dec. 13, 2024 | Dec. 12, 2025 |
| 2 | MXG Vector Signal Generator | Agilent | N5182A | MY47420864 | Dec. 13, 2024 | Dec. 12, 2025 |
| 3 | PSG Analog Signal Generator | Agilent | E8257D | MY46521908 | Dec. 13, 2024 | Dec. 12, 2025 |
| 4 | USB Wideband Power Sensor | Keysight | U2021XA | MY55130004 | Mar. 25, 2025 | Mar. 24, 2026 |
| 5 | USB Wideband Power Sensor | Keysight | U2021XA | MY55130006 | Mar. 25, 2025 | Mar. 24, 2026 |
| 6 | RF Control Unit | Tonscend | JS0806-2 | / | Aug. 22, 2024 | Aug. 21, 2025 |
| 7 | High and low temperature test chamber | ESPEC | MT3035 | / | Mar. 25, 2025 | Mar. 24, 2026 |
| 8 | RF Cable | HUBER+SUHNER | SUCOFLEX101PE | RF-08 | Apr. 15, 2025 | Apr. 16, 2026 |

Test Software

| Name | Manufacturer | Software Version |
|----------|--------------|------------------|
| JS1120-3 | Tonscend | V2.6.88.0346 |

Radiated emission

| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Calibrated Until |
|------|--------------------------|--------------|------------|----------------------|---------------|------------------|
| 1 | Trilog-Broadband Antenna | Schwarzbeck | VULB 9168 | 9168-1013 | Dec. 18, 2024 | Dec. 17, 2025 |
| 2 | Horn Antenna | Schwarzbeck | BBHA 9120D | 9120D-648 | Dec. 12, 2024 | Dec. 11, 2025 |
| 3 | Spectrum Analyzer | R&S | FSU26 | 100105 | Dec. 13, 2024 | Dec. 12, 2025 |
| 4 | Spectrum Analyzer | R&S | FSV40-N | 101331 | Mar. 22, 2025 | Mar. 21, 2026 |
| 5 | Pre-Amplifier | SONOMA | 310 | 186194 | Dec. 13, 2024 | Dec. 12, 2025 |
| 6 | Low Noise Pre-Amplifier | EMCI | EMC051835 | 980075 | Dec. 13, 2024 | Dec. 12, 2025 |
| 7 | Test Receiver | R&S | ESCI7 | 100967 | Dec. 13, 2024 | Dec. 12, 2025 |
| 8 | RE32L-001 | HUBENR | / | 009 (9kHz-1GHz) | Feb. 09, 2025 | Feb. 08, 2026 |
| 9 | RE32L-002 | HUBENR | / | 010 (9kHz-1GHz) | Feb. 09, 2025 | Feb. 08, 2026 |
| 10 | RE32L-003 | HUBENR | / | 011 (9kHz-1GHz) | Feb. 09, 2025 | Feb. 08, 2026 |
| 11 | RE32H-001 | HUBENR | / | 012 (1GHz-18GHz) | Feb. 09, 2025 | Feb. 08, 2026 |
| 12 | RE32H-002 | HUBENR | / | 013 (1GHz-18GHz) | Feb. 09, 2025 | Feb. 08, 2026 |
| 13 | RE33H-003 | HUBENR | / | 019 (18GHz-40GHz) | Feb. 09, 2025 | Feb. 08, 2026 |
| 14 | 3m chamber 2 | Frankonia | EE025 | / | Oct. 19, 2024 | Oct. 18, 2027 |

Test Software

| Name | Manufacturer | Software Version |
|--------|--------------|------------------|
| EZ-EMC | FARA | FA-03A2 |

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-058_A2



| Conducted emission | | | | | | |
|--------------------|-------------------|--------------|-----------|----------------|---------------|------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Calibrated until |
| 1 | LISN | R&S | ENV216 | 101112 | Dec. 13, 2024 | Dec. 12, 2025 |
| 2 | LISN | R&S | ENV216 | 101113 | Dec. 13, 2024 | Dec. 12, 2025 |
| 3 | EMI Test Receiver | R&S | ESCI | 100524 | Dec. 13, 2024 | Dec. 12, 2025 |
| 4 | ISN CAT6 | Schwarzbeck | NTFM 8158 | CAT6-8158-0046 | Dec. 13, 2024 | Dec. 12, 2025 |
| 5 | ISN CAT5 | Schwarzbeck | NTFM 8158 | CAT5-8158-0046 | Dec. 13, 2024 | Dec. 12, 2025 |
| 6 | CE-001 | COMM | / | 001 | Feb. 09, 2025 | Feb. 08, 2026 |

| Test Software | | |
|---------------|--------------|------------------|
| Name | Manufacturer | Software Version |
| EMC32 | R&S | 6.10.10 |

Note: 1. The Cal. Interval was one year.
2. The Cal. Interval was three years of the antenna.
3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

| Frequency (MHz) | Conducted Limit (dB μ V) | |
|-----------------|------------------------------|------------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Configuration

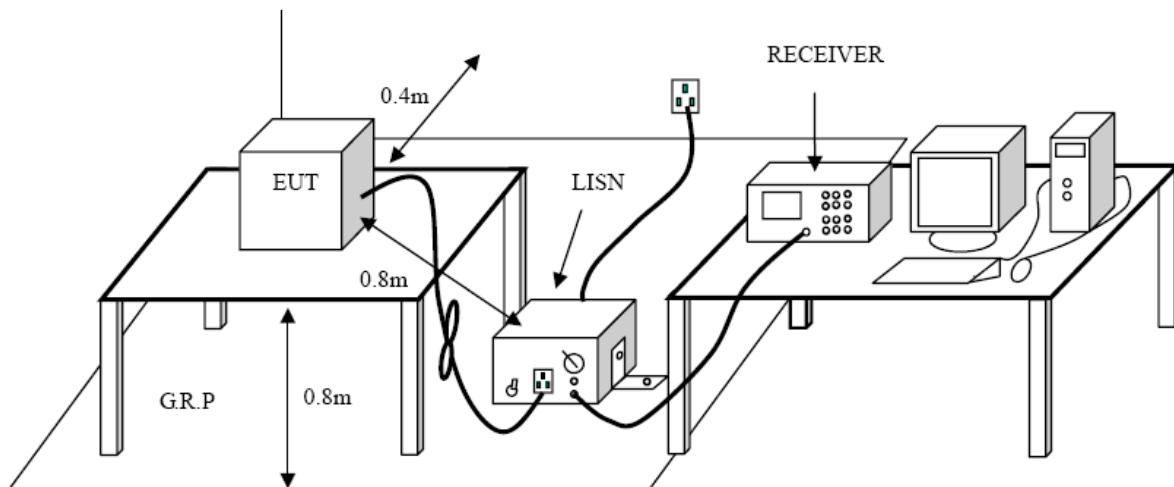


Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

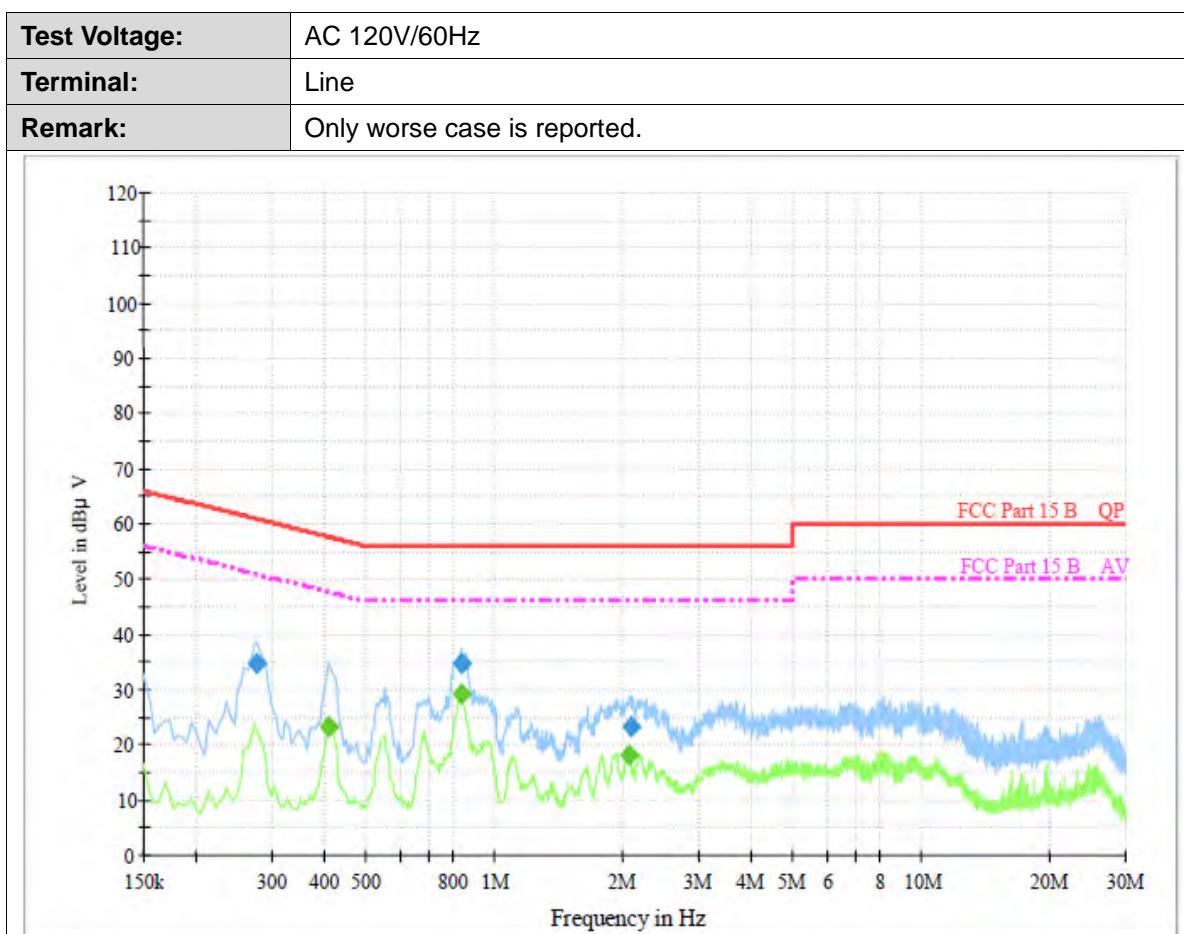**Test Result****Final Measurement Detector 1**

| Frequency (MHz) | QuasiPeak (dB μ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) | Comment |
|-----------------|------------------------|-----------------|-----------------|--------|------|------------|-------------|--------------------|---------|
| 0.276000 | 34.8 | 1000.00 | 9.000 | On | L1 | 9.5 | 26.1 | 60.9 | |
| 0.834000 | 34.6 | 1000.00 | 9.000 | On | L1 | 9.6 | 21.4 | 56.0 | |
| 2.089500 | 23.4 | 1000.00 | 9.000 | On | L1 | 9.7 | 32.6 | 56.0 | |


Final Measurement Detector 2

| Frequency (MHz) | Average (dB μ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) | Comment |
|-----------------|----------------------|-----------------|-----------------|--------|------|------------|-------------|--------------------|---------|
| 0.406500 | 23.1 | 1000.00 | 9.000 | On | L1 | 9.4 | 24.6 | 47.7 | |
| 0.834000 | 29.4 | 1000.00 | 9.000 | On | L1 | 9.6 | 16.6 | 46.0 | |
| 2.053500 | 18.2 | 1000.00 | 9.000 | On | L1 | 9.7 | 27.8 | 46.0 | |

Emission Level = Read Level + Correct Factor



| | |
|----------------------|------------------------------|
| Test Voltage: | AC 120V/60Hz |
| Terminal: | Neutral |
| Remark: | Only worse case is reported. |

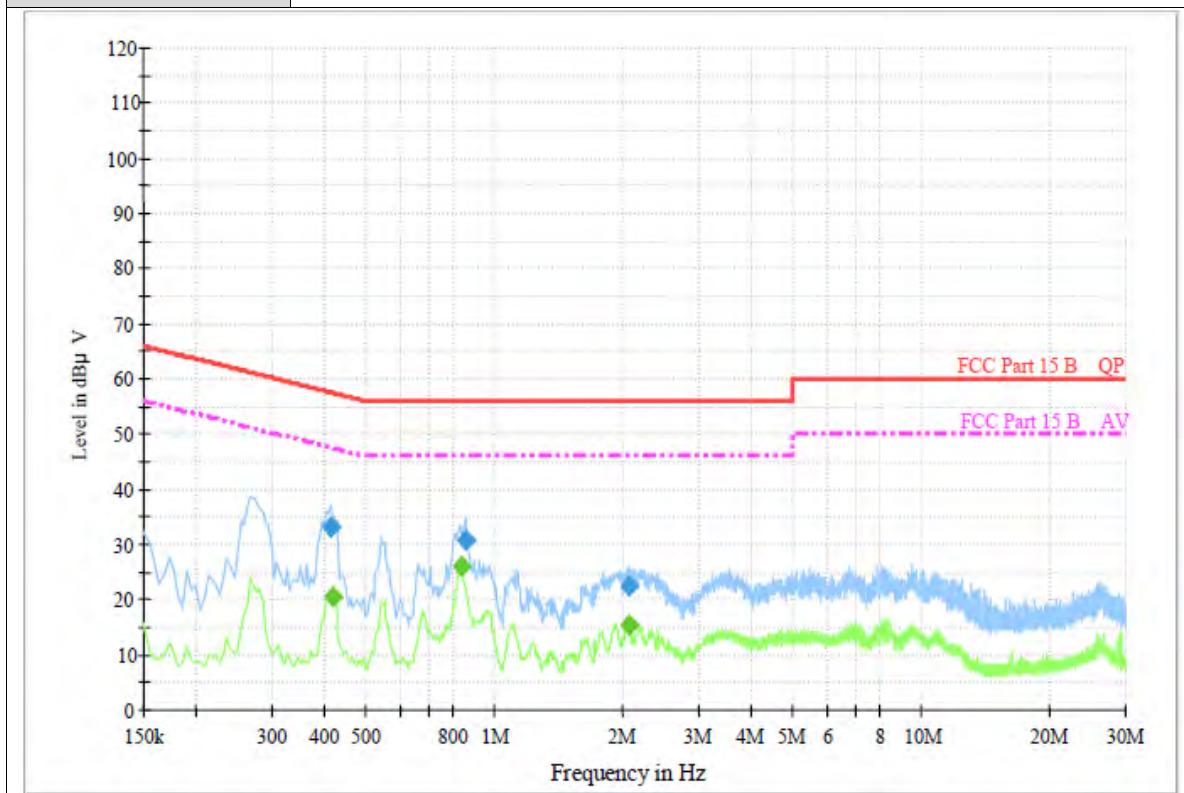

Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.411000 | 33.1 | 1000.00 | 9.000 | On | N | 9.5 | 24.5 | 57.6 | |
| 0.852000 | 30.6 | 1000.00 | 9.000 | On | N | 9.4 | 25.4 | 56.0 | |
| 2.058000 | 22.6 | 1000.00 | 9.000 | On | N | 9.4 | 33.4 | 56.0 | |

Final Measurement Detector 2

| Frequency (MHz) | Average (dBμV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.415500 | 20.4 | 1000.00 | 9.000 | On | N | 9.6 | 27.1 | 47.5 | |
| 0.834000 | 26.1 | 1000.00 | 9.000 | On | N | 9.4 | 19.9 | 46.0 | |
| 2.058000 | 15.4 | 1000.00 | 9.000 | On | N | 9.4 | 30.6 | 46.0 | |

Emission Level = Read Level + Correct Factor

3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F (kHz) | 300 |
| 0.490~1.705 | 24000/F (kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| 960~1000 | 500 | 3 |

| Frequency Range (MHz) | dB μ V/m (at 3 meters) | |
|-----------------------|----------------------------|---------|
| | Peak | Average |
| Above 1000 | 74 | 54 |


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB μ V/m)=20log Emission Level (μ V/m).


Test Configuration

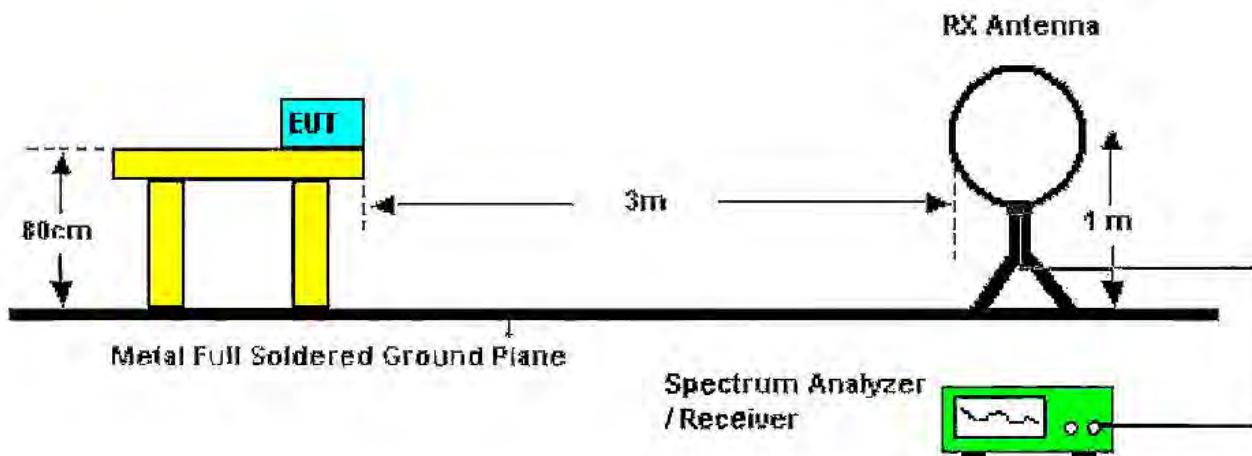

Below 30MHz Test Setup

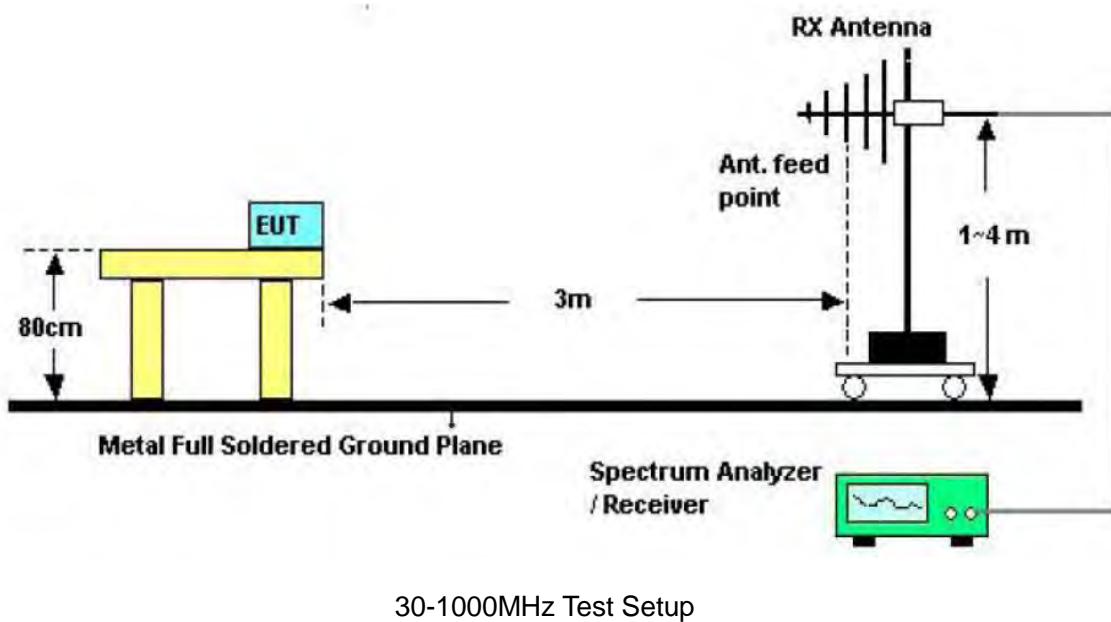

30-1000MHz Test Setup

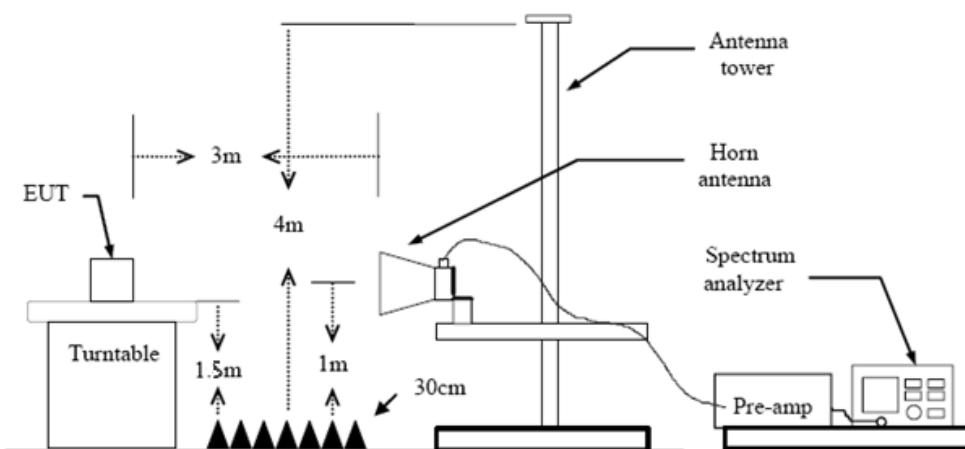

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz: RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz: RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz: RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result


9 kHz~30 MHz

From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

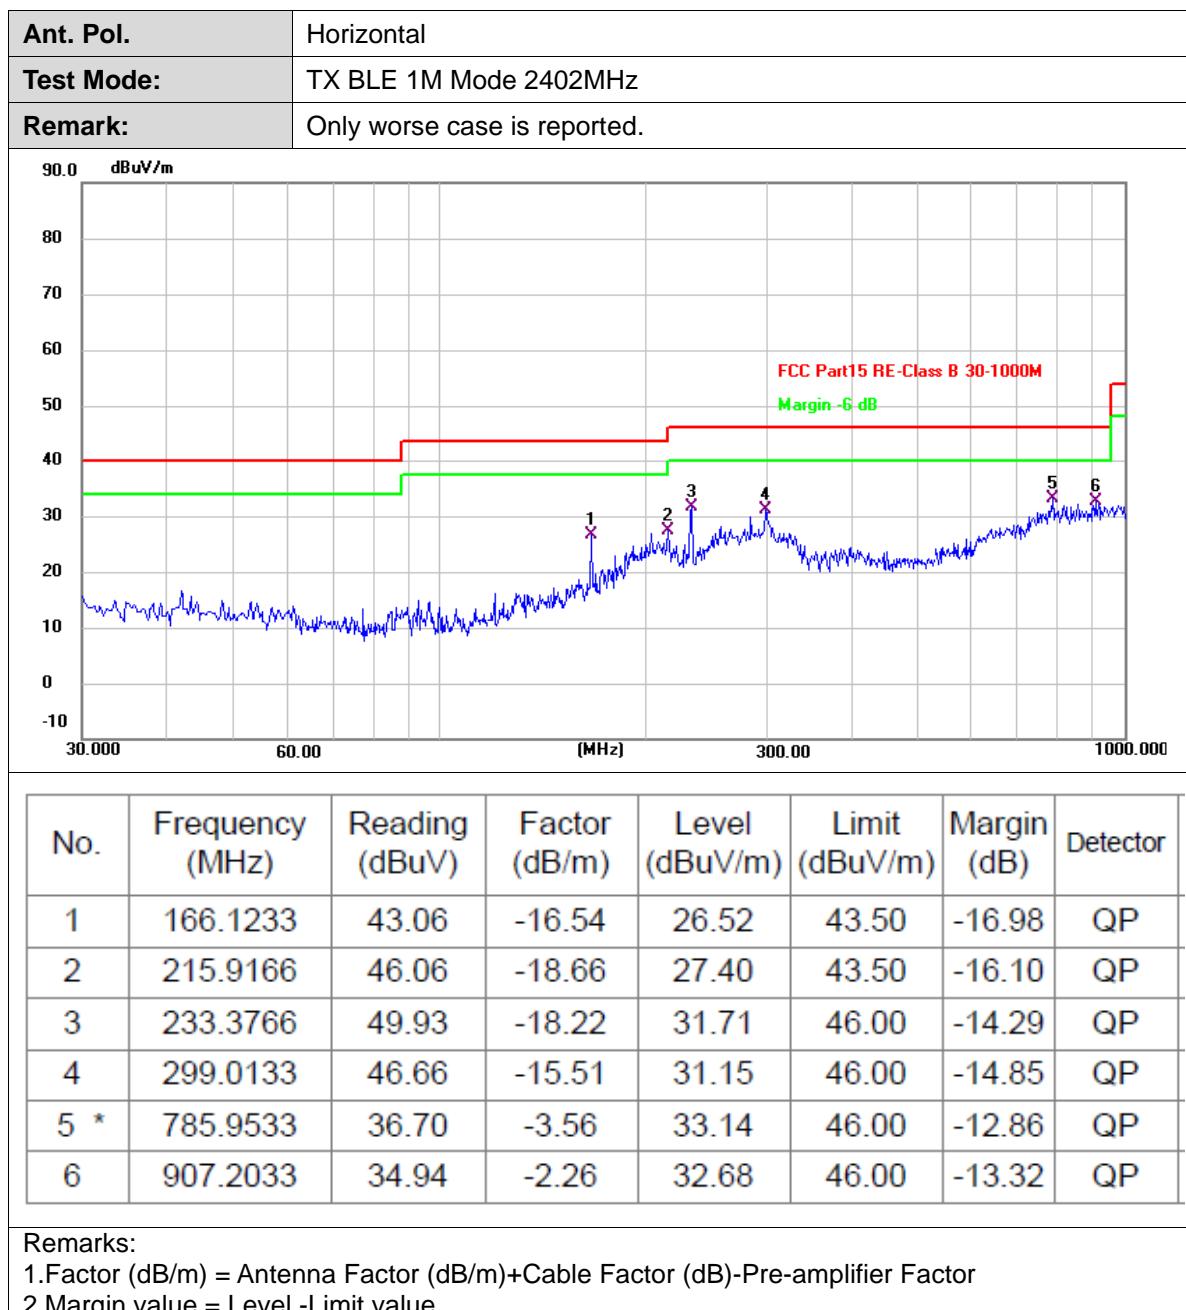


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

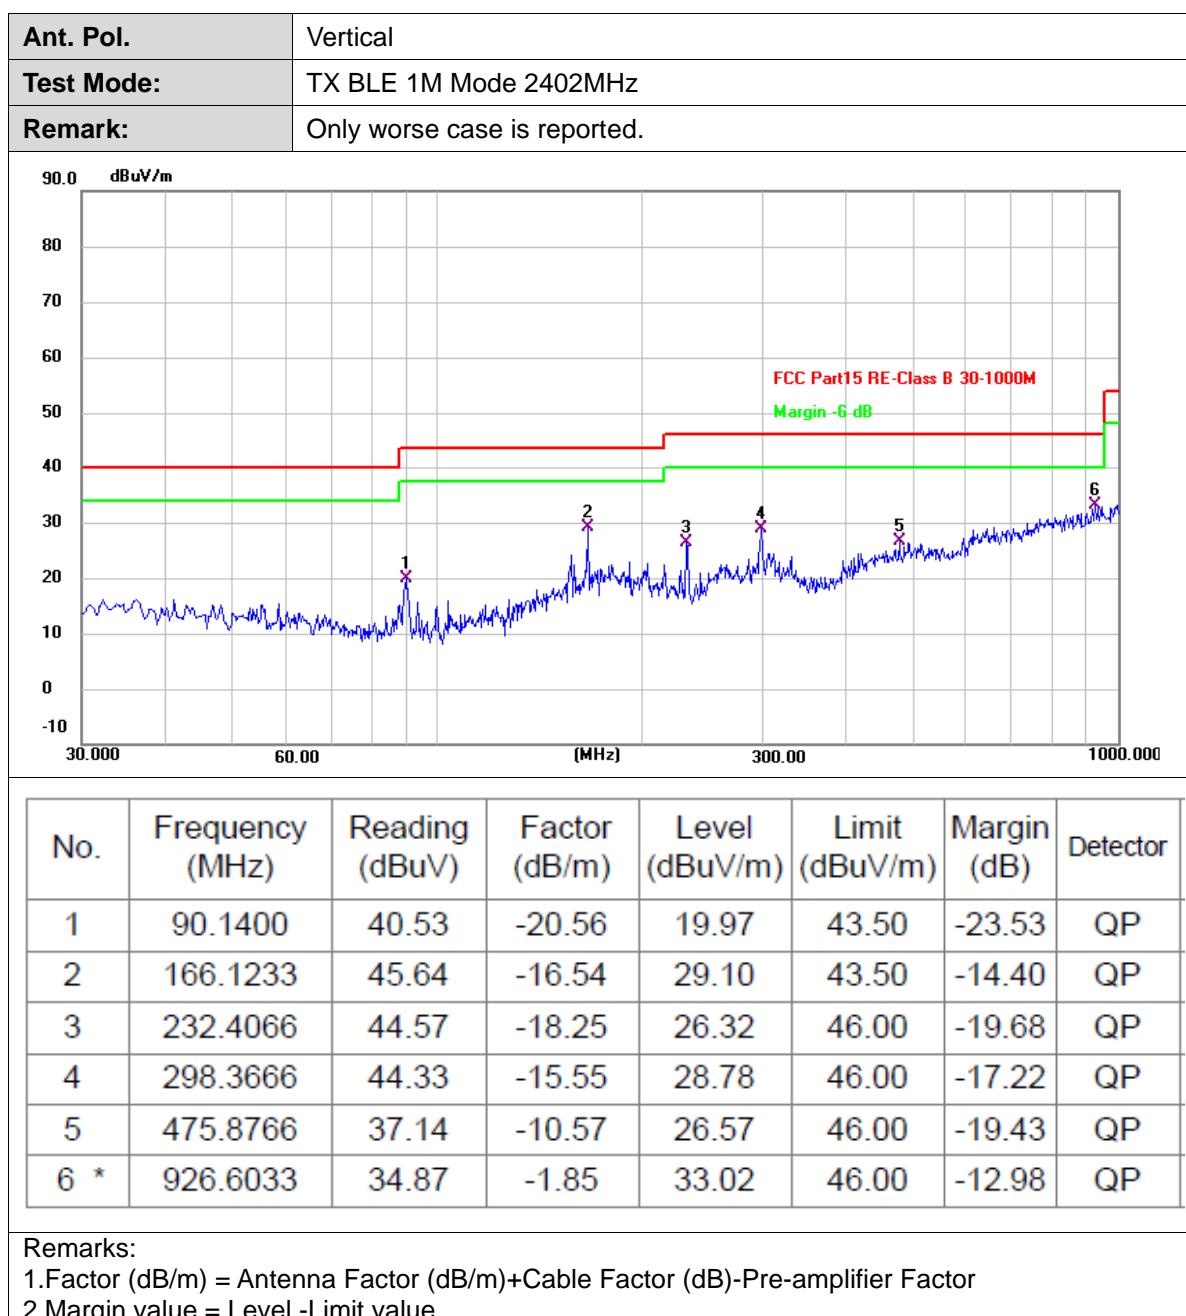

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 90.1400 | 40.53 | -20.56 | 19.97 | 43.50 | -23.53 | QP |
| 2 | 166.1233 | 45.64 | -16.54 | 29.10 | 43.50 | -14.40 | QP |
| 3 | 232.4066 | 44.57 | -18.25 | 26.32 | 46.00 | -19.68 | QP |
| 4 | 298.3666 | 44.33 | -15.55 | 28.78 | 46.00 | -17.22 | QP |
| 5 | 475.8766 | 37.14 | -10.57 | 26.57 | 46.00 | -19.43 | QP |
| 6 * | 926.6033 | 34.87 | -1.85 | 33.02 | 46.00 | -12.98 | QP |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Above 1GHz

| | | | | | | | |
|------------|--|--|--|--|--|--|--|
| Ant. Pol. | Horizontal | | | | | | |
| Test Mode: | TX BLE 1M Mode 2402MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 4803.918 | 33.26 | 1.84 | 35.10 | 54.00 | -18.90 | AVG |
| 2 | 4804.102 | 44.88 | 1.84 | 46.72 | 74.00 | -27.28 | peak |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

| | | | | | | | |
|------------|--|--|--|--|--|--|--|
| Ant. Pol. | Vertical | | | | | | |
| Test Mode: | TX BLE 1M Mode 2402MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 4804.100 | 33.76 | 1.84 | 35.60 | 54.00 | -18.40 | AVG |
| 2 | 4804.203 | 45.05 | 1.84 | 46.89 | 74.00 | -27.11 | peak |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



| | | | | | | | |
|-------------------|--|-----------------------|----------------------|-----------------------|-----------------------|--------------------|-----------------|
| Ant. Pol. | Horizontal | | | | | | |
| Test Mode: | TX BLE 1M Mode 2440MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 | 4879.842 | 45.11 | 1.96 | 47.07 | 74.00 | -26.93 | peak |
| 2 * | 4880.113 | 33.19 | 1.96 | 35.15 | 54.00 | -18.85 | AVG |

| | | | | | | | |
|-------------------|--|-----------------------|----------------------|-----------------------|-----------------------|--------------------|-----------------|
| Ant. Pol. | Vertical | | | | | | |
| Test Mode: | TX BLE 1M Mode 2440MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 | 4879.872 | 44.01 | 1.96 | 45.97 | 74.00 | -28.03 | peak |
| 2 * | 4880.147 | 32.85 | 1.96 | 34.81 | 54.00 | -19.19 | AVG |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



| Ant. Pol. | Horizontal | | | | | | |
|-------------------|--|----------------|---------------|----------------|----------------|-------------|----------|
| Test Mode: | TX BLE 1M Mode 2480MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 * | 4959.825 | 33.92 | 2.08 | 36.00 | 54.00 | -18.00 | AVG |
| 2 | 4960.202 | 44.49 | 2.08 | 46.57 | 74.00 | -27.43 | peak |

| Ant. Pol. | Vertical | | | | | | |
|-------------------|--|----------------|---------------|----------------|----------------|-------------|----------|
| Test Mode: | TX BLE 1M Mode 2480MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 * | 4959.796 | 32.90 | 2.08 | 34.98 | 54.00 | -19.02 | AVG |
| 2 | 4959.810 | 44.11 | 2.08 | 46.19 | 74.00 | -27.81 | peak |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



| | | | | | | | |
|-------------------|--|--|--|--|--|--|--|
| Ant. Pol. | Horizontal | | | | | | |
| Test Mode: | TX BLE 2M Mode 2404MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 4808.109 | 44.50 | 1.84 | 46.34 | 74.00 | -27.66 | peak |
| 2 * | 4808.207 | 33.01 | 1.84 | 34.85 | 54.00 | -19.15 | AVG |

| |
|---|
| Remarks: |
| 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor |
| 2. Margin value = Level -Limit value |

| | | | | | | | |
|-------------------|--|--|--|--|--|--|--|
| Ant. Pol. | Vertical | | | | | | |
| Test Mode: | TX BLE 2M Mode 2404MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 | 4807.879 | 45.75 | 1.84 | 47.59 | 74.00 | -26.41 | peak |
| 2 * | 4808.180 | 34.44 | 1.84 | 36.28 | 54.00 | -17.72 | AVG |

| |
|---|
| Remarks: |
| 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor |
| 2. Margin value = Level -Limit value |



| | | | | | | | |
|-------------------|--|-----------------------|----------------------|-----------------------|-----------------------|--------------------|-----------------|
| Ant. Pol. | Horizontal | | | | | | |
| Test Mode: | TX BLE 2M Mode 2440MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 | 4880.012 | 44.26 | 1.96 | 46.22 | 74.00 | -27.78 | peak |
| 2 * | 4880.017 | 32.82 | 1.96 | 34.78 | 54.00 | -19.22 | AVG |

| | | | | | | | |
|-------------------|--|-----------------------|----------------------|-----------------------|-----------------------|--------------------|-----------------|
| Ant. Pol. | Vertical | | | | | | |
| Test Mode: | TX BLE 2M Mode 2440MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 | 4879.785 | 43.70 | 1.96 | 45.66 | 74.00 | -28.34 | peak |
| 2 * | 4879.888 | 32.77 | 1.96 | 34.73 | 54.00 | -19.27 | AVG |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



| Ant. Pol. | Horizontal | | | | | | |
|-------------------|--|----------------|---------------|----------------|----------------|-------------|----------|
| Test Mode: | TX BLE 2M Mode 2478MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 * | 4955.910 | 32.71 | 2.07 | 34.78 | 54.00 | -19.22 | AVG |
| 2 | 4956.117 | 45.15 | 2.07 | 47.22 | 74.00 | -26.78 | peak |

| Ant. Pol. | Vertical | | | | | | |
|-------------------|--|----------------|---------------|----------------|----------------|-------------|----------|
| Test Mode: | TX BLE 2M Mode 2478MHz | | | | | | |
| Remark: | No report for the emission which more than 20 dB below the prescribed limit. | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 * | 4955.882 | 32.77 | 2.07 | 34.84 | 54.00 | -19.16 | AVG |
| 2 | 4956.132 | 44.67 | 2.07 | 46.74 | 74.00 | -27.26 | peak |

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

| Restricted Frequency Band (MHz) | (dB μ V/m) (at 3m) | |
|---------------------------------|------------------------|---------|
| | Peak | Average |
| 2310 ~ 2390 | 74 | 54 |
| 2483.5 ~ 2500 | 74 | 54 |

Test Configuration

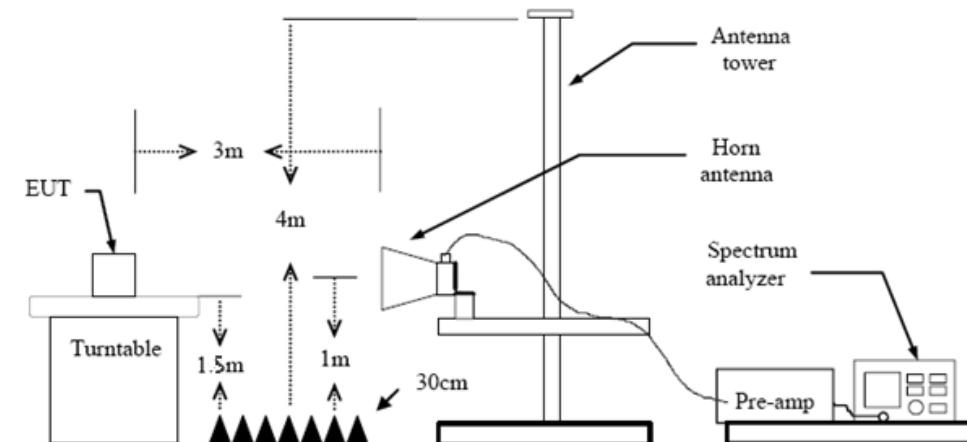

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

**Test Result**


| Ant. Pol. | Horizontal | | | | | | |
|---|------------------------|----------------|---------------|----------------|----------------|-------------|----------|
| Test Mode: | TX BLE 1M Mode 2402MHz | | | | | | |
| 120.0 dBuV/m | | | | | | | |
| | | | | | | | |
| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1 | 2390.000 | 14.62 | 31.31 | 45.93 | 74.00 | -28.07 | peak |
| 2 * | 2390.000 | 3.72 | 31.31 | 35.03 | 54.00 | -18.97 | AVG |
| | | | | | | | |
| Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value | | | | | | | |


CTC Laboratories, Inc.


Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)


TRF No: CTC-TR-058_A2


For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

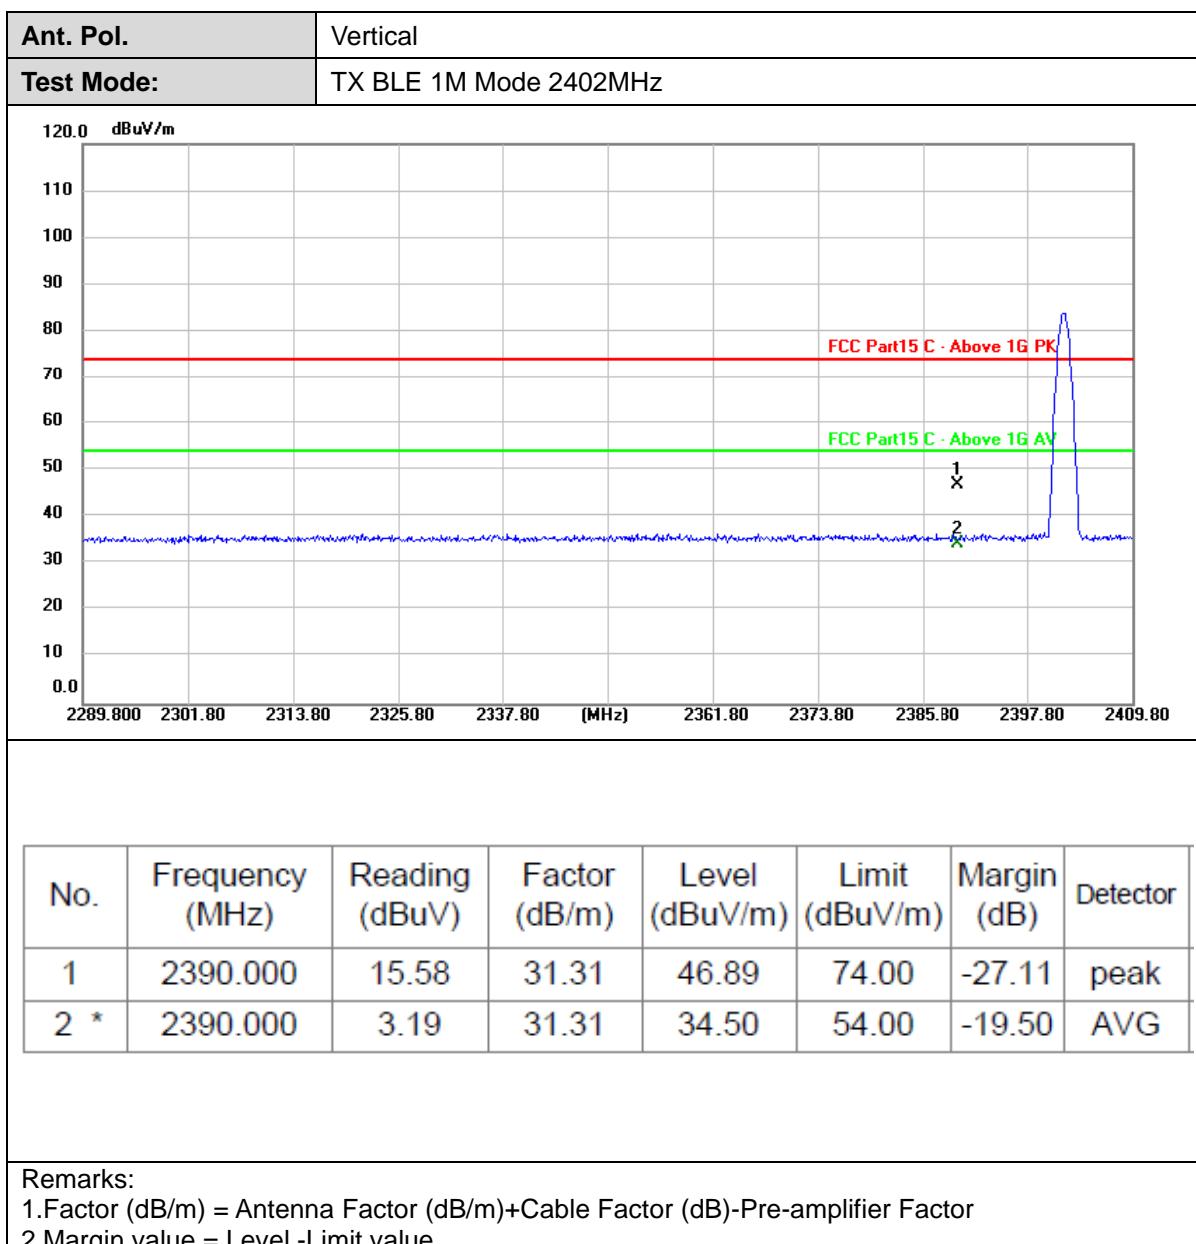


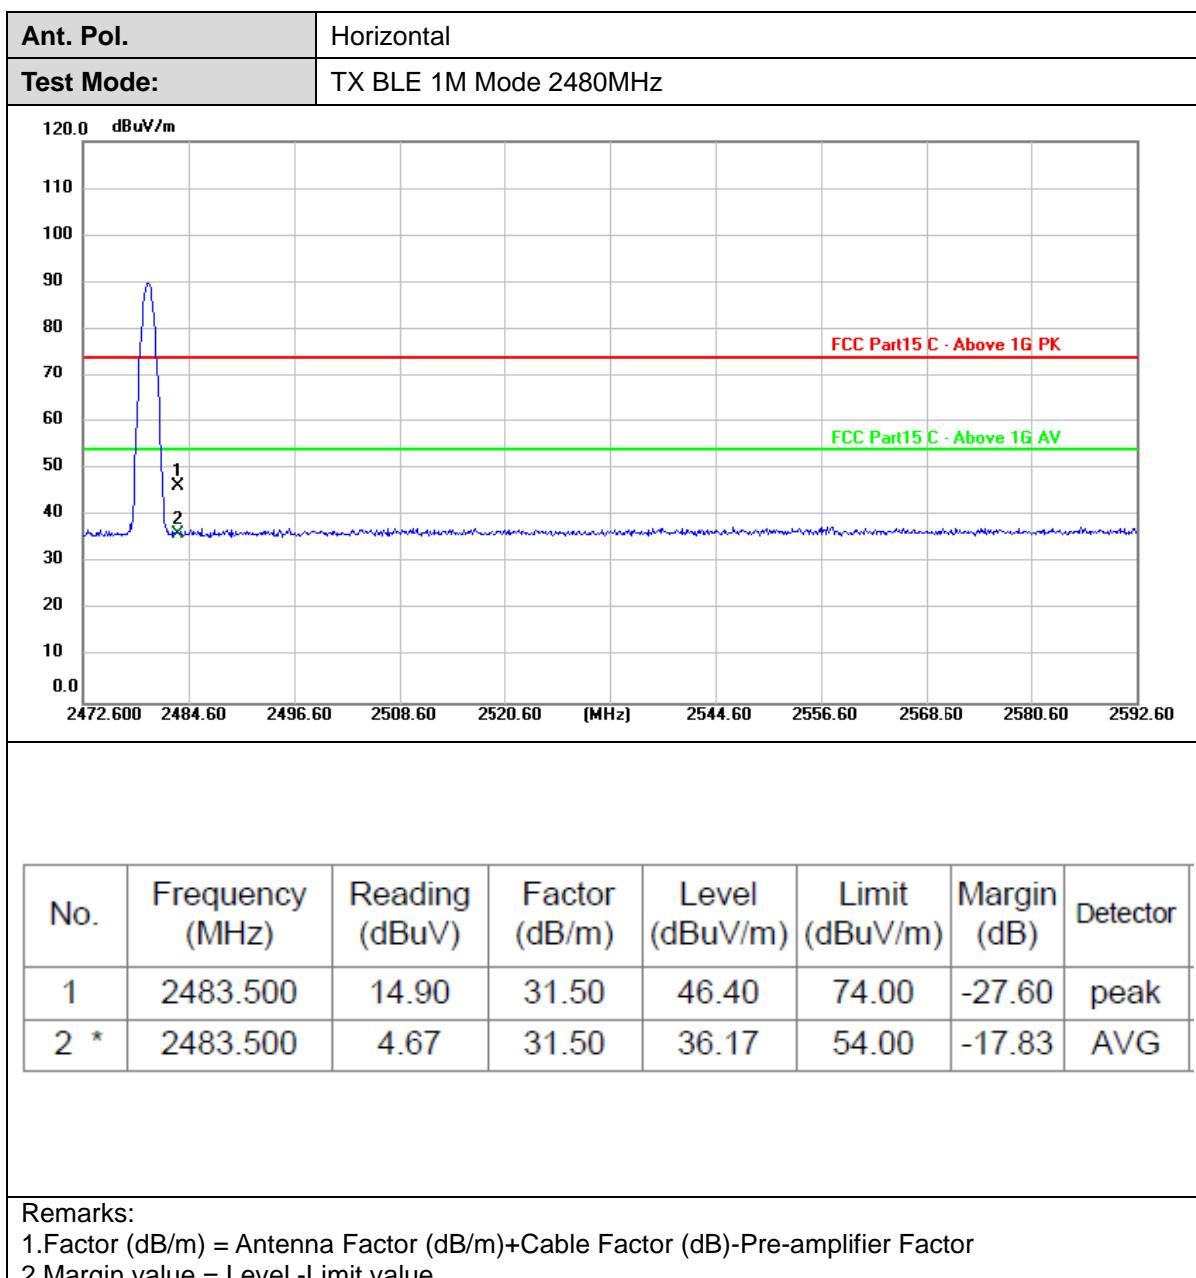


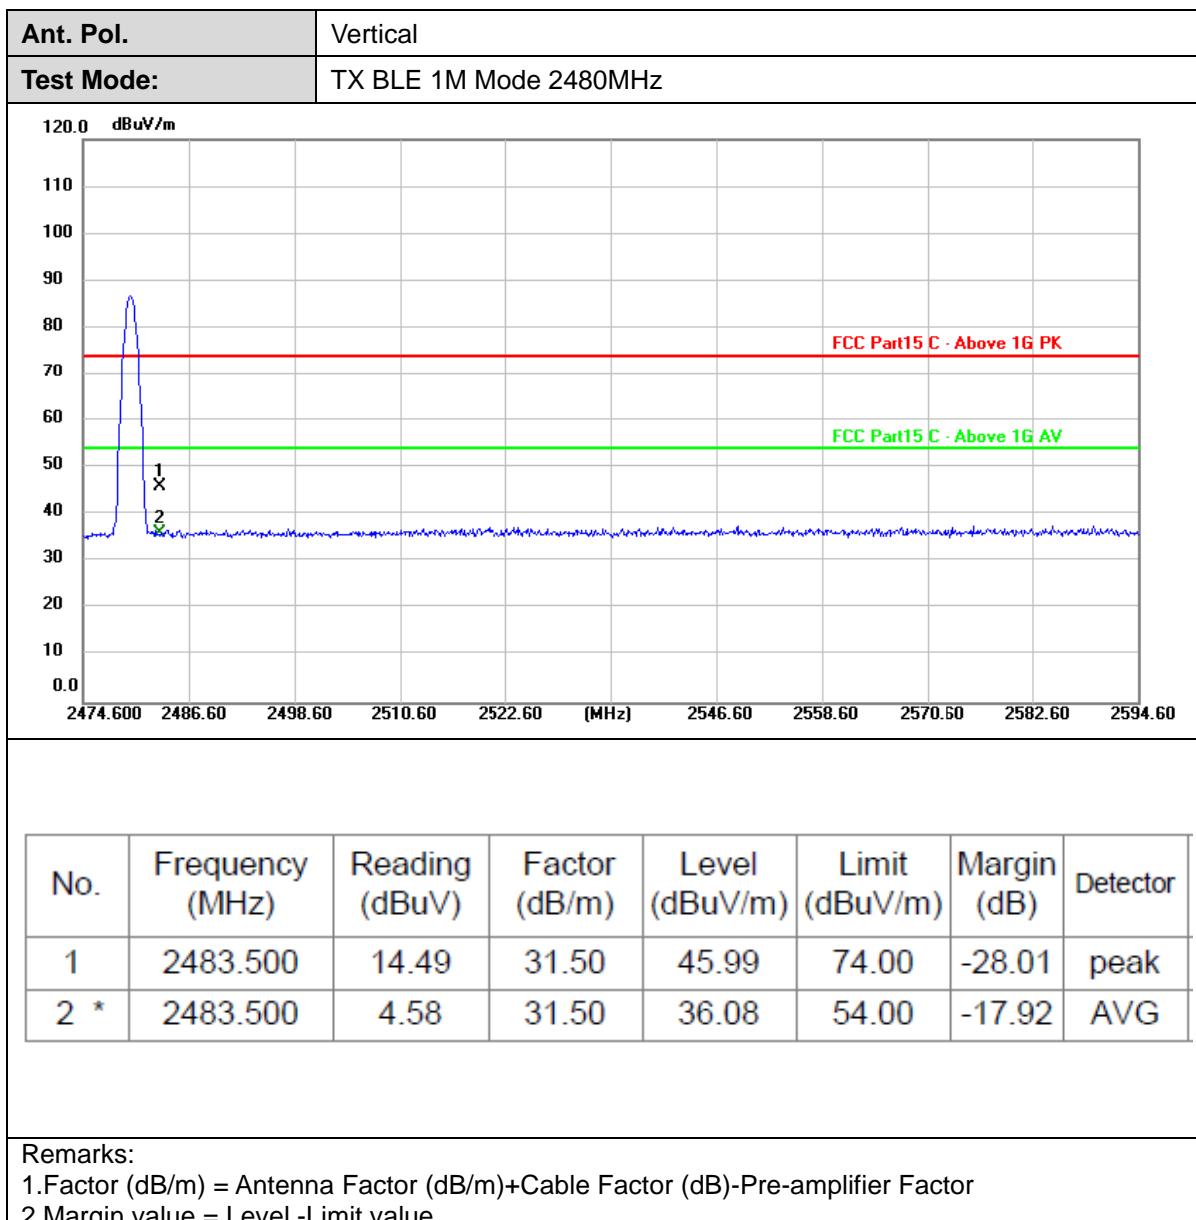

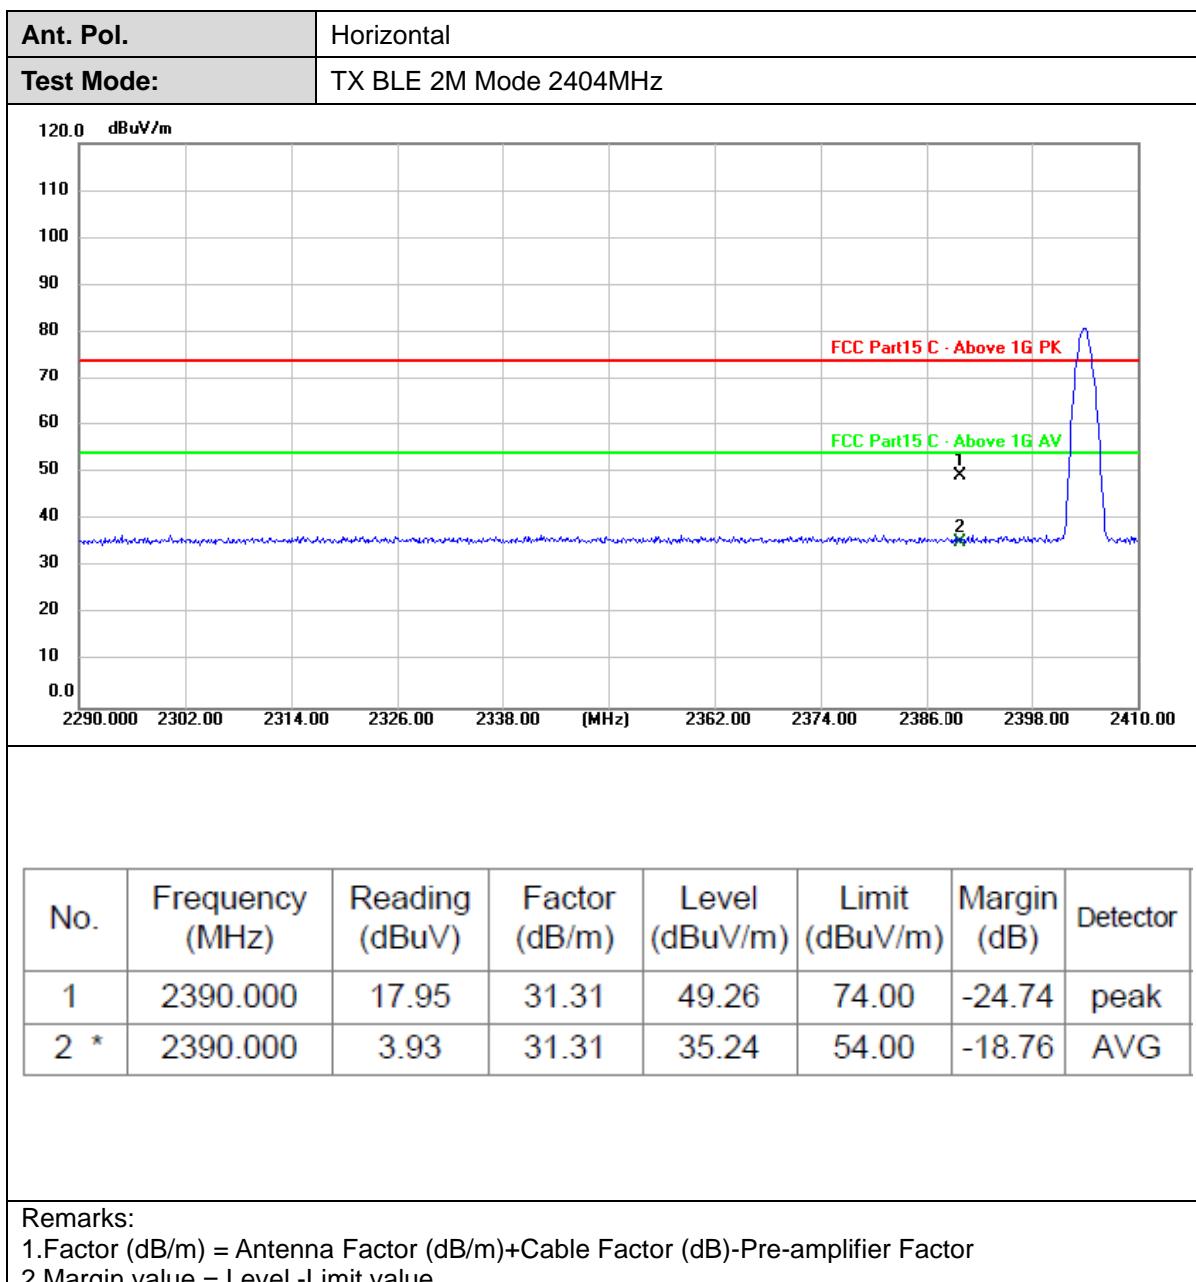

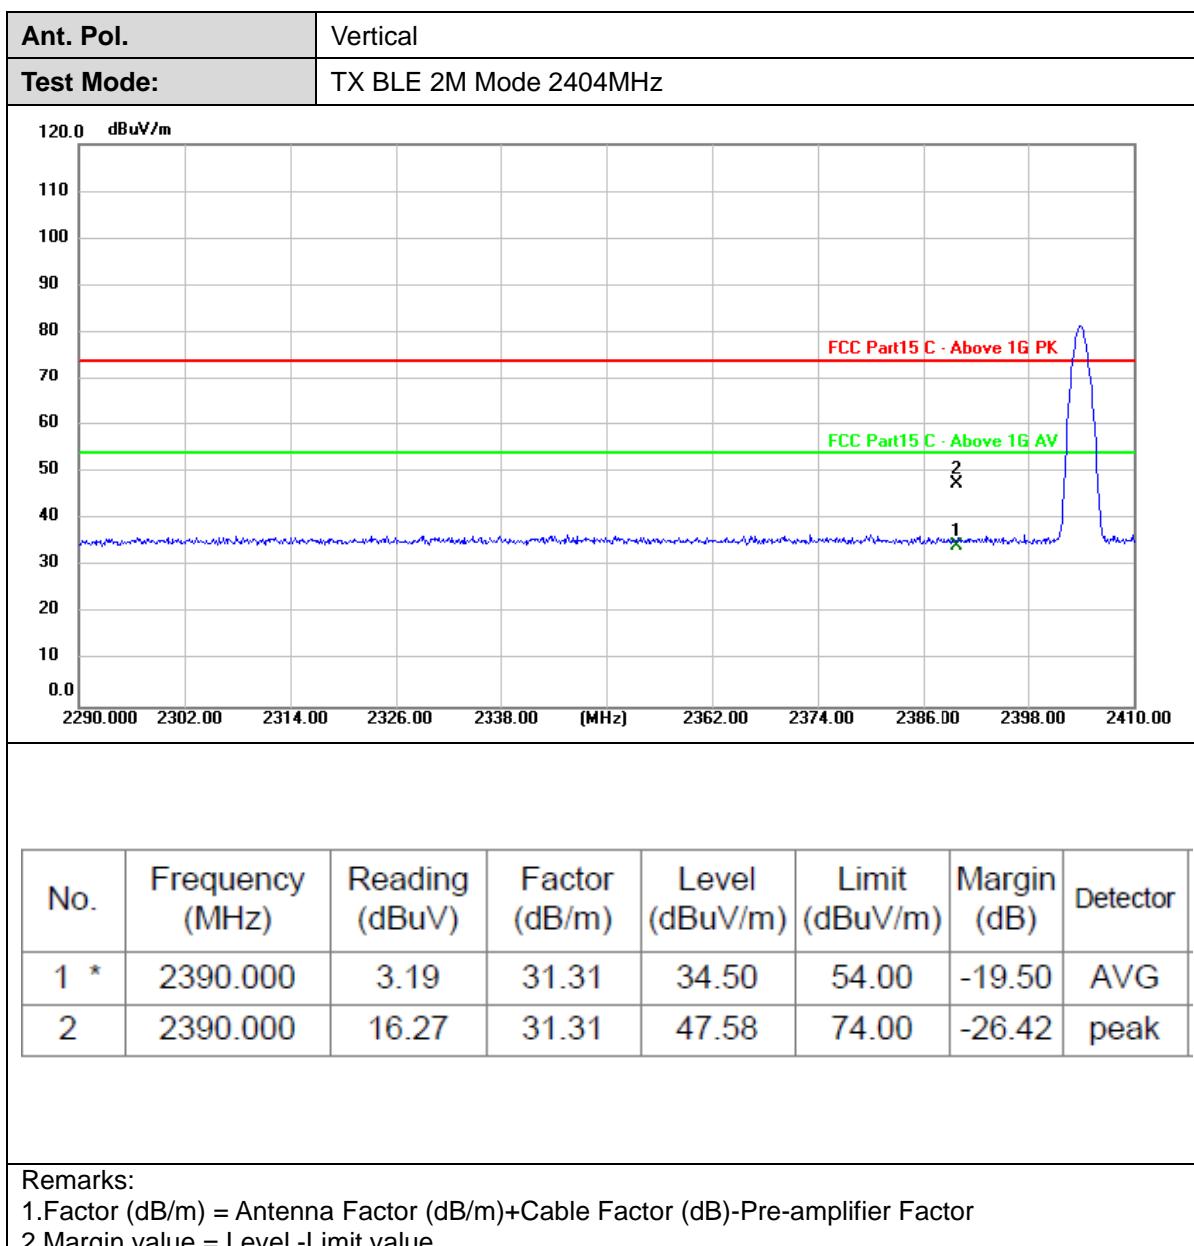

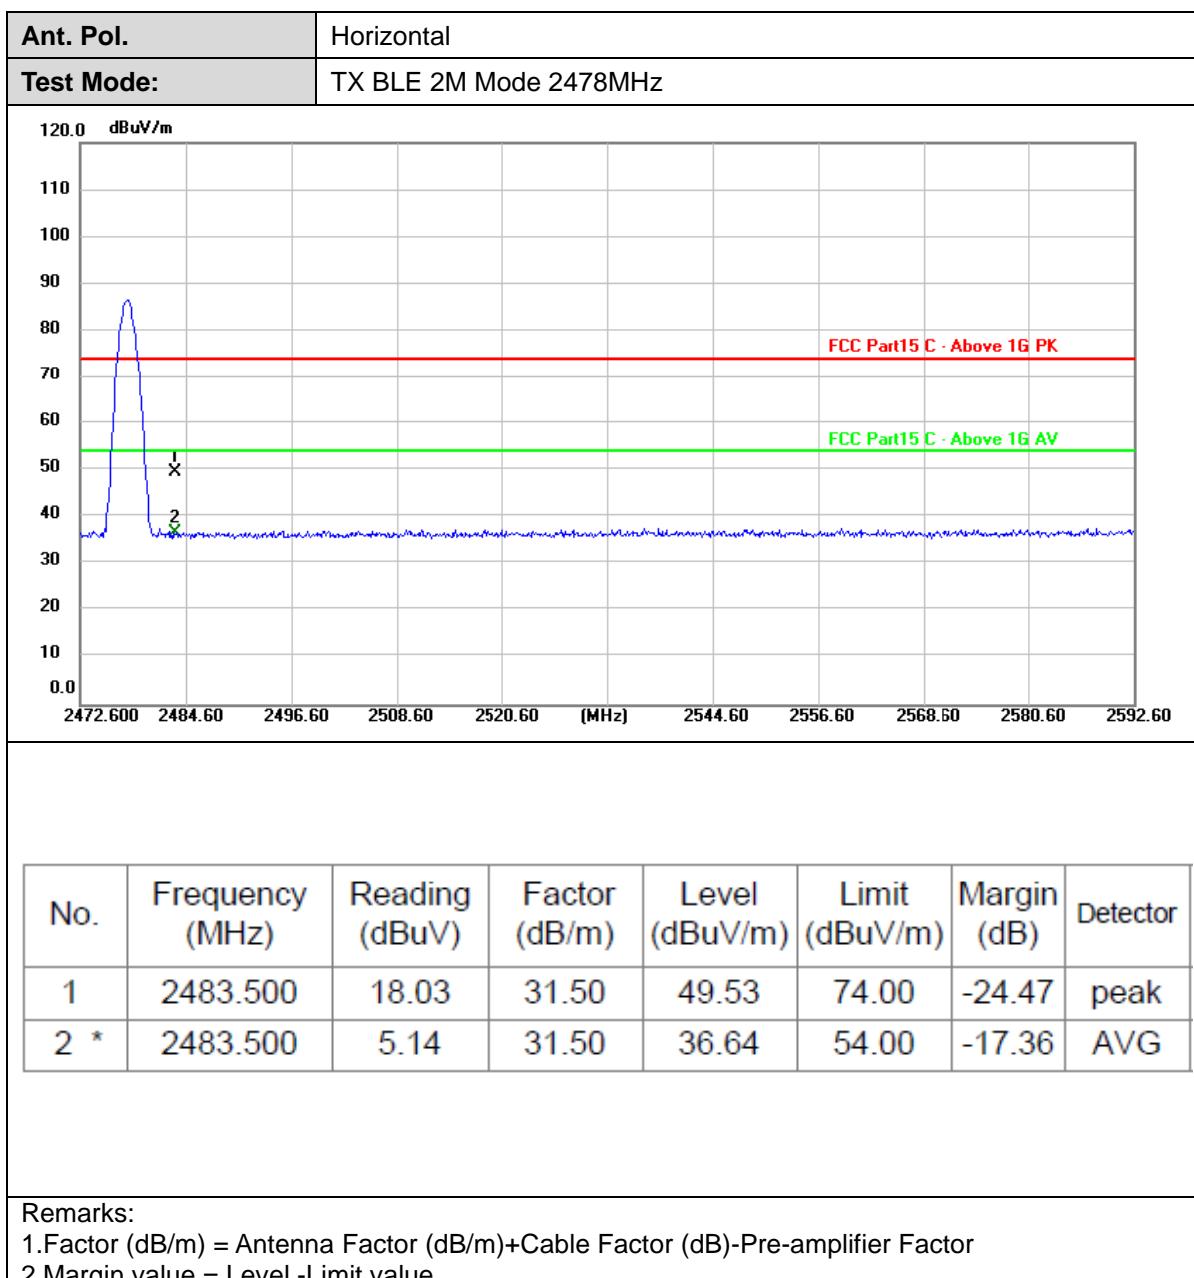

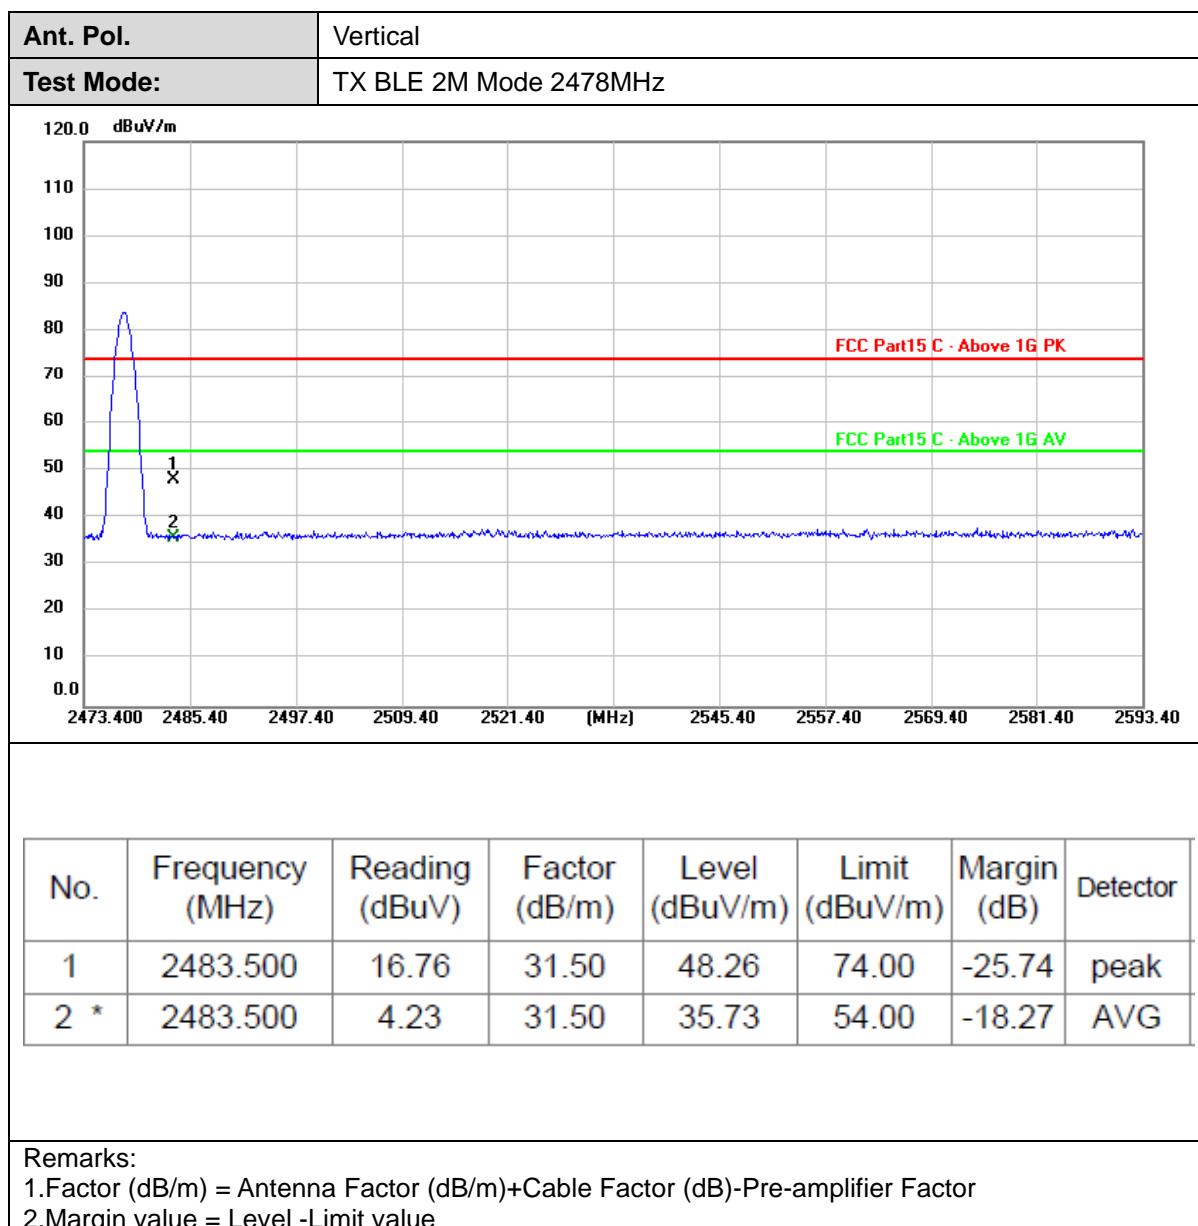




3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.


Test Result

Band edge measurements

| Test Mode | Antenna | ChName | Freq(MHz) | RefLevel[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|--------|-----------|---------------|-------------|---------------|---------|
| BLE_1M | Ant1 | Low | 2402 | 7.26 | -50.10 | \leq -12.75 | PASS |
| | | High | 2480 | 7.12 | -54.58 | \leq -12.88 | PASS |
| BLE_2M | Ant1 | Low | 2404 | 7.23 | -50.02 | \leq -12.77 | PASS |
| | | High | 2478 | 7.26 | -57.51 | \leq -12.74 | PASS |



Test Graphs

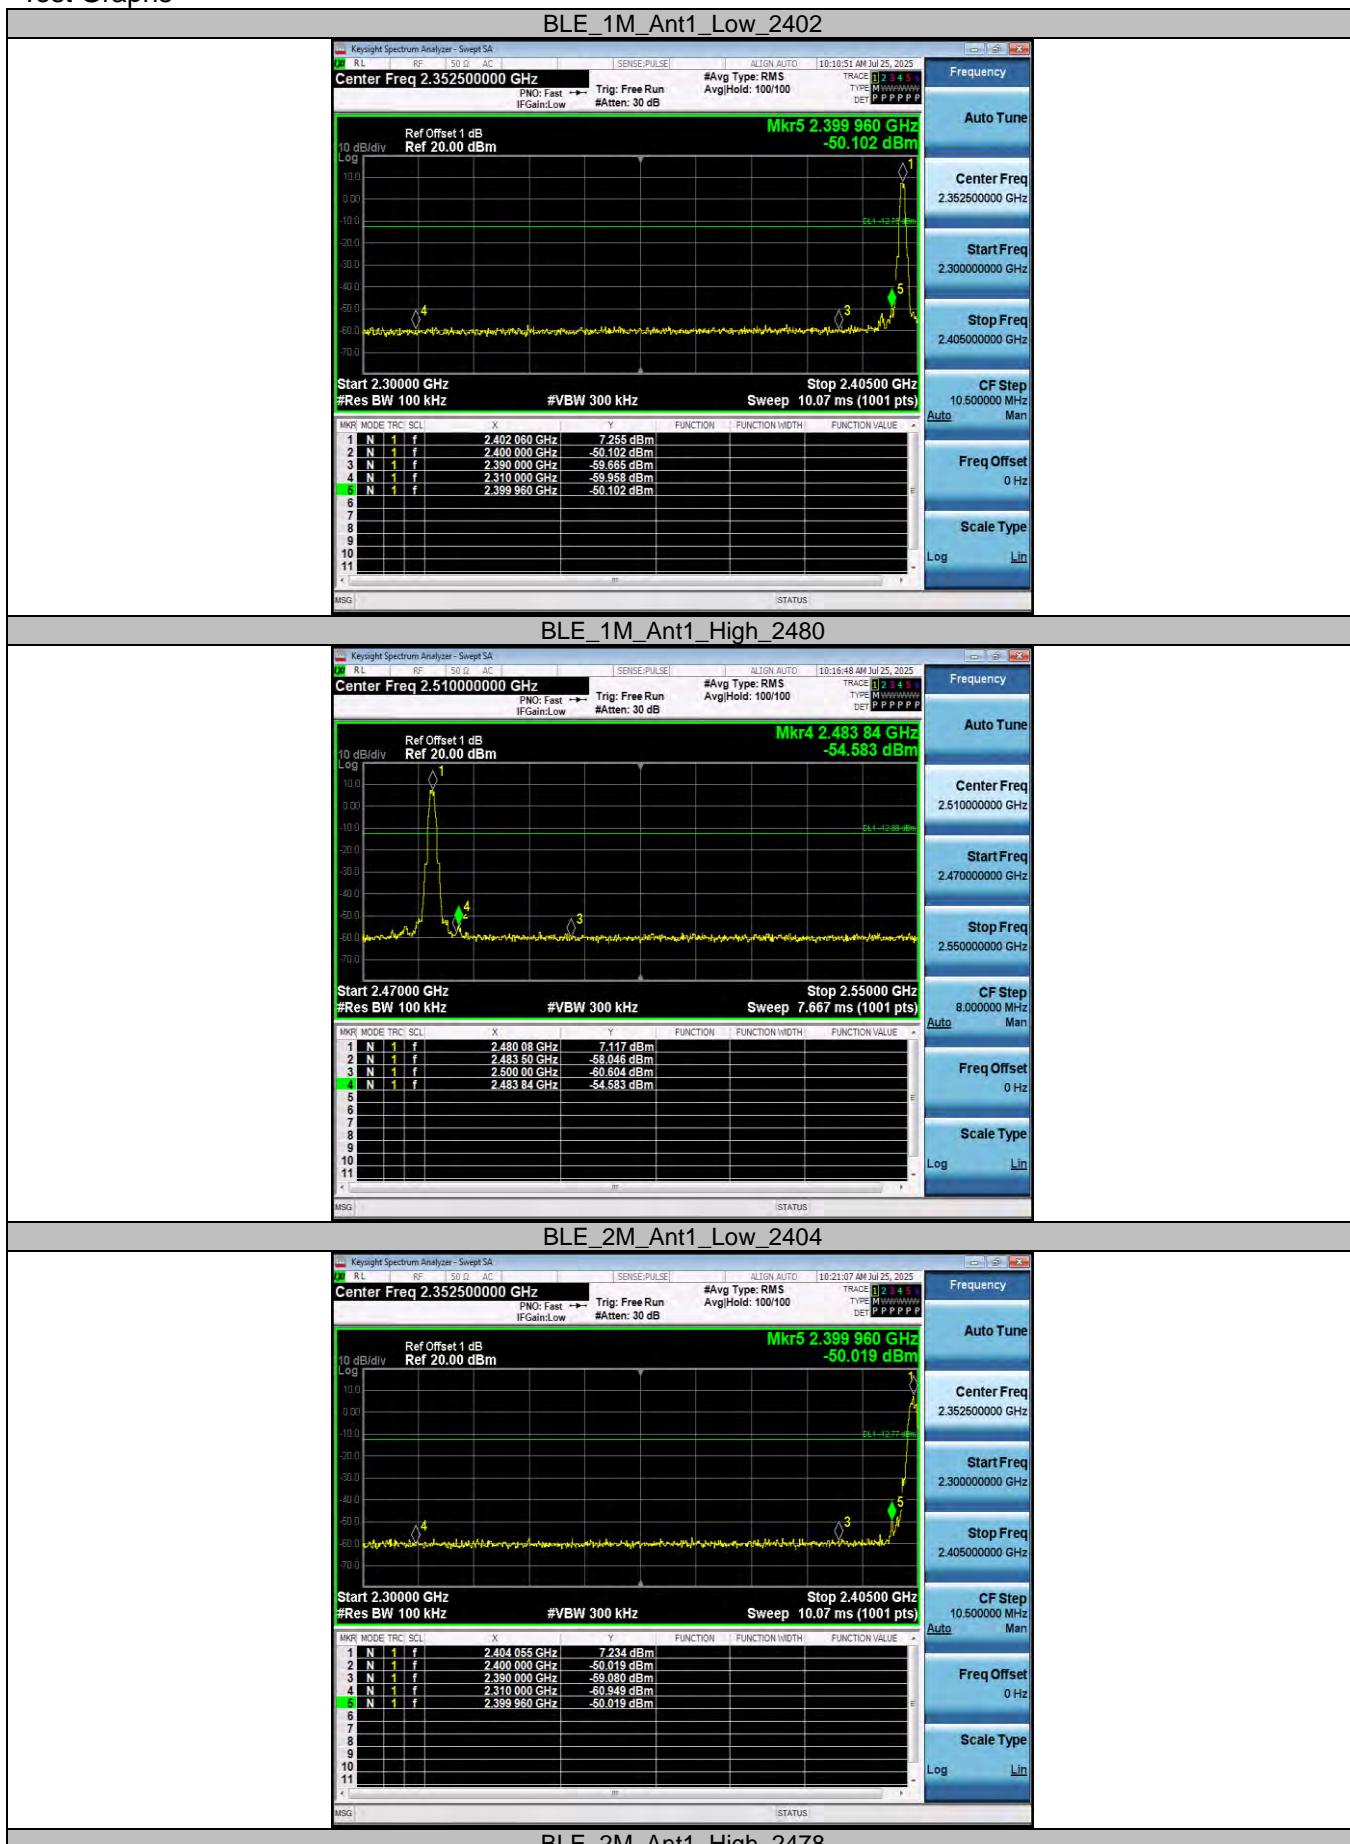


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

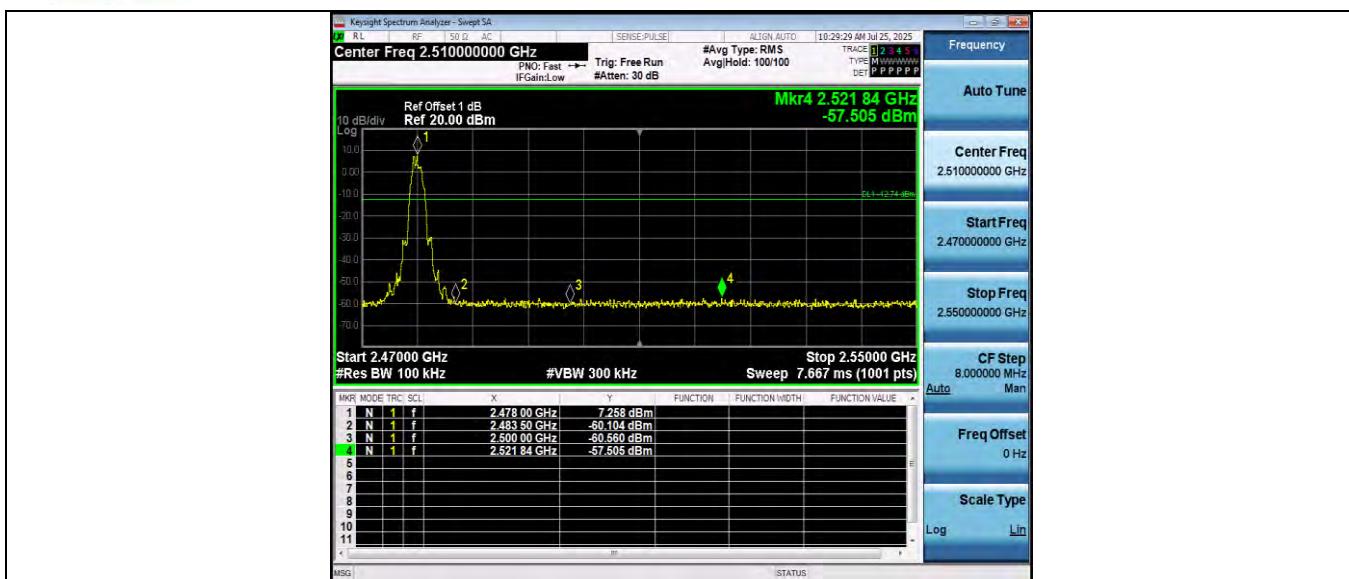

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-058_A2



Conducted Spurious Emission

| Test Mode | Antenna | Freq(MHz) | FreqRange [MHz] | RefLevel [dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|-----------|-----------------|----------------|-------------|------------|---------|
| BLE_1M | Ant1 | 2402 | Reference | 7.21 | 7.21 | --- | PASS |
| | | | 30~1000 | 7.21 | -62.95 | ≤-12.79 | PASS |
| | | | 1000~26500 | 7.21 | -54.24 | ≤-12.79 | PASS |
| | | 2440 | Reference | 7.09 | 7.09 | --- | PASS |
| | | | 30~1000 | 7.09 | -62.68 | ≤-12.91 | PASS |
| | | | 1000~26500 | 7.09 | -54.69 | ≤-12.91 | PASS |
| | | 2480 | Reference | 7.04 | 7.04 | --- | PASS |
| | | | 30~1000 | 7.04 | -62.99 | ≤-12.96 | PASS |
| | | | 1000~26500 | 7.04 | -54.58 | ≤-12.96 | PASS |
| BLE_2M | Ant1 | 2404 | Reference | 7.29 | 7.29 | --- | PASS |
| | | | 30~1000 | 7.29 | -62.05 | ≤-12.71 | PASS |
| | | | 1000~26500 | 7.29 | -55.07 | ≤-12.71 | PASS |
| | | 2440 | Reference | 7.16 | 7.16 | --- | PASS |
| | | | 30~1000 | 7.16 | -61.63 | ≤-12.84 | PASS |
| | | | 1000~26500 | 7.16 | -53.93 | ≤-12.84 | PASS |
| | | 2478 | Reference | 7.15 | 7.15 | --- | PASS |
| | | | 30~1000 | 7.15 | -62.72 | ≤-12.85 | PASS |
| | | | 1000~26500 | 7.15 | -55.04 | ≤-12.85 | PASS |

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-058_A2



Test Graphs



CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com






CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

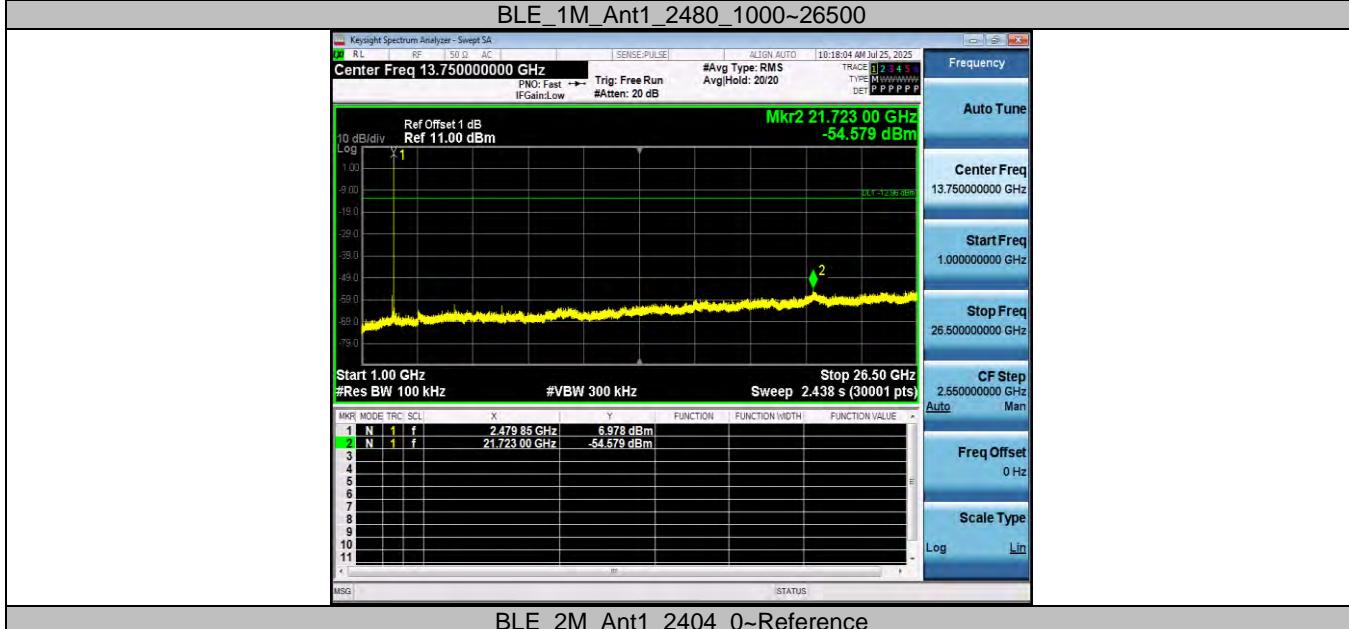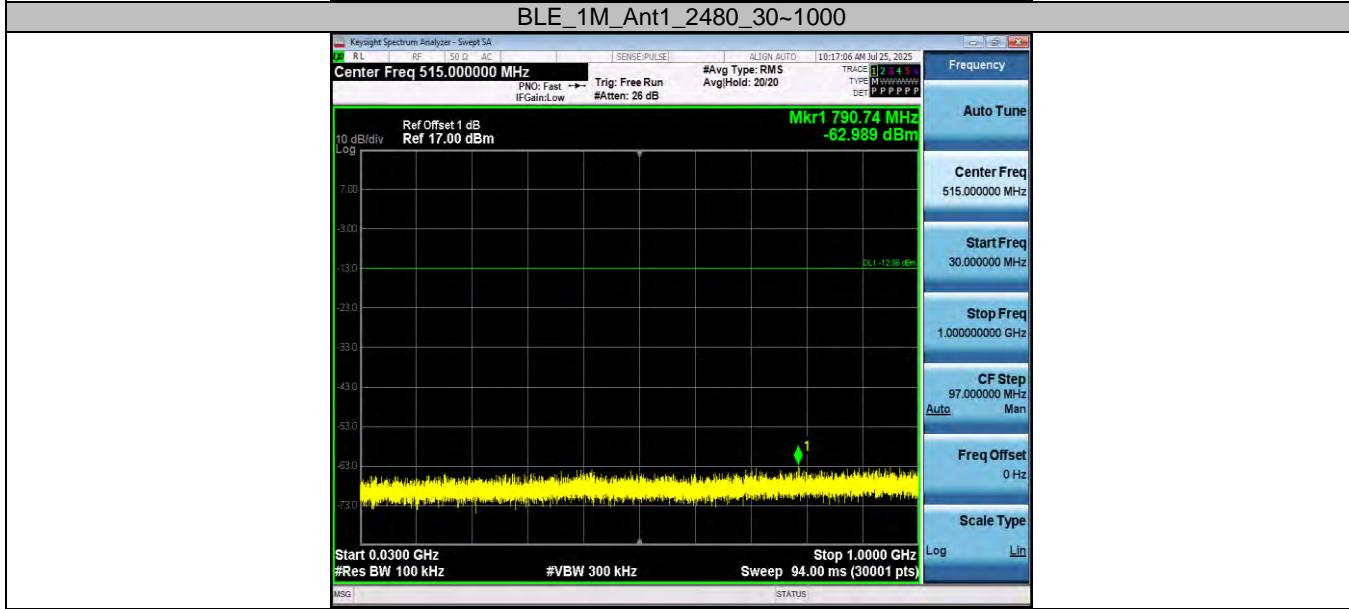

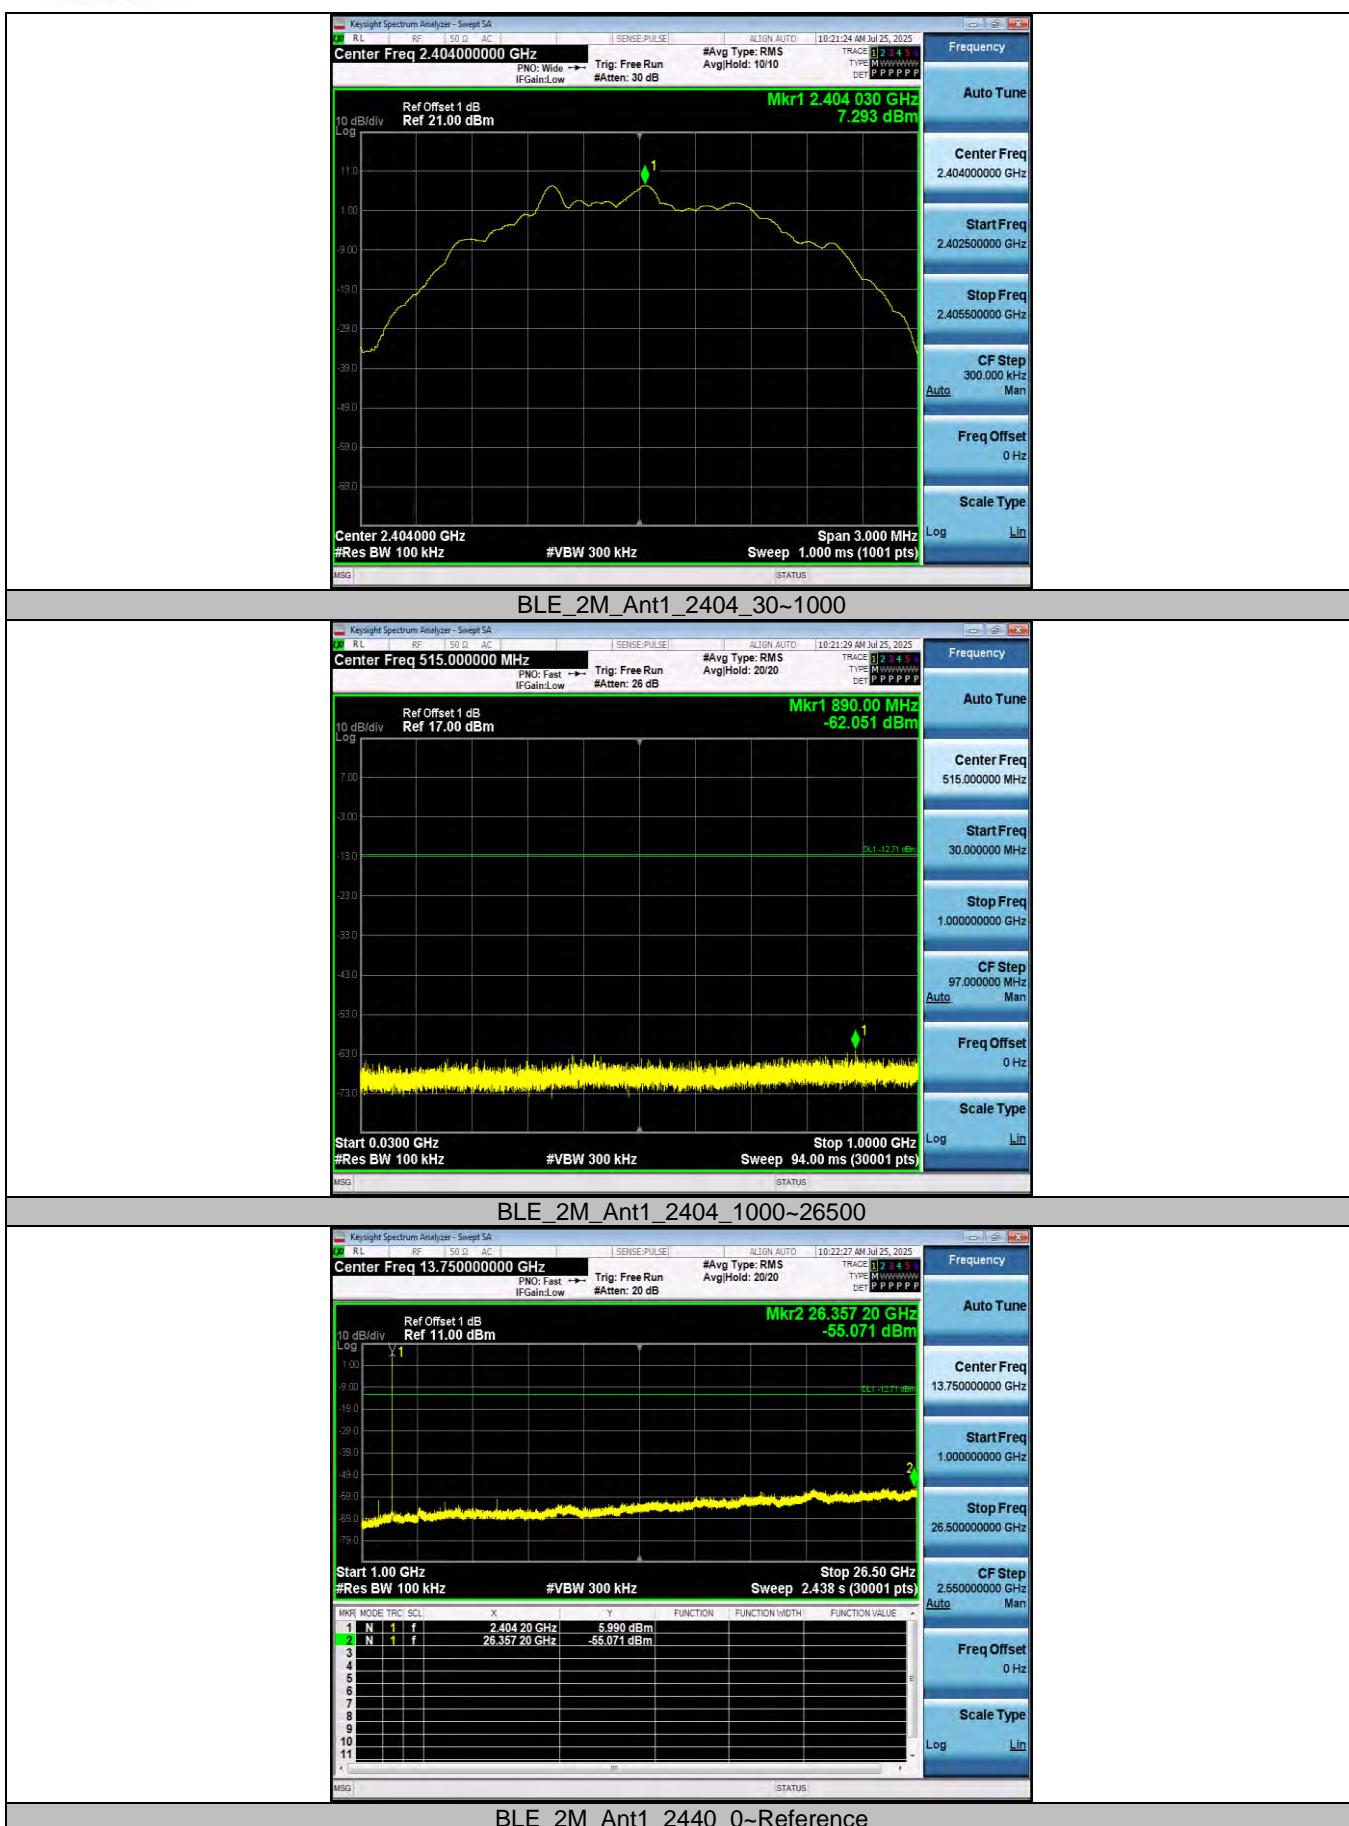


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

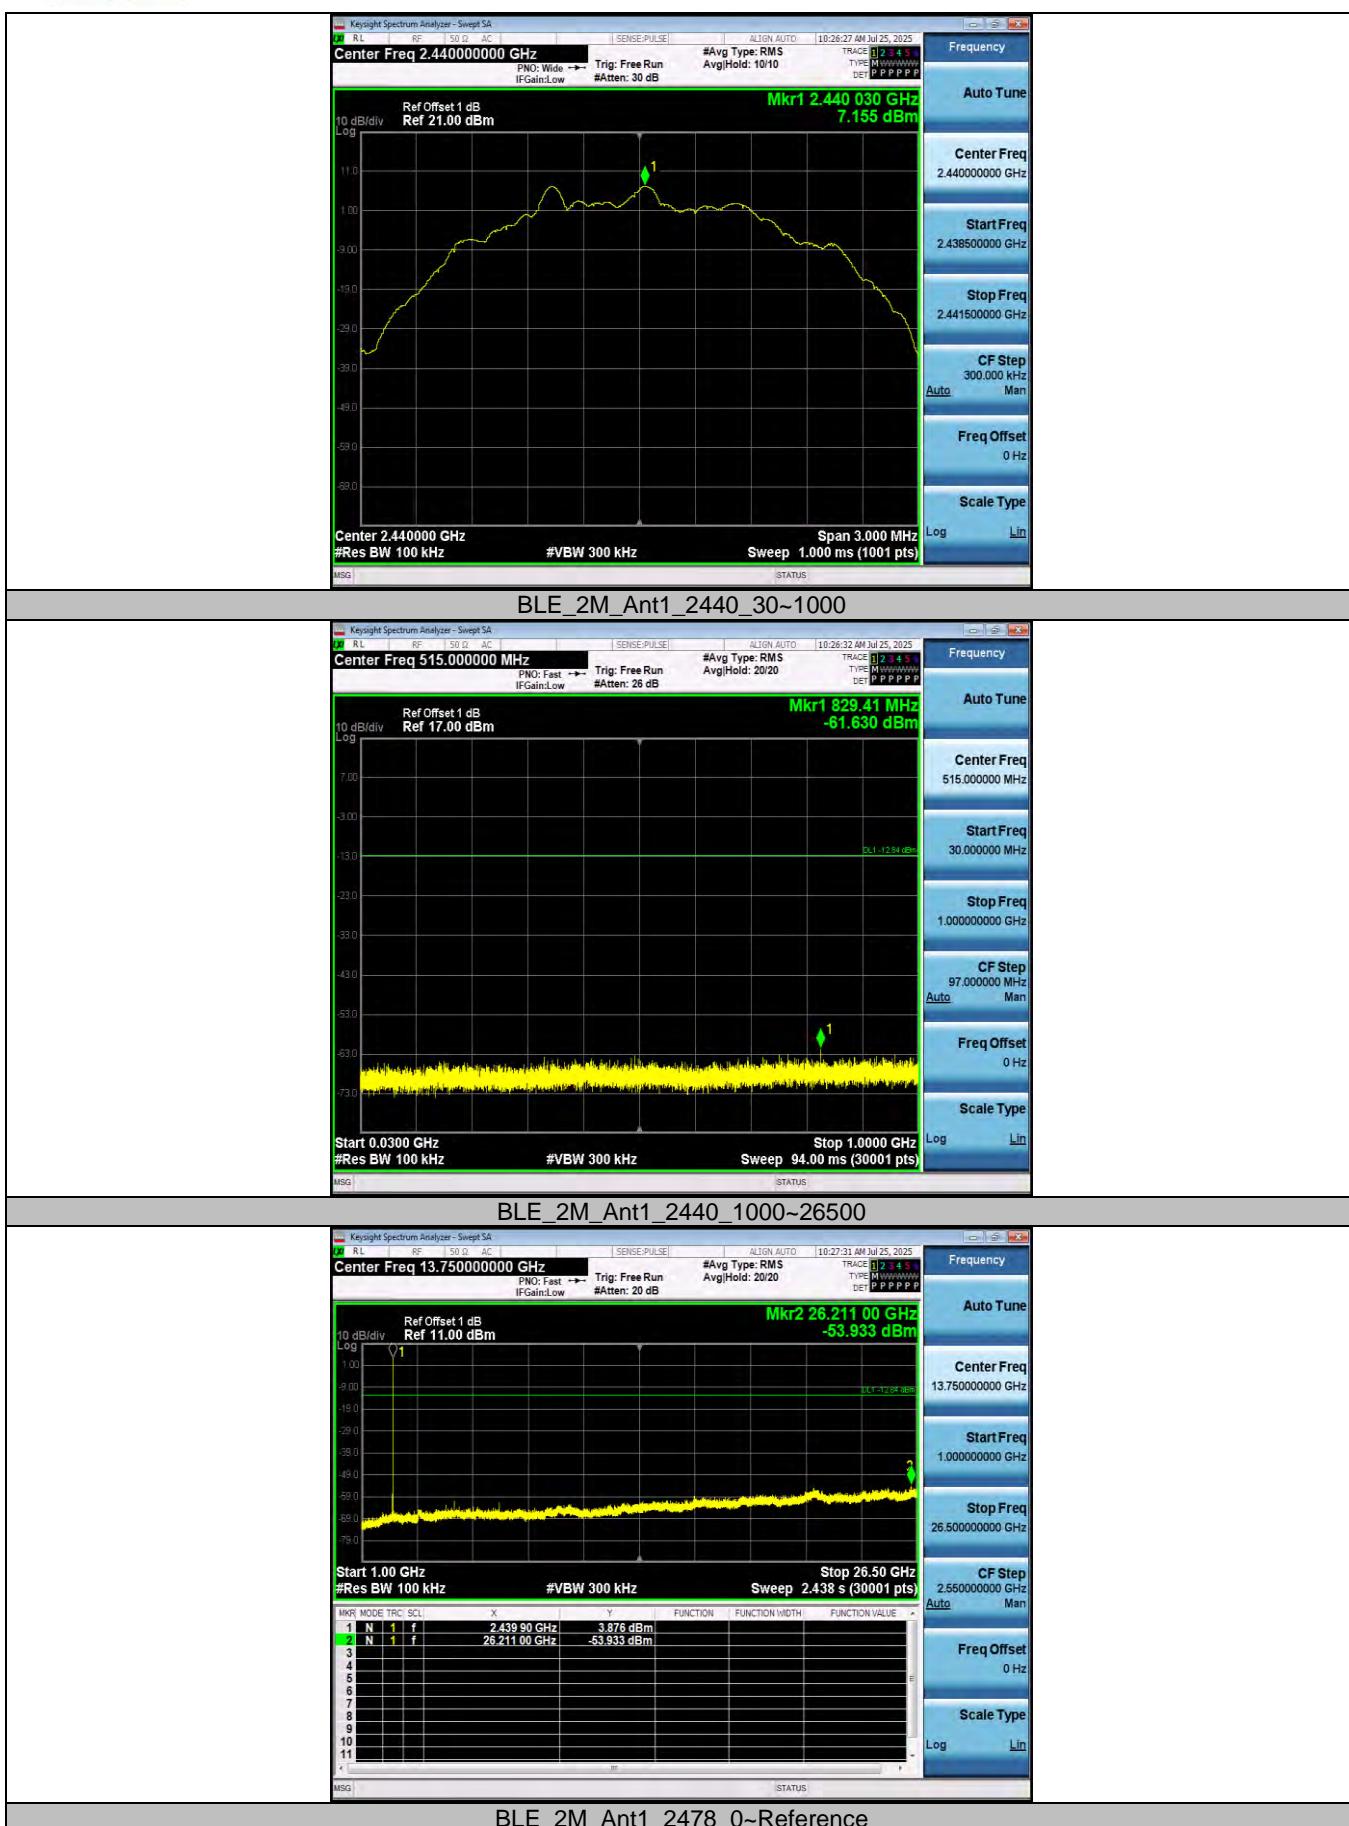


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

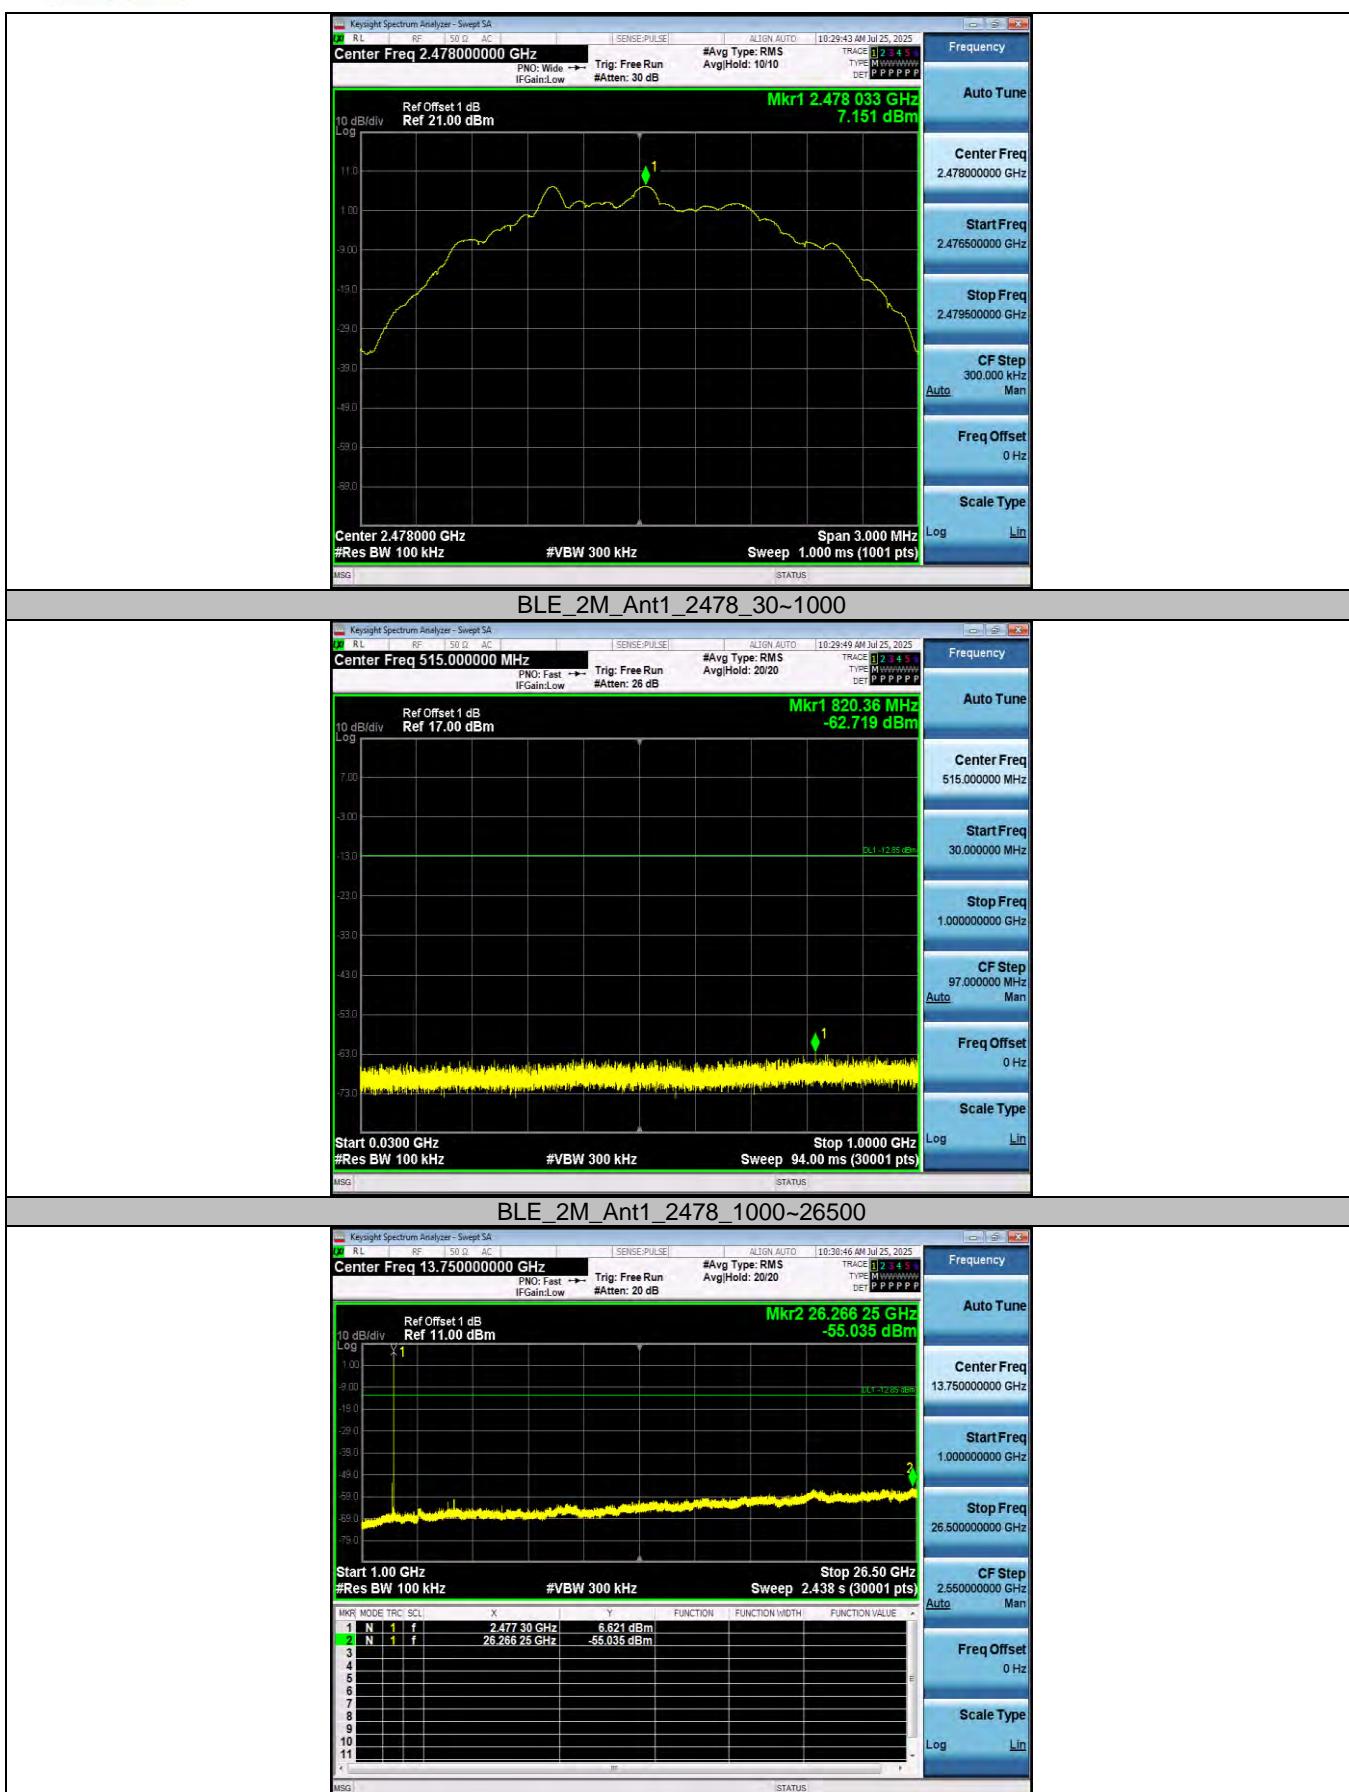

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com




3.5. DTS Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2) / RSS-247 5.2 a

| Test Item | Limit | Frequency Range (MHz) |
|---------------|-----------------------------------|-----------------------|
| DTS Bandwidth | ≥ 500 kHz (6dB bandwidth) | 2400~2483.5 |

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. DTS Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.OCB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode


Please refer to the clause 2.4.

Test Result

| Test Mode | Antenna | Freq(MHz) | OCB [MHz] | DTS BW [MHz] | Limit[MHz] | Verdict |
|-----------|---------|-----------|-----------|--------------|------------|---------|
| BLE_1M | Ant1 | 2402 | 1.0018 | 0.668 | ≥ 0.5 | PASS |
| | | 2440 | 1.0087 | 0.660 | | |
| | | 2480 | 1.0009 | 0.644 | | |
| BLE_2M | Ant1 | 2404 | 1.9963 | 1.136 | | |
| | | 2440 | 1.9939 | 1.124 | | |
| | | 2478 | 2.0061 | 1.116 | | |



99% Bandwidth:

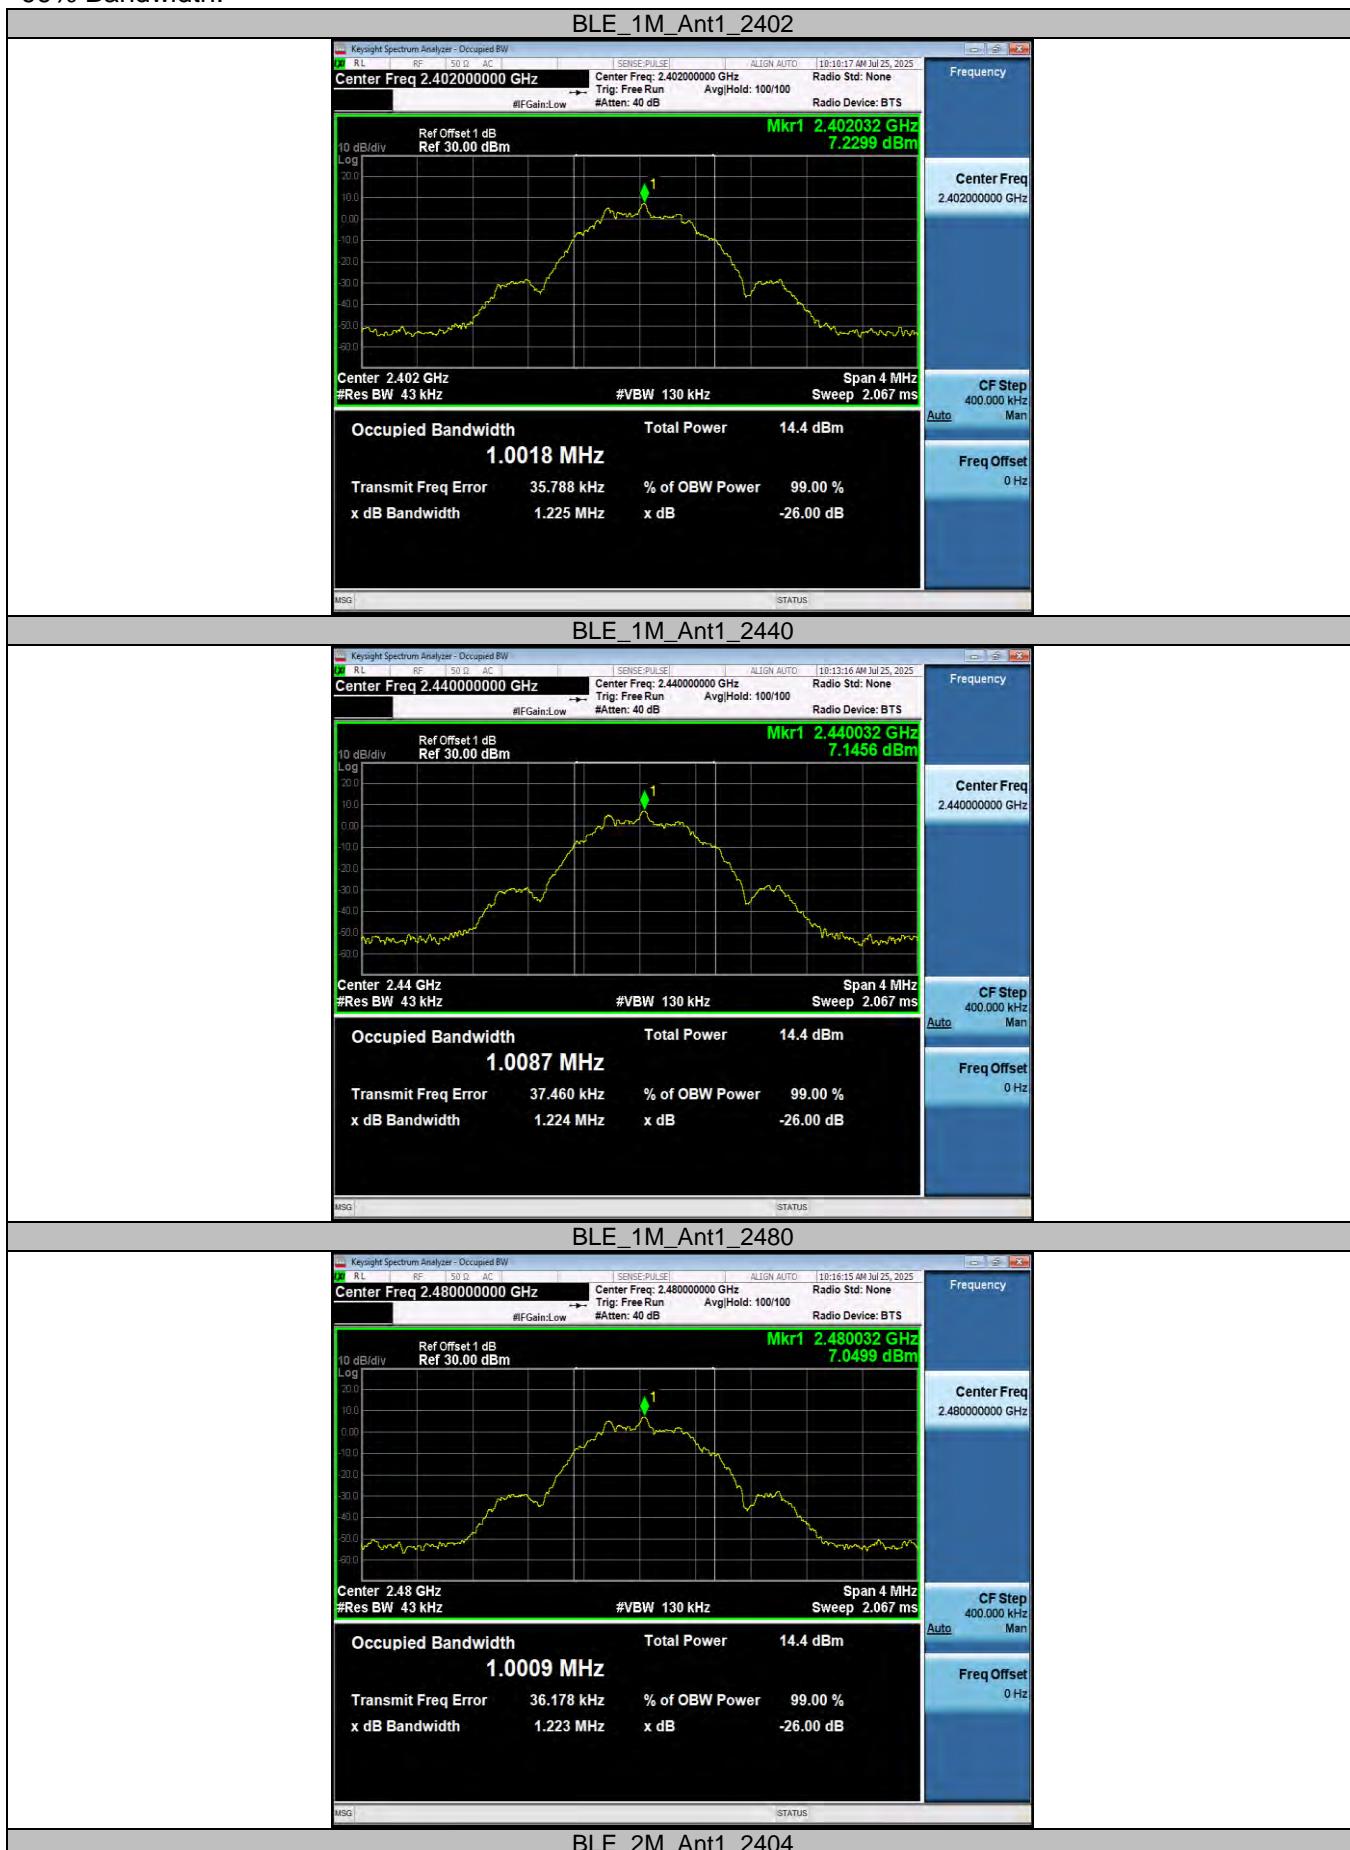

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-058_A2



CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-058_A2



DTS Bandwidth:

BLE_1M_Ant1_2402



Frequency
Auto Tune
Center Freq
Start Freq
Stop Freq
CF Step
Auto
Freq Offset
Scale Type
Log Lin

BLE_1M_Ant1_2440



Frequency
Auto Tune
Center Freq
Start Freq
Stop Freq
CF Step
Auto
Freq Offset
Scale Type
Log Lin

BLE_1M_Ant1_2480



Frequency
Auto Tune
Center Freq
Start Freq
Stop Freq
CF Step
Auto
Freq Offset
Scale Type
Log Lin

BLE_2M_Ant1_2404

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing

Society : yz.cncaq.com



CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com




3.6. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3) / RSS-247 5.4 d

| Section | Test Item | Limit | Frequency Range (MHz) |
|------------------------------|--------------------------------|-----------------|-----------------------|
| FCC CFR 47 Part15.247 (b)(3) | Maximum Conducted Output Power | 1 Watt or 30dBm | 2400~2483.5 |
| ISED RSS-247 5.4 d | Maximum Conducted Output Power | 1 Watt or 30dBm | 2400~2483.5 |
| | EIRP | 4 Watt or 36dBm | 2400~2483.5 |

Test Configuration

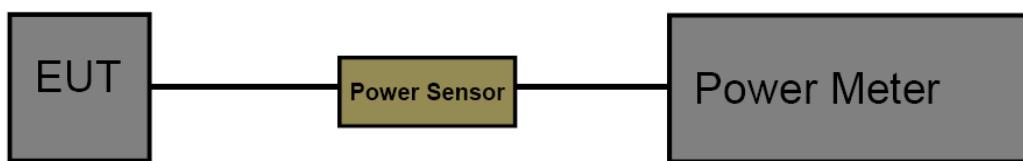

Test Procedure

1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
2. Peak power measurements were performed only when the EUT was transmitting at its peak power control level using a broadband power meter with a pulse sensor.
3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
Record the measurement data.

Test Mode

Please refer to the clause 2.4.

Test Result

| Test Mode | Freq(MHz) | Peak Output Power[dBm] | Output Power Limit[dBm] | Verdict |
|-----------|-----------|------------------------|-------------------------|---------|
| BLE_1M | 2402 | 7.35 | ≤30 | PASS |
| | 2440 | 7.19 | ≤30 | PASS |
| | 2480 | 7.12 | ≤30 | PASS |
| BLE_2M | 2404 | 7.33 | ≤30 | PASS |
| | 2440 | 7.18 | ≤30 | PASS |
| | 2478 | 7.13 | ≤30 | PASS |




3.7. Power Spectral Density

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e) / RSS-247 5.2 b

| Test Item | Limit | Frequency Range (MHz) |
|------------------------|----------------------|-----------------------|
| Power Spectral Density | 8 dBm (in any 3 kHz) | 2400~2483.5 |

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to DTS channel center frequency.
Set the span to 1.5 times the DTS bandwidth.
Set the RBW to: 3 kHz.
Set the VBW to: 10 kHz.
Detector: peak.
Sweep time: auto.

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.4.

Test Result

| Test Mode | Antenna | Freq(MHz) | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|-----------|------------------|-----------------|---------|
| BLE_1M | Ant1 | 2402 | -3.57 | ≤8.00 | PASS |
| | | 2440 | -3.74 | ≤8.00 | PASS |
| | | 2480 | -3.71 | ≤8.00 | PASS |
| BLE_2M | Ant1 | 2404 | -4.16 | ≤8.00 | PASS |
| | | 2440 | -4.25 | ≤8.00 | PASS |
| | | 2478 | -4.09 | ≤8.00 | PASS |



Test Graphs

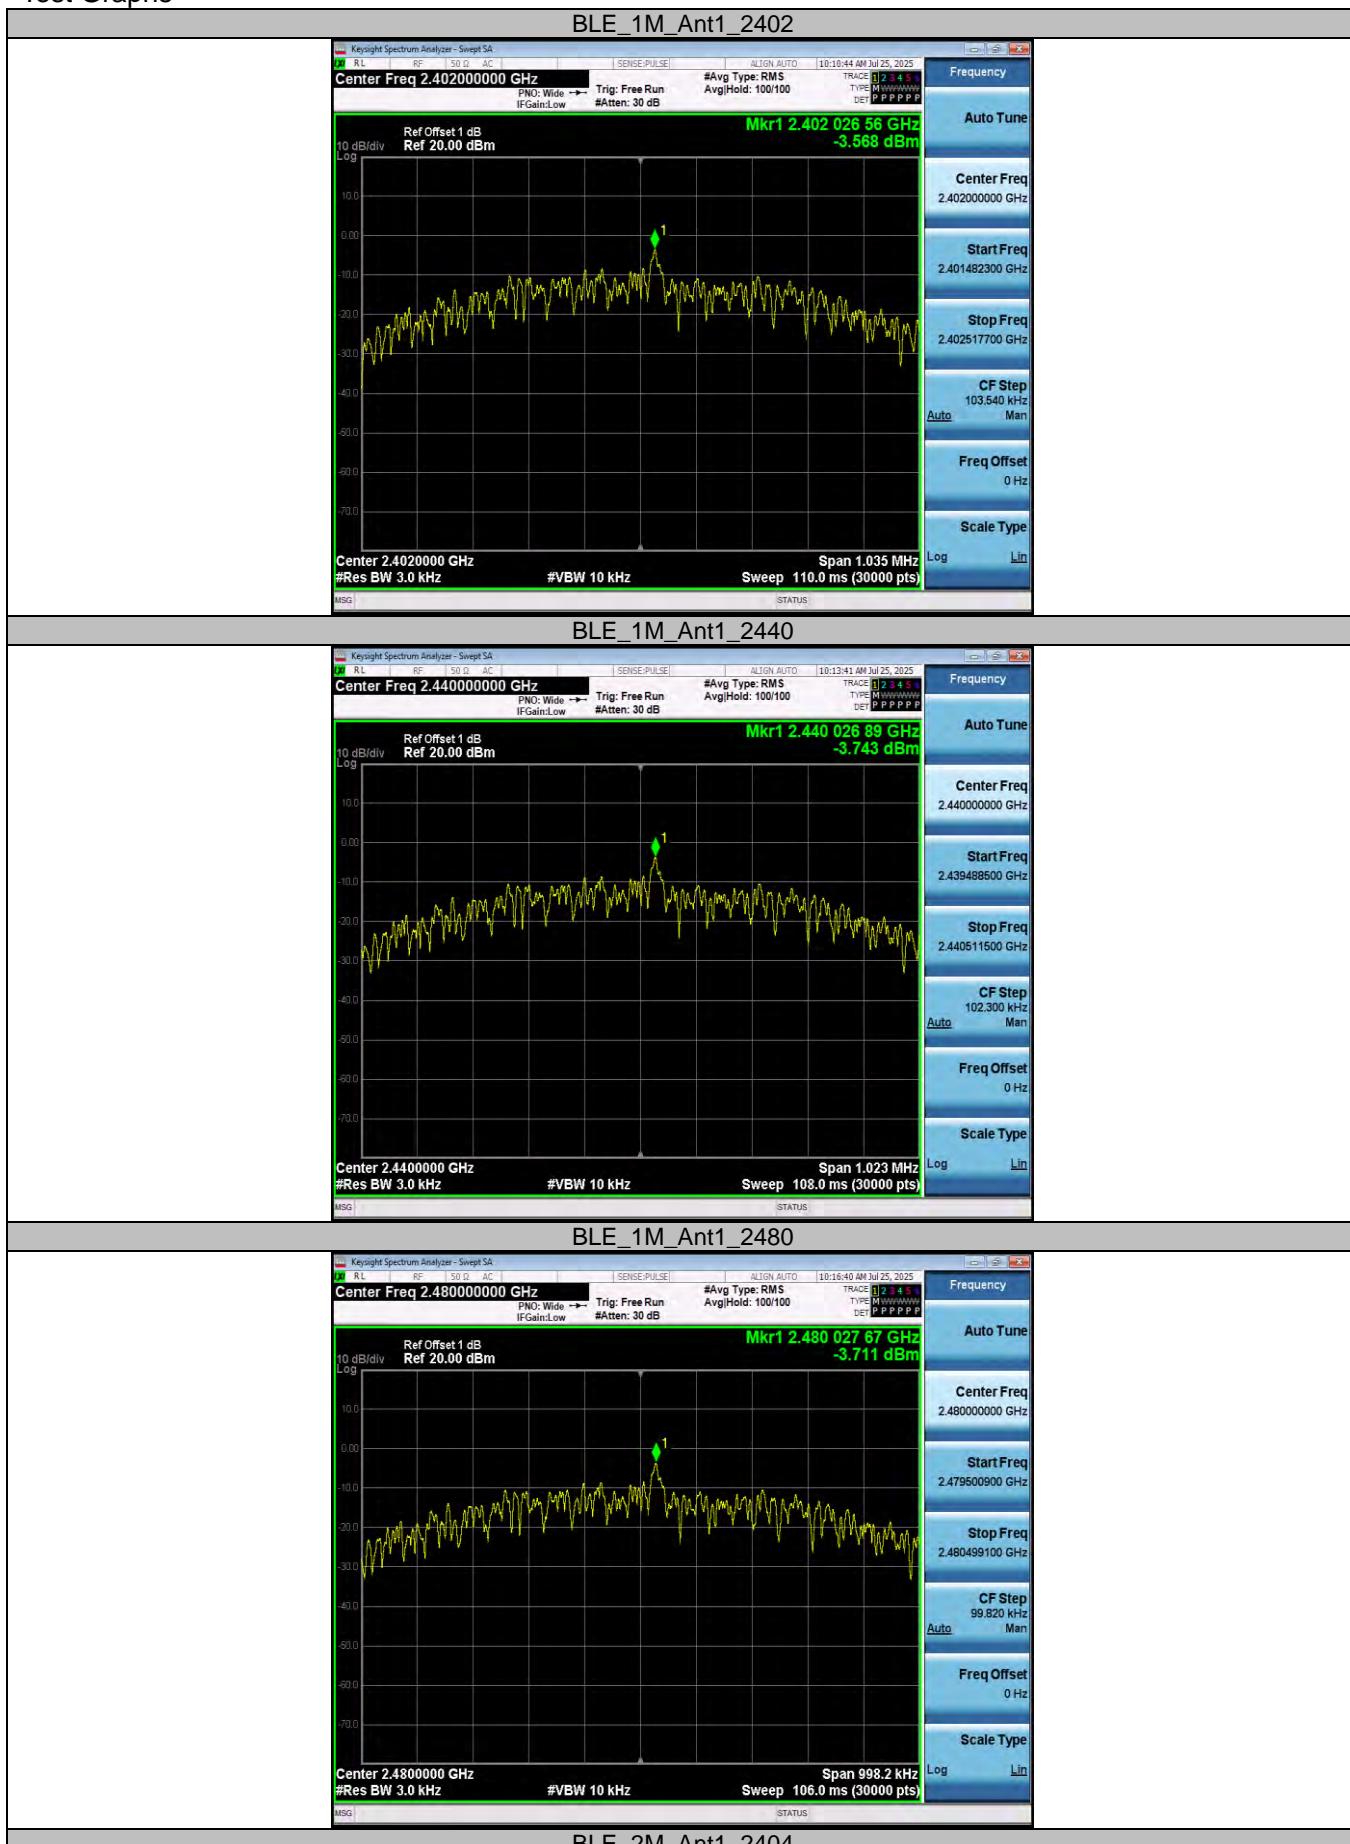


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

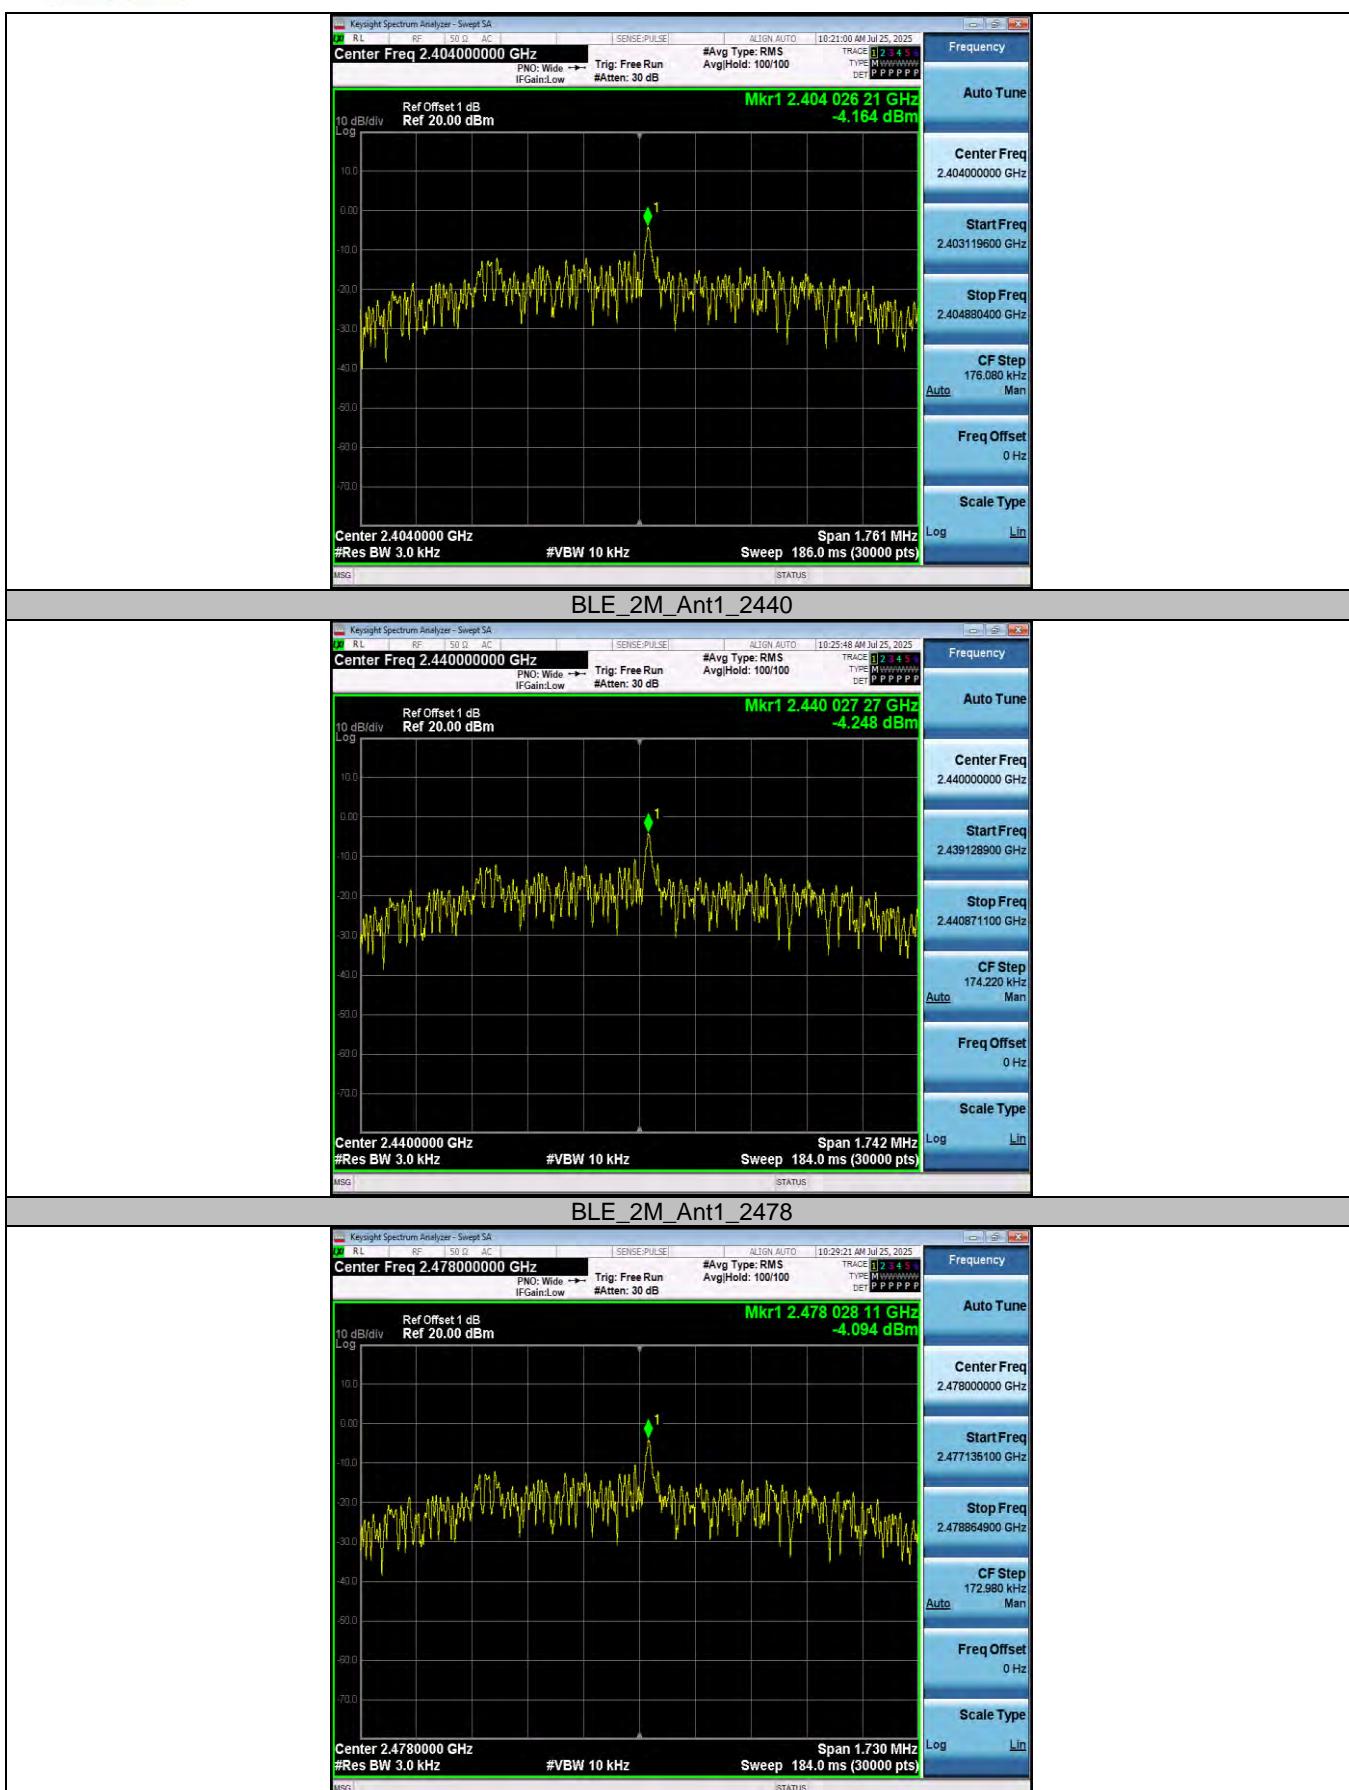

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

TRF No: CTC-TR-058_A2




3.8. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to test channel center frequency.
Set the span to 0Hz.
Set the RBW to 10MHz.
Set the VBW to 10MHz.
Detector: Peak.
Sweep time: Auto.
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.


Test Result

| Test Mode | Antenna | Freq(MHz) | ON Time [ms] | Period [ms] | DC [%] | 1/T Minimum VBW (kHz) | Final Setting for VBW (kHz) |
|-----------|---------|-----------|--------------|-------------|--------|-----------------------|-----------------------------|
| BLE_1M | Ant1 | 2402 | 0.45 | 0.63 | 71.43 | 2.22 | 3 |
| | | 2440 | 0.44 | 0.62 | 70.97 | 2.27 | 3 |
| | | 2480 | 0.45 | 0.63 | 71.43 | 2.22 | 3 |
| BLE_2M | Ant1 | 2404 | 0.25 | 0.62 | 40.32 | 4.00 | 5 |
| | | 2440 | 0.26 | 0.62 | 41.94 | 3.85 | 5 |
| | | 2478 | 0.26 | 0.62 | 41.94 | 3.85 | 5 |




Test Graphs


BLE_1M_Ant1_2402

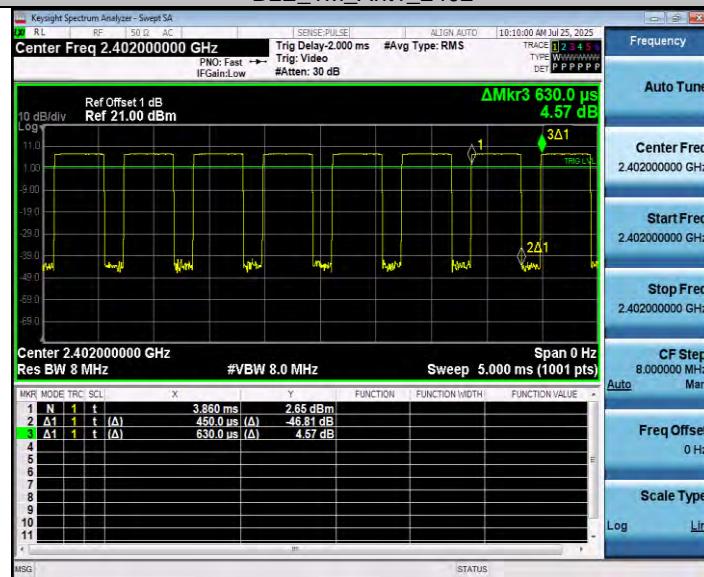

BLE_1M_Ant1_2440

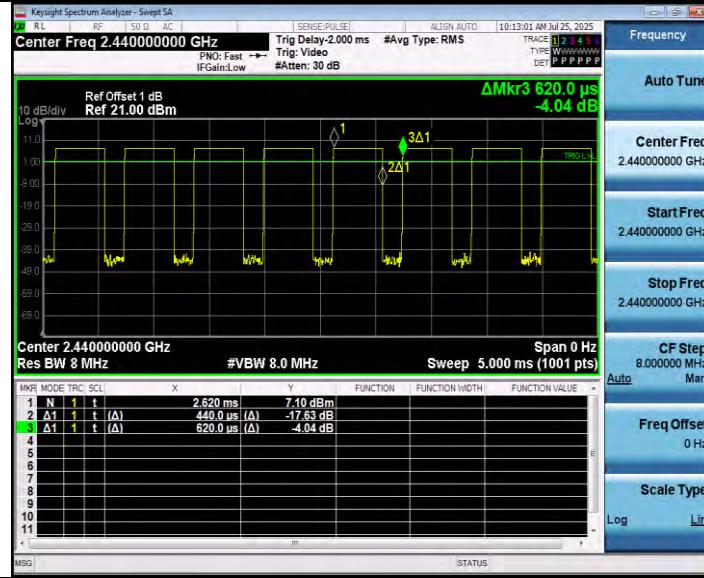

BLE_1M_Ant1_2480

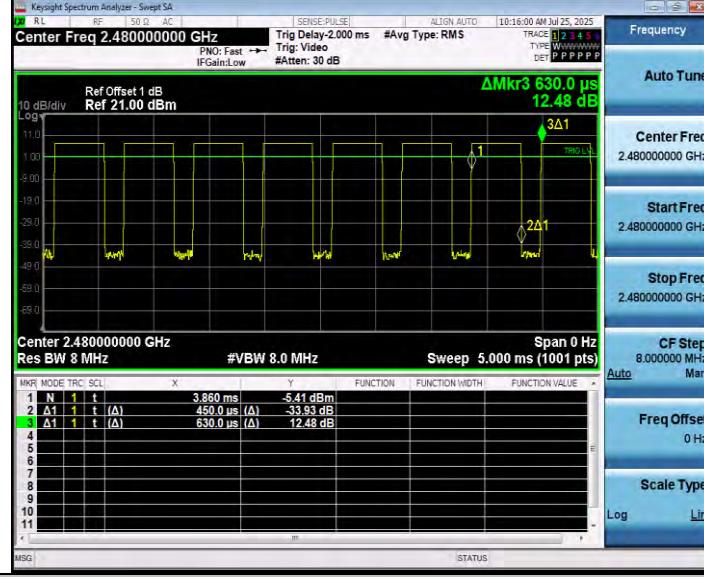


BLE_2M_Ant1_2404

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com

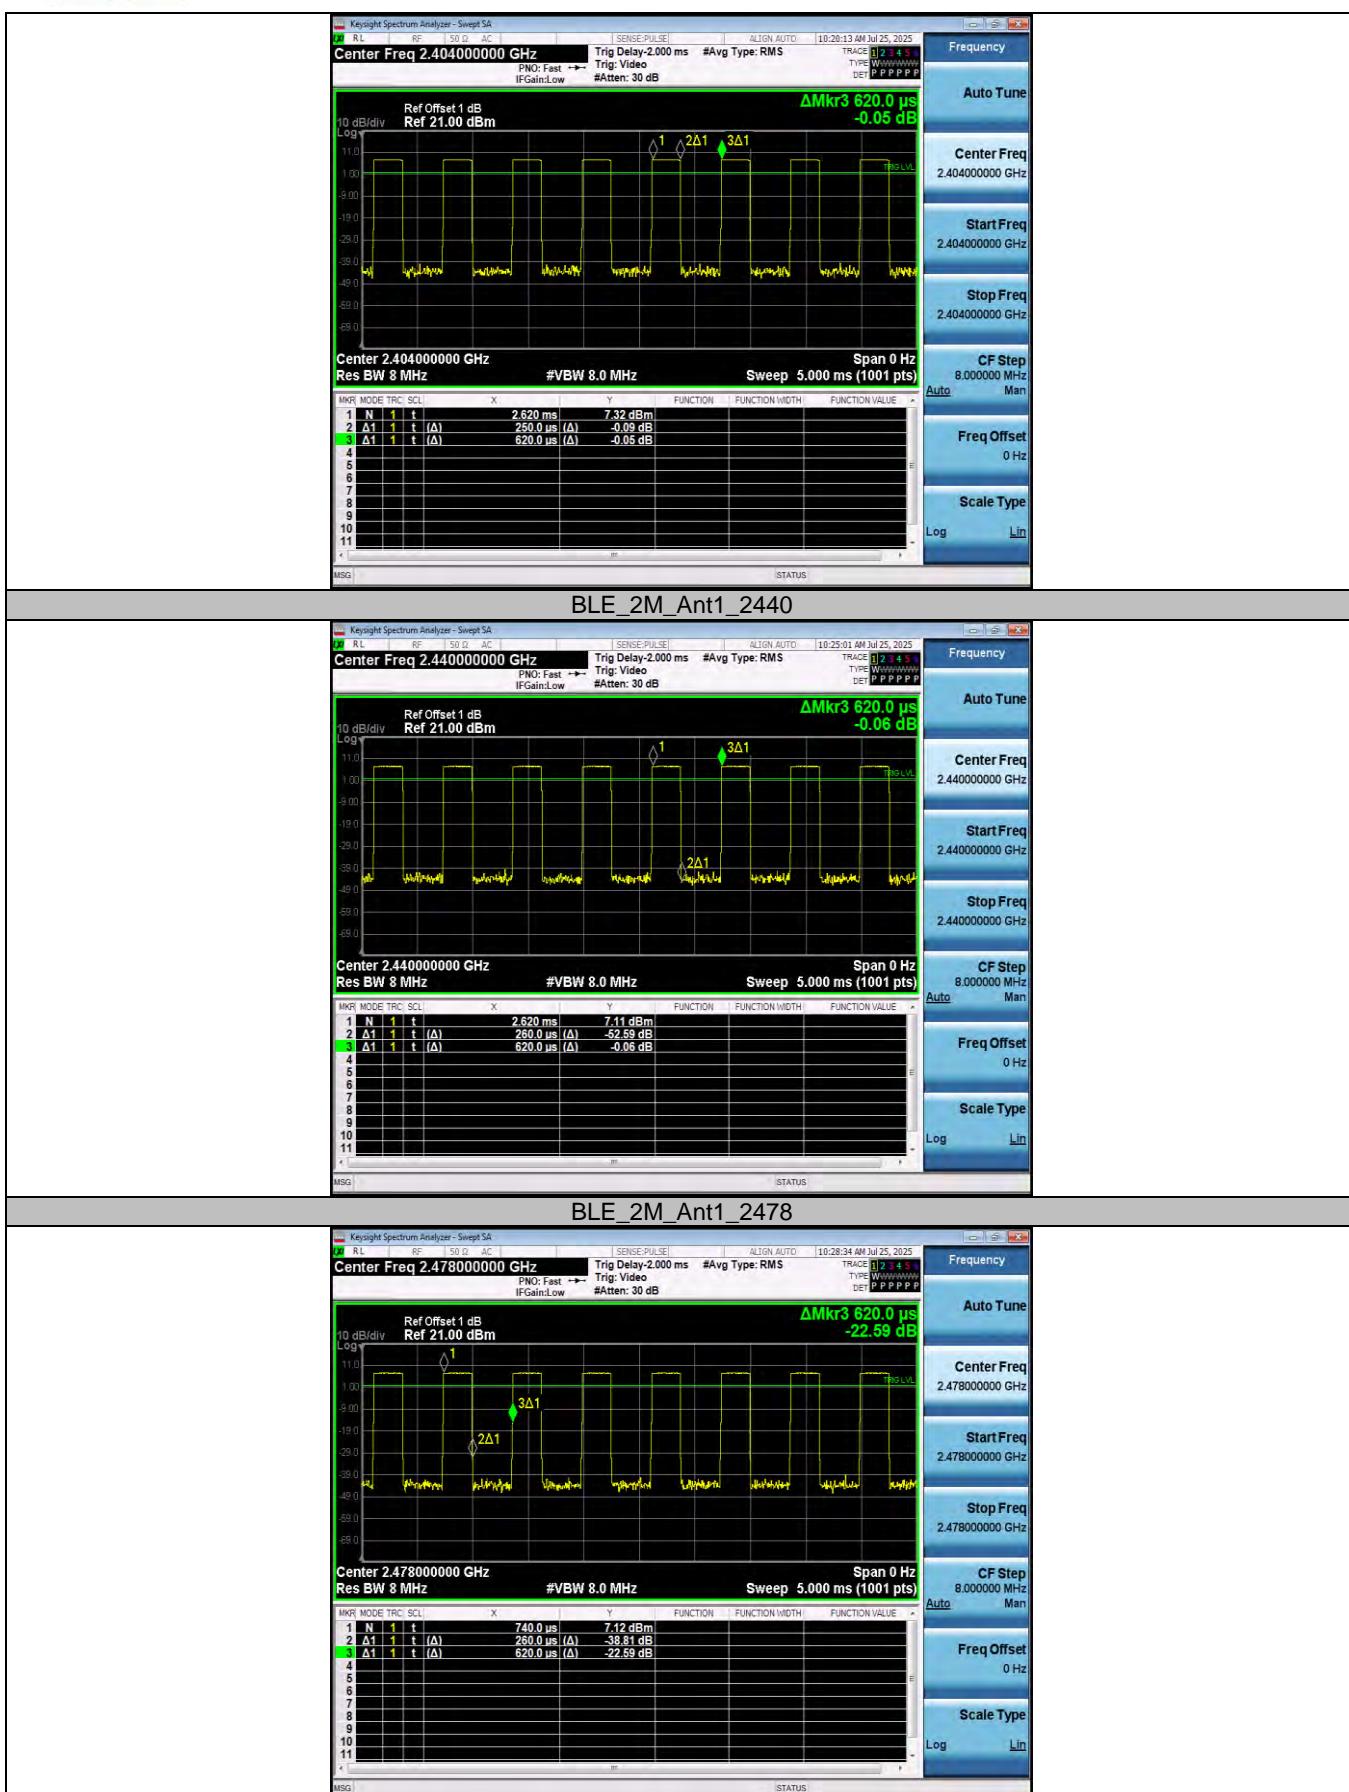

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cncaq.com



3.9. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END*****