




Test\_Graph\_EDR\_ANT1\_2402\_3Mbps\_Lower Band Emissions



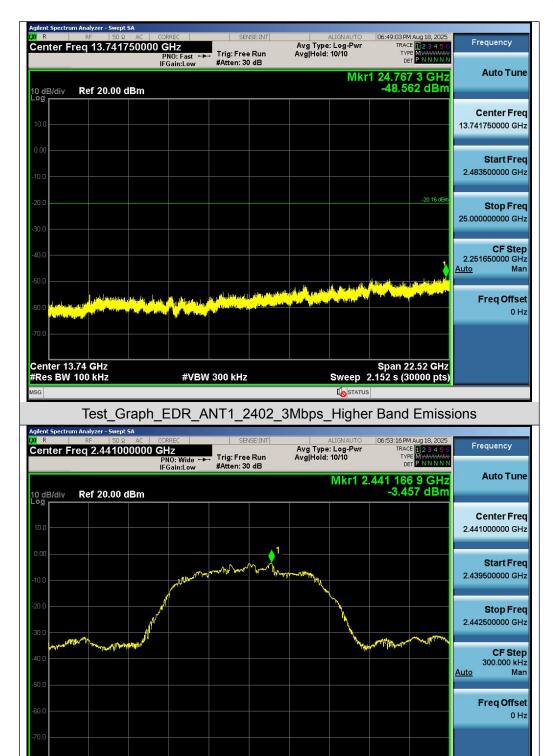


Test Graph EDR ANT1 2441 3Mbps Reference Level

**#VBW 300 kHz** 

Span 3.000 MHz Sweep 2.000 ms (30000 pts)

Center 2.441000 GHz #Res BW 100 kHz



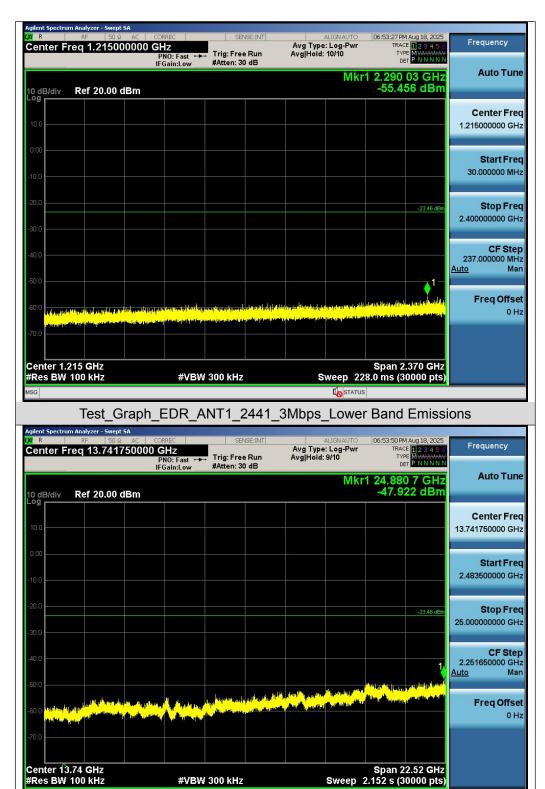


Test Graph EDR ANT1 2441 3Mbps Higher Band Emissions







Test\_Graph\_EDR\_ANT1\_2480\_3Mbps\_Lower Band Emissions



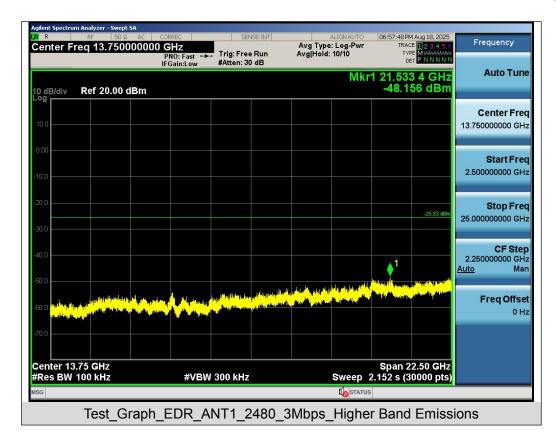






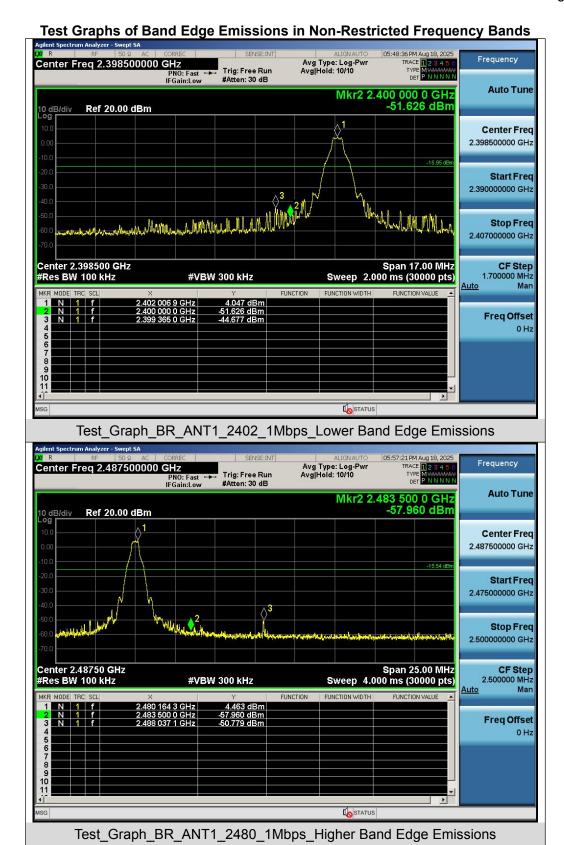



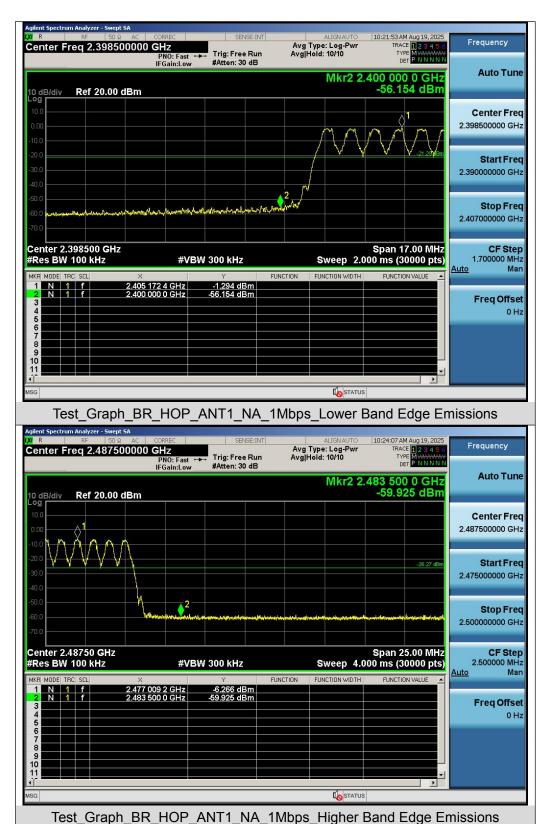





**Freq Offset** 






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_EDR\_HOP\_ANT1\_NA\_2Mbps\_Higher Band Edge Emissions

2.478 012 6 GHz 2.483 500 0 GHz



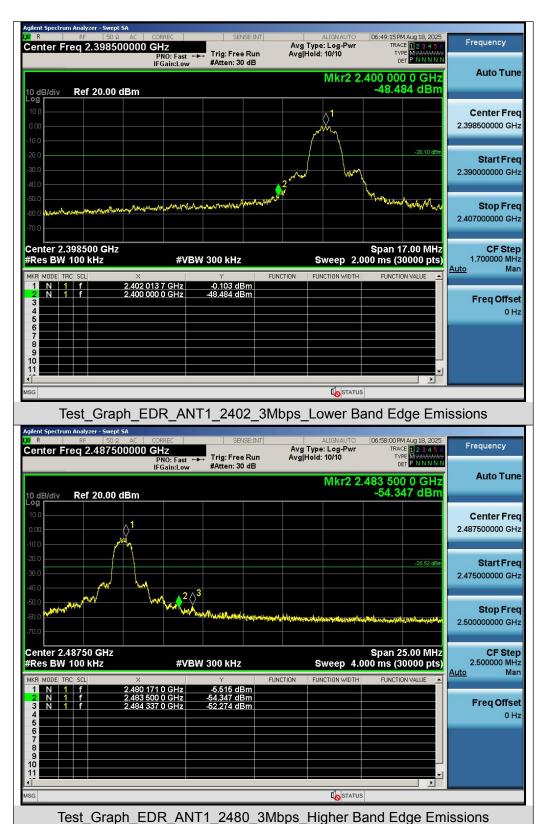









Page 54 of 79

## 9. Radiated Spurious Emission

#### 9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 9.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.



Page 55 of 79

7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Page 56 of 79

## Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

## • Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


## Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




# 9.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

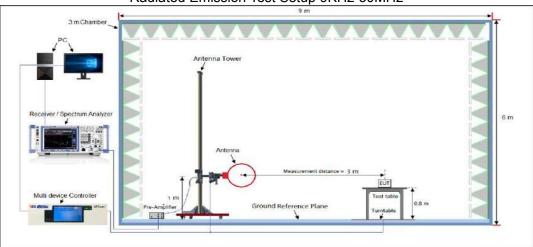


Radiated Emission Test Setup 30MHz-1000MHz

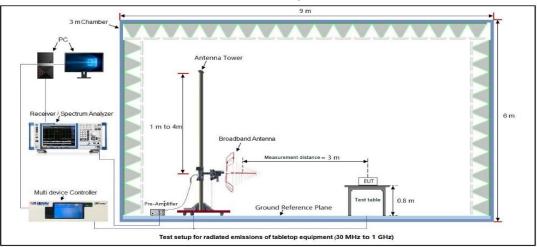

# Radiated Emission Test Setup Above 1000MHz

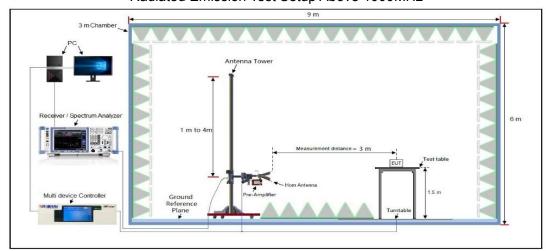






#### 9.4 Measurement Result


#### **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz							
<b>EUT Name</b>	Motorcycle Helmet Bluetooth Headset	Model Name	H2				
Temperature	22.3℃	Relative Humidity	53.6%				
Pressure	960hPa	Test Voltage	DC 3.7V by battery				
Test Mode	Mode 3	Antenna Polarity	Horizontal				

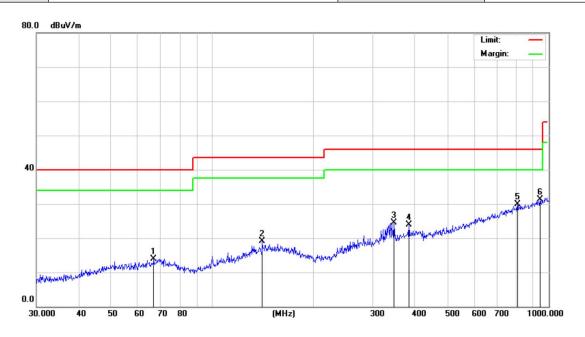


Final D	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	66.9669	13.97	-25.28	40.00	26.03	100	162	Horizontal
2	140.8351	19.11	-21.26	43.50	24.39	100	86	Horizontal
3	346.8092	24.57	-18.52	46.00	21.43	100	112	Horizontal
4	383.9318	24.00	-17.70	46.00	22.0	100	147	Horizontal
5	807.4291	29.91	-9.71	46.00	16.09	100	155	Horizontal
6	942.1305	31.31	-8.37	46.00	14.69	100	228	Horizontal





Radiated Emission Test Results at 30MHz-1GHz							
EUT Name	H2						
Temperature	22.3℃	Relative Humidity	53.6%				
Pressure	960hPa	Test Voltage	DC 3.7V by battery				
Test Mode	Mode 3	Antenna Polarity	Vertical				

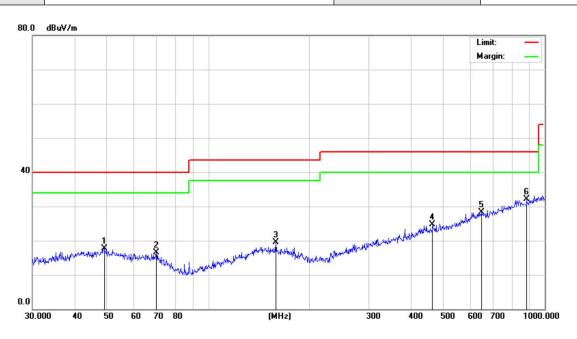

Final D	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.0144	17.73	-21.18	40.00	22.27	100	124	Vertical
2	70.0902	16.53	-22.79	40.00	23.47	100	153	Vertical
3	158.6676	19.42	-19.79	43.50	24.08	100	114	Vertical
4	463.9696	24.63	-14.90	46.00	21.37	100	126	Vertical
5	649.6597	28.36	-10.61	46.00	17.64	100	95	Vertical
6	884.5028	32.03	-7.02	46.00	13.97	100	220	Vertical

# **RESULT: Pass**

#### Note:

- 1. Factor=Antenna Factor + Cable loss Pre-amplifier, Margin= Limit-Level.
- 2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.



Page 60 of 79

## **Radiated Emissions Test Results Above 1GHz**

EUT Name	Motorcycle Headset	Helmet	Bluetooth	Model Name	H2
Temperature	22.3℃			Relative Humidity	53.6%
Pressure	960hPa			Test Voltage	DC 3.7V by battery
Test Mode	Mode 1			Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	_ value rype
4804.000	45.82	0.08	45.9	74	-28.1	peak
4804.000	38.74	0.08	38.82	54	-15.18	AVG
7206.000	42.66	2.21	44.87	74	-29.13	peak
7206.000	33.95	2.21	36.16	54	-17.84	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Motorcycle Headset	Helmet	Bluetooth	Model Name	H2
Temperature	22.3℃			Relative Humidity	53.6%
Pressure	960hPa			Test Voltage	DC 3.7V by battery
Test Mode	Mode 1			Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- value Type
4804.000	46.74	0.08	46.82	74	-27.18	peak
4804.000	38.23	0.08	38.31	54	-15.69	AVG
7206.000	42.51	2.21	44.72	74	-29.28	peak
7206.000	33.69	2.21	35.9	54	-18.1	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

## **RESULT: PASS**



Page 61 of 79

## **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Motorcycle Headset	Helmet	Bluetooth	Model Name	H2
Temperature	22.3℃			Relative Humidity	53.6%
Pressure	960hPa			Test Voltage	DC 3.7V by battery
Test Mode	Mode 2			Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	47.84	0.14	47.98	74	-26.02	peak
4882.000	37.59	0.14	37.73	54	-16.27	AVG
7323.000	42.68	2.36	45.04	74	-28.96	peak
7323.000	34.41	2.36	36.77	54	-17.23	AVG
Dana ada	•		•		•	•

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Motorcycle Headset	Helmet	Bluetooth	Model Name	H2
Temperature	22.3℃			Relative Humidity	53.6%
Pressure	960hPa			Test Voltage	DC 3.7V by battery
Test Mode	Mode 2			Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- value rype
4882.000	46.35	0.14	46.49	74	-27.51	peak
4882.000	38.22	0.14	38.36	54	-15.64	AVG
7323.000	41.47	2.36	43.83	74	-30.17	peak
7323.000	32.69	2.36	35.05	54	-18.95	AVG

Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: PASS**



Page 62 of 79

#### Radiated Emissions Test Results for Above 1GHz

EUT Name	Motorcycle Headset	Helmet	Bluetooth	Model Name	H2
Temperature	22.3℃			Relative Humidity	53.6%
Pressure	960hPa			Test Voltage	DC 3.7V by battery
Test Mode	Mode 3			Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- value Type
4960.000	46.38	0.22	46.6	74	-27.4	peak
4960.000	37.54	0.22	37.76	54	-16.24	AVG
7440.000	42.59	2.64	45.23	74	-28.77	peak
7440.000	33.61	2.64	36.25	54	-17.75	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Motorcycle Headset	Helmet	Bluetooth	Model Name	H2
Temperature	22.3℃			Relative Humidity	53.6%
Pressure	960hPa			Test Voltage	DC 3.7V by battery
Test Mode	Mode 3			Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- value Type		
4960.000	46.84	0.22	47.06	74	-26.94	peak		
4960.000	38.55	0.22	38.77	54	-15.23	AVG		
7440.000	41.22	2.64	43.86	74	-30.14	peak		
7440.000	32.69	2.64	35.33	54	-18.67	AVG		
Remark:								
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

# **RESULT: PASS**

#### Note

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report.



Page 63 of 79

# **Band Edge Emission Test Results for Restricted Bands**

EUT Name	Motorcycle Headset	Helmet	Bluetooth	Model Name	H2
Temperature	26.5℃			Relative Humidity	55.0%
Pressure	960hPa			Test Voltage	DC 3.7V by battery

# **Band Edge Emission Test Results for Restricted Bands**

			_							
			В	luetooth <sup>-</sup>	Tx CH00_	_2402 MHz_	1Mbps			
Item (Mark)	Freq. MHz	Reading dBµV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBµV/m	Limit dBµV/m	Margin dB	Detector	Pol.
1	2390.00	44.22	29.99	30.21	8.35	52.35	74	21.65	Peak	Horizontal
2	2389.86	46.19	29.99	30.21	8.35	54.32	74	19.68	Peak	Horizontal
3	2390.00	26.70	29.99	30.21	8.35	34.83	54	19.17	AV	Horizontal
4	2390.00	40.05	29.99	30.21	8.35	48.18	74	25.82	Peak	Vertical
5	2389.65	43.39	29.99	30.21	8.35	51.52	74	22.48	Peak	Vertical
6	2390.00	22.98	29.99	30.21	8.35	31.11	54	22.89	AV	Vertical
			В	luetooth <sup>-</sup>	Tx CH78_	2480 MHz_	1Mbps			
Item (Mark)	Freq. MHz	Reading dBµV	Ant. Fac. dB/m	PRM Factor dB	Cable Loss dB	Level dBµV/m	Limit dBµV/m	Margin dB	Detector	Pol.
1	2483.50	49.34	30.25	30.25	8.5	57.84	74	16.16	Peak	Horizontal
2	2483.68	49.75	30.25	30.25	8.5	58.25	74	15.75	Peak	Horizontal
3	2483.50	29.01	30.25	30.25	8.5	37.51	54	16.49	AV	Horizontal
4	2483.50	45.60	30.25	30.25	8.5	54.10	74	19.90	Peak	Vertical
5	2484.95	43.68	30.25	30.25	8.5	52.18	74	21.82	Peak	Vertical
6	2483.50	25.45	30.25	30.25	8.5	33.95	54	20.05	AV	Vertical

#### Remark:

- 1. Result Level = Read Level + Antenna Factor + Cable loss PRM Factor.
- 1. The other emission levels were very low against the limit.
- 2. Margin = Limit Emission Level.
- 3. The average measurement was not performed when the peak measured data under the limit of average detection.
- 4. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=3MHz/Sweep time=Auto/Detector=Average.
- 5. All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report.

## **RESULT: PASS**



Page 64 of 79

# 10. Number of Hopping Frequency Measurement

## 10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

#### 10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW ≥ RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize

#### 10.3 Measurement Setup (Block Diagram of Configuration)

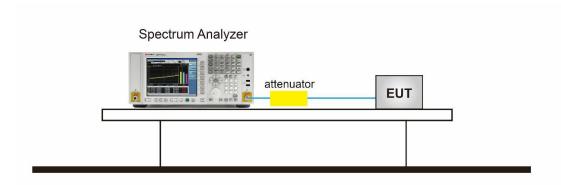

## 10.4 Measurement Result

Test Data of Number of Hopping Frequency						
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail			
GFSK Hopping	79	>=15	Pass			
π /4-DQPSK Hopping	79	>=15	Pass			
8DPSK Hopping	79	>=15	Pass			



**Freq Offset** 

Span 83.50 MHz Sweep 1.998 ms (1000 pts)



**Test Graphs of Number of Hopping Frequency** Frequency Center Freq 2.441750000 GHz Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run **Auto Tune** Mkr1 2.401 84 GHz -0.901 dBm Ref 30.00 dBm Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz **CF Step** <u>Auto</u> Man Freq Offset 0 Hz Span 83.50 MHz Sweep 1.998 ms (1000 pts) Center 2.44175 GHz #Res BW 200 kHz **#VBW** 620 kHz Test Graph BR HOP ANT1 NA 1Mbps Number of Hopping Frequency Center Freq 2.441750000 GHz Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run Mkr1 2.403 93 GHz -0.530 dBm **Auto Tune** Ref 30.00 dBm 2.441750000 GHz Start Freq 2.400000000 GHz market barket between the between balling were knowed have between byte barket between byte between the between Stop Freq 2.483500000 GHz 8.350000 MH <u>Auto</u> Man


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_EDR\_HOP\_ANT1\_NA\_2Mbps\_Number of Hopping

**#VBW** 620 kHz

Center 2.44175 GHz #Res BW 200 kHz



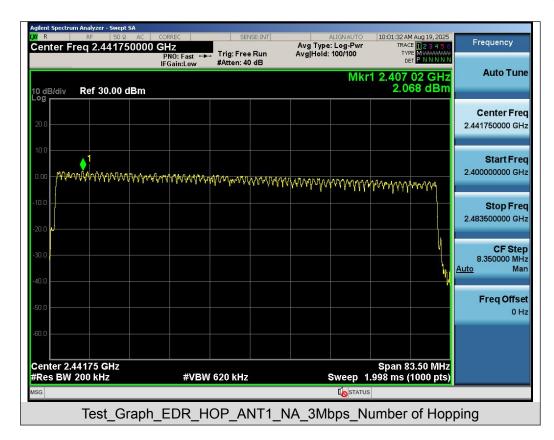



Report No.: AGC00806250807FR01 Page 67 of 79

# 11. Time of Occupancy (Dwell Time) Measurement

## 11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

#### 11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW ≥ RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

## 11.3 Measurement Setup (Block Diagram of Configuration)

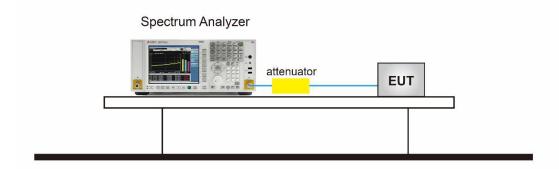


#### 11.4 Measurement Result

	Test Data of Dwell Time							
Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail			
2402	2.881	27.0*4	311.148	400	Pass			
2441	2.881	27.0*4	311.148	400	Pass			
2480	2.881	27.0*4	311.148	400	Pass			






**Test Graphs of Dwell Time** 

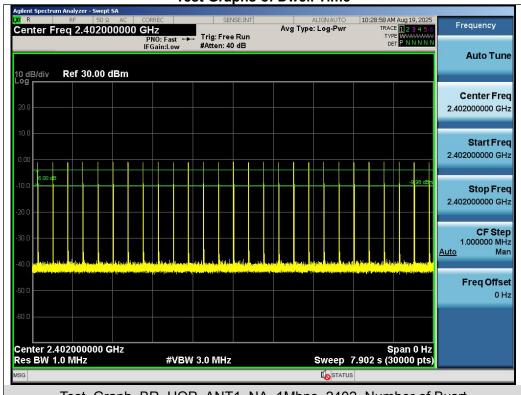



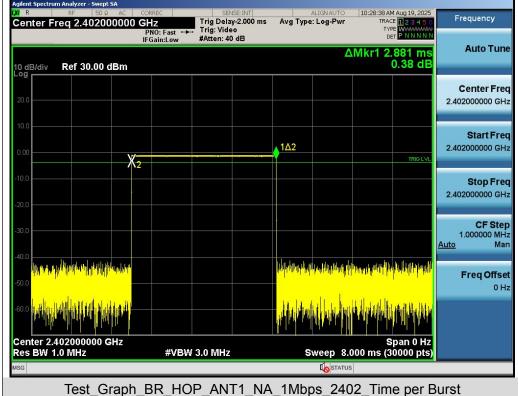


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report.  $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$ 

Web: http://www.agccert.com/

Freq Offset 0 Hz

Span 0 Hz Sweep 8.000 ms (30000 pts)



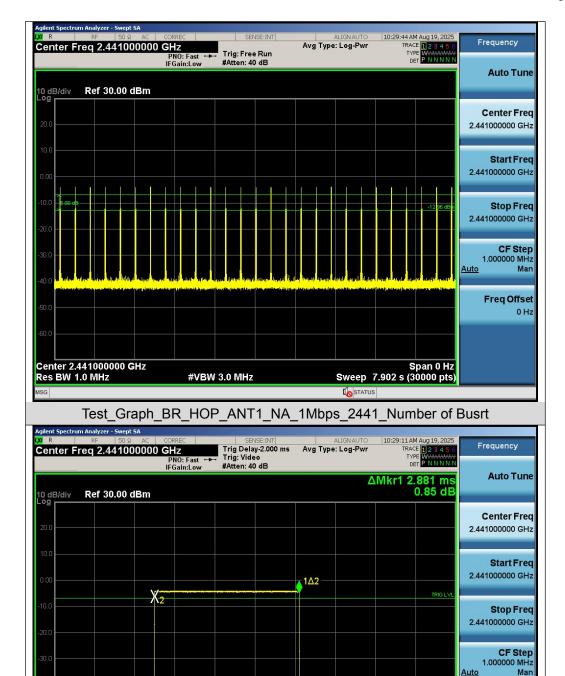

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_BR\_HOP\_ANT1\_NA\_1Mbps\_2441\_Time per Burst

**#VBW 3.0 MHz** 

Center 2.441000000 GHz

Res BW 1.0 MHz



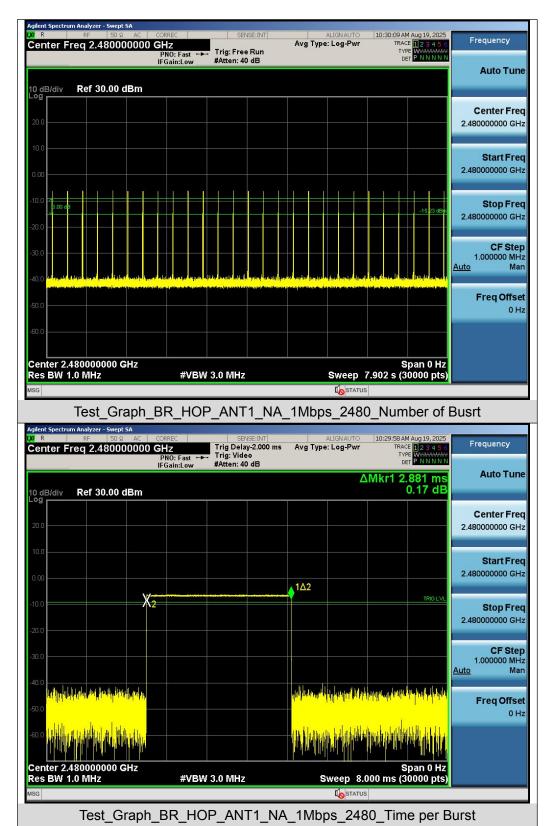

Note: All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report.



Page 71 of 79

# 12. Frequency Separation Measurement

## 12.1 Provisions Applicable

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

#### 12.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) ≥ RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

# 12.3 Measurement Setup (Block Diagram of Configuration)

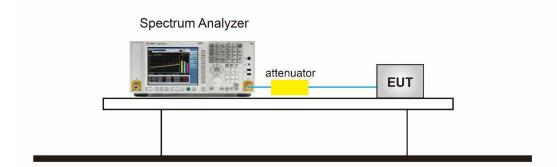


#### 12.4 Measurement Result

Test Data of Frequency Separation							
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail				
GFSK Hopping	1.001	≥0.637	Pass				
π /4-DQPSK Hopping	0.967	≥0.901	Pass				
8DPSK Hopping	0.976	≥0.878	Pass				





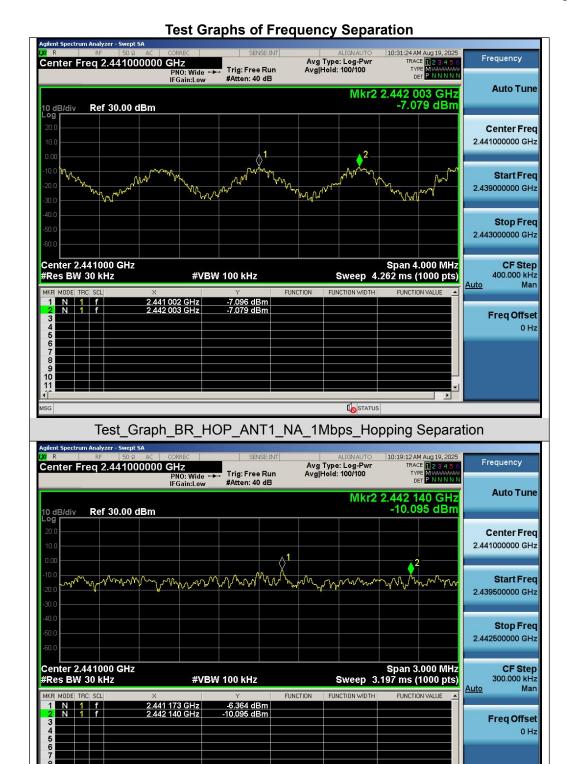

Test\_Graph\_EDR\_HOP\_ANT1\_NA\_2Mbps\_Hopping Separation



