

**TEST REPORT OF RADIATED AND
CONDUCTED EMISSIONS**

STATEMENT OF DATA MEASURED

1. General Information of EUT

The EUT, 15" SVGA color monitor :

Model No. : 105B10
FCC ID : A3KM088
Brand : PHILIPS

The monitor automatically scans horizontal frequencies between 30KHz and 70KHz, and vertical frequencies between 50Hz and 160Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1280x1024 pixels. There are 2 models will under this FCC ID, the difference is as below:

Model No.	FCC ID	Difference
105B10	A3KM088	Without audio kit in pedestal
105B15	A3KM088	With audio kit in pedestal

The monitor has 8 factory-preset modes as indicated in the following table:

	Resolution	H-Frequency	V-Frequency	Remark
M01	720 X 400	31.5KHz	70Hz	Non-interlaced
M02	640 X 480	31.5KHz	60Hz	Non-interlaced
M03	640 X 480	43.3KHz	85Hz	Non-interlaced
M04	800 X 600	46.8KHz	75Hz	Non-interlaced
M05	800 X 600	53.7KHz	85Hz	Non-interlaced
M06	1024 X 768	60.0KHz	75Hz	Non-interlaced
M07	1280 X 1024	64.0KHz	60Hz	Non-interlaced
M08	1024 X 768	68.7KHz	85Hz	Non-interlaced

2. Test Equipment and Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION
EMI - LAB

5, Tze Chiang 1 Road, Chungli Industrial Park
P.O. Box 123, Chungli, Taoyuan, Taiwan
R. O. C.
Tel : 886-3-4549862
Fax : 886-3-4549887
Internet: ronnie.yang@cli.ce.philips.com

The test was performed in accordance with ANSI C63.4-1992, "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Test equipment used for line Conducted and Radiated emissions as following. All equipment were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Test Equipment	Model No.	Serial No.	Calibrated Date
Spectrum	HP8568B	2415A00346	5/07/1999
RF Presselector	HP85685A	2901A00746	5/07/1999
QP Adapter	HP85650A	2043A00366	5/07/1999
EMI Receiver	HP85460A	3441A00199	8/27/1998
RFI Filter Section	HP85460A	3330A00177	8/27/1998
EMI Receiver	R & S ESVS30	8419977/066	3/21/1999
Biconical Antenna	EMCO 3110B	3222	12/17/1998
Biconical Antenna	EMCO 3110B	3224	12/30/1998
Log-Periodic Antenna	EMCO 3146A	1424	12/29/1998
Log-Periodic Antenna	EMCO 3146A	1425	12/29/1998
LISN	EMCO 3825/2	9311-2153	3/15/1999
LISN	EMCO 3825/2	9311-2154	5/28/1999
Turn Table	EMCO 1060	1068	5/28/1999
Antenna Tower	EMCO 1050	1113	5/28/1999
RF Cable	M17/75-RG214-NE	N/A	5/28/1999
Computer	HP9000/300	2614A78610	N/A
Printer	HP2225A	2728S02586	N/A
Plotter	HP7440A	2539A40856	N/A

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

For system measurement, the EUT "105B10 and 105B15" were connected to:

Item	Model No.	Serial No.	FCC ID
1. Computer	HP D5052N	FR80627957	FCC Logo
2. Keyboard	HP 4735-60101	J7319E0092	FCC Logo
3. Mouse	HP M-S34	LZA73005475	DZL2111029
4. Printer	HP 2225C	3123S97227	DSI6XU2225
5. Modem	USR Robotics 268	0002680559278575	CJE-0318
6. Vide Card	Metabyte GIA 3D	10105	127MM-VS03A
7. CD-ROM	Sony CDU31A	--	KGACDU31A2

The system was configured for testing in a typical fashion (as a customer would normally use it) according to ANSI C63.4-1992, please see the photographs for detail.

Both conducted and radiated testing were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

First, pre-scan all modes in screen room then select 3 higher modes (worst case) were tested and reported.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

Tested and reported modes as following:

Report No.	Resolution	Frequencies	Pedestal
EM199-032	1024 X 768	68.7KHz/85Hz	W/o audio kit
EM199-032A	1280 X 1024	64.0KHz/60Hz	W/o audio kit
EM199-032B	1024 X 768	68.7KHz/85Hz	With audio kit

3. Test Program and Test Results

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing.

Turn on the power of EUT and all peripherals, select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.EMI" as a basic software to execute the EUT operating under test.

- Step 1 : Run the "HTEST.EMI" on personal computer then sends "H" character to monitor continuously until full screen.
Step 2 : Personal computer sends a complete line of continuously repeating "H" to HP 2225C printer.
Step 3 : Personal computer sends a file of "H" pattern to floppy disk then read a file of "H" pattern from floppy disk.
Step 4 : Personal computer sends a file of "H" pattern to hard disk then read a file of "H" pattern from hard disk.
Step 5 : Personal computer sends a file of "H" patter to USRobotics 268 modem.
Step 6 : Return to step 1

All data in this report are "PEAK" value within 15dB margin unless otherwise noted.
The radiated (open site) data has included antenna and cable factors, sample calculation:

Final Value (dBµV/m) = Reading (dBµV) + Antenna Factor (dB) + Cable Loss (dB)

The measured data of radiated RF interference at open site and line conducted interference as attached.

The subject device is in compliance with the limits for a class B digital device, pursuant to part 15, subpart B of the FCC rules.



Ronnie Yang - Manager, Safety/Dev. PEI-CED
NVLAP Signatory

REPORT NO.: EMI99-032
 TEST DATE : JUN/18/1999
 TEST ENGI.: C.C.WU/H.H.HUANG

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CED)
 EMI-LAB
 P.O.BOX 123
 CHUNGLI, TAoyUAN, TAIWAN, R.O.C.
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
 TESTED SYSTEM:

1. EUT : 105B10 COLOR MONITOR S/N.: TY9923119
 FCC ID. : A3KM088
2. COMPUTER: HP D5052N S/N.: FR80627957
 FCC ID. : FCC L060 **D-C**
3. PRINTER : HP 2225C S/N.: 3145S02419
 FCC ID. : D516XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
 FCC ID. : CJE-0318
5. MOUSE : HP M-534 S/N.: LZ473005475
 FCC ID. : DZL211029
6. KEYBOARD: HP C4735-60101 S/N.: J7319E0092
 FCC ID. : FCC L060 **D-C**
7. VIDEO CARD : METABYTE GIA 3D S/N.: 10105
 FCC ID. : 127MM-VS03A
8. CD-ROMD : SONY CDU31A S/N.: --
 FCC ID. : K6ACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C63.4-1992. AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHZ TO 406HZ.

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
 68.7KHZ MODE(1024X768/85HZ) WAS TESTED.
 INTERFACE CABLE WITH ONEE FERRITE CORE WAS TESTED.
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHZ)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
45.73	25.74	28.54	40
54.88	25.95	26.45	40
73.18	31.24	30.64	40
82.32	28.8	27.2	40
118.93	33.04	31.34	43.5
128.08	31.24	29.74	43.5

C.C.WU/H.H.HUANG

K.J.HSU, NVLAP SIGNATORY

TESTED BY: H.H.HUANG

CHECKED BY: K.J.HSU

SAMPLE CALCULATION :
FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)
THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY
THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT
THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHZ AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

FREQUENCY (MHZ)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
33.6	27.54	34.74	40
36.58	26.12	33.22	40
64.03	30.02	33.02	40
155.53	34.3	31.4	43.5
164.68	31.35	33.75	43.5
168.19	29.74	33.54	43.5

RADIATED RF LEVEL - QUASI-PEAK VALUE

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:
RBW : 100KHZ
VBW : 100KHZ
QUASI-PEAK READINGS ARE TAKEN WITH RODE & SCHWARTZ EMI TEST RECEIVER
20 - 1000MHZ ESVS 30 :


182.98	29.67	29.07	43.5
201.28	32.8	32.5	43.5
210.43	31.8	AMBIENT	43.5
219.58	32.8	31.3	46
228.73	33.48	32.78	46
247.03	33.58	33.38	46
256.18	34.2	33.9	46
274.49	36.36	35.16	46
292.79	35.16	35.36	46
301.93	31.808	30.908	46
320.23	30.78	30.48	46
338.53	32.136	30.536	46
347.68	31.252	30.852	46
365.98	32.1	31.2	46
375.13	30.9	30.3	46
384.28	31.324	30.424	46
411.73	32.444	31.644	46
457.48	32.668	32.868	46
484.93	33.22	33.32	46
539.83	34.36	34.56	46

JUN/18/1999

RFI EMISSION LEVEL dBuV/m

REPORT NO: EMI99-032
MODEL NO: 105B10

FCC CLASS B

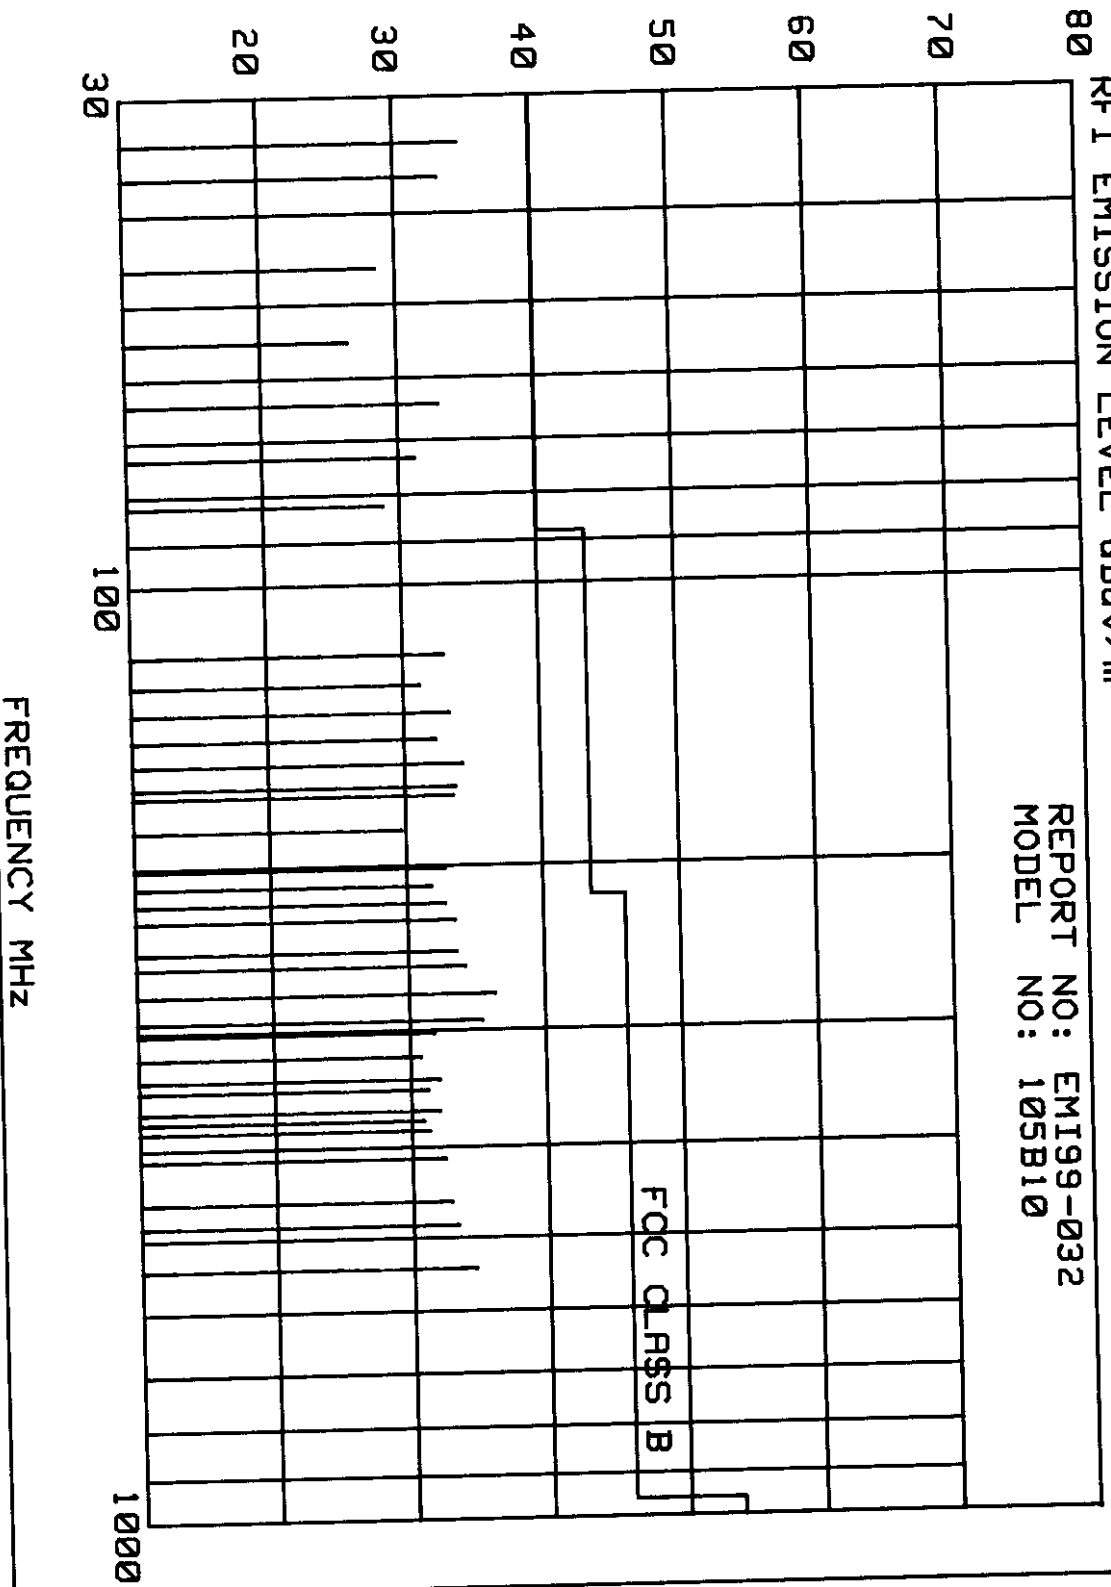


hp

A3KM088 RUN 1024X768/85HZ 68.7KHZ MODE AC110V MKR 18.39 MHZ
REF 107.0 DBμV ATTEN 10 dB 41.10 DBμV

10 DB/

DL
48.0
DBμV

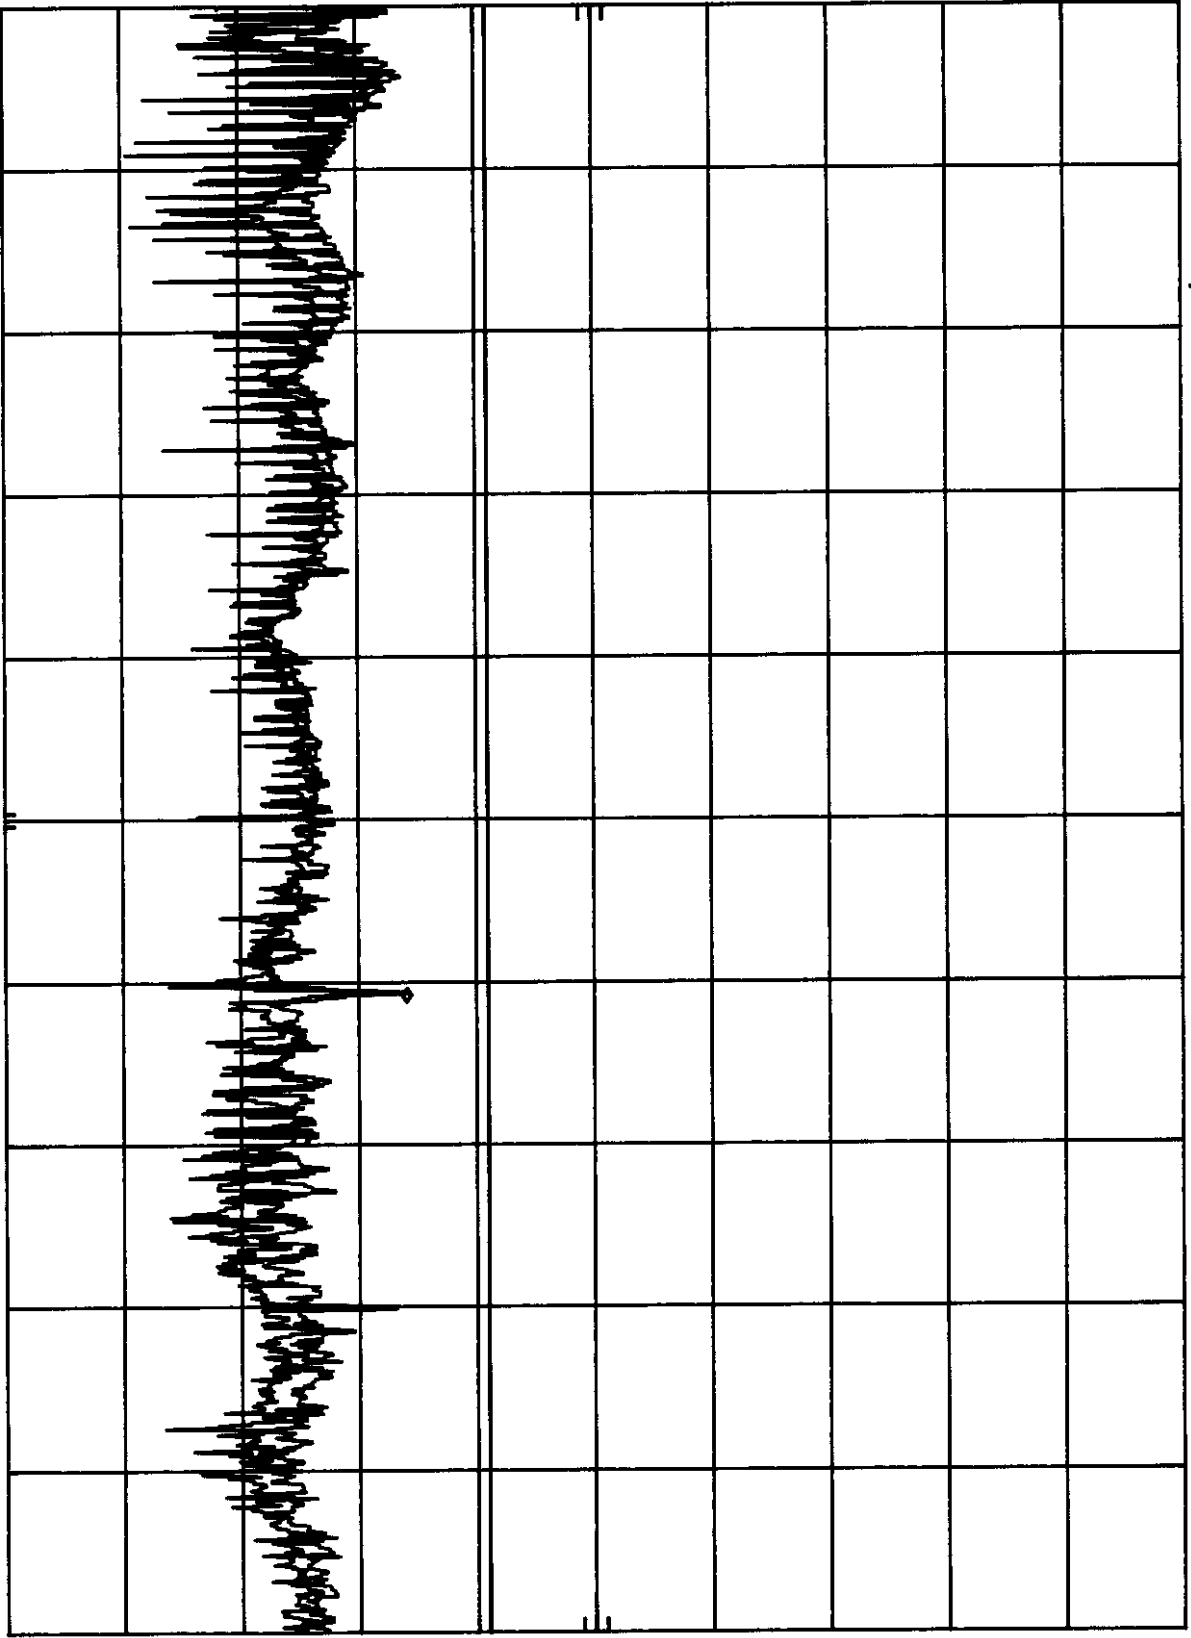


START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SWP 750 msec

hp

A3KM088 RUN 1024X768/85Hz 68.7KHz MODE AC220V MKR 1.72 MHz
REF 107.0 dBμV ATEN 10 dB 42.90 dBμV

10 dB/

DL
48.0
dBμV

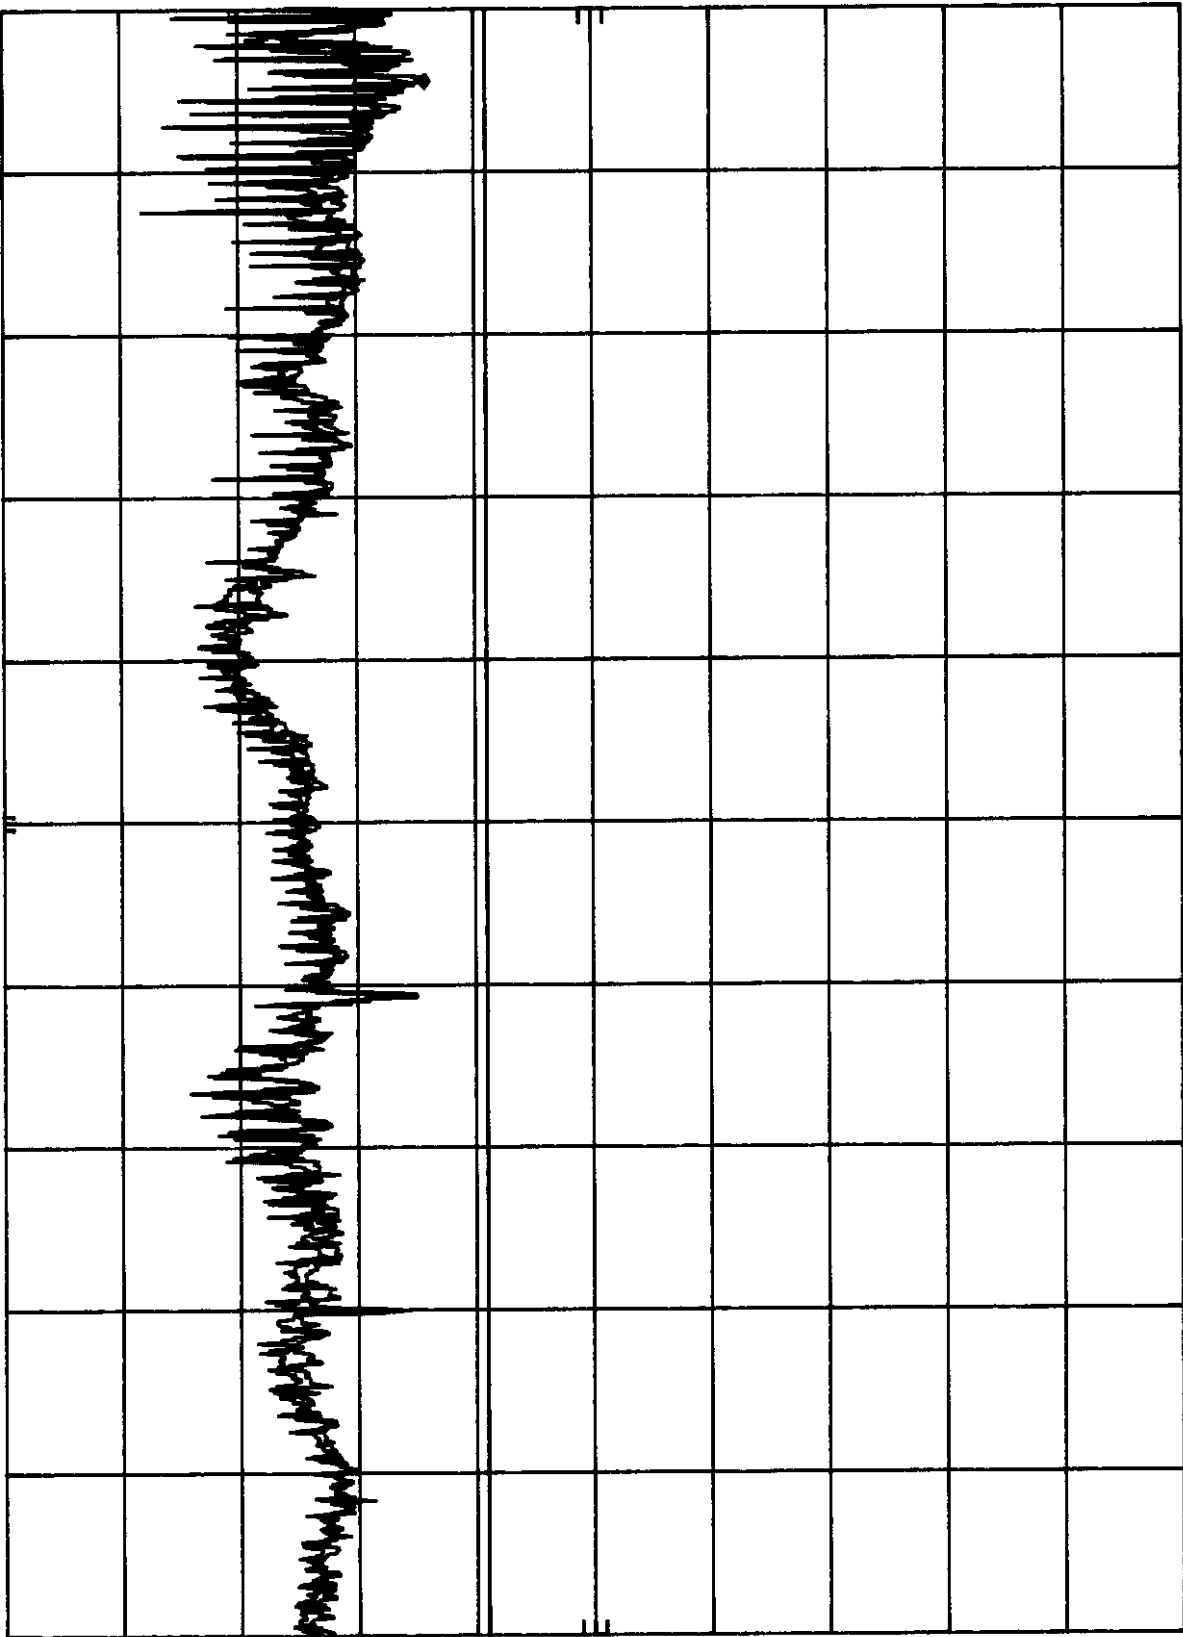

START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SMP 750 msec

153.94	31.2	30	43.5
164.2	31.22	33.32	43.5
184.73	31.45	29.65	43.5
195	31.35	29.85	43.5
215.53	32.68	31.58	43.5
225.79	35.22	32.82	46
236.05	33.5	32.8	46
246.31	33.74	33.04	46
256.58	35.75	33.65	46
287.37	35.45	35.45	46
307.9	33.132	30.032	46
318.16	30.072	30.172	46
328.42	31.372	30.672	46
338.69	30.836	30.136	46
359.21	32.8	31.3	46
379.73	31.58	30.28	46
390.01	31.64	30.84	46
410.53	33.532	32.432	46
441.32	32.984	32.384	46
533.69	34.236	33.836	46
543.95	33.776	33.476	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
 SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
 20 - 1000MHz ESVS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
30.79	28.06	36.56	40
71.83	31.56	29.96	40
133.42	32.03	26.63	43.5

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
 ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
 APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
 BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY: K. J. Hs

K.J.HSU, NVLAP SIGNATORY

TESTED BY: H.H.Huang

C.C.WU/H.H.HUANG

RFI EMISSION LEVEL dBuv/m

JUN/19/1999

REPORT NO: EMI99-032A
MODEL NO: 105B10

FOC CLASS B

FREQUENCY MHz

1000

100

30

80

70

60

50

40

30

20


30

A3KM088 RUN 1280X1024/60Hz 64KHz MODE AC110V MKR 22.55 MHz
REF 107.0 dBμV ATTEN 10 dB 42.60 dBμV

HP

10 dB/

DL
48.0
dBμV

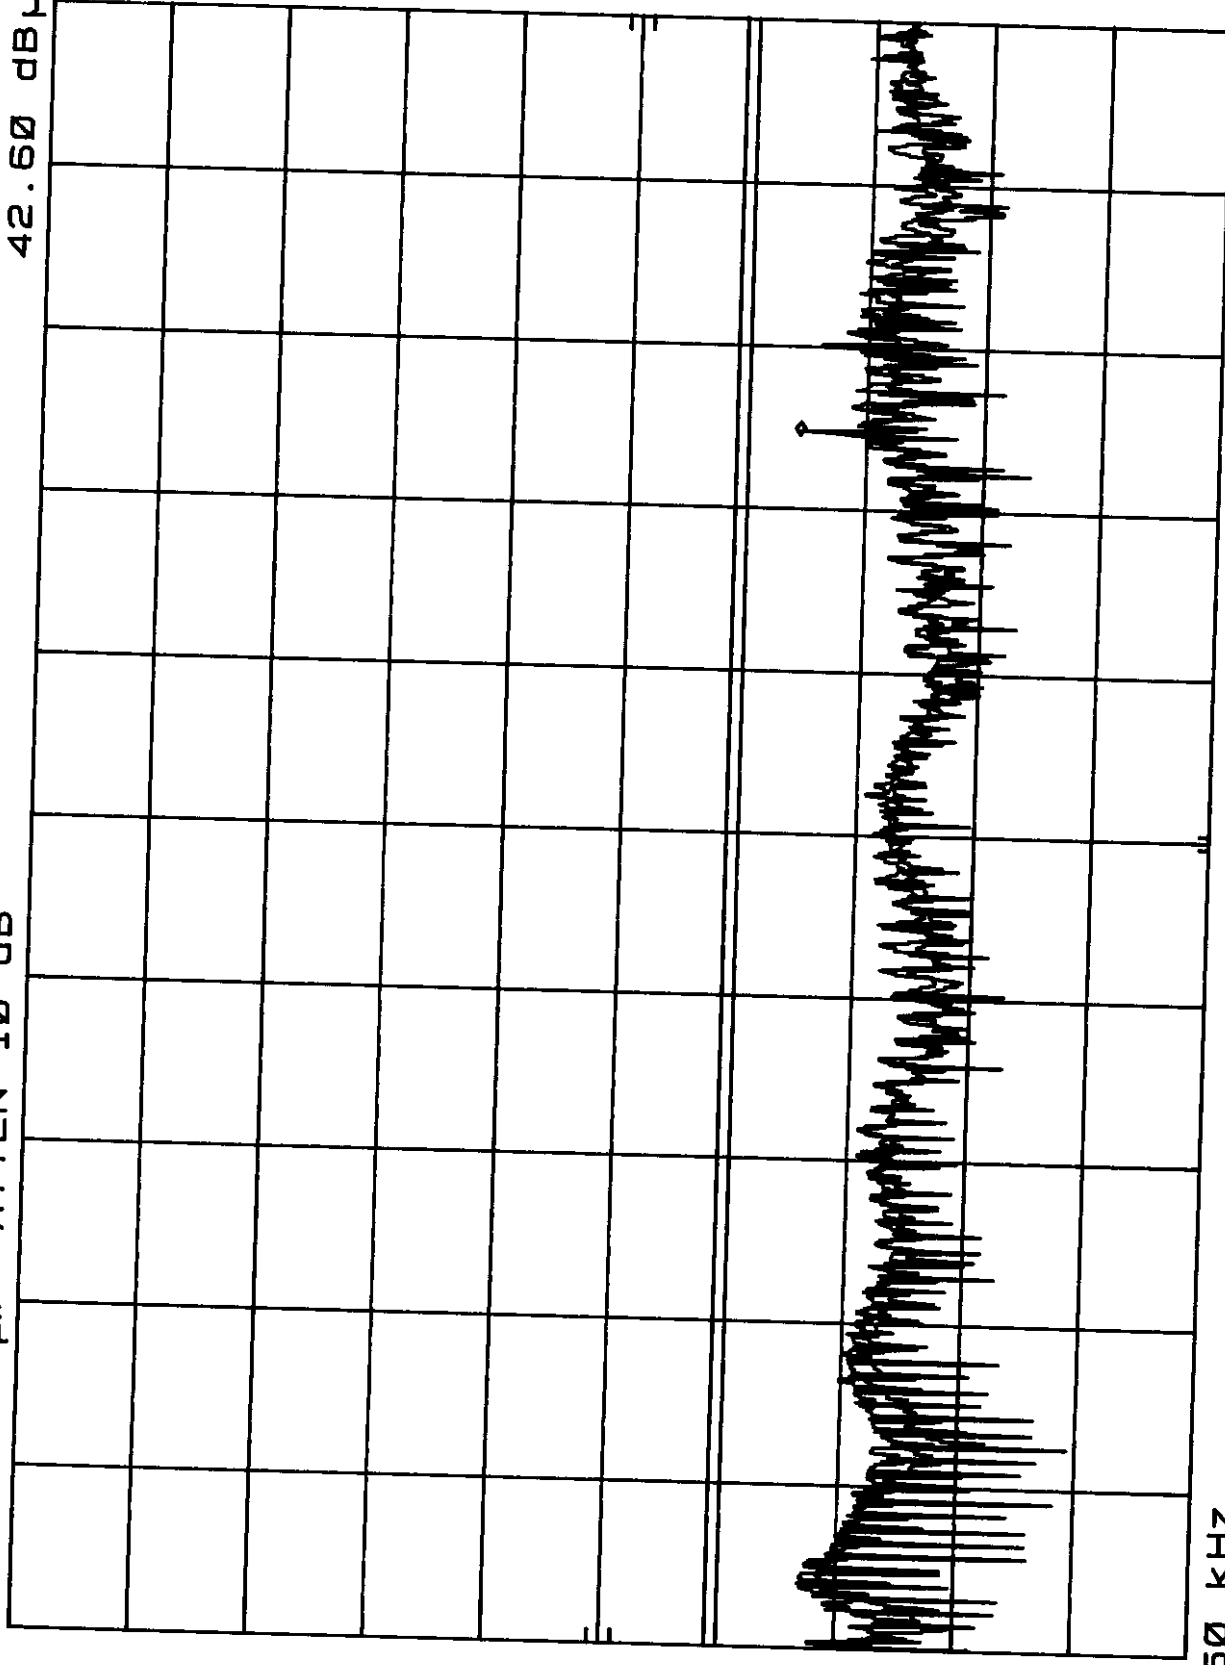

START 450 KHz

RES BW 10 KHz

VBW 10 KHz


STOP 30.00 MHz
SWP 750 msec

A3KM088 RUN 1280X1024/60HZ 64KHZ MODE AC220V MKR 22.55 MHZ
REF 107.0 dBμV ATTEN 10 dB 43.90 dBμV

HP

10 dB/

DL
48.0
dBμV

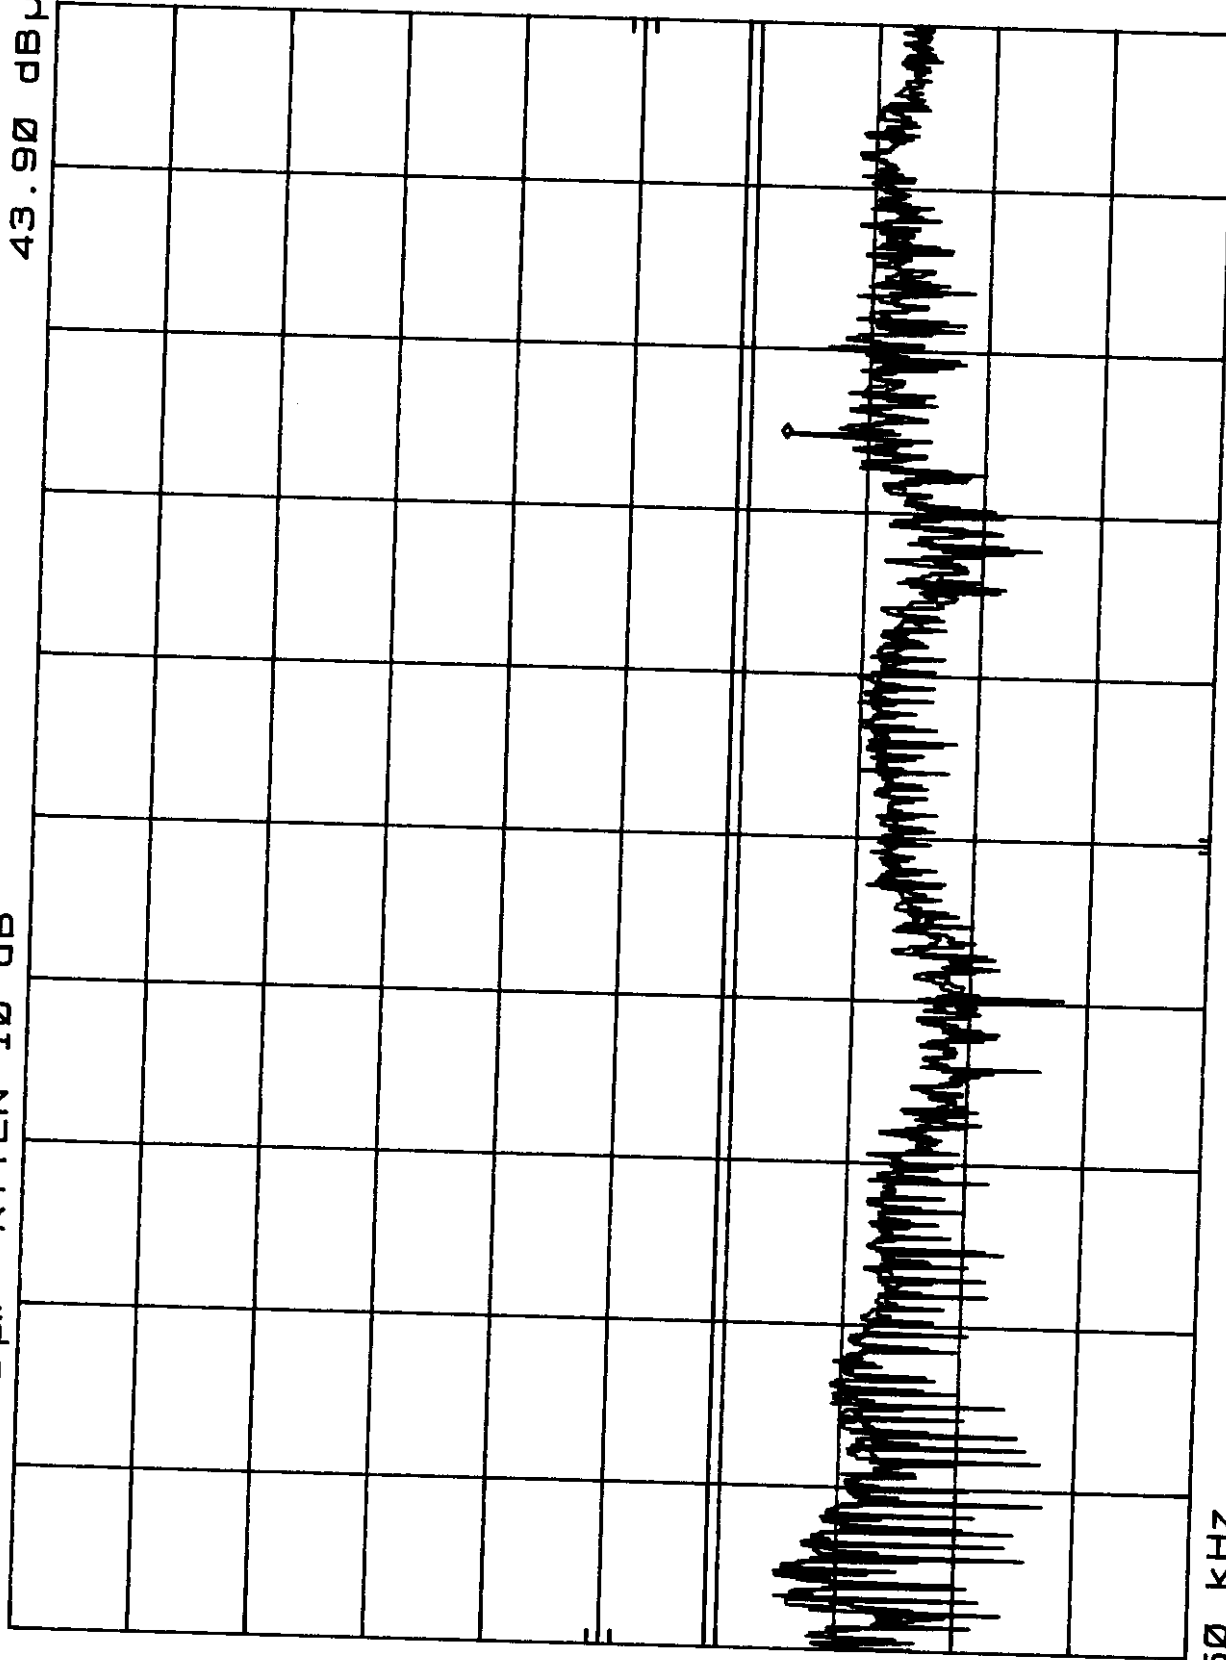

START 450 KHZ

RES BW 10 KHZ

VBW 10 KHZ

STOP 30.00 MHZ
SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM088
 REPORT NO.: EMI99-032B
 TEST DATE : JUN/21/1999
 TEST ENGI.: C.C.WU/H.H.HUANG

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CED)
 EMI-LAB
 P.O.BOX 123
 CHUNGLI, TAoyUAN, TAIWAN, R.O.C.
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
 TESTED SYSTEM:

1. EUT : 105B15 COLOR MONITOR S/N.: TY9923119
 FCC ID. : A3KM088
2. COMPUTER: HP 05052N S/N.: FR80627957
 FCC ID. : FCC L060
3. PRINTER : HP 2225C S/N.: 3145S02419
 FCC ID. : DSI6XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
 FCC ID. : CJE-0318
5. MOUSE : HP M-S34 S/N.: LZA73005475
 FCC ID. : DZL211029
6. KEYBOARD: HP C4735-60101 S/N.: J7319E0092
 FCC ID. : FCC L060
7. VIDEO CARD : METABYTE GIA 3D S/N.: 10105
 FCC ID. : I27MM-VS03A
8. CD_ROMD : SONY CDU31A S/N.: --
 FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
 ANSI C63.4-1992 'AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
 EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz'

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
 68.7KHz MODE(1024X768/85Hz) WAS TESTED.
 INTERFACE CABLE WITH ONE FERRITE CORE WAS TESTED.
 UNSHIELDED MAINS CORD WAS USED DURING TEST.
 EXTRA MICPHONE WAS USED DURING TEST.
 EXTRA EARPHONE WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
36.58	27.52	33.52	40
45.73	25.94	29.84	40
54.88	25.95	29.15	40
64.03	32.02	33.82	40
73.18	30.34	28.84	40
82.32	28.6	28.7	40

118.93	32.44	31.34	43.5
128.08	29.44	30.14	43.5
137.23	30.77	29.37	43.5
146.38	31.36	30.96	43.5
182.98	29.87	AMBIENT	43.5
201.28	32.9	31.1	43.5
210.43	31.1	AMBIENT	43.5
219.58	32.4	31.3	46
228.73	33.38	32.98	46
247.03	34.18	33.18	46
253.18	35.35	33.65	46
274.48	35.56	34.46	46
292.78	35.26	35.36	46
301.93	30.408	31.308	46
319.79	33.58	33.38	46
320.23	32.28	30.98	46
328.82	33.296	32.796	46
337.82	33.712	32.812	46
338.53	31.036	30.536	46
343.77	32.756	32.856	46
347.68	31.652	30.352	46
365.99	32.8	30.5	46
375.13	30.9	30.1	46
384.28	30.724	30.824	46
393.43	31.748	31.948	46
411.73	31.744	31.644	46
457.48	32.768	32.668	46
484.93	33.22	33.12	46
530.68	33.824	33.524	46
539.83	34.06	33.96	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
155.53	32.9	31.6	43.5
164.68	31.55	34.45	43.5
168.19	29.24	33.84	43.5

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuV/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuV/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.


CHECKED BY: K. J. He -

TESTED BY: H H Ham

RFI EMISSION LEVEL dBuv/m

JUN/21/1999

REPORT NO: EMI99-032B
MODEL NO: 105B15

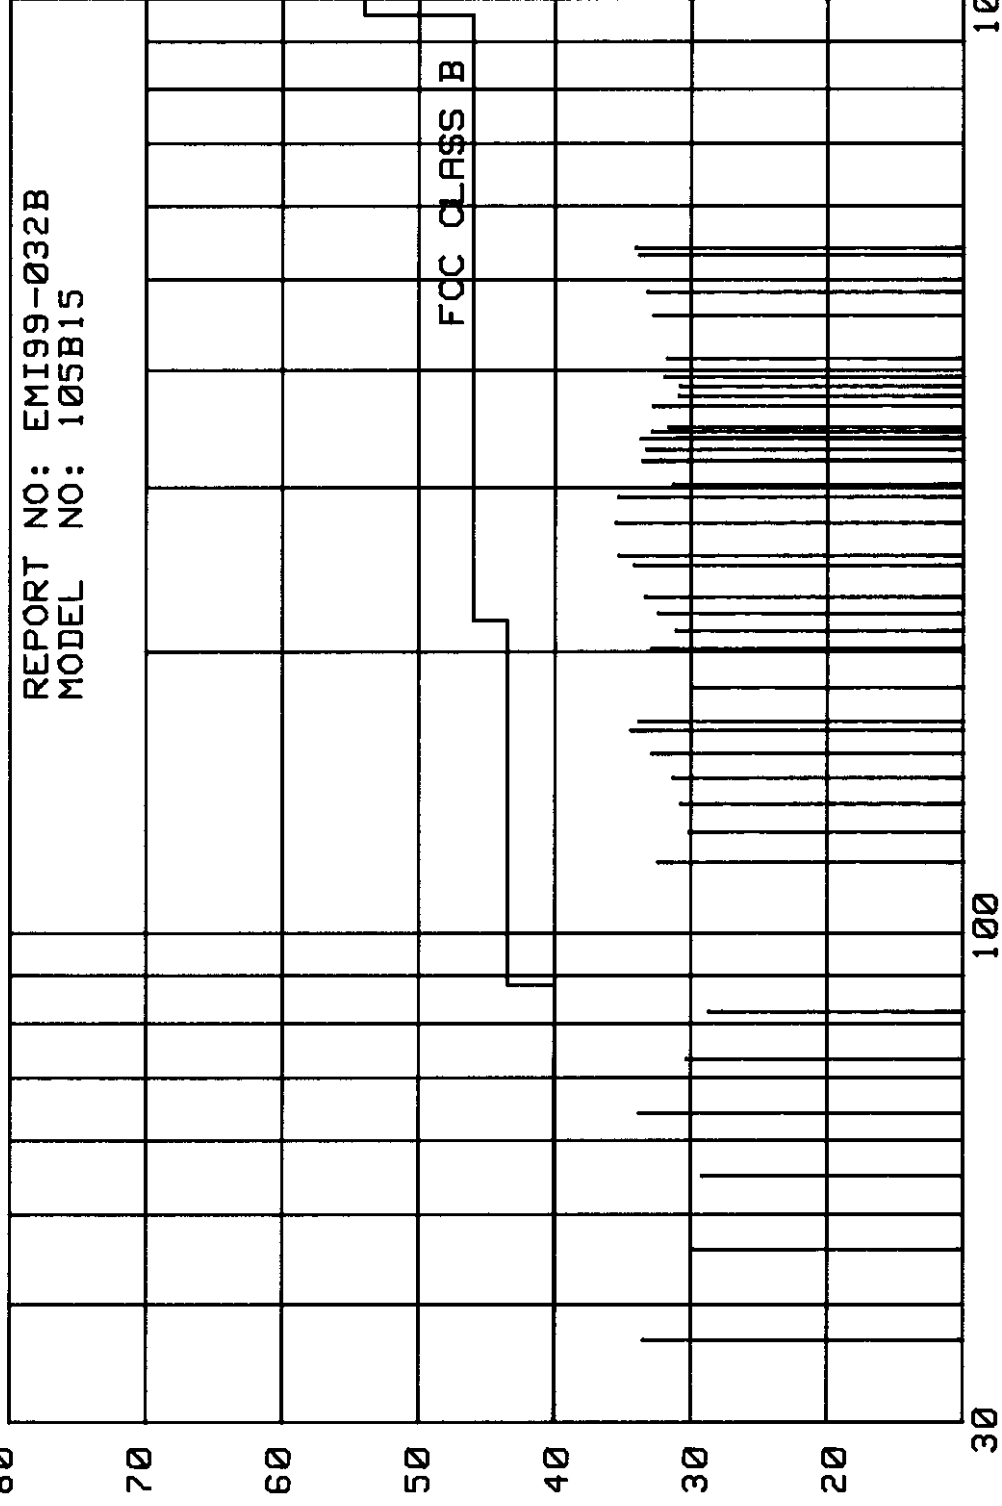


FREQUENCY MHz

A3KM088 RUN 1024X768/85Hz 68.7KHz MODE AC110V MKR 24.12 MHz
REF 107.0 dB μ V ATTEN 10 dB 41.00 dB μ V

HP

10 dB/

DL
48.0
dB μ V

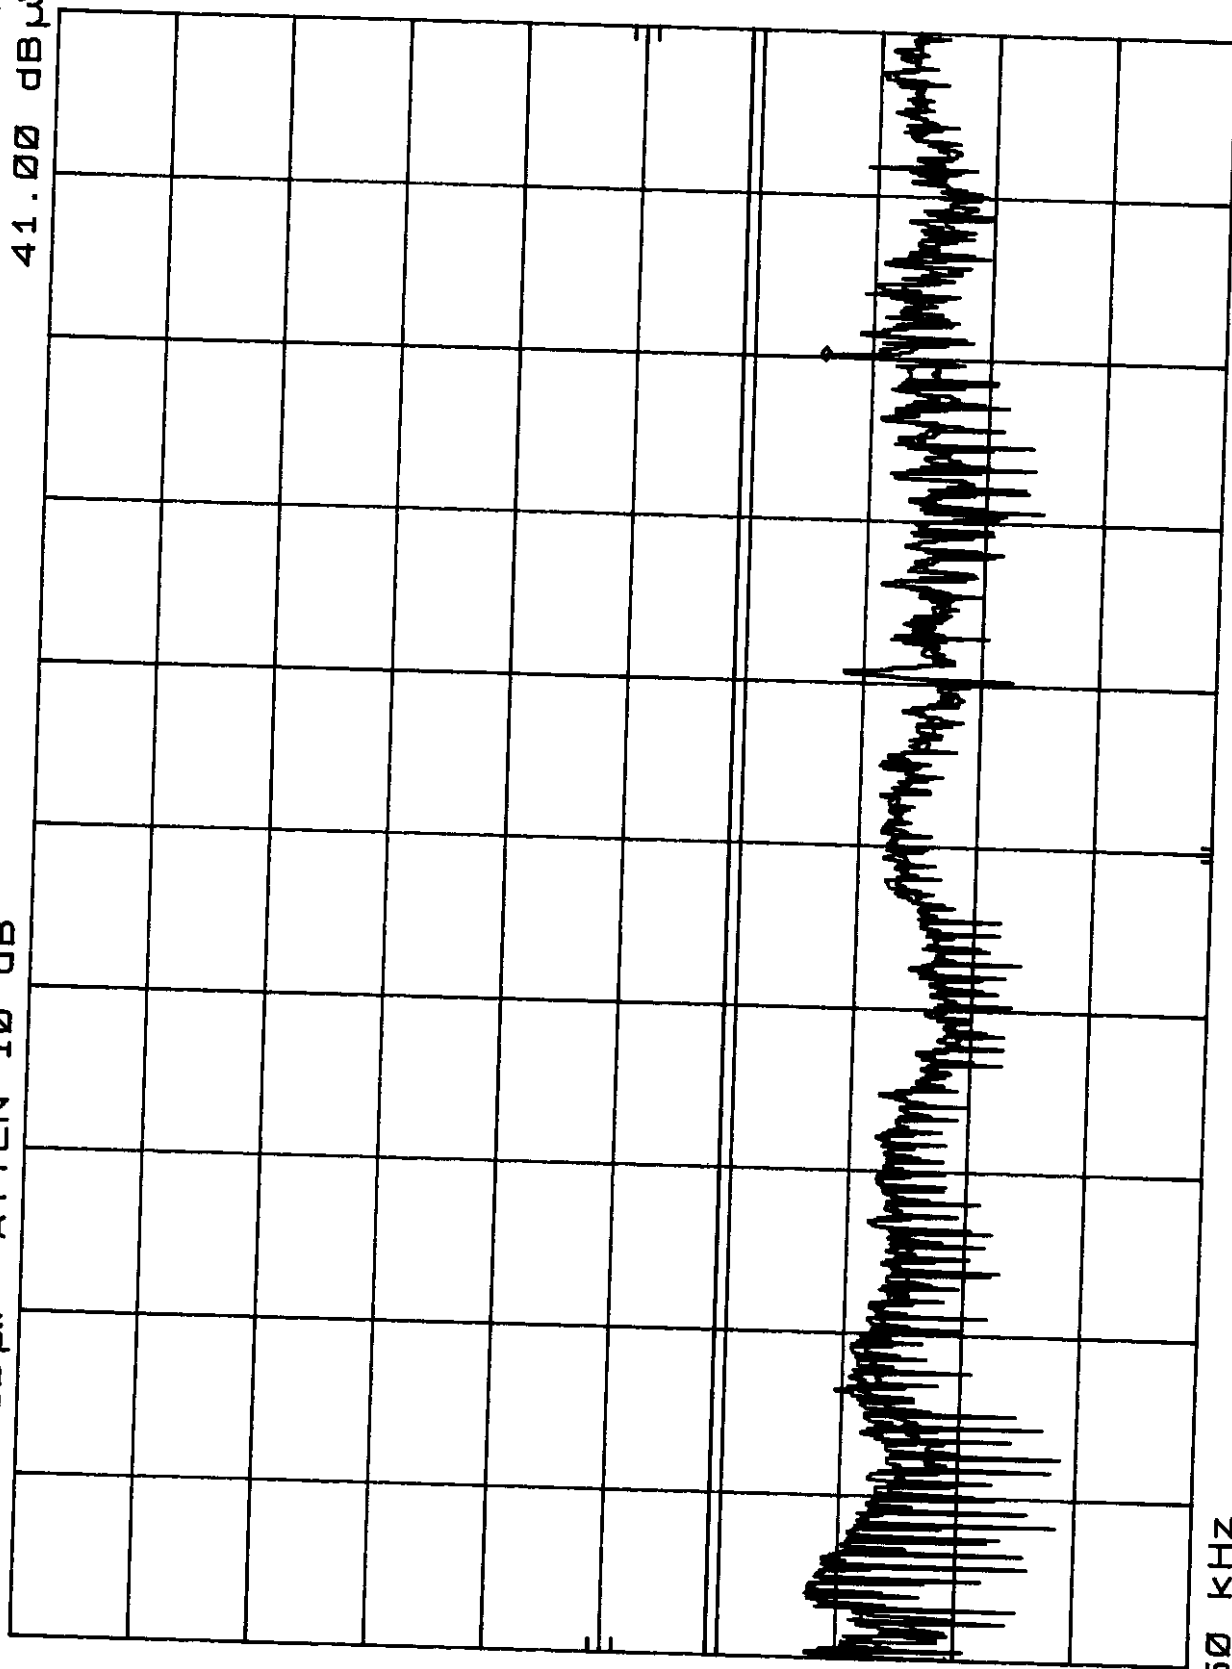

START 450 KHz

RES BW 10 KHz

VBW 10 KHz


STOP 30.00 MHz
SWP 750 msec

A3KM088 RUN 1024X768/85Hz 68.7KHz MODE AC220V MKR 1.78 MHz
REF 107.0 dBμV ATTN 10 dB 42.70 dBμV

hp

10 dB/

DL
48.0
dBμV

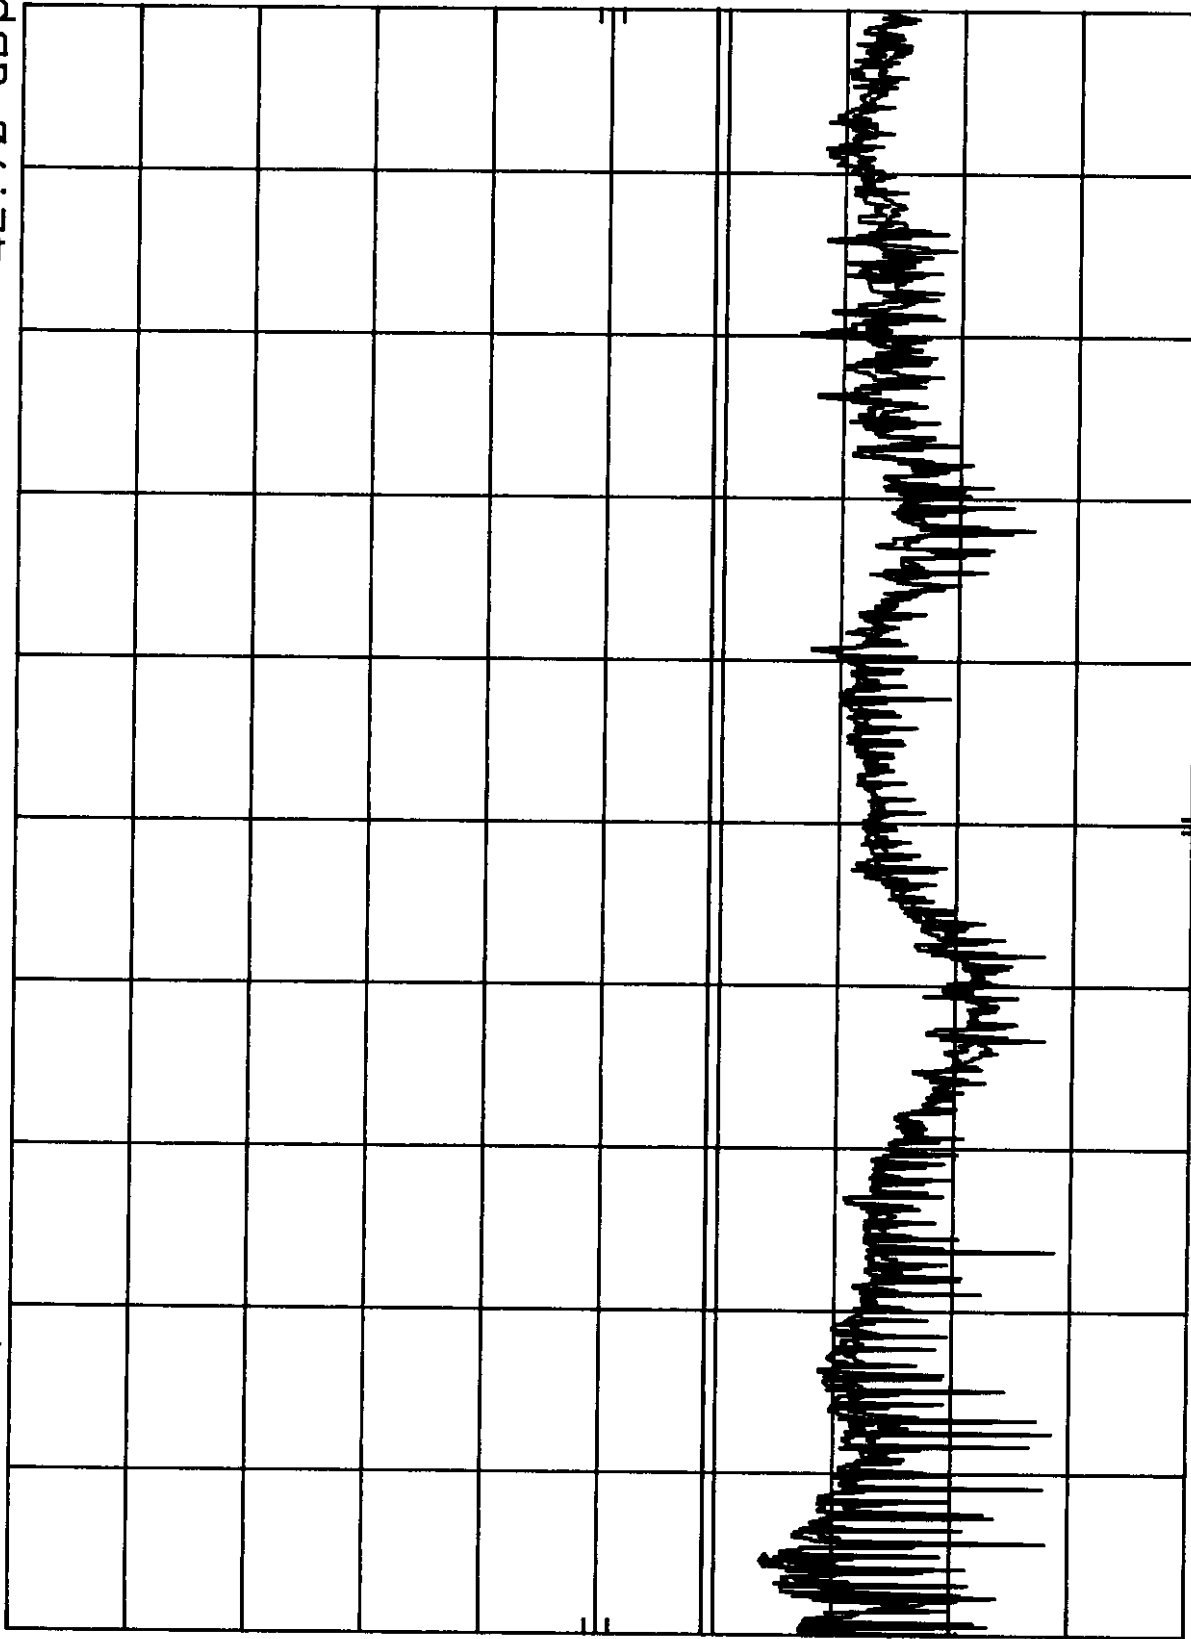

START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SWP 750 msec

Exhibit 9

**PHOTOGRAPHS OF EUT
AND
TEST CONFIGURATION**

FCC TEST REPORT

FCC ID : A3KM088
 REPORT NO.: EMI99-032A
 TEST DATE : JUN/19/1999
 TEST ENG1.: C.C.WU/H.H.HUANG

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CED)
 EMI-LAB
 P.O.BOX 123
 CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
 TESTED SYSTEM:

1. EUT : 105B10 COLOR MONITOR S/N.: TY9923119
 FCC ID. : A3KM088
2. COMPUTER: HP D5052N S/N.: FR80627957
 FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145S02419
 FCC ID. : DSI6XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
 FCC ID. : CJE-0318
5. MOUSE : HP M-S34 S/N.: LZA73005475
 FCC ID. : DZL211029
6. KEYBOARD: HP C4735-60101 S/N.: J7319E0092
 FCC ID. : FCC LOGO
7. VIDEO CARD : METABYTE 61A 3D S/N.: 10105
 FCC ID. : I27MM-VS03A
8. CD_ROMD : SONY CDU31A S/N.: --
 FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
 ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
 EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
 64.0KHz MODE(1280X1024/60Hz) WAS TESTED.
 INTERFACE CABLE WITH ONEE FERRITE CORE WAS TESTED.
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuV/m)	VERTICAL (dBuV/m)	FCC CLASS B LIMIT (dBuV/m)
41.04	29.34		
51.3	25.51	30.04	40
61.55	26.76	27.91	40
112.89	30.38	30.46	40
123.15	31.99	28.88	43.5
143.68	32.74	34.29	43.5
		30.44	43.5