

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/5/21

#01_LTE Band 7_20M_QPSK_1_0_Front_10mm_Ch21100

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2535 MHz

Medium: HSL_2600_250521 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.917$ S/m; $\epsilon_r = 39.426$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.01, 6.75, 6.65) @ 2535 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1794; Calibrated: 2025/2/12
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.937 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.565 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.979 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.320 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 0.833 W/kg

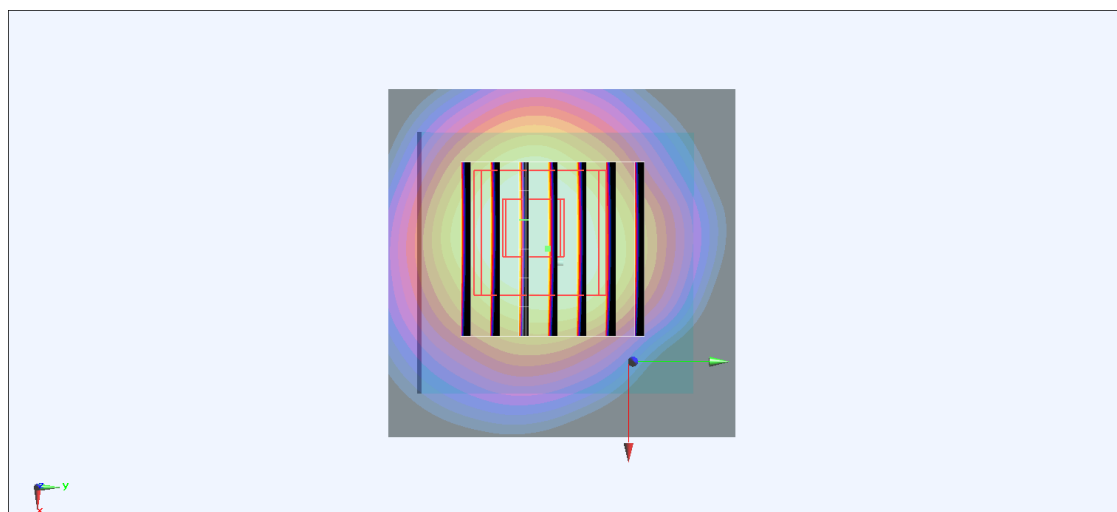

0 dB = 0.833 W/kg = -0.79 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/27

#02_LTE Band 12_10M_QPSK_1_0_Front_10mm_Ch23095

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 707.5 MHz

Medium: HSL_750_250227 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 41.977$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:


- Probe: EX3DV4 - SN3931; ConvF(9.46, 9.11, 8.98) @ 707.5 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 2024/4/22
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Fast SAR: SAR(1 g) = 0 W/kg; SAR(10 g) = 0 W/kg

Maximum value of SAR (interpolated) = 0 W/kg

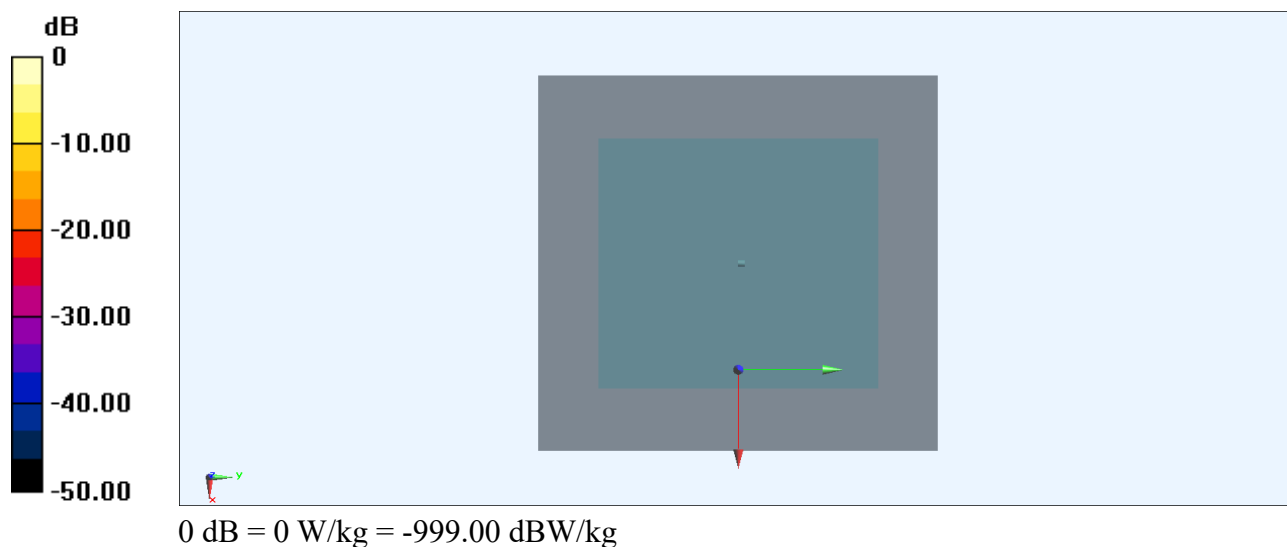

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/27

#03_LTE Band 13_10M_QPSK_1_0_Front_10mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 782 MHz

Medium: HSL_750_250227 Medium parameters used: $f = 782$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.501$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:


- Probe: EX3DV4 - SN3931; ConvF(9.46, 9.11, 8.98) @ 782 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 2024/4/22
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Fast SAR: SAR(1 g) = 0 W/kg; SAR(10 g) = 0 W/kg

Maximum value of SAR (interpolated) = 0 W/kg

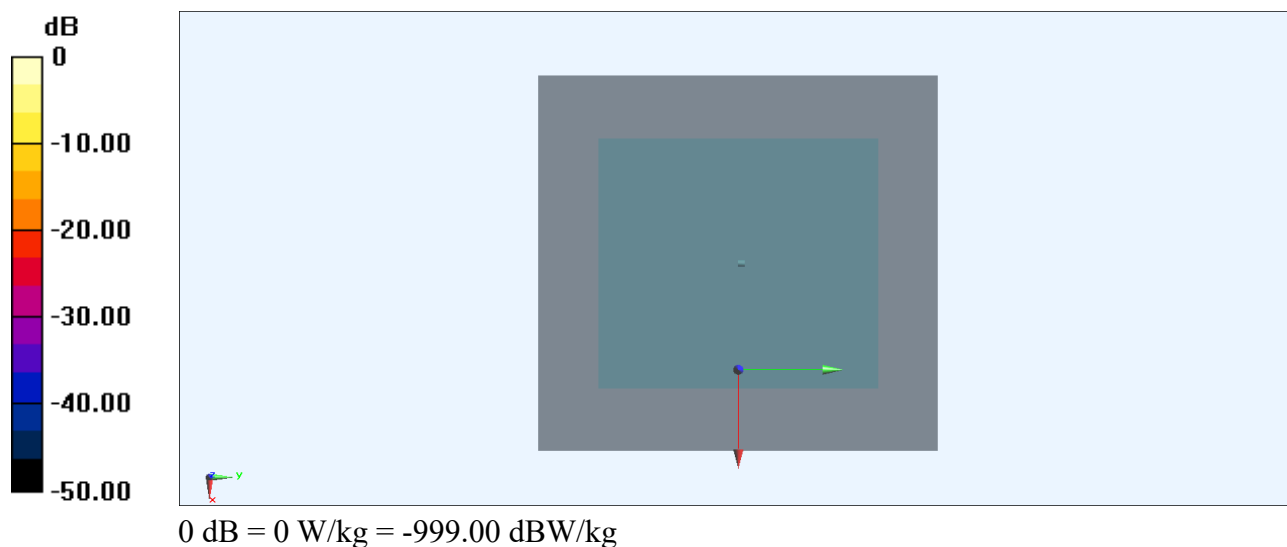

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/27

#04_LTE Band 25_20M_QPSK_1_0_Front_10mm_Ch26140

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1860 MHz

Medium: HSL_1900_250227 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.33$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.67, 7.38, 7.28) @ 1860 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 2024/4/22
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.247 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.595 V/m; Power Drift = -0.16 dB



Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 70.5%

Maximum value of SAR (measured) = 0.210 W/kg

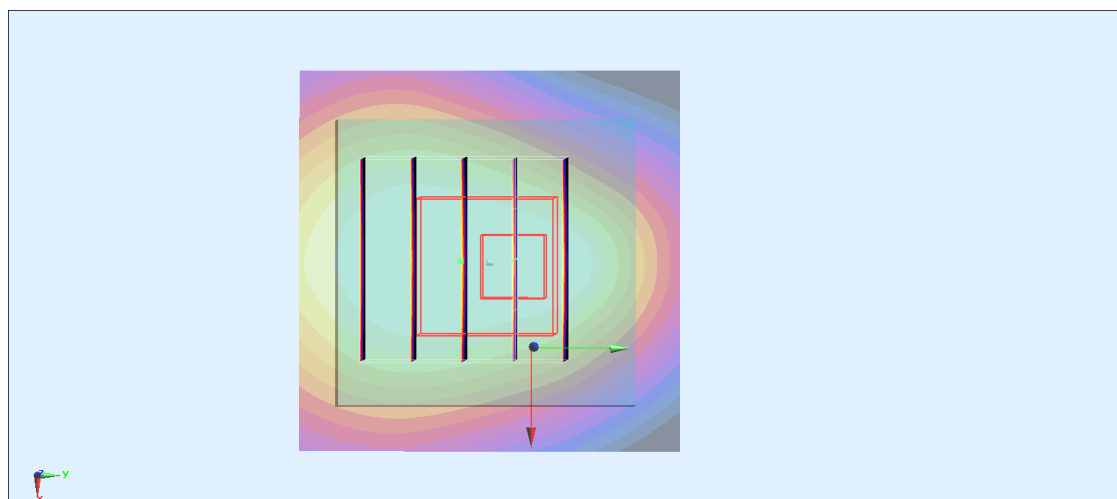

0 dB = 0.210 W/kg = -6.78 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/27

#05_LTE Band 26_15M_QPSK_1_0_Front_10mm_Ch26865

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 831.5 MHz

Medium: HSL_850_250227 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.397$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:


- Probe: EX3DV4 - SN3931; ConvF(9.11, 8.77, 8.65) @ 831.5 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 2024/4/22
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Fast SAR: SAR(1 g) = 0 W/kg; SAR(10 g) = 0 W/kg

Maximum value of SAR (interpolated) = 0 W/kg

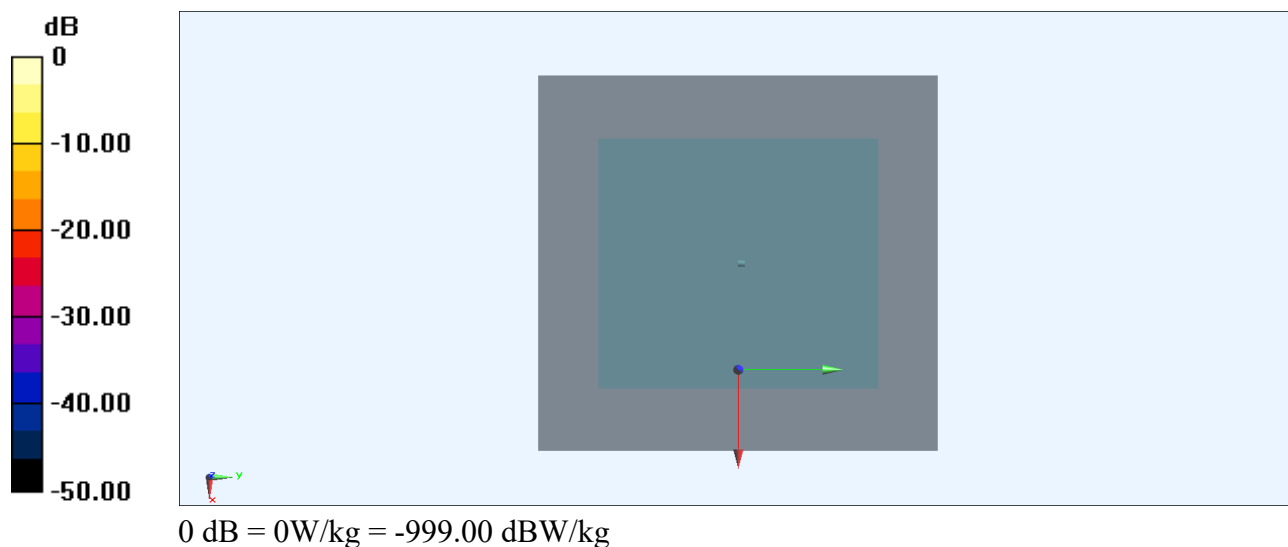

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/7

#06_LTE Band 66_20M_QPSK_1_0_Front_10mm_Ch132072

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1720 MHz

Medium: HSL_1750_250307 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 40.742$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.08, 7.96, 7.11) @ 1720 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1776; Calibrated: 2025/2/12
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.649 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.131 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 67.3%

Maximum value of SAR (measured) = 0.588 W/kg

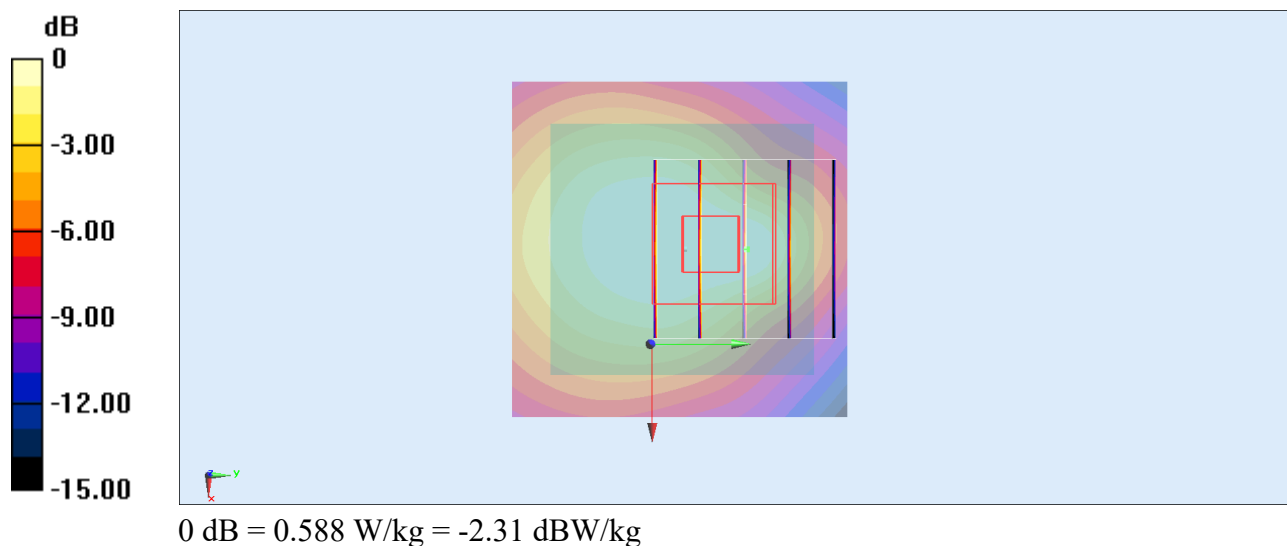

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/27

#07_LTE Band 71_20M_QPSK_1_0_Front_10mm_Ch133297

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 680.5 MHz

Medium: HSL_750_250227 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.089$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:


- Probe: EX3DV4 - SN3931; ConvF(9.46, 9.11, 8.98) @ 680.5 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 2024/4/22
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 0 V/m; Power Drift = 0 dB

Fast SAR: SAR(1 g) = 0 W/kg; SAR(10 g) = 0 W/kg

Maximum value of SAR (interpolated) = 0 W/kg

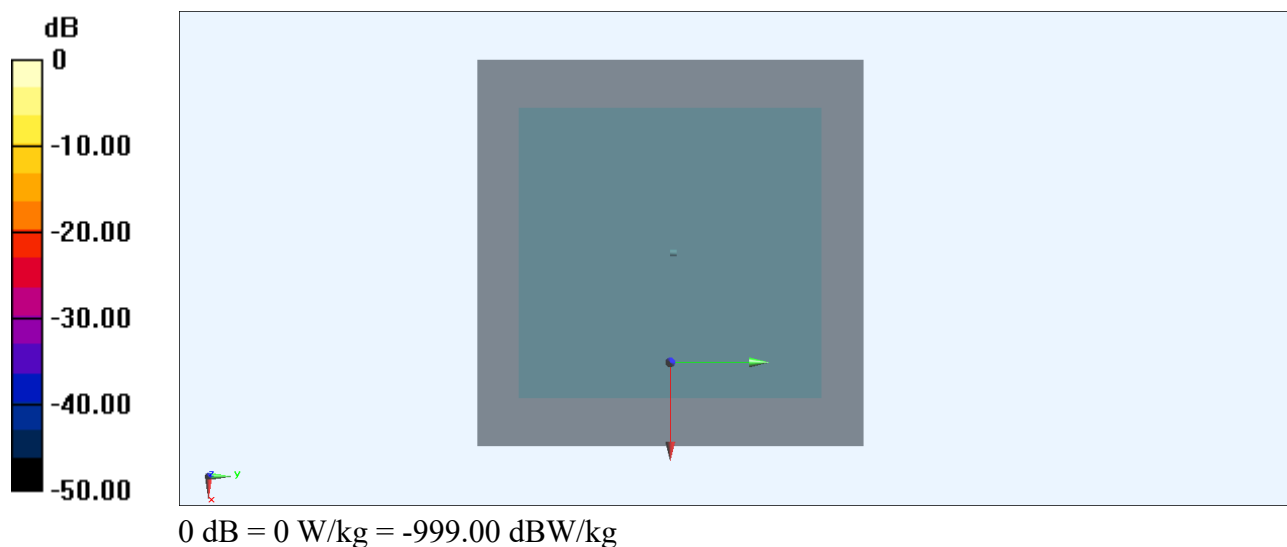

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/9

#08_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch11

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz

Medium: HSL_2450_250309 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 38.543$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.38, 6.59) @ 2462 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1776; Calibrated: 2025/2/12
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.809 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.540 V/m; Power Drift = -0.18 dB



Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.3%

Maximum value of SAR (measured) = 0.785 W/kg

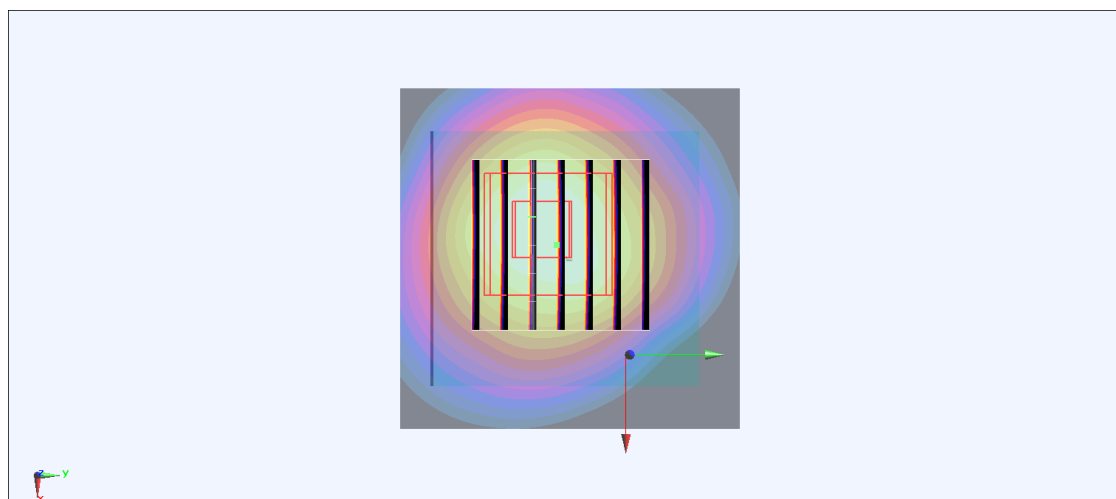

0 dB = 0.785 W/kg = -1.05 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#09_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch52

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5260 MHz

Medium: HSL_5G_250312 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.664$ S/m; $\epsilon_r = 36.14$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(5.59, 5.35, 5.48) @ 5260 MHz; Calibrated: 2024/6/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2024/10/15
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.26 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.216 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.1%

Maximum value of SAR (measured) = 1.12 W/kg

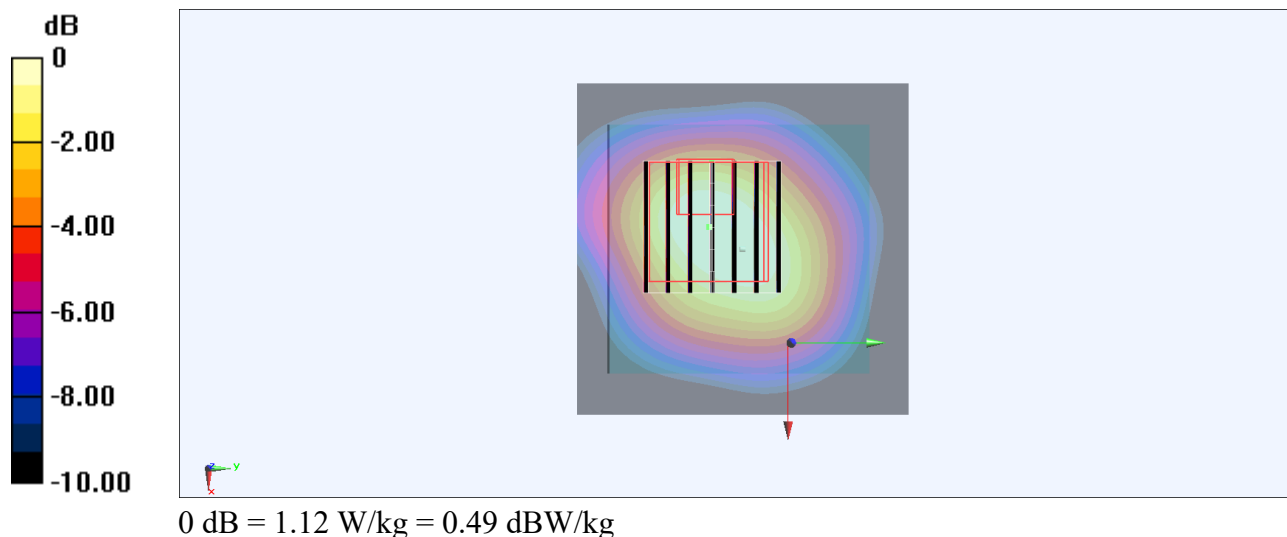

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#10_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch100

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5500 MHz

Medium: HSL_5G_250312 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.912$ S/m; $\epsilon_r = 35.803$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(4.97, 4.75, 4.87) @ 5500 MHz; Calibrated: 2024/6/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2024/10/15
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.359 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.43 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.381 W/kg

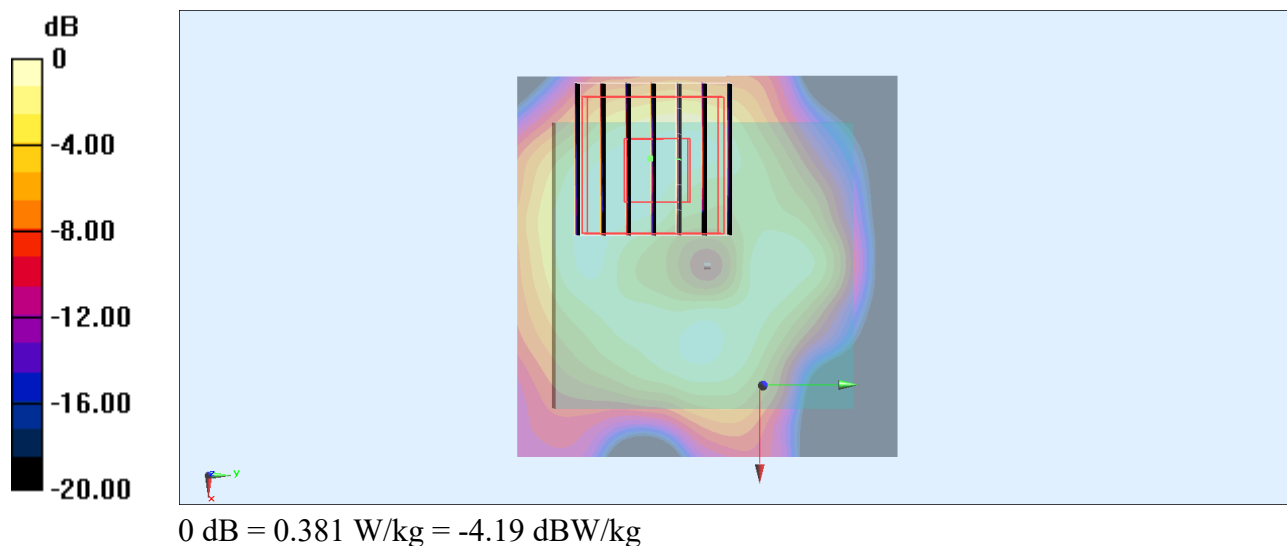

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#11_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch149

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5745 MHz

Medium: HSL_5G_250312 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.179$ S/m; $\epsilon_r = 35.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(5.02, 4.8, 4.92) @ 5745 MHz; Calibrated: 2024/6/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2024/10/15
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.450 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.975 W/kg

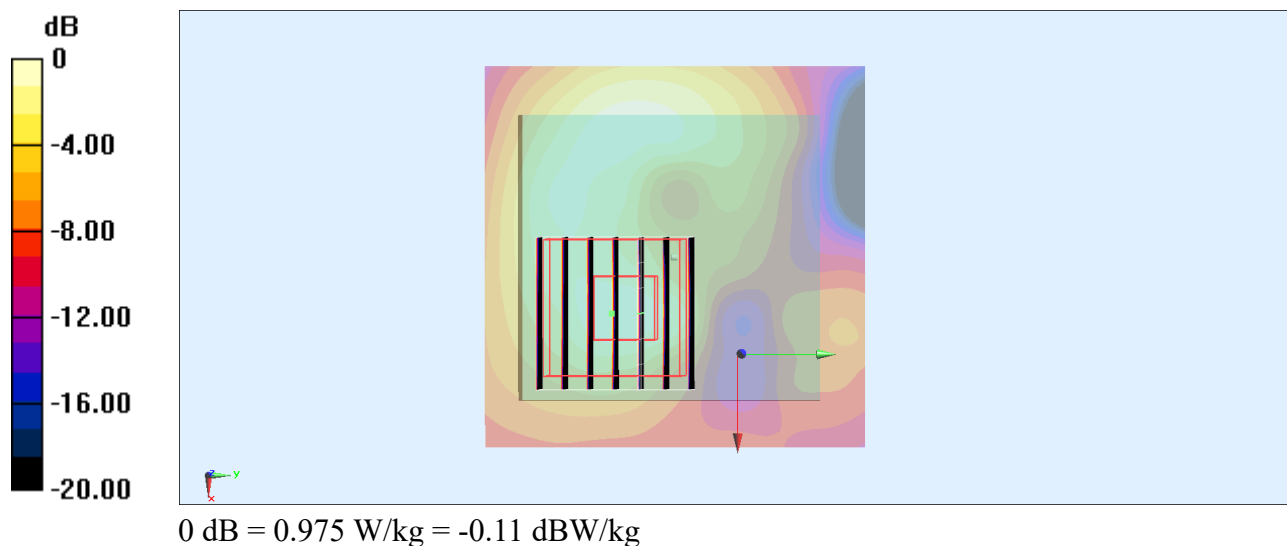

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#12_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch173

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5865 MHz

Medium: HSL_5G_250312 Medium parameters used: $f = 5865$ MHz; $\sigma = 5.306$ S/m; $\epsilon_r = 35.295$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.73, 4.96, 4.68) @ 5865 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2024/5/16
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.891 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 1.17 W/kg

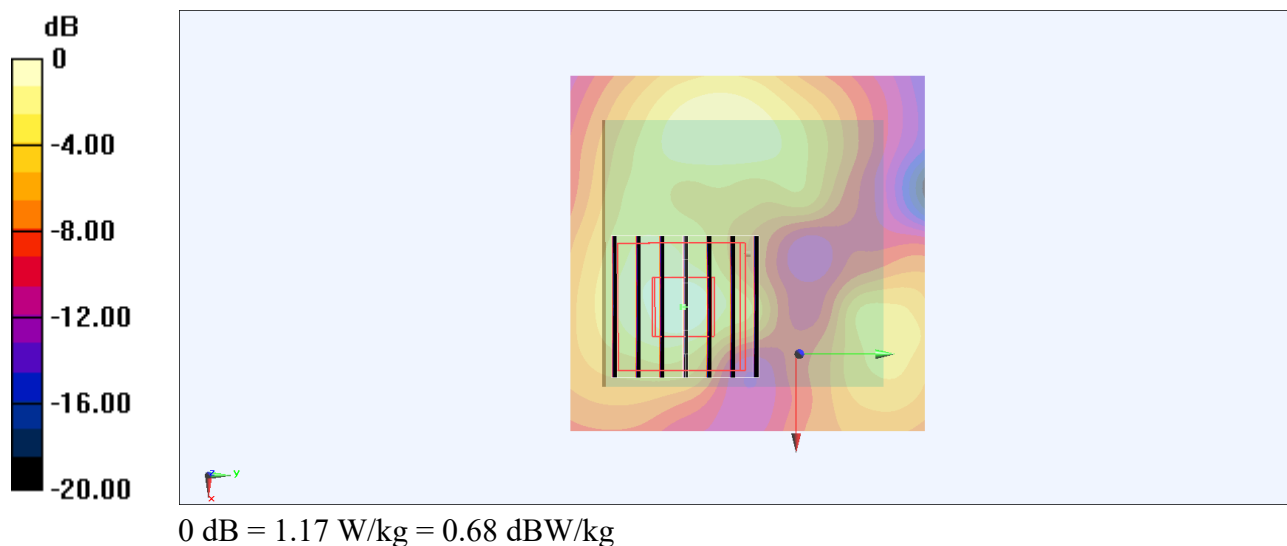

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#13_Bluetooth_1Mbps_Front_10mm_Ch0

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2402 MHz

Medium: HSL_2450_250312 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 39.268$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(6.94, 7.28, 6.88) @ 2402 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2024/5/16
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.136 W/kg

Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.039 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 0.123 W/kg

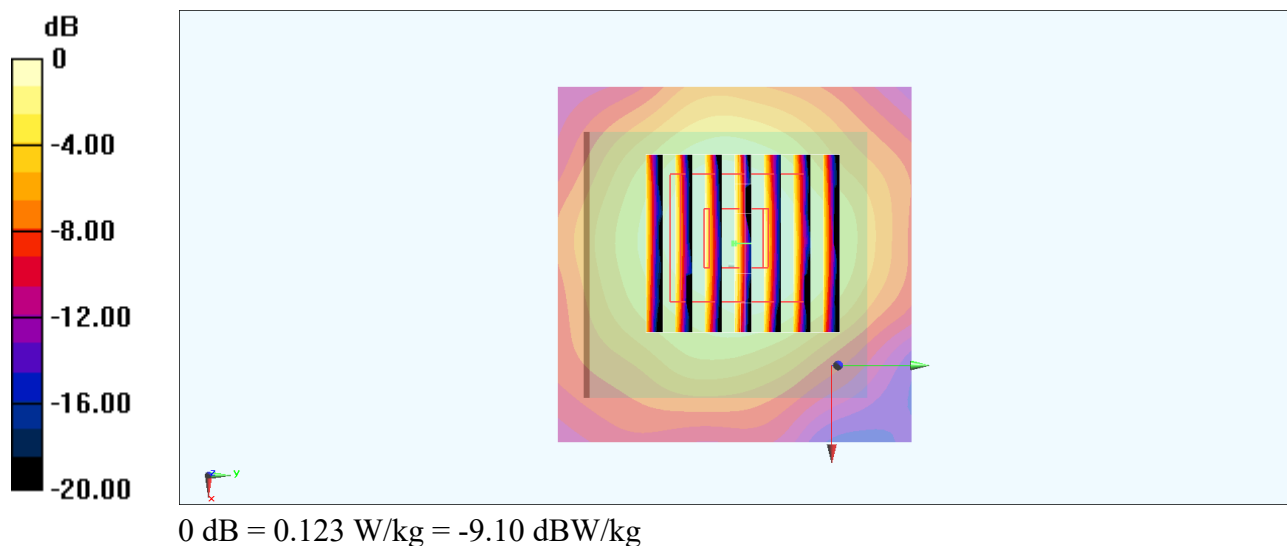

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/27

#14_LTE Band 7_20M_QPSK_1_0_Back_0mm_Ch21100

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2535 MHz

Medium: HSL_2600_250227 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.198$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.01, 6.75, 6.65) @ 2535 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 2024/4/22
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.252 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.326 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 44.7%

Maximum value of SAR (measured) = 0.209 W/kg

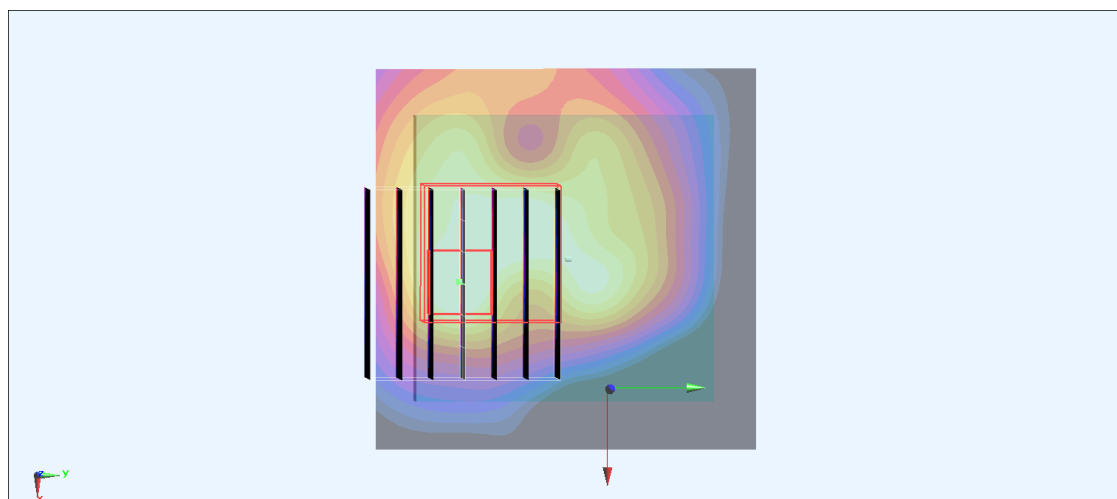

0 dB = 0.209 W/kg = -6.80 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/7

#15_LTE Band 12_10M_QPSK_1_0_Back_0mm_Ch23095

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 707.5 MHz

Medium: HSL_750_250307 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.934$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.64, 9.72, 8.68) @ 707.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1776; Calibrated: 2025/2/12
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.66 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.504 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 6.75 W/kg

SAR(1 g) = 1.94 W/kg; SAR(10 g) = 0.794 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 39.3%

Maximum value of SAR (measured) = 4.07 W/kg

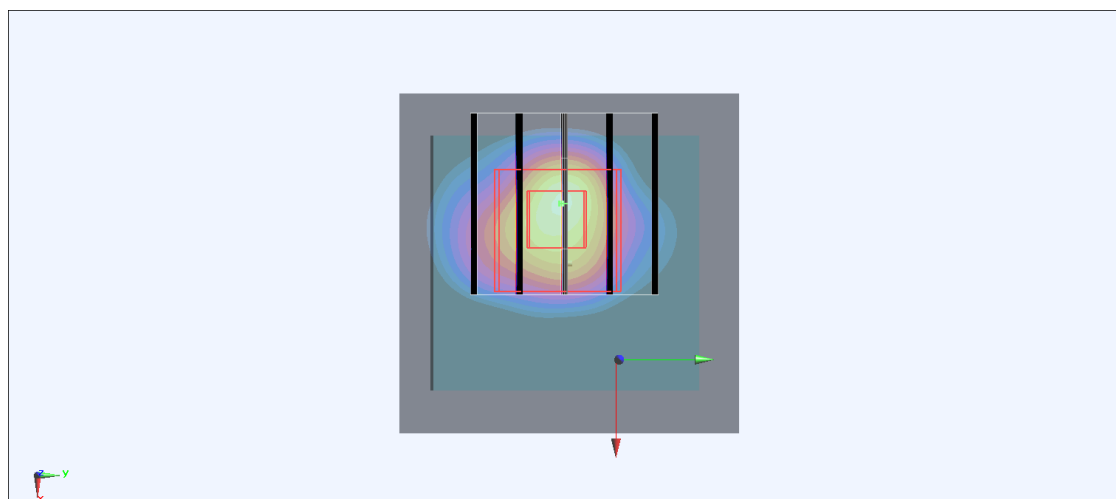

0 dB = 4.07 W/kg = 6.10 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/7



#16_LTE Band 13_10M_QPSK_1_0_Back_0mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 782 MHz

Medium: HSL_750_250307 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 42.459$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 23.5°C ; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.64, 9.72, 8.68) @ 782 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1776; Calibrated: 2025/2/12
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

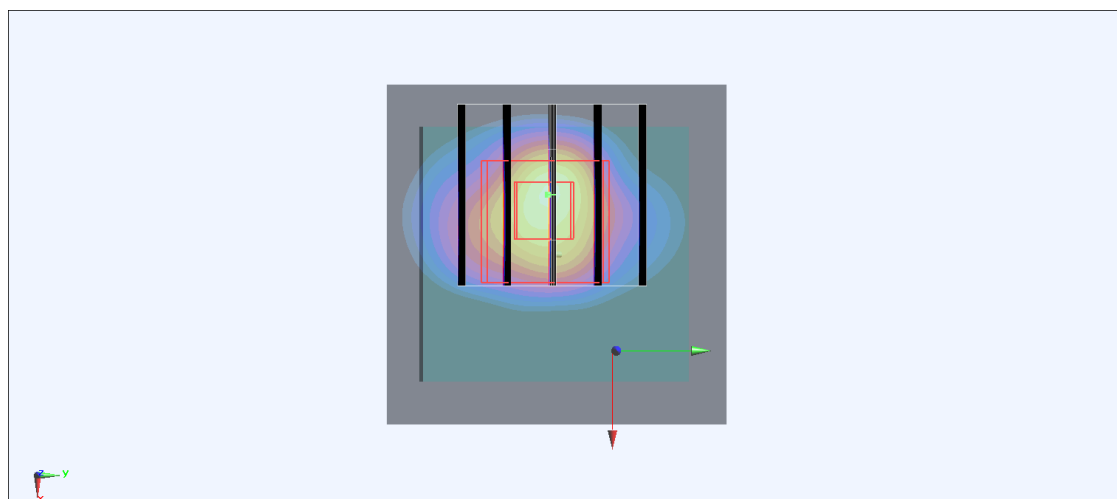Area Scan (41x41x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 3.18 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.256 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 5.75 W/kg **SAR(1 g) = 1.79 W/kg ; SAR(10 g) = 0.757 W/kg** Smallest distance from peaks to all points 3 dB below = 8.2 mm Ratio of SAR at M2 to SAR at M1 = 32.1% Maximum value of SAR (measured) = 3.55 W/kg 0 dB = 3.55 W/kg = 5.50 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/27

#17_LTE Band 25_20M_QPSK_1_0_Back_0mm_Ch26140

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1860 MHz

Medium: HSL_1900_250227 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.33$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.67, 7.38, 7.28) @ 1860 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 2024/4/22
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.121 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.159 V/m; Power Drift = -0.10 dB



Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.7%

Maximum value of SAR (measured) = 0.115 W/kg

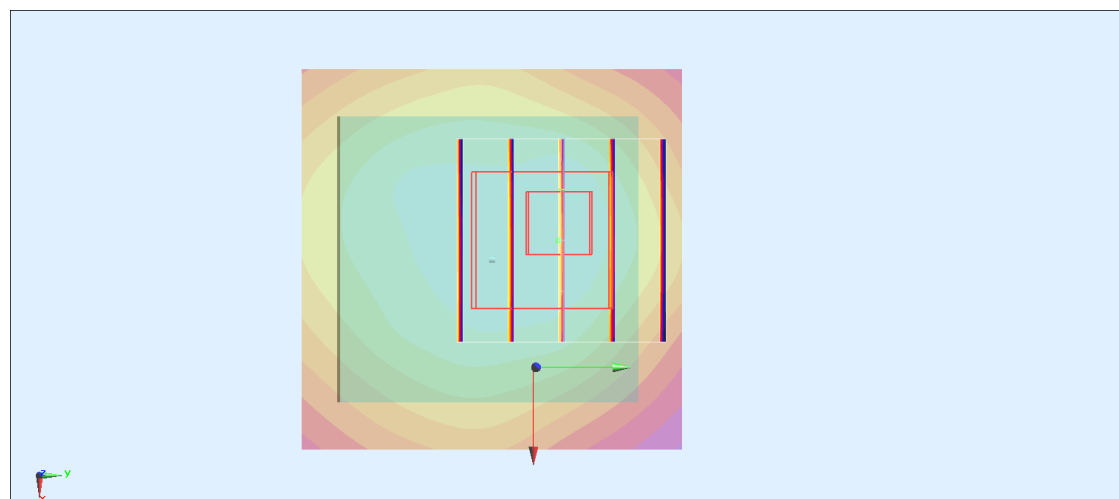

0 dB = 0.115 W/kg = -9.39 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/7

#18_LTE Band 26_15M_QPSK_1_0_Back_0mm_Ch26865

Communication System: UID 10181 - CAF, LTE-FDD; Frequency: 831.5 MHz

Medium: HSL_850_250307 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.355$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.43, 9.48, 8.47) @ 831.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1776; Calibrated: 2025/2/12
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.20 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.499 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 5.73 W/kg

SAR(1 g) = 1.8 W/kg; SAR(10 g) = 0.775 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 32.3%

Maximum value of SAR (measured) = 3.61 W/kg

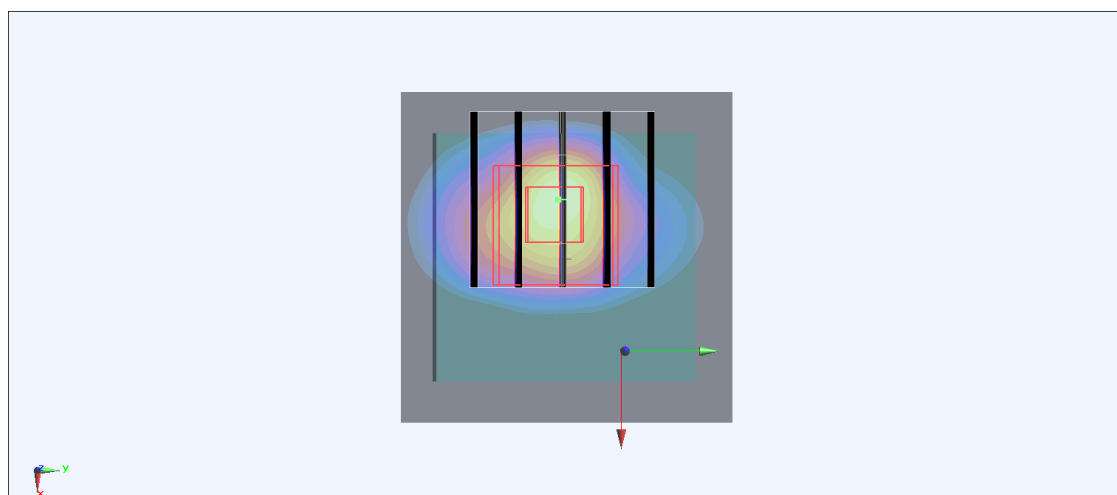

0 dB = 3.61 W/kg = 5.58 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/27

#19_LTE Band 66_20M_QPSK_1_0_Back_0mm_Ch132072

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1720 MHz

Medium: HSL_1750_250227 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.324$ S/m; $\epsilon_r = 40.808$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.9, 7.61, 7.5) @ 1720 MHz; Calibrated: 2024/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn703; Calibrated: 2024/4/22
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.200 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.252 V/m; Power Drift = -0.13 dB



Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 20.8 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.179 W/kg

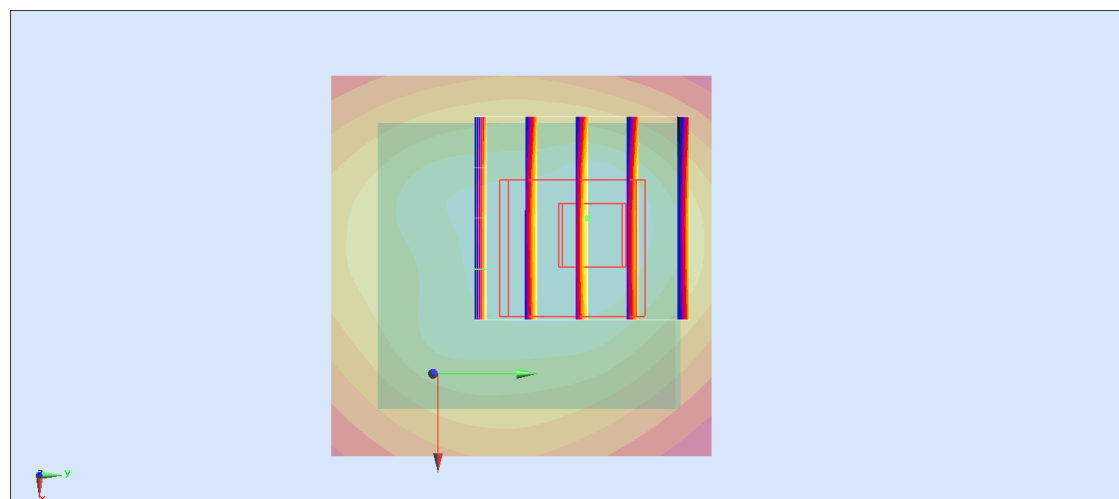

0 dB = 0.179 W/kg = -7.47 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/7

#20_LTE Band 71_20M_QPSK_1_0_Back_0mm_Ch133297

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 680.5 MHz

Medium: HSL_750_250307 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 43.046$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.64, 9.72, 8.68) @ 680.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1776; Calibrated: 2025/2/12
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.30 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.616 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 4.38 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.514 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 39.4%

Maximum value of SAR (measured) = 2.59 W/kg

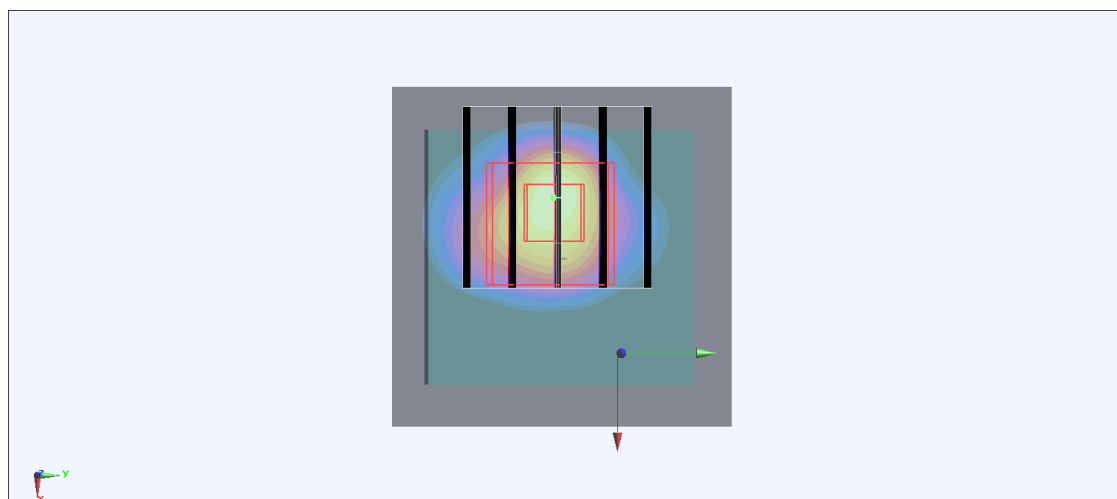

0 dB = 2.59 W/kg = 4.13 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/13

#21_NTN Band 23_15K_BPSK_1_10_Back_0mm_Ch25501

Communication System: UID 10662 - AAB; Frequency: 2000.1 MHz

Medium: HSL_2000_250313 Medium parameters used: $f = 2000.1$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.193$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.84, 7.54, 7.58) @ 2000.1 MHz; Calibrated: 2025/1/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2025/1/16
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.179 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.861 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 0.160 W/kg

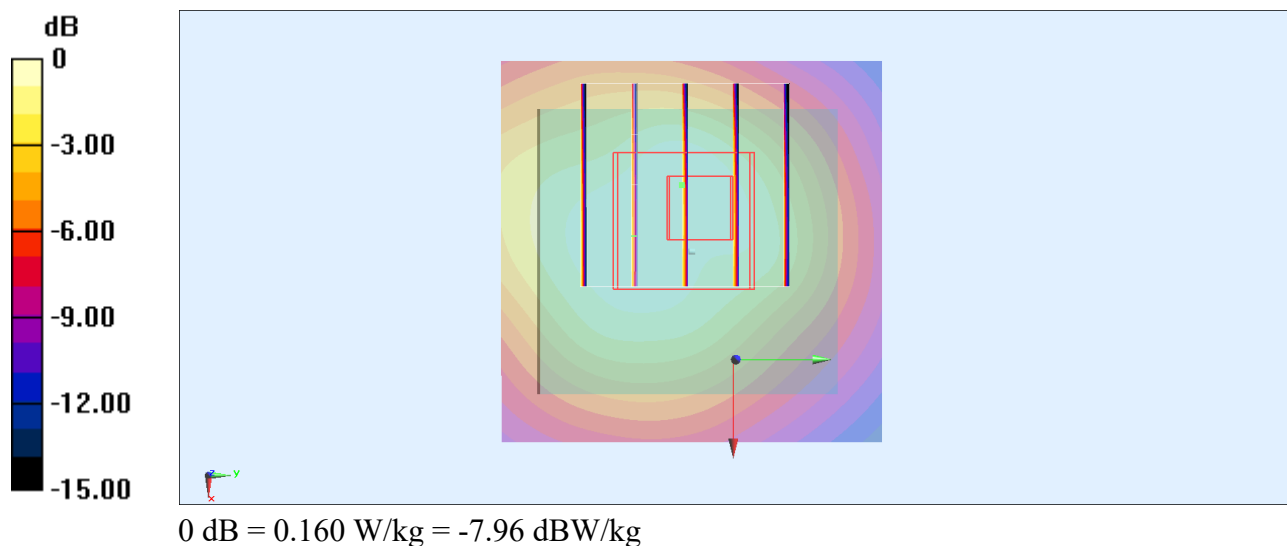

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/13

#22_NTN Band 255_15K_BPSK_1_10_Back_0mm_Ch261674

Communication System: UID 10662 - AAB; Frequency: 1643.5 MHz

Medium: HSL_1640_250313 Medium parameters used: $f = 1643.5$ MHz; $\sigma = 1.294$ S/m; $\epsilon_r = 40.168$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.85, 7.21, 7.06) @ 1643.5 MHz; Calibrated: 2024/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1694; Calibrated: 2024/11/19
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.153 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.526 V/m; Power Drift = -0.11 dB



Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.8%

Maximum value of SAR (measured) = 0.140 W/kg

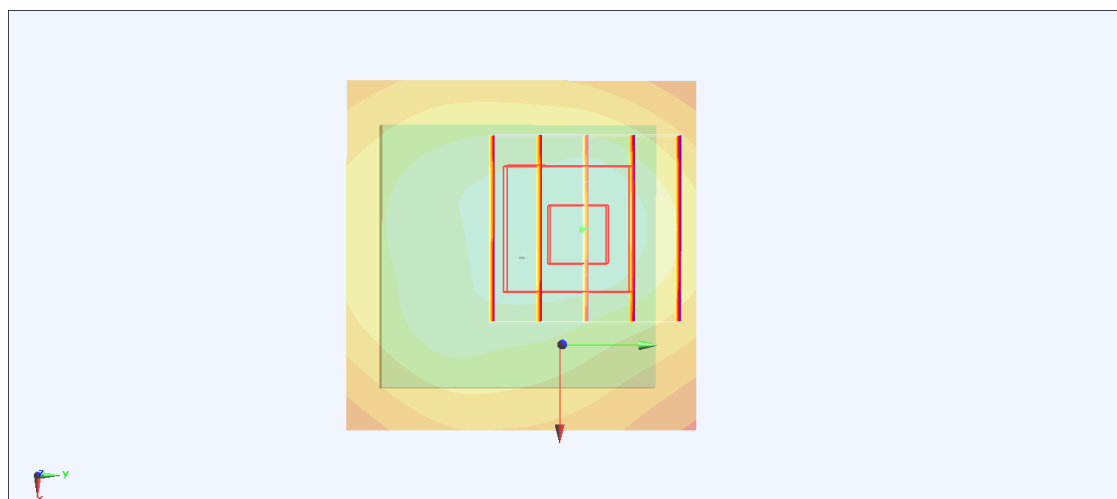

0 dB = 0.140 W/kg = -8.54 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/9

#23_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch11

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz

Medium: HSL_2450_250309 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 38.543$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.38, 6.59) @ 2462 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1776; Calibrated: 2025/2/12
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.175 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.982 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 0.190 W/kg

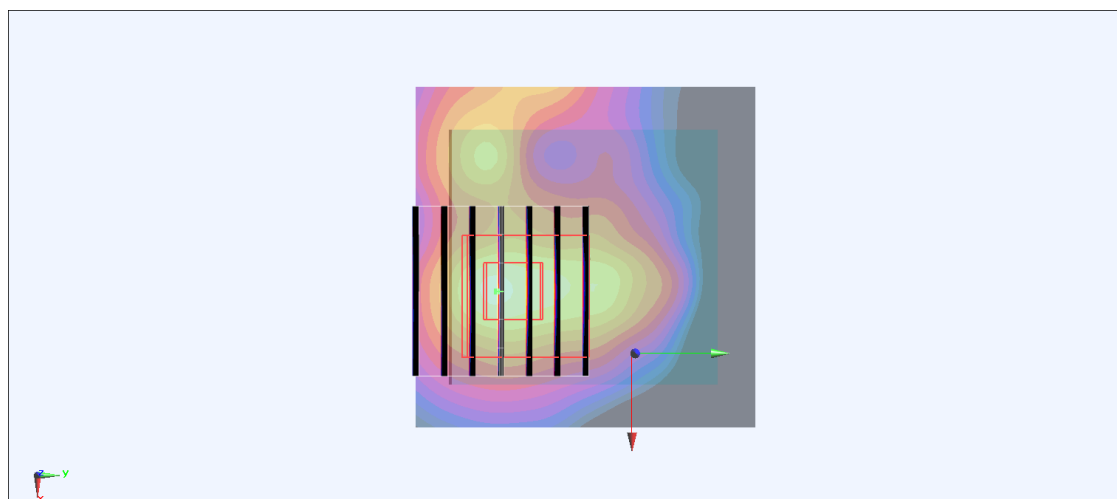

0 dB = 0.190 W/kg = -7.21 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#24_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch52

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5260 MHz

Medium: HSL_5G_250312 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.664$ S/m; $\epsilon_r = 36.14$; $\rho = 1000$ kg/m^3

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(5.59, 5.35, 5.48) @ 5260 MHz; Calibrated: 2024/6/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2024/10/15
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.275 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.961 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.986 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 0.605 W/kg

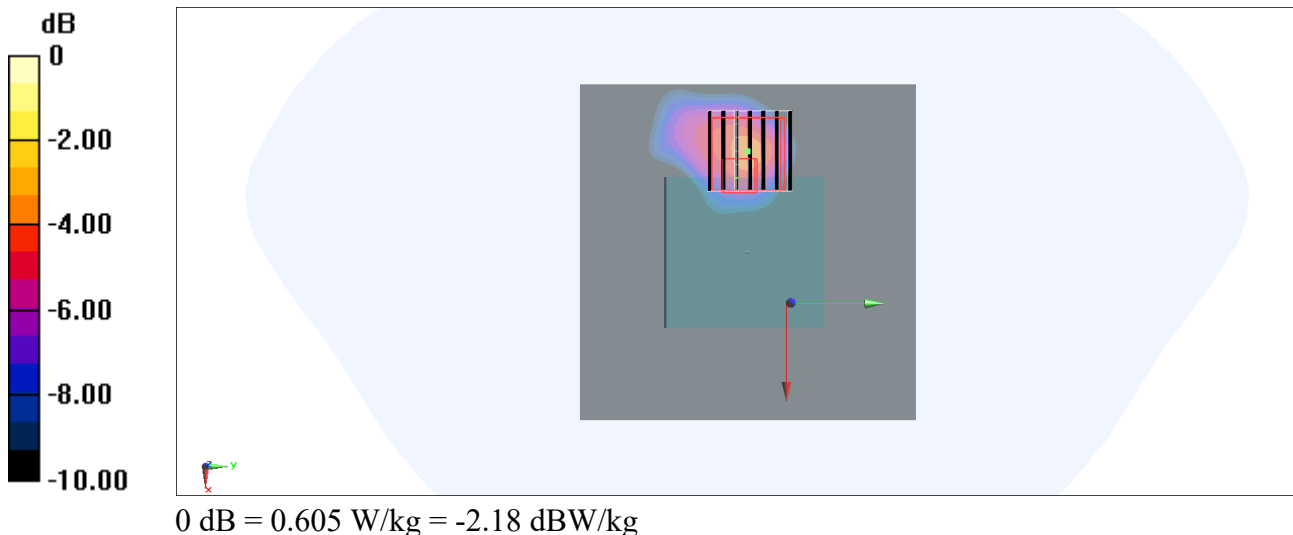

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#25_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch100

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5500 MHz

Medium: HSL_5G_250312 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.912$ S/m; $\epsilon_r = 35.803$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(4.97, 4.75, 4.87) @ 5500 MHz; Calibrated: 2024/6/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2024/10/15
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.460 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.8440 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.920 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.548 W/kg

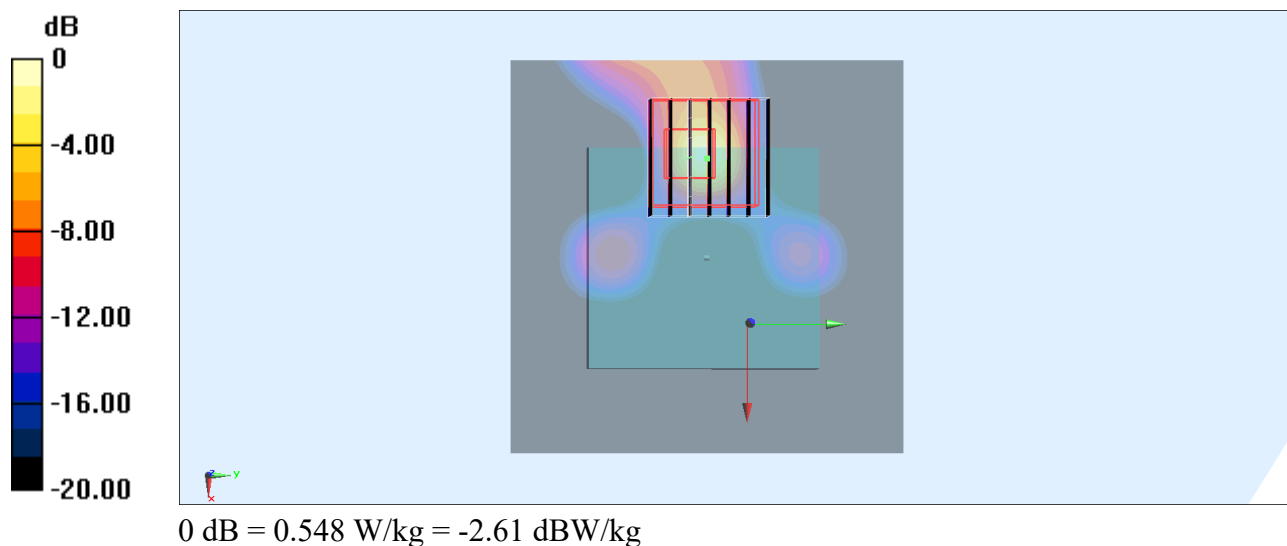

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#26_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch149

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5745 MHz

Medium: HSL_5G_250312 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.179$ S/m; $\epsilon_r = 35.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.73, 4.96, 4.68) @ 5745 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2024/5/16
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.421 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.912 V/m; Power Drift = -0.05 dB



Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.567 W/kg

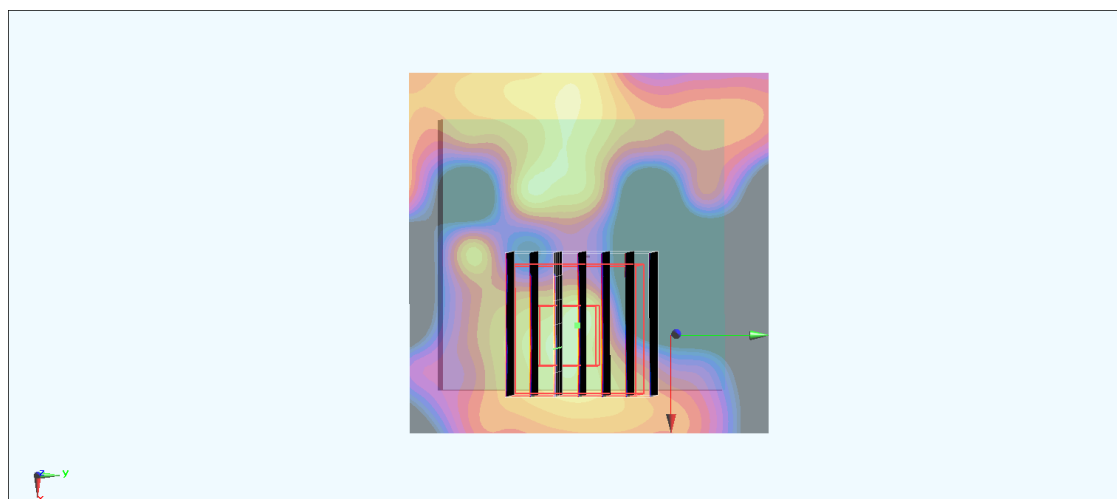

0 dB = 0.567 W/kg = -2.46 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#27_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch173

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5865 MHz

Medium: HSL_5G_250312 Medium parameters used: $f = 5865$ MHz; $\sigma = 5.306$ S/m; $\epsilon_r = 35.295$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(4.73, 4.96, 4.68) @ 5865 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2024/5/16
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.569 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.339 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.614 W/kg

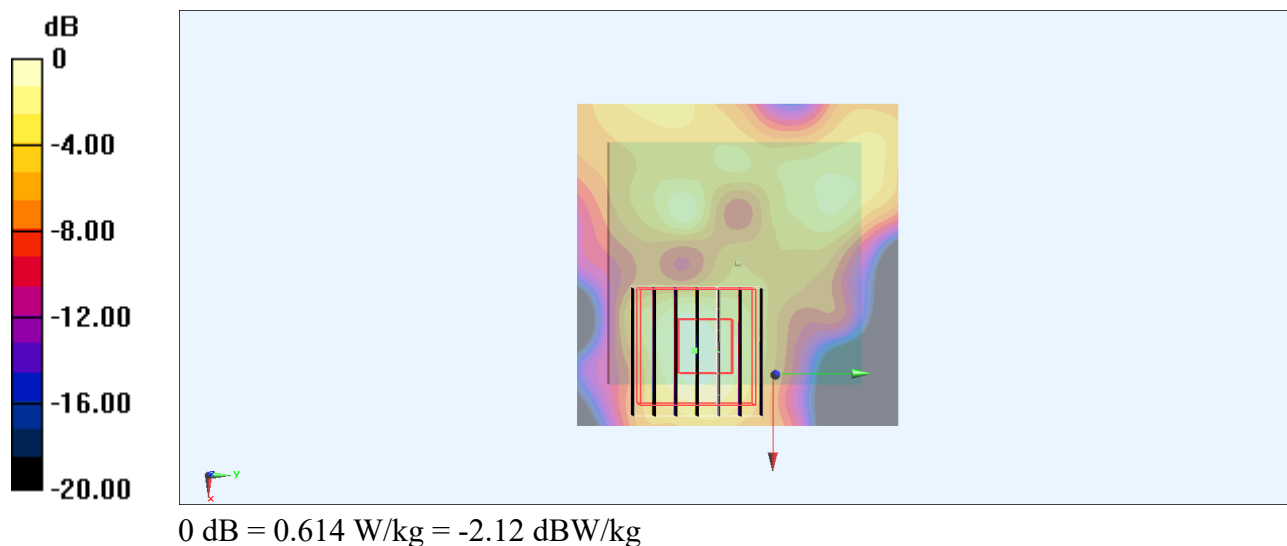

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/3/12

#28_Bluetooth_1Mbps_Back_0mm_Ch0

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2402 MHz

Medium: HSL_2450_250312 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 39.268$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7439; ConvF(6.94, 7.28, 6.88) @ 2402 MHz; Calibrated: 2024/8/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2024/5/16
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0496 W/kg

Zoom Scan (8x8x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.000 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.020 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 17.5 mm)

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 0.0625 W/kg

