Antenna Report

FCC ID: A4RGR83Y

4/2/2024


Google LLC

1. Test Method

The antenna gains are obtained through measurements in a fully anechoic OTA chamber with a 3D positioner.

Measurements are taken in discrete steps in theta and phi direction, data is being recorded using a network analyzer (passive) for both theta and phi polarizations at each position resulting in a 3D gain pattern. Step size is <30deg along both axes.

Gain is derived directly through spatial averaging of VNA S21 measurements (passive measurement).

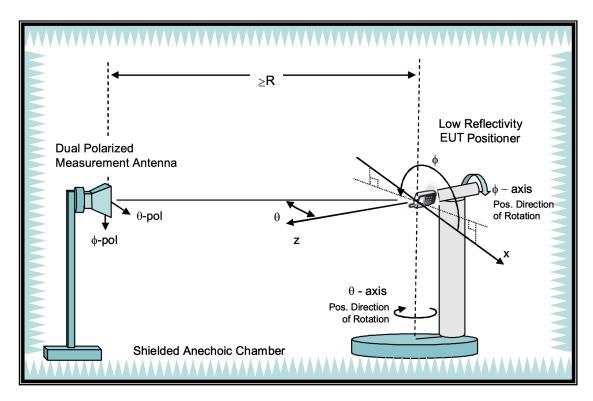

R=4.9m

2. Test Equipment and Calibration

The antenna gain measurement equipment and system are all within their calibration periods.

Site Description	Chamber Manufacturer	Туре
AMS-8923 Multi Probe Anechoic Chamber	ETS-Lindgren	Fully Anechoic
Site location:	No. 4, Minsheng St., Tucheng Dist., New Taipei City , Taiwan (R.O.C.)	

Description	Manufacturer	Model
Network Analyzer	Keysight	E5071C

Equipment calibration status	Calibration date : 02-Jan-2024Due of next calibration : 20-Sep-2024
Test dates	- Jan. 2024
Names of test personnel	- JimPCTsai@fih-foxconn.com

3. Site Path Loss

To provide accurate antenna gain values, the chamber is calibrated with the measured path loss. The block diagram below represents the setup of the site path loss. Path loss is provided for both polarities for all WLAN frequency ranges.

AMS-8500 OTA Chamber ETS Sleev Dipole Measuring Antenna Keysight ENA E5071C

Figure: Block Diagram of Path Loss

Frequency (MHz)	H-Pol Path Loss	V-Pol Path Loss
2402	-72.77	-73.64
2412	-72.71	-73.64
2437	-73.25	-74.45
2462	-73.99	-74.6
2480	-74.2	-73.91
5180	-84.38	-84.22
5280	-84.65	-83.89
5500	-85.6	-85.24
5806	-85.02	-84.72
5865	-85.54	-85.11
6180	-87.15	-86.07
6480	-89.89	-88

6705	-90.54	-89.32
7005	-91.43	-90.12

4. Test Setup

See separate appendix document for pictures of the test setup in this filing.

5. Antenna Type

Antenna #	Туре
Ant4	ILA
Ant3	IFA


6. WLAN/BT Antennas

Ant	Band	Frequency Band	Peak Gain(dBi)
	2.4 GHz WiFi/BT/Thread	2400 - 2483.5 MHz	-0.3
	UNII-1	5180 MHz	-7.0
	UNII-2A	5280 MHz	-5.6
	UNII-2C	5500 MHz	-4.3
	UNII-3	5820 MHz	-4.7
Ant4	UNII-4	5887 MHz	-2.8
	UNII-5	6175 MHz	-3.7
	UNII-6	6475 MHz	-3.1
	UNII-7	6700 MHz	-5.7
	UNII-8	7000 MHz	-5.4
	2.4 GH WiFi/BT/Thread	2400 - 2483.5 MHz	-0.1
	UNII-1	5180 MHz	-2.2
	UNII-2A	5280 MHz	-1.7
	UNII-2C	5500 MHz	0.4
	UNII-3	5820 MHz	-2.5
Ant3	UNII-4	5887 MHz	-1.5
	UNII-5	6175 MHz	-3.2
	UNII-6	6475 MHz	-0.3
	UNII-7	6700 MHz	-1.6
	UNII-8	7000 MHz	-3.7


7. Radiation Plots

Ant4:


Ant4 Freq. 2.4 GHz:

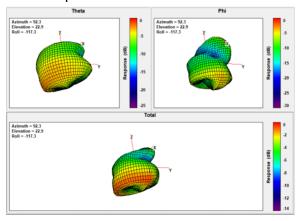


Ant4 Freq. 5280 MHz:

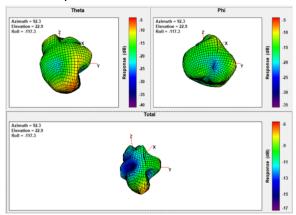


Ant4 Freq. 5180 MHz:

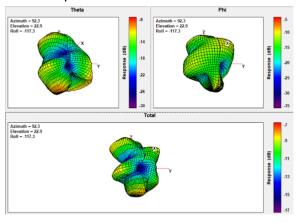


Ant4 Freq. 5500 MHz:

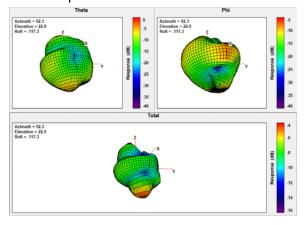



Ant4 Freq. 5820 MHz:

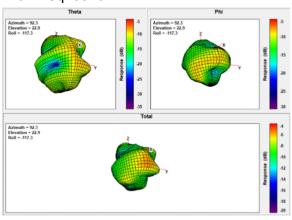


Ant4 Freq. 5887 MHz:

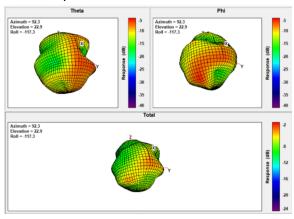


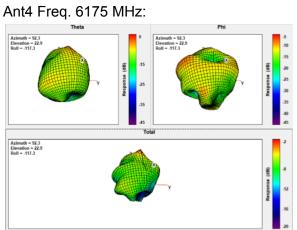

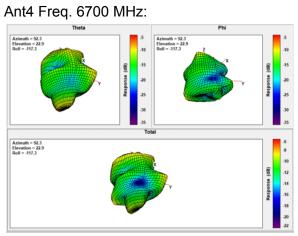


Ant4 Freq. 6475 MHz:

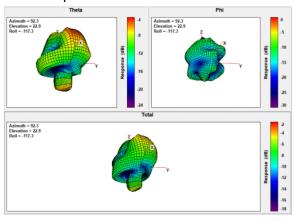

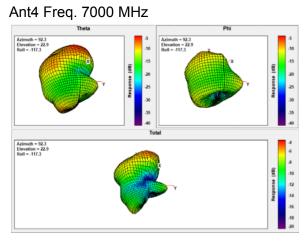


Ant3:


Ant3 Freq. 2.4 GHz:

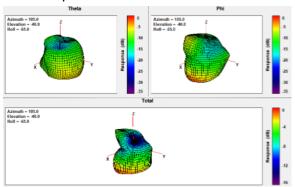


Ant3 Freq. 5500 MHz:

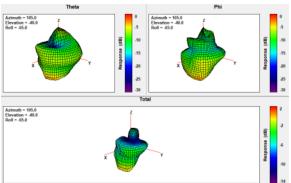


Ant3 Freq. 5180 MHz:

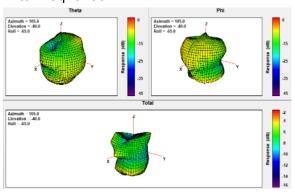

Ant3 Freq. 5820 MHz:

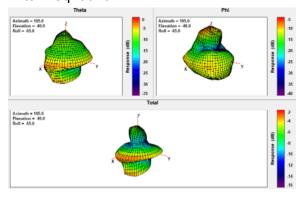

Ant3 Freq. 5280 MHz:

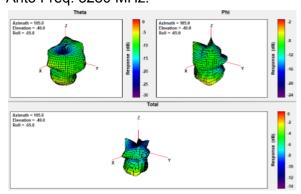

Ant3 Freq. 5887 MHz:

