

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC CFR47 PART 15 Section 15.249
REQUIREMENT**

OF

Product Name: Baby Audio Monitor

MODEL No.: CFH-BA10(Parent) / CFH-BA12(Parent)

Trademark: Kodak

FCC ID: A5JA10529

REPORT NO: ES151111024E

ISSUE DATE: December 05, 2015

Prepared for
Quadrant Technology(Shenzhen)Co., LTD
3rd floor,7TH building, Hongfa JiaTeLi Hi-Tech park of ShiXin Village,
Shiyan Town, Shenzhen City, Guangdong province, China

Prepared by
EMTEK (Shenzhen) Co., Ltd.
Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE


Applicant:	Quadrant Technology (Shenzhen) Co., LTD 3rd floor, 7TH building, Hongfa JiaTeLi Hi-Tech park of ShiXin Village, Shiyan Town, Shenzhen City, Guangdong province, China
Manufacturer:	Quadrant Technology (Shenzhen) Co., LTD 3rd floor, 7TH building, Hongfa JiaTeLi Hi-Tech park of ShiXin Village, Shiyan Town, Shenzhen City, Guangdong province, China
Product Description:	Baby Audio Monitor
Model Number:	CFH-BA10(Parent) / CFH-BA12(Parent) These models are identical in circuitry and electrical, mechanical and physical construction; the only difference is the color. for trading purpose. We prepare CFH-BA10(Parent) for test, and the worst result recorded in the report.
Date of Test:	November 12, 2015 to December 05, 2015


We hereby certify that:

The above equipment was tested by EMTEK (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.249.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : November 12, 2015 to December 05, 2015

Prepared by : 
Yaping Shen/Editor

Reviewer : 
Joe Xia/Supervisor


Approve & Authorized Signer : 
Lisa Wang/Manager

Table of Contents

1.	GENERAL INFORMATION	4
1.1.	PRODUCT DESCRIPTION	4
1.2.	RELATED SUBMITTAL(S) / GRANT (S)	5
1.3.	TEST METHODOLOGY	5
1.4.	SPECIAL ACCESSORIES	5
1.5.	EQUIPMENT MODIFICATIONS	5
1.6.	MEASUREMENT UNCERTAINTY	6
1.7.	TEST FACILITY	6
2.	SYSTEM TEST CONFIGURATION	7
2.1.	EUT CONFIGURATION	7
2.2.	EUT EXERCISE	7
2.3.	TEST PROCEDURE	7
2.4.	DESCRIPTION OF TEST MODES	7
2.5.	SUPPORT EQUIPMENT	7
3.	SUMMARY OF TEST RESULTS	8
4.	RADIATED EMISSION TEST	9
4.1.	MEASUREMENT PROCEDURE	9
4.2.	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	10
5.3	MEASUREMENT EQUIPMENT USED:	11
5.4	RADIATED EMISSION LIMIT	11
5.5	MEASUREMENT RESULT	13
5.	PERIODIC OPERATION	25
6.	BANDWIDTH TEST	26
6.1.	MEASUREMENT PROCEDURE	26
6.2.	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
6.3.	MEASUREMENT EQUIPMENT USED:	26
6.4.	MEASUREMENT RESULTS:	26
7.	BAND EDGE TEST	28
7.1.	MEASUREMENT PROCEDURE	28
7.2.	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	28
7.3.	MEASUREMENT EQUIPMENT USED:	28
7.4.	MEASUREMENT RESULTS:	28
8.	CONDUCTED EMISSION TEST	31
8.1.	APPLICABLE STANDARD	31
8.2.	CONFORMANCE LIMIT	31
8.3.	TEST CONFIGURATION	31
8.4.	TEST PROCEDURE	31
8.5.	TEST RESULTS	31
9.	ANTENNA APPLICATION	34
9.1.	ANTENNA REQUIREMENT	34
9.2.	RESULT	34
10.	APPENDIX I (PHOTOS OF SETUP)	35
11.	APPENDIX II (PHOTOS OF EUT)	37

1. GENERAL INFORMATION

1.1. Product Description

Product information:	
Power supply:	DC 5V by Adapter or DC 3.6V by battery
Adapter:	Model: S006AKU0500100 Input: AC 100-240V 200mA Output: DC 5V 1000mA
Operating Frequency Range:	906-924MHz
Channel Spacing	3MHz
Modulation:	FSK
Number of Channels:	7 channels
Antenna Type:	PCB Antenna
Antenna Gain:	0.5 dBi
Temperature Range:	-10°C ~ +55°C

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: A5JA10529 filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

1.3. Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Special Accessories

Not available for this EUT intended for grant.

1.5. Equipment Modifications

Not available for this EUT intended for grant.

1.6. Measurement Uncertainty

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.00dB
Fundamental Fieldstrength	Not Applicable	95%	±2.94dB
Transmitter 20 dB Bandwidth	Not Applicable	95%	±0.92PPm
Radiated Spurious Emissions	30 MHz to 40 GHz	95%	±3.00dB

1.7. Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen, 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Name of Firm

: Accredited by FCC, July 24, 2013
The Certificate Registration Number is 406365.

Site Location

: Accredited by FCC, April 17, 2013
The Certificate Registration Number is 709623.

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3. Test Procedure

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013

2.4. Description of test modes

The EUT has been tested under normal operating condition. Pre-scanned tests, X, Y, Z in the three orthogonal panels, were conducted to determine the final configuration from all possible combinations. Let EUT transmit with highest power, and the worst result was recorded with modulation FSK.

2.5. Support Equipment

SUPPORT EQUIPMENT						
No.	Equipment	Model	Serial No.	FCC ID	Trade name	Power Cord
1.	Baby Monitoring System	CFH-BA10(Base)	N/A	A5JA09529	Kodak	N/A

3. SUMMARY OF TEST RESULTS

FCC Part15, Subpart C		
Standard Section	Test Item	Result
FCC		
15.207	Conducted Emission	Pass
15.209 15.205 15.249	Radiated Emission	Pass
15.35(c)	Periodic Operation	Pass
15.249 15.209 15.205	Band edge test	Pass
15.249	20dB Bandwidth	Pass
15.203	Antenna Requirement	Pass

4. RADIATED EMISSION TEST

4.1. Measurement Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

30GHz-1GHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

4.2. Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

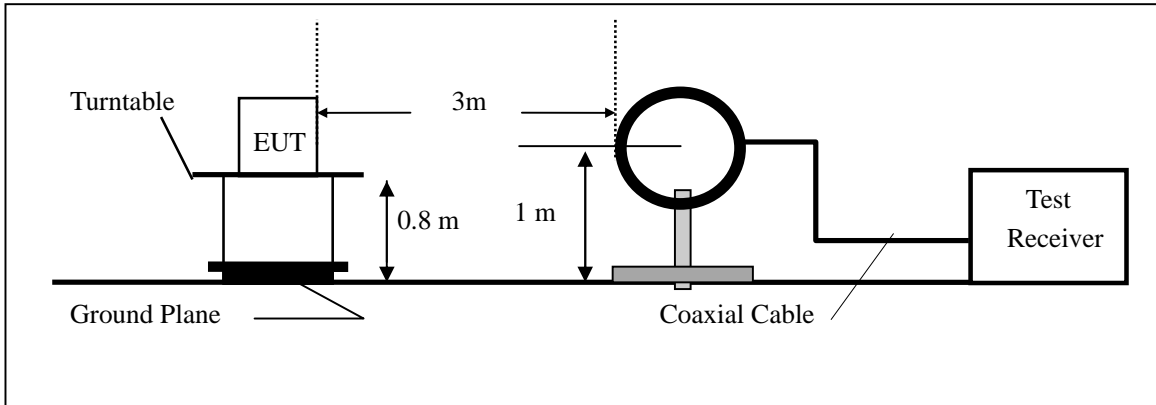

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

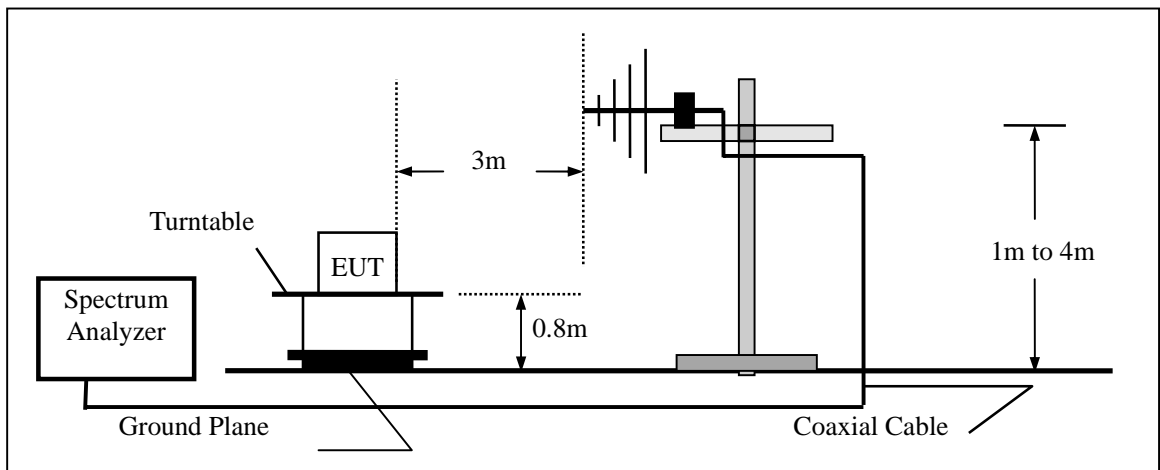

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

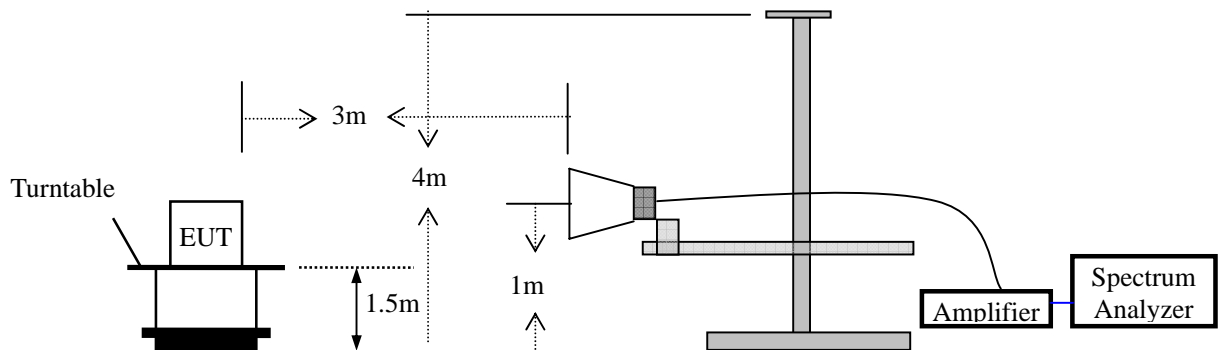

5.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	May 16, 2015	May 15, 2016
Spectrum Analyzer	HP	E4407B	839840481	May 16, 2015	May 15, 2016
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	May 16, 2015	May 15, 2016
Pre-Amplifier	HP	8447D	2944A07999	May 16, 2015	May 15, 2016
Bilog Antenna	Schwarzbeck	VULB9163	142	May 16, 2015	May 15, 2016
Loop Antenna	ARA	PLA-1030/B	1029	May 16, 2015	May 15, 2016
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 16, 2015	May 15, 2016
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 16, 2015	May 15, 2016

5.4 Radiated Emission Limit

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

The fundamental limit comply with below 94dBuV/m at 3m, Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

Limits of radiated emission measurement (FCC 15.209)

FREQUENCY (MHz)	(dBuV/m) (at 3m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).

Limits of radiated emission measurement (FCC 15.249)

FCC Part15 (15.249) , Subpart C	
	Limit
Field strength of fundamental	50000uV/m (94 dBV/m) @ 3 m
Field strength of harmonics	500uV/m (54 dBV/m) @ 3 m

5.5 Measurement Result

Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	24℃	Test Date:	December 04, 2015
Humidity:	53 %	Test By:	KK
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

Operation Mode: 906MHz
 Frequency Range: 30~1000MHz
 Test Result: PASS
 Measured Distance: 3m
 Polarization: Horizontal

Test Date : December 04, 2015
 Temperature : 24°C
 Humidity : 55 %
 Test By: SYP

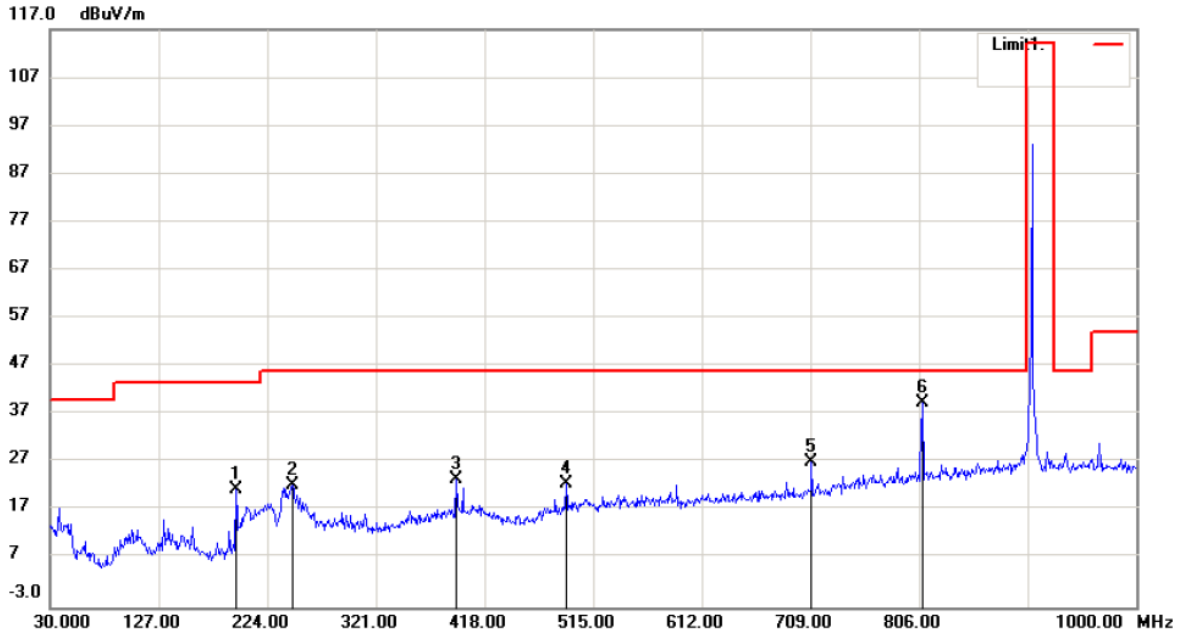

Mode: TX 906MHz

Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		195.8700	38.38	-16.93	21.45	43.50	-22.05	QP			
2		246.3100	35.70	-13.43	22.27	46.00	-23.73	QP			
3		392.7800	31.95	-8.52	23.43	46.00	-22.57	QP			
4		490.7500	30.05	-7.38	22.67	46.00	-23.33	QP			
5		709.9700	31.14	-3.93	27.21	46.00	-18.79	QP			
6	*	808.9100	40.48	-1.08	39.40	46.00	-6.60	QP			

*:Maximum data x:Over limit !:over margin

Operator: csl

Operation Mode: 906MHz
 Frequency Range: 30~1000MHz
 Test Result: PASS
 Measured Distance: 3m
 Polarization: Vertical

Test Date : December 04, 2015
 Temperature : 24°C
 Humidity : 55 %
 Test By: SYP

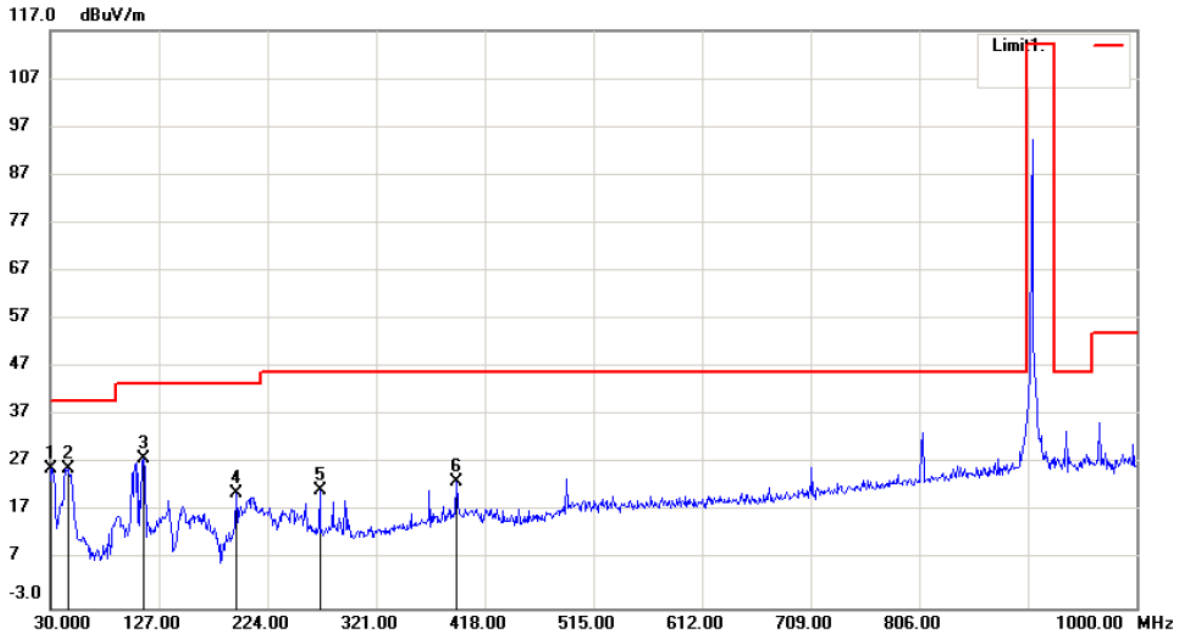

Mode:TX 906MHz

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.9700	40.83	-14.74	26.09	40.00	-13.91	QP			
2		45.5200	38.65	-12.57	26.08	40.00	-13.92	QP			
3		113.4200	43.37	-15.35	28.02	43.50	-15.48	QP			
4		195.8700	37.68	-16.93	20.75	43.50	-22.75	QP			
5		270.5600	34.05	-12.65	21.40	46.00	-24.60	QP			
6		392.7800	31.65	-8.52	23.13	46.00	-22.87	QP			

*:Maximum data x:Over limit !:over margin

Operator: csl

Operation Mode: 915MHz Test Date : December 04, 2015
 Frequency Range: 30~1000MHz Temperature : 24°C
 Test Result: PASS Humidity : 55 %
 Measured Distance: 3m Test By: SYP
 Polarization: Horizontal



Mode:TX 915MHz


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		37.7600	32.47	-12.90	19.57	40.00	-20.43	QP			
2		195.8700	37.97	-16.93	21.04	43.50	-22.46	QP			
3		392.7800	32.46	-8.52	23.94	46.00	-22.06	QP			
4		490.7500	32.88	-7.38	25.50	46.00	-20.50	QP			
5		719.6700	32.62	-3.65	28.97	46.00	-17.03	QP			
6	*	817.6400	40.10	-0.90	39.20	46.00	-6.80	QP			

*:Maximum data x:Over limit !:over margin

Operator: csl

Operation Mode: 915MHz Test Date : December 04, 2015
 Frequency Range: 30~1000MHz Temperature : 24°C
 Test Result: PASS Humidity : 55 %
 Measured Distance: 3m Test By: SYP
 Polarization: Vertical

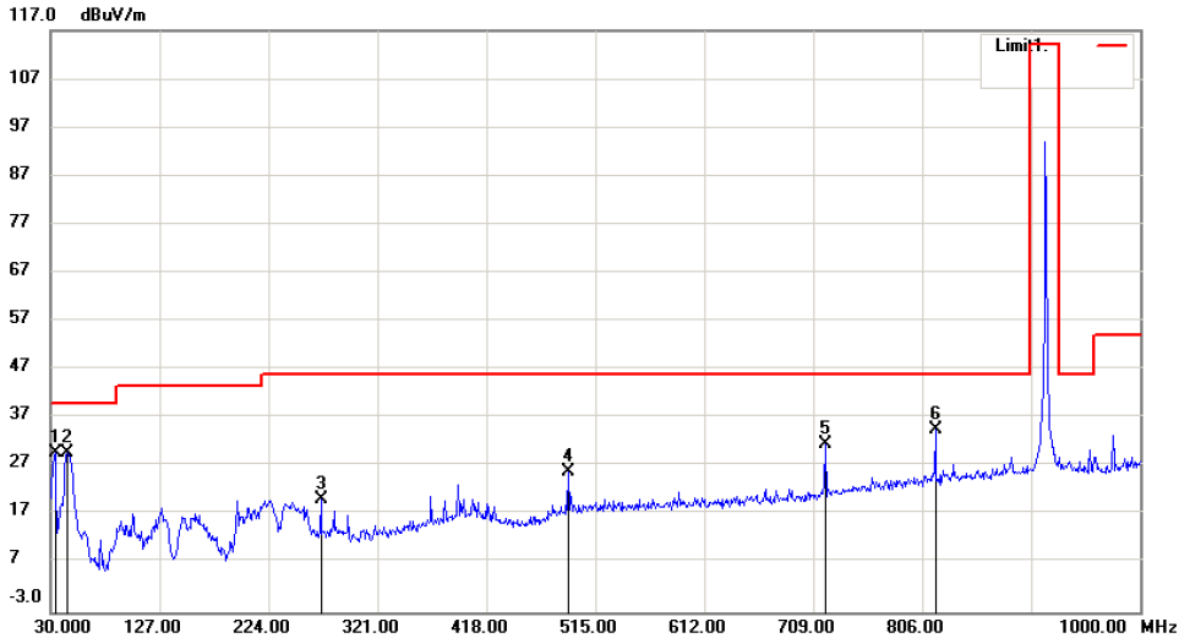

Mode:TX 915MHz

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	33.8800	43.91	-14.04	29.87	40.00	-10.13	QP		
2		44.5500	42.34	-12.51	29.83	40.00	-10.17	QP		
3		270.5600	32.79	-12.65	20.14	46.00	-25.86	QP		
4		490.7500	33.27	-7.38	25.89	46.00	-20.11	QP		
5		719.6700	35.28	-3.65	31.63	46.00	-14.37	QP		
6		817.6400	35.59	-0.90	34.69	46.00	-11.31	QP		

*:Maximum data x:Over limit !:over margin

Operator: csl

Operation Mode: 924MHz
 Frequency Range: 30~1000MHz
 Test Result: PASS
 Measured Distance: 3m
 Polarization: Horizontal

Test Date : December 04, 2015
 Temperature : 24°C
 Humidity : 55 %
 Test By: SYP

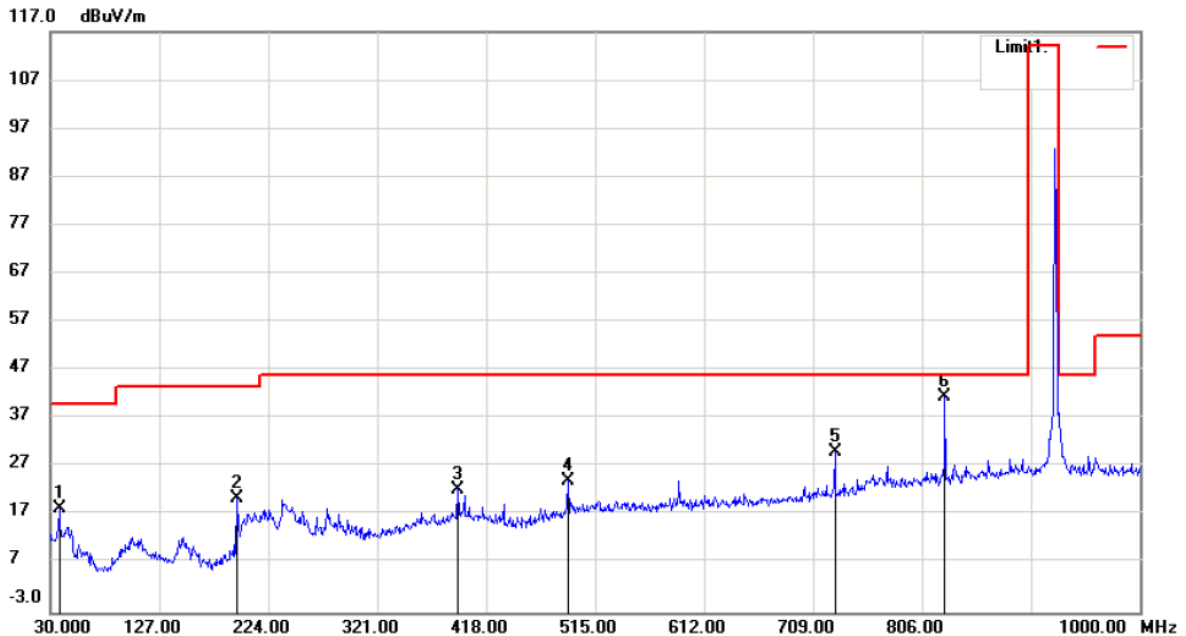

Mode: TX 924MHz

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		37.7600	31.26	-12.90	18.36	40.00	-21.64	QP			
2		195.8700	37.49	-16.93	20.56	43.50	-22.94	QP			
3		392.7800	31.02	-8.52	22.50	46.00	-23.50	QP			
4		490.7500	31.43	-7.38	24.05	46.00	-21.95	QP			
5		728.4000	33.54	-3.39	30.15	46.00	-15.85	QP			
6	*	826.3700	42.38	-0.71	41.67	46.00	-4.33	QP			

*:Maximum data x:Over limit !:over margin

Operator: csl

Operation Mode: 924MHz
 Frequency Range: 30~1000MHz
 Test Result: PASS
 Measured Distance: 3m
 Polarization: Vertical

Test Date : December 04, 2015
 Temperature : 24°C
 Humidity : 55 %
 Test By: SYP



Mode:TX 924MHz

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		32.9100	43.46	-14.28	29.18	40.00	-10.82	QP			
2		46.4900	43.56	-12.64	30.92	40.00	-9.08	QP			
3		226.9100	35.78	-14.97	20.81	46.00	-25.19	QP			
4		392.7800	31.37	-8.52	22.85	46.00	-23.15	QP			
5		728.4000	33.07	-3.39	29.68	46.00	-16.32	QP			
6	*	826.3700	38.07	-0.71	37.36	46.00	-8.64	QP			

*:Maximum data x:Over limit !:over margin

Operator: csl

Operation Mode: 906MHz Test Date : December 04, 2015
 Frequency Range: 1-10GHz Temperature : 24°C
 Test Result: PASS Humidity : 55 %
 Measured Distance: 3m Test By: SYP

Freq. (MHz)	Ant.Pol. H/V	Emission Level			Limit at 3m		Margin	
		PK (dBUV/m)	AV Factor (dB)	AV (dBUV/m)	PK (dBUV/m)	AV (dBUV/m)	PK (dB)	AV (dB)
1812.00	V	55.42	-16.4	39.02	74.00	54.00	-18.58	-14.98
3058.00	V	50.02	-16.4	33.62	74.00	54.00	-23.98	-20.38
3976.00	V	59.38	-16.4	42.98	74.00	54.00	-14.62	-11.02
5353.00	V	51.05	-16.4	34.65	74.00	54.00	-22.95	-19.35
7612.00	V	54.12	-16.4	37.72	74.00	54.00	-19.88	-16.28
8917.00	V	53.69	-16.4	37.29	74.00	54.00	-20.31	-16.71
1249.00	H	45.63	-16.4	29.23	74.00	54.00	-28.37	-24.77
2149.00	H	61.21	-16.4	44.81	74.00	54.00	-12.79	-9.19
3067.20	H	53.35	-16.4	36.95	74.00	54.00	-20.65	-17.05
3976.60	H	54.80	-16.4	38.40	74.00	54.00	-19.20	-15.60
5983.00	H	52.22	-16.4	35.82	74.00	54.00	-21.78	-18.18
7612.00	H	54.93	-16.4	38.53	74.00	54.00	-19.07	-15.47

Operation Mode: 915MHz Test Date : December 04, 2015
 Frequency Range: 1-10GHz Temperature : 24°C
 Test Result: PASS Humidity : 55 %
 Measured Distance: 3m Test By: SYP

Freq. (MHz)	Ant.Pol. H/V	Emission Level			Limit at 3m		Margin	
		PK (dBUV/m)	AV Factor (dB)	AV (dBUV/m)	PK (dBUV/m)	AV (dBUV/m)	PK (dB)	AV (dB)
2027.28	V	56.71	-16.4	40.31	74.00	54.00	-17.29	-13.69
2936.00	V	51.31	-16.4	34.91	74.00	54.00	-22.69	-19.09
3854.00	V	60.67	-16.4	44.27	74.00	54.00	-13.33	-9.73
5231.15	V	52.34	-16.4	35.94	74.00	54.00	-21.66	-18.06
7490.00	V	55.41	-16.4	39.01	74.00	54.00	-18.59	-14.99
8795.00	V	54.98	-16.4	38.58	74.00	54.00	-19.02	-15.42
1127.39	H	46.92	-16.4	30.52	74.00	54.00	-27.08	-23.48
2027.00	H	62.50	-16.4	46.10	74.00	54.00	-11.50	-7.90
2945.22	H	54.64	-16.4	38.24	74.00	54.00	-19.36	-15.76
3854.62	H	56.09	-16.4	39.69	74.00	54.00	-17.91	-14.31
5861.42	H	53.51	-16.4	37.11	74.00	54.00	-20.49	-16.89
7490.00	H	56.22	-16.4	39.82	74.00	54.00	-17.78	-14.18

Operation Mode: 924MHz Test Date : December 04, 2015
 Frequency Range: 1-10GHz Temperature : 24°C
 Test Result: PASS Humidity : 55 %
 Measured Distance: 3m Test By: SYP

Freq. (MHz)	Ant.Pol. H/V	Emission Level			Limit at 3m		Margin	
		PK (dBuV/m)	AV Factor (dB)	AV (dBuV/m)	PK (dBuV/m)	AV (dBuV/m)	PK (dB)	AV (dB)
1944.00	V	54.34	-16.4	37.94	74.00	54.00	-19.66	-16.06
2853.00	V	49.05	-16.4	32.65	74.00	54.00	-24.95	-21.35
3771.00	V	58.41	-16.4	42.01	74.00	54.00	-15.59	-11.99
5148.00	V	50.08	-16.4	33.68	74.00	54.00	-23.92	-20.32
7407.00	V	53.15	-16.4	36.75	74.00	54.00	-20.85	-17.25
8712.00	V	52.72	-16.4	36.32	74.00	54.00	-21.28	-17.68
1044.00	H	44.66	-16.4	28.26	74.00	54.00	-29.34	-25.74
1944.00	H	60.24	-16.4	43.84	74.00	54.00	-13.76	-10.16
2862.00	H	52.38	-16.4	35.98	74.00	54.00	-21.62	-18.02
3771.00	H	53.83	-16.4	37.43	74.00	54.00	-20.17	-16.57
5778.00	H	51.25	-16.4	34.85	74.00	54.00	-22.75	-19.15
7407.00	H	53.96	-16.4	37.56	74.00	54.00	-20.04	-16.44


Note: (1) All Readings are Peak Value.
 (2) AV Value= Peak Value+AV factor(AV factor= -16.4 from section 5)
 (3) Emission Level= Reading Level+Probe Factor +Cable Loss

Transmitter Fundamental Field Strength


Operation Mode: 906 MHz
 FCC Part: 15.249(a)
 Test Result: PASS
 Measured Distance: 3m

Test Date : December 04, 2015
 Temperature : 24°C
 Humidity : 55 %
 Test By: SYP

V:

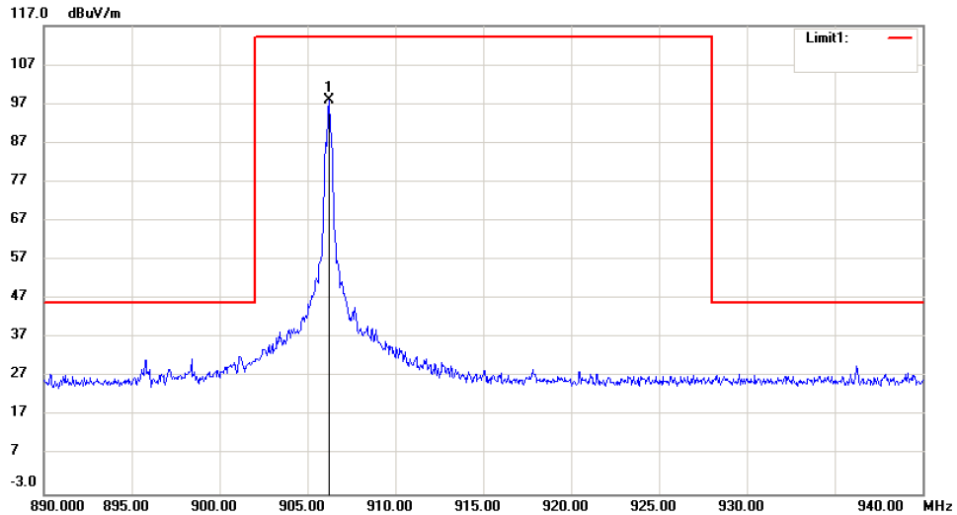

H:

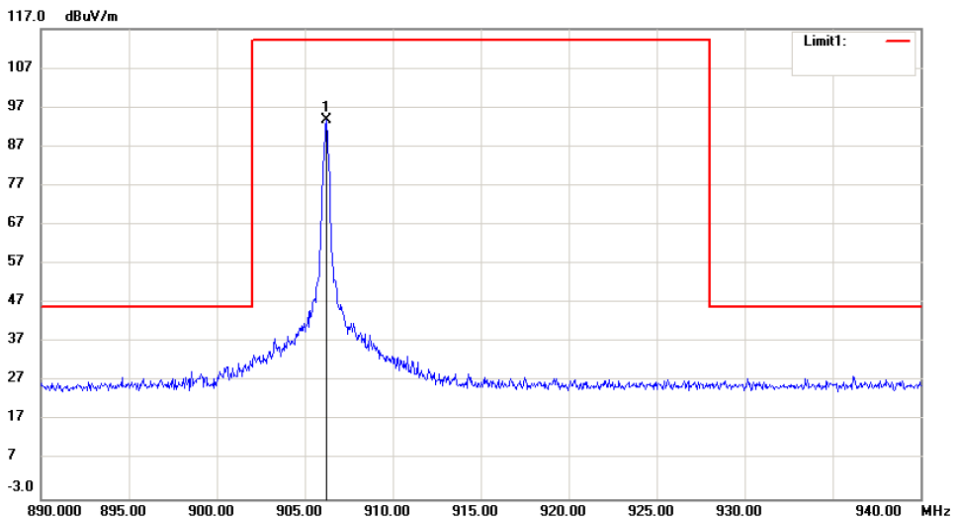


Freq. (MHz)	Ant. Pol. H/V	Emission Level			Limit at 3m		Margin	
		PK (dBuV/m)	AV Factor (dB)	AV (dBuV/m)	PK (dBuV/m)	AV (dBuV/m)	PK (dB)	AV (dB)
906	V	97.99	-16.4	81.59	114	94	-16.01	-12.41
906	H	93.68	-16.4	77.28	114	94	-20.32	-16.72

- Note:**
- (1) All Readings are Peak Value.
 - (2) AV Value= Peak Value+AV factor(AV factor= -16.4 from section 5)
 - (3) Emission Level= Reading Level+Probe Factor +Cable Loss


Operation Mode: 915 MHz
 FCC Part: 15.249(a)
 Test Result: PASS
 Measured Distance: 3m

Test Date : December 04, 2015
 Temperature : 24 °C
 Humidity : 55 %
 Test By: SYP

V:

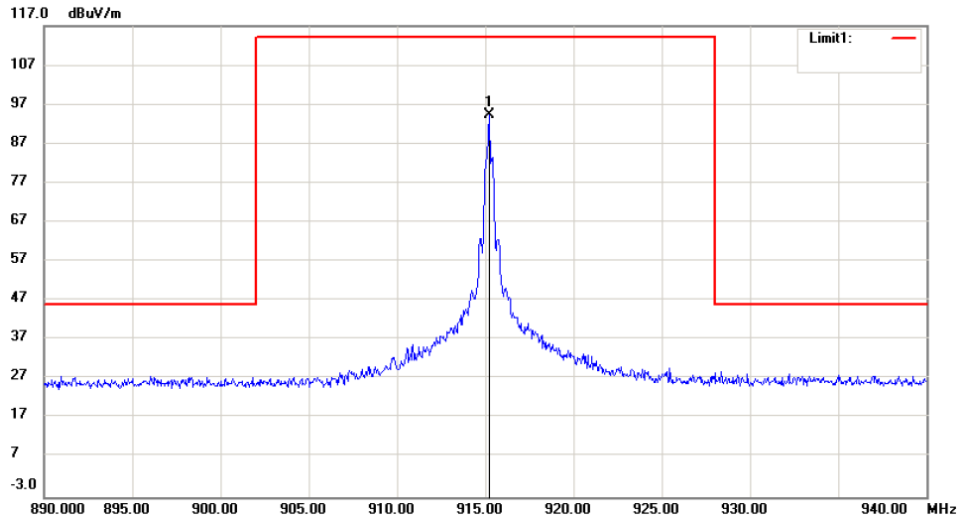

H:

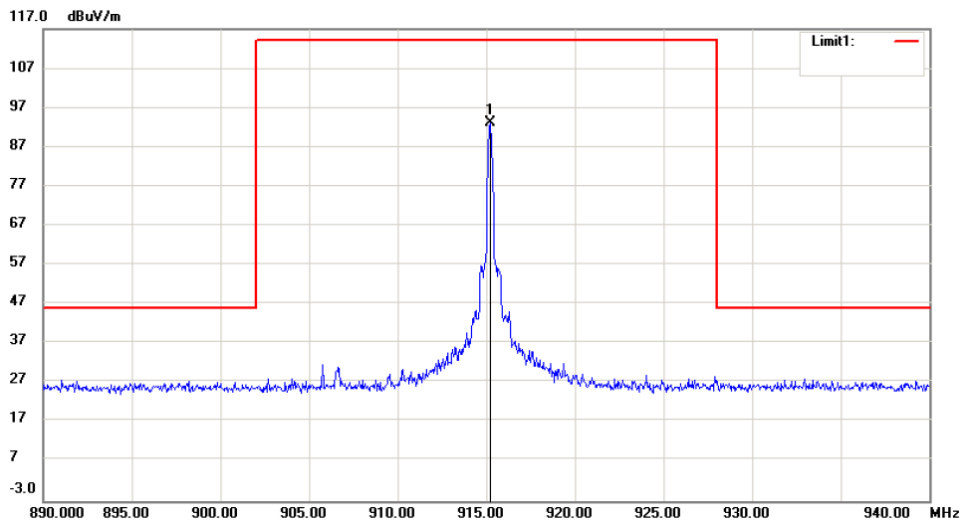


Freq. (MHz)	Ant. Pol. H/V	Emission Level			Limit at 3m		Margin	
		PK (dBuV/m)	AV Factor (dB)	AV (dBuV/m)	PK (dBuV/m)	AV (dBuV/m)	PK (dB)	AV (dB)
915	V	94.32	-16.4	77.92	114	94	-19.68	-16.08
915	H	93.14	-16.4	76.74	114	94	-20.86	-17.26

Note: (1) All Readings are Peak Value.
 (2) AV Value= Peak Value+AV factor(AV factor= -16.4 from section 5)
 (3) Emission Level= Reading Level+Probe Factor +Cable Loss


Operation Mode: 924 MHz
 FCC Part: 15.249(a)
 Test Result: PASS
 Measured Distance: 3m

Test Date : December 04, 2015
 Temperature : 24°C
 Humidity : 55 %
 Test By: SYP

V:

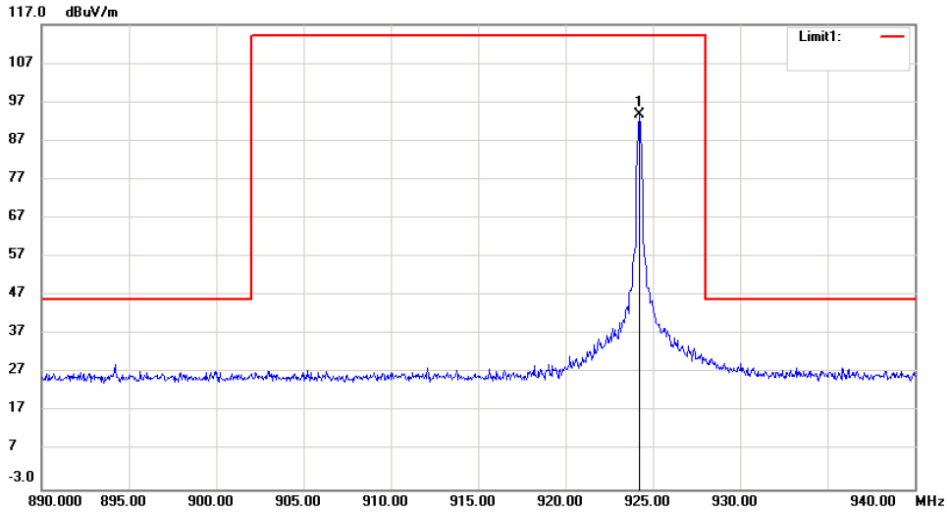

H:

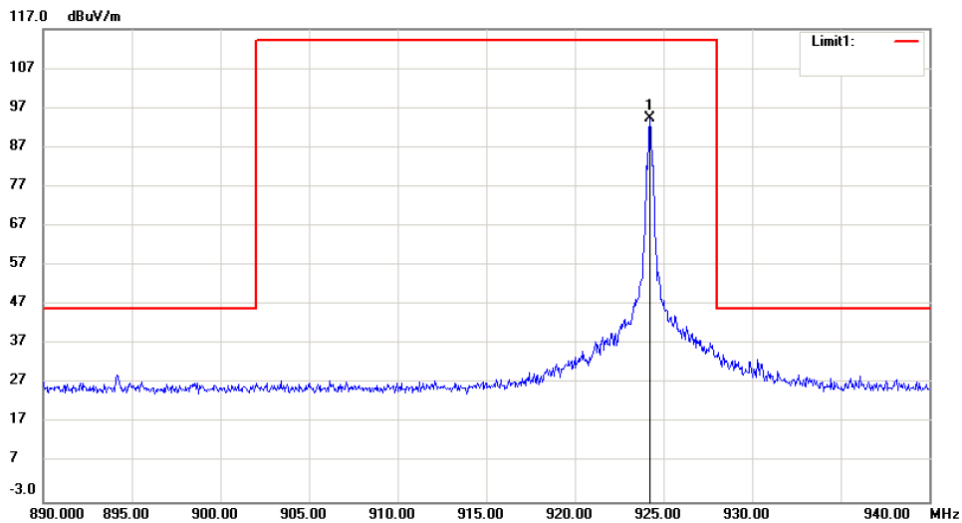

Freq. (MHz)	Ant.Pol. H/V	Emission Level			Limit at 3m		Margin	
		PK (dBuV/m)	AV Factor (dB)	AV (dBuV/m)	PK (dBuV/m)	AV (dBuV/m)	PK (dB)	AV (dB)
924	V	93.67	-16.4	77.27	114	94	-20.33	-16.73
924	H	94.36	-16.4	77.96	114	94	-19.64	-16.04

Note: (1) All Readings are Peak Value.
 (2) AV Value= Peak Value+AV factor(AV factor= -16.4 from section 5)
 (3) Emission Level= Reading Level+Probe Factor +Cable Loss

5. Periodic Operation

The duty cycle was determined by the following equation:


To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

$$\text{Duty Cycle(\%)} = \frac{\text{Total On interval in a complete pulse train}}{\text{Length of a complete pulse train}} * \%$$

$$\text{Duty Cycle Correction Factor(dB)} = 20 * \text{Log}_{10}(\text{Duty Cycle(\%)})$$

Total transmission time(ms)	20.5
Length of a complete transmission period(ms)	3.1
Duty Cycle(%)	15.12
Duty Cycle Correction Factor(dB)	-16.4

Refer to the duty cycle plot (as below), This device meets the FCC requirement.
Length of a complete pulse train:

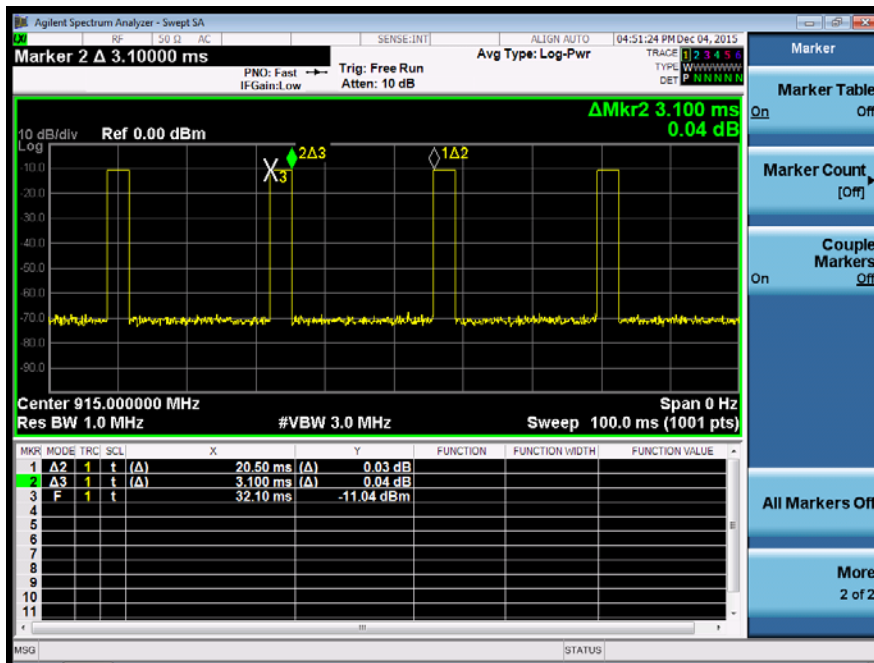


6. BANDWIDTH TEST

6.1. Measurement Procedure

The EUT was operating in normal mode. Printed out the test result from the spectrum by hard copy function.

6.2. Test SET-UP (Block Diagram of Configuration)



6.3. Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2015	05/15/2016

6.4. Measurement Results:

Test By:	SYP	Test Date:	December 04, 2015
Temperature:	24°C	Humidity:	55 %
Modulation:	FSK		

Channel frequency (MHz)	20dB Down BW(kHz)
906	151.5
915	152.0
924	151.7



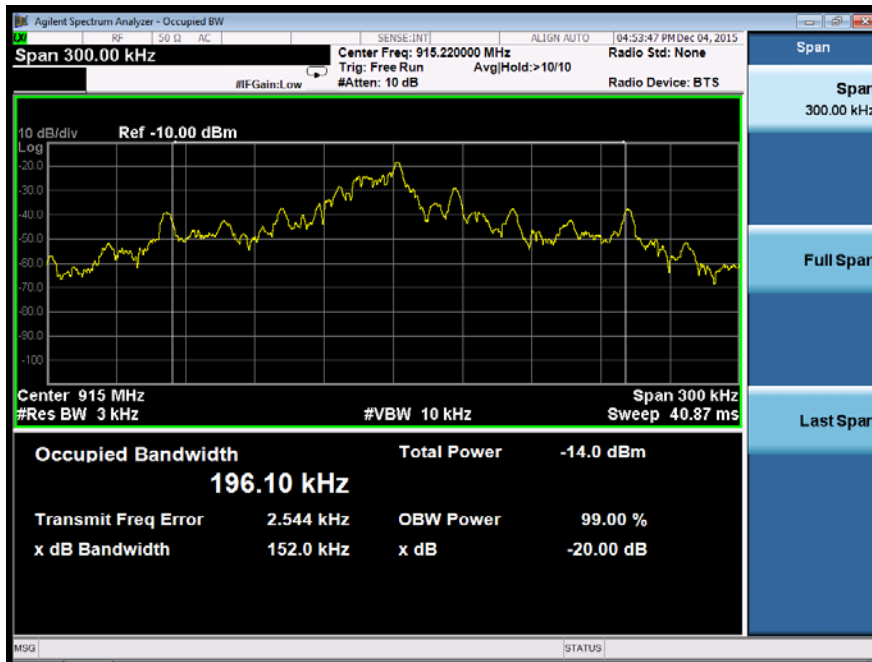

7. BAND EDGE TEST

7.1. Measurement Procedure

1. The EUT was Operating in normal mode. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 1.5 m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

7.2. Test SET-UP (Block Diagram of Configuration)

As 5.2 Test set up (B) and (C)


7.3. Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.


7.4. Measurement Results:

TX 906MHz

V:

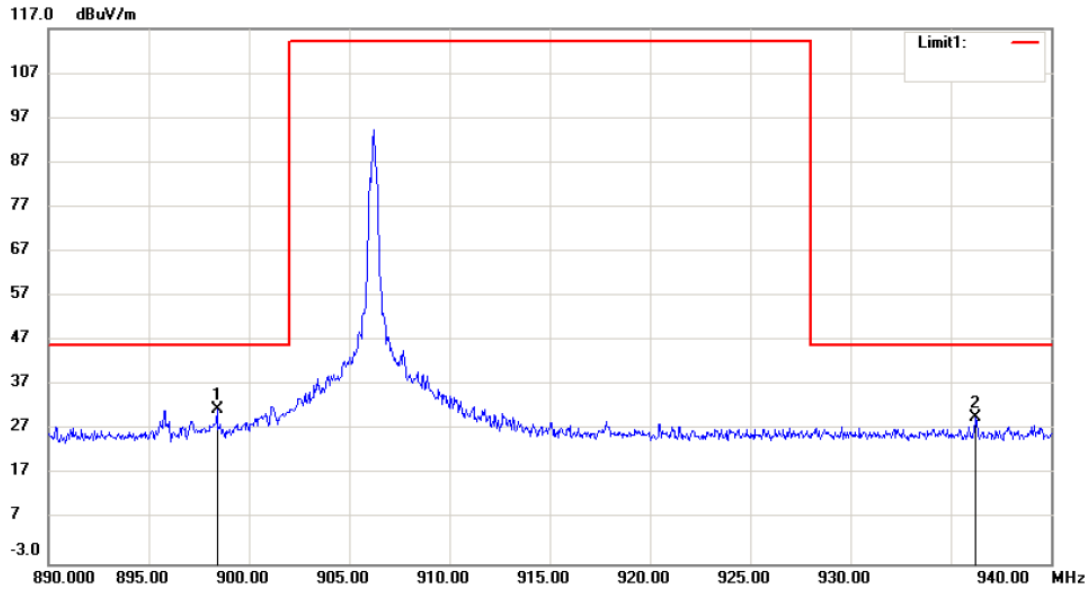


H:

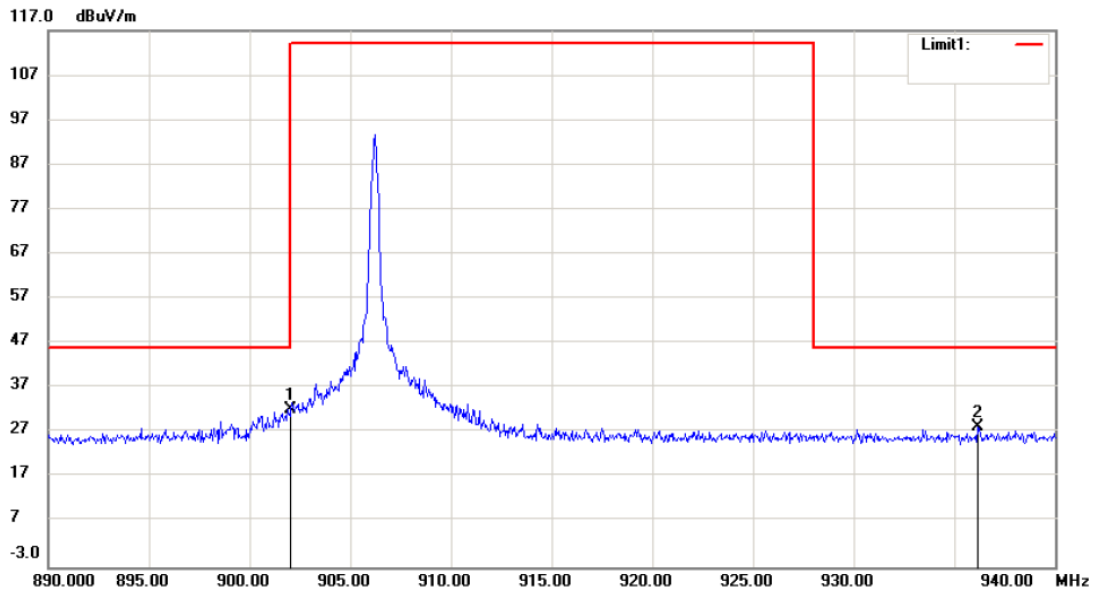


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Result
898.40	V	31.52	46	-14.48	Pass
936.25	V	29.73	46	-16.27	Pass
902.00	H	32.25	46	-13.75	Pass
936.15	H	28.38	46	-17.62	Pass

TX 924MHz

V:

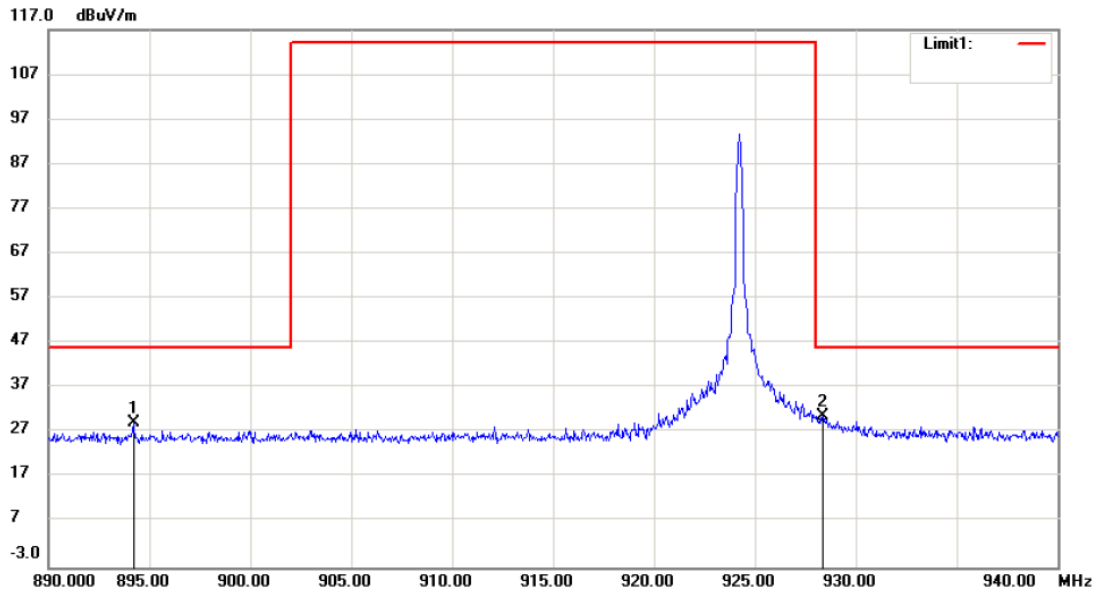

H:

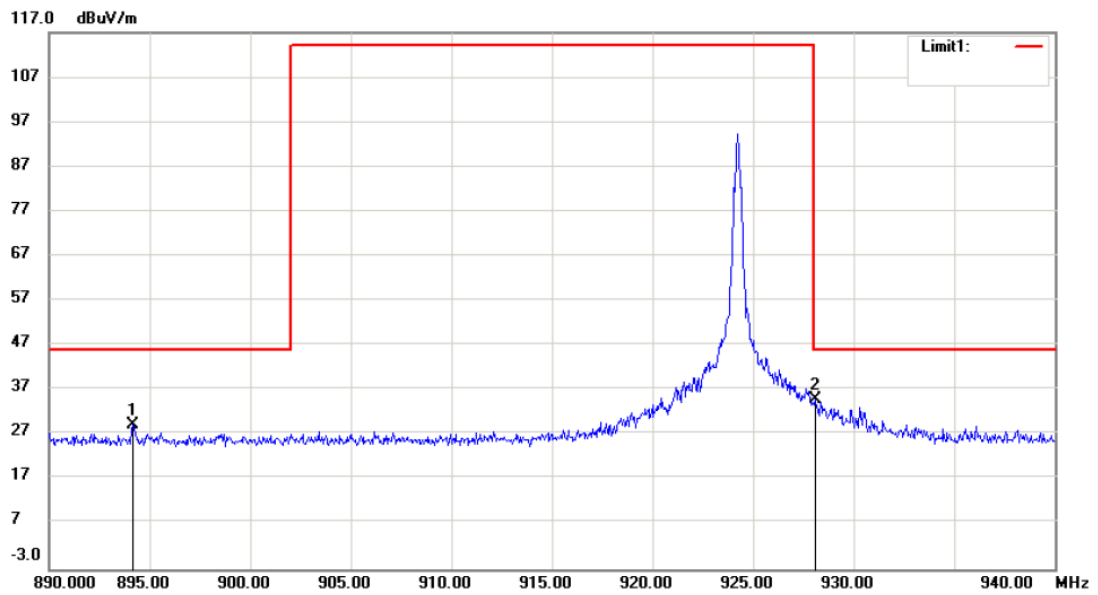

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit at 3m (dBuV/m)	Margin (dB)	Result
894.20	V	29.28	46	-16.72	Pass
928.35	V	30.85	46	-15.15	Pass
894.15	H	29.32	46	-16.68	Pass
928.10	H	35.03	46	-10.97	Pass

8. CONDUCTED EMISSION TEST

8.1. Applicable Standard

According to FCC Part 15.207(a)

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2015	05/15/2016
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2015	05/15/2016
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	05/15/2016
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2015	05/15/2016

8.2. Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


8.3. Test Configuration

Test according to clause 7.3 conducted emission test setup

8.4. Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Repeat above procedures until all frequency measured were complete.


8.5. Test Results

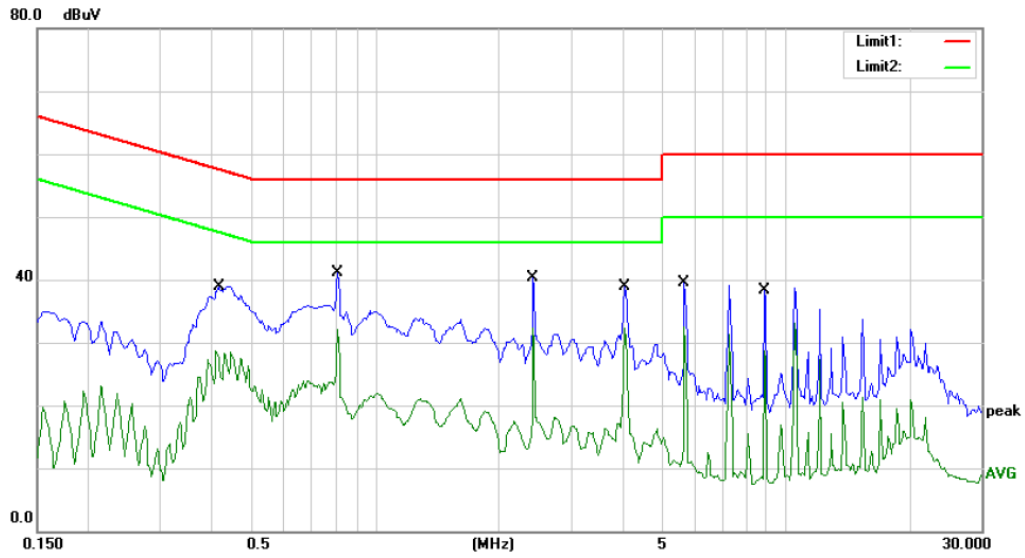

Site Conduction #1 Phase: **L1** Temperature: 26
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: ON
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.4150	38.93	0.00	38.93	57.55	-18.62	QP	
2	0.4150	28.67	0.00	28.67	47.55	-18.88	AVG	
3	0.8100	41.09	0.00	41.09	56.00	-14.91	QP	
4	0.8100	32.18	0.00	32.18	46.00	-13.82	AVG	
5	2.4300	40.32	0.00	40.32	56.00	-15.68	QP	
6	2.4300	32.30	0.00	32.30	46.00	-13.70	AVG	
7	4.0600	38.82	0.00	38.82	56.00	-17.18	QP	
8 *	4.0600	32.40	0.00	32.40	46.00	-13.60	AVG	
9	5.6700	39.58	0.00	39.58	60.00	-20.42	QP	
10	5.6700	32.52	0.00	32.52	50.00	-17.48	AVG	
11	8.9100	38.22	0.00	38.22	60.00	-21.78	QP	
12	8.9100	28.63	0.00	28.63	50.00	-21.37	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: WOLF

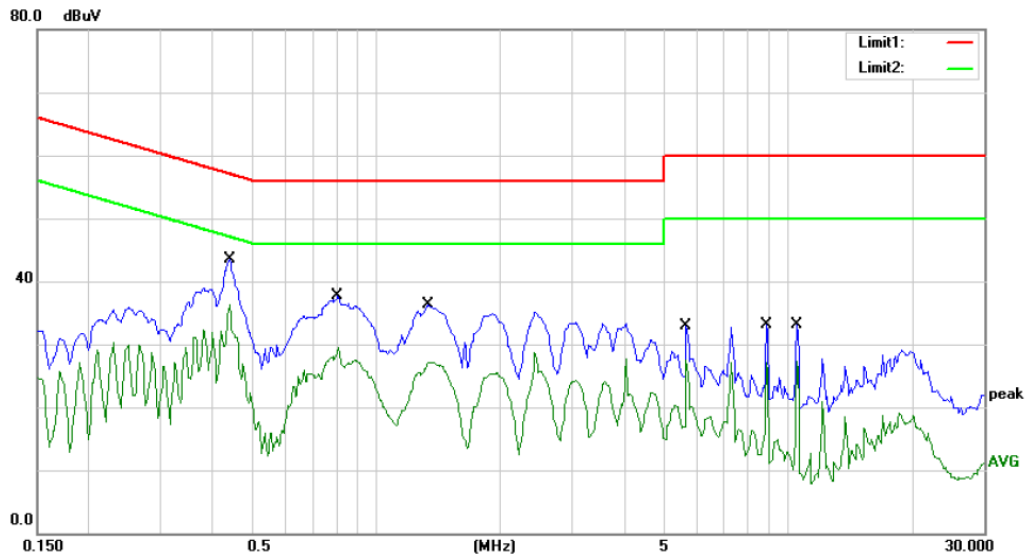

Site Conduction #1 Phase: **N** Temperature: 26
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: ON
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4400	43.42	0.00	43.42	57.06	-13.64	QP	
2	*	0.4400	36.28	0.00	36.28	47.06	-10.78	AVG	
3		0.8050	37.64	0.00	37.64	56.00	-18.36	QP	
4		0.8050	29.44	0.00	29.44	46.00	-16.56	AVG	
5		1.3350	36.23	0.00	36.23	56.00	-19.77	QP	
6		1.3350	27.17	0.00	27.17	46.00	-18.83	AVG	
7		5.6700	32.86	0.00	32.86	60.00	-27.14	QP	
8		5.6700	27.41	0.00	27.41	50.00	-22.59	AVG	
9		8.9100	33.06	0.00	33.06	60.00	-26.94	QP	
10		8.9100	27.03	0.00	27.03	50.00	-22.97	AVG	
11		10.5500	33.02	0.00	33.02	60.00	-26.98	QP	
12		10.5500	27.33	0.00	27.33	50.00	-22.67	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: WOLF

9. Antenna Application

9.1. Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


9.2. Result

The EUT has PCB Antenna, the gain is 0.5 dBi, which in accordance to section 15.203, please refer to the internal photos.

10. APPENDIX I (Photos of Setup)



Conducted Emission

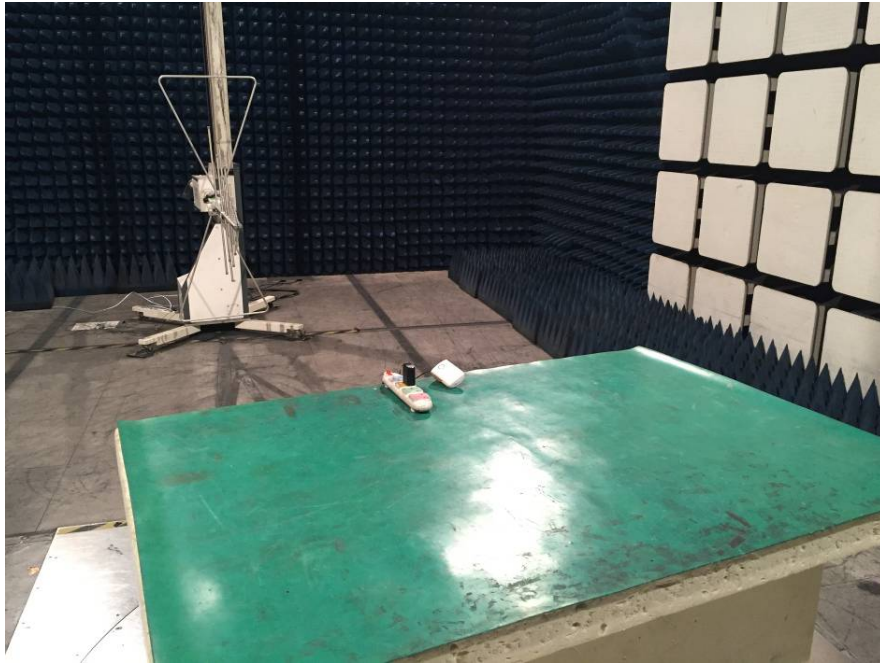

Radiated Emission



11. APPENDIX II (Photos of EUT)













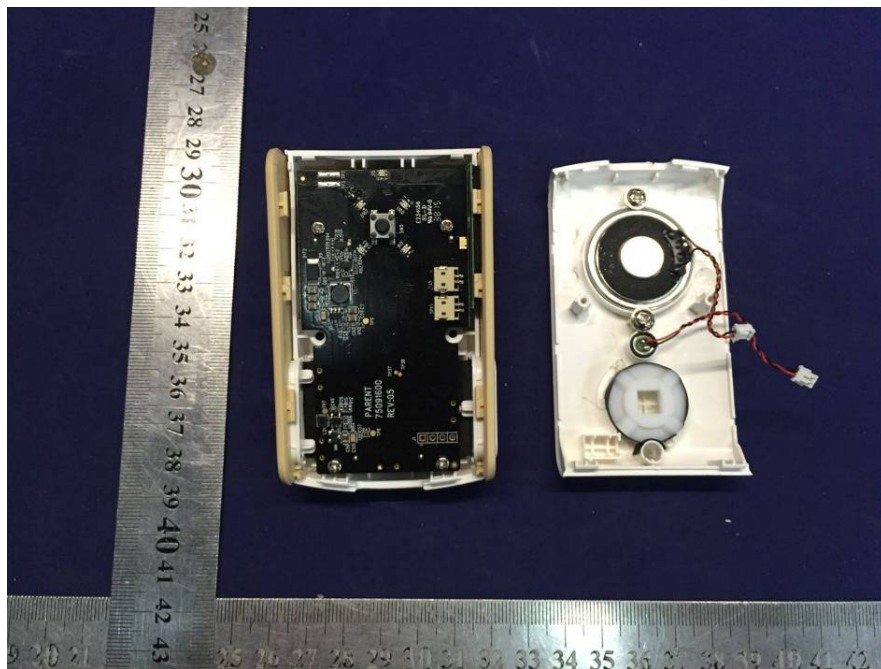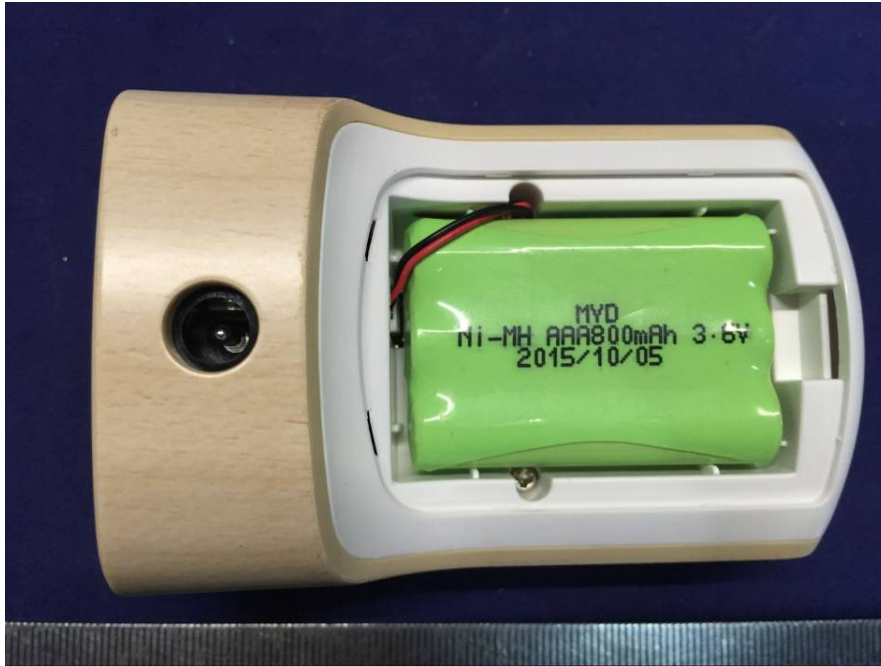

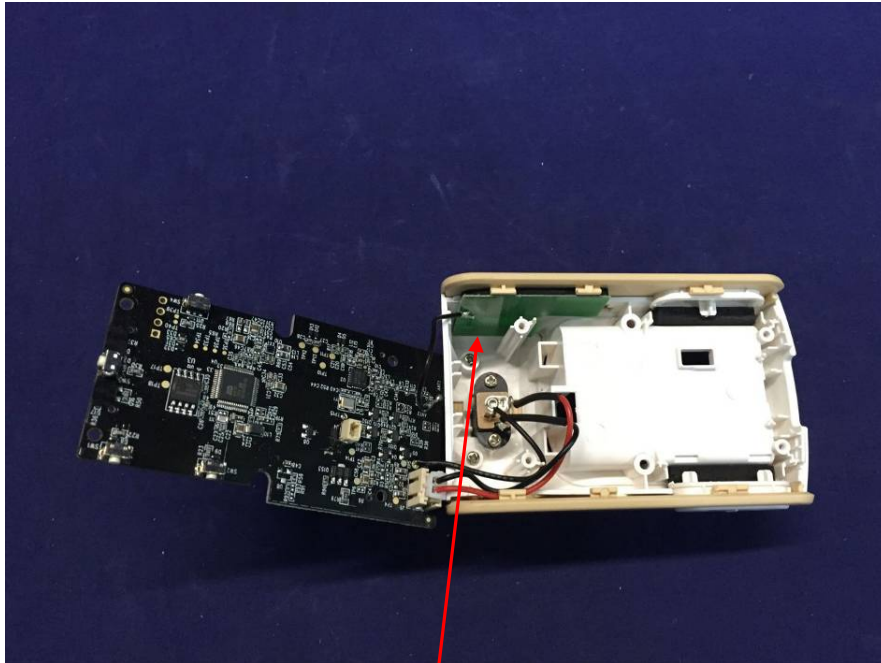


Antenna

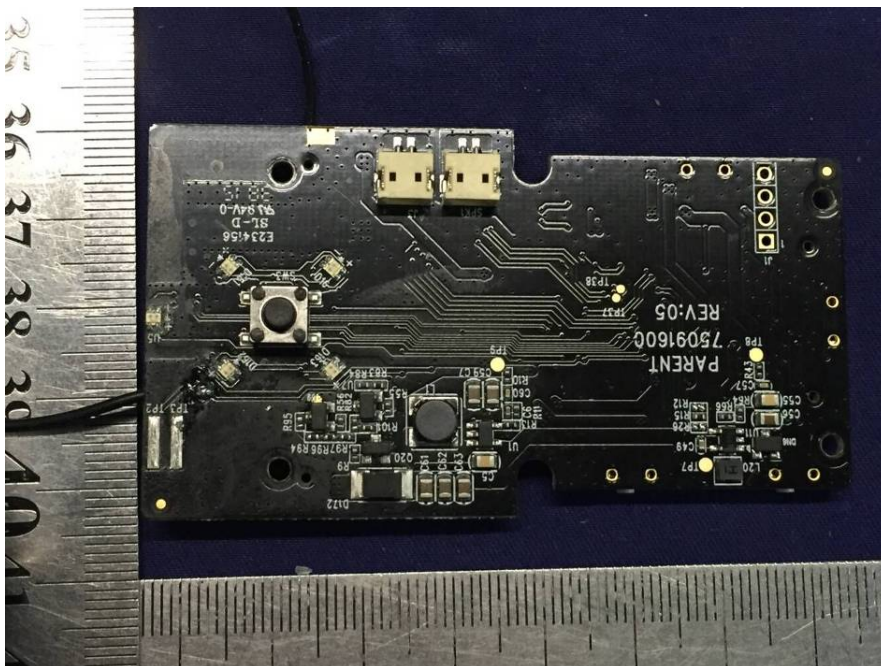

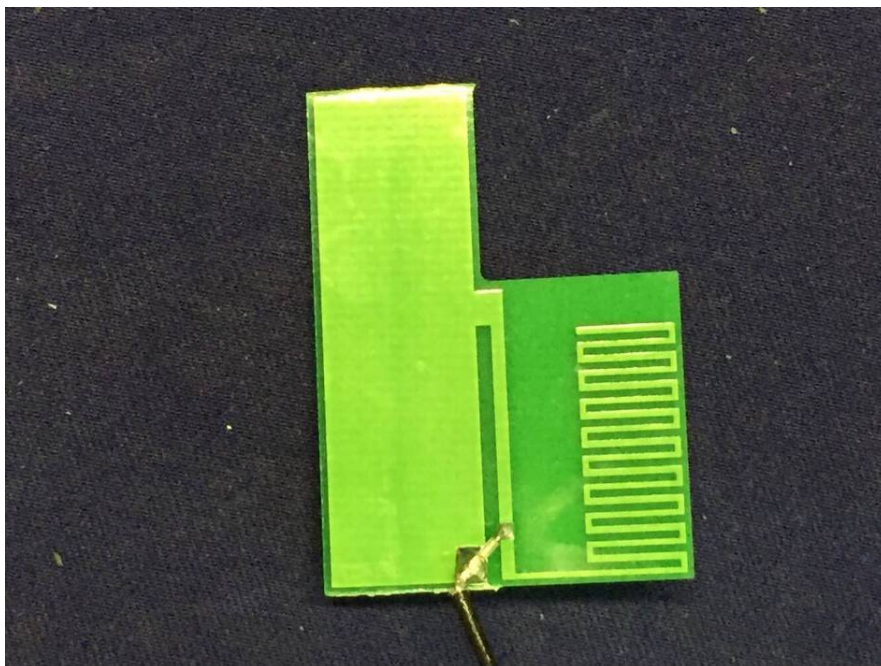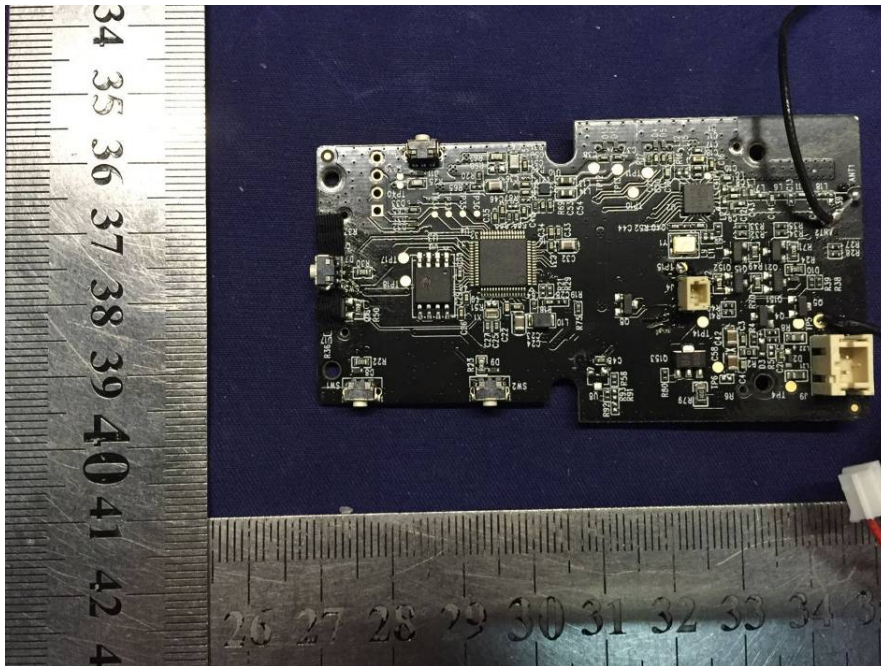

Antenna

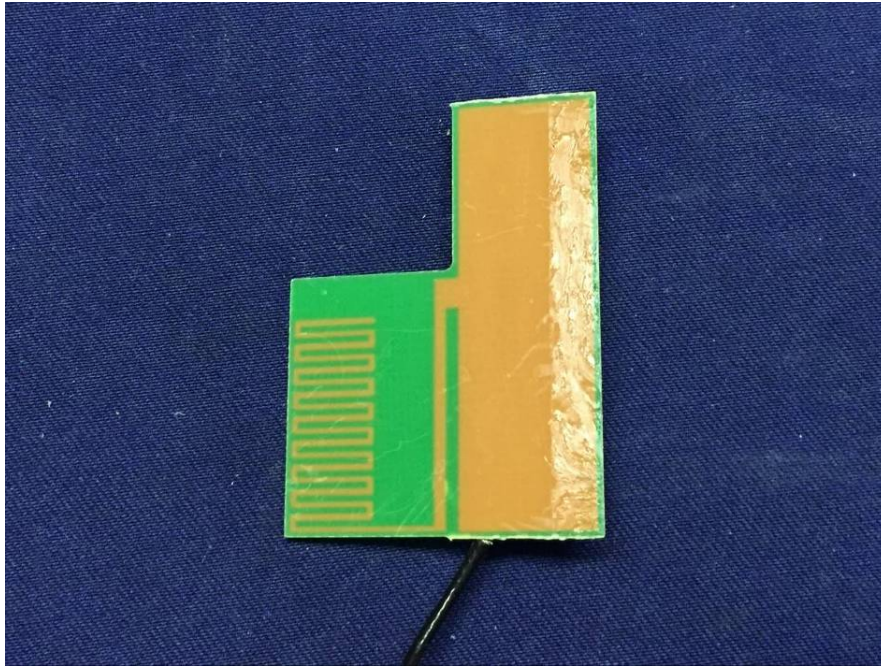

Antenna