



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



## MEASUREMENT REPORT FCC Part 22 & 24 / IC RSS-132/RSS-133

**Applicant Name:**

NEC Corporation of America  
Radio Communications Systems Division  
6535 N. State Highway 161  
Irving, TX 75039-2402 USA

**Date of Testing:**

11/23/2012

**Test Site/Location:**

PCTEST Lab., Columbia, MD, USA

**Test Report Serial No.:**

0Y1211211664.A98

**FCC ID:****A98-EKO8545****APPLICANT:****NEC CORPORATION OF AMERICA****Application Type:**

Certification

**Model(s):**

KMP7R4H1-4A

**EUT Type:**

Portable Handset

**FCC Classification:**

PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):**

§2; §22(H), §24(E)

**IC Specification(s):**

RSS-132 Issue 2; RSS-133 Issue 5

**Test Procedure(s):**

ANSI/TIA-603-C-2004, KDB 971168

**Test Device Serial No.:**

*identical prototype [S/N: 004401201080179]*

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
GSM850	824.2 - 848.8	243KGXW	1.205	30.81
GSM1900	1850.2 - 1909.8	245KGXW	0.729	28.63
WCDMA850	826.4 - 846.6	4M16F9W	0.147	21.67

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

  
\_\_\_\_\_  
Randy Ortanez  
President



FCC ID: A98-EKO8545		FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 1 of 55

## T A B L E   O F   C O N T E N T S

---

FCC PART 22 & 24 MEASUREMENT REPORT.....	3
1.0 INTRODUCTION .....	4
1.1 SCOPE .....	4
1.2 TESTING FACILITY.....	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION .....	5
2.2 DEVICE CAPABILITIES.....	5
2.3 TEST CONFIGURATION.....	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....	5
3.0 DESCRIPTION OF TESTS .....	6
3.1 EVALUATION PROCEDURE .....	6
3.2 CELLULAR - BASE FREQUENCY BLOCKS.....	6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....	6
3.4 PCS - BASE FREQUENCY BLOCKS .....	6
3.5 PCS - MOBILE FREQUENCY BLOCKS.....	7
3.6 OCCUPIED BANDWIDTH .....	7
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	7
3.8 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....	8
3.9 PEAK-AVERAGE RATIO.....	9
3.10 FREQUENCY STABILITY / TEMPERATURE VARIATION .....	9
4.0 TEST EQUIPMENT CALIBRATION DATA .....	10
5.0 SAMPLE CALCULATIONS .....	11
6.0 TEST RESULTS.....	12
6.1 SUMMARY.....	12
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA .....	13
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....	14
6.4 CELLULAR GSM RADIATED MEASUREMENTS .....	15
6.5 CELLULAR WCDMA RADIATED MEASUREMENTS .....	18
6.6 PCS GSM RADIATED MEASUREMENTS .....	21
6.7 CELLULAR GSM RADIATED MEASUREMENTS (W/ WIRELESS CHARGING PAD) .....	24
6.8 CELLULAR WCDMA RADIATED MEASUREMENTS (W/ WIRELESS CHARGING PAD).....	27
6.9 PCS GSM RADIATED MEASUREMENTS (W/ WIRELESS CHARGING PAD) .....	30
6.10 CELLULAR GSM FREQUENCY STABILITY MEASUREMENTS.....	33
6.11 CELLULAR WCDMA FREQUENCY STABILITY MEASUREMENTS .....	35
6.12 PCS GSM FREQUENCY STABILITY MEASUREMENTS.....	37
7.0 PLOTS OF EMISSIONS.....	39
8.0 CONCLUSION.....	55

FCC ID: A98-EKO8545	 FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset	Page 2 of 55



# MEASUREMENT REPORT



## FCC Part 22 & 24

### §2.1033 General Information

**APPLICANT:** NEC Corporation of America  
**APPLICANT ADDRESS:** Radio Communications Systems Division  
6535 N. State Highway 161, Irving, TX 75039-2402 USA  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §22(H), §24(E)  
**IC SPECIFICATION(S):** RSS-132 Issue 2; RSS-133 Issue 5  
**BASE MODEL:** KMP7R4H1-4A  
**FCC ID:** A98-EKO8545  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**MODE:** GSM/WCDMA  
**Test Device Serial No.:** 004401201080179  Production  Pre-Production  Engineering  
**DATE(S) OF TEST:** 11/23/2012  
**TEST REPORT S/N:** 0Y1211211664.A98

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EVDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A98-EKO8545		FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 3 of 55

## 1.0 INTRODUCTION


### 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Int'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See *Figure 1-1*).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on January 10, 2012.

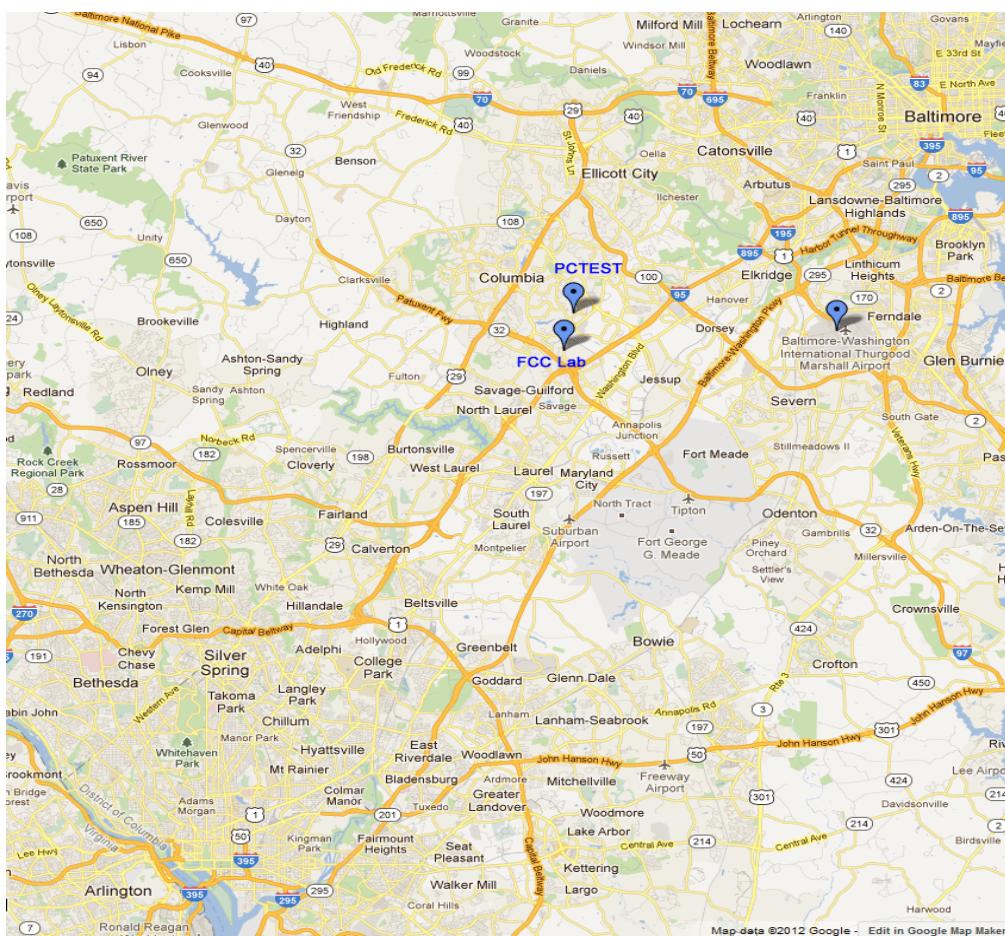

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset	Page 4 of 55

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **NEC Portable Handset FCC ID: A98-EKO8545**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS, 850 WCDMA, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE), NFC

### 2.3 Test Configuration

The NEC Portable Handset FCC ID: A98-EKO8545 was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168. See Section 3.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A98-EKO8545	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	 <b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 5 of 55


## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-C-2004) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" were used in the measurement of the measurement of the **NEC Portable Handset** FCC ID: **A98-EKO8545**.

Deviation from Measurement Procedure.....**None**

### 3.2 Cellular - Base Frequency Blocks

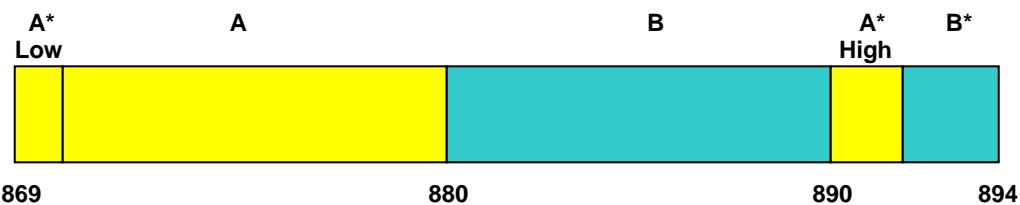


BLOCK 1: 869 – 880 MHz (A\* Low + A)

BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

### 3.3 Cellular - Mobile Frequency Blocks

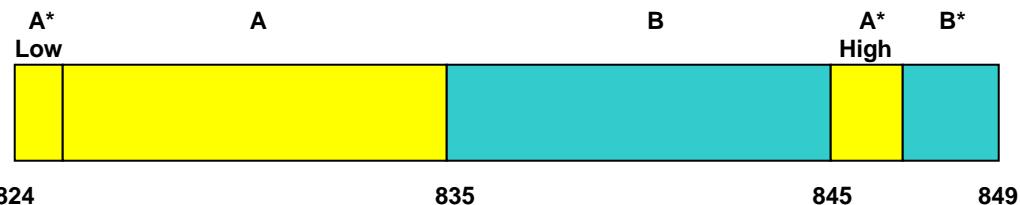


BLOCK 1: 824 – 835 MHz (A\* Low + A)

BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)


### 3.4 PCS - Base Frequency Blocks

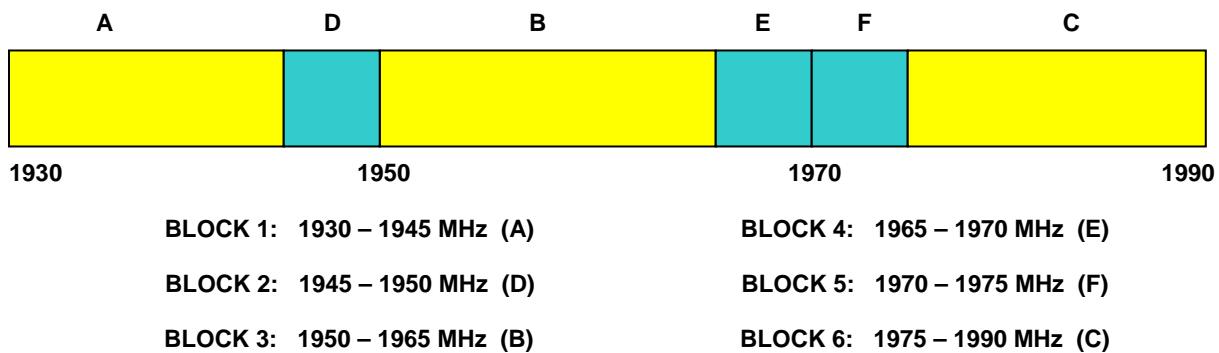

FCC ID: A98-EKO8545	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 6 of 55



### 3.5 PCS - Mobile Frequency Blocks

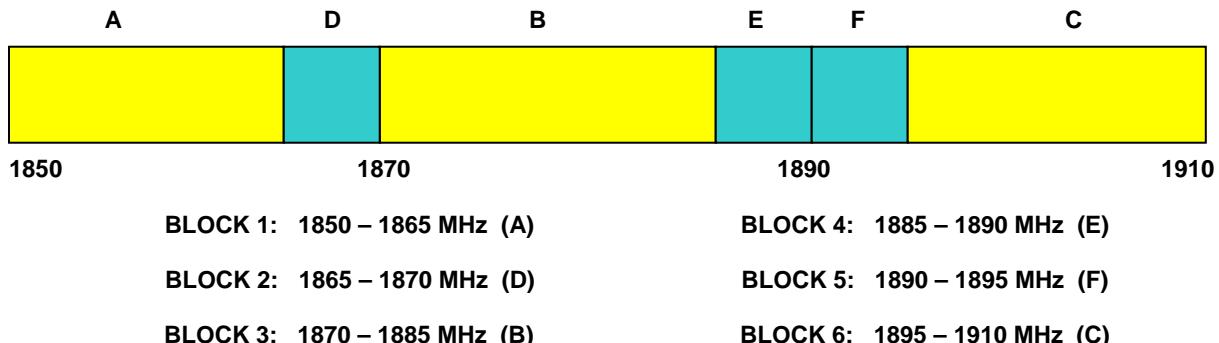

### 3.6 Occupied Bandwidth

§2.1049, RSS-Gen (4.6.1)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The spectrum analyzers' "occupied bandwidth" measurement function was used to record the occupied bandwidth in accordance with KDB 971168.

### 3.7 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a)(b); RSS-132 (4.5.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A98-EKO8545		FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 7 of 55

### 3.8 Radiated Power and Radiated Spurious Emissions

§2.1053, 22.913(a)(2), 22.917(a), 24.232(c), 24.238(a); RSS-132 (4.5.1), RSS-133 (6.5.1)


Radiated power measurements are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power [Watts]})$  specified in 22.917(a) and 24.238(a).

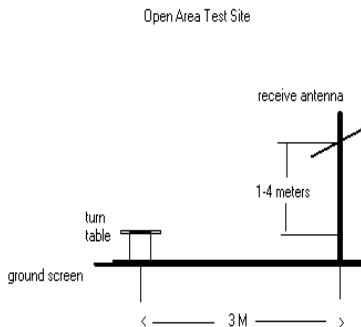

**Figure 3-1. Diagram of 3-meter outdoor test range**

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		 <b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			Page 8 of 55

### 3.9 Peak-Average Ratio

§24.232(d); RSS-133 (6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

For GSM signals, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to 400 $\mu$ s to ensure that energy is only captured during a time in which the transmitter is operating at maximum power. For WCDMA, the trigger is set to “free run” in the CCDF measurement mode.

### 3.10 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235; RSS-132 (4.3) / RSS-133 (6.3)

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.*

#### Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			Page 9 of 55

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/10/2012	Annual	7/10/2013	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
-	LTx2	Licensed Transmitter Cable Set	2/17/2012	Annual	2/17/2013	N/A
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	2/15/2012	Annual	2/15/2013	3008A00985
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2012	Annual	10/10/2013	3613A00315
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N9038A	MXE EMI Receiver	8/5/2011	Annual	12/5/2012	MY51210133
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Mini-Circuits	VHF-3100+	High Pass Filter	2/7/2012	Annual	2/7/2013	31144
Rohde & Schwarz	CMU200	Base Station Simulator	5/22/2012	Annual	5/22/2013	109892
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	7/5/2011	Biennial	7/5/2013	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/17/2011	Biennial	6/17/2013	A042511

Table 4-1. Test Equipment

FCC ID: A98-EKO8545	 <b>FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset	Page 10 of 55

## 5.0 SAMPLE CALCULATIONS

### GSM Emission Designator

**Emission Designator = 250KGXW**

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission - PCS Band

**Example: GSM Channel 512 PCS Mode 2<sup>nd</sup> Harmonic (3700.40 MHz)**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			Page 11 of 55

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: NEC Corporation of America  
 FCC ID: A98-EKO8545  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM/WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
2.1049, 22.917(a), 24.238(a)	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	< $43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d)	RSS-133 (6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
22.913(a)(2)	RSS-132 (4.4) [SRSP-503(5.1.3)]	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.3
2.1053, 22.917(a), 24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Undesirable Emissions	< $43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Sections 6.4, 6.5, 6.6,
2.1055, 22.355, 24.235	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)		PASS	Sections 6.10, 6.11, 6.12,

**Table 6-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All the conducted data/ plots of this device were reused from test results of the EUT FCC ID: A98-IOX5488, (since both the models has similar circuitry)

FCC ID: A98-EKO8545	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 12 of 55	

## 6.2 Effective Radiated Power Output Data

§22.913(a)(2); RSS-132 (4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	Standard	29.87	0.00	V	29.87	0.971	38.45	-8.581
836.60	GSM850	Standard	30.81	0.00	V	30.81	1.205	38.45	-7.641
848.80	GSM850	Standard	29.71	0.00	V	29.71	0.935	38.45	-8.741
836.60	w/ Wireless Charging Pad	Standard	29.29	0.00	V	29.29	0.849	38.45	-9.161

**Table 6-2. Effective Radiated Power Output Data (GSM)**

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	Standard	21.14	0.00	V	21.14	0.130	38.45	-17.311
836.60	WCDMA850	Standard	21.67	0.00	V	21.67	0.147	38.45	-16.781
846.60	WCDMA850	Standard	20.72	0.00	V	20.72	0.118	38.45	-17.731
836.60	w/ Wireless Charging Pad	Standard	18.77	0.00	V	18.77	0.075	38.45	-19.681

**Table 6-3. Effective Radiated Power Output Data (WCDMA)**

**NOTES:**

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545		FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset				Page 13 of 55	

### 6.3 Equivalent Isotropic Radiated Power Output Data

§24.232(c); RSS-133 (6.4) [SRSP-510 (5.1.2)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	Standard	20.88	7.75	H	28.63	0.729	33.01	-4.38
1880.00	GSM1900	Standard	20.10	7.83	H	27.93	0.621	33.01	-5.08
1909.80	GSM1900	Standard	19.39	7.93	H	27.32	0.540	33.01	-5.69
1850.20	w/ Wireless Charging Pad	Standard	22.02	7.75	H	29.77	0.948	33.01	-3.24

**Table 6-4. Equivalent Isotropic Radiated Power Output Data (GSM)**

**NOTES:**

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			Page 14 of 55	

## 6.4 Cellular GSM Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128  
 MEASURED OUTPUT POWER: 29.87 dBm = 0.971 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.87 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-51.42	6.16	-45.26	V	75.1
2472.60	-43.17	6.34	-36.83	V	66.7
3296.80	-52.92	6.70	-46.22	V	76.1
4121.00	-90.78	7.38	-83.40	V	113.3
4945.20	-90.60	8.91	-81.68	V	111.6

Table 6-5. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 15 of 55

## Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190  
 MEASURED OUTPUT POWER: 30.81 dBm = 1.205 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  43.81 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-44.05	6.09	-37.96	V	68.8
2509.80	-49.54	6.38	-43.16	V	74.0
3346.40	-52.62	6.90	-45.71	V	76.5
4183.00	-91.40	7.80	-83.60	V	114.4
5019.60	-90.16	8.83	-81.33	V	112.1

Table 6-6. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 16 of 55

## Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 29.71 dBm = 0.935 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.71 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-43.93	6.01	-37.92	V	67.6
2546.40	-50.76	6.48	-44.29	V	74.0
3395.20	-52.97	7.10	-45.86	V	75.6
4244.00	-91.79	8.10	-83.68	V	113.4
5092.80	-89.87	8.86	-81.01	V	110.7

Table 6-7. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 17 of 55

## 6.5 Cellular WCDMA Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.40 MHz  
 CHANNEL: 4132  
 MEASURED OUTPUT POWER: 21.14 dBm = 0.130 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  34.14 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-55.26	6.15	-49.11	V	70.3
2479.20	-94.94	6.34	-88.59	V	109.7
3305.60	-92.56	6.73	-85.83	V	107.0
4132.00	-90.89	7.45	-83.44	V	104.6
4958.40	-90.51	8.89	-81.62	V	102.8

Table 6-8. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 18 of 55	

## Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 4183  
 MEASURED OUTPUT POWER: 21.67 dBm = 0.147 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  34.67 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-54.86	6.10	-48.76	V	70.4
2509.80	-94.88	6.37	-88.51	V	110.2
3346.40	-92.72	6.88	-85.84	V	107.5
4183.00	-91.32	7.74	-83.57	V	105.2
5019.60	-90.20	8.82	-81.37	V	103.0

Table 6-9. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 19 of 55	

## Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 846.60 MHz  
 CHANNEL: 4233  
 MEASURED OUTPUT POWER: 20.72 dBm = 0.118 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  33.72 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-55.46	6.02	-49.44	V	70.2
2539.80	-94.92	6.46	-88.46	V	109.2
3386.40	-92.92	7.07	-85.86	V	106.6
4233.00	-91.73	8.05	-83.68	V	104.4
5079.60	-89.92	8.85	-81.07	V	101.8

Table 6-10. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 20 of 55	

## 6.6 PCS GSM Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 28.63 dBm = 0.729 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  41.63 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-53.45	9.63	-43.82	H	72.5
5550.60	-89.25	10.60	-78.65	H	107.3
7400.80	-85.27	10.85	-74.43	H	103.1
9251.00	-83.88	12.20	-71.68	H	100.3
11101.20	-80.29	12.85	-67.44	H	96.1

Table 6-11. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 21 of 55

## PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 27.93 dBm = 0.621 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  40.93 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-53.91	9.30	-44.62	H	72.5
5640.00	-89.62	10.89	-78.73	H	106.7
7520.00	-85.04	10.85	-74.18	H	102.1
9400.00	-83.64	12.17	-71.47	H	99.4
11280.00	-80.50	13.05	-67.45	H	95.4

Table 6-12. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 22 of 55

## PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 27.32 dBm = 0.540 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  40.32 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-53.47	9.05	-44.43	H	71.7
5729.40	-89.78	11.08	-78.70	H	106.0
7639.20	-85.32	11.11	-74.20	H	101.5
9549.00	-83.77	12.37	-71.40	H	98.7
11458.80	-80.04	13.23	-66.81	H	94.1

Table 6-13. Radiated Spurious Data (PCS GSM Mode – Ch. 810)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 23 of 55

## 6.7 Cellular GSM Radiated Measurements (w/ Wireless Charging Pad)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128  
 MEASURED OUTPUT POWER: 29.29 dBm = 0.849 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.29 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-51.41	6.16	-45.25	V	74.5
2472.60	-42.76	6.34	-36.41	V	65.7
3296.80	-92.54	6.70	-85.83	V	115.1
4121.00	-90.78	7.38	-83.40	V	112.7
4945.20	-90.60	8.91	-81.68	V	111.0

Table 6-14. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 24 of 55



## Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
CHANNEL: 190  
MEASURED OUTPUT POWER: 29.29 dBm = 0.849 W  
MODULATION SIGNAL: GSM (GMSK)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) =$  42.29 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-47.99	6.09	-41.91	V	71.2
2509.80	-45.18	6.38	-38.80	V	68.1
3346.40	-92.75	6.90	-85.84	V	115.1
4183.00	-91.40	7.80	-83.60	V	112.9
5019.60	-90.16	8.83	-81.33	V	110.6

Table 6-15. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545		FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 25 of 55

## Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 29.29 dBm = 0.849 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.29 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-47.48	6.01	-41.47	V	70.8
2546.40	-44.31	6.48	-37.84	V	67.1
3395.20	-92.96	7.10	-85.86	V	115.1
4244.00	-91.79	8.10	-83.68	V	113.0
5092.80	-89.87	8.86	-81.01	V	110.3

Table 6-16. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 26 of 55

## 6.8 Cellular WCDMA Radiated Measurements (w/ Wireless Charging Pad)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.40 MHz  
 CHANNEL: 4132  
 MEASURED OUTPUT POWER: 18.77 dBm = 0.075 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  31.75 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-59.53	6.15	-53.38	H	72.1
2479.20	-94.94	6.34	-88.59	H	107.4
3305.60	-92.56	6.73	-85.83	H	104.6
4132.00	-90.89	7.45	-83.44	H	102.2
4958.40	-90.51	8.89	-81.62	H	100.4

Table 6-17. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 27 of 55

## Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 4183  
 MEASURED OUTPUT POWER: 18.77 dBm = 0.075 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  31.75 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-58.81	6.10	-52.72	H	71.5
2509.80	-94.88	6.37	-88.51	H	107.3
3346.40	-92.72	6.88	-85.84	H	104.6
4183.00	-91.32	7.74	-83.57	H	102.3
5019.60	-90.20	8.82	-81.37	H	100.1

Table 6-18. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 28 of 55	

## Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 846.60 MHz  
 CHANNEL: 4233  
 MEASURED OUTPUT POWER: 18.77 dBm = 0.075 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  31.75 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-58.88	6.02	-52.86	H	71.6
2539.80	-94.92	6.46	-88.46	H	107.2
3386.40	-92.92	7.07	-85.86	H	104.6
4233.00	-91.73	8.05	-83.68	H	102.4
5079.60	-89.92	8.85	-81.07	H	99.8

Table 6-19. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 29 of 55	

## 6.9 PCS GSM Radiated Measurements (w/ Wireless Charging Pad)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 29.77 dBm = 0.948 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.77 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-44.99	9.63	-35.36	H	65.1
5550.60	-43.15	10.60	-32.55	H	62.3
7400.80	-85.27	10.85	-74.43	H	104.2
9251.00	-83.88	12.20	-71.68	H	101.5
11101.20	-80.29	12.85	-67.44	H	97.2

Table 6-20. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 30 of 55

## PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 29.77 dBm = 0.948 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.77 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-47.31	9.30	-38.01	H	67.8
5640.00	-45.27	10.89	-34.38	H	64.1
7520.00	-85.04	10.85	-74.18	H	104.0
9400.00	-83.64	12.17	-71.47	H	101.2
11280.00	-80.50	13.05	-67.45	H	97.2

Table 6-21. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 31 of 55

## PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 29.77 dBm = 0.948 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.77 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-45.64	9.05	-36.60	H	66.4
5729.40	-47.40	11.08	-36.33	H	66.1
7639.20	-85.32	11.11	-74.20	H	104.0
9549.00	-83.77	12.37	-71.40	H	101.2
11458.80	-80.04	13.23	-66.81	H	96.6

Table 6-22. Radiated Spurious Data (PCS GSM Mode – Ch. 810)

### NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the Vertical setup for the Cellular Band and Horizontal Setup for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 32 of 55

## 6.10 Cellular GSM Frequency Stability Measurements

§2.1055, 22.355; RSS-132 (4.3)

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 190

REFERENCE VOLTAGE: 3.8 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,600,007	7	0.00000084
100 %		- 30	836,600,003	3	0.00000036
100 %		- 20	836,599,989	-11	-0.00000131
100 %		- 10	836,600,007	7	0.00000084
100 %		0	836,600,003	3	0.00000036
100 %		+ 10	836,599,989	-11	-0.00000131
100 %		+ 20	836,599,988	-12	-0.00000143
100 %		+ 30	836,599,993	-7	-0.00000084
100 %		+ 40	836,600,005	5	0.00000060
100 %		+ 50	836,599,994	-6	-0.00000072
115 %		+ 20	836,599,985	-15	-0.00000179
BATT. ENDPOINT	3.24	+ 20	836,599,998	-2	-0.00000024

Table 6-23. Frequency Stability Data (Cellular GSM Mode – Ch. 190)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 33 of 55	

## Cellular GSM Frequency Stability Measurements (Cont'd)

§2.1055, 22.355; RSS-132 (4.3)

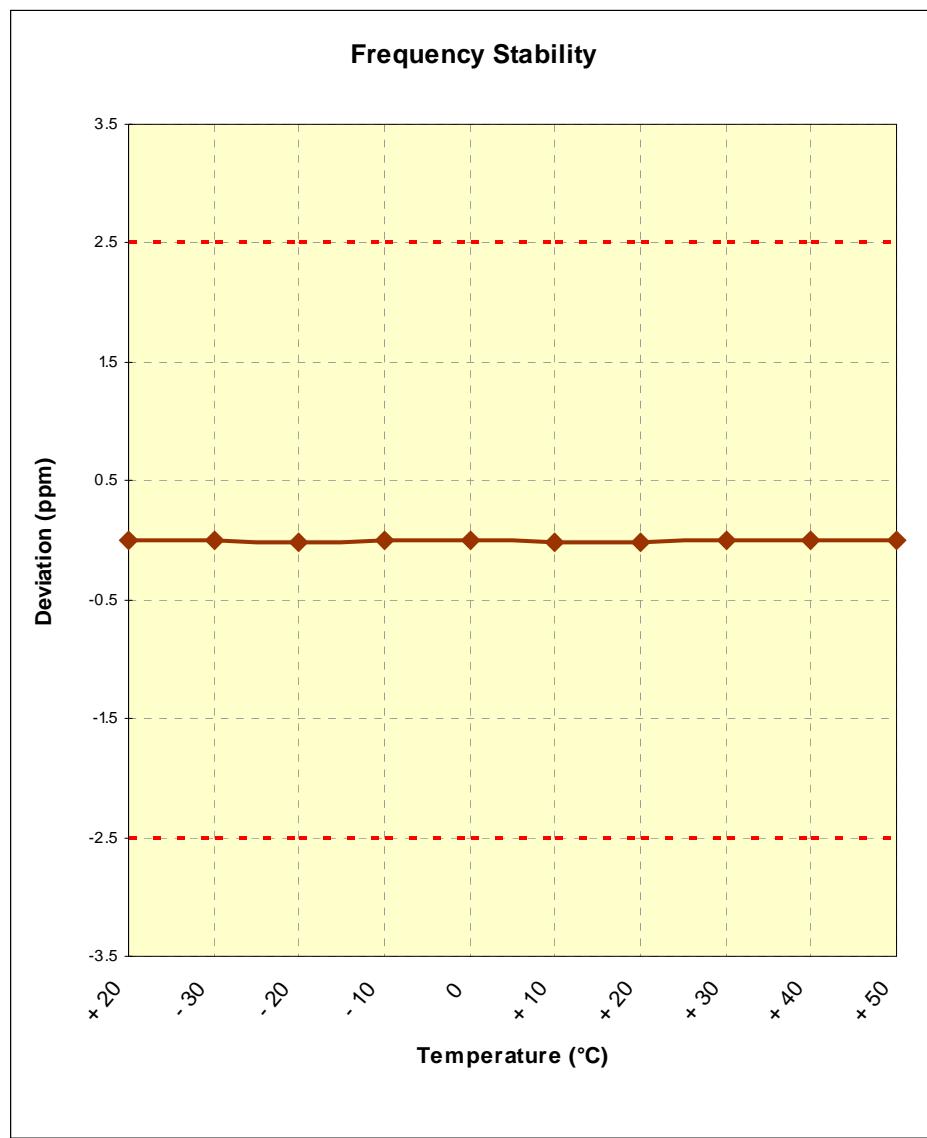


Figure 6-1. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			Page 34 of 55

## 6.11 Cellular WCDMA Frequency Stability Measurements

§2.1055, 22.355; RSS-132 (4.3)

OPERATING FREQUENCY: 836,600,000 Hz  
 CHANNEL: 4183  
 REFERENCE VOLTAGE: 3.8 VDC  
 DEVIATION LIMIT:  $\pm 0.00025$  % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,599,999	-1	-0.00000012
100 %		- 30	836,599,993	-7	-0.00000084
100 %		- 20	836,600,003	3	0.00000036
100 %		- 10	836,600,008	8	0.00000096
100 %		0	836,599,985	-15	-0.00000179
100 %		+ 10	836,599,991	-9	-0.00000108
100 %		+ 20	836,599,993	-7	-0.00000084
100 %		+ 30	836,600,001	1	0.00000012
100 %		+ 40	836,599,988	-12	-0.00000143
100 %		+ 50	836,600,004	4	0.00000048
115 %		+ 20	836,599,995	-5	-0.00000060
BATT. ENDPOINT	3.24	+ 20	836,600,000	0	0.00000000

Table 6-24. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 35 of 55	

## Cellular WCDMA Frequency Stability Measurements (Cont'd)

§2.1055, 22.355; RSS-132 (4.3)

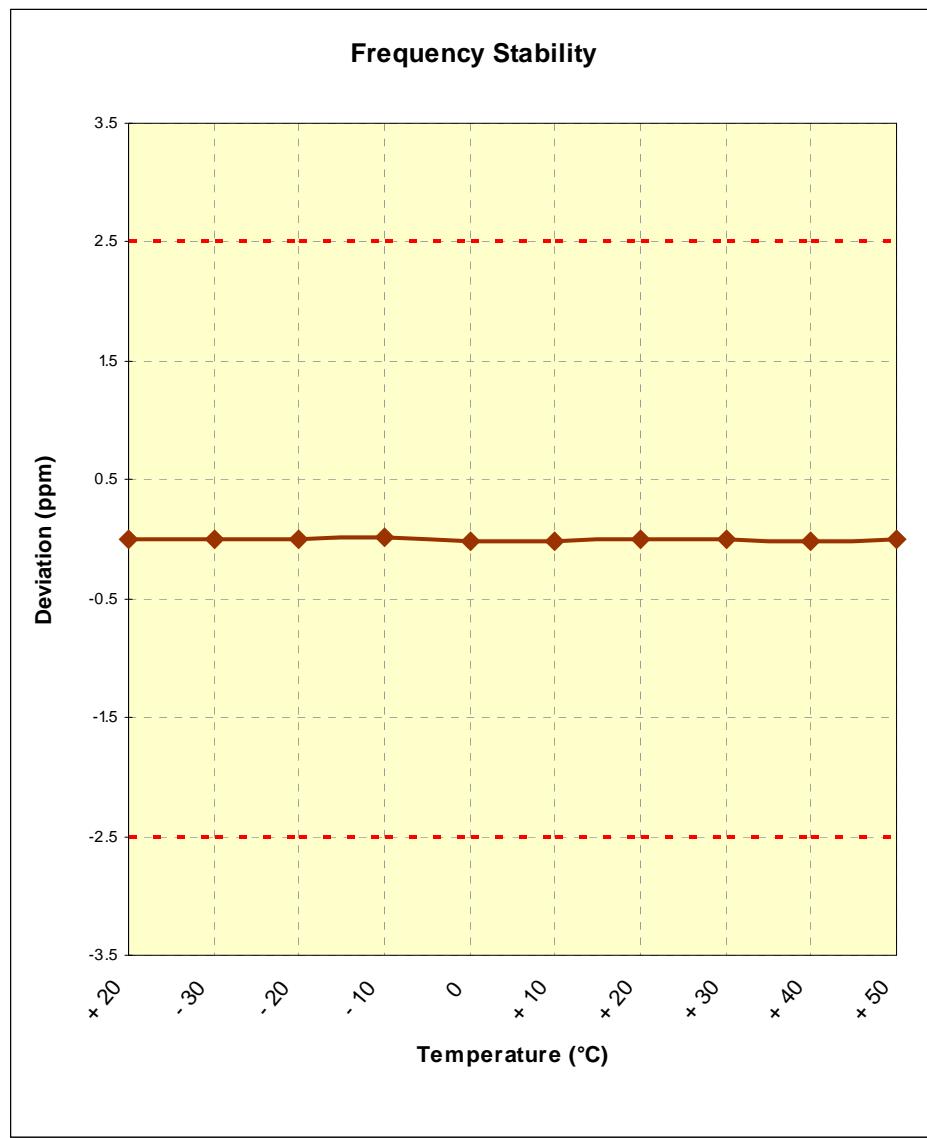


Figure 6-2. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset	Page 36 of 55
<p>© 2012 PCTEST Engineering Laboratory, Inc.</p> <p>REV 1.7GWCFI 09/27/2012</p>			

## 6.12 PCS GSM Frequency Stability Measurements

§2.1055, 24.235; RSS-133 (6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 661

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,991	-9	-0.00000048
100 %		- 30	1,879,999,979	-21	-0.00000112
100 %		- 20	1,880,000,012	12	0.00000064
100 %		- 10	1,879,999,980	-20	-0.00000106
100 %		0	1,880,000,002	2	0.00000011
100 %		+ 10	1,880,000,009	9	0.00000048
100 %		+ 20	1,880,000,001	1	0.00000005
100 %		+ 30	1,880,000,003	3	0.00000016
100 %		+ 40	1,879,999,988	-12	-0.00000064
100 %		+ 50	1,879,999,995	-5	-0.00000027
115 %		+ 20	1,880,000,007	7	0.00000037
BATT. ENDPOINT	3.24	+ 20	1,880,000,007	7	0.00000037

Table 6-25. Frequency Stability Data (PCS GSM Mode – Ch. 661)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)		<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 37 of 55	

## PCS GSM Frequency Stability Measurements (Cont'd)

§2.1055, 24.235; RSS-133 (6.3)


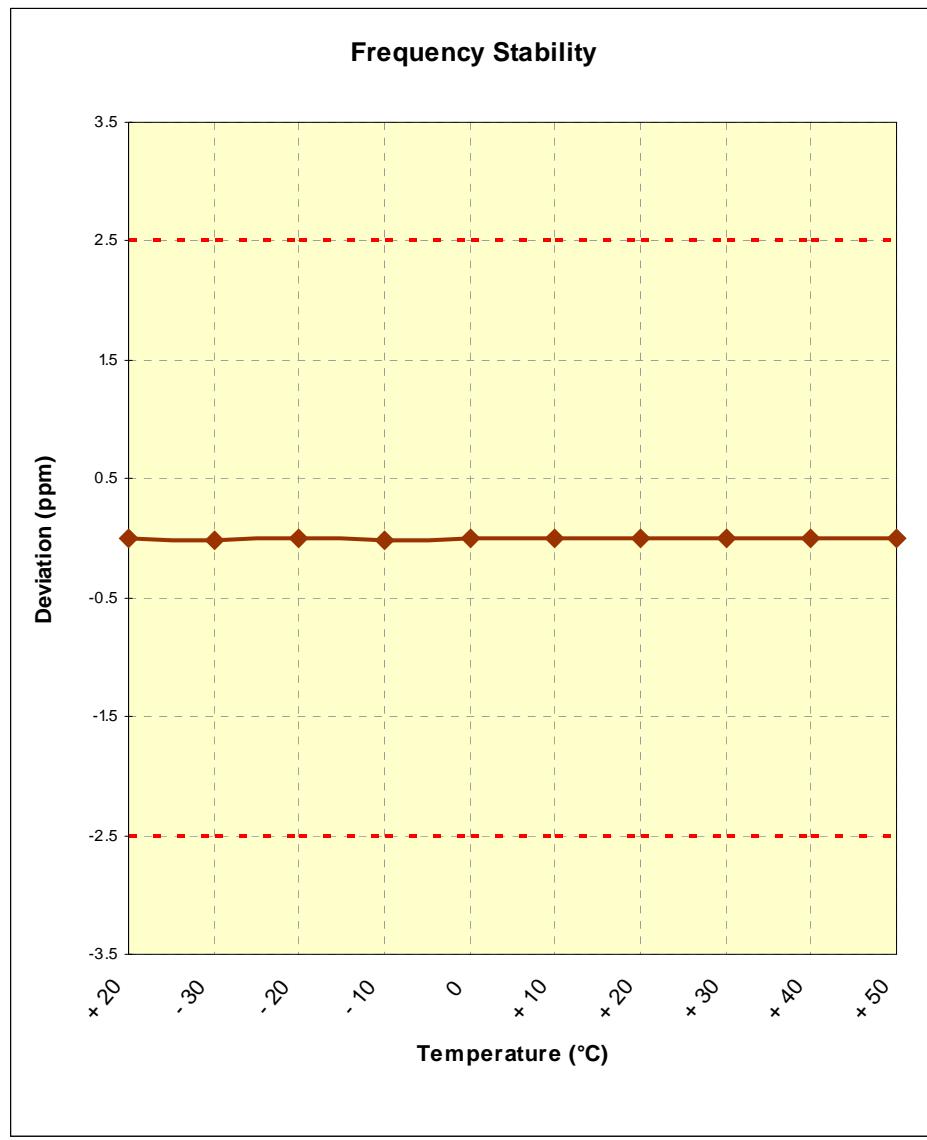



Figure 6-3. Frequency Stability Graph (PCS GSM Mode – Ch. 661)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 38 of 55

## 7.0 PLOTS OF EMISSIONS

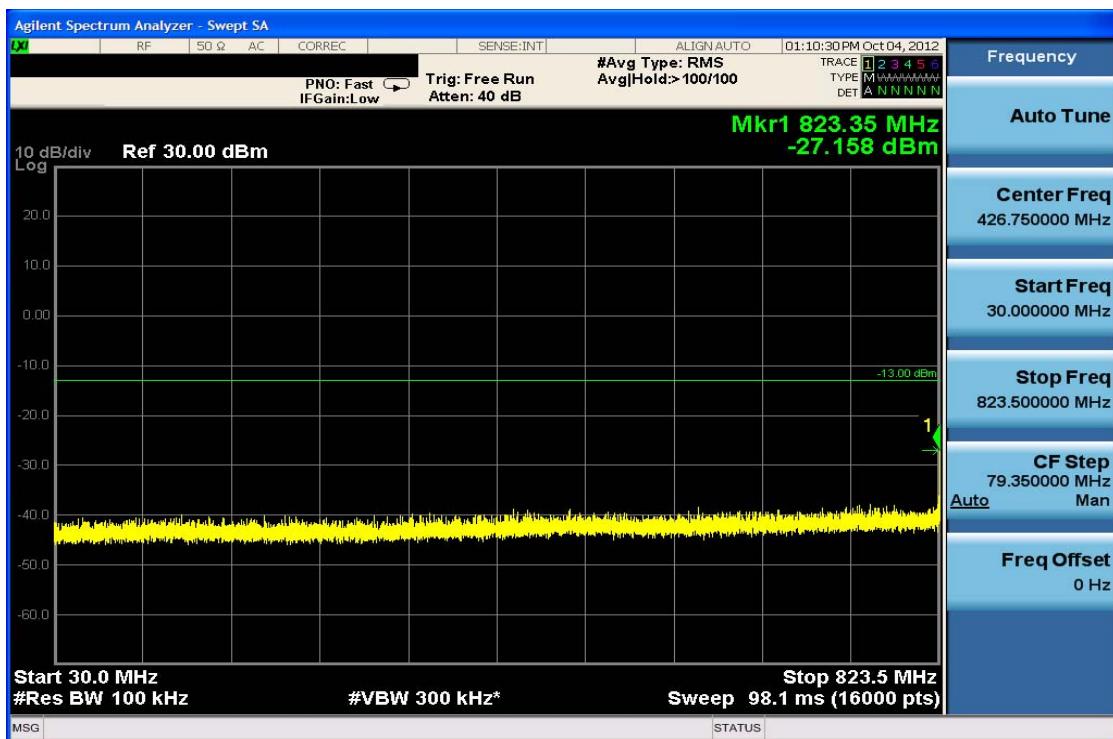


Plot 7-1. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

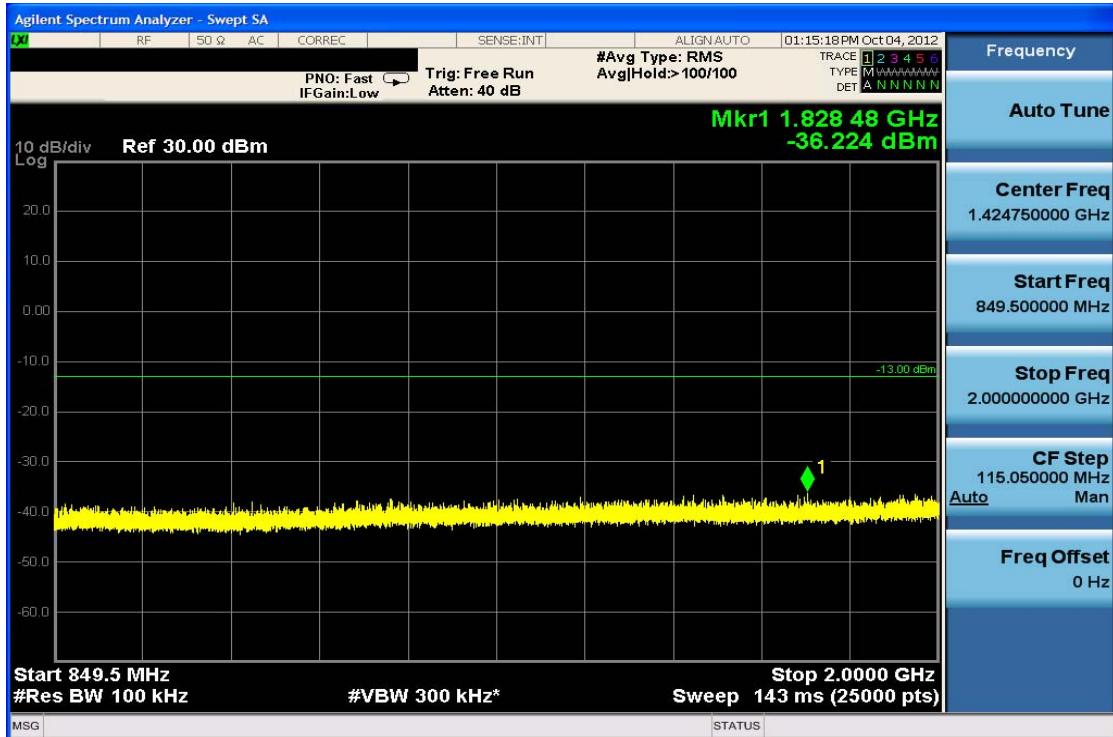


Plot 7-2. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 39 of 55

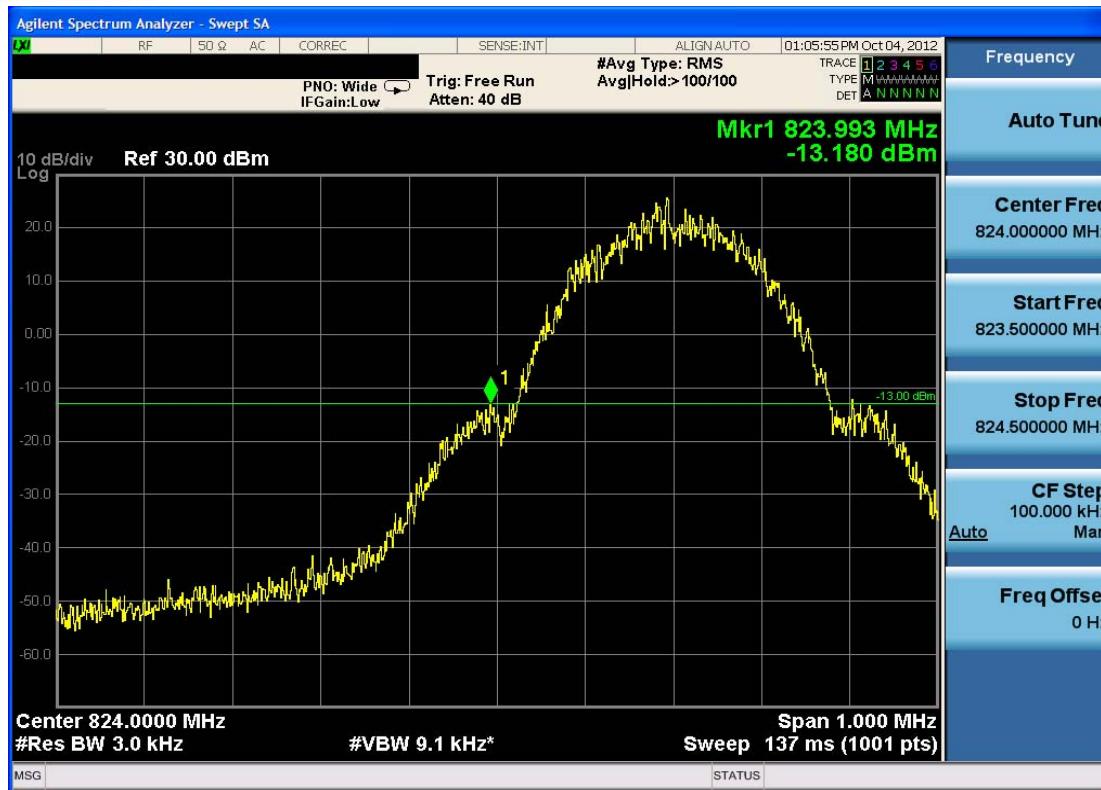


Plot 7-3. Band Edge Plot (Cellular GSM Mode – Ch. 128)

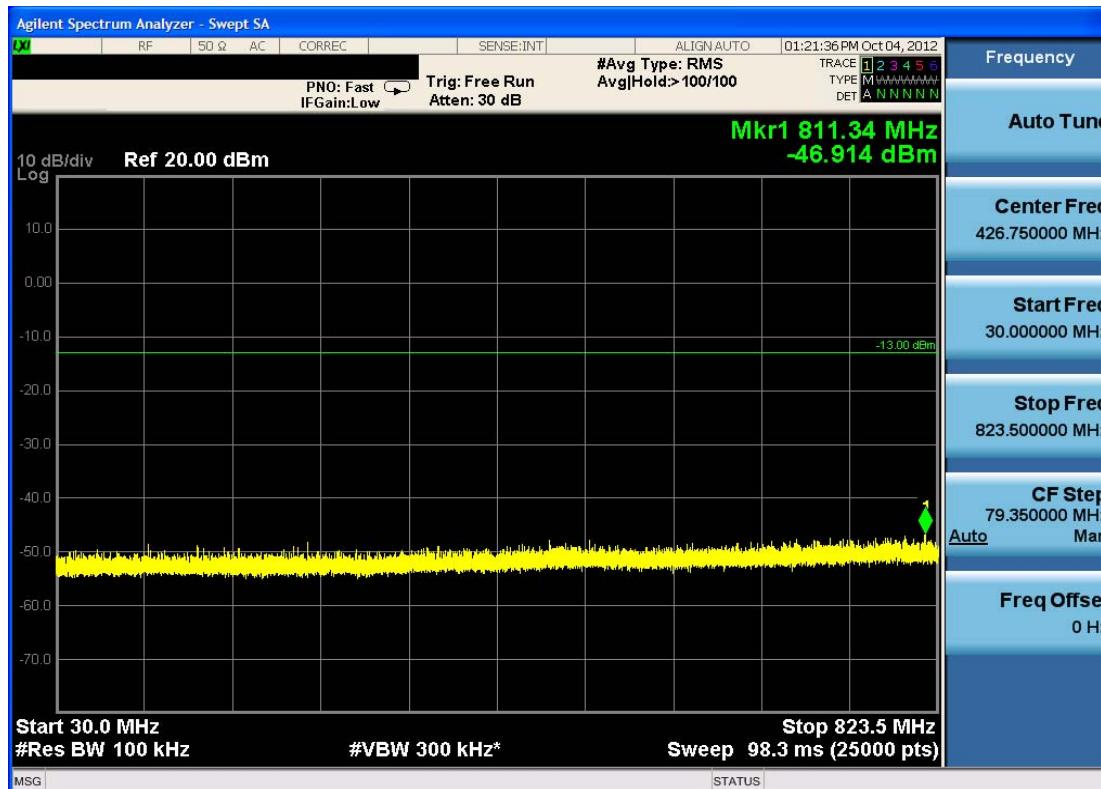

Plot 7-4. Conducted Spurious (Cellular GSM Mode – Ch. 190)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 40 of 55

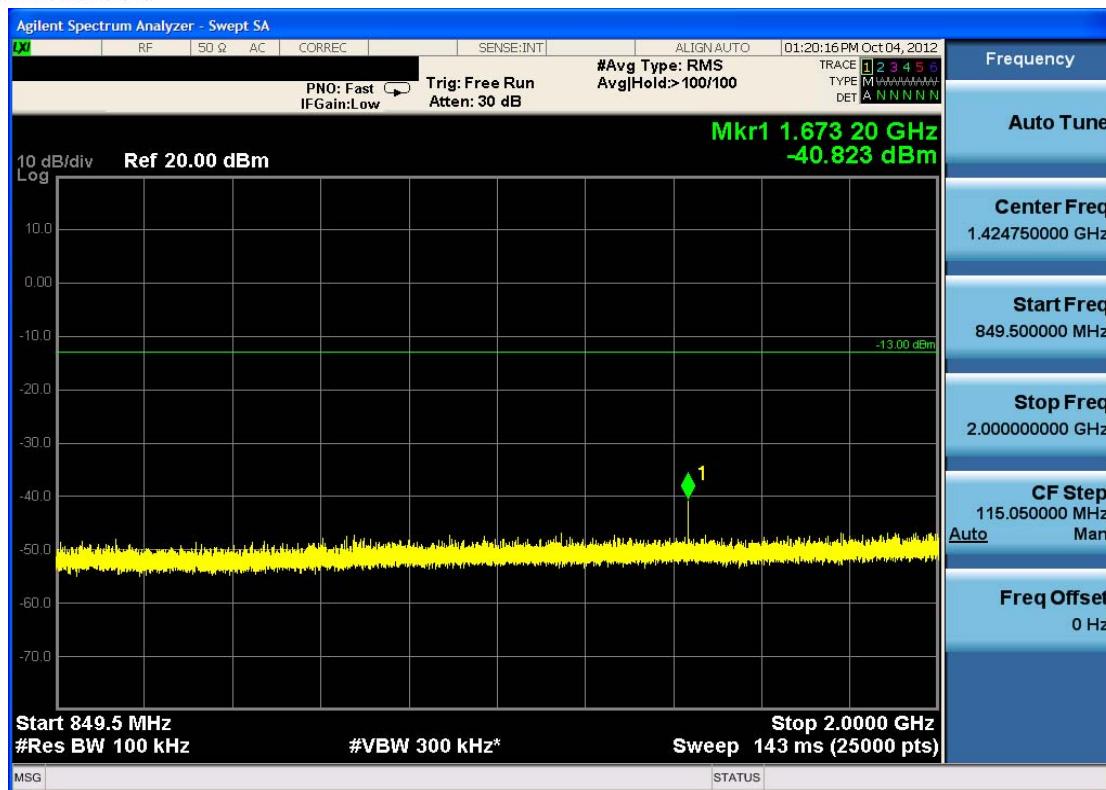


Plot 7-5. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)




Plot 7-6. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			NEC	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			Page 41 of 55

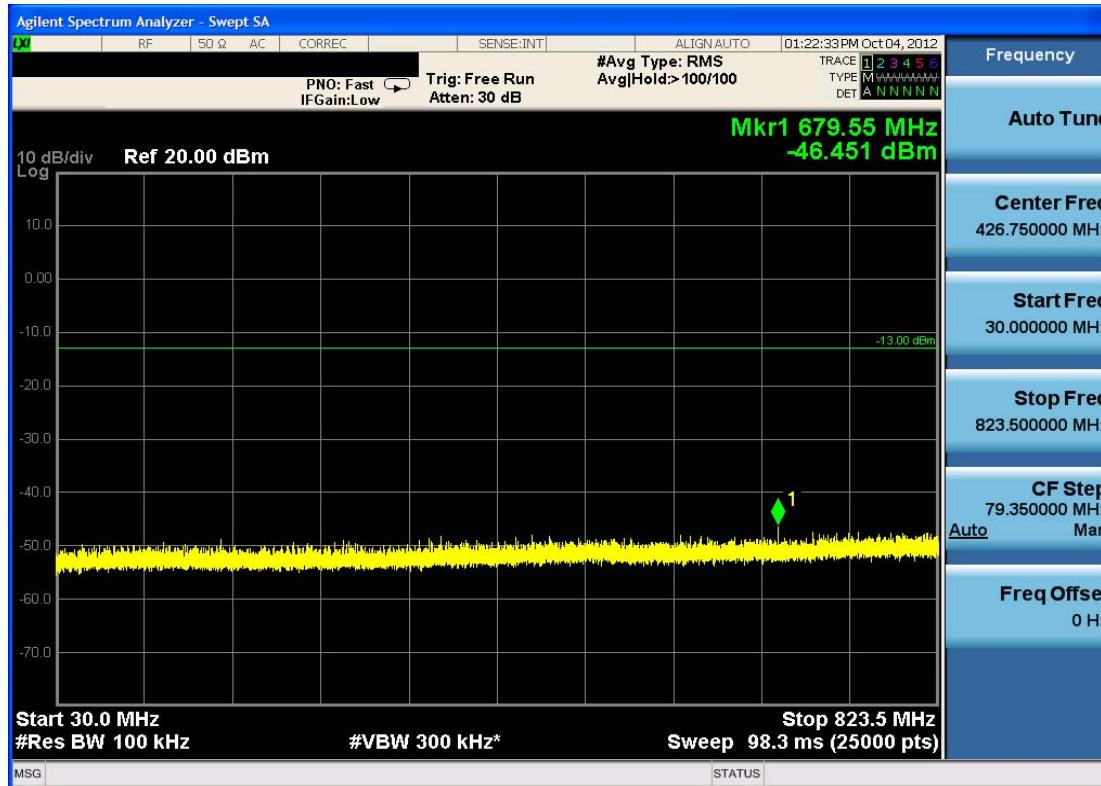


Plot 7-7. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

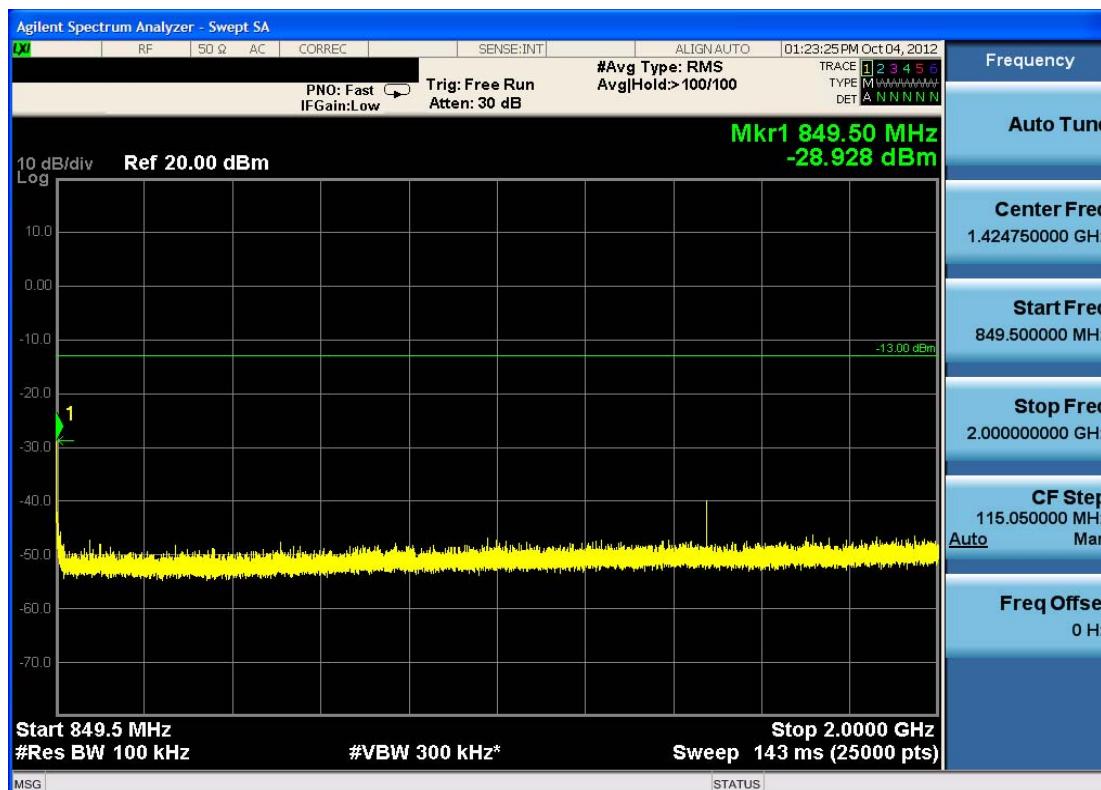


Plot 7-8. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 42 of 55

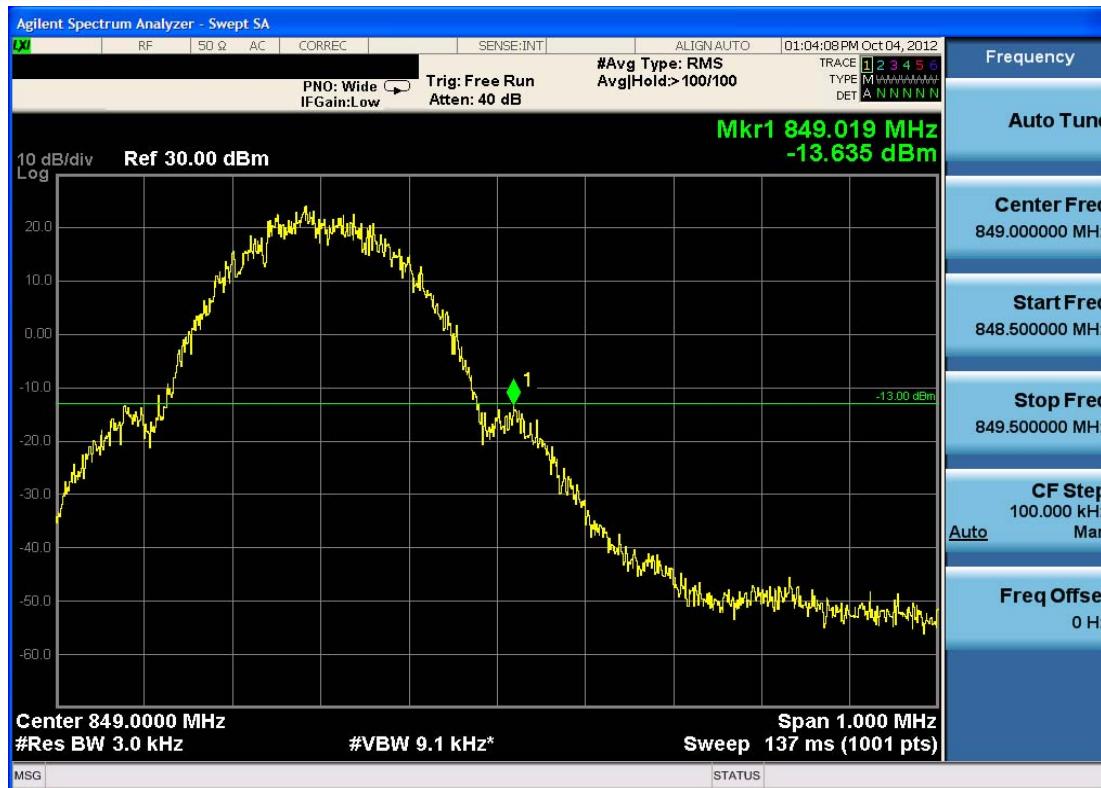


Plot 7-9. Band Edge Plot (Cellular GSM Mode – Ch. 251)

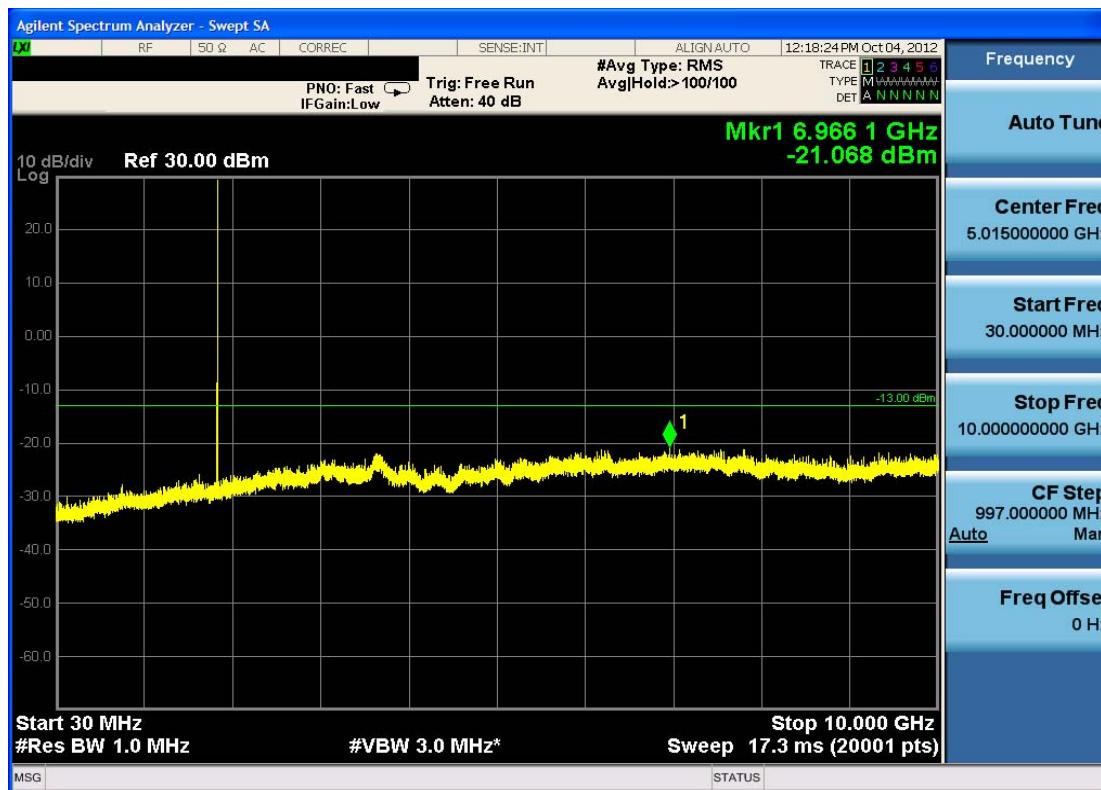


Plot 7-10. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			NEC	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			

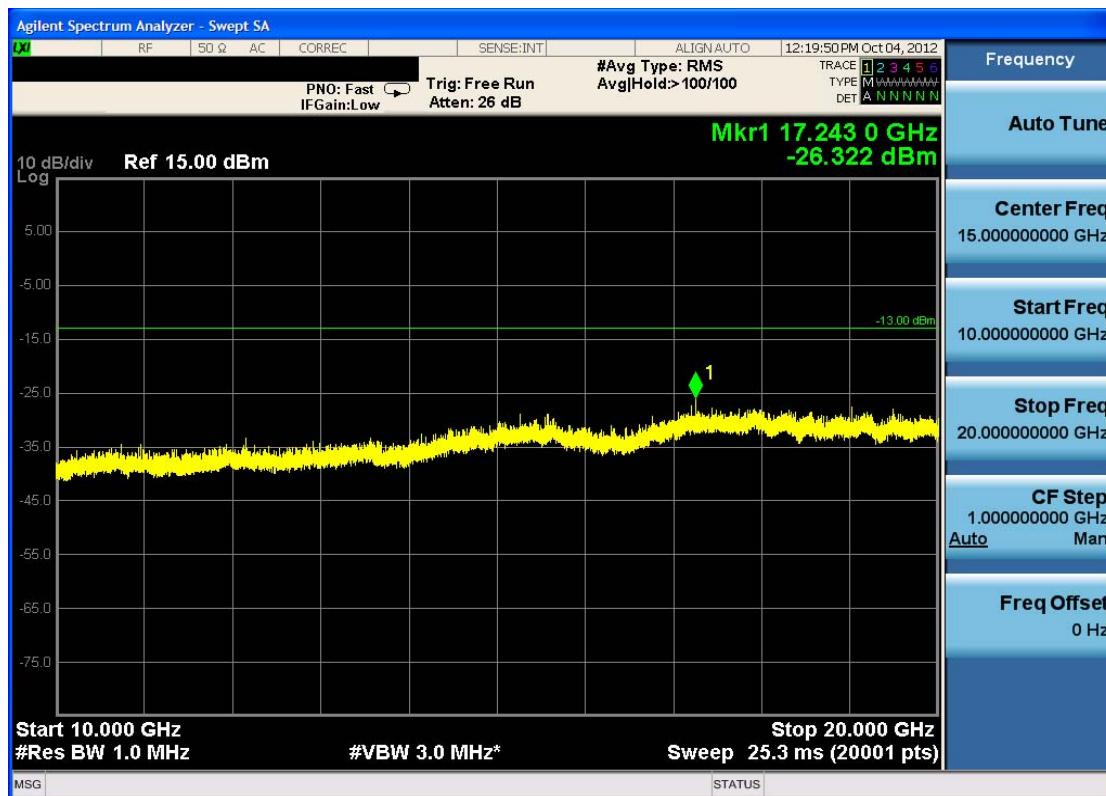


Plot 7-11. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

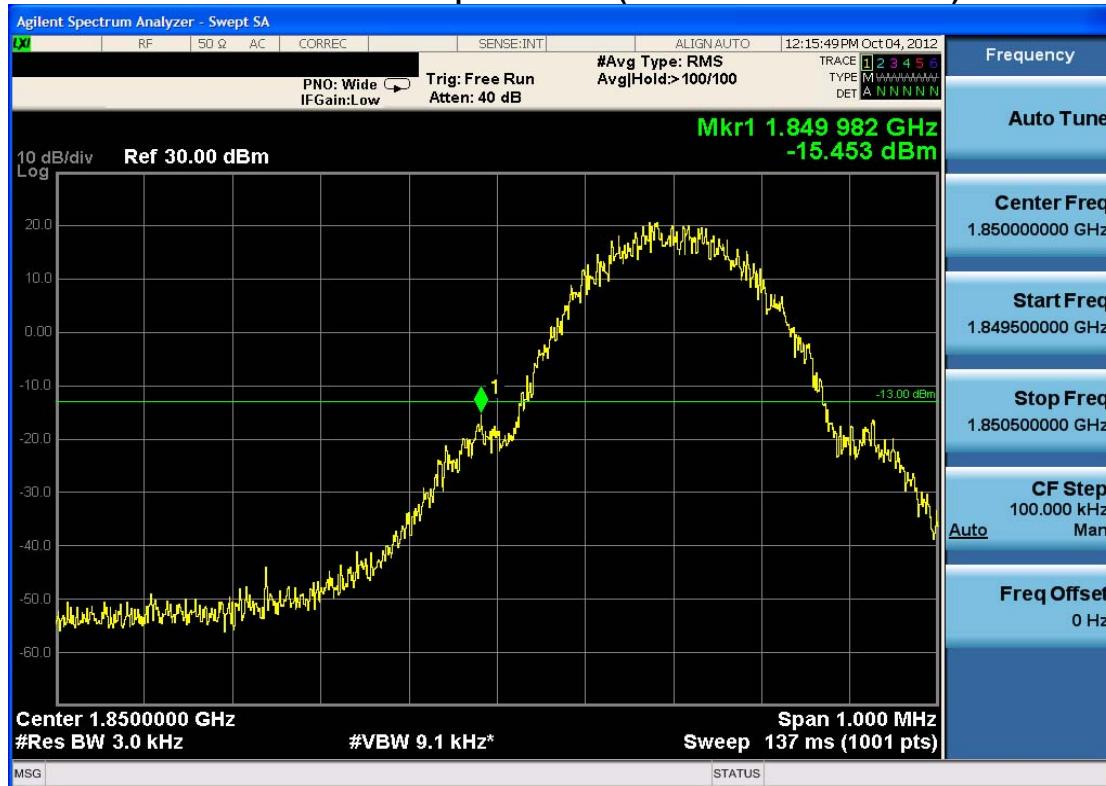


Plot 7-12. Band Edge Plot (PCS GSM Mode – Ch. 512)

FCC ID: A98-EKO8545	 FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	NEC	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset	Page 44 of 55

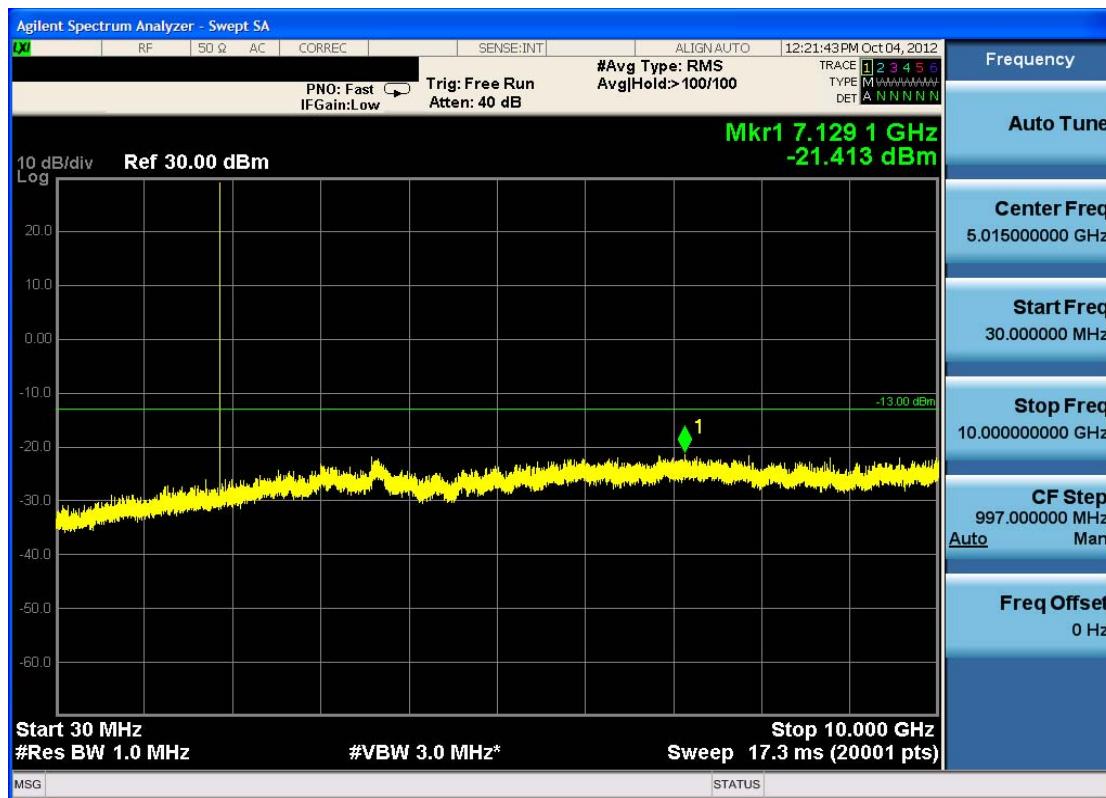

Plot 7-13. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

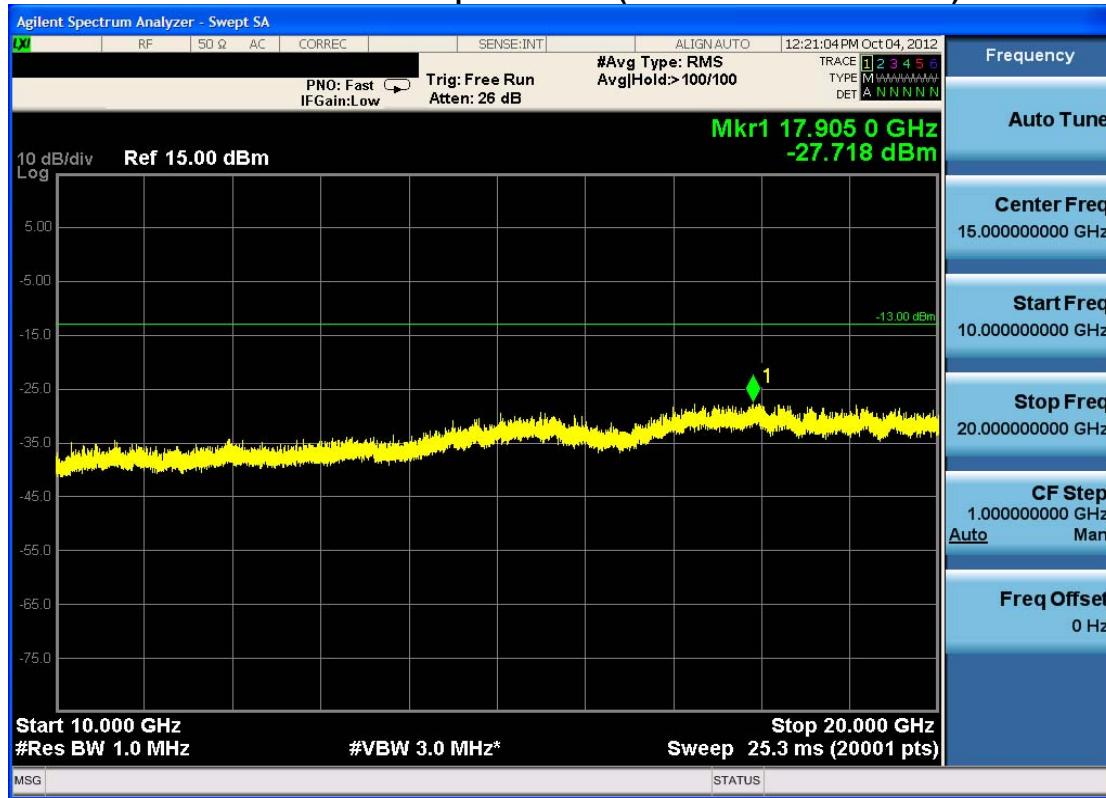


Plot 7-14. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: A98-EKO8545	 FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	NEC	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset	Page 45 of 55




Plot 7-15. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

FCC ID: A98-EKO8545	 <b>PCTEST</b> Engineering Laboratory, Inc.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 46 of 55

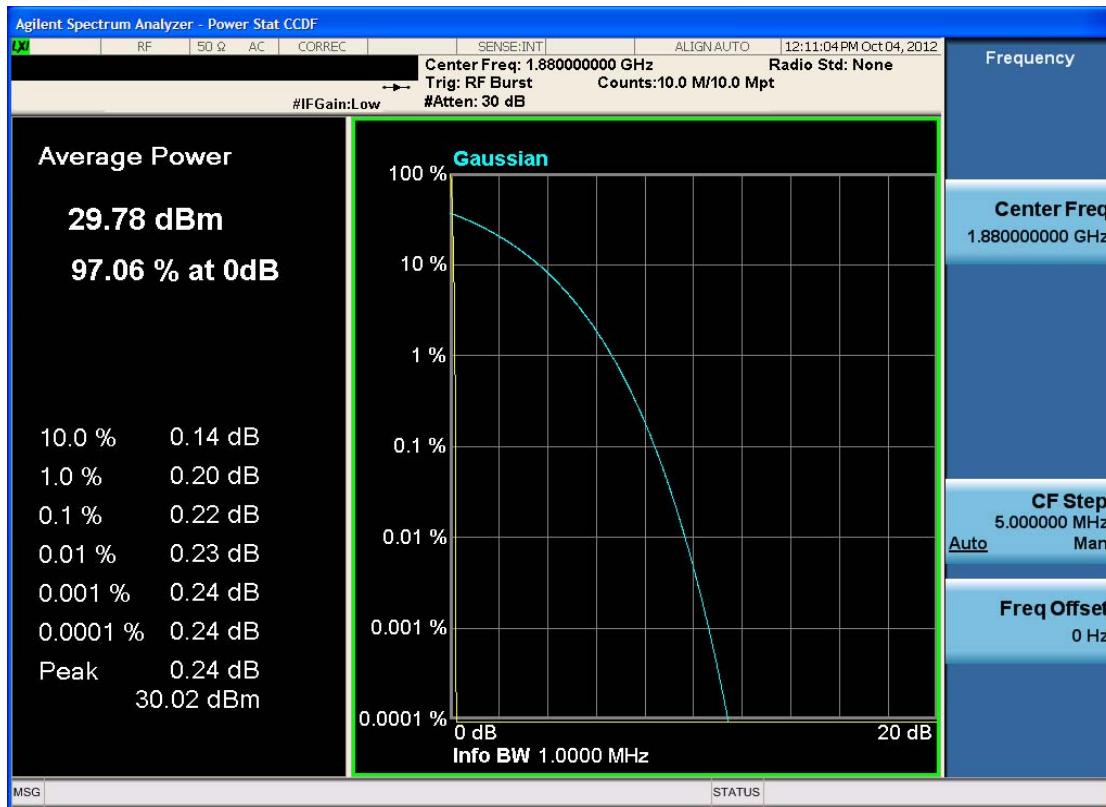


Plot 7-16. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)

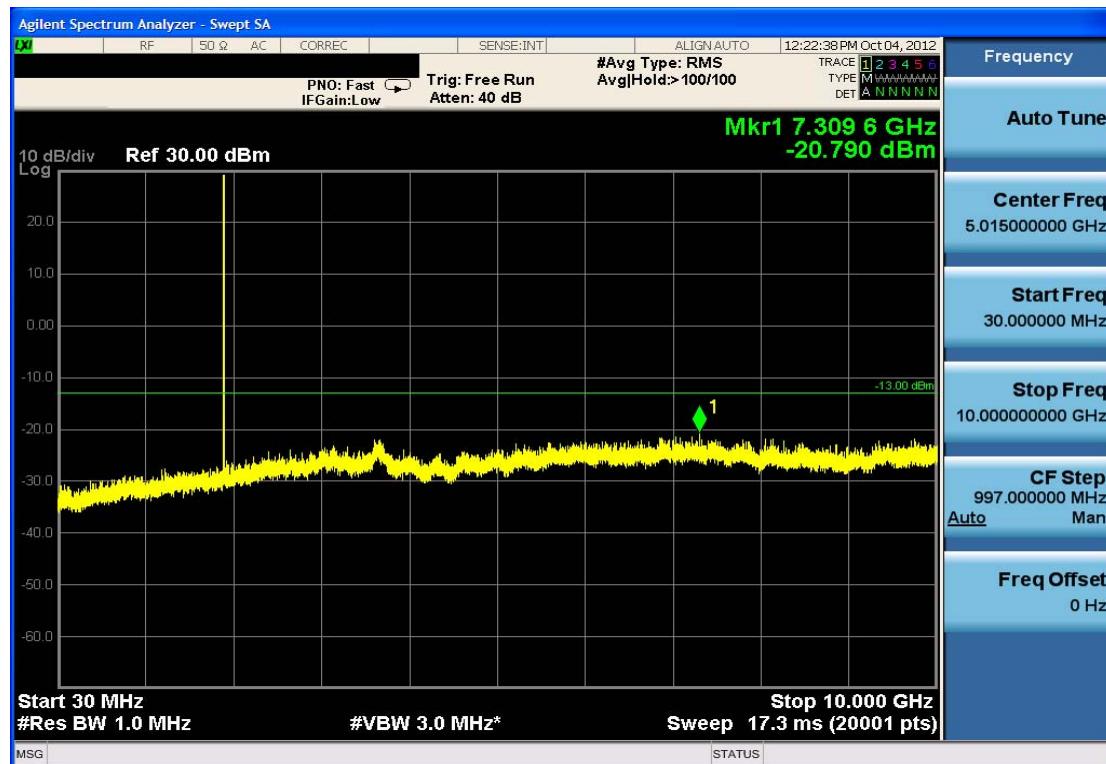

Plot 7-17. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 47 of 55

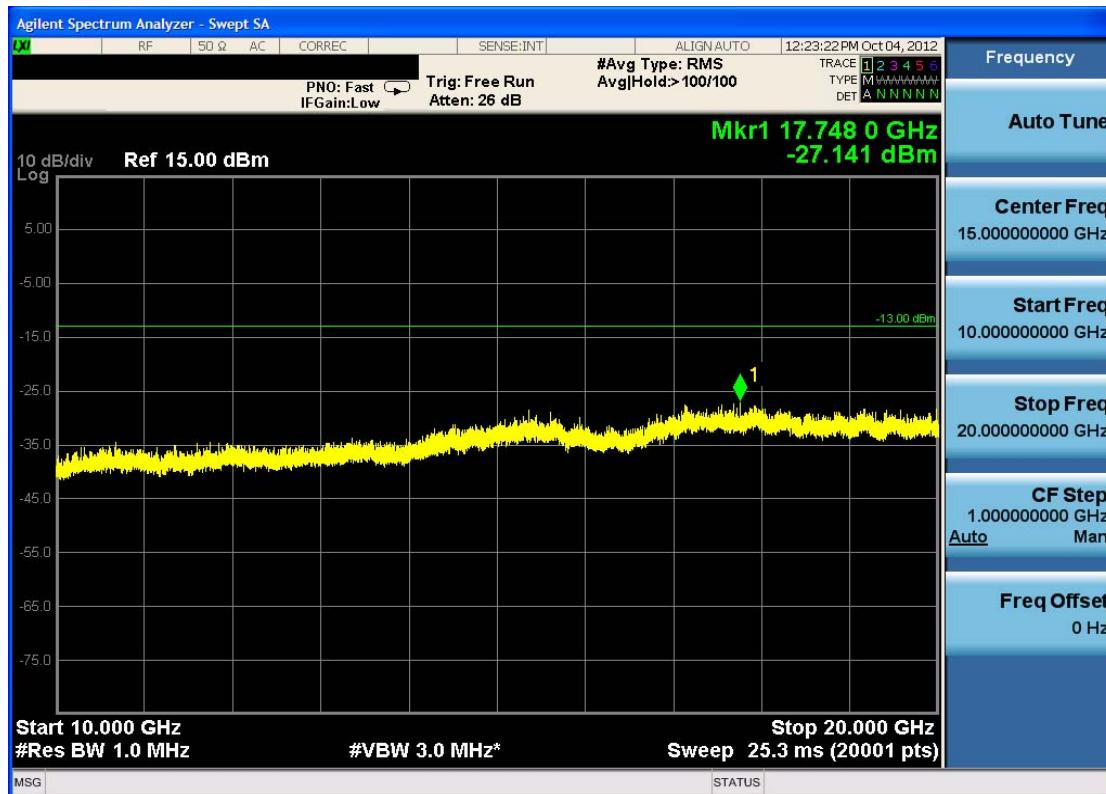


Plot 7-18. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)




Plot 7-19. Band Edge Plot (PCS GSM Mode – Ch. 810)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 48 of 55

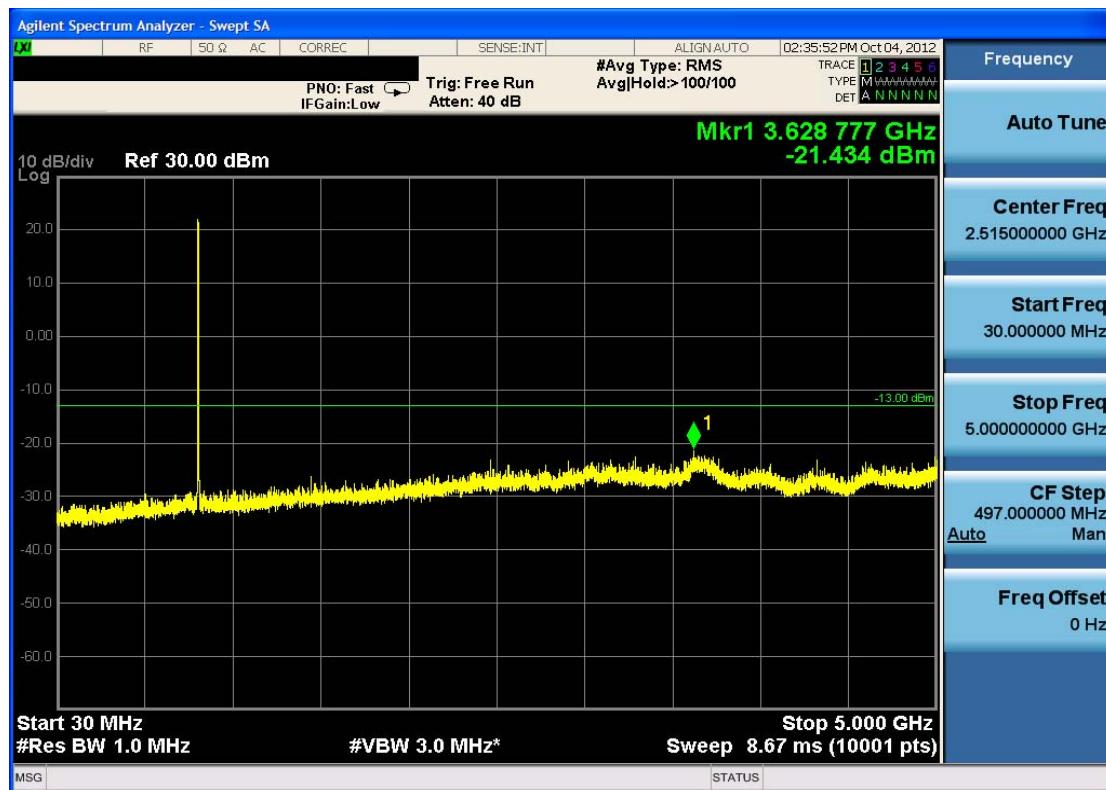

Plot 7-20. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

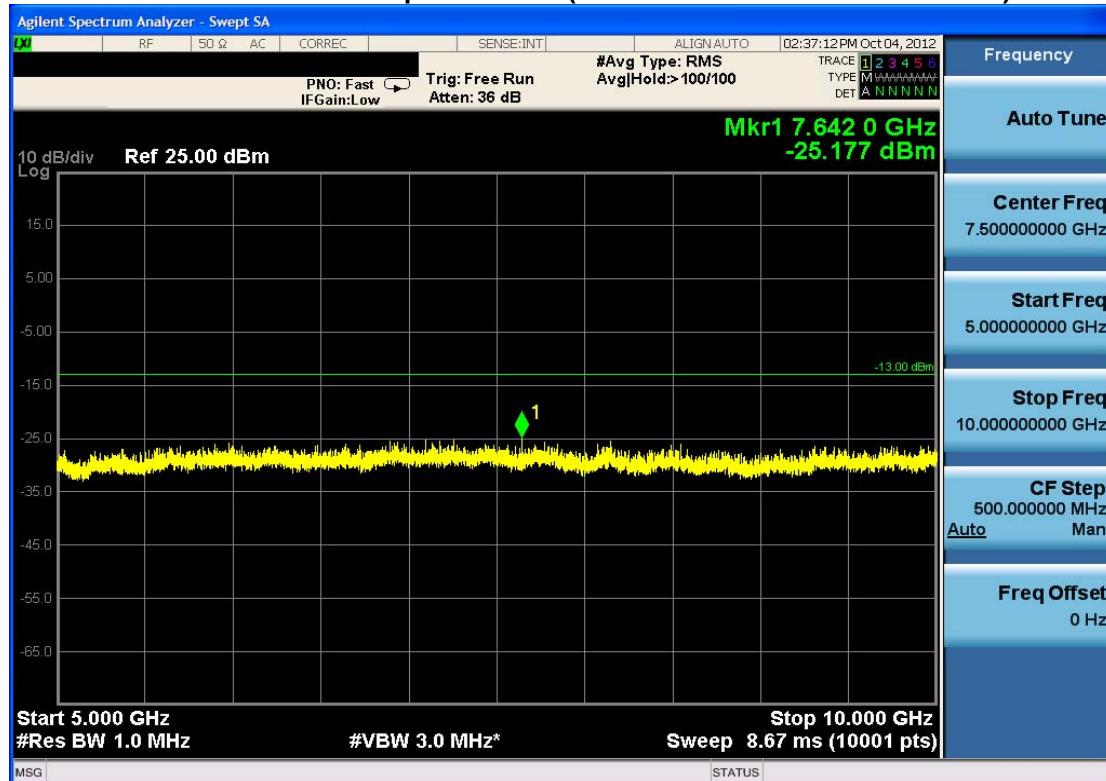

Plot 7-21. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			NEC	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			Page 49 of 55




Plot 7-22. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)




Plot 7-23. 4MHz Span Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: A98-EKO8545	 FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	NEC	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset	Page 50 of 55

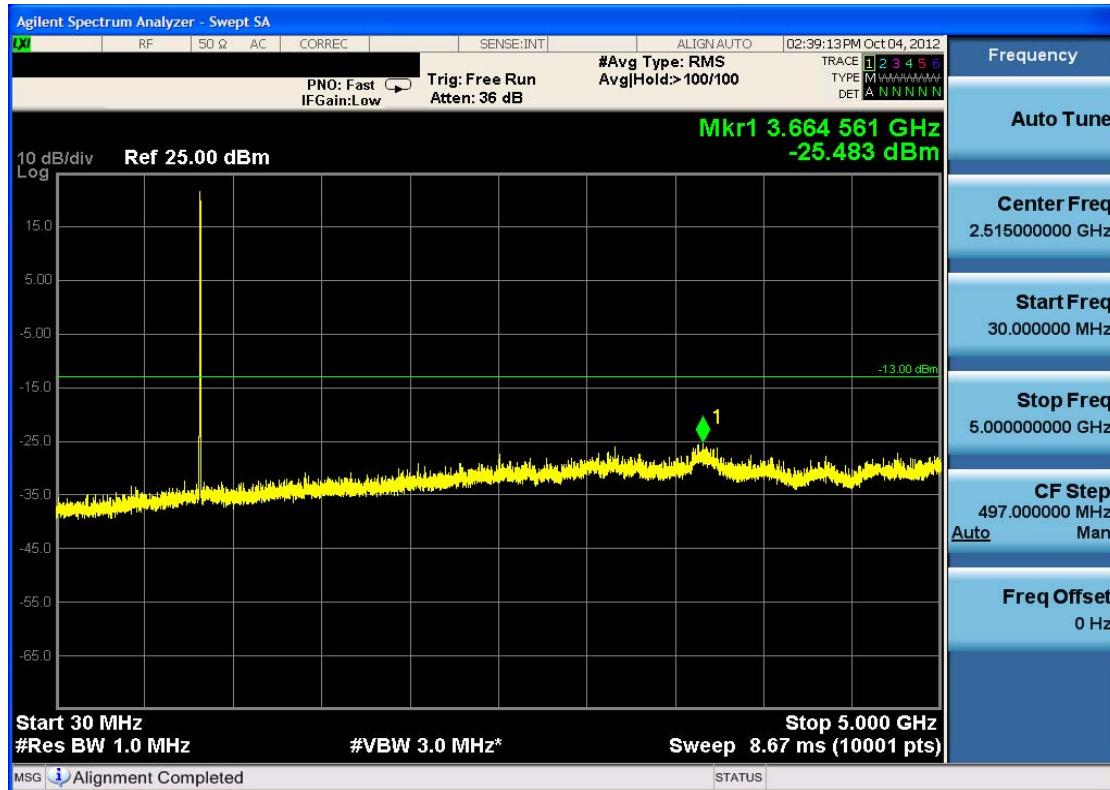


Plot 7-24. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

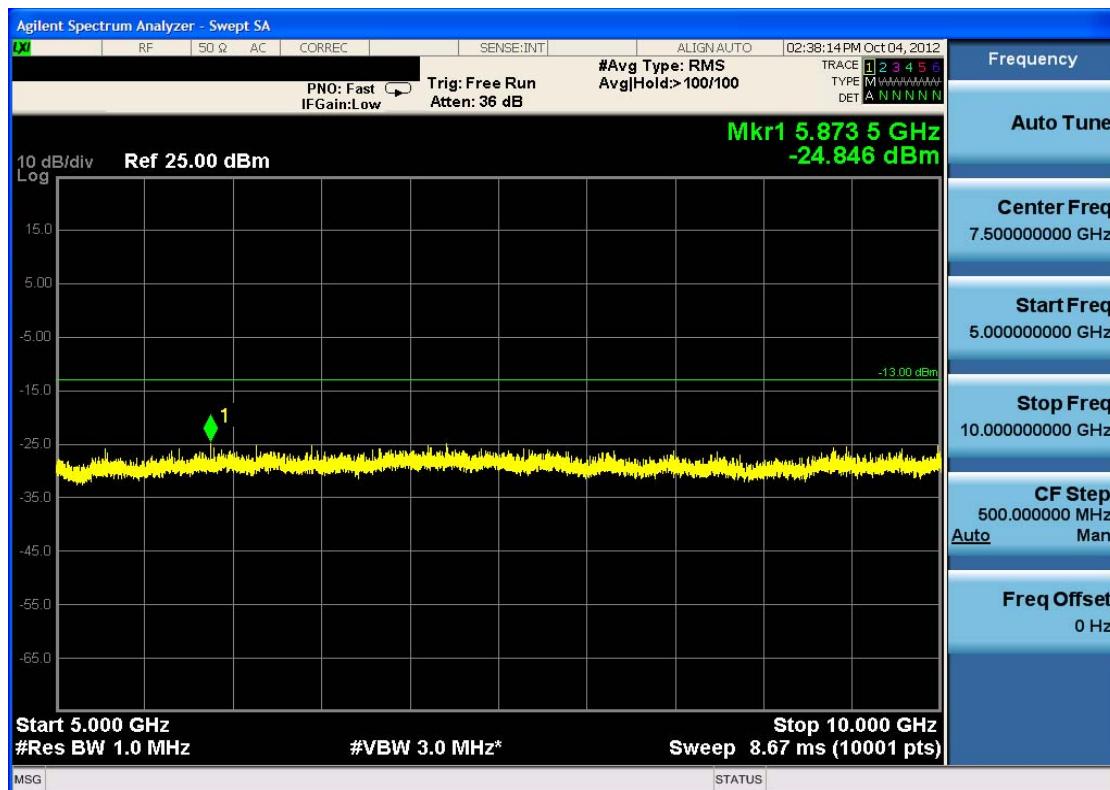


Plot 7-25. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		

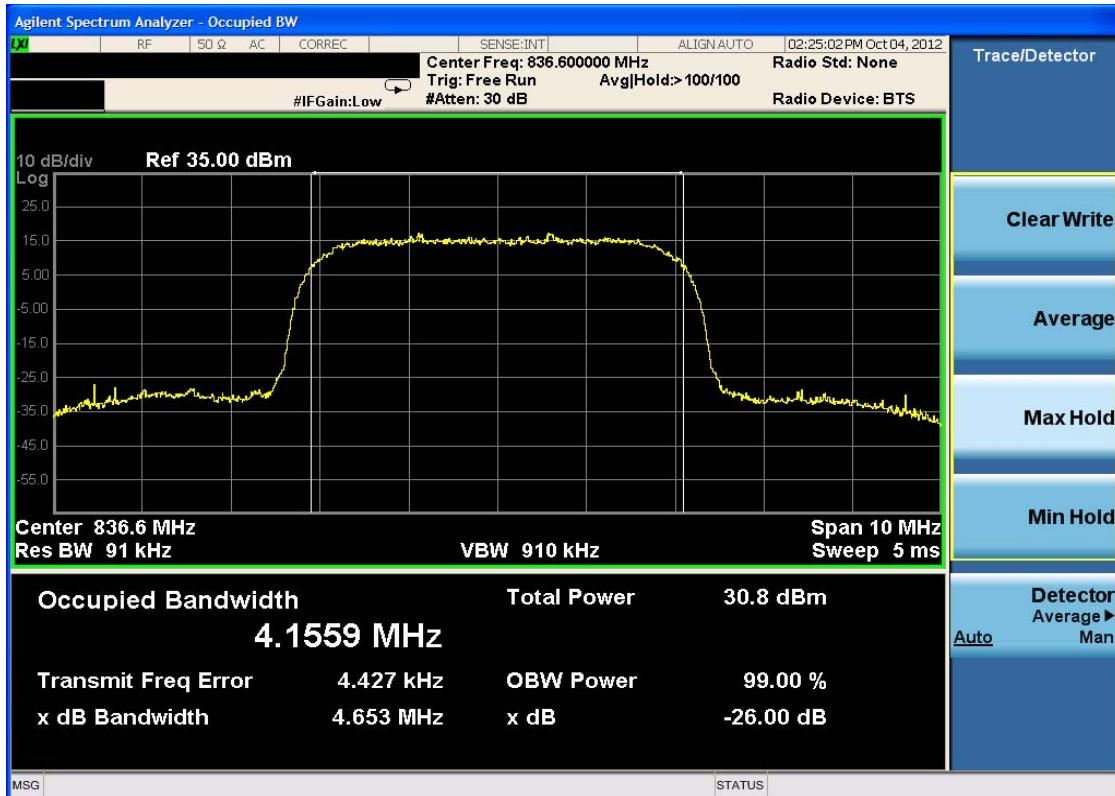


Plot 7-26. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

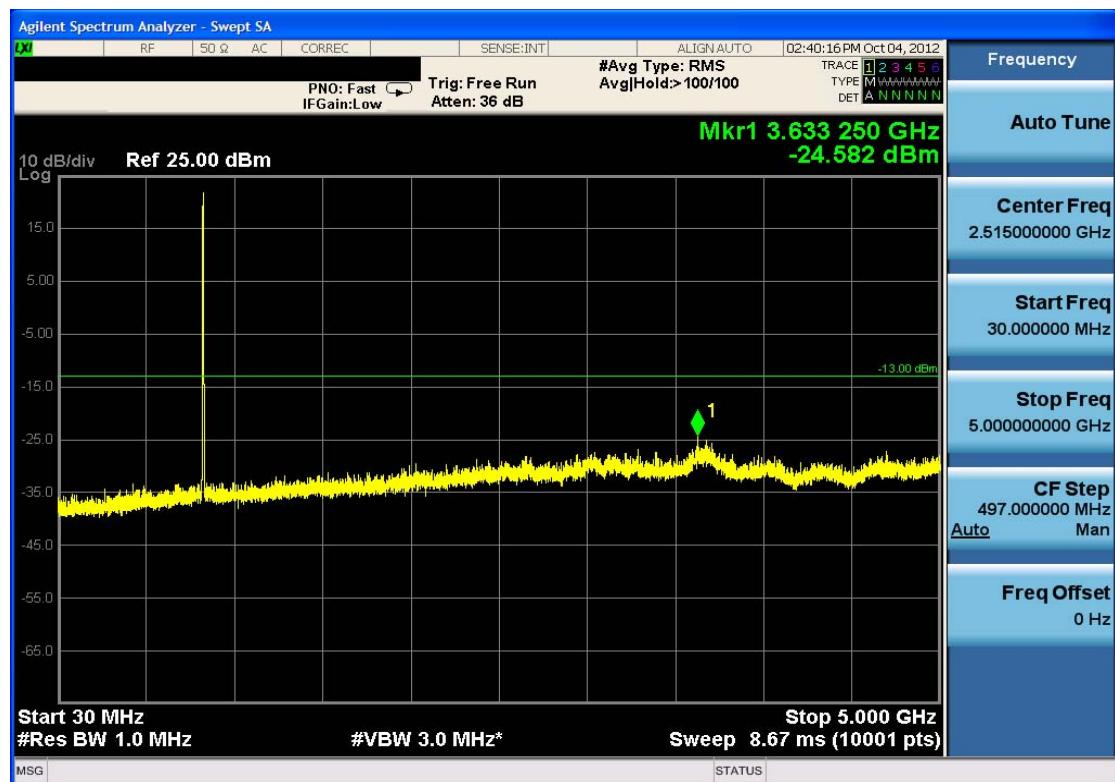

Plot 7-27. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			NEC	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset			

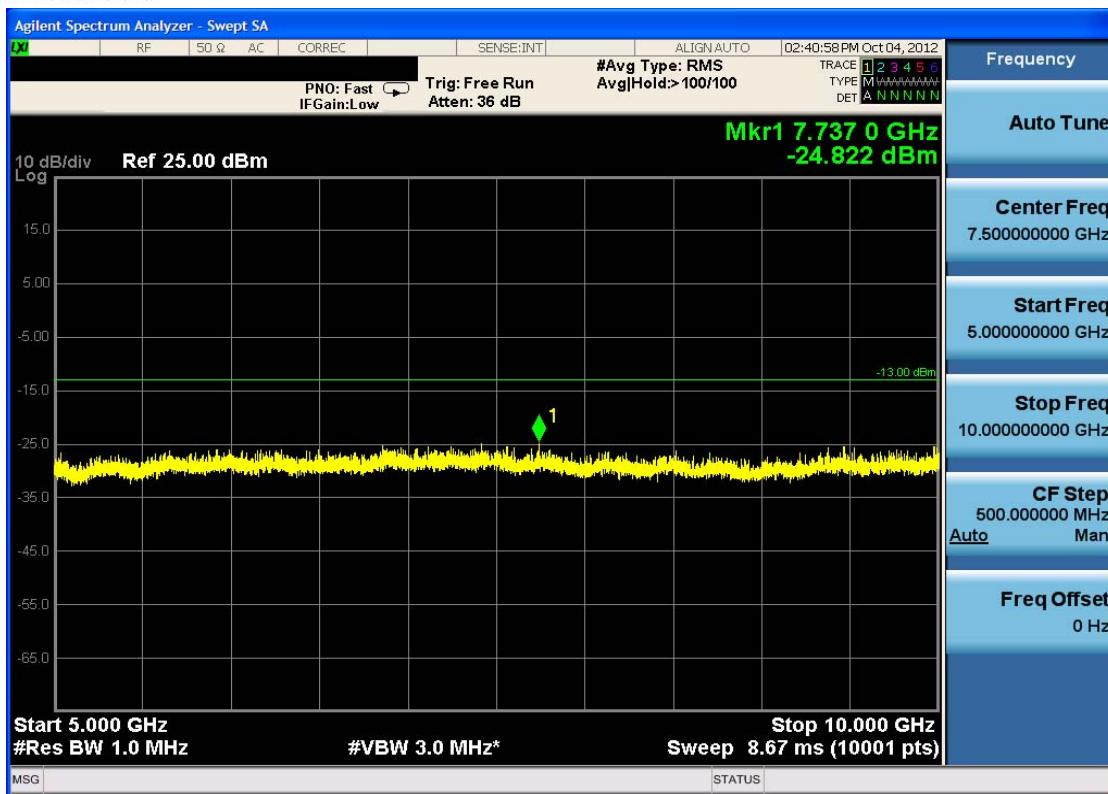


Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)



Plot 7-29. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A98-EKO8545	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 53 of 55

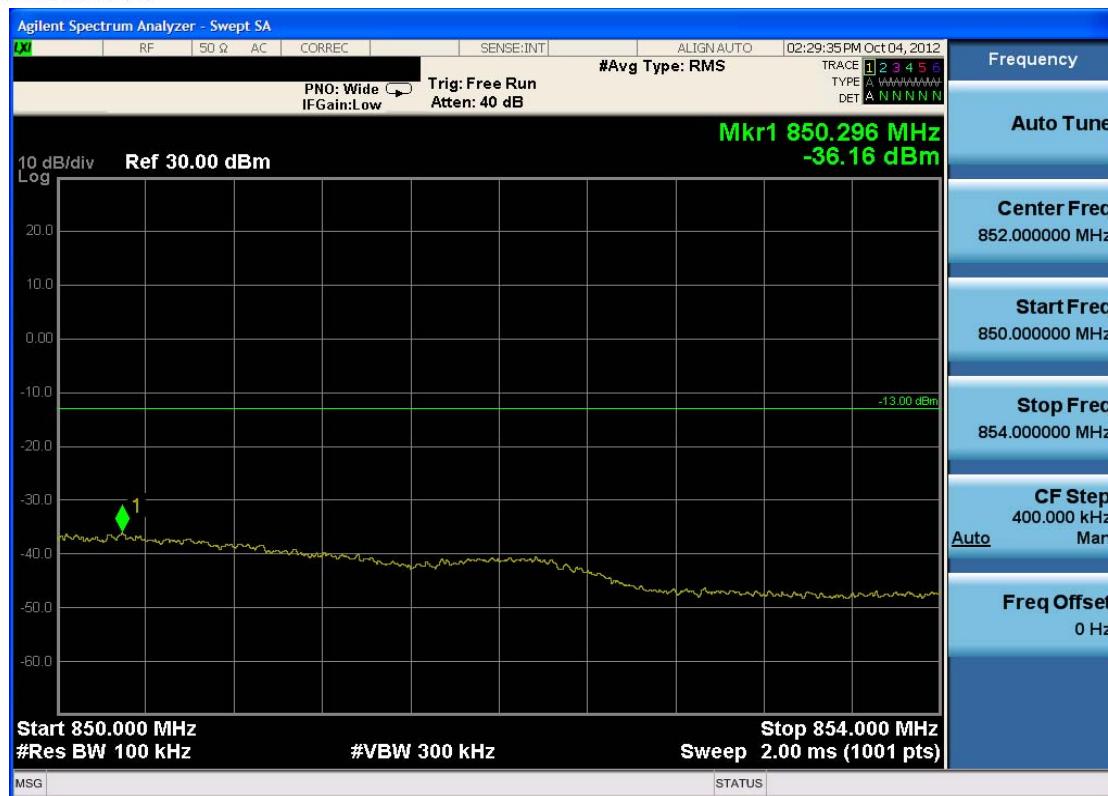

Plot 7-30. 4MHz Span Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A98-EKO8545	 <b>FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset	Page 54 of 55

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **NEC Portable Handset FCC ID: A98-EKO8545** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules and RSS-132 and RSS-133 of the Industry Canada rules.

FCC ID: A98-EKO8545	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>NEC</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1211211664.A98	Test Dates: 11/23/2012	EUT Type: Portable Handset		Page 55 of 55