



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 22 & 24 Certification

Applicant Name:

Motorola Inc.
1301 East Algonquin Road
Schaumburg, IL 60196

Date of Testing:

12/29/06 - 1/15/07

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0611291072

FCC ID: ABZ89FT7618

APPLICANT: MOTOROLA INC.

Application Type: Certification

FCC Classification: PCS Licensed Transmitter (PCB)

FCC Rule Part(s): §2; §22(H), §24(E)

EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter

Model(s): ML900

Tx Frequency Range: 824.20 - 848.80MHz (Cell. GSM) / 1850.20 - 1909.80MHz (PCS GSM)

Max. RF Output Power: 0.338 W ERP Cell GSM (25.283 dBm) / 0.982 W EIRP PCS GSM (29.921 dBm)

0.141 W ERP EDGE850 (21.483 dBm) / 0.606 W EIRP EDGE1900 (27.821 dBm)

0.114 W ERP WCDMA850 (20.573 dBm)/0.515 W EIRP WCDMA1900 (27.121 dBm)

Emission Designator(s): 244KGXW (Cellular GSM), 244KGXW (PCS GSM)

243KG7W (EDGE850), 246KG7W (EDGE1900)

4M15F9W (Cellular WCDMA), 4M15F9W (PCS WCDMA)

Test Device Serial No.: *identical prototype [S/N: N/A]*

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant Conditions: Output power is ERP for Part 22 and EIRP for Part 24. The antenna installation must provide a separation distance of 20 cm from users and nearby persons and must not be co-located or operating in conjunction with any other antenna or transmitter other than those modules approved for use with the ML900 Series PC. This device contains functions that are not operational in U.S. Territories.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Randy Ortanez
President




FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 1 of 29

T A B L E O F C O N T E N T S

FCC PART 22 & 24 MEASUREMENT REPORT.....	3
1.0 INTRODUCTION	4
1.1 MEASUREMENT PROCEDURE	4
1.2 SCOPE	4
1.3 TESTING FACILITY	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
3.0 DESCRIPTION OF TESTS.....	6
3.1 OCCUPIED BANDWIDTH EMISSION LIMITS	6
3.2 CELLULAR - BASE FREQUENCY BLOCKS.....	6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....	6
3.4 PCS - BASE FREQUENCY BLOCKS	7
3.5 PCS - MOBILE FREQUENCY BLOCKS	7
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	7
3.7 RADIATED SPURIOUS AND HARMONIC EMISSIONS	7
3.8 FREQUENCY STABILITY / TEMPERATURE VARIATION	8
4.0 TEST EQUIPMENT CALIBRATION DATA.....	9
5.0 SAMPLE CALCULATIONS.....	10
6.0 TEST RESULTS.....	11
6.1 EFFECTIVE RADIATED POWER OUTPUT DATA	12
6.2 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....	13
6.3 CELLULAR GSM BAND RADIATED MEASUREMENTS	14
6.4 CELLULAR WCDMA BAND RADIATED MEASUREMENTS	17
6.5 PCS GSM BAND RADIATED MEASUREMENTS	20
6.6 PCS WCDMA BAND RADIATED MEASUREMENTS	23
7.0 CONCLUSION.....	26
EXHIBIT A – TEST SETUP PHOTOGRAPHS	27
EXHIBIT B – INTERNAL PHOTOGRAPHS	28
EXHIBIT C – EXTERNAL PHOTOGRAPHS	29

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 2 of 29



MEASUREMENT REPORT

FCC Part 22 & 24

A. §2.1033 General Information

APPLICANT: Motorola Inc.
APPLICANT ADDRESS: 1301 East Algonquin Road
Schaumburg, IL 60196
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E)
MODEL NAME: ML900
FCC ID: ABZ89FT7618
FCC CLASSIFICATION: PCS Licensed Transmitter (PCB)
EMISSION DESIGNATOR(S): 244KGXW (Cellular GSM), 244KGXW (PCS GSM)
243KG7W (EDGE850), 246KG7W (EDGE1900)
4M15F9W (Cellular WCDMA), 4M15F9W (PCS WCDMA)
MODE: GSM/EDGE/WCDMA
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: N/A Production Pre-Production
DATE(S) OF TEST: 12/29/06 - 1/15/07
TEST REPORT S/N: 0611291072

Test Facility / Accreditations

• PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).

• PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.

• PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.

• PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).

• PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).

• PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

• PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 3 of 29

1.0 INTRODUCTION

1.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 1-1). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

Deviation from Measurement Procedure.....None


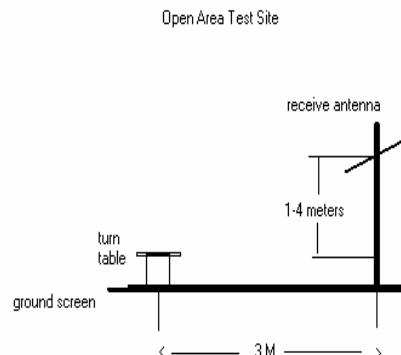


Figure 1-1. Diagram of 3-meter outdoor test range

1.2 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 Testing Facility

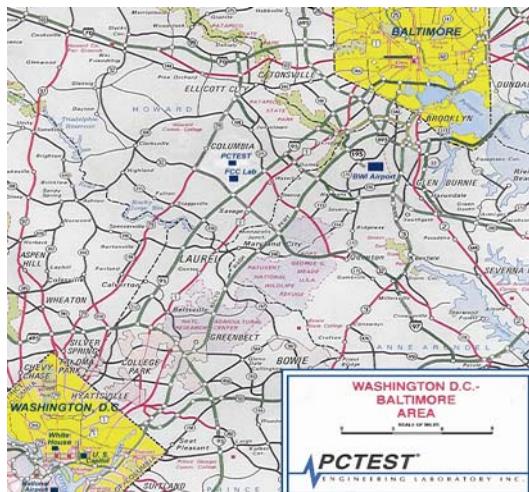

These measurement tests were conducted at PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

Figure 1-3. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 4 of 29

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Motorola Inc. Mobile Computer with GSM/ EDGE/ WCDMA Transmitter Model ML900 FCC ID: ABZ89FT7618**. The EUT is a mobile computer platform used for ruggedized environments and contains a UMTS Modem module. The Modem has been previously FCC Certified as a module

(FCC ID: N7N-MC8765). The module is being integrated into the ML900 notebook. This test report covers test data for the ERP, EIRP, and radiated spurious emissions measurements. As no changes have been made to the original module the data at the antenna terminal remains valid and is covered by a separate test report.

The EUT consisted of the following component(s):

Manufacturer / Model	FCC ID	EUT Description
Motorola Inc./ ML900	ABZ89FT7618	Mobile Computer
Sierra Wireless Inc./ MC8765	N7NMC8765	GSM/ EDGE/ WCDMA Module

Table 2-1. EUT Equipment Description

2.2 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- None

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 5 of 29


3.0 DESCRIPTION OF TESTS

3.1 Occupied Bandwidth Emission Limits


§2.1049, 22.917(a), 24.238(a)

- a. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- b. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- c. When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- d. The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

3.2 Cellular - Base Frequency Blocks

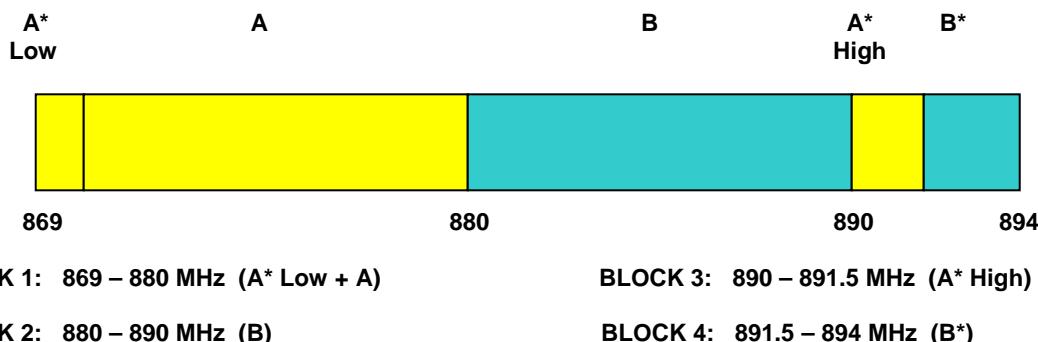


3.3 Cellular - Mobile Frequency Blocks

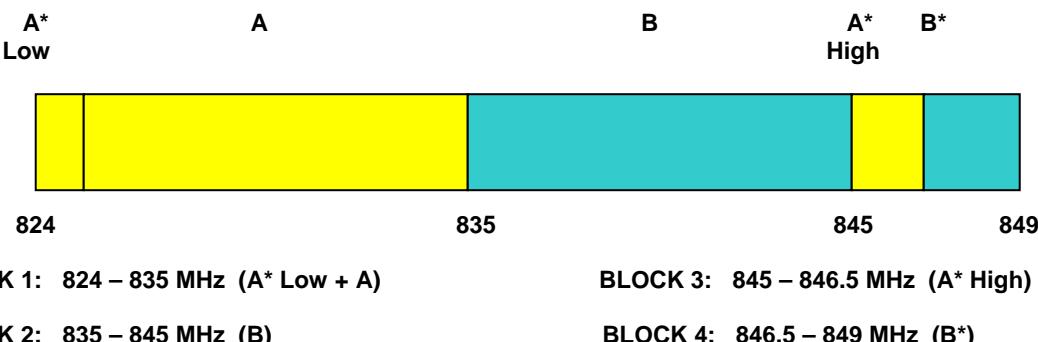


FCC ID: ABZ89FT7618	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter	Page 6 of 29
© 2007 PCTEST Engineering Laboratory, Inc.			REV 1.1GWW



3.4 PCS - Base Frequency Blocks

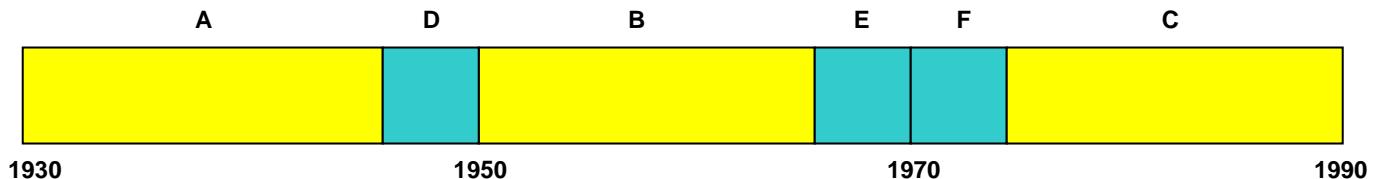

3.5 PCS - Mobile Frequency Blocks

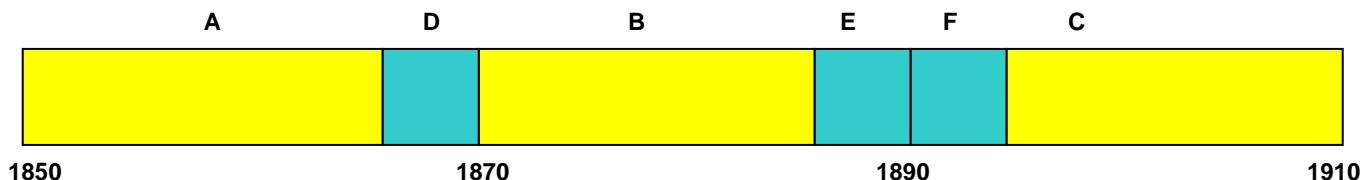

3.6 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a); RSS-129 (8.1.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

3.7 Radiated Spurious and Harmonic Emissions

§2.1053, 22.917(a), 24.238(a); RSS-129 (8.1.1), RSS-133 (6.5.1(i))

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 7 of 29



3.8 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235; RSS-132 (4.3) / RSS-133 (6.3)

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5 \text{ ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (20°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (usually 14-16 hours) the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within one minute after applying power to the transmitter.
4. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. At least a period of one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 8 of 29

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4404B/E4407B ESA Spectrum Analyzer	04/20/06	Annual	04/20/07	US39210313
Agilent	E5515C Wireless Communications Test Set	07/27/06	Annual	07/27/07	GB41450275
Agilent	E5515C Wireless Communications Test Set	10/06/06	Annual	10/06/07	GB43193972
Agilent	E4432B ESG-D Series Signal Generator	08/08/06	Annual	08/08/07	US40053896
Agilent	8648D (9kHz-4GHz) Signal Generator	10/01/06	Annual	10/01/07	3613A00315
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/24/06	Biennial	08/23/08	9203-2178
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/25/06	Biennial	08/24/08	9704-5182
Gigatronics	8657A Universal Power Meter	04/07/06	Annual	04/07/07	8650319
Gigatronics	80701A (0.05-18GHz) Power Sensor	04/11/06	Annual	04/11/07	1833460
Rohde & Schwarz	NRVS Power Meter	06/01/05	Biennial	06/01/07	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	06/01/05	Biennial	06/01/07	846076/007
Rohde & Schwarz	CMU200 Base Station Simulator	11/08/06	Annual	11/08/07	107826
Rohde & Schwarz	CMU200 Base Station Simulator	07/26/06	Annual	07/26/07	833855/010
Rohde & Schwarz	CMU200 Base Station Simulator	04/20/06	Annual	04/20/07	836371/079
Agilent	HP 8566B (100Hz-22GHz)	12/21/06	Annual	12/21/07	3638A08713
Agilent	E4448A (3Hz-50GHz)	09/22/06	Annual	09/22/07	US42510244
Agilent	E8257D (250kHz-20GHz) Signal Generator	02/11/06	Annual	02/11/07	MY45470194
Agilent	E8257D (250kHz-20GHz) Signal Generator	03/30/06	Annual	03/30/07	MY44320964
Gigatronics	8651A (50MHz-18GHz)	07/28/06	Annual	07/28/07	1834052
Gigatronics	80701A (0.05-18GHz) Power Sensor	08/04/06	Annual	08/04/07	1835299
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/12/06	Annual	12/12/07	N/A
Agilent	HP 85685A (20Hz-2GHz) Preselector	12/12/06	Annual	12/12/07	N/A
Agilent	HP 8566B Opt. 462 Impulse Bandwidth	12/12/06	Annual	12/12/07	3701A22204
EMCO	3115 (1-18GHz) Horn Antenna	04/04/05	Biennial	04/04/07	9205-3874
Compliance Design	A100 Roberts Dipoles	08/31/05	Biennial	08/31/07	5118
EMCO	Dipole Pair	09/21/06	Biennial	09/20/08	23951
SOLAR	8012-50 LISN (2)	11/18/05	Biennial	11/18/07	0313233, 0310234
Agilent	HP 8901A Modulation Analyzer	06/05/06	Annual	06/05/07	2432A03467
Agilent	HP 8903 B Audio Analyzer	06/01/06	Annual	06/01/07	3011A09025
K & L	11SH10 Band Pass Filter	N/A	Annual	N/A	1300/4000
K & L	11SH10 Band Pass Filter	N/A	Annual	N/A	4000/12000
Agilent	HP 8495A (0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
-	263-10dB (DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
Pasternack	PE2208-6 Bidirectional Coupler	N/A		N/A	N/A
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A

Table 4-1. Test Equipment

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 9 of 29

5.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission - PCS Band

Example: GSM Channel 512 PCS Mode 2nd Harmonic (3700.40 MHz)

The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was $25.501 \text{ dBm} - (-24.80) = 50.3 \text{ dBc}$.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 10 of 29

6.0 TEST RESULTS

Summary

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards. The radio was transmitting at full power on the specified channels. The channels tested are high, middle and low of the allocated bands. Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

Method/System: PCS Licensed Transmitter (PCB)

Mode(s): GSM/EDGE/WCDMA

FCC Part Section(s)	RSS Section	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
2.1049, 22.917(a), 24.238(a)	N/A	Occupied Bandwidth	N/A	CONDUCTED	N/A	Attached Sierra Test Report
2.1051, 22.917(a), 24.238(a)	RSS-132 (4.5.1) / RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	< 43 + log ₁₀ (P[Watts]) at Band Edge / for all out-of-band emissions		PASS	Attached Sierra Test Report
2.1046	N/A	Transmitter Conducted Output Power	N/A		N/A	Attached Sierra Test Report
22.913(a)(2)	RSS-132 (4.4) [SRSP-503(5.1.3)]	Effective Radiated Power	< 7 Watts max. ERP (<6.3 Watts max. ERP (IC))	RADIATED	PASS	Section 6.1
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.2
2.1053, 22.917(a), 24.238(a)	RSS-132 (4.5.1) / RSS-133 (6.5.1)	Undesirable Emissions	< 43 + log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.3 – 6.6
2.1055, 22.355, 24.235	RSS-132 (4.3) / RSS-133 (6.3)	Frequency Stability	< 2.5 ppm		PASS	Attached Sierra Test Report
Computer Part 15B						
15.107	RSS-Gen (7.2.2)	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Part 15B DOC Test Report
15.109	RSS-132 (4.6) / RSS-133(6.7(a)) / [RSS-Gen (7.2.2)] / RSS-210 (7.3)	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Part 15B DOC Test Report
RF EXPOSURE (SAR)						
2.1093	RSS-102	SAR Test or MPE	1.6 W/kg (SAR Limit) 1 mW/cm ² (MPE Limit)	> 20 cm	PASS	MPE Report

Table 6-1. Summary of Test Results

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 11 of 29

6.1 Effective Radiated Power Output Data (ERP)

§22.913(a)(2); RSS-132 (4.4) [SRSP-503(5.1.3)]

POWER: High (GSM Mode)

Freq. Tuned (MHz)	REF. LEVEL (dBm)	Mode	POL (H/V)	ERP (W)	ERP (dBm)
824.20	-16.800	GSM	H	0.280	24.473
836.60	-17.700	GSM	H	0.236	23.733
848.80	-16.300	GSM	H	0.338	25.283
848.80	-20.100	EDGE850	H	0.141	21.483

Table 6-4. Effective Radiated Power Output Data (GSM)

POWER: High (WCDMA Mode)

Freq. Tuned (MHz)	REF. LEVEL (dBm)	Mode	POL (H/V)	ERP (W)	ERP (dBm)
826.40	-20.700	WCDMA	V	0.114	20.573
836.40	-21.100	WCDMA	V	0.108	20.333
846.60	-21.100	WCDMA	V	0.112	20.483

Table 6-5. Effective Radiated Power Output Data (WCDMA)

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 12 of 29

6.2 Equivalent Isotropic Radiated Power Output Data (EIRP)

§24.232(c); RSS-133 (6.4) [SRSP-510 (5.1.2)]

POWER: High (GSM Mode)

FREQ. (MHz)	REF. LEVEL (dBm)	Mode	POL (H/V)	EIRP (dBm)	EIRP (W)
1850.20	-14.100	GSM	H	28.981	0.791
1880.00	-15.000	GSM	H	28.251	0.669
1909.80	-13.500	GSM	H	29.921	0.982
1909.80	-15.600	EDGE1900	H	27.821	0.606

Table 6-6. Equivalent Isotropic Radiated Power Output Data (GSM)

POWER: High (WCDMA Mode)

FREQ. (MHz)	REF. LEVEL (dBm)	Mode	POL (H/V)	EIRP (dBm)	EIRP (W)
1852.40	-16.800	WCDMA	V	26.281	0.425
1880.00	-17.700	WCDMA	V	25.551	0.359
1907.60	-16.300	WCDMA	V	27.121	0.515

Table 6-7. Equivalent Isotropic Radiated Power Output Data (WCDMA)

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 13 of 29

6.3 Cellular GSM Band Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz
 CHANNEL: 128
 MEASURED OUTPUT POWER: 25.283 dBm = 0.338 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W)$ 38.28 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBD)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-28.83	6.10	-22.73	H	48.0
2472.60	-31.25	6.70	-24.55	H	49.8
3296.80	-32.09	6.80	-25.29	H	50.6
4121.00	-33.58	6.50	-27.08	H	52.4
4945.20	-41.48	7.00	-34.48	H	59.8

Table 6-8. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 14 of 29

Cellular GSM Band Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MEASURED OUTPUT POWER: 25.283 dBm = 0.338 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.28 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-32.53	6.10	-26.43	H	51.7
2509.80	-37.16	6.70	-30.46	H	55.7
3346.40	-31.20	6.80	-24.40	H	49.7
4183.00	-35.31	6.50	-28.81	H	54.1
5019.60	-41.60	7.00	-34.60	H	59.9

Table 6-9. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 15 of 29

Cellular GSM Band Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MEASURED OUTPUT POWER: 25.283 dBm = 0.338 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.28 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-33.64	6.10	-27.54	H	52.8
2546.40	-40.96	6.70	-34.26	H	59.5
3395.20	-36.31	6.80	-29.51	H	54.8
4244.00	-42.35	6.50	-35.85	H	61.1
5092.80	-42.34	7.00	-35.34	H	60.6

Table 6-10. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 16 of 29

6.4 Cellular WCDMA Band Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132 (Low)
 MEASURED OUTPUT POWER: 20.573 dBm = 0.114 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.58 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-40.93	6.10	-34.83	V	55.4
2479.20	-47.15	6.70	-40.45	V	61.0
3305.60	-47.89	6.80	-41.09	V	61.7

Table 6-11. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 17 of 29



Cellular WCDMA Band Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 835.00 MHz
 CHANNEL: 4175 (Mid)
 MEASURED OUTPUT POWER: 20.573 dBm = 0.114 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.57 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1670.00	-38.33	6.10	-32.23	V	52.8
2505.00	-44.16	6.70	-37.46	V	58.0
3340.00	-47.30	6.80	-40.50	V	61.1

Table 6-12. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4175)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 18 of 29



Cellular WCDMA Band Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233 (High)
 MEASURED OUTPUT POWER: 20.573 dBm = 0.114 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 33.57$ dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-40.84	6.10	-34.74	V	55.3
2539.80	-46.86	6.70	-40.16	V	60.7
3386.40	-47.21	6.80	-40.41	V	61.0

Table 6-13. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 19 of 29

6.5 PCS GSM Band Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MEASURED OUTPUT POWER: 29.921 dBm = 0.982 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 42.92 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-48.40	6.10	-42.30	V	72.2
5550.60	-53.25	6.70	-46.55	V	76.5
7400.80	-38.97	6.80	-32.17	V	62.1
9251.00	-36.36	6.50	-29.86	H	59.8
11101.20	-36.39	7.00	-29.39	H	59.3

Table 6-14. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 20 of 29



PCS GSM Band Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 29.921 dBm = 0.982 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 42.92 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-55.65	6.10	-49.55	V	79.5
5640.00	-42.83	6.70	-36.13	V	66.0
7520.00	-40.42	6.80	-33.62	V	63.5
9400.00	-33.23	6.50	-26.73	H	56.6
11280.00	-40.37	7.00	-33.37	H	63.3

Table 6-15. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 21 of 29

PCS GSM Band Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz
 CHANNEL: 810
 MEASURED OUTPUT POWER: 29.921 dBm = 0.982 W
 MODULATION SIGNAL: GSM
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 42.92 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-49.99	9.50	-40.49	V	70.4
5729.40	-50.27	10.60	-39.67	V	69.6
7639.20	-42.45	11.30	-31.15	V	61.1
9549.00	-42.41	11.00	-31.41	H	61.3
11458.80	-39.11	12.76	-26.35	H	56.3

Table 6-16. Radiated Spurious Data (PCS GSM Mode – Ch. 810)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 22 of 29

6.6 PCS WCDMA Band Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1852.40 MHz
 CHANNEL: 9262 (Low)
 MEASURED OUTPUT POWER: 27.121 dBm = 0.515 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.12 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3704.80	-16.15	8.70	-7.45	V	34.6
5557.20	-33.30	9.70	-23.60	V	50.7
7409.60	-34.32	9.90	-24.42	V	51.5

Table 6-17. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 23 of 29



PCS WCDMA Band Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 9400 (Mid)
 MEASURED OUTPUT POWER: 27.121 dBm = 0.515 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.12 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-18.50	8.70	-9.80	V	36.9
5640.00	-31.18	9.70	-21.48	V	48.6
7520.00	-36.87	9.90	-26.97	V	54.1

Table 6-18. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 24 of 29



PCS WCDMA Band Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538 (High)
 MEASURED OUTPUT POWER: 27.121 dBm = 0.515 W
 MODULATION SIGNAL: WCDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 40.12 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3815.20	-16.04	8.70	-7.34	V	34.5
5722.80	-25.62	9.70	-15.92	V	43.0
7630.40	-34.10	9.90	-24.20	V	51.3

Table 6-19. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Active at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery.

FCC ID: ABZ89FT7618		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 25 of 29

7.0 CONCLUSION

The data collected shows that the **Motorola Inc. Mobile Computer with GSM/ EDGE/ WCDMA Transmitter FCC ID: ABZ89FT7618** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.

FCC ID: ABZ89FT7618	 PCTEST WIRELESS	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter		Page 26 of 29



EXHIBIT A – TEST SETUP PHOTOGRAPHS

FCC ID: ABZ89FT7618	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter



EXHIBIT B – INTERNAL PHOTOGRAPHS

FCC ID: ABZ89FT7618	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter



EXHIBIT C – EXTERNAL PHOTOGRAPHS

FCC ID: ABZ89FT7618	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0611291072	Test Dates: 12/29/06 - 1/15/07	EUT Type: Mobile Computer with GSM/ EDGE/ WCDMA Transmitter