



# FCC TEST REPORT

## (Part 90 Subpart Z)

**REPORT NO.:** RF981009L01

**MODEL NO.:** 3630APC

**RECEIVED:** Oct. 09, 2009

**TESTED:** Oct. 13 ~ Nov. 24, 2009

**ISSUED:** Nov. 27, 2009

**APPLICANT:** Motorola Inc.

**ADDRESS:** 1475 W SHURE DRIVE, ARLINGTON HEIGHTS,  
ILLINOIS 60004, UNITED STATES

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou  
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 125 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

## TABLE OF CONTENTS

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS .....	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
3.4	DESCRIPTION OF SUPPORT UNITS .....	11
4	TEST TYPES AND RESULTS .....	12
4.1	OUTPUT POWER AND POWER DENSITY MEASUREMENT .....	12
4.1.1	LIMITS OF OUTPUT POWER AND POWER DENSITY .....	12
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES .....	13
4.1.4	TEST SETUP.....	13
4.1.5	EUT OPERATING CONDITIONS .....	13
4.1.6	TEST RESULTS .....	14
4.2	FREQUENCY STABILITY MEASUREMENT.....	32
4.2.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	32
4.2.2	TEST INSTRUMENTS.....	32
4.2.3	TEST PROCEDURE.....	33
4.2.4	TEST SETUP.....	33
4.2.5	EUT OPERATING CONDITIONS .....	33
4.2.6	TEST RESULTS .....	34
4.3	EMISSION BANDWIDTH MEASUREMENT .....	38
4.3.1	LIMITS OF EMISSION BANDWIDTH MEASUREMENT .....	38
4.3.2	TEST INSTRUMENTS.....	38
4.3.3	TEST PROCEDURE.....	38
4.3.4	TEST SETUP.....	38
4.3.5	EUT OPERATING CONDITIONS .....	38
4.3.6	TEST RESULTS .....	39
4.4	EMISSION MASKS.....	51
4.4.1	LIMITS OF EMISSION MASKS .....	51
4.4.2	TEST INSTRUMENTS.....	51
4.4.3	TEST SETUP.....	51
4.4.4	TEST PROCEDURES .....	52
4.4.5	EUT OPERATING CONDITION.....	52
4.4.6	TEST RESULTS .....	53
4.5	CONDUCTED SPURIOUS EMISSIONS .....	65
4.5.1	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	65
4.5.2	TEST INSTRUMENTS.....	65
4.5.3	TEST PROCEDURE.....	66
4.5.4	TEST SETUP.....	66
4.5.5	EUT OPERATING CONDITIONS .....	66
4.5.6	TEST RESULTS .....	67
4.6	RADIATED EMISSION MEASUREMENT (BELOW 1GHz).....	103
4.6.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	103



A D T

4.6.2 TEST INSTRUMENTS.....	104
4.6.3 TEST PROCEDURES .....	105
4.6.4 DEVIATION FROM TEST STANDARD .....	105
4.6.5 TEST SETUP.....	106
4.6.6 EUT OPERATING CONDITIONS .....	106
4.6.7 TEST RESULTS .....	107
4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz) .....	111
4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT.....	111
4.7.2 TEST INSTRUMENTS.....	111
4.7.3 TEST PROCEDURES .....	111
4.7.4 DEVIATION FROM TEST STANDARD .....	111
4.7.5 TEST SETUP.....	111
4.7.6 EUT OPERATING CONDITIONS .....	111
4.7.7 TEST RESULTS .....	112
5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....	124
6 INFORMATION ON THE TESTING LABORATORIES .....	125



## 1 CERTIFICATION

**PRODUCT:** 3630APC Outdoor Connectorized Access Point

**MODEL:** 3630APC

**BRAND:** Motorola

**APPLICANT:** Motorola Inc.


**TESTED:** Oct. 13 ~ Nov. 24, 2009


**TEST SAMPLE:** ENGINEERING SAMPLE

**TEST STANDARDS:** FCC Part 90, Subpart Z

The above equipment (Model No.: 3630APC) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** :  , DATE: Nov. 27, 2009  
Andrea Hsia / Specialist

**TECHNICAL  
ACCEPTANCE** :  , DATE: Nov. 27, 2009  
Responsible for RF Long Chen / Senior Engineer

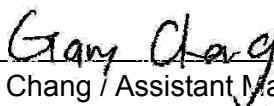**APPROVED BY** :  , DATE: Nov. 27, 2009  
Gary Chang / Assistant Manager



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
FCC Part 2& Part 90			
2.1046 90.1321	Maximum Peak Output Power Limit: max. 25Watt / 25MHz EIRP.	PASS	Meet the requirement of limit.
2.1055 90.213	Frequency Stability Stay with the authorized bands of operation	PASS	Meet the requirement of limit.
2.1049 90.1323	Emission Bandwidth	PASS	Meet the requirement of limit.
90.210	Emission masks	PASS	Meet the requirement of limit.
2.1051 90.1323	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 90.1323	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -13.6dB at 7320.00MHz.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	3630APC Outdoor Connectorized Access Point
MODEL NO.	3630APC
FCC ID	ABZ89FT7632
POWER SUPPLY	56Vdc from PoE
MODULATION TYPE	QPSK, 16QAM, 64QAM (refer to NOTE for mode detail)
CODING RATE	1/2, 2/3, 3/4, 5/6 (refer to NOTE for more details)
MODULATION TECHNOLOGY	OFDMA
DUPLEX METHOD	TDD
OPERATING FREQUENCY	3651.75MHz ~ 3673.25MHz
CHANNEL BANDWIDTH	3.5MHz, 5.0MHz, 7.0MHz, 10.0MHz
MAX. E.I.R.P. POWER (RMS)	39.41dBm
ANTENNA TYPE	Sector Antenna with 16.5dBi gain (Optional accessory)
OPERATION TEMPERATURE RANGE	-40°C ~ 70°C
DATA CABLE	1.7m shielded RJ45 cable without core
I/O PORTS	RJ45
ACCESSORY DEVICES	POE (Optional accessory)

#### NOTE:

1. For the EUT with modulation type and coding rate. After pre-testing in test items of output power and spurious emissions, QPSK was found to be worst case and was selected for the final test configuration.

DOWN LINK		UP LINK	
MODULATION	CODING RATE	MODULATION	CODING RATE
QPSK	1/2	QPSK	1/2
	3/4		3/4
16QAM	1/2	16QAM	1/2
	3/4		3/4
64QAM	1/2	64QAM	1/2
	2/3		2/3
	3/4		3/4
	5/6		5/6

2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES


Three channels had been tested for each channel bandwidth.

CHANNEL BANDWIDTH: 3.5 MHz	CHANNEL BANDWIDTH: 5 MHz
<b>Low channel (L):</b> 3651.75MHz	<b>Low channel (L):</b> 3652.50MHz
<b>Middle channel (M):</b> 3660.00MHz	<b>Middle channel (M):</b> 3660.00MHz
<b>High channel (H):</b> 3673.25MHz	<b>High channel (H):</b> 3672.50MHz

CHANNEL BANDWIDTH: 7 MHz	CHANNEL BANDWIDTH: 10 MHz
<b>Low channel (L):</b> 3653.50MHz	<b>Low channel (L):</b> 3655.00MHz
<b>Middle channel (M):</b> 3660.00MHz	<b>Middle channel (M):</b> 3660.00MHz
<b>High channel (H):</b> 3671.50MHz	<b>High channel (H):</b> 3670.00MHz

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST



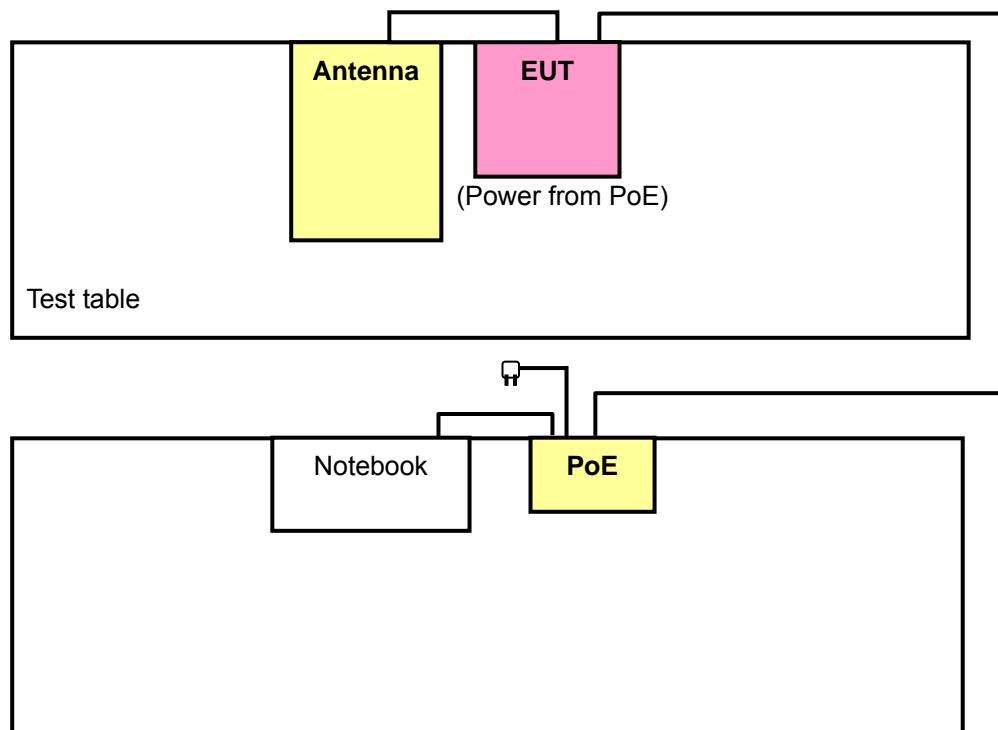

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	EB	EM	CSE	RE<1G	RE≥1G	
-	√	√	√	√	√	√	√	-

Where **OP**: Output power **FS**: Frequency stability

**EB**: Emission bandwidth **EM**: Emission masks

**CSE**: Conducted spurious emissions

**RE<1G**: Radiated emission below 1GHz

**RE≥1G**: Radiated emission above 1GHz

#### OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	CHANNEL BANDWIDTH	MODULATION TYPE	CODING RATE
L, M, H	OFDMA	3.5MHz	QPSK	1/2
L, M, H	OFDMA	5.0MHz	QPSK	1/2
L, M, H	OFDMA	7.0MHz	QPSK	1/2
L, M, H	OFDMA	10.0MHz	QPSK	1/2

#### FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	CHANNEL BANDWIDTH	MODULATION TYPE	CODING RATE
L	OFDMA	3.5MHz	QPSK	1/2
L	OFDMA	5.0MHz	QPSK	1/2
L	OFDMA	7.0MHz	QPSK	1/2
L	OFDMA	10.0MHz	QPSK	1/2



A D T

**EMISSION BANDWIDTH MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	CHANNEL BANDWIDTH	MODULATION TYPE	CODING RATE
L, M, H	OFDMA	3.5MHz	QPSK	1/2
L, M, H	OFDMA	5.0MHz	QPSK	1/2
L, M, H	OFDMA	7.0MHz	QPSK	1/2
L, M, H	OFDMA	10.0MHz	QPSK	1/2

**EMISSION MASKS MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	CHANNEL BANDWIDTH	MODULATION TYPE	CODING RATE
L, M, H	OFDMA	3.5MHz	QPSK	1/2
L, M, H	OFDMA	5.0MHz	QPSK	1/2
L, M, H	OFDMA	7.0MHz	QPSK	1/2
L, M, H	OFDMA	10.0MHz	QPSK	1/2

**CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	CHANNEL BANDWIDTH	MODULATION TYPE	CODING RATE
L, M, H	OFDMA	3.5MHz	QPSK	1/2
L, M, H	OFDMA	5.0MHz	QPSK	1/2
L, M, H	OFDMA	7.0MHz	QPSK	1/2
L, M, H	OFDMA	10.0MHz	QPSK	1/2

### **RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	CHANNEL BANDWIDTH	MODULATION TYPE	CODING RATE
M	OFDMA	3.5MHz	QPSK	1/2
L	OFDMA	5.0MHz	QPSK	1/2
L	OFDMA	7.0MHz	QPSK	1/2
L	OFDMA	10.0MHz	QPSK	1/2

### **RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, coding rate and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	CHANNEL BANDWIDTH	MODULATION TYPE	CODING RATE
L, M, H	OFDMA	3.5MHz	QPSK	1/2
L, M, H	OFDMA	5.0MHz	QPSK	1/2
L, M, H	OFDMA	7.0MHz	QPSK	1/2
L, M, H	OFDMA	10.0MHz	QPSK	1/2

### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OP	25deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Brad Wu
FS	22deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Dean Wang
EB	22deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Dean Wang
EM	22deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Dean Wang
CSE	22deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Dean Wang
RE < 1G	25deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Brad Wu
RE ≥ 1G	25deg. C, 65%RH, 1008 hPa	120Vac, 60Hz	Brad Wu



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 90**

**ANSI/TIA/EIA-603-C-2004**

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D600	CN-0G5152-48 643-49C-8226	FCC DoC Approved
2	POE	MOTOROLA	PSI45W-560 (MOT)	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	10m non-shielded RJ45 UTP cable.

**NOTE:**

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 ~ 2 acted as a communication partners to transfer data.
3. Item 2 was supplied from client.



## 4 TEST TYPES AND RESULTS

### 4.1 OUTPUT POWER AND POWER DENSITY MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER AND POWER DENSITY

PER FCC PART 90.1321

#### BASE AND FIXED STATIONS

Base and fixed stations are limited to 25 Watts/25 MHz equivalent isotropically radiated power (EIRP). In any event, the peak EIRP power density shall not exceed 1 Watt in any one-megahertz slice of spectrum.

#### MOBILE AND PORTABLE STATIONS

Mobile and portable stations are limited to 1 Watt/25 MHz EIRP. In any event, the peak EIRP density shall not exceed 40 milliWatts in any one-megahertz slice of spectrum.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec. 11, 2009
RF cable	SUCOFLEX 104	274403/4	Aug. 28, 2009	Aug. 27, 2010
DC-6GHz 20dB 50W Fixed attenuator Woken	MDC9331N-20	0724	May 15, 2009	May 14, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.1.3 TEST PROCEDURES


##### OUTPUT POWER

- The transmitter output was connected to the spectrum analyzer
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1MHz, VBW = 3MHz. Detector mode = rms.
- Compute power by integrating the spectrum across the 26dB EBW of the signal.
- Record the power level.

##### POWER DENSITY

- The transmitter output was connected to the spectrum analyzer.
- Set RBW = 1MHz, VBW = 3MHz. Detector mode = rms. The PPSD is the highest level found across the emission in any 1MHz band.

#### 4.1.4 TEST SETUP

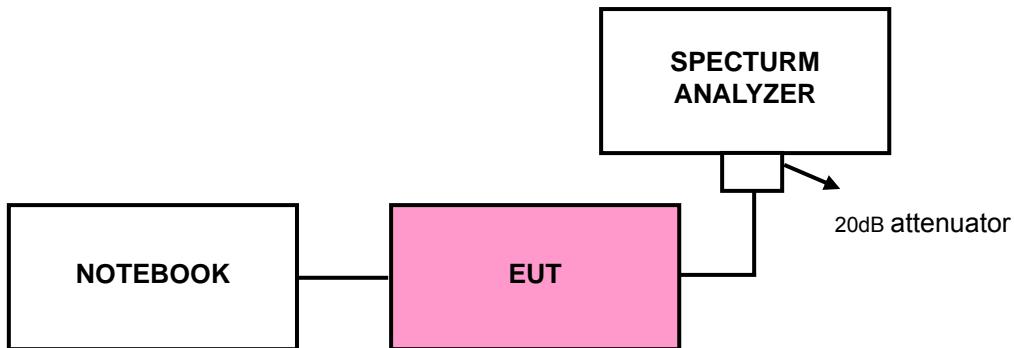

#### 4.1.5 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared one notebook system outside of testing area to act as a communication partners.
- The communication partner connected with EUT via an RJ45 UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.



#### 4.1.6 TEST RESULTS

##### CHANNEL BANDWIDTH: 3.5MHz

EIRP POWER							
CHAN.	FREQUENCY (MHz)	CONDUCTED POWER (dBm)		ANTENNA GAIN (dBi)	TOTAL EIRP (dBm)	TOTAL EIRP (W)	Limit (W)
		ANT. 0	ANT. 1				
Low	3651.75	15.29	15.22	16.50	34.77	2.999	3.50
Middle	3660.00	15.28	15.35	16.50	34.83	3.041	3.50
High	3673.25	15.29	15.31	16.50	34.81	3.027	3.50

NOTE: EIRP = Conducted power + Antenna Gain

##### CHANNEL BANDWIDTH: 5.0MHz

EIRP POWER							
CHAN.	FREQUENCY (MHz)	CONDUCTED POWER (dBm)		ANTENNA GAIN (dBi)	TOTAL EIRP (dBm)	TOTAL EIRP (W)	Limit (W)
		ANT. 0	ANT. 1				
Low	3652.50	16.76	16.84	16.50	36.31	4.276	5.00
Middle	3660.00	16.73	16.83	16.50	36.29	4.256	5.00
High	3672.50	16.71	16.80	16.50	36.27	4.236	5.00

NOTE: EIRP = Conducted power + Antenna Gain

##### CHANNEL BANDWIDTH: 7.0MHz

EIRP POWER							
CHAN.	FREQUENCY (MHz)	CONDUCTED POWER (dBm)		ANTENNA GAIN (dBi)	TOTAL EIRP (dBm)	TOTAL EIRP (W)	Limit (W)
		ANT. 0	ANT. 1				
Low	3653.50	18.34	18.33	16.50	37.85	6.095	7.00
Middle	3660.00	18.28	18.33	16.50	37.82	6.053	7.00
High	3671.50	18.32	18.34	16.50	37.84	6.081	7.00


NOTE: EIRP = Conducted power + Antenna Gain

##### CHANNEL BANDWIDTH: 10.0MHz


EIRP POWER							
CHAN.	FREQUENCY (MHz)	CONDUCTED POWER (dBm)		ANTENNA GAIN (dBi)	TOTAL EIRP (dBm)	TOTAL EIRP (W)	Limit (W)
		ANT. 0	ANT. 1				
Low	3655.00	19.82	19.95	16.50	39.40	8.710	10.00
Middle	3660.00	19.89	19.90	16.50	39.41	8.730	10.00
High	3670.00	19.91	19.83	16.50	39.38	8.670	10.00

NOTE: EIRP = Conducted power + Antenna Gain


**CHANNEL BANDWIDTH: 3.5MHz:  
CONDUCTED POWER: (ANTENNA 0)  
LOW CHANNEL**

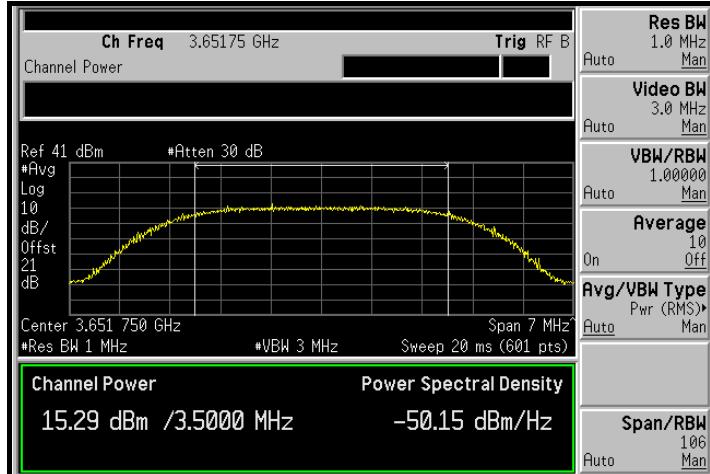


**MIDDLE CHANNEL**

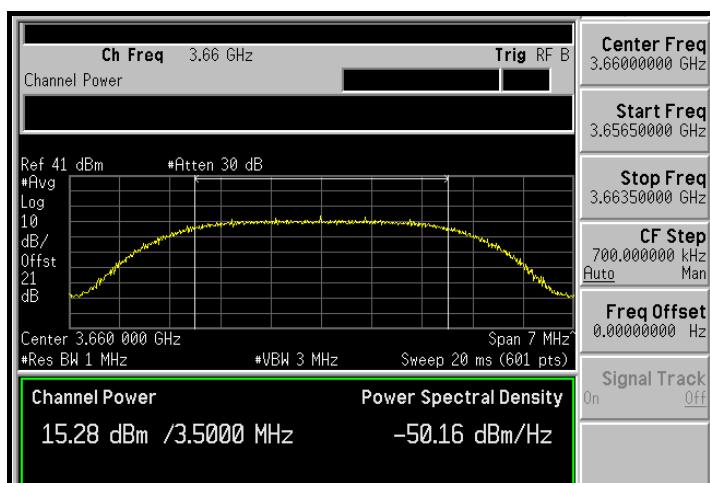


**HIGH CHANNEL**

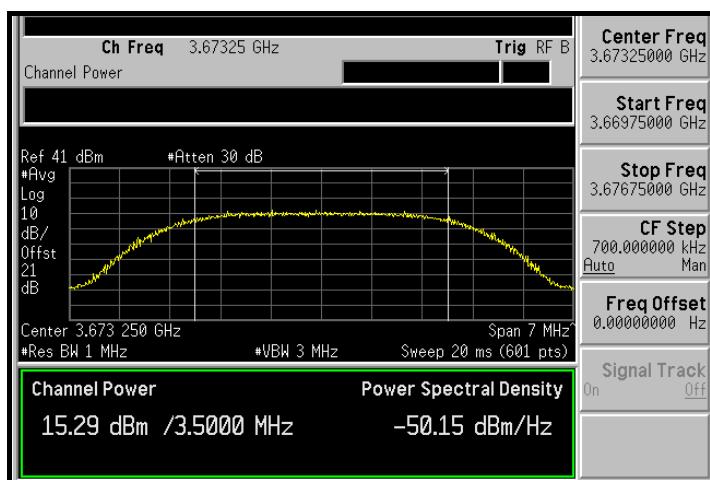


## CONDUCTED POWER: (ANTENNA 1) LOW CHANNEL

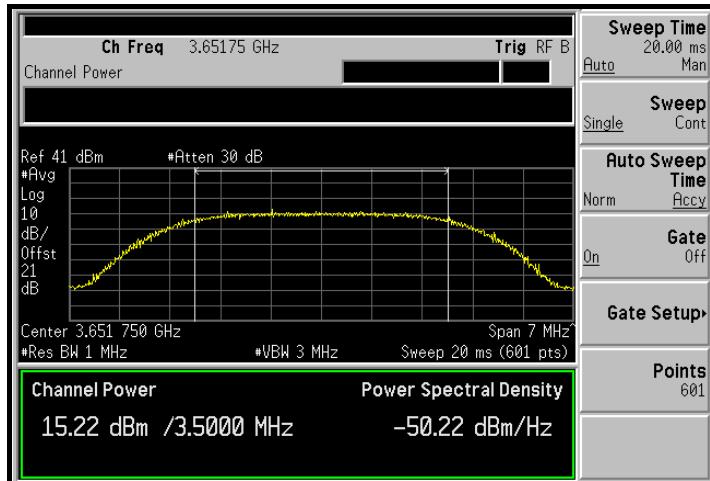

## MIDDLE CHANNEL

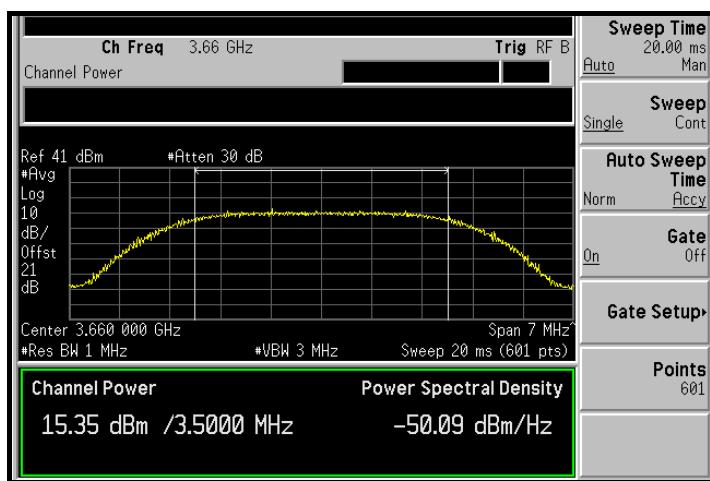


## HIGH CHANNEL

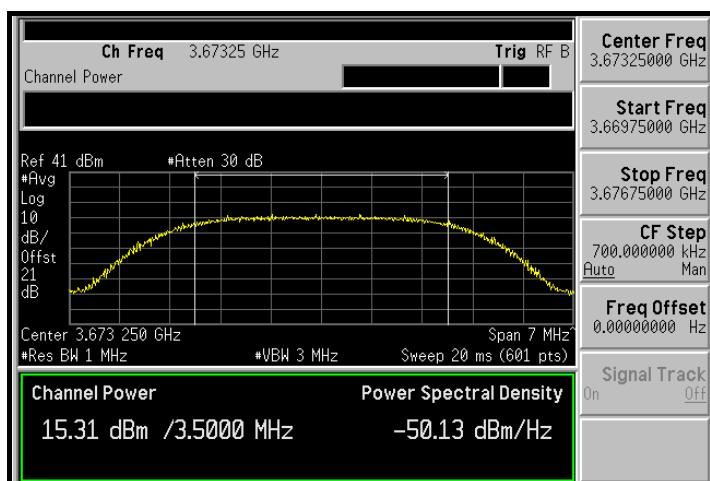


**CHANNEL BANDWIDTH: 5.0MHz:  
CONDUCTED POWER: (ANTENNA 0)  
LOW CHANNEL**



**MIDDLE CHANNEL**

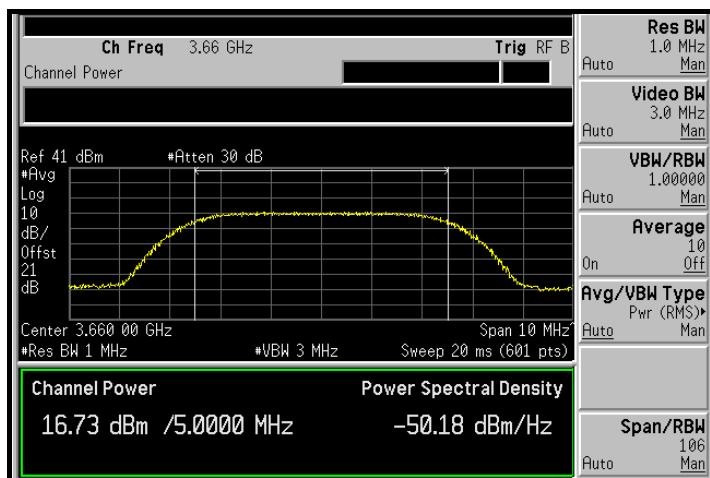


**HIGH CHANNEL**

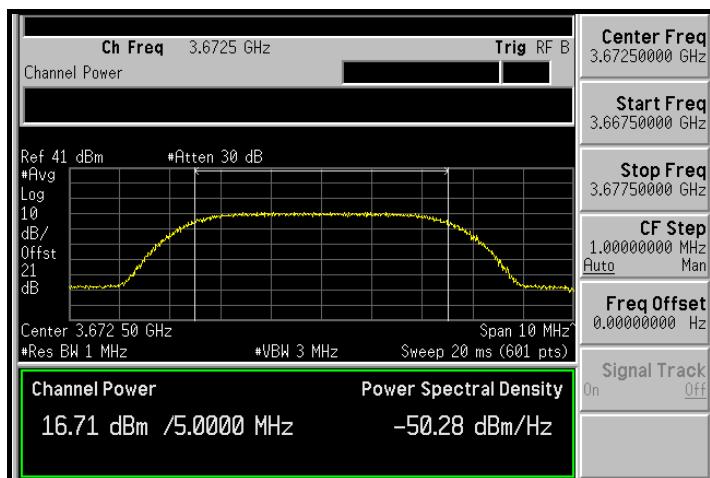


## CONDUCTED POWER: (ANTENNA 1) LOW CHANNEL




## MIDDLE CHANNEL

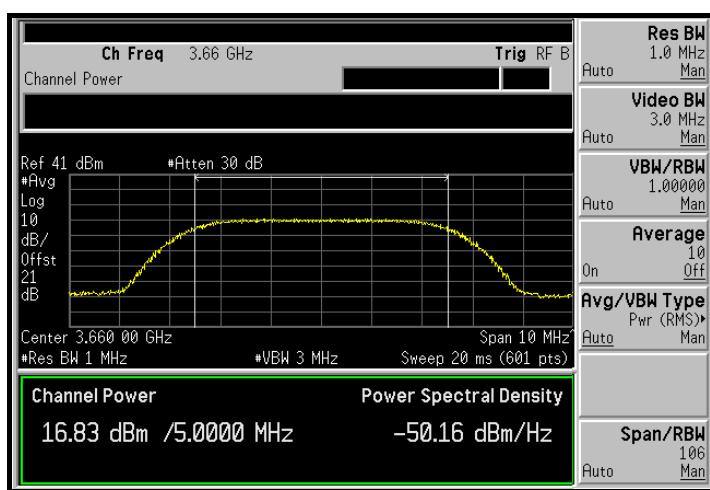


## HIGH CHANNEL

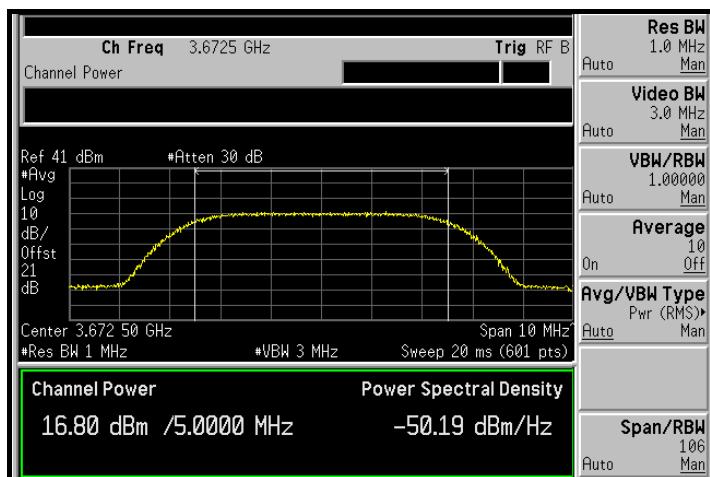


**CHANNEL BANDWIDTH: 7.0MHz:  
CONDUCTED POWER: (ANTENNA 0)  
LOW CHANNEL**

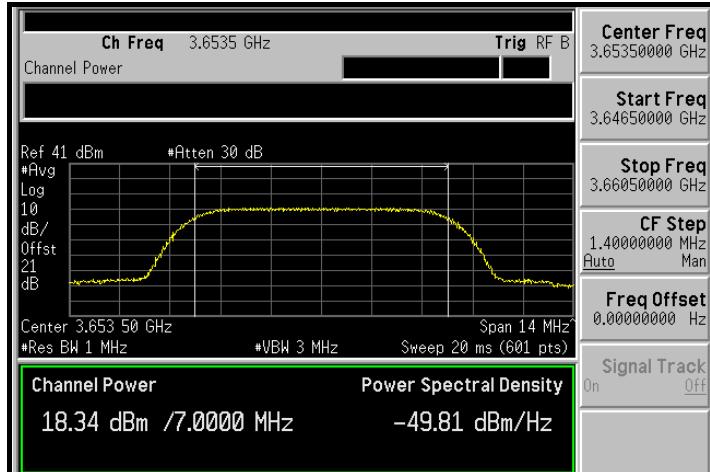


**MIDDLE CHANNEL**

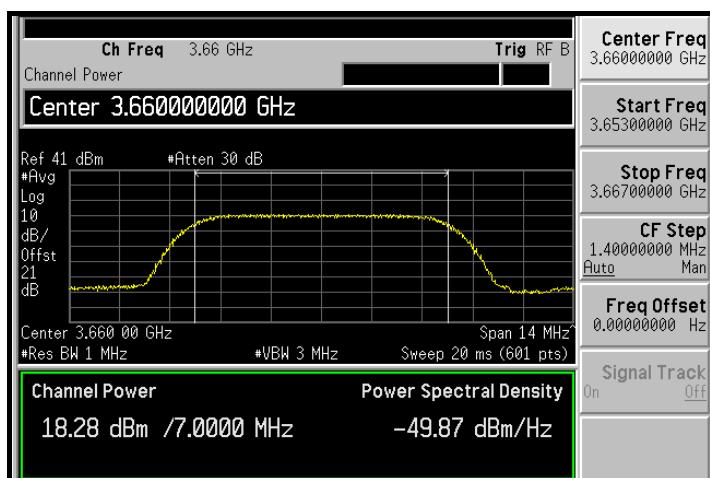


**HIGH CHANNEL**

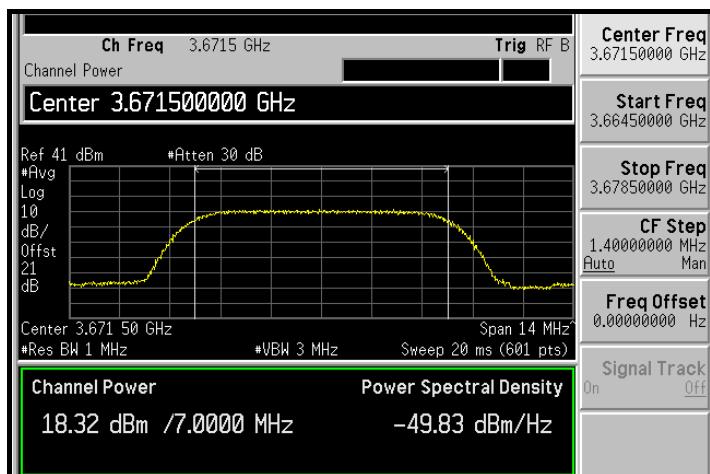


## CONDUCTED POWER: (ANTENNA 1) LOW CHANNEL

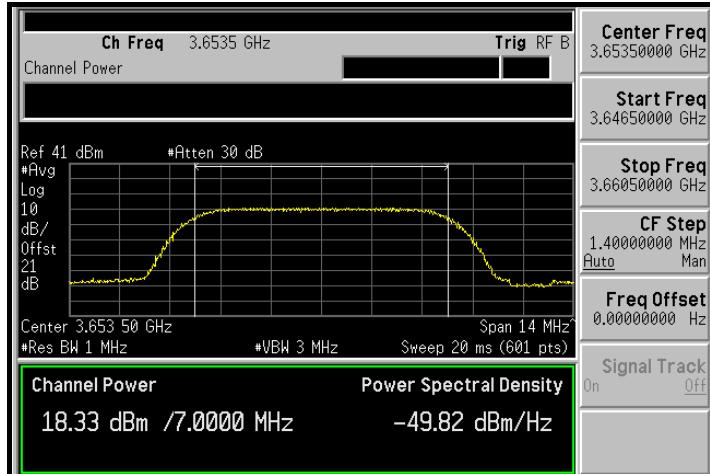


## MIDDLE CHANNEL

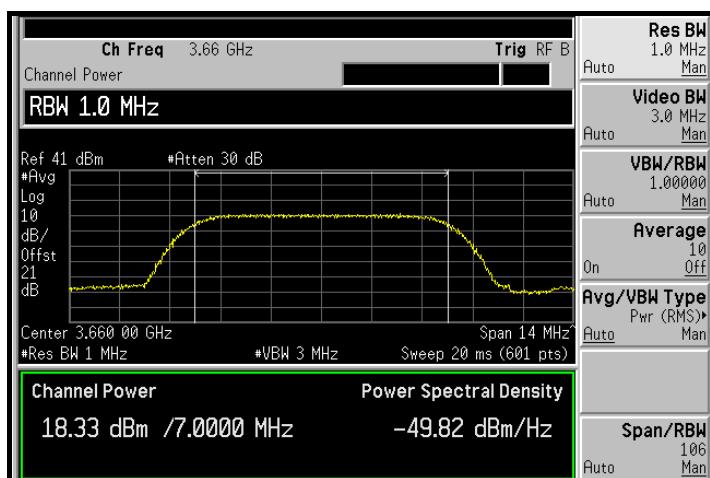


## HIGH CHANNEL

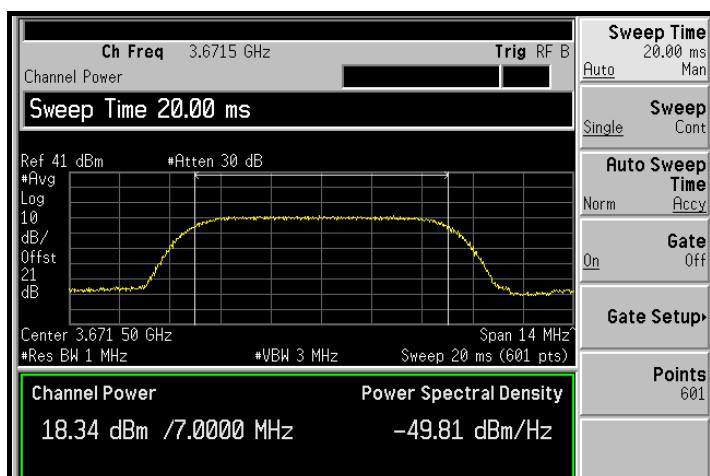


**CHANNEL BANDWIDTH: 10.0MHz:  
CONDUCTED POWER: (ANTENNA 0)  
LOW CHANNEL**

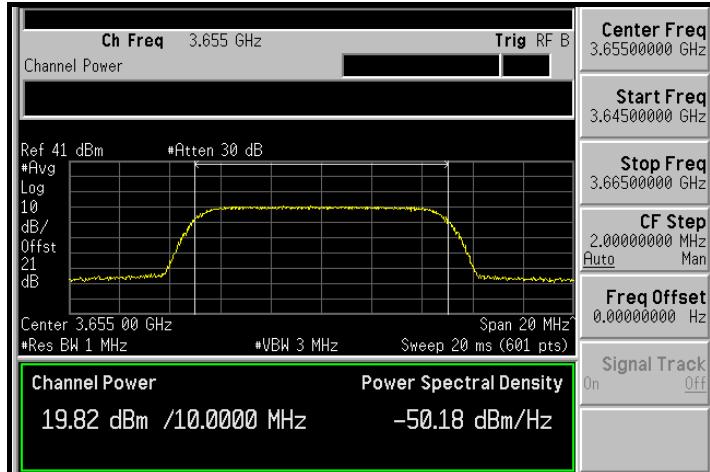


**MIDDLE CHANNEL**

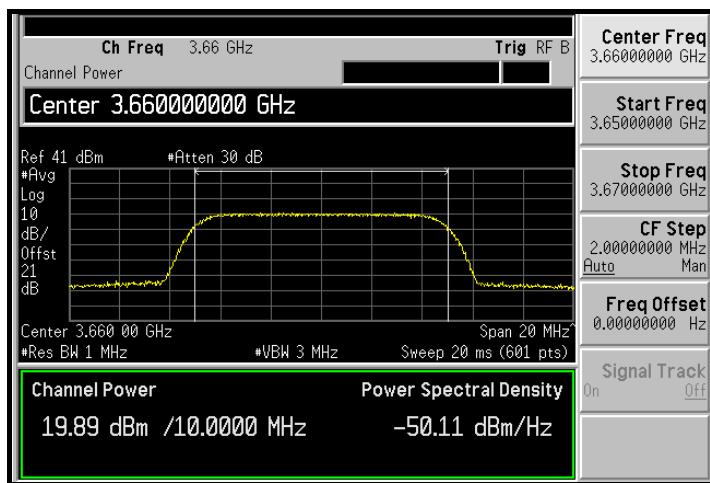


**HIGH CHANNEL**

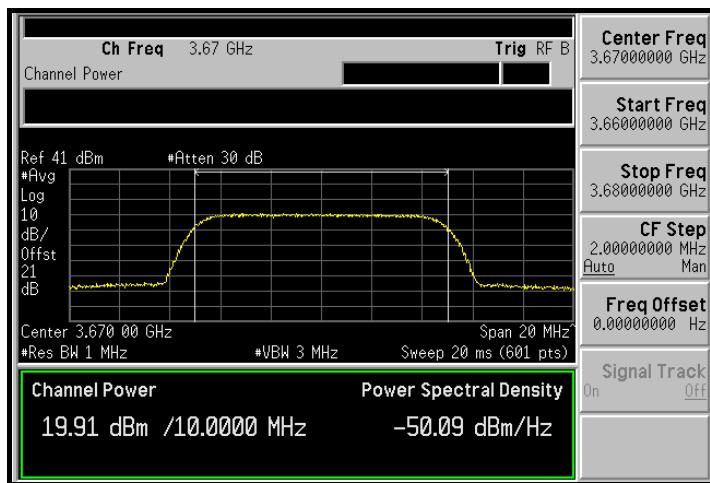


## CONDUCTED POWER: (ANTENNA 1) LOW CHANNEL

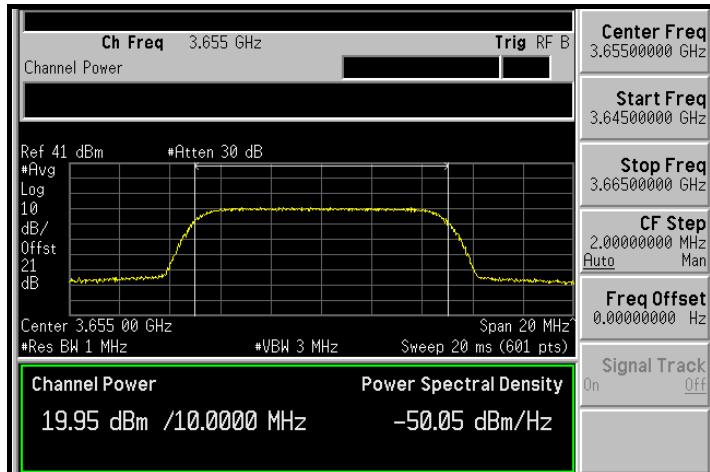

## MIDDLE CHANNEL

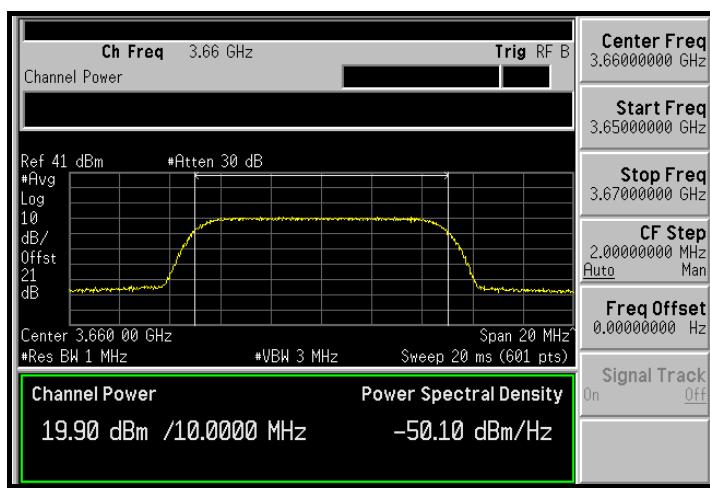

## HIGH CHANNEL

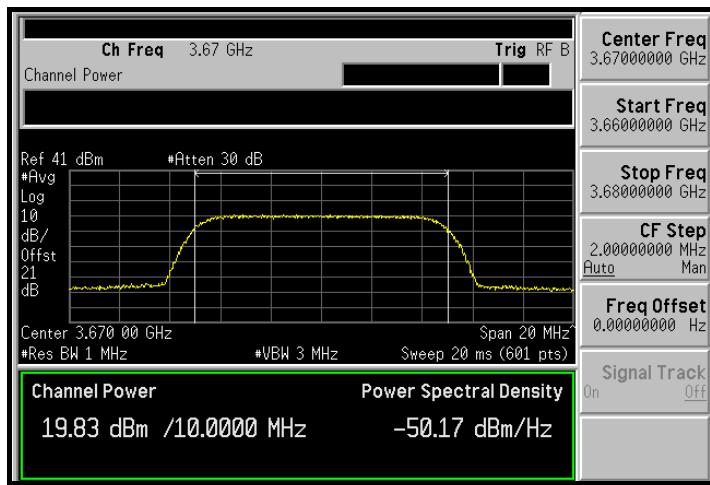



A D T

### CHANNEL BANDWIDTH: 3.5MHz

EIRP PEAK DENSITY							
CHAN.	FREQUENCY (MHz)	CONDUCTED POWER DENSITY (dBm/MHz)		ANTENNA GAIN (dBi)	TOTAL EIRP PEAK DENSITY (dBm/MHz)	TOTAL EIRP PEAK DENSITY (W/MHz)	Limit (W/MHz)
		ANT. 0	ANT. 1				
Low	3651.75	7.14	7.10	16.50	26.63	0.460	1.00
Middle	3660.00	7.21	7.21	16.50	26.72	0.470	1.00
High	3673.25	7.29	7.14	16.50	26.73	0.471	1.00

NOTE: EIRP density = Conducted power density + Antenna Gain

### CHANNEL BANDWIDTH: 5.0MHz

EIRP PEAK DENSITY							
CHAN.	FREQUENCY (MHz)	CONDUCTED POWER DENSITY (dBm/MHz)		ANTENNA GAIN (dBi)	TOTAL EIRP PEAK DENSITY (dBm/MHz)	TOTAL EIRP PEAK DENSITY (W/MHz)	Limit (W/MHz)
		ANT. 0	ANT. 1				
Low	3652.50	5.91	6.03	16.50	25.48	0.353	1.00
Middle	3660.00	5.99	6.01	16.50	25.51	0.356	1.00
High	3672.50	5.77	5.94	16.50	25.39	0.346	1.00

NOTE: EIRP density = Conducted power density + Antenna Gain

### CHANNEL BANDWIDTH: 7.0MHz

EIRP PEAK DENSITY							
CHAN.	FREQUENCY (MHz)	CONDUCTED POWER DENSITY (dBm/MHz)		ANTENNA GAIN (dBi)	TOTAL EIRP PEAK DENSITY (dBm/MHz)	TOTAL EIRP PEAK DENSITY (W/MHz)	Limit (W/MHz)
		ANT. 0	ANT. 1				
Low	3653.50	7.49	7.47	16.50	26.99	0.500	1.00
Middle	3660.00	7.42	7.43	16.50	26.94	0.494	1.00
High	3671.50	7.37	7.38	16.50	26.89	0.489	1.00


NOTE: EIRP density = Conducted power density + Antenna Gain

### CHANNEL BANDWIDTH: 10.0MHz


EIRP PEAK DENSITY							
CHAN.	FREQUENCY (MHz)	CONDUCTED POWER DENSITY (dBm/MHz)		ANTENNA GAIN (dBi)	TOTAL EIRP PEAK DENSITY (dBm/MHz)	TOTAL EIRP PEAK DENSITY (W/MHz)	Limit (W/MHz)
		ANT. 0	ANT. 1				
Low	3655.00	5.98	6.17	16.50	25.59	0.362	1.00
Middle	3660.00	6.00	6.05	16.50	25.54	0.358	1.00
High	3670.00	6.25	6.24	16.50	25.76	0.377	1.00

NOTE: EIRP density = Conducted power density + Antenna Gain


**CHANNEL BANDWIDTH: 3.5MHz:  
PEAK DENSITY: (ANTENNA 0)  
LOW CHANNEL**

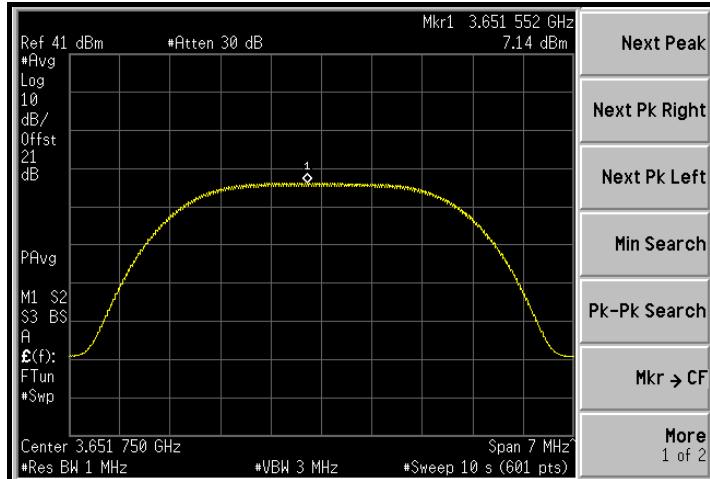


**MIDDLE CHANNEL**

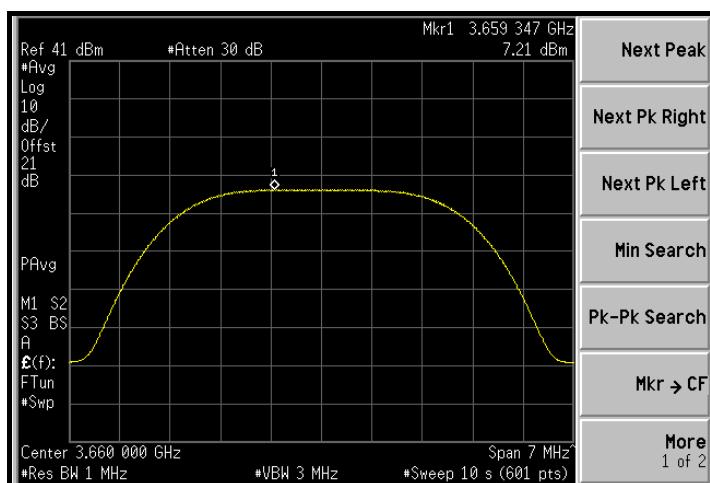


**HIGH CHANNEL**

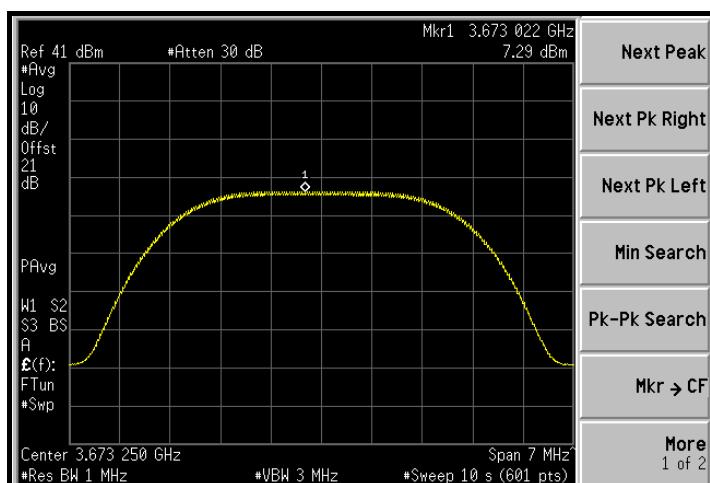


## PEAK DENSITY: (ANTENNA 1) LOW CHANNEL

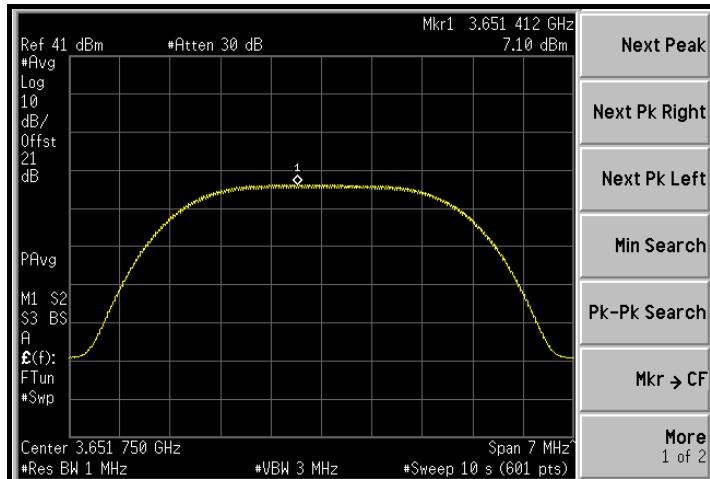


## MIDDLE CHANNEL

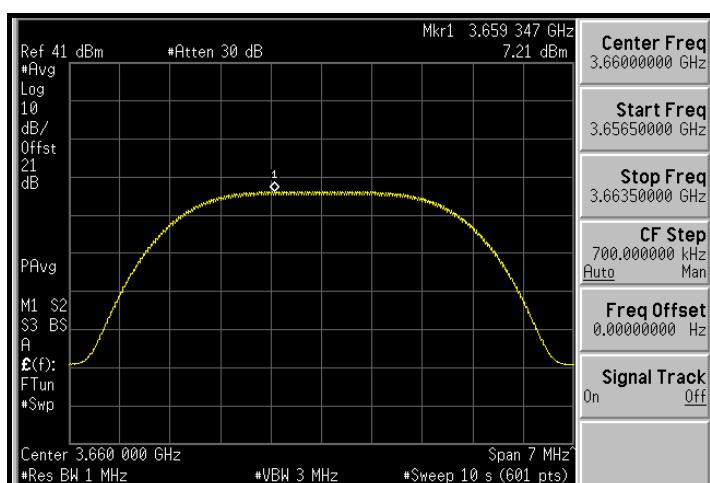


## HIGH CHANNEL

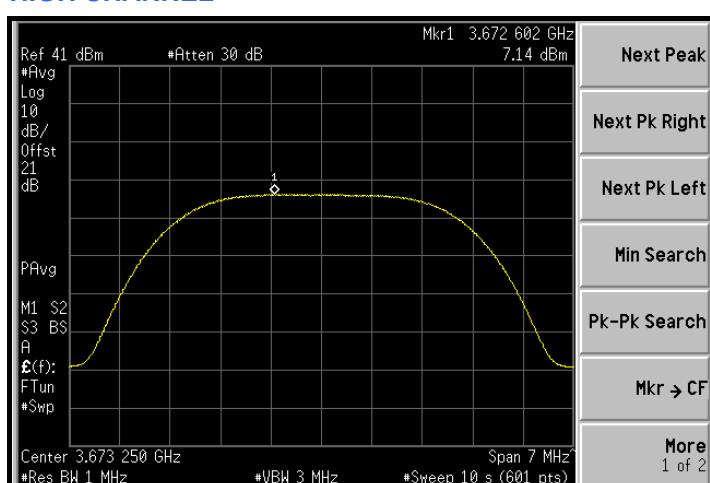


**CHANNEL BANDWIDTH: 5.0MHz:  
PEAK DENSITY: (ANTENNA 0)  
LOW CHANNEL**

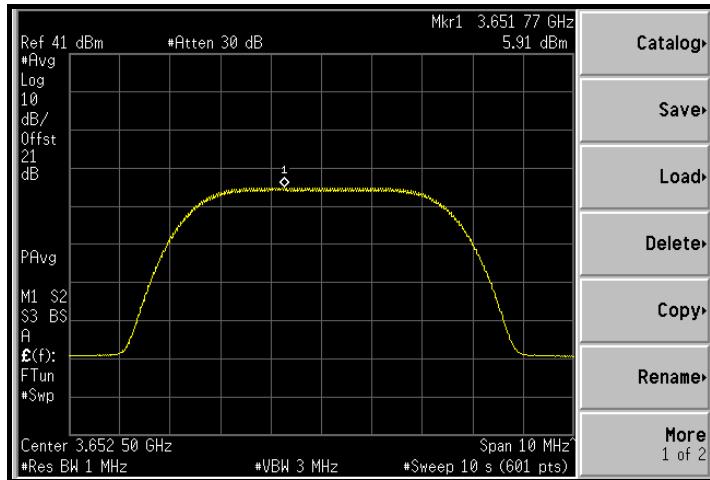


**MIDDLE CHANNEL**

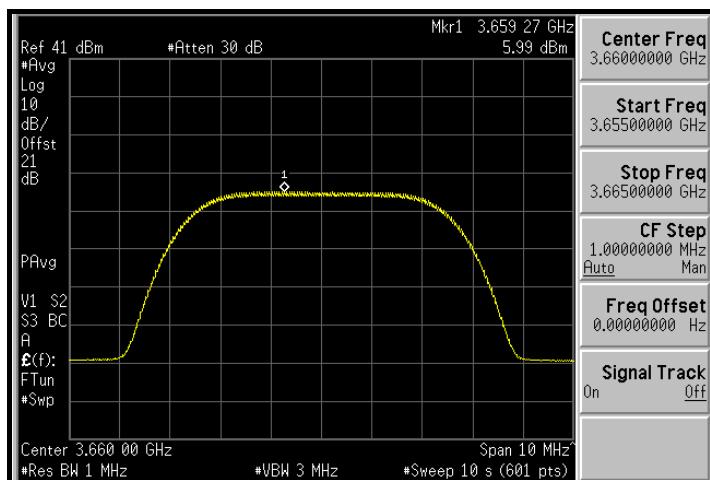


**HIGH CHANNEL**

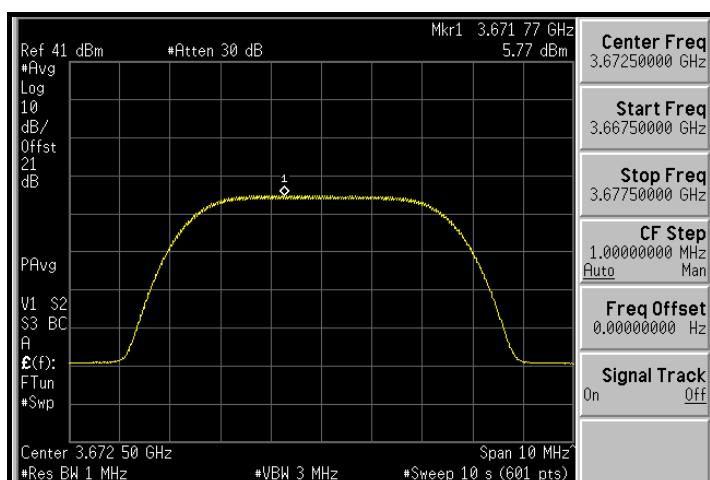


## PEAK DENSITY: (ANTENNA 1) LOW CHANNEL

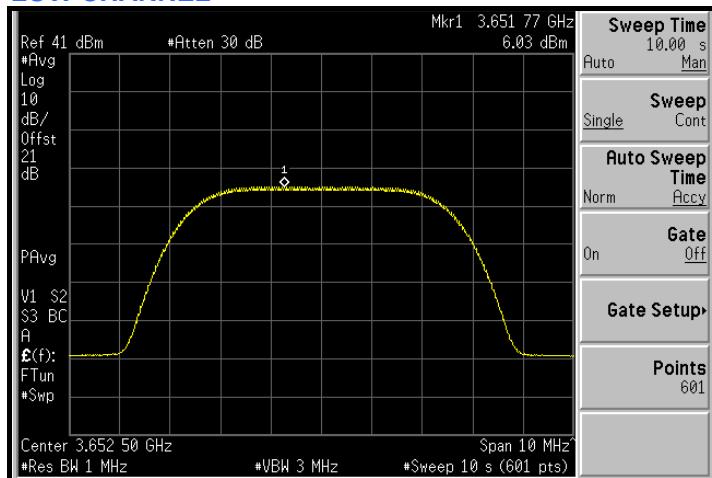


## MIDDLE CHANNEL

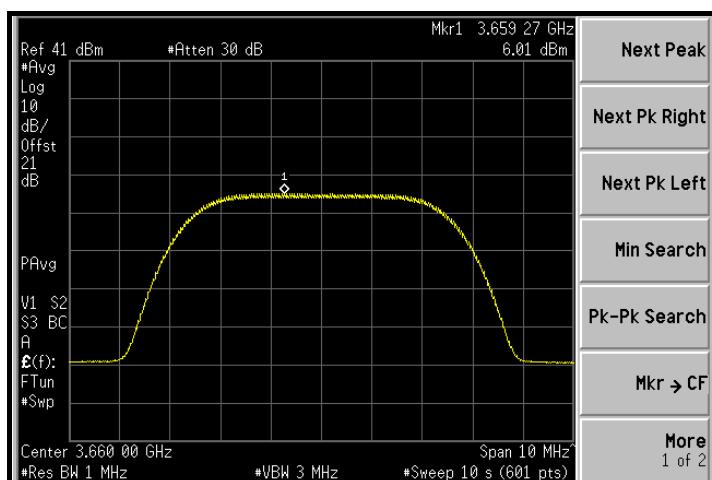


## HIGH CHANNEL

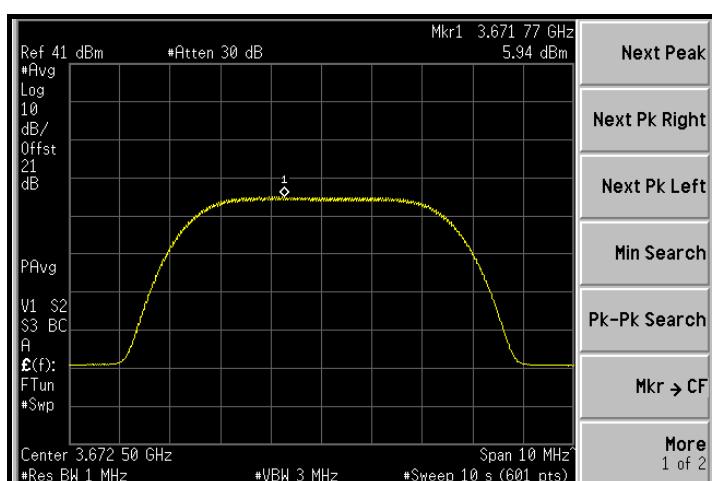


**CHANNEL BANDWIDTH: 7.0MHz:  
PEAK DENSITY: (ANTENNA 0)  
LOW CHANNEL**

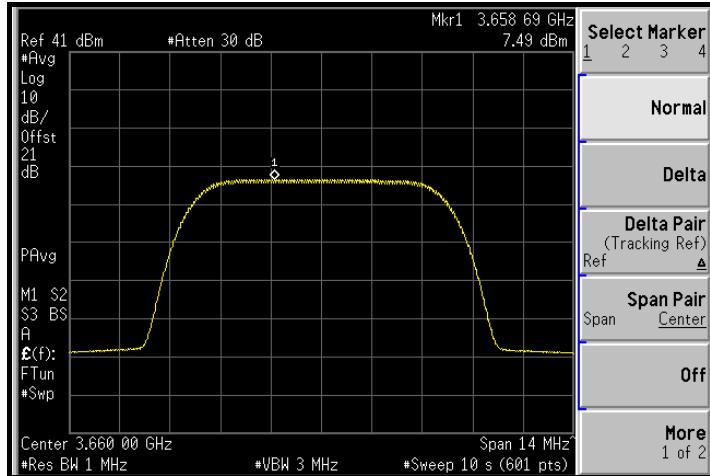


**MIDDLE CHANNEL**

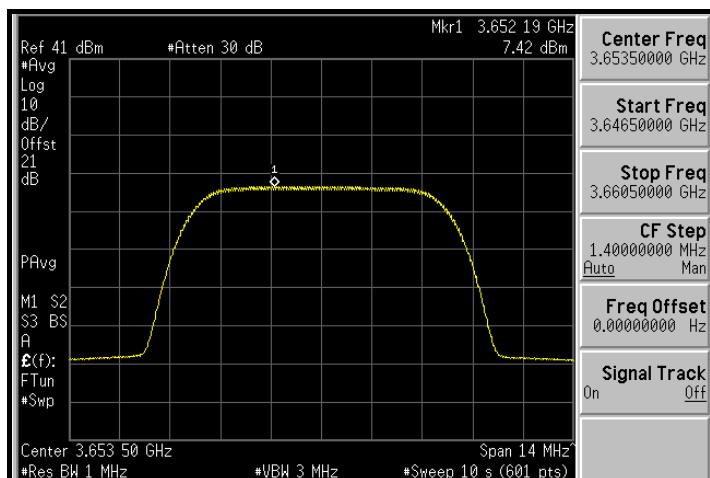


**HIGH CHANNEL**

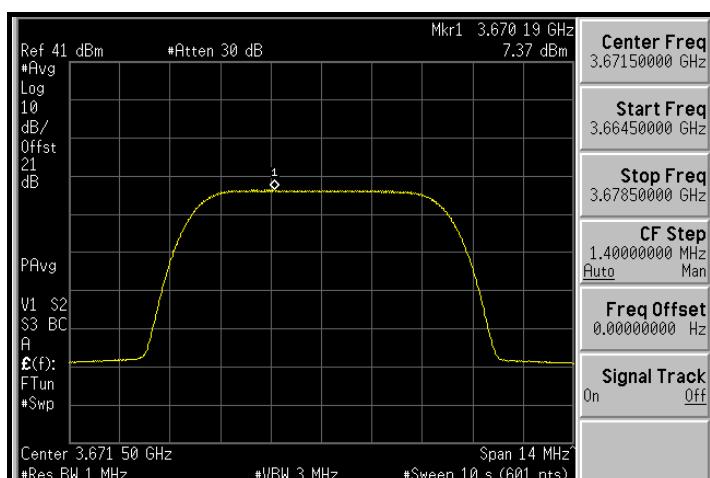


## PEAK DENSITY: (ANTENNA 1) LOW CHANNEL

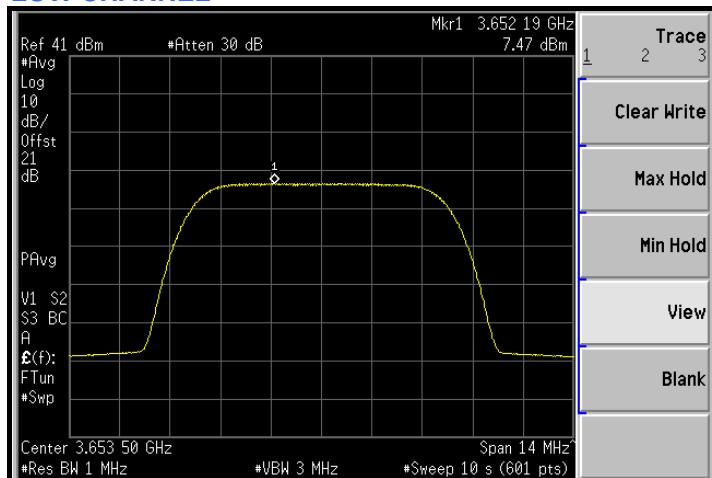


## MIDDLE CHANNEL

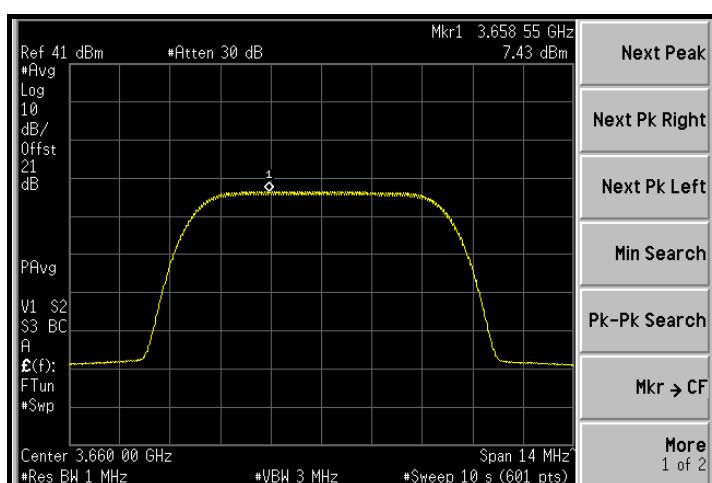


## HIGH CHANNEL

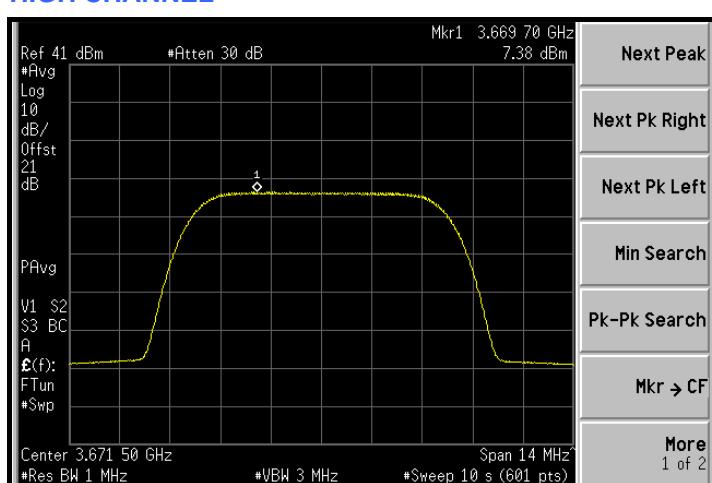


**CHANNEL BANDWIDTH: 10.0MHz:  
PEAK DENSITY: (ANTENNA 0)  
LOW CHANNEL**

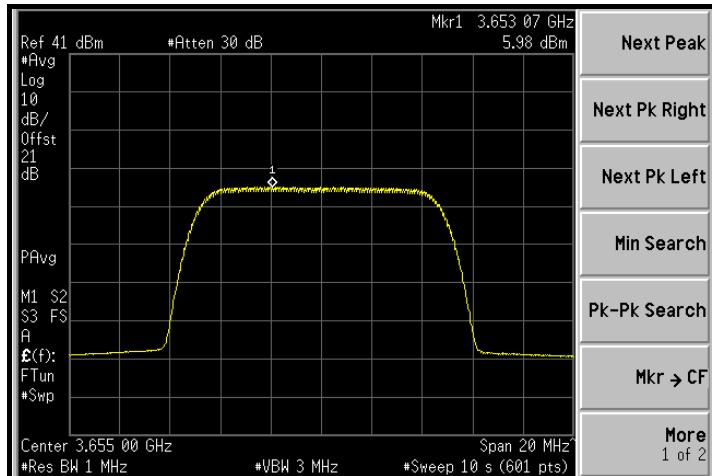


**MIDDLE CHANNEL**

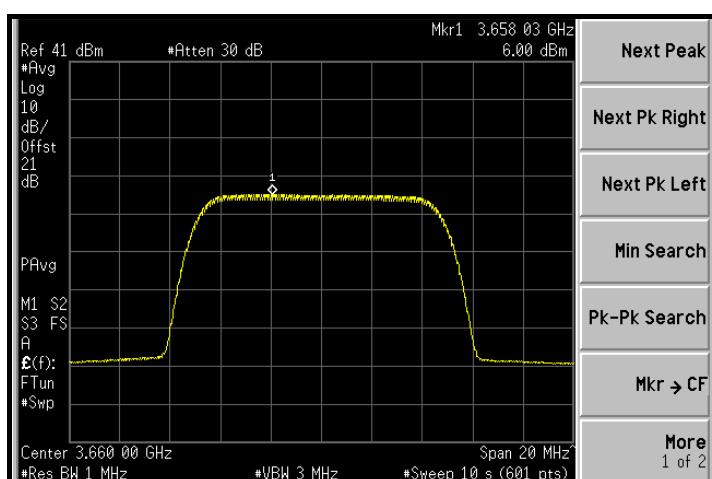


**HIGH CHANNEL**

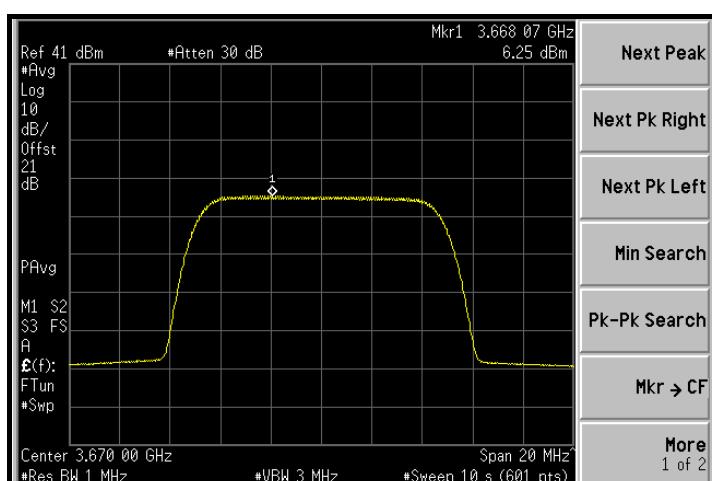


## PEAK DENSITY: (ANTENNA 1) LOW CHANNEL

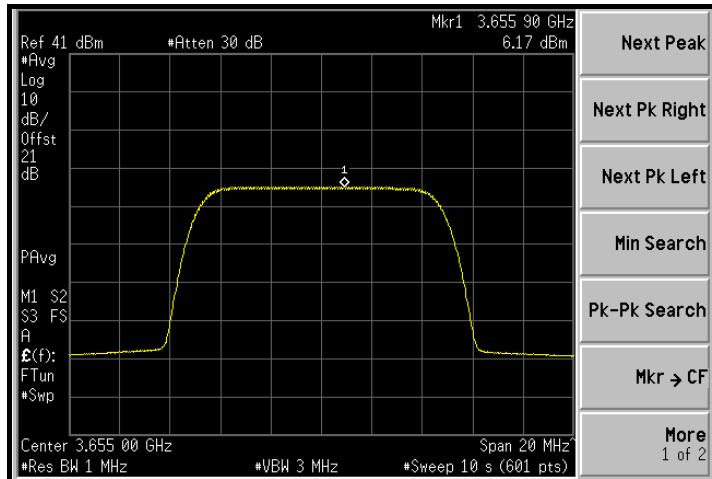

## MIDDLE CHANNEL

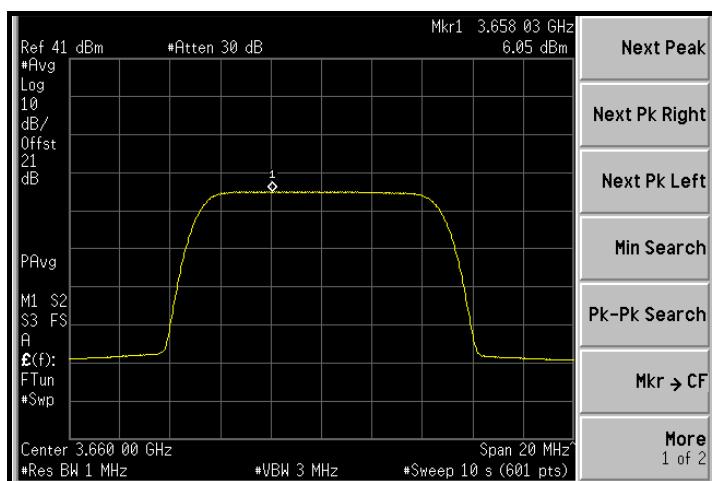

## HIGH CHANNEL

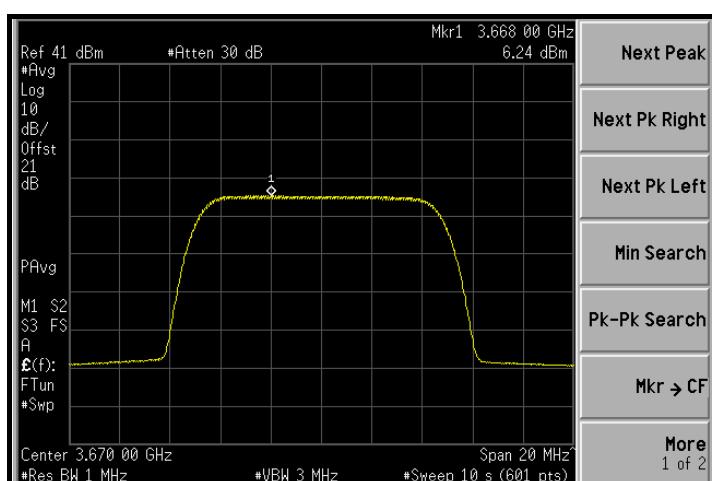



## 4.2 FREQUENCY STABILITY MEASUREMENT

### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT -40°C ~ 70°C.

### 4.2.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec.11, 2009
RF cable	SUCOFLEX 104	274041/4	Aug. 28, 2009	Aug. 27, 2010
WIT Standard Temperature & Humidity Chamber	TH-4S-C	W981030	Jun. 24, 2009	Jun. 23, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.2.3 TEST PROCEDURE

- a. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 93.5 Volts to 126.5 Volts. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing.
- d. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

#### 4.2.4 TEST SETUP

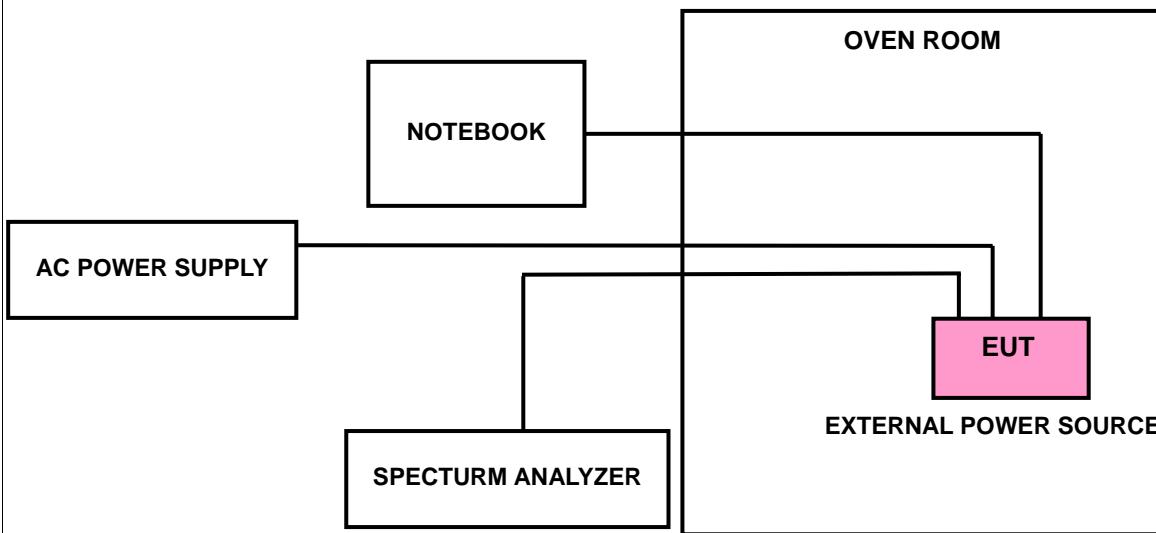

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT connected to the notebook. Use software to control the EUT channel and transmit a single tone.



#### 4.2.6 TEST RESULTS

##### CHANNEL BANDWIDTH: 3.5MHz

AFC FREQUENCY ERROR VS. VOLTAGE		
VOLTAGE (Volts)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
47.6	3673.238374	-3.165
56.0	3673.237255	-3.470
61.8	3673.237553	-3.389

AFC FREQUENCY ERROR VS. TEMP.		
TEMP. (°C)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
70	3673.237618	-3.371
60	3673.237568	-3.384
50	3673.236387	-3.706
40	3673.237253	-3.470
30	3673.237353	-3.443
20	3673.237255	-3.470
10	3673.237564	-3.386
0	3673.237105	-3.511
-10	3673.236721	-3.615
-20	3673.236650	-3.634
-30	3673.236706	-3.619
-40	3673.236288	-3.733



A D T

**CHANNEL BANDWIDTH: 5.0MHz**

AFC FREQUENCY ERROR VS. VOLTAGE		
VOLTAGE (Volts)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
47.6	3652.488239	-3.220
56.0	3652.487855	-3.325
61.8	3652.487720	-3.362

AFC FREQUENCY ERROR VS. TEMP.		
TEMP. (°C)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
70	3652.487512	-3.419
60	3652.487325	-3.470
50	3652.486320	-3.745
40	3652.488094	-3.260
30	3652.487668	-3.376
20	3652.487855	-3.325
10	3652.487777	-3.346
0	3652.487715	-3.363
-10	3652.486875	-3.593
-20	3652.487062	-3.542
-30	3652.486529	-3.688
-40	3652.486592	-3.671



A D T

**CHANNEL BANDWIDTH: 7.0MHz**

AFC FREQUENCY ERROR VS. VOLTAGE		
VOLTAGE (Volts)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
47.6	3653.487541	-3.410
56.0	3653.487669	-3.375
61.8	3653.488278	-3.208

AFC FREQUENCY ERROR VS. TEMP.		
TEMP. (°C)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
70	3653.487662	-3.377
60	3653.487682	-3.372
50	3653.486427	-3.715
40	3653.487870	-3.320
30	3653.487905	-3.311
20	3653.487669	-3.375
10	3653.487413	-3.445
0	3653.487639	-3.383
-10	3653.486995	-3.560
-20	3653.487110	-3.528
-30	3653.486704	-3.639
-40	3653.486544	-3.683



A D T

CHANNEL BANDWIDTH: 10.0MHz

AFC FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
47.6	3654.987873	-3.318
56.0	3654.987560	-3.404
61.8	3654.988315	-3.197

AFC FREQUENCY ERROR VS. TEMP.

TEMP. (°C)	FREQUENCY (MHz)	FREQUENCY ERROR (ppm)
70	3654.988308	-3.199
60	3654.987671	-3.373
50	3654.986672	-3.647
40	3654.987626	-3.385
30	3654.987462	-3.430
20	3654.987560	-3.404
10	3654.988125	-3.249
0	3654.987852	-3.324
-10	3654.986575	-3.673
-20	3654.987423	-3.441
-30	3654.986671	-3.647
-40	3654.986421	-3.715



### 4.3 EMISSION BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT

According to FCC 90.1323 specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec.11, 2009
RF cable	SUCOFLEX 104	274041/4	Aug. 28, 2009	Aug. 27, 2010
DC-6GHz 20dB 50W Fixed attenuator Woken	MDC9331N-20	0724	May 15, 2009	May 14, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW = 36kHz (3.5MHz bandwidth), 51kHz (5MHz bandwidth), 75kHz (7MHz bandwidth), 100kHz (10MHz bandwidth), VBW = 110kHz (3.5MHz bandwidth), 160kHz (5MHz bandwidth), 240kHz (7MHz bandwidth), 300kHz (10MHz bandwidth). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 4.3.4 TEST SETUP

Same as 4.1.4

#### 4.3.5 EUT OPERATING CONDITIONS

Same as 4.1.5


#### 4.3.6 TEST RESULTS

##### CHANNEL BANDWIDTH: 3.5MHz


CHANNEL	-26dBc BANDWIDTH (MHz)	
	ANTENNA 0	ANTENNA 1
Low	3.50	3.50
Middle	3.47	3.47
High	3.47	3.47

##### ANTENNA 0:

##### LOW CHANNEL

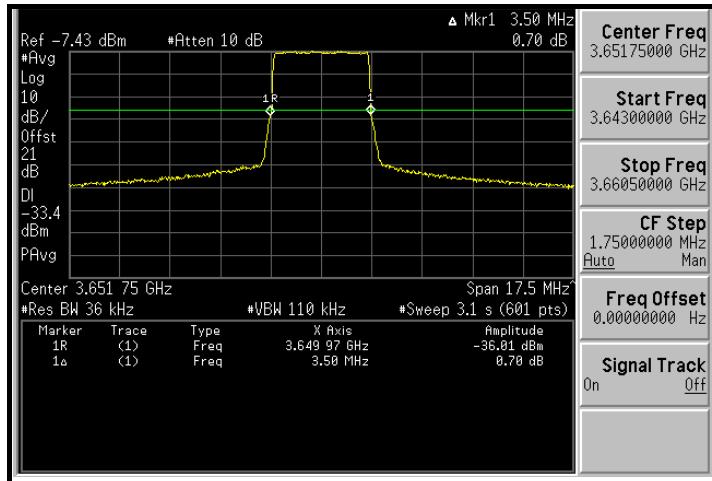


##### MIDDLE CHANNEL

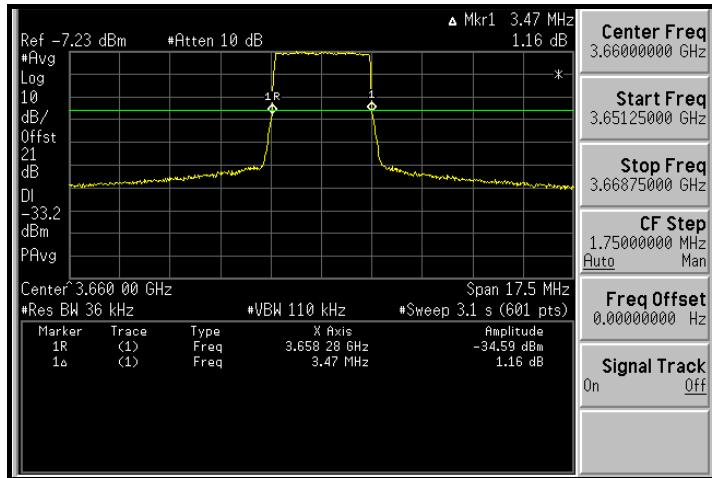




A D T

## HIGH CHANNEL

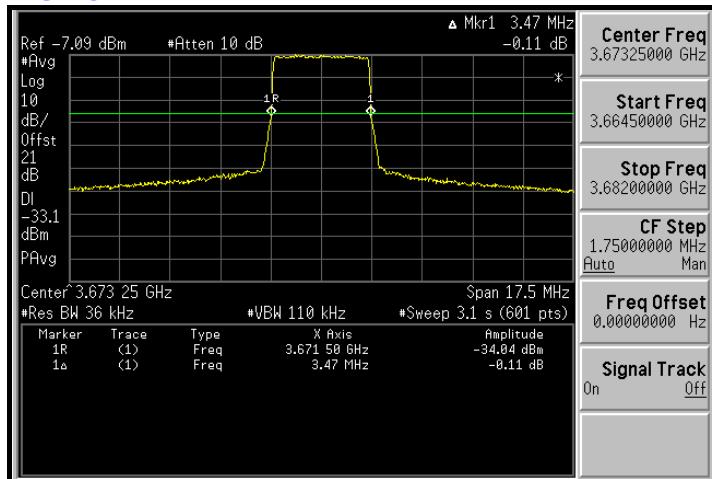

## ANTENNA 1:


### LOW CHANNEL

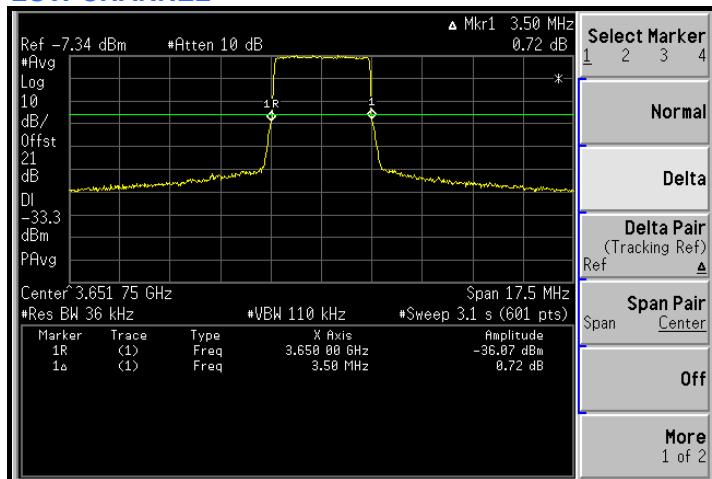




A D T

## MIDDLE CHANNEL


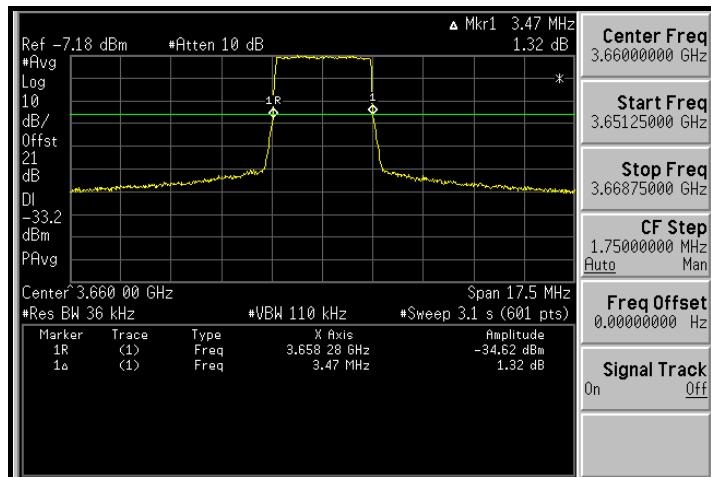


## HIGH CHANNEL

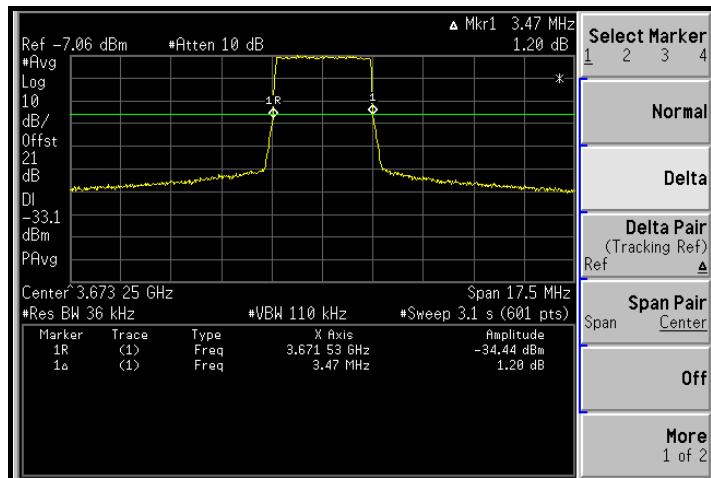


**CHANNEL BANDWIDTH: 5.0MHz**


CHANNEL	<b>-26dBc BANDWIDTH (MHz)</b>	
	ANTENNA 0	ANTENNA 1
Low	4.92	4.92
Middle	4.88	4.92
High	5.00	4.88

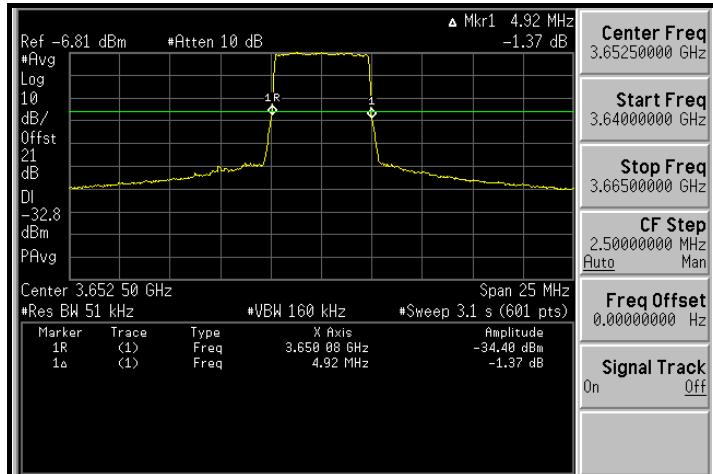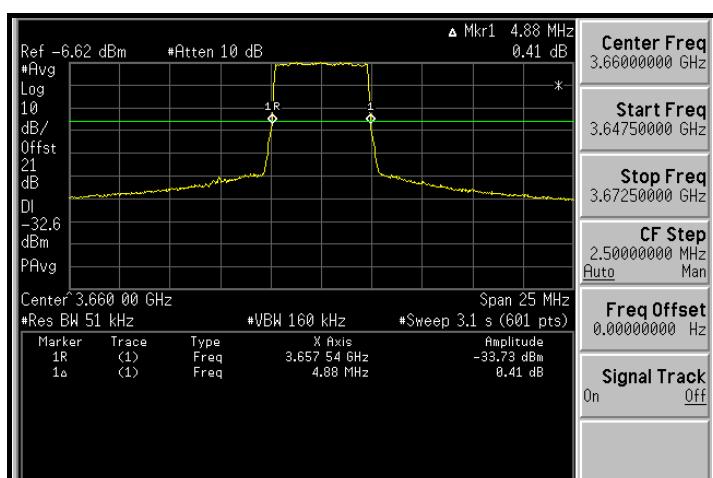**ANTENNA 0:**
**LOW CHANNEL**

**MIDDLE CHANNEL**

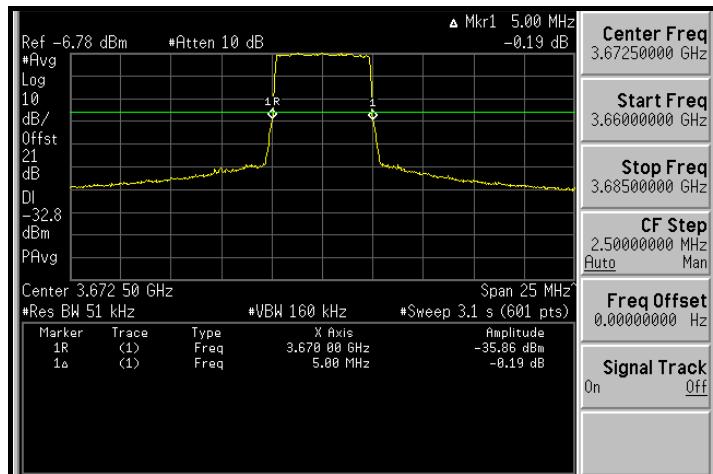
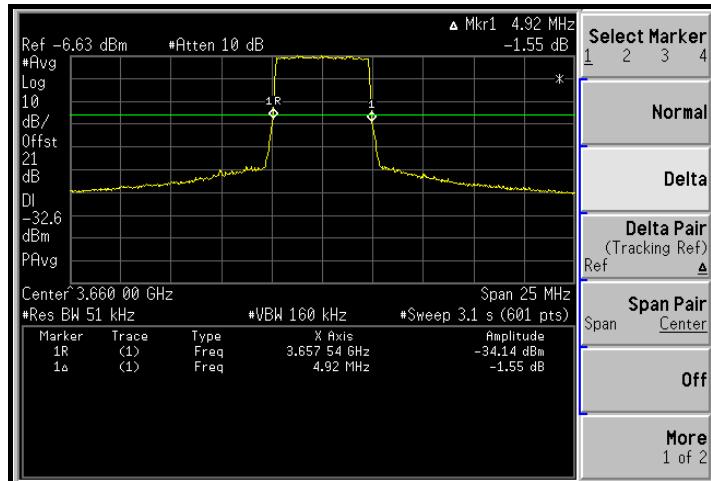
## HIGH CHANNEL

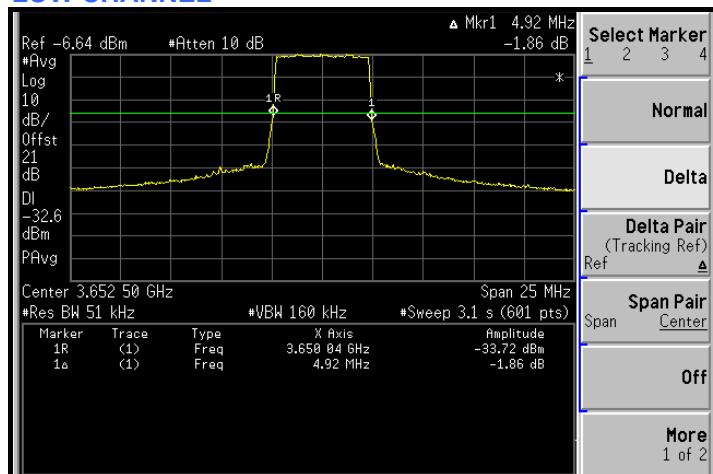


## ANTENNA 1: LOW CHANNEL



### MIDDLE CHANNEL




### HIGH CHANNEL

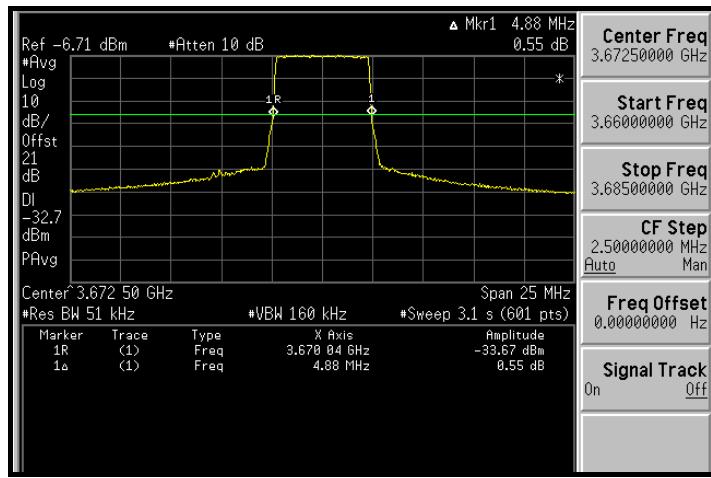


## CHANNEL BANDWIDTH: 7.0MHz


CHANNEL	-26dBc BANDWIDTH (MHz)	
	ANTENNA 0	ANTENNA 1
Low	6.88	6.94
Middle	6.88	6.94
High	6.94	6.94

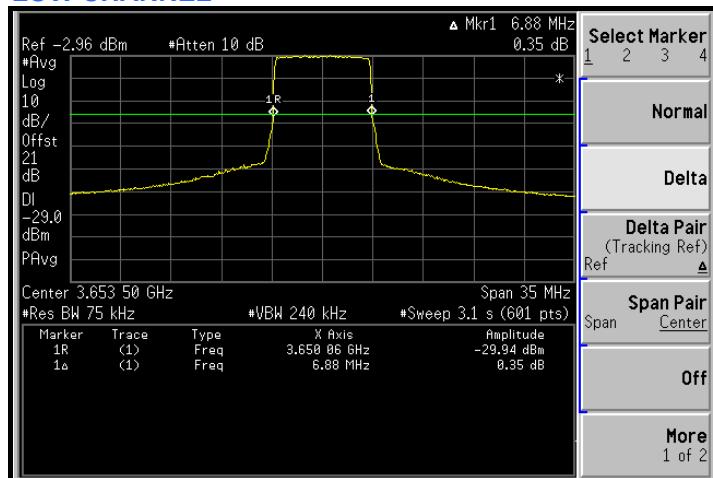 ANTENNA 0:  
 LOW CHANNEL


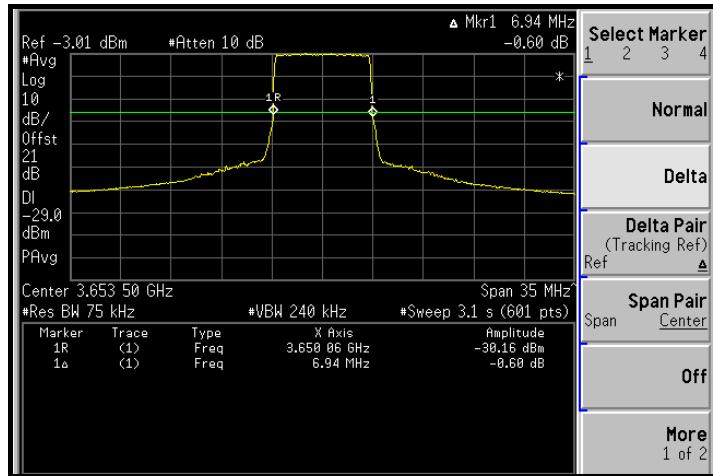
## MIDDLE CHANNEL

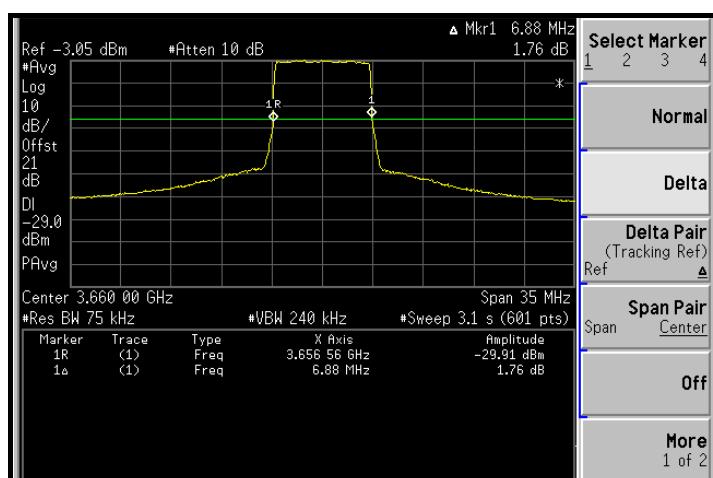


## HIGH CHANNEL

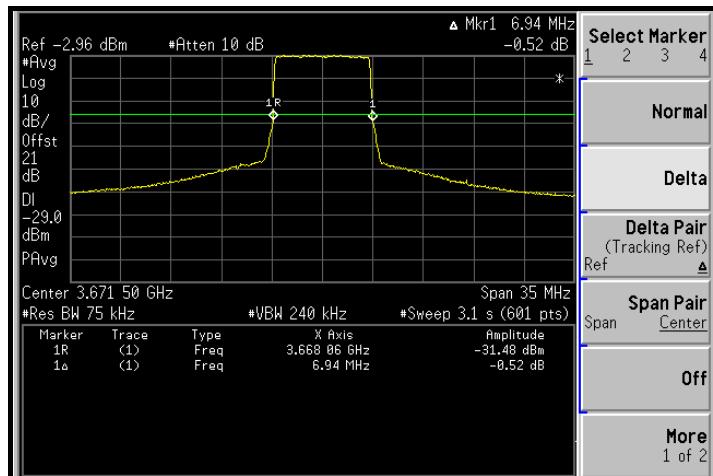


## ANTENNA 1: LOW CHANNEL



### MIDDLE CHANNEL


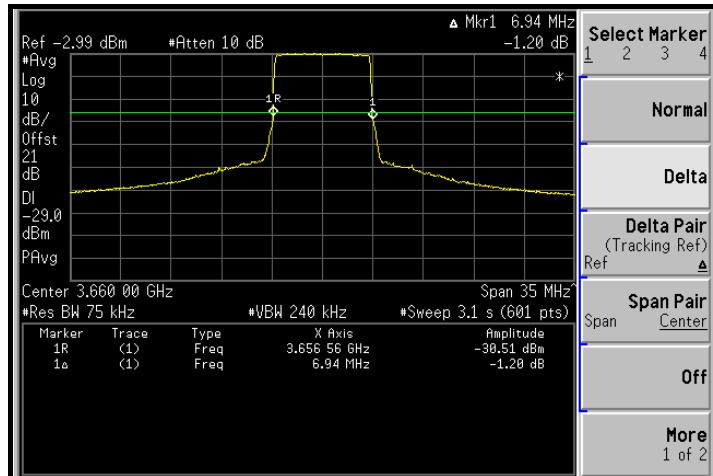


### HIGH CHANNEL

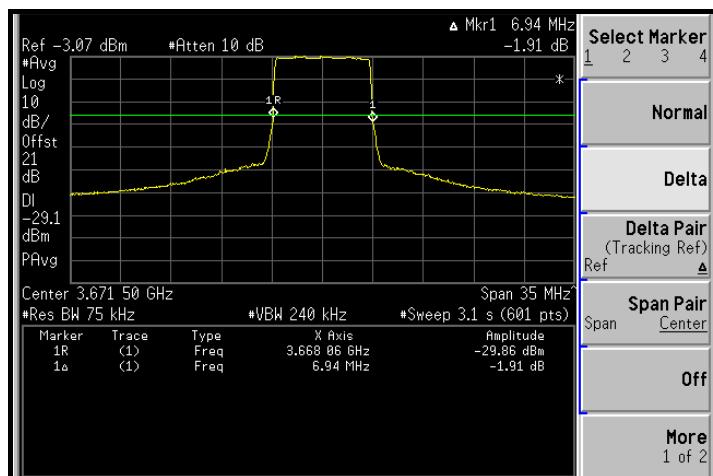


**CHANNEL BANDWIDTH: 10.0MHz**

CHANNEL	-26dBc BANDWIDTH (MHz)	
	ANTENNA 0	ANTENNA 1
Low	9.67	9.67
Middle	9.67	9.67
High	9.67	9.67

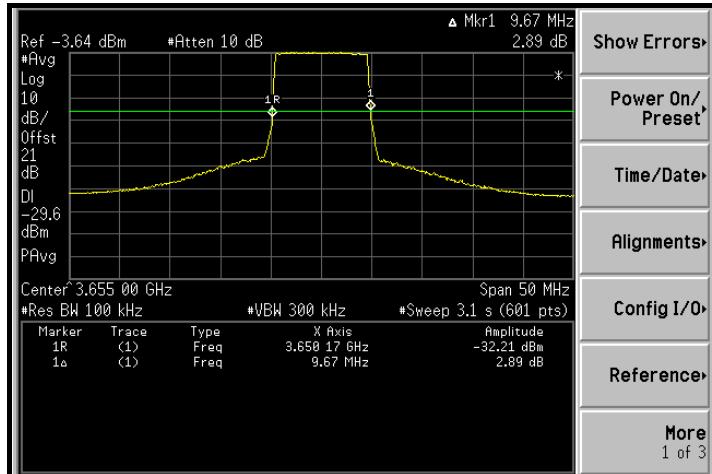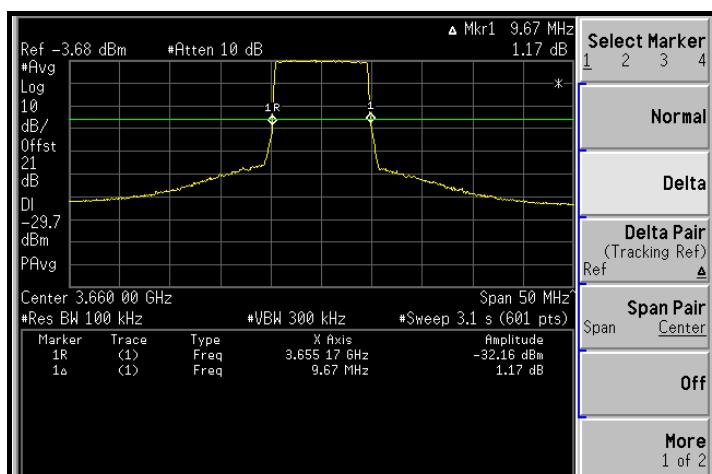
**ANTENNA 0:  
LOW CHANNEL**

**MIDDLE CHANNEL**

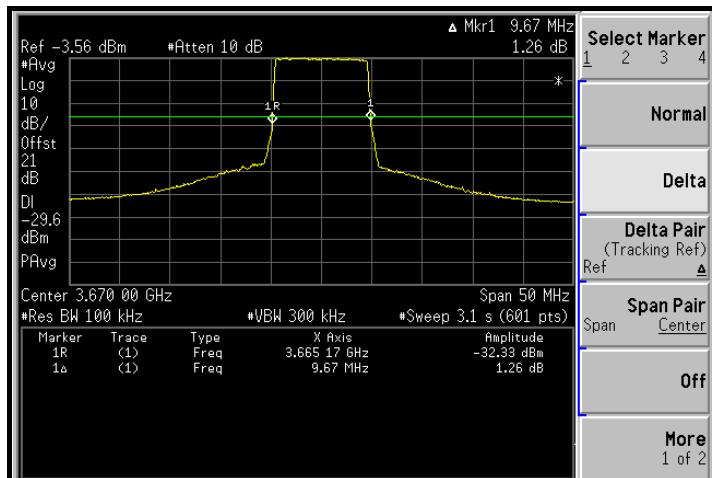
## HIGH CHANNEL




## ANTENNA 1:

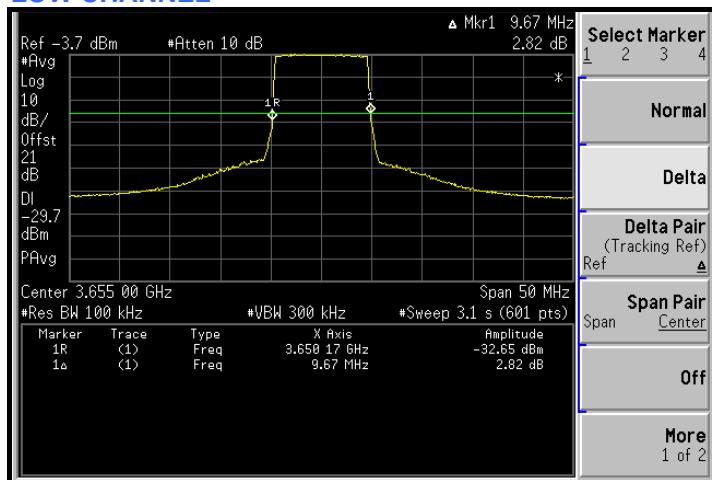
### LOW CHANNEL



### MIDDLE CHANNEL

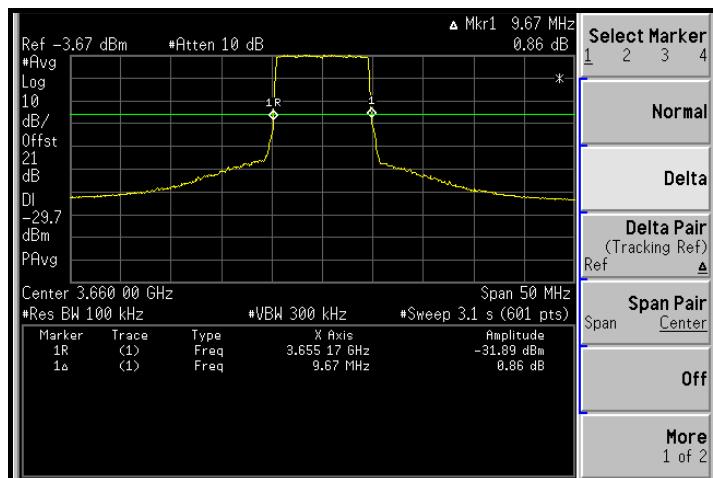

### HIGH CHANNEL

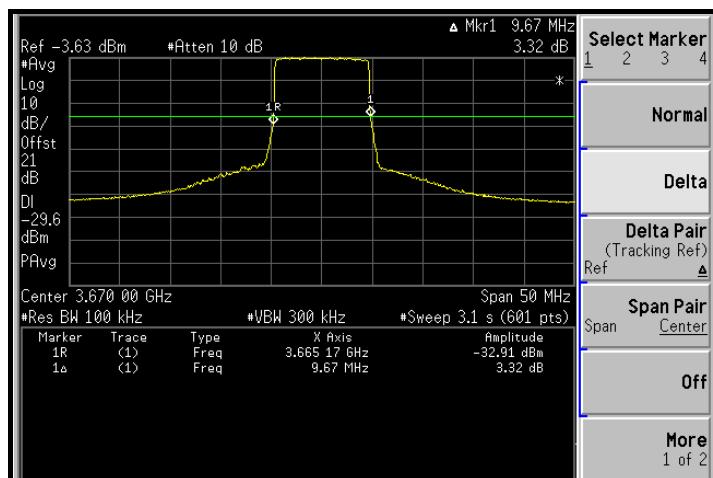



## 4.4 EMISSION MASKS

### 4.4.1 LIMITS OF EMISSION MASKS

For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the unauthorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10\log(P)$  dB.

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec. 11, 2009
RF cable	SUCOFLEX 104	274041/4	Aug. 28, 2009	Aug. 27, 2010
DC-6GHz 20dB 50W Fixed attenuator Woken	MDC9331N-20	0724	May 15, 2009	May 14, 2010

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.4.3 TEST SETUP

Same as 4.1.4



A D T

#### 4.4.4 TEST PROCEDURES

- a. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW = 36kHz (3.5MHz bandwidth), 51kHz (5MHz bandwidth), 75kHz (7MHz bandwidth), 100kHz (10MHz bandwidth), VBW = 110kHz (3.5MHz bandwidth), 160kHz (5MHz bandwidth), 240kHz (7MHz bandwidth), 300kHz (10MHz bandwidth).
- b. Set EUT to transmit signal at un-modulation mode to get reference level,  $R_L$ .
- c. According  $R_L$  and Channel bandwidth to define Emission Mask range.
- d. Set EUT to transmit signal at modulation mode to check signal can comply with Emission Mask or not.

#### 4.4.5 EUT OPERATING CONDITION


Same as 4.1.5

## 4.4.6 TEST RESULTS


### CHANNEL BANDWIDTH: 3.5MHz

#### ANTENNA 0

##### LOW CHANNEL

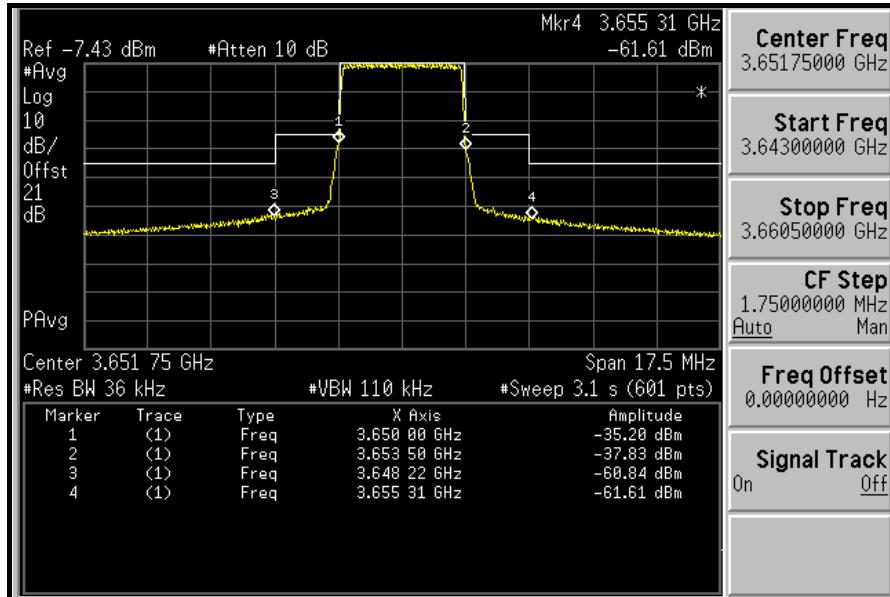


##### MIDDLE CHANNEL

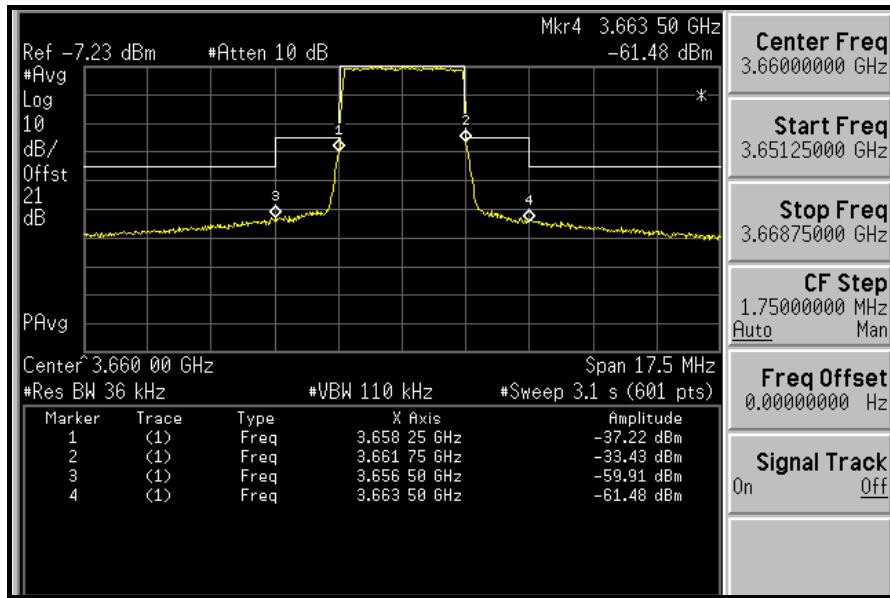




A D T



## HIGH CHANNEL

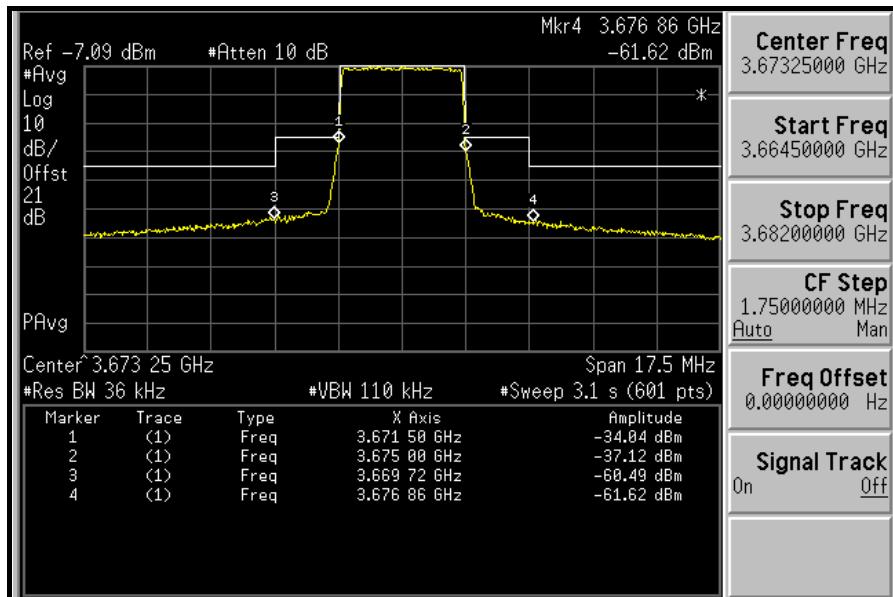

## ANTENNA 1

### LOW CHANNEL

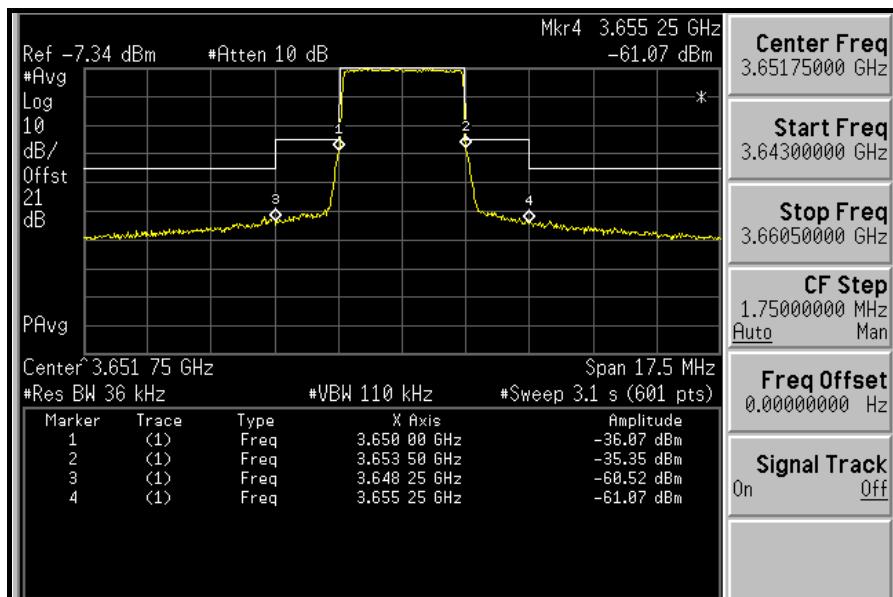


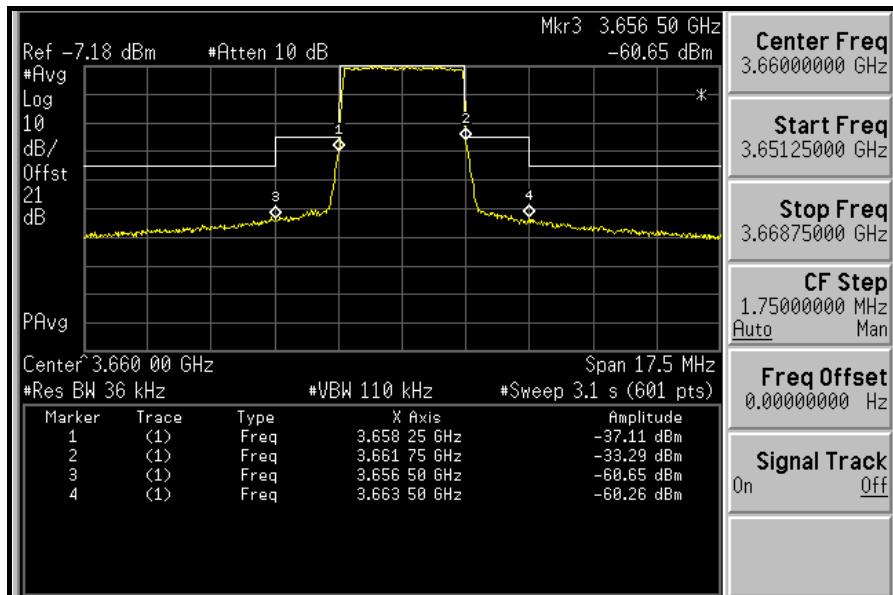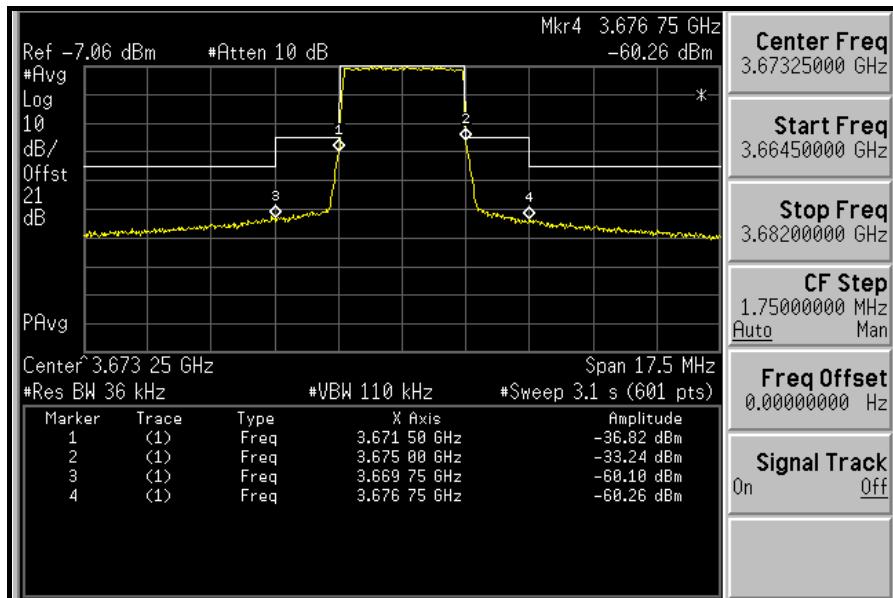**MIDDLE CHANNEL**

**HIGH CHANNEL**


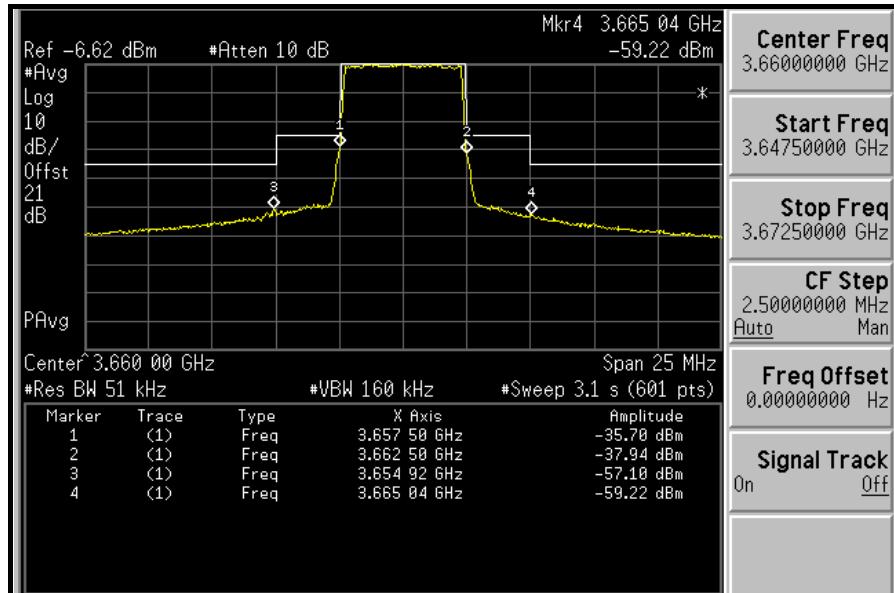
## CHANNEL BANDWIDTH: 5MHz

### ANTENNA 0

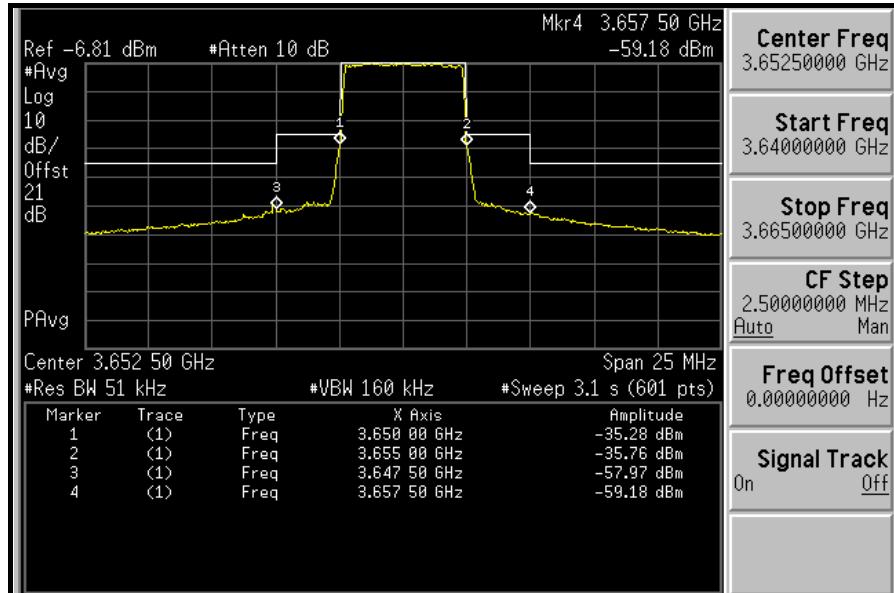
#### LOW CHANNEL



#### MIDDLE CHANNEL




## HIGH CHANNEL

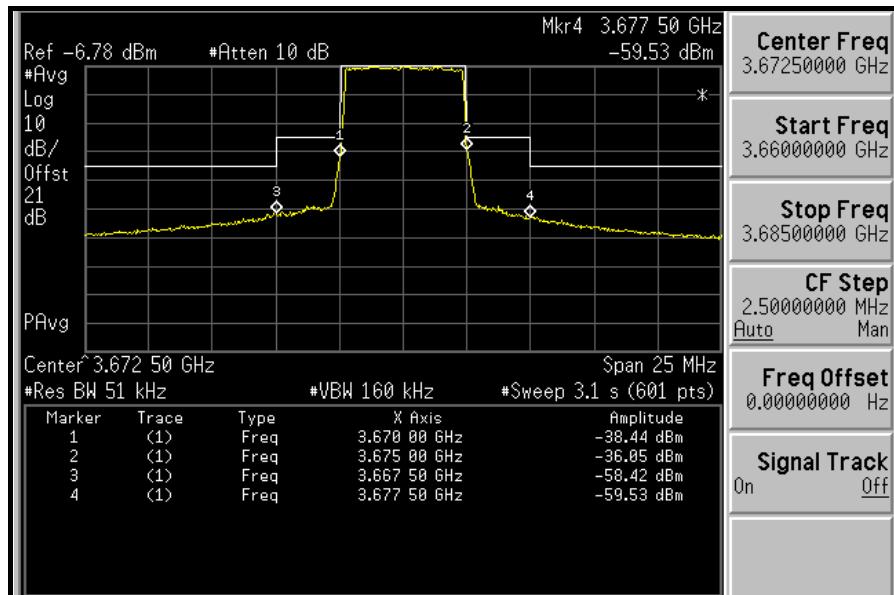

## ANTENNA 1


### LOW CHANNEL

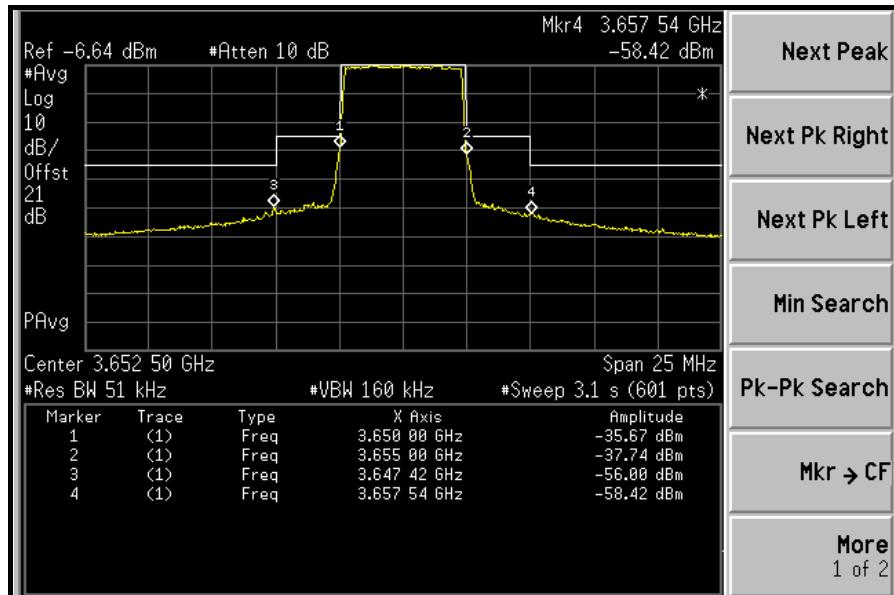




A D T

### MIDDLE CHANNEL

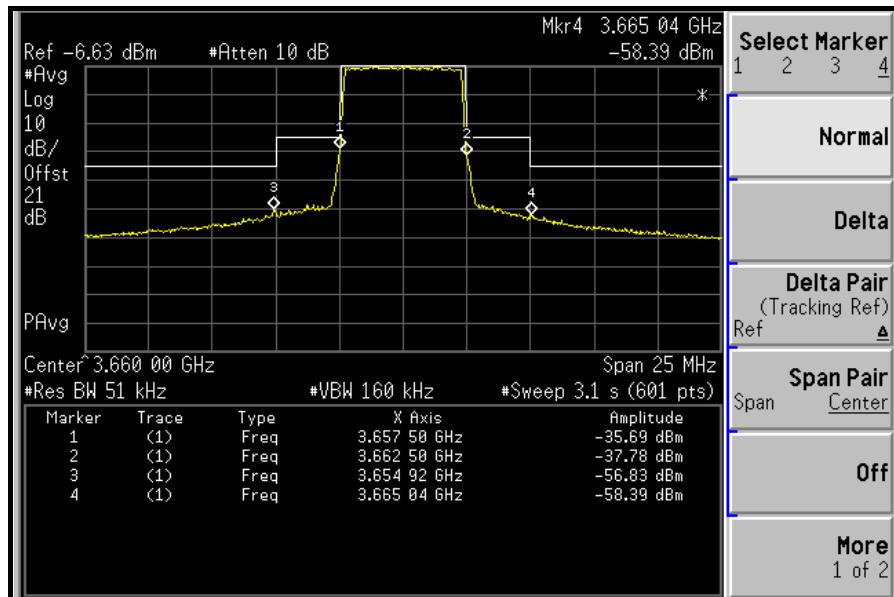


### HIGH CHANNEL

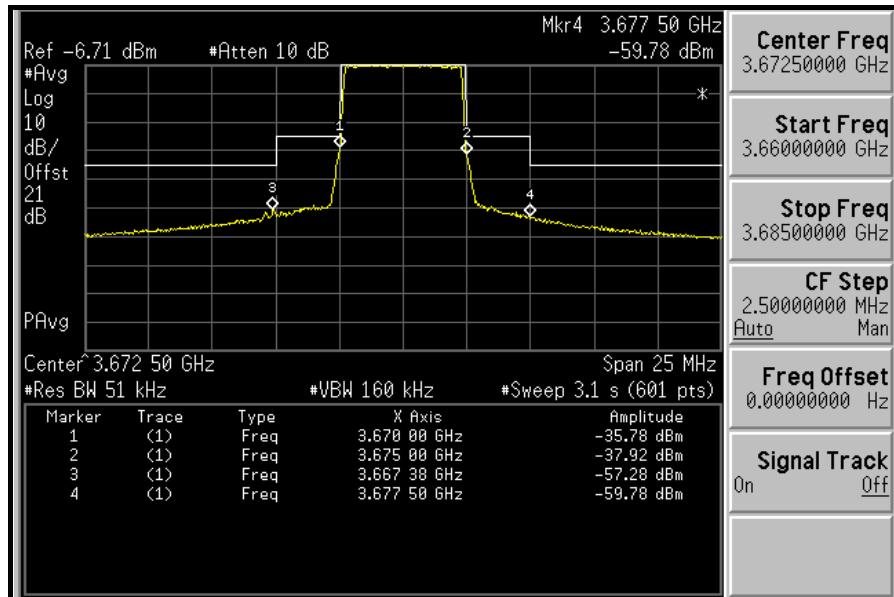


## CHANNEL BANDWIDTH: 7MHz

### ANTENNA 0


#### LOW CHANNEL

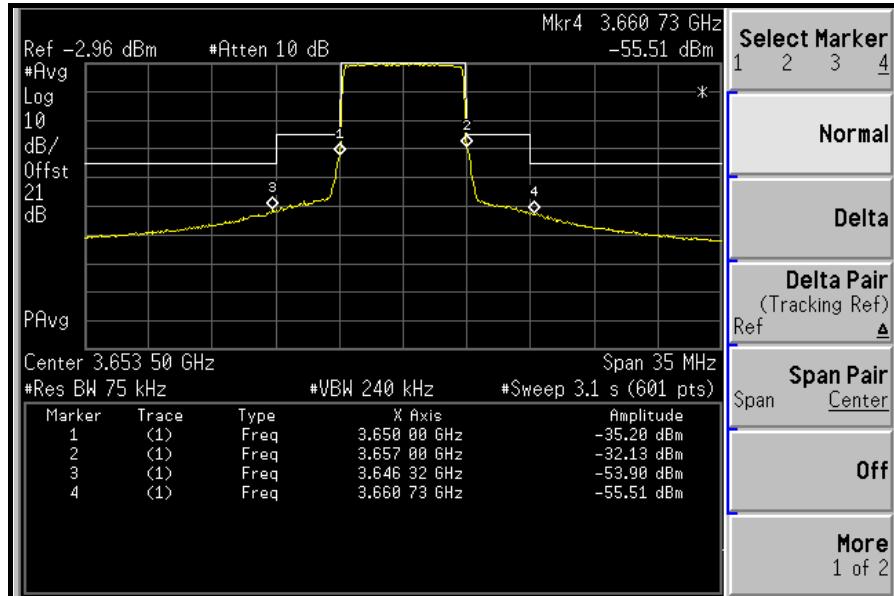

#### MIDDLE CHANNEL

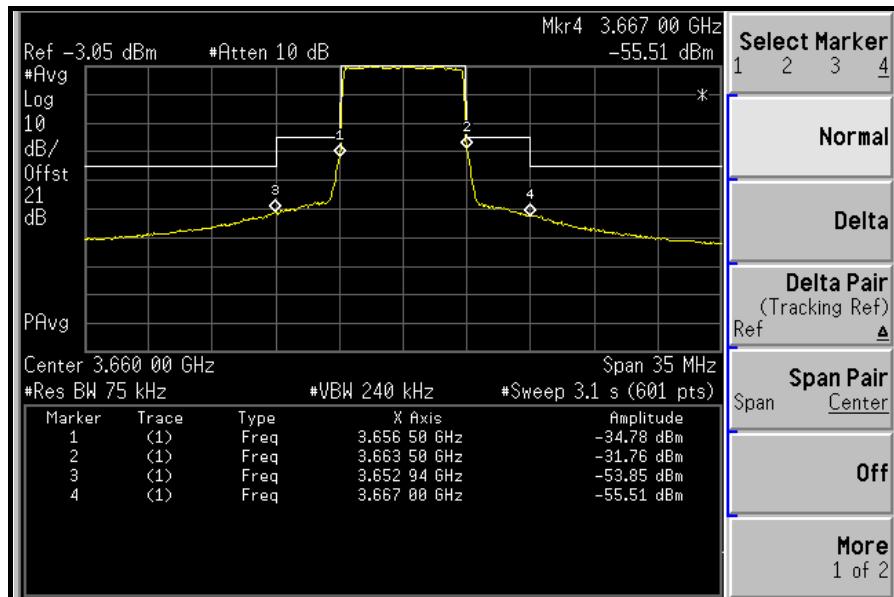




## HIGH CHANNEL

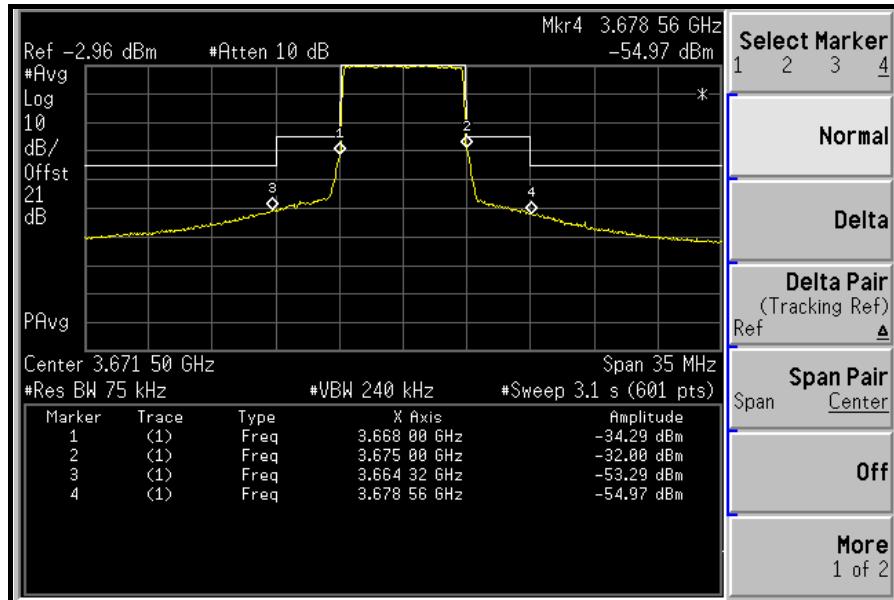

## ANTENNA 1

### LOW CHANNEL

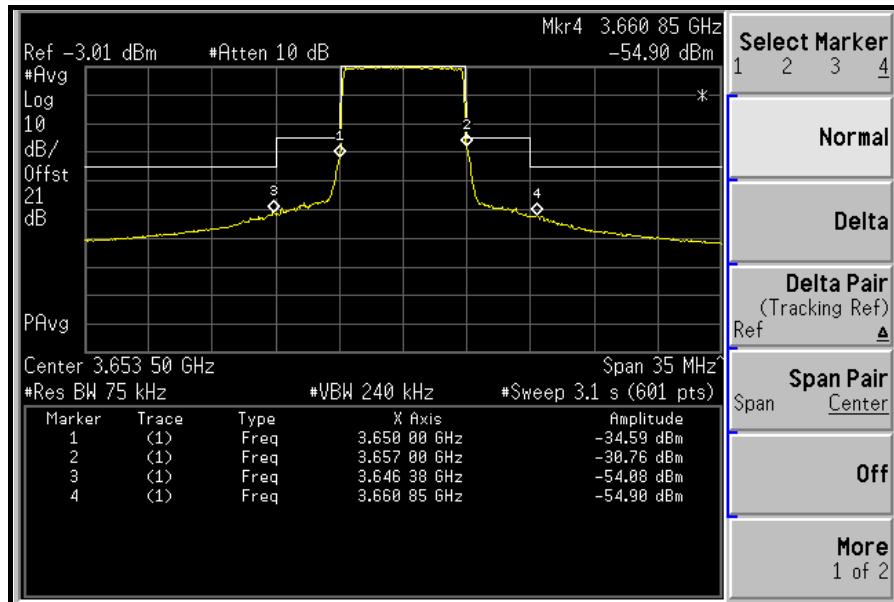


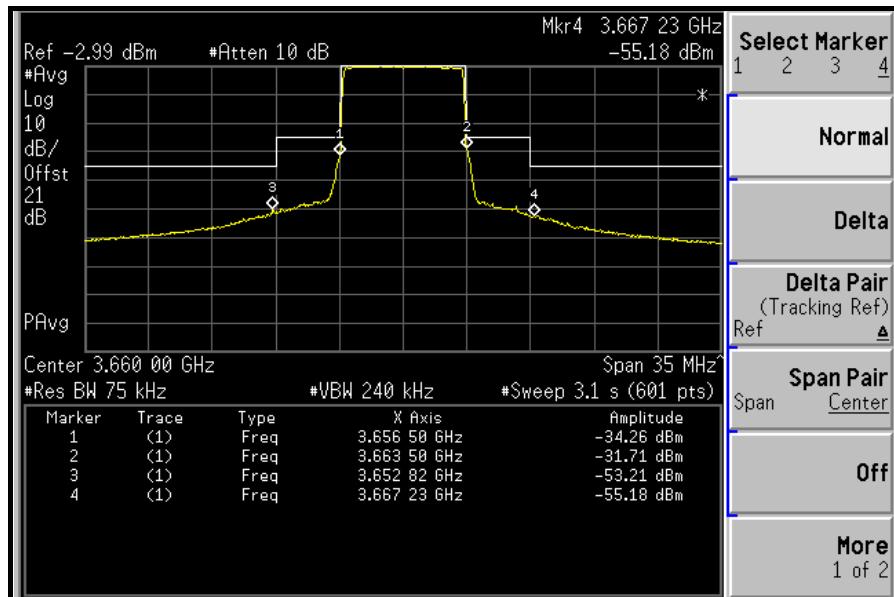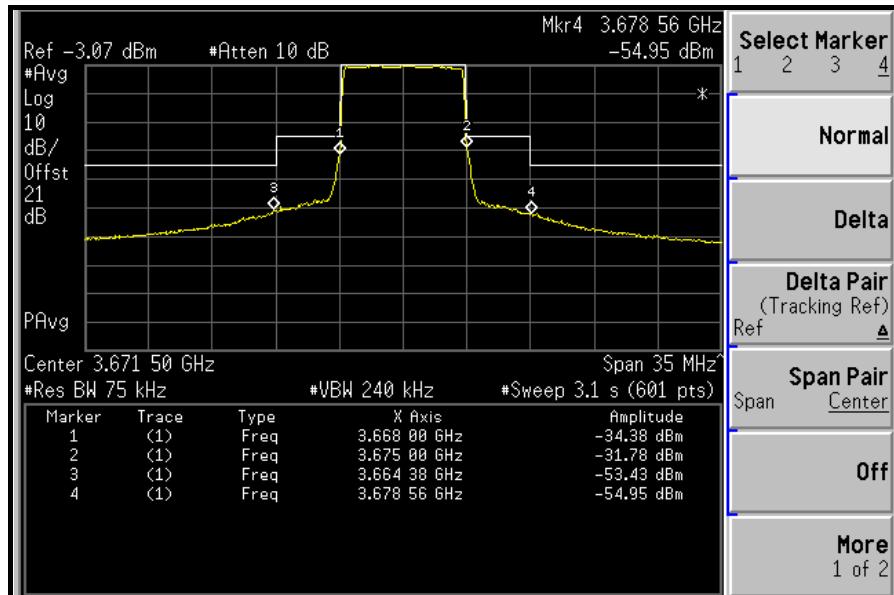**MIDDLE CHANNEL**

**HIGH CHANNEL**


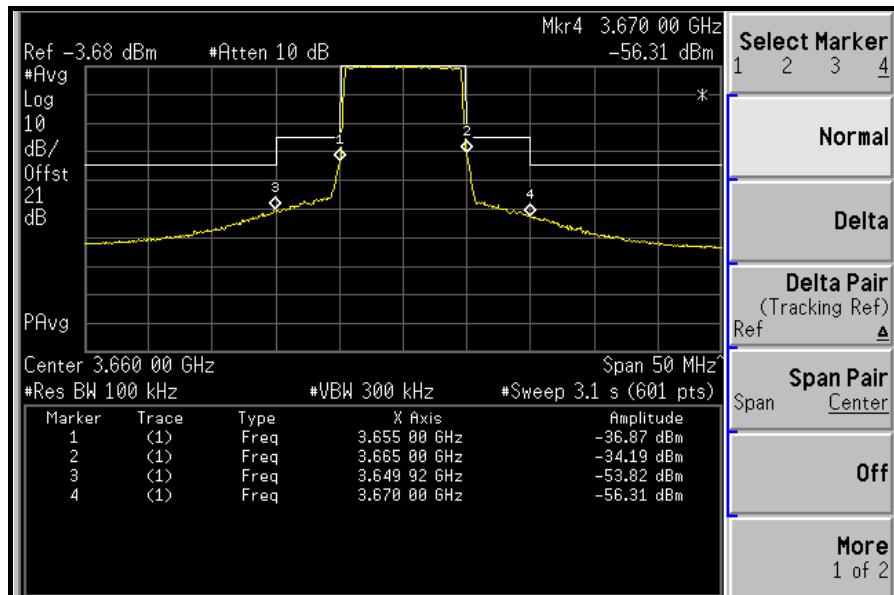
## CHANNEL BANDWIDTH: 10MHz

### ANTENNA 0

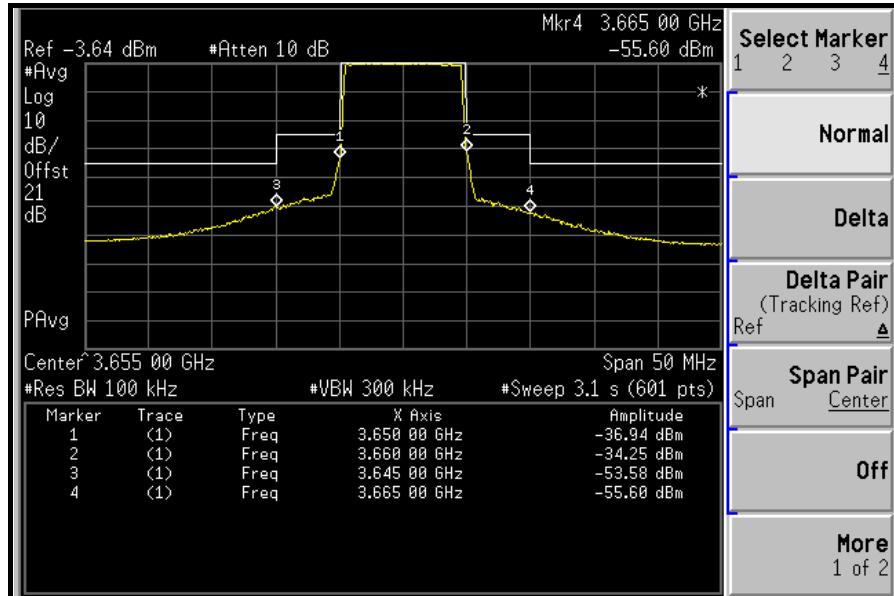
#### LOW CHANNEL



#### MIDDLE CHANNEL




## HIGH CHANNEL

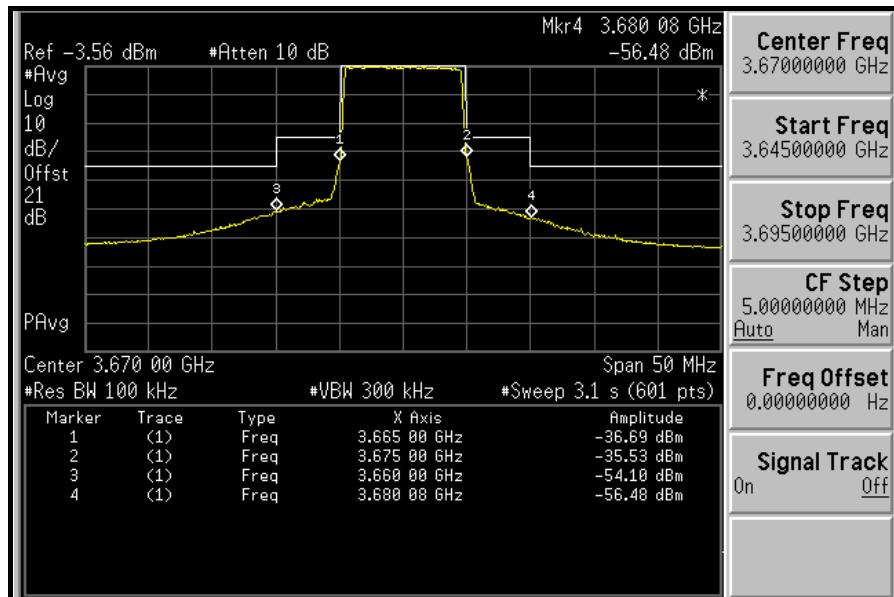

## ANTENNA 1


### LOW CHANNEL

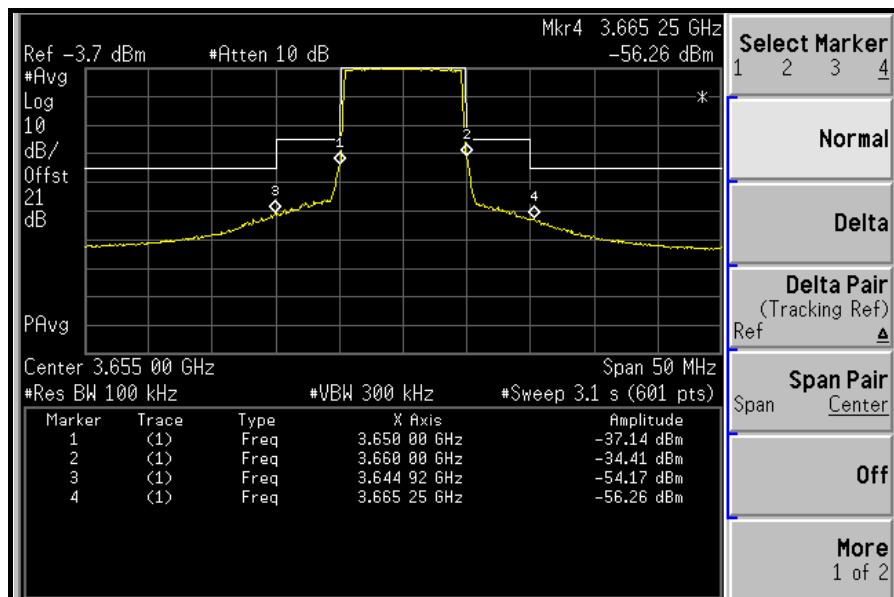




A D T

### MIDDLE CHANNEL

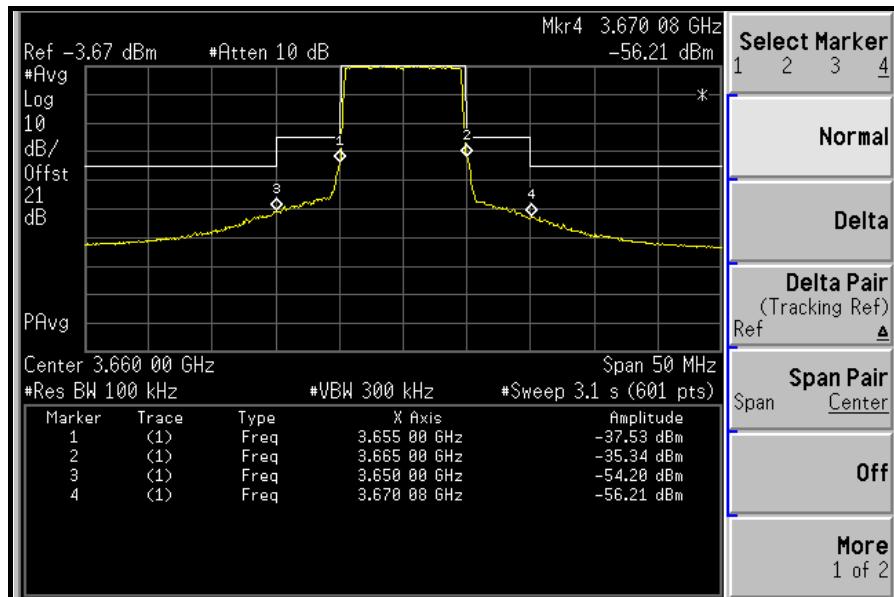

### HIGH CHANNEL

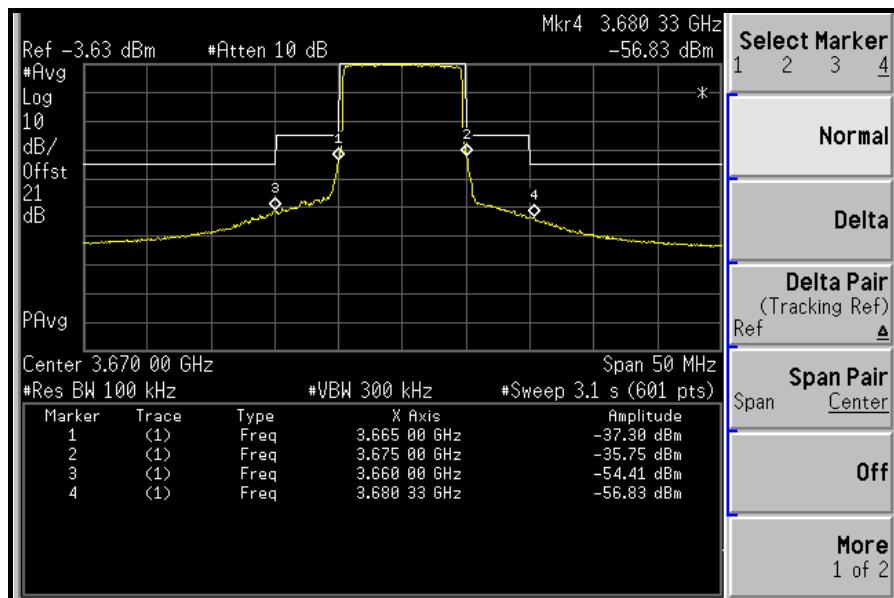



## 4.5 CONDUCTED SPURIOUS EMISSIONS

### 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

According to FCC 90.1323 specified that the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in Watts, by at least  $43 + 10 \log (P)$  dB. The limit of emission equal to  $-13\text{dBm}$  Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth

### 4.5.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUe DATE OF CALIBRATION
Spectrum Analyzer Agilent	E4446A	MY44360128	Dec. 12, 2008	Dec. 11, 2009
RF cable	SUCOFLEX 104	274041/4	Aug. 28, 2009	Aug. 27, 2010
DC-6GHz 20dB 50W Fixed attenuator Woken	MDC9331N-20	0724	May 15, 2009	May 14, 2010
Wainwright Instruments High Pass Filter	WHKX4.5/18G -10SS	NA	NA	NA

**NOTE:** The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE

- a. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 30MHz to 40GHz, it shall be connected to the 20dB pad attenuated the carried frequency. The spectrum set RBW = 1MHz, VBW= 3MHz.

#### 4.5.4 TEST SETUP

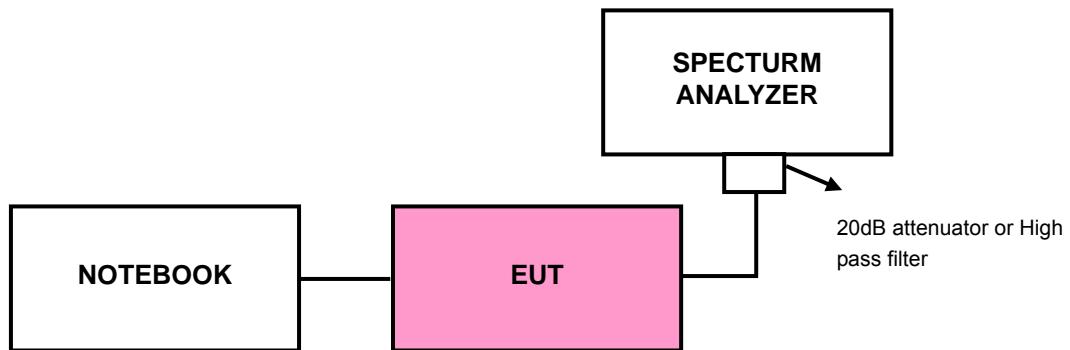

#### 4.5.5 EUT OPERATING CONDITIONS


Same as 4.1.5

## 4.5.6 TEST RESULTS


### CHANNEL BANDWIDTH: 3.5MHz

#### ANTENNA 0


LOW CHANNEL: 30MHz ~ 1GHz:

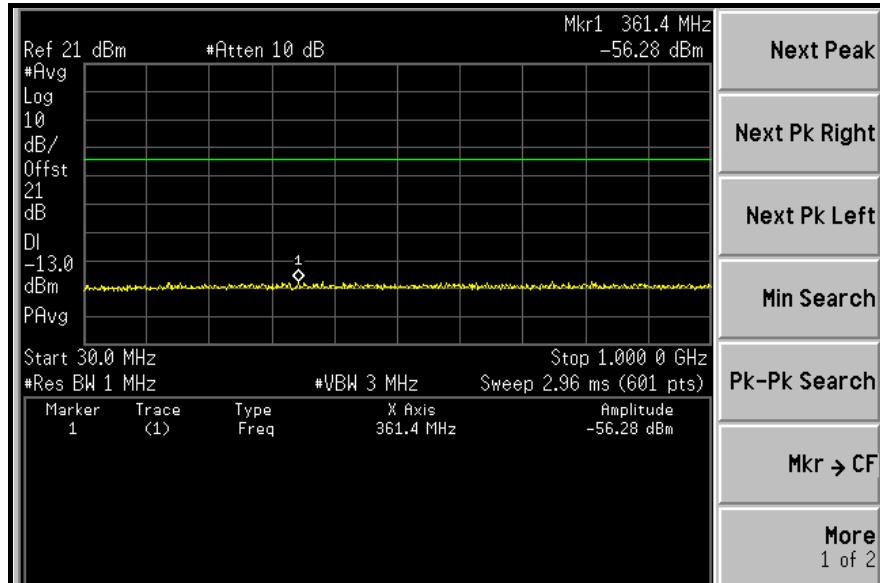


1GHz ~ 10GHz:

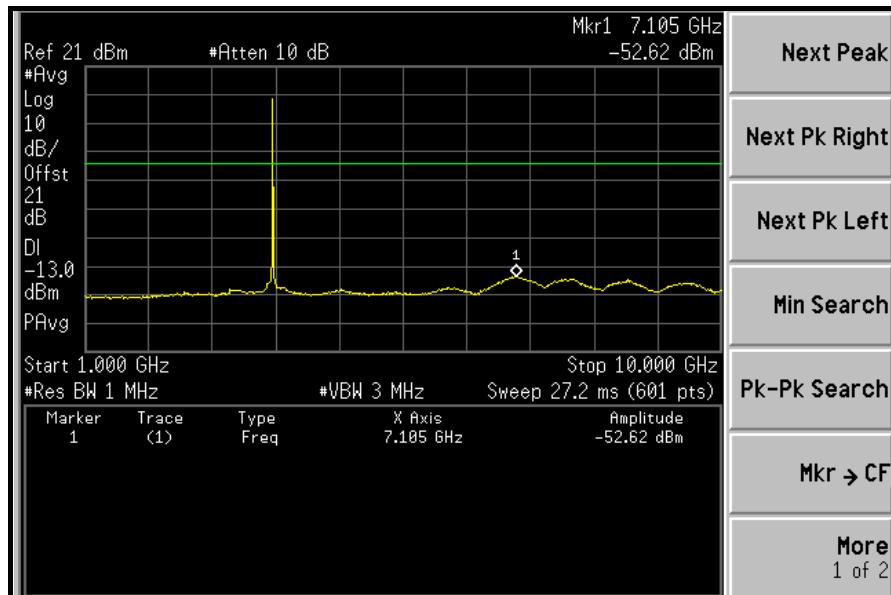


10GHz ~ 40GHz:

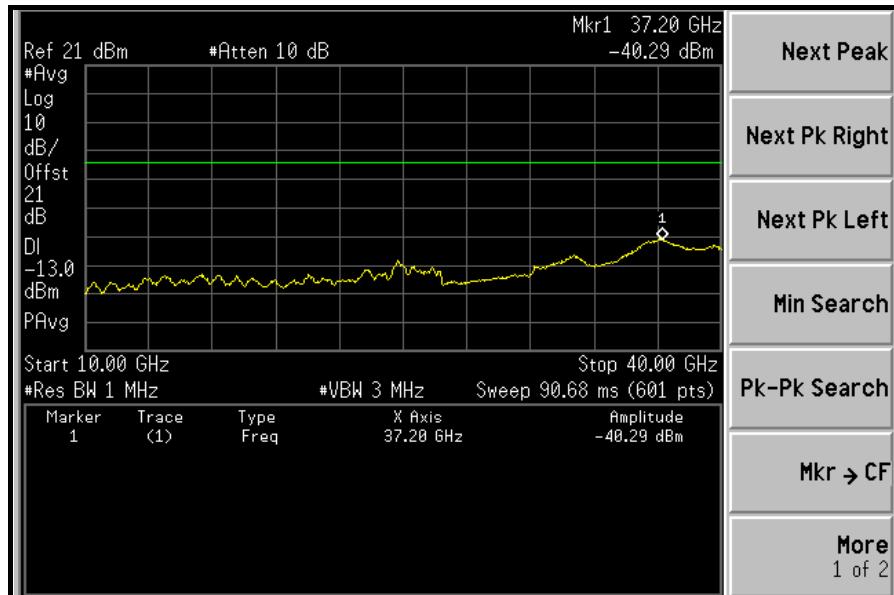


MIDDLE CHANNEL: 30MHz ~ 1GHz:


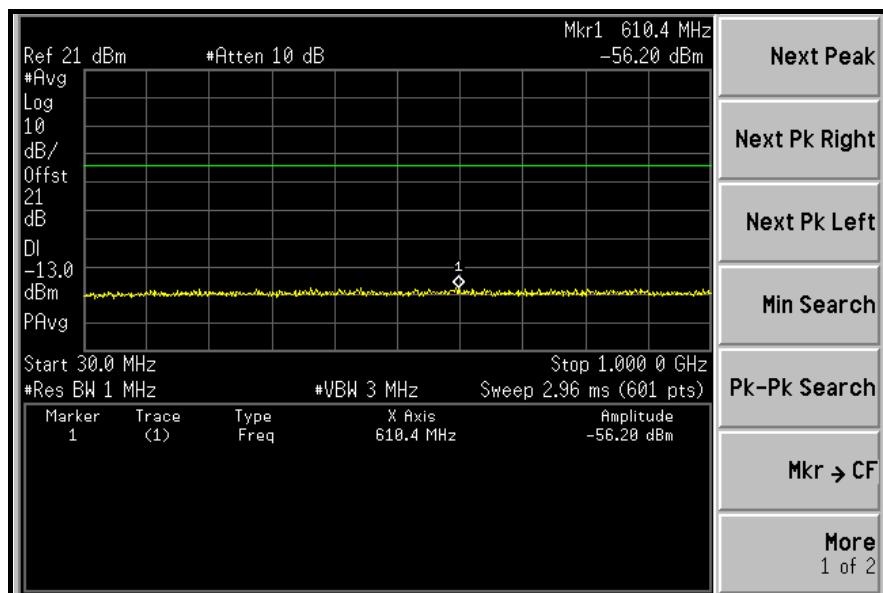


1GHz ~ 10GHz:

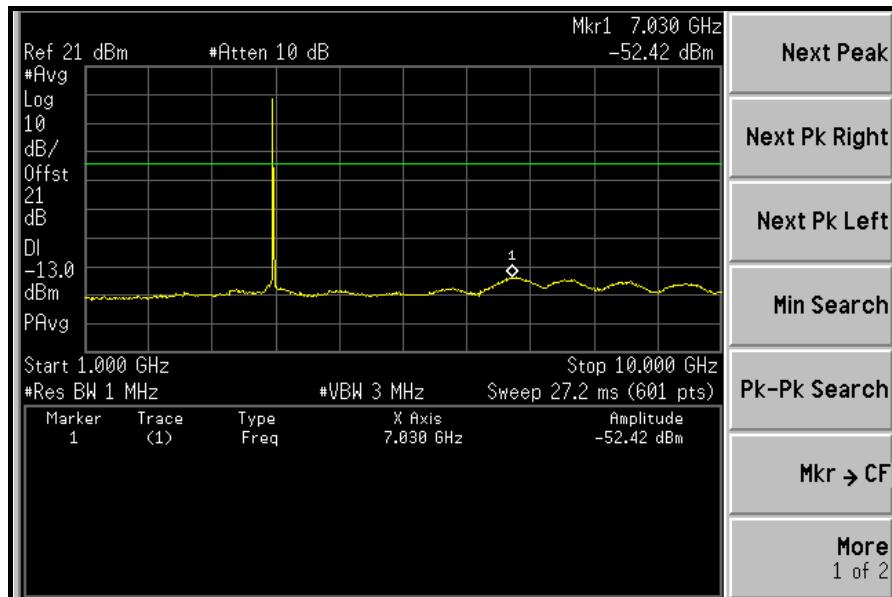


10GHz ~ 40GHz:

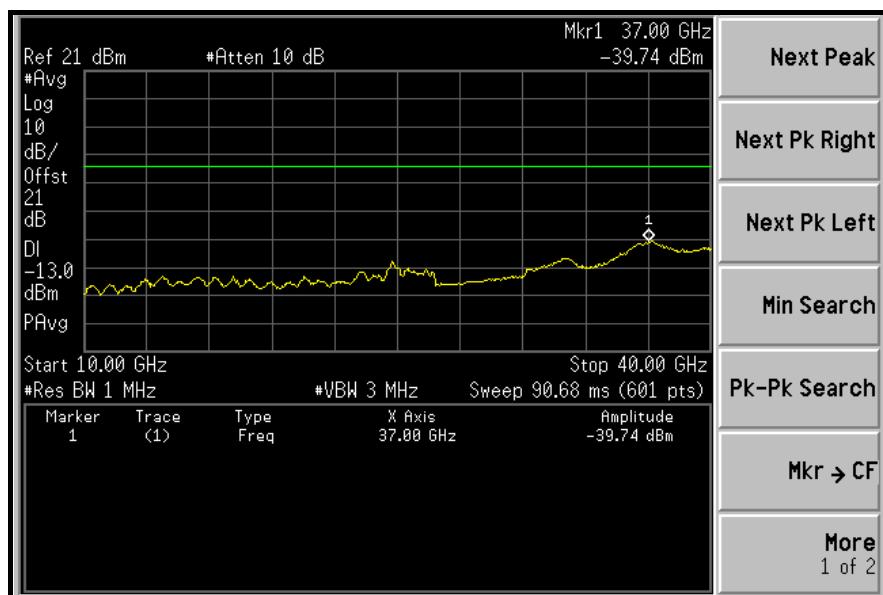

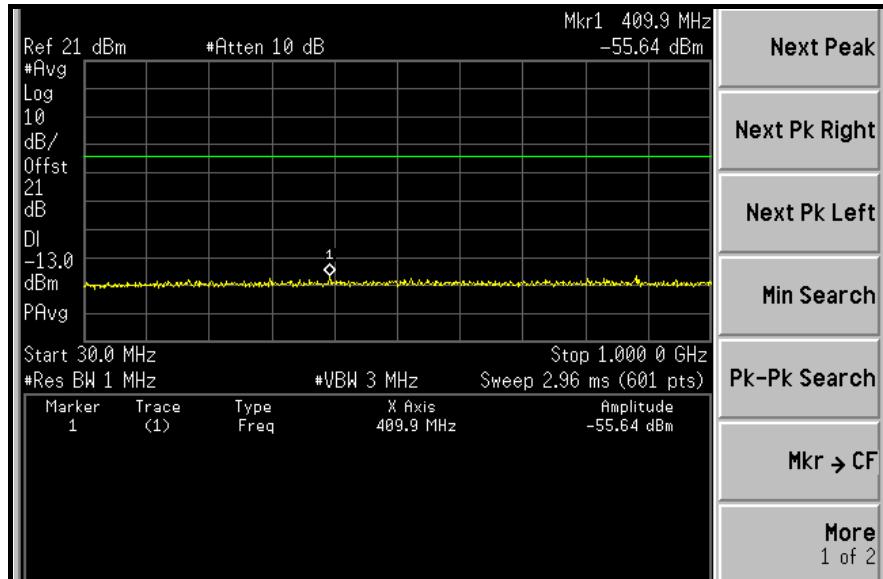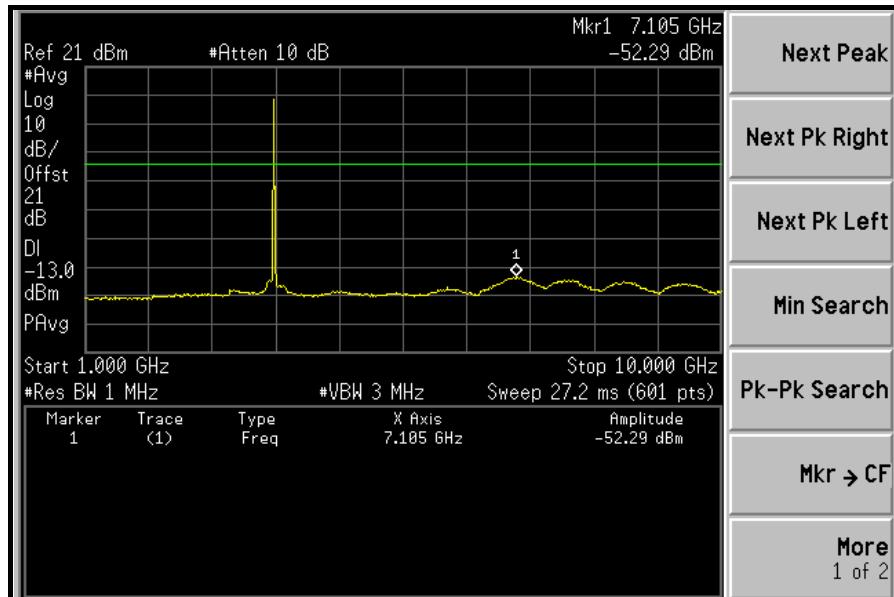
**HIGH CHANNEL: 30MHz ~ 1GHz:**

**1GHz ~ 10GHz:**

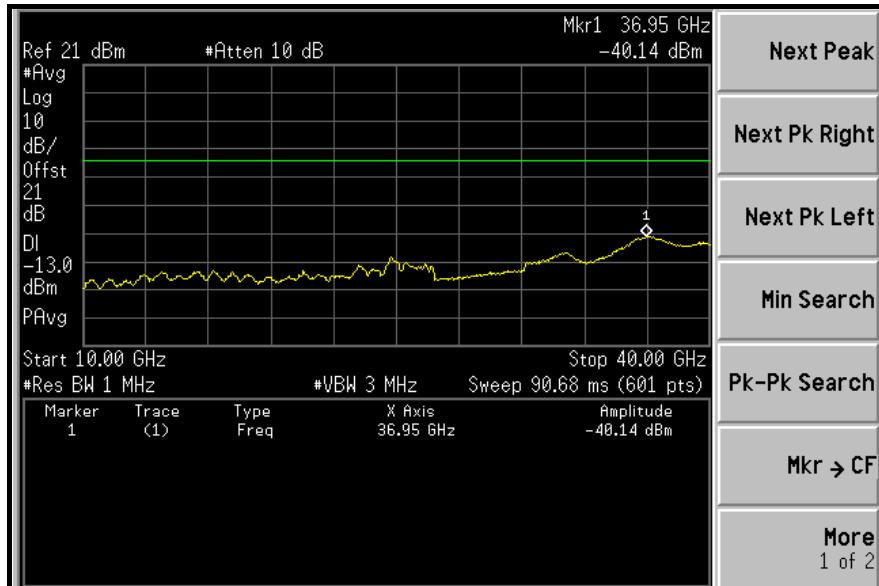
10GHz ~ 40GHz:




## ANTENNA 1

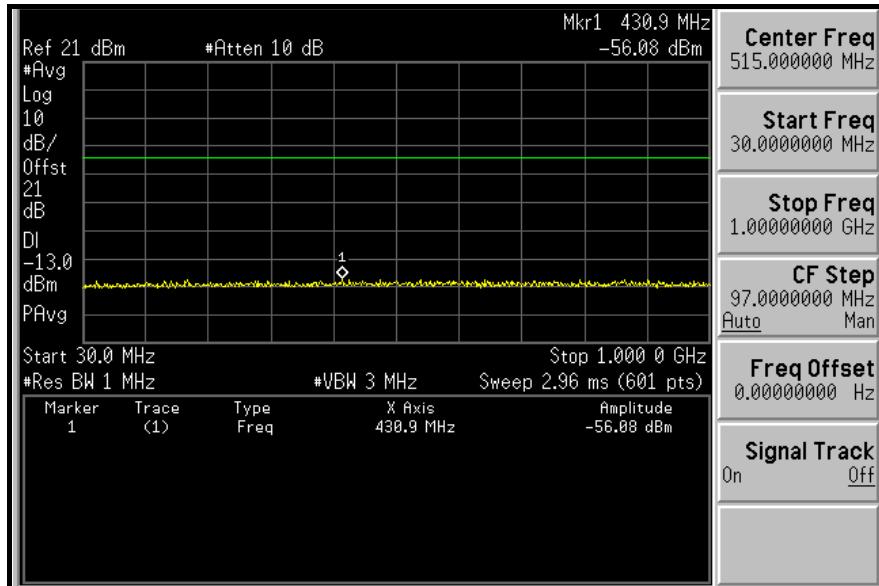
LOW CHANNEL: 30MHz ~ 1GHz:



1GHz ~ 10GHz:

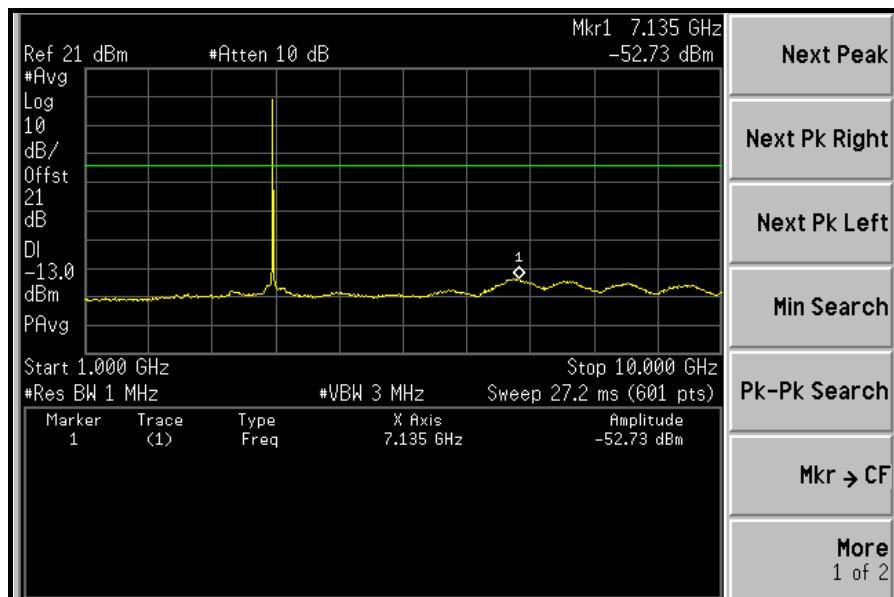


10GHz ~ 40GHz:

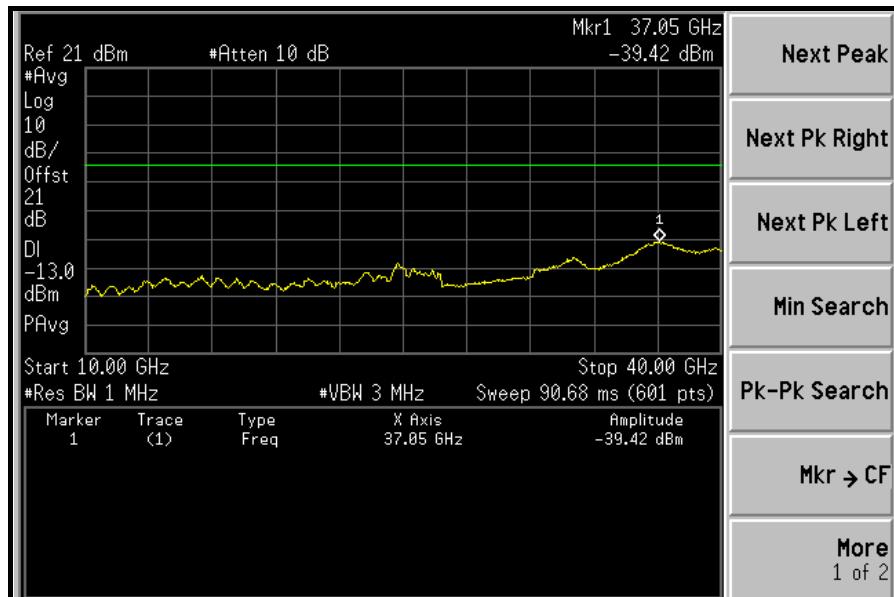




A D T

### MIDDLE CHANNEL: 30MHz ~ 1GHz:

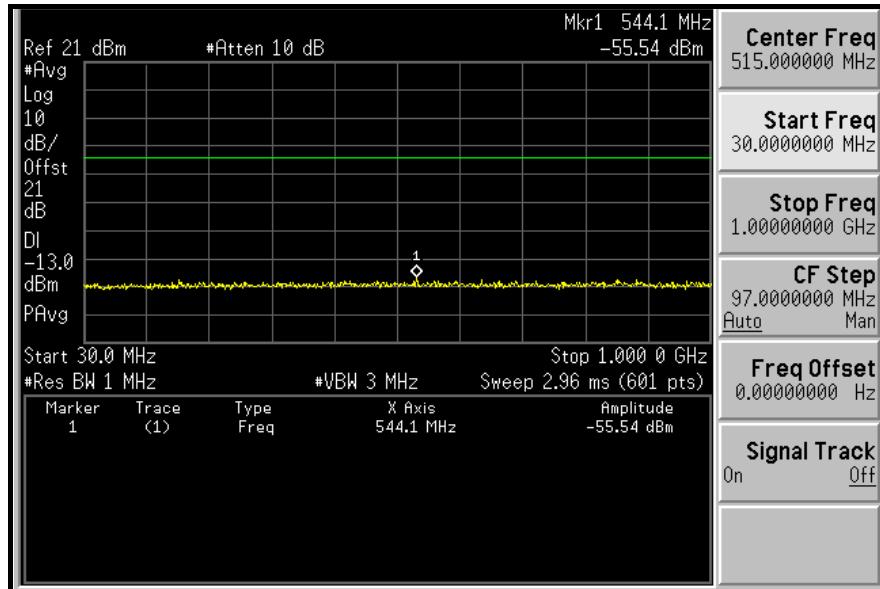


### 1GHz ~ 10GHz:

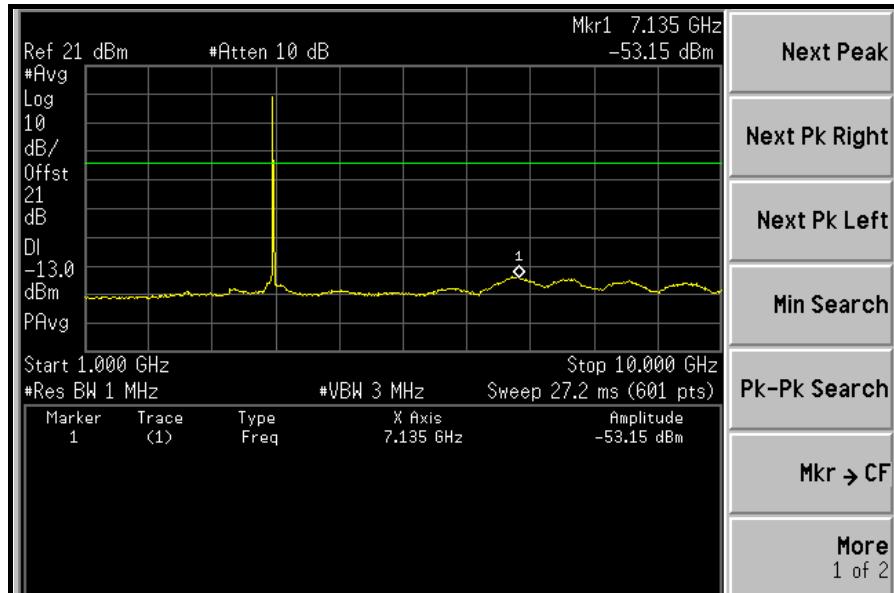




A D T


10GHz ~ 40GHz:

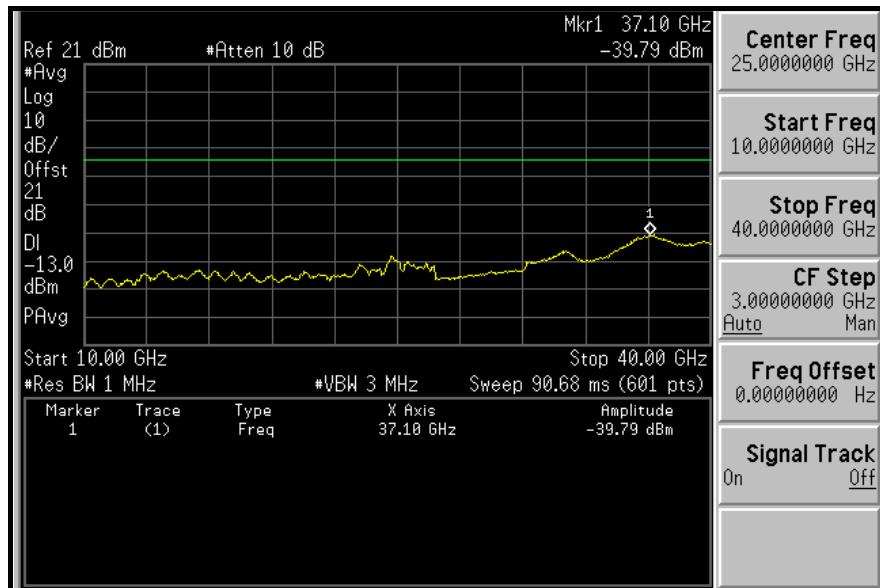


HIGH CHANNEL: 30MHz ~ 1GHz:

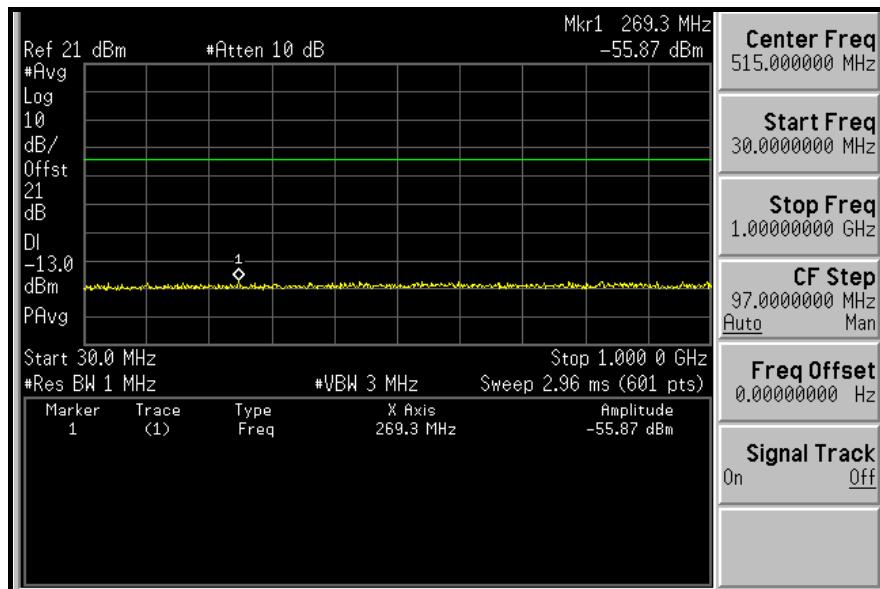

1GHz ~ 10GHz:

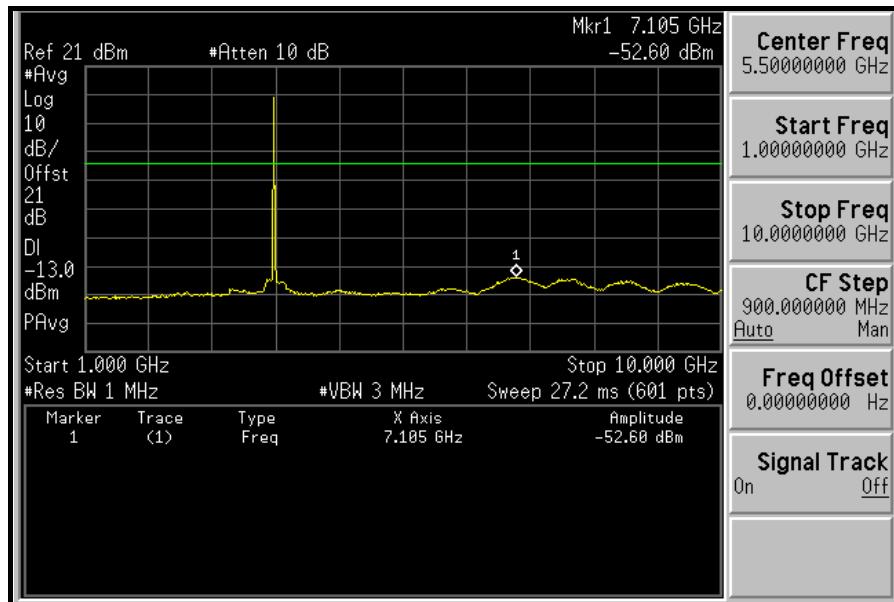


10GHz ~ 40GHz:

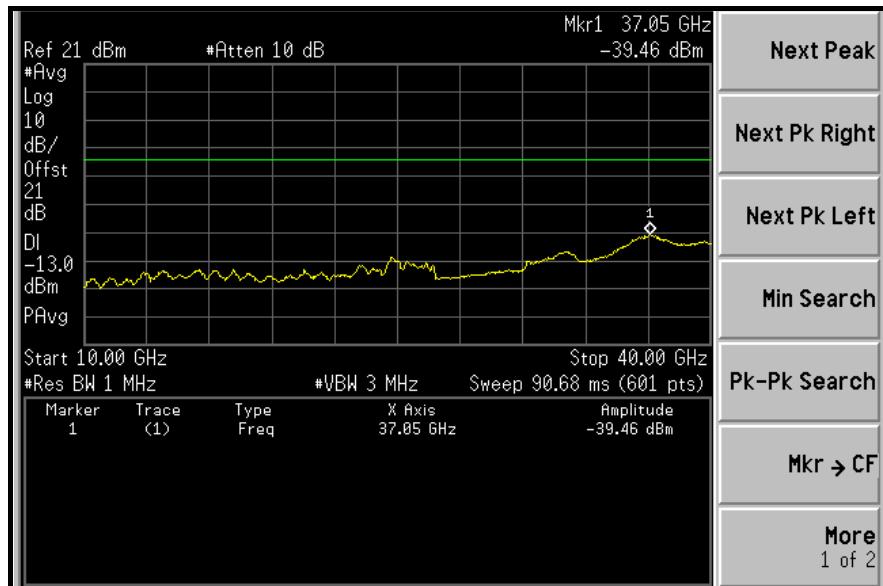


## CHANNEL BANDWIDTH: 5MHz

### ANTENNA 0


#### LOW CHANNEL: 30MHz ~ 1GHz:

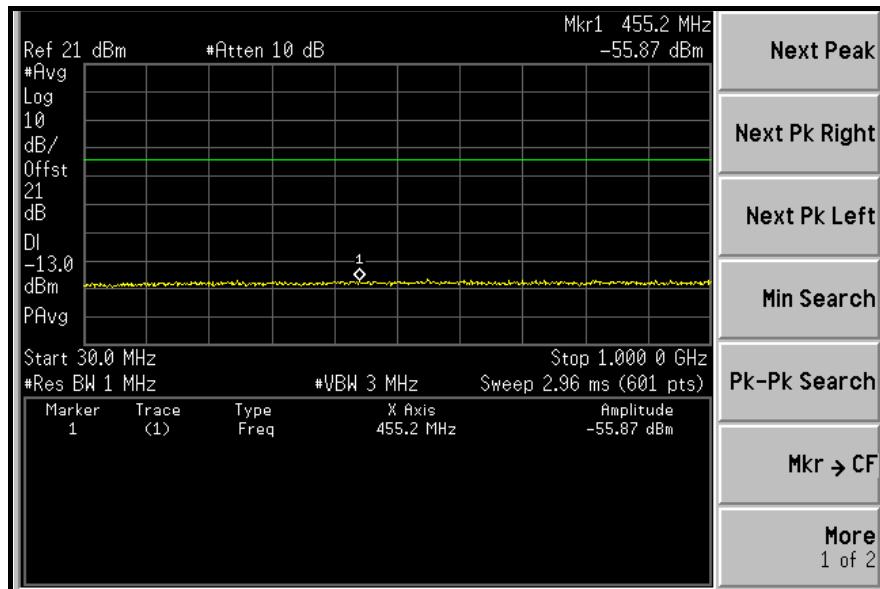


#### 1GHz ~ 10GHz:

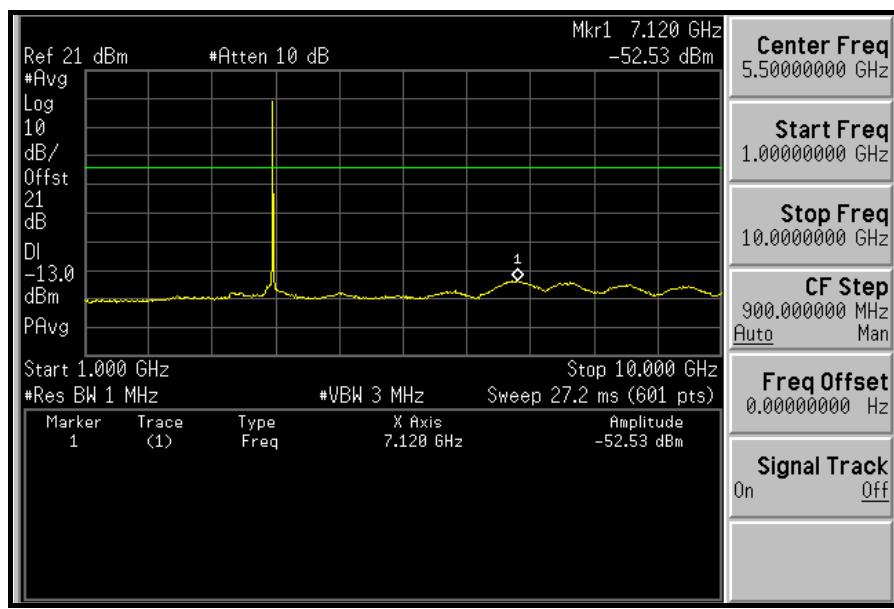


10GHz ~ 40GHz:

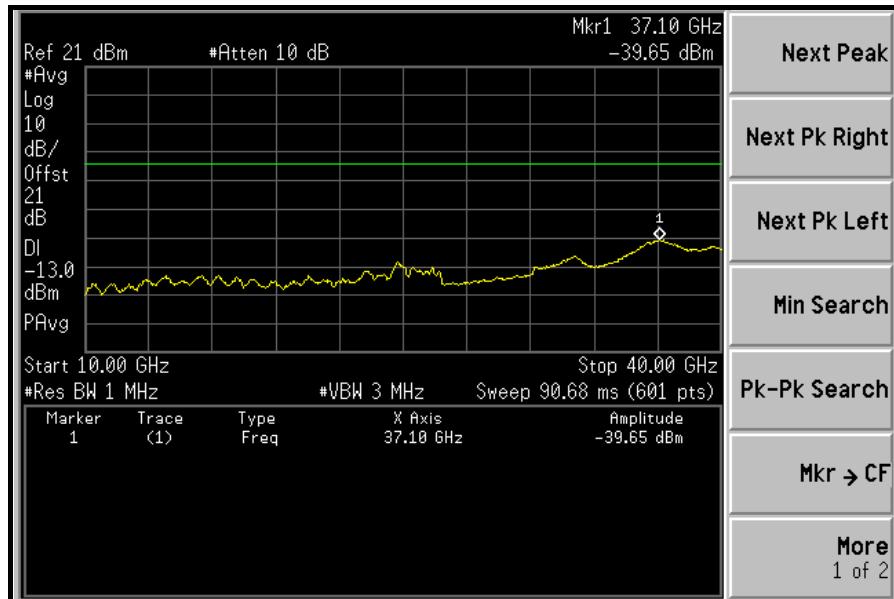


MIDDLE CHANNEL: 30MHz ~ 1GHz:

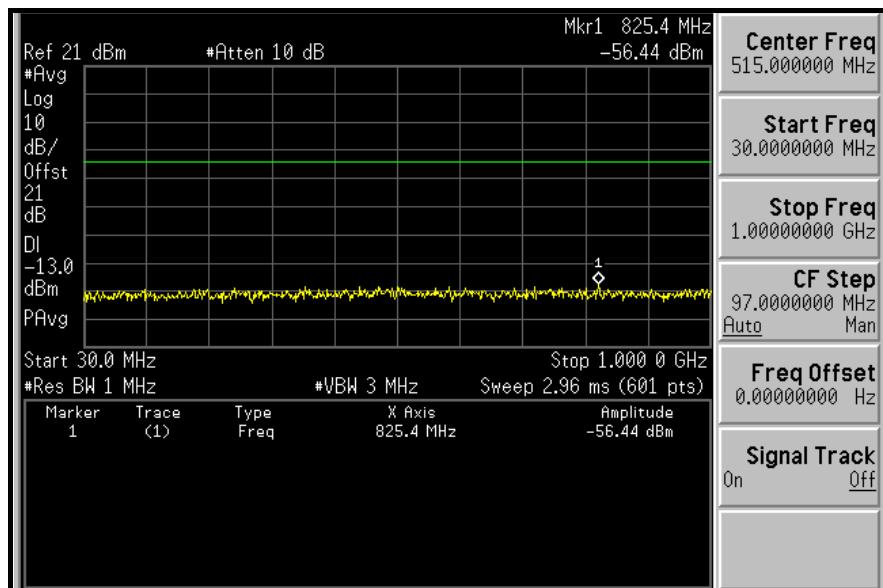

1GHz ~ 10GHz:

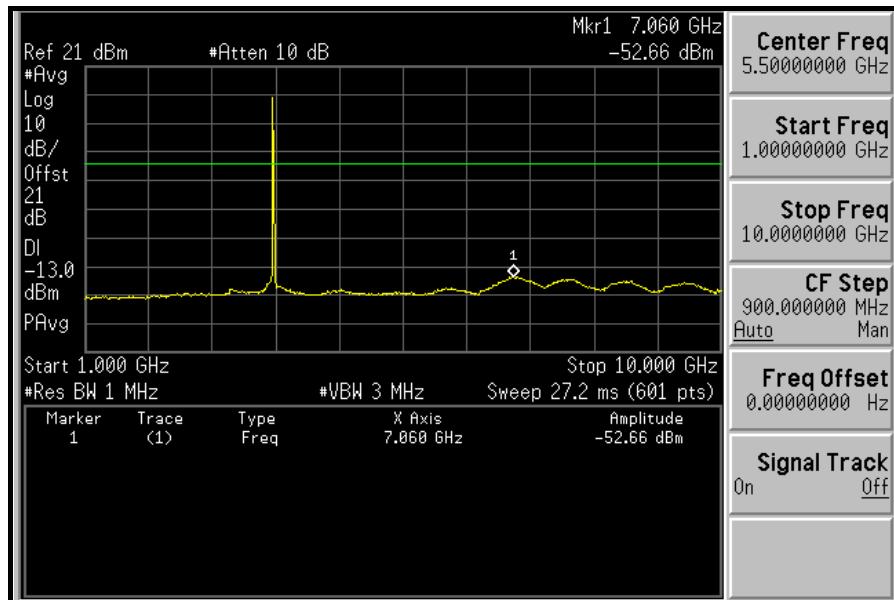


10GHz ~ 40GHz:

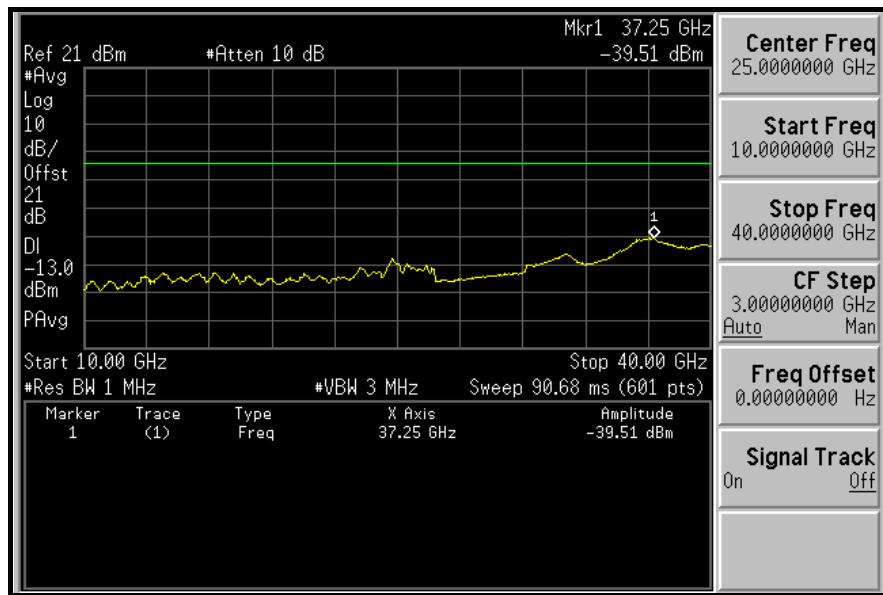




A D T

### HIGH CHANNEL: 30MHz ~ 1GHz:

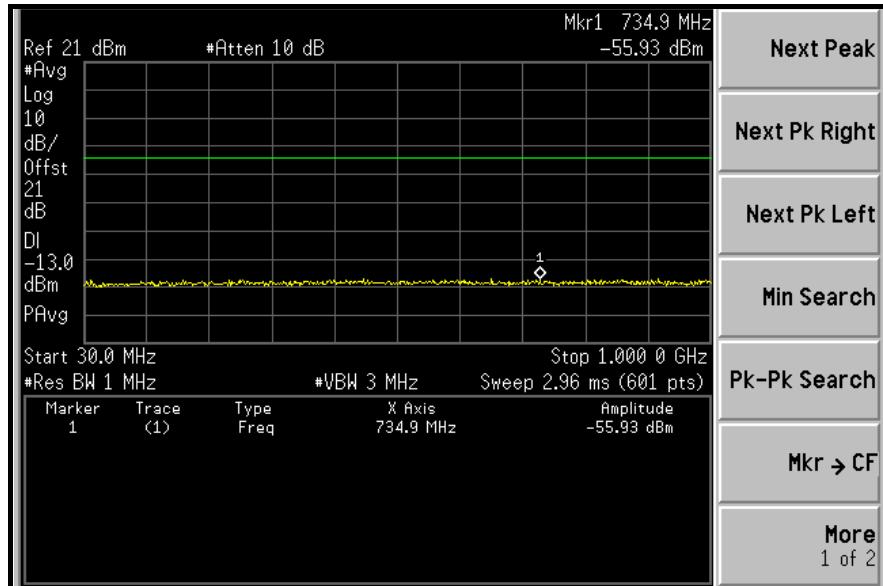

### 1GHz ~ 10GHz:

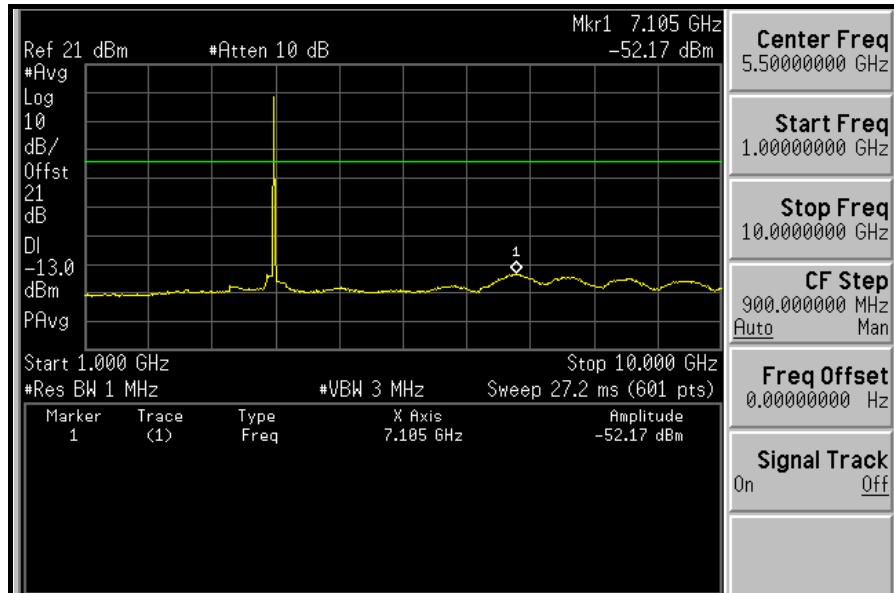


10GHz ~ 40GHz:




## ANTENNA 1


LOW CHANNEL: 30MHz ~ 1GHz:


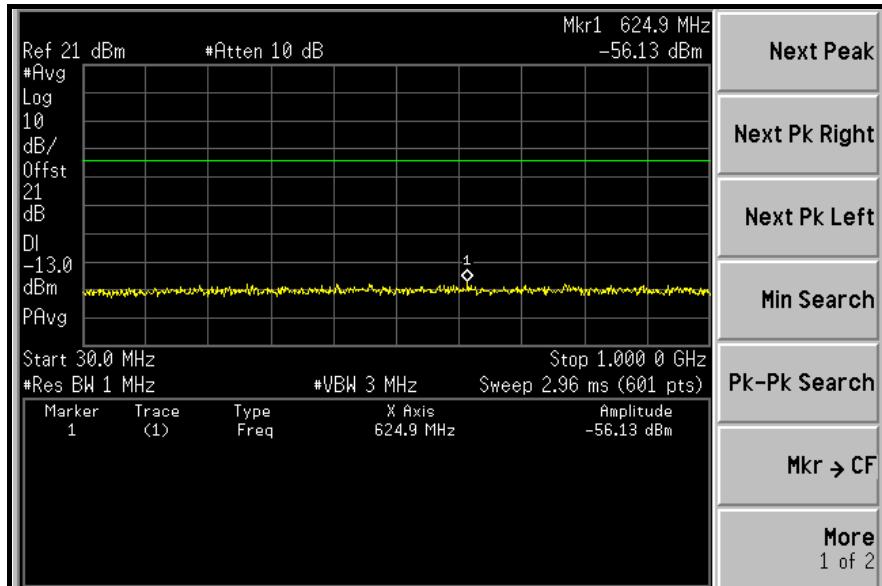


1GHz ~ 10GHz:

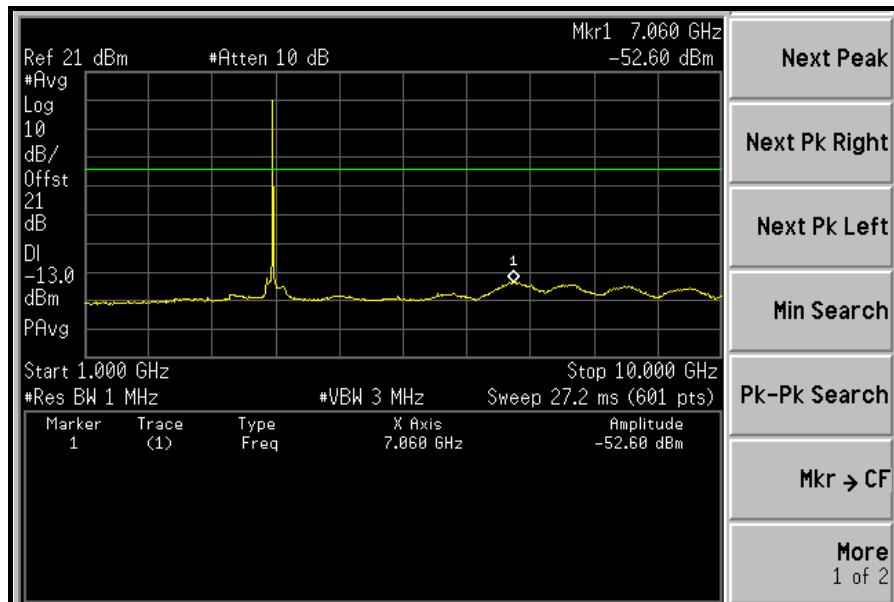


10GHz ~ 40GHz:

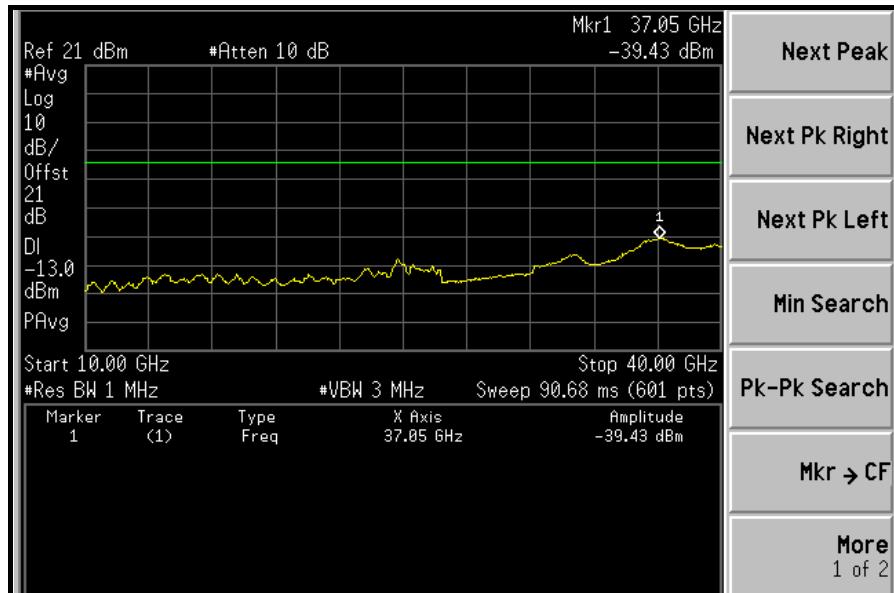


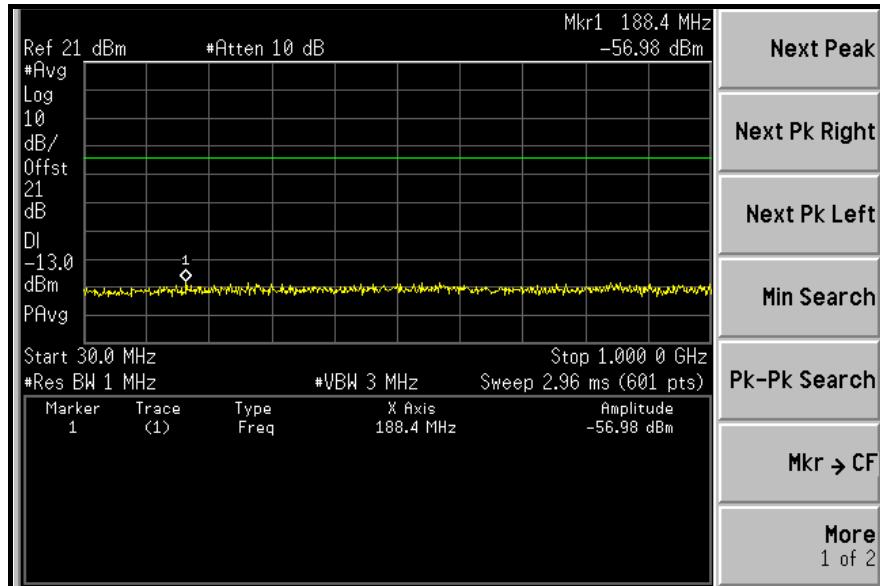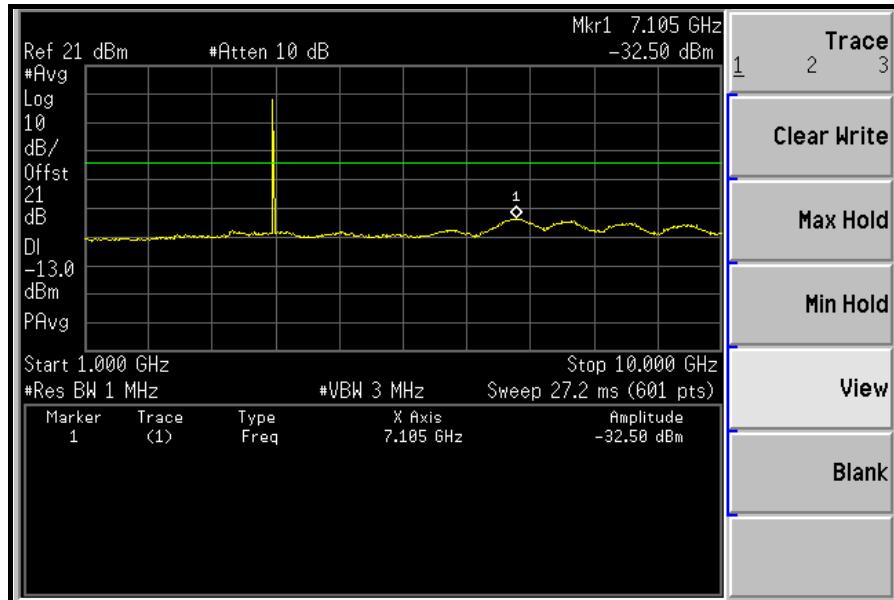**MIDDLE CHANNEL: 30MHz ~ 1GHz:**

**1GHz ~ 10GHz:**

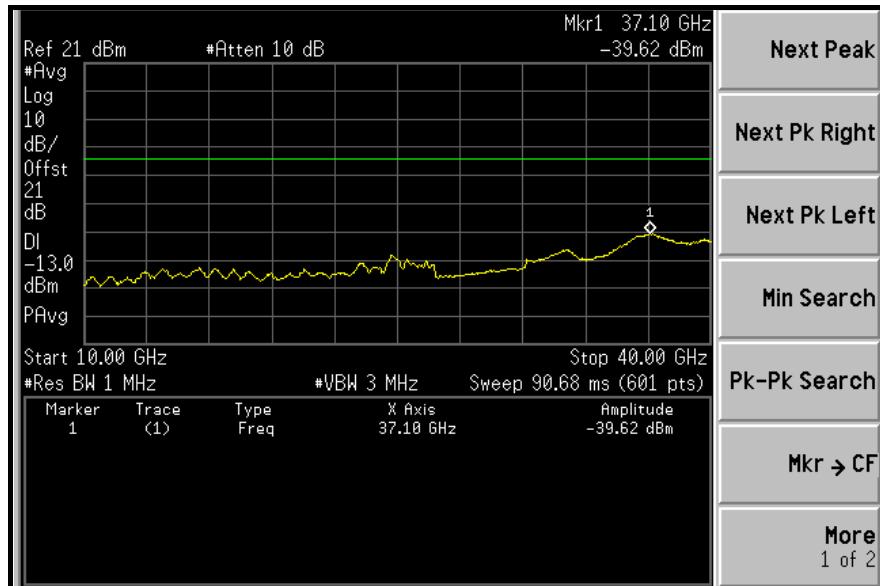
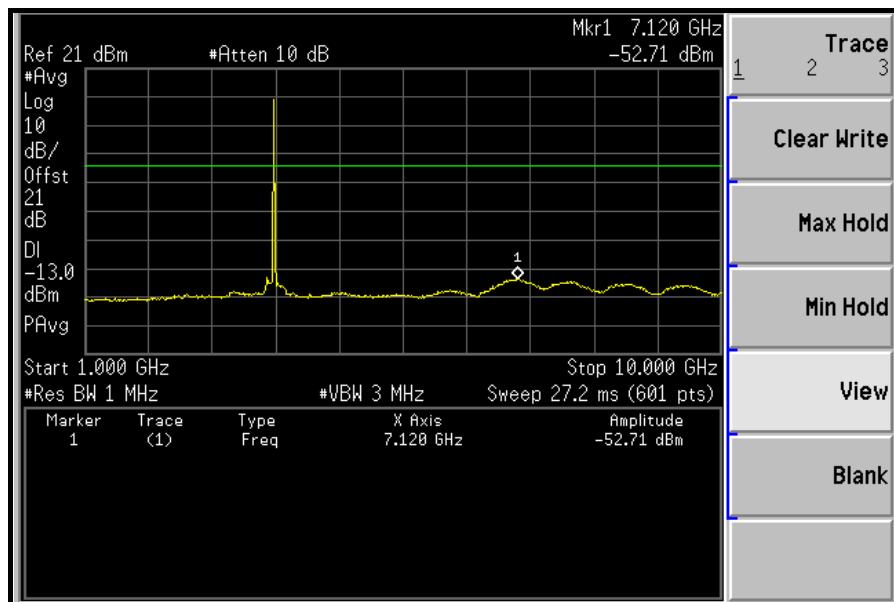
10GHz ~ 40GHz:

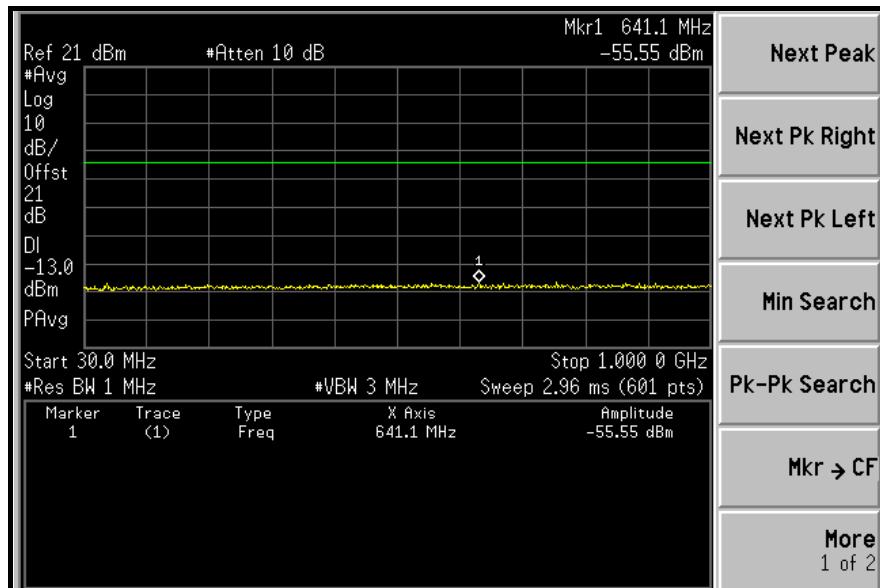


HIGH CHANNEL: 30MHz ~ 1GHz:



1GHz ~ 10GHz:




10GHz ~ 40GHz:

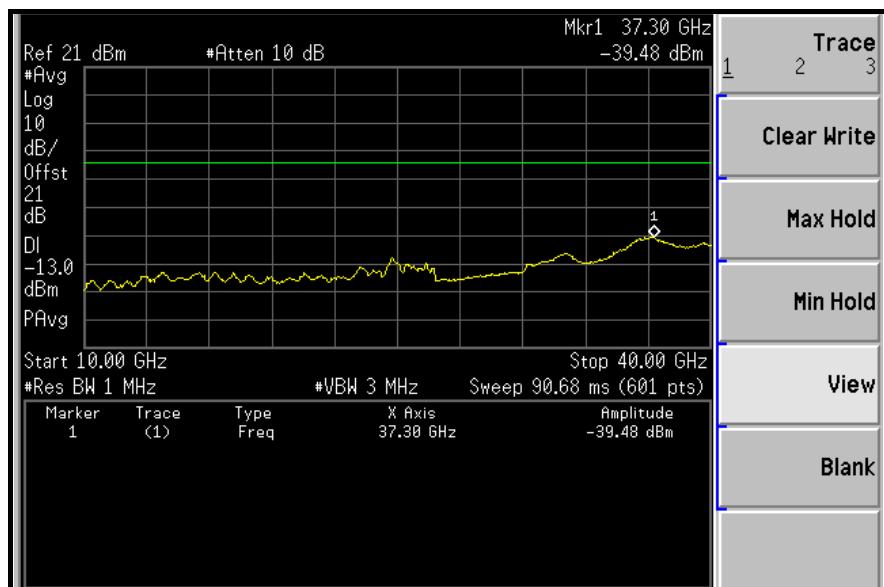


## CHANNEL BANDWIDTH: 7MHz

### ANTENNA 0


LOW CHANNEL: 30MHz ~ 1GHz:

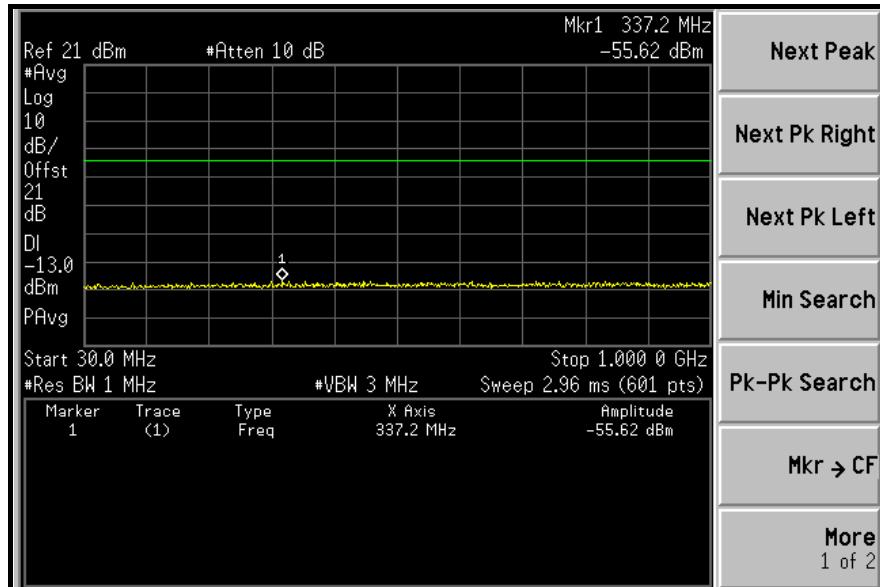


1GHz ~ 10GHz:

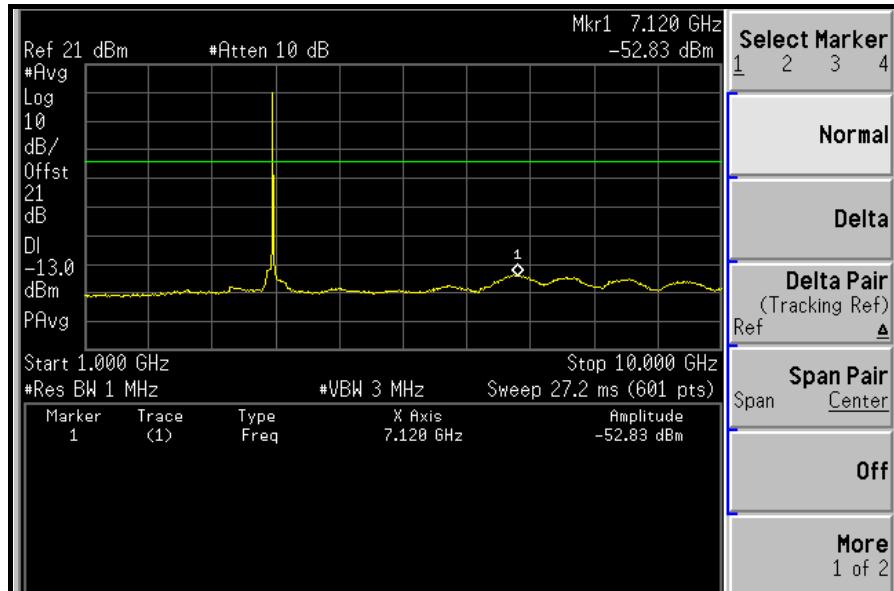


10GHz ~ 40GHz:

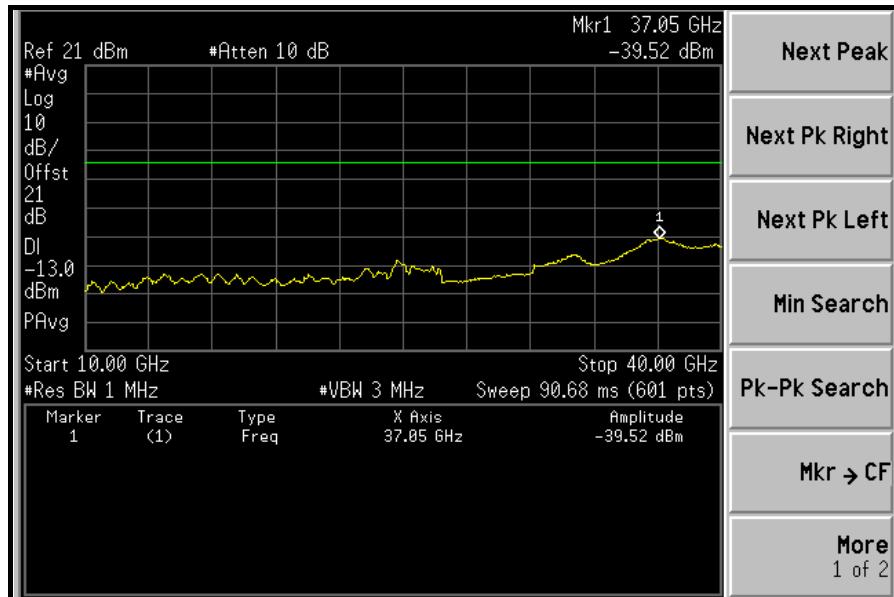


MIDDLE CHANNEL: 30MHz ~ 1GHz:


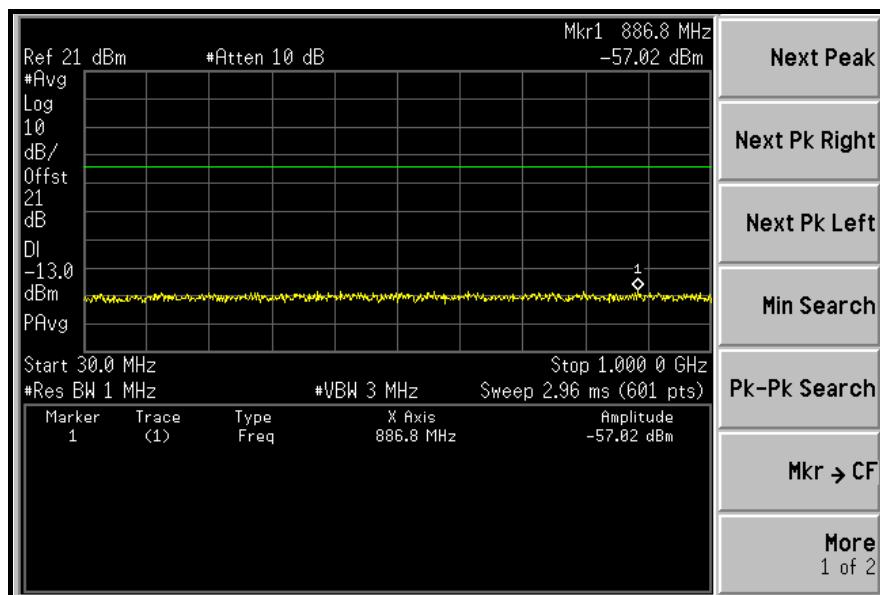


1GHz ~ 10GHz:

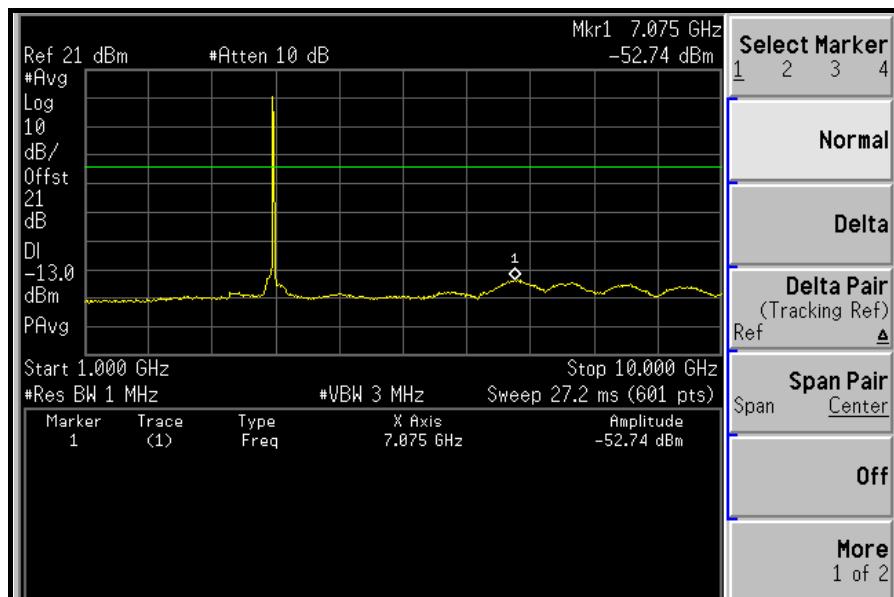


10GHz ~ 40GHz:

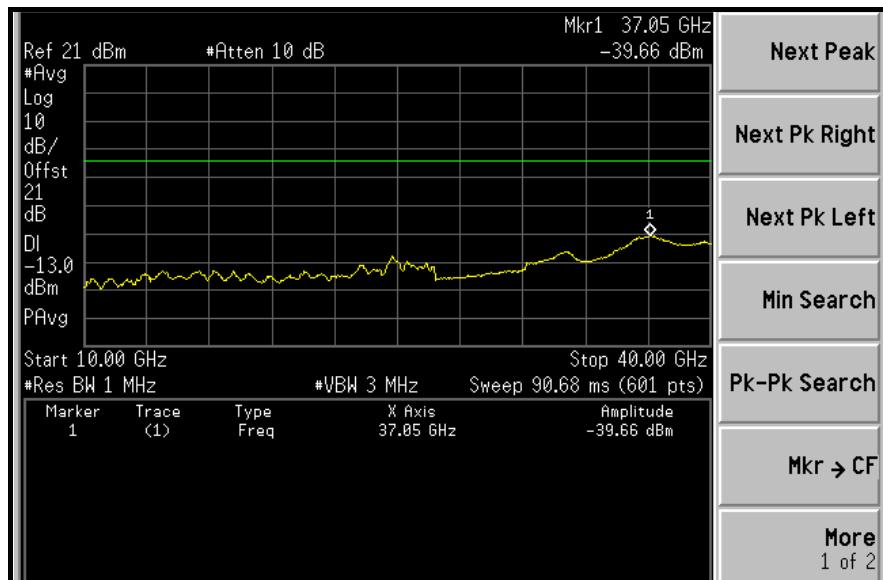

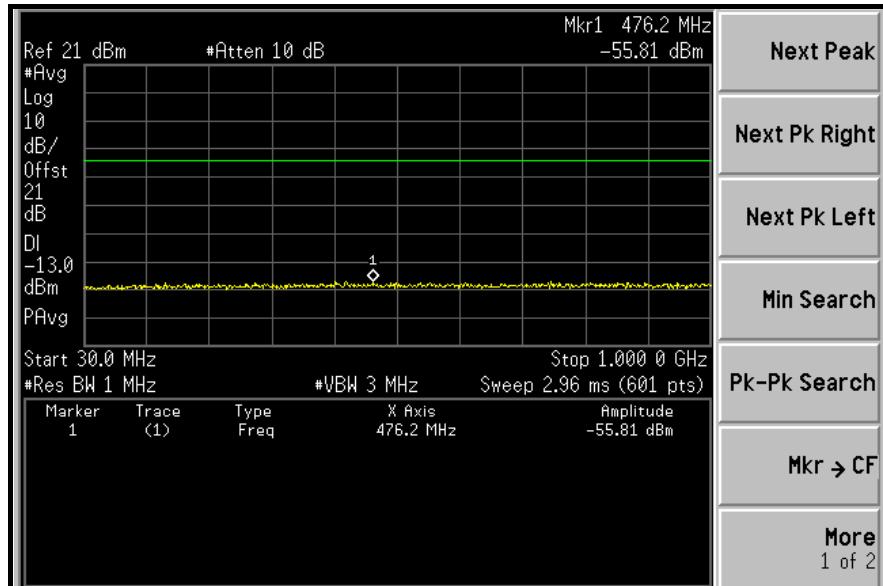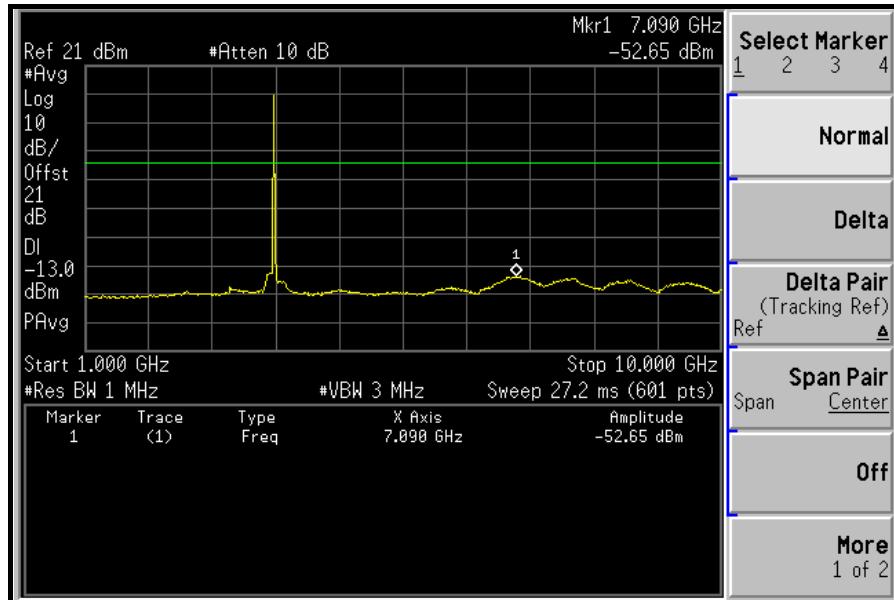
**HIGH CHANNEL: 30MHz ~ 1GHz:**

**1GHz ~ 10GHz:**

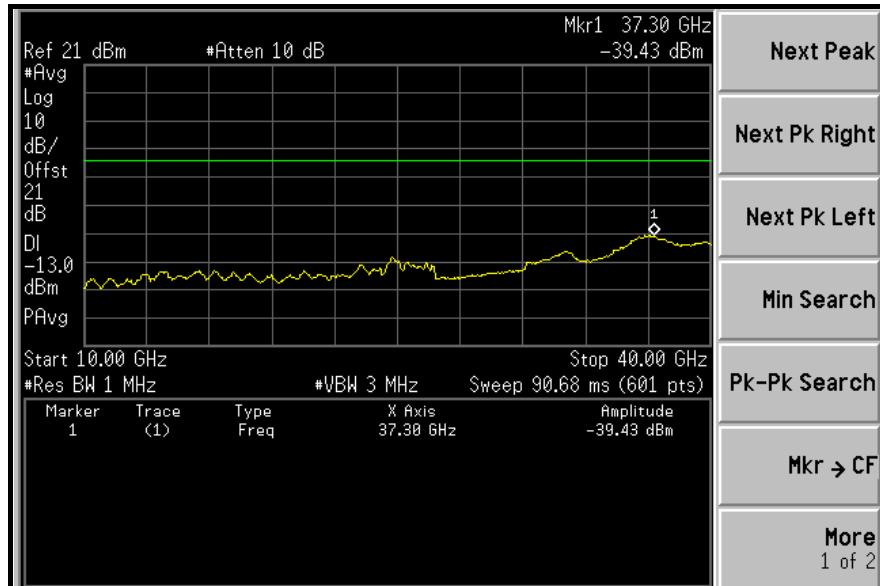
10GHz ~ 40GHz:




## ANTENNA 1

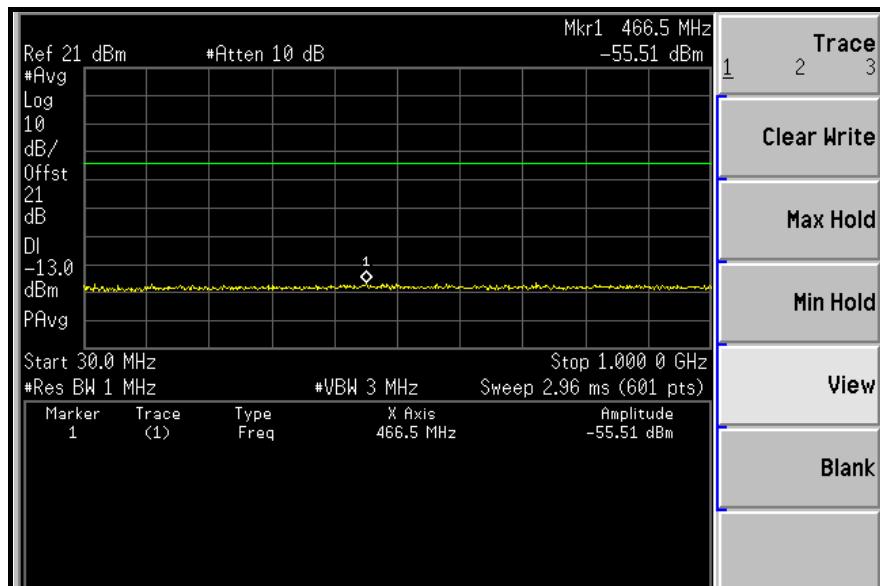
LOW CHANNEL: 30MHz ~ 1GHz:




1GHz ~ 10GHz:

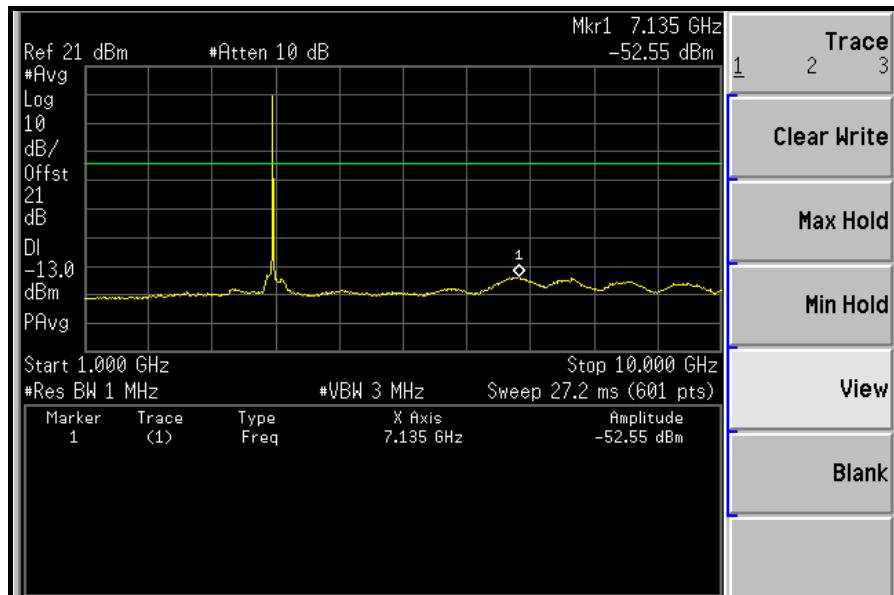


10GHz ~ 40GHz:

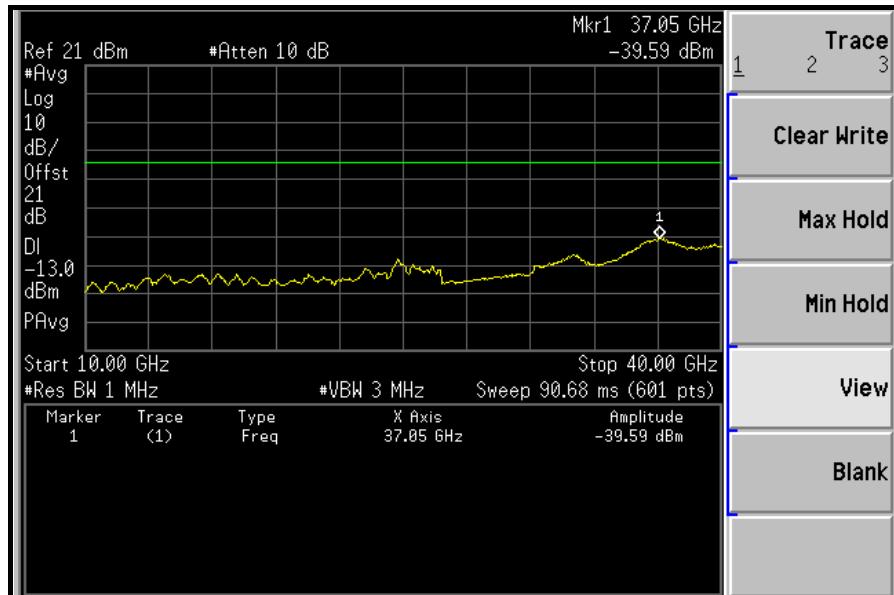


## MIDDLE CHANNEL: 30MHz ~ 1GHz:

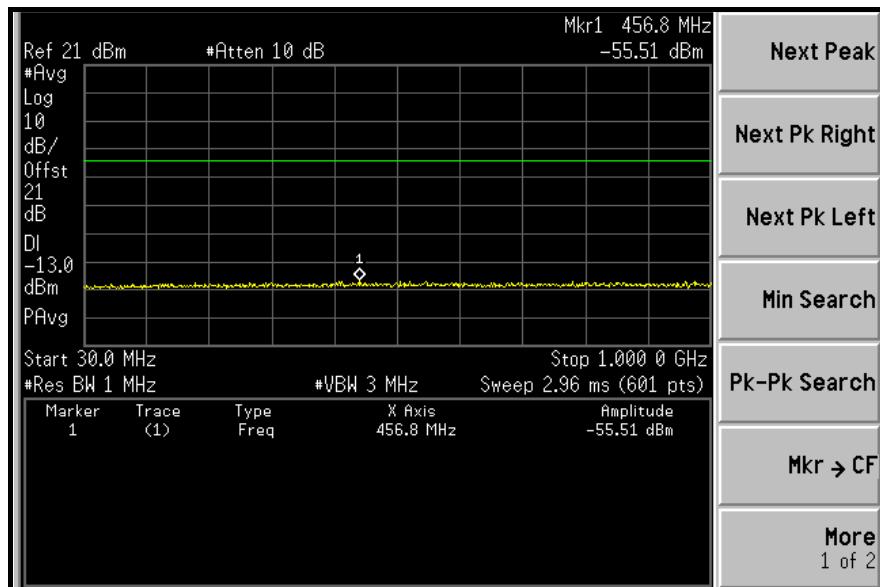


## 1GHz ~ 10GHz:

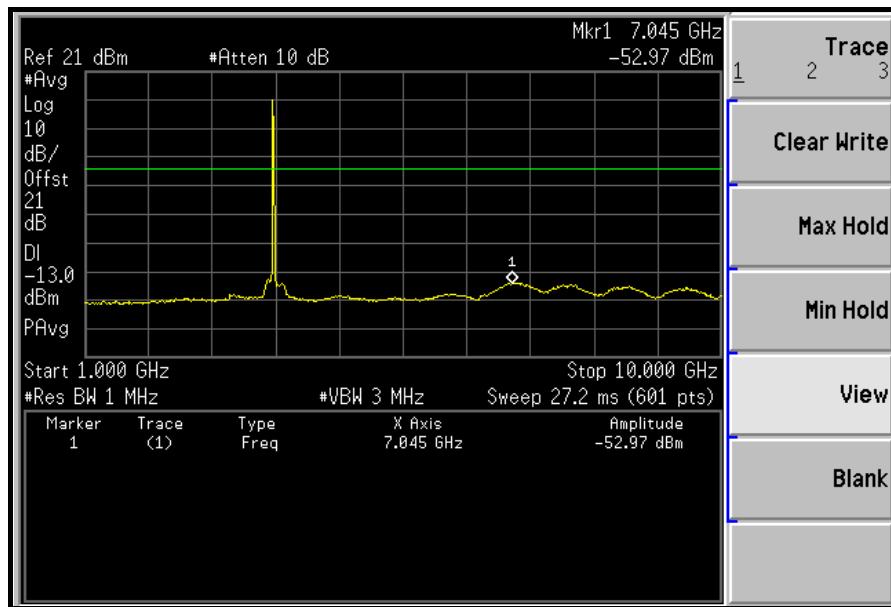


10GHz ~ 40GHz:

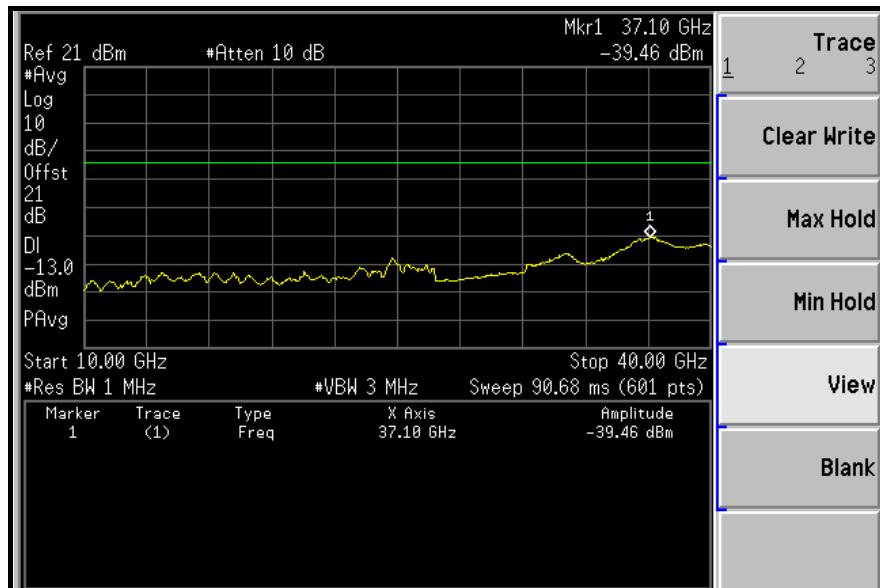


HIGH CHANNEL: 30MHz ~ 1GHz:

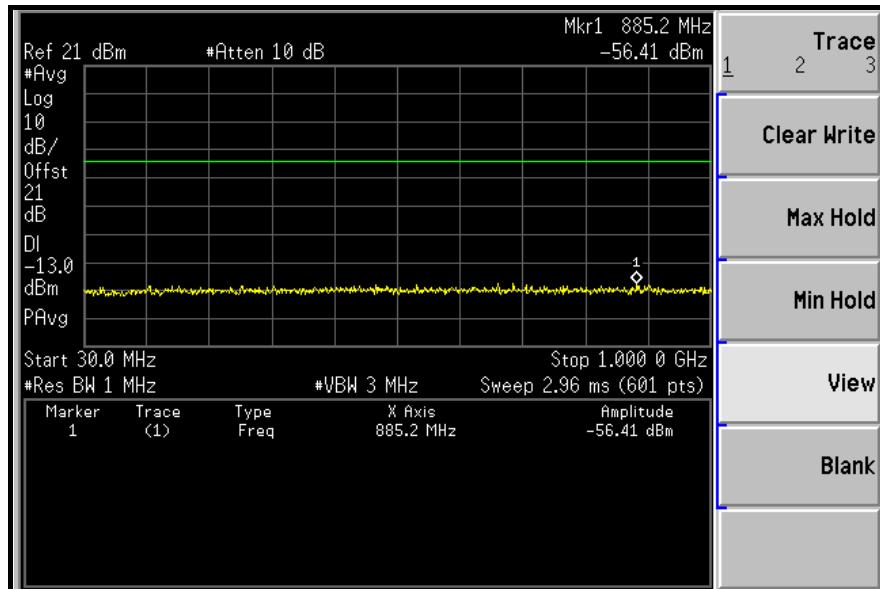

1GHz ~ 10GHz:

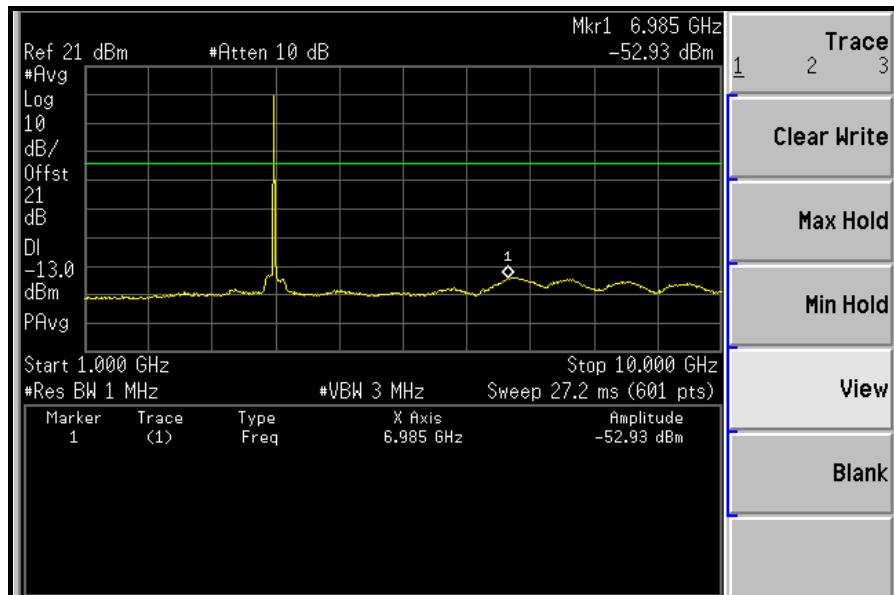


10GHz ~ 40GHz:

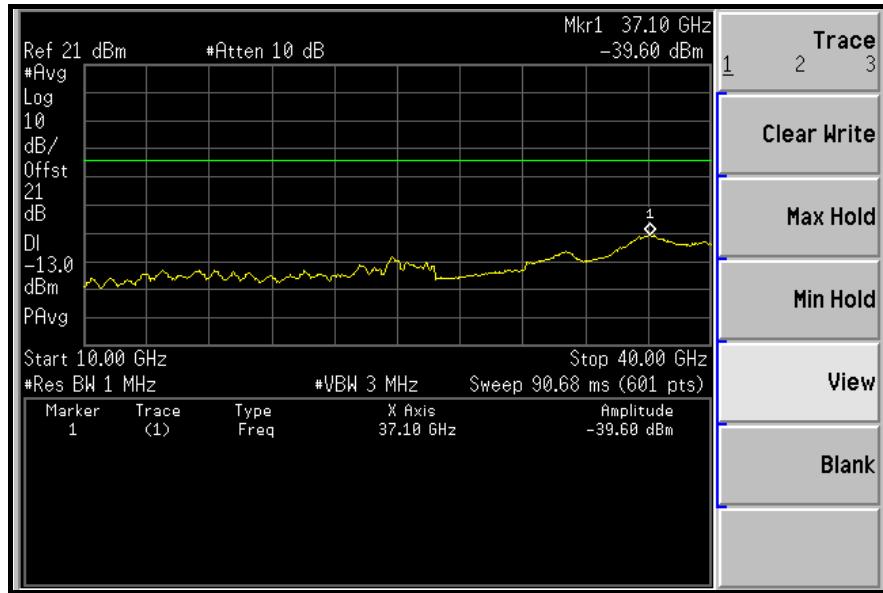


## CHANNEL BANDWIDTH: 10MHz

### ANTENNA 0


LOW CHANNEL: 30MHz ~ 1GHz:

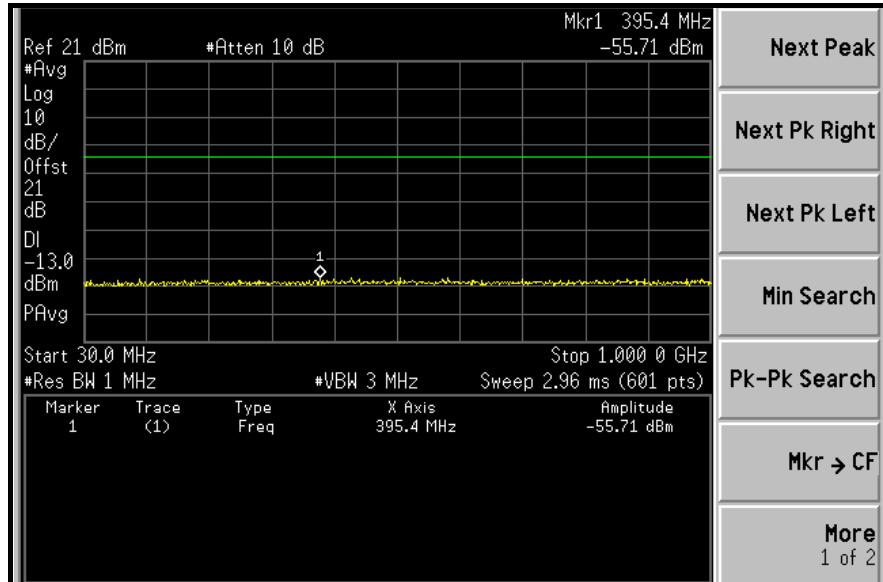


1GHz ~ 10GHz:

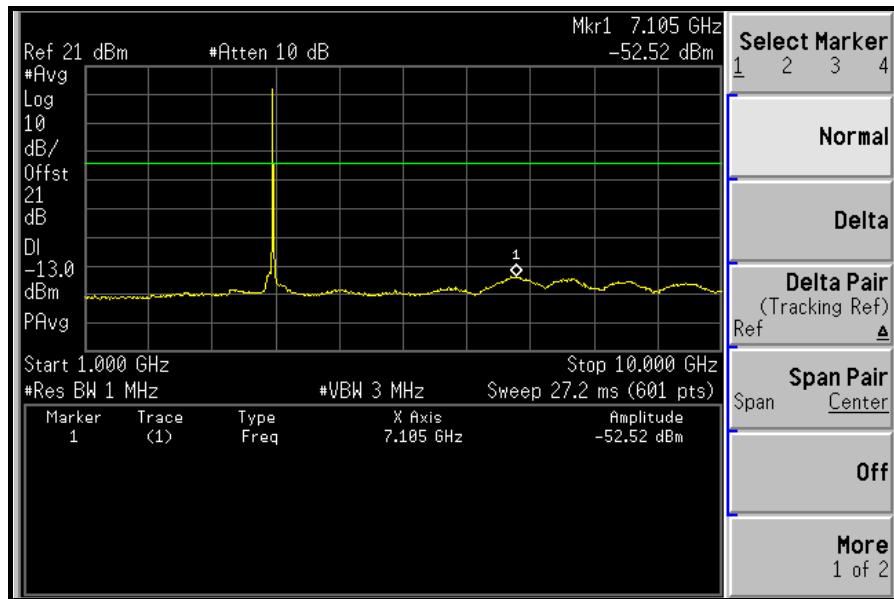


10GHz ~ 40GHz:

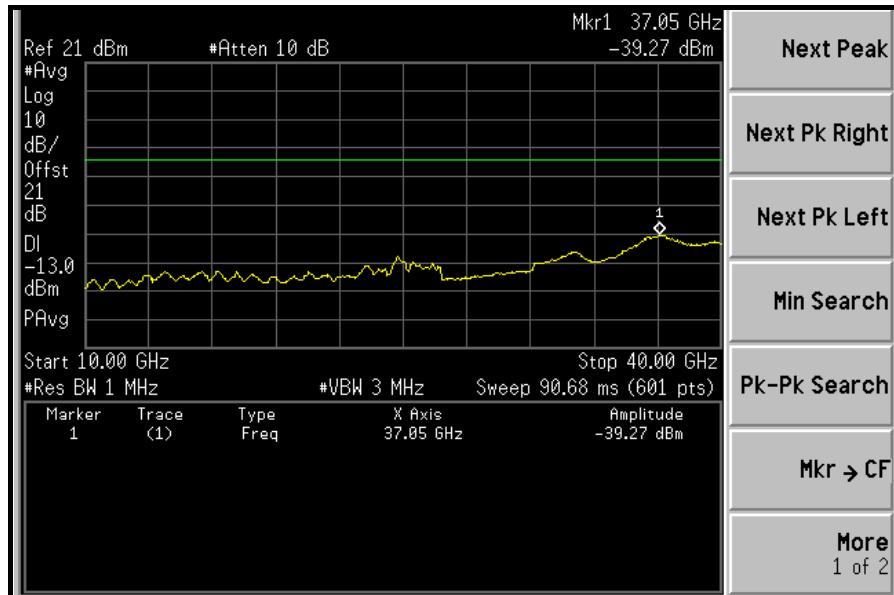


MIDDLE CHANNEL: 30MHz ~ 1GHz:

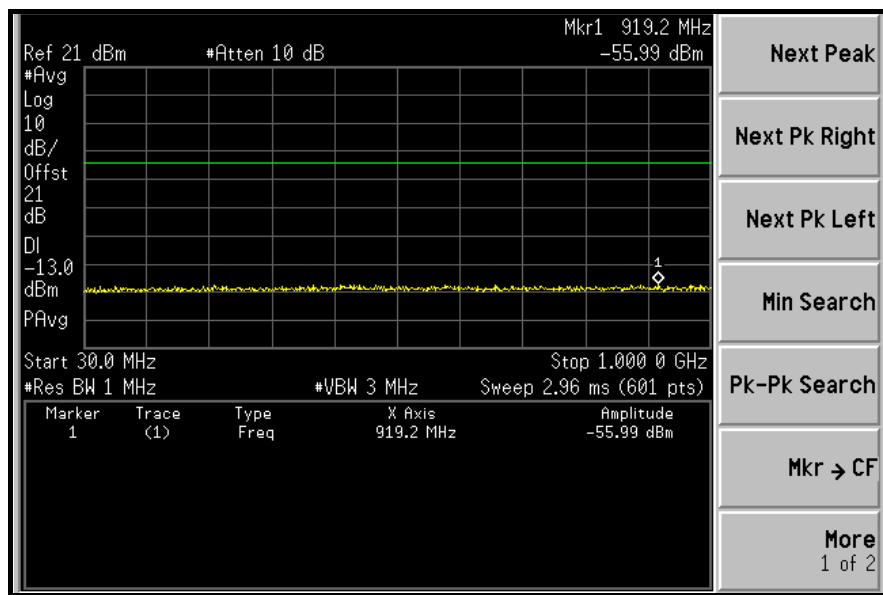


1GHz ~ 10GHz:

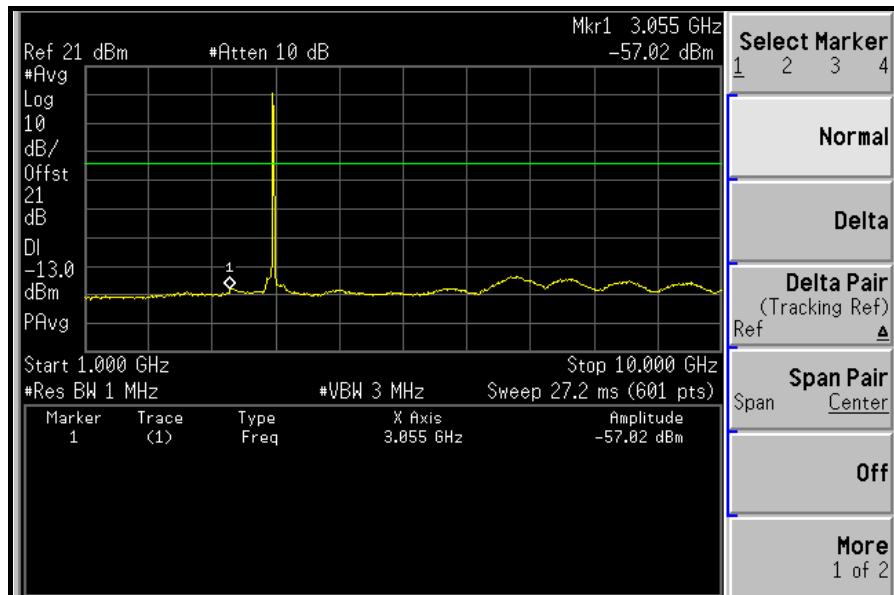


10GHz ~ 40GHz:

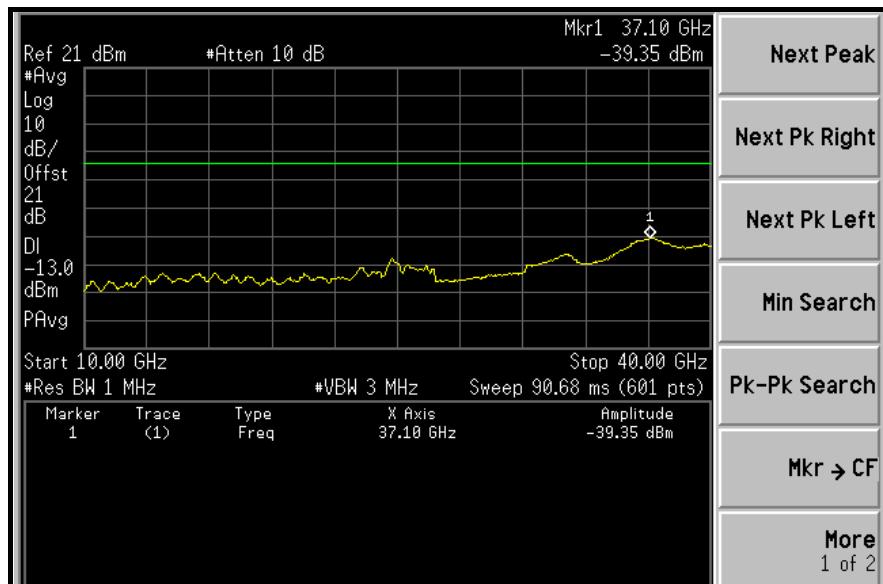


### HIGH CHANNEL: 30MHz ~ 1GHz:

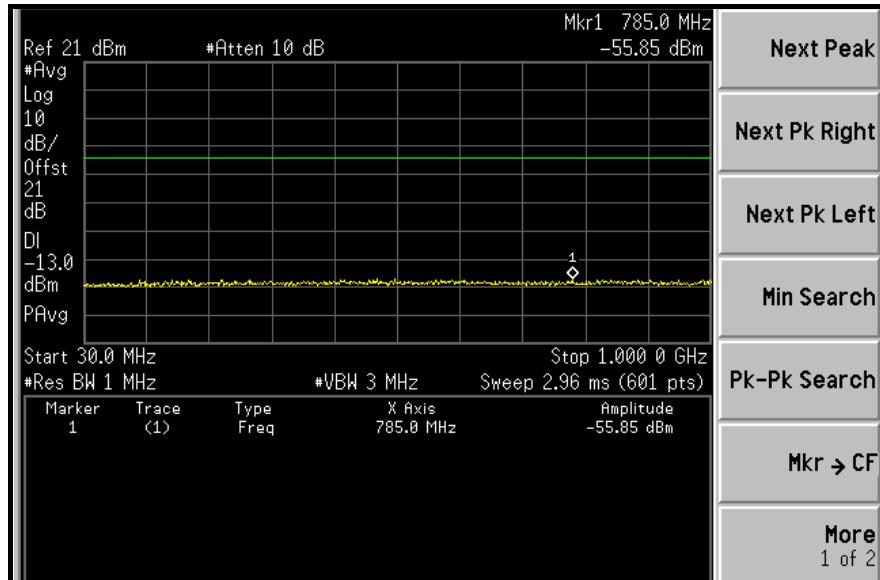

### 1GHz ~ 10GHz:

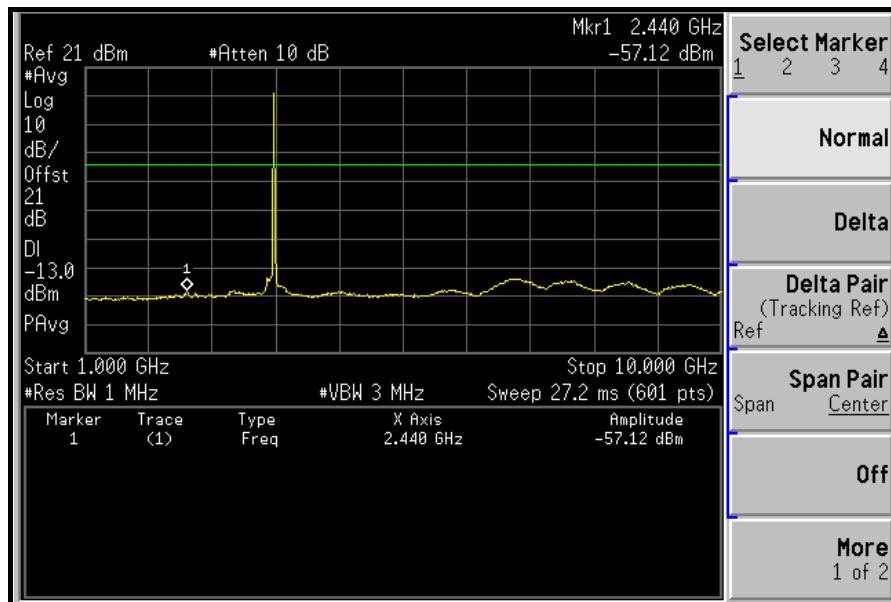


10GHz ~ 40GHz:

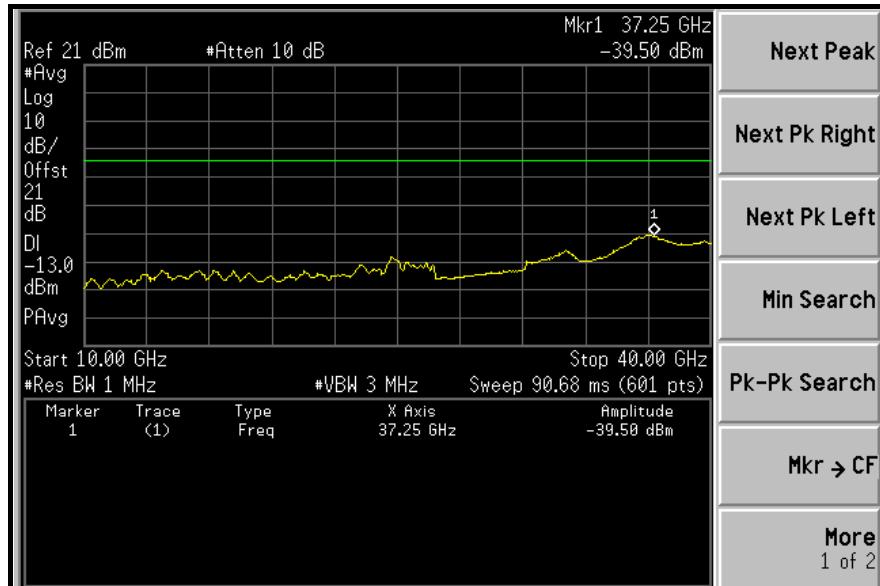

## ANTENNA 1


LOW CHANNEL: 30MHz ~ 1GHz:

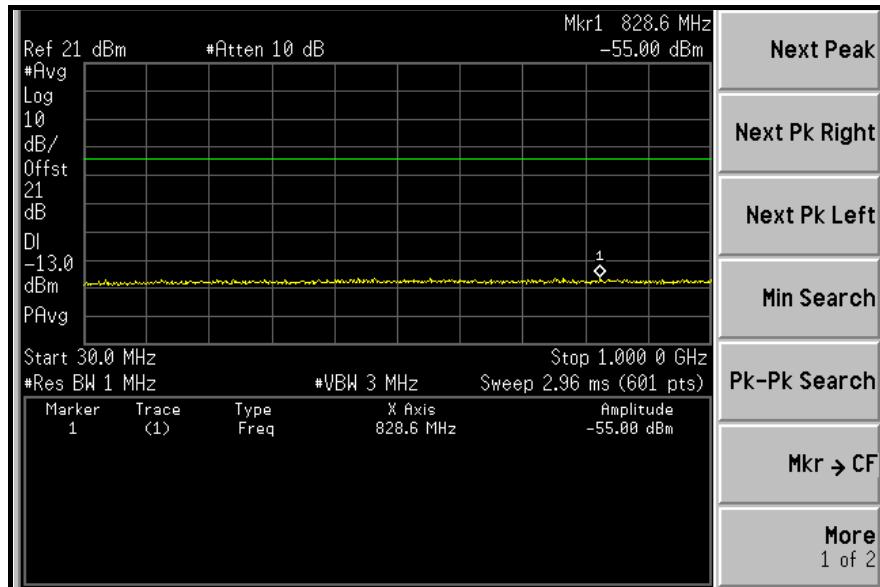




A D T


1GHz ~ 10GHz:

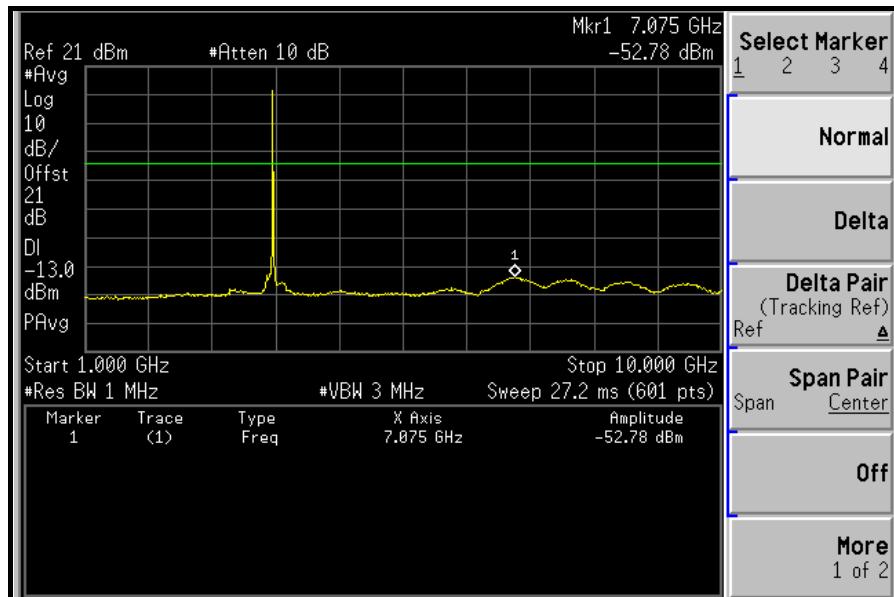


10GHz ~ 40GHz:


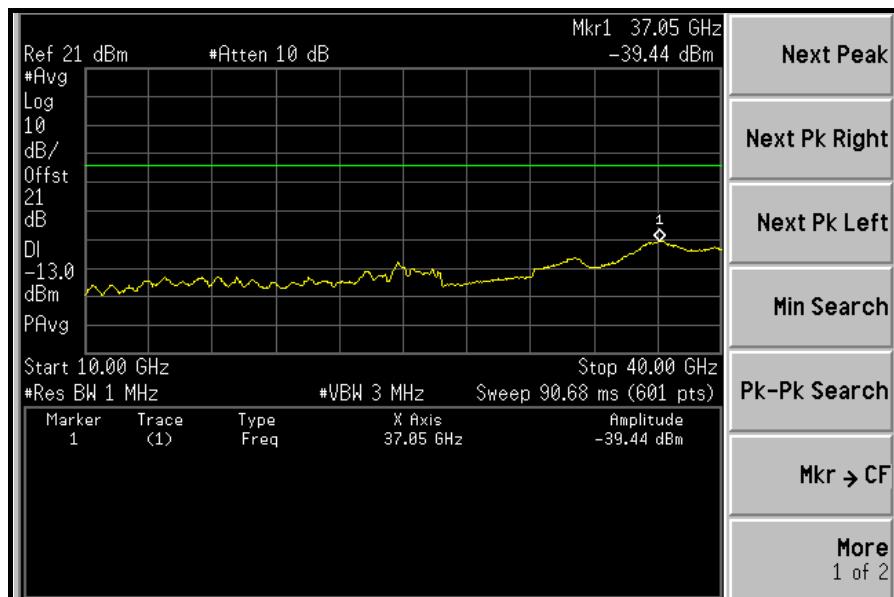


## MIDDLE CHANNEL: 30MHz ~ 1GHz:

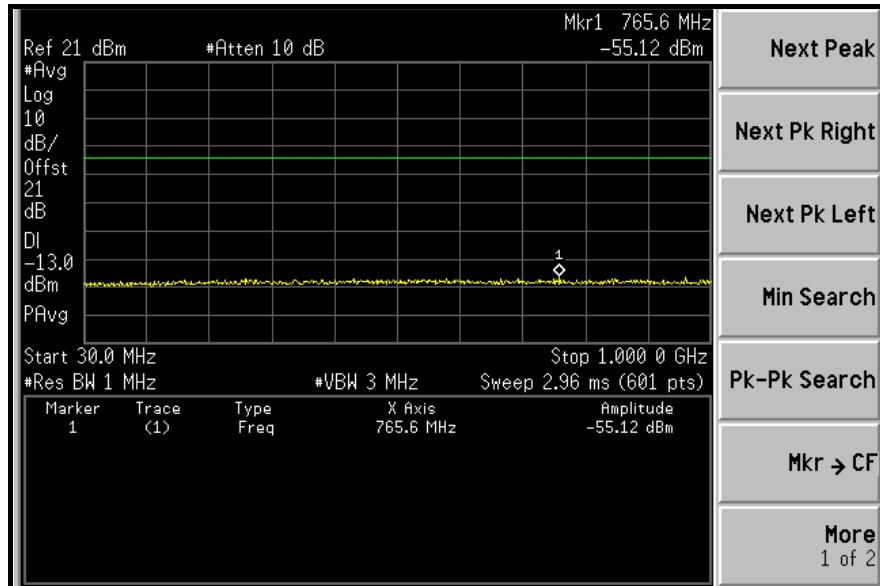


## 1GHz ~ 10GHz:

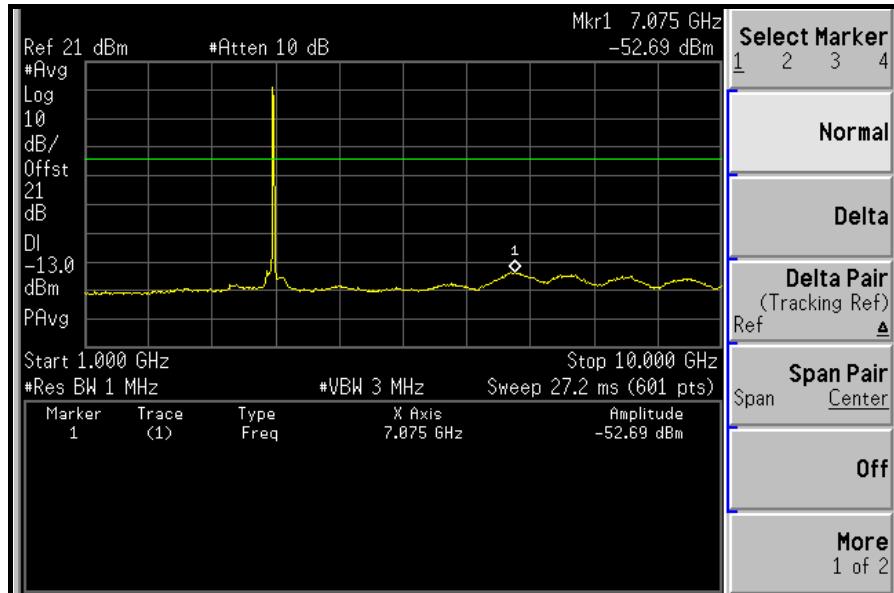


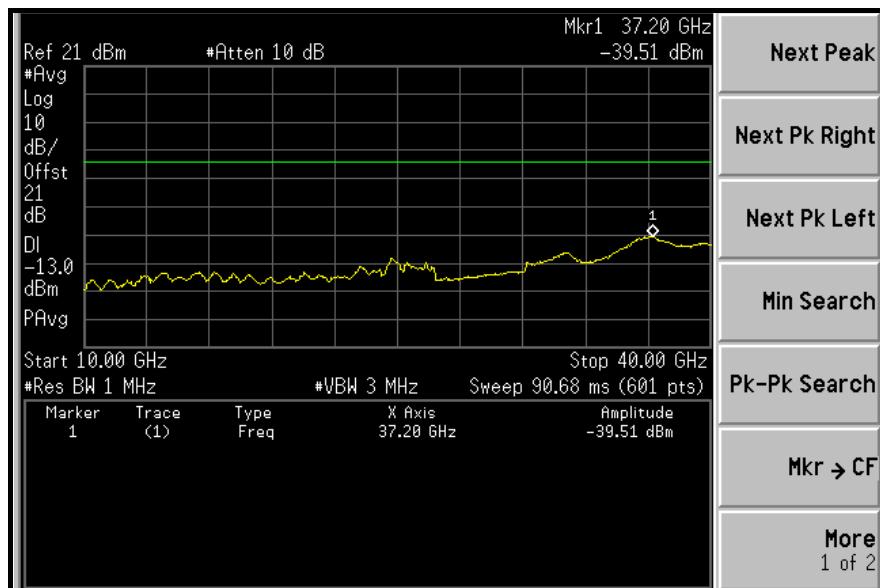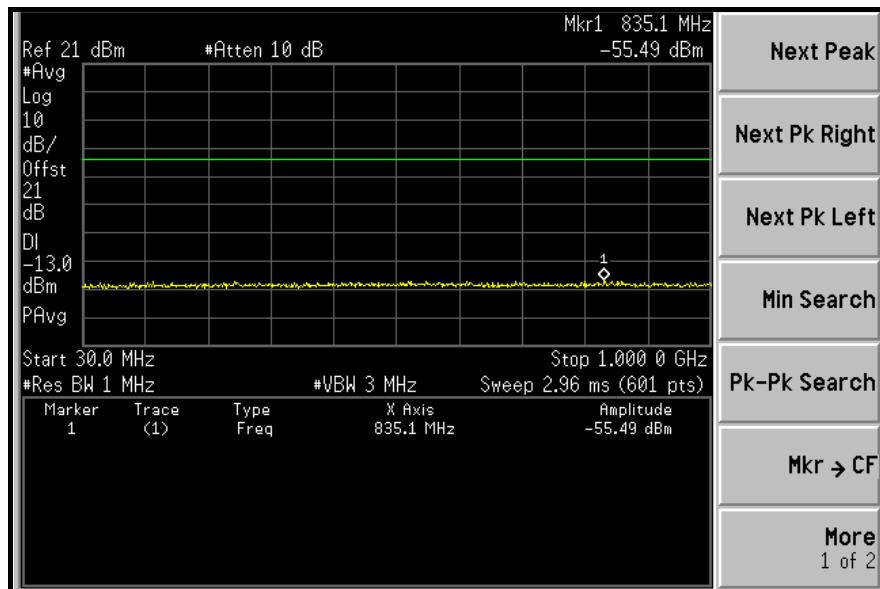**10GHz ~ 40GHz:**

**HIGH CHANNEL: 30MHz ~ 1GHz:**

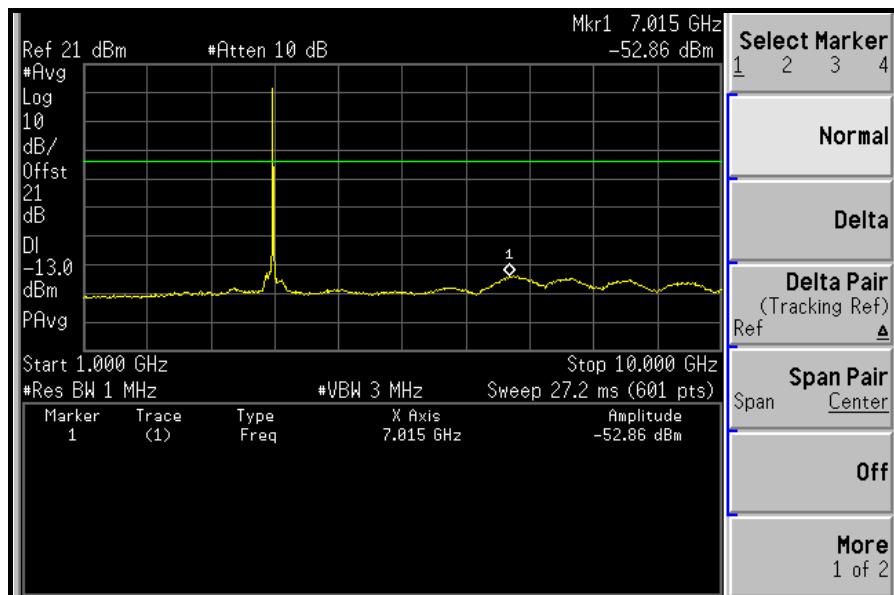
1GHz ~ 10GHz:

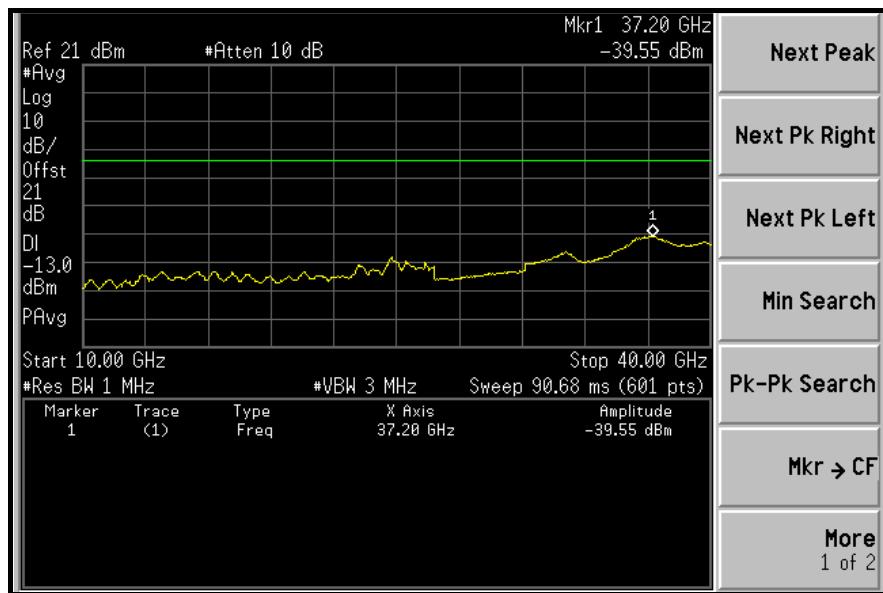

10GHz ~ 40GHz:





A D T

## 4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

### 4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to FCC 90.1323 specified that the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in Watts, by at least  $43 + 10 \log (P)$  dB. The limit of emission equal to  $-13\text{dBm}$  Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.



#### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jul. 06, 2009	Jul. 05, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100076	May 26, 2009	May 25, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 27, 2009	Apr. 26, 2010
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jul. 01, 2009	Jun. 30, 2010
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2008	Dec. 24, 2009
Preamplifier Agilent	8447D	2944A10633	Nov. 10, 2009	Nov. 09, 2010
Preamplifier Agilent	8449B	3008A01964	Nov. 09, 2009	Nov. 08, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 13, 2009	May 12, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 13, 2009	May 12, 2010
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 988962.
5. The IC Site Registration No. is IC 7450F-3.



#### 4.6.3 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable . Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G


$EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of Substitution antenna}$

**NOTE:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP

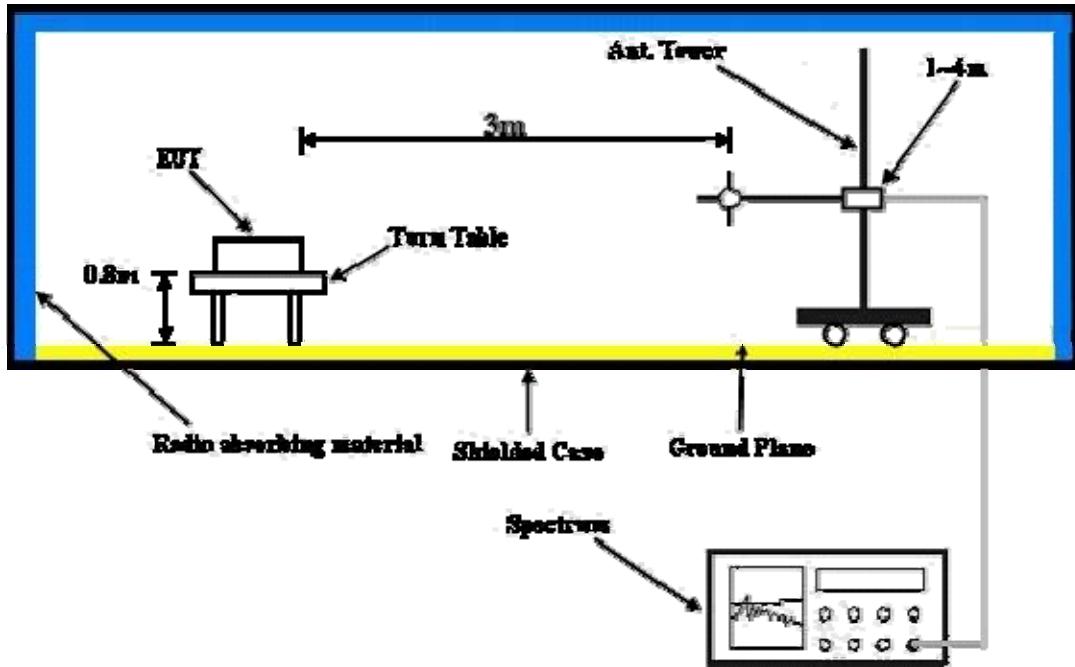

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.6.6 EUT OPERATING CONDITIONS

Same as 4.1.5.



A D T

#### 4.6.7 TEST RESULTS

MODE	Middle channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 66%RH 991hPa
CHANNEL BANDWIDTH	3.5MHz	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	136.91	69.1	-13.0	-17.5	-7.7	-25.2
2	162.18	63.2	-13.0	-23.8	-7.7	-31.5
3	195.23	57.4	-13.0	-30.1	-7.7	-37.8
4	245.77	58.3	-13.0	-28.8	-7.7	-36.5
5	772.57	56.7	-13.0	-30.6	-7.9	-38.5
6	865.87	63.4	-13.0	-23.1	-7.9	-31.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	45.55	57.6	-13.0	-28.9	-7.7	-36.6
2	134.97	65.2	-13.0	-21.7	-7.7	-29.4
3	162.18	61.5	-13.0	-25.6	-7.7	-33.3
4	379.90	48.3	-13.0	-38.4	-7.8	-46.2
5	865.87	55.2	-13.0	-31.9	-7.9	-39.8
6	998.06	58.0	-13.0	-29.1	-7.9	-37.0

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Low channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 66%RH 991hPa
CHANNEL BANDWIDTH	5MHz	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	136.91	69.5	-13.0	-17.9	-7.7	-25.6
2	162.18	63.5	-13.0	-23.3	-7.7	-31.0
3	247.72	59.3	-13.0	-27.3	-7.7	-35.0
4	665.65	49.1	-13.0	-37.9	-7.8	-45.7
5	774.51	55.2	-13.0	-31.5	-7.9	-39.4
6	863.93	62.1	-13.0	-24.7	-7.9	-32.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	45.55	57.5	-13.0	-29.8	-7.7	-37.5
2	136.91	65.5	-13.0	-21.4	-7.7	-29.1
3	164.13	62.6	-13.0	-24.3	-7.7	-32.0
4	201.06	57.6	-13.0	-29.4	-7.7	-37.1
5	865.87	52.8	-13.0	-34.0	-7.9	-41.9
6	998.06	60.6	-13.0	-26.0	-7.9	-33.9

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Low channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 66%RH 991hPa
CHANNEL BANDWIDTH	7MHz	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	136.91	68.9	-13.0	-18.4	-7.7	-26.1
2	164.13	67.3	-13.0	-20.0	-7.7	-27.7
3	197.17	60.1	-13.0	-26.8	-7.7	-34.5
4	234.11	59.4	-13.0	-28.0	-7.7	-35.7
5	665.65	49.6	-13.0	-37.3	-7.8	-45.1
6	863.93	59.7	-13.0	-26.5	-7.9	-34.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	45.55	58.0	-13.0	-28.5	-7.7	-36.2
2	136.91	65.8	-13.0	-21.0	-7.7	-28.7
3	164.13	62.7	-13.0	-24.2	-7.7	-31.9
4	201.06	58.3	-13.0	-28.0	-7.7	-35.7
5	383.79	48.5	-13.0	-37.7	-7.8	-45.5
6	1000.00	59.5	-13.0	-27.0	-7.9	-34.9

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Low channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 66%RH 991hPa
CHANNEL BANDWIDTH	10MHz	TESTED BY	Dean Wang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	136.91	69.7	-13.0	-17.6	-7.7	-25.3
2	162.18	67.2	-13.0	-19.6	-7.7	-27.3
3	197.17	60.7	-13.0	-25.9	-7.7	-33.6
4	234.11	59.5	-13.0	-27.3	-7.7	-35.0
5	863.93	58.7	-13.0	-28.3	-7.9	-36.2
6	996.11	58.9	-13.0	-27.9	-7.9	-35.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	45.55	57.6	-13.0	-28.9	-7.7	-36.6
2	134.97	64.4	-13.0	-22.7	-7.7	-30.4
3	164.13	65.4	-13.0	-20.9	-7.7	-28.6
4	197.17	58.4	-13.0	-28.1	-7.7	-35.8
5	238.00	58.5	-13.0	-28.0	-7.7	-35.7
6	863.93	53.5	-13.0	-33.3	-7.9	-41.2

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



## 4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

### 4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to FCC 90.1323 specified that the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in Watts, by at least  $43 + 10 \log (P)$  dB. The limit of emission equal to  $-13\text{dBm}$  Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.

### 4.7.2 TEST INSTRUMENTS

Same as 4.6.2.

### 4.7.3 TEST PROCEDURES

Same as 4.6.3.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.7.5 TEST SETUP

Same as 4.6.5.

### 4.7.6 EUT OPERATING CONDITIONS

Same as 4.1.5



A D T

#### 4.7.7 TEST RESULTS

MODE	Low channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	3.5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7303.50	55.4	-13.0	-49.0	9.5	-39.5
2	10955.25	52.4	-13.0	-49.5	7.8	-41.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7303.50	64.5	-13.0	-40.0	9.5	-30.5
2	10955.25	51.9	-13.0	-50.3	7.8	-42.5

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	3.5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7320.00	56.1	-13.0	-48.0	9.7	-38.3
2	10980.00	52.5	-13.0	-49.5	7.8	-41.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7320.00	63.7	-13.0	-40.7	9.7	-31.0
2	10980.00	52.4	-13.0	-49.5	7.8	-41.7

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	3.5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7346.50	54.3	-13.0	-50.3	9.7	-40.6
2	11019.75	53.1	-13.0	-48.7	7.8	-40.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7346.50	63.7	-13.0	-40.3	9.7	-30.6
2	11019.75	53.2	-13.0	-48.6	7.8	-40.8

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Low channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7305.00	53.0	-13.0	-50.6	9.5	-41.1
2	10957.50	51.7	-13.0	-50.5	7.8	-42.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7305.00	59.2	-13.0	-44.8	9.5	-35.3
2	10957.50	53.6	-13.0	-48.9	7.8	-41.1

**NOTE:** Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7320.00	51.4	-13.0	-53.1	9.7	-43.4
2	10980.00	52.7	-13.0	-49.9	7.8	-42.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7320.00	58.0	-13.0	-46.1	9.7	-36.4
2	10980.00	53.9	-13.0	-48.6	7.8	-40.8

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	5MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7345.00	51.8	-13.0	-51.9	9.7	-42.2
2	11017.50	52.9	-13.0	-49.6	7.8	-41.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	734500	54.1	-13.0	-49.9	9.7	-40.2
2	11017.50	53.8	-13.0	-49.2	7.8	-41.4

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Low channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	7MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7307.00	58.8	-13.0	-45.5	9.5	-36.0
2	10960.50	66.0	-13.0	-36.8	7.8	-29.0
3	14614.00	65.2	-13.0	-36.7	7.1	-29.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7307.00	63.1	-13.0	-41.2	9.5	-31.7
2	10960.50	65.2	-13.0	-36.8	7.8	-29.0
3	14614.00	67.1	-13.0	-34.6	7.1	-27.5

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	7MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7320.00	68.1	-13.0	-36.3	9.7	-26.6
2	10980.00	65.5	-13.0	-37.0	7.8	-29.2
3	14640.00	63.7	-13.0	-37.5	7.1	-30.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7320.00	62.1	-13.0	-42.0	9.7	-32.3
2	10980.00	63.9	-13.0	-38.7	7.8	-30.9
3	14640.00	66.1	-13.0	-35.5	7.1	-28.4

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	7MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7343.00	67.4	-13.0	-36.9	9.7	-27.2
2	11014.50	65.5	-13.0	-36.5	7.8	-28.7
3	14686.00	64.4	-13.0	-37.0	7.1	-29.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7343.00	63.1	-13.0	-41.7	9.7	-32.0
2	11014.50	64.3	-13.0	-37.6	7.8	-29.8
3	14686.00	65.1	-13.0	-36.1	7.1	-29.0

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Low channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	10MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7310.00	57.3	-13.0	-46.5	9.5	-37.0
2	10965.00	65.5	-13.0	-37.3	7.8	-29.5
3	14620.00	65.5	-13.0	-36.4	7.1	-29.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7310.00	62.6	-13.0	-41.0	9.5	-31.5
2	10965.00	64.2	-13.0	-37.9	7.8	-30.1
3	14620.00	66.5	-13.0	-35.1	7.1	-28.0

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	Middle channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	10MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7320.00	57.9	-13.0	-46.5	9.7	-36.8
2	10980.00	64.1	-13.0	-38.2	7.8	-30.4
3	14640.00	64.2	-13.0	-37.7	7.1	-30.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7320.00	61.5	-13.0	-42.8	9.7	-33.1
2	10980.00	63.1	-13.0	-39.0	7.8	-31.2
3	14640.00	65.1	-13.0	-35.9	7.1	-28.8

**NOTE:** Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	25deg°C, 63%RH 991hPa
TESTED BY	Dean Wang	CHANNEL BANDWIDTH	10MHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7340.00	56.2	-13.0	-47.7	9.7	-38.0
2	11010.00	64.1	-13.0	-38.4	7.8	-30.6
3	14680.00	64.3	-13.0	-37.5	7.1	-30.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3m						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	7340.00	63.6	-13.0	-40.9	9.7	-31.2
2	11010.00	63.2	-13.0	-39.2	7.8	-31.4
3	14680.00	65.3	-13.0	-35.8	7.1	-28.7

**NOTE:** Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP
<b>GERMANY</b>	TUV Rheinland
<b>JAPAN</b>	VCCI
<b>NORWAY</b>	NEMKO
<b>CANADA</b>	INDUSTRY CANADA, CSA
<b>R.O.C.</b>	TAF, BSMI, NCC
<b>NETHERLANDS</b>	Telefication
<b>SINGAPORE</b>	GOST-ASIA (MOU)
<b>RUSSIA</b>	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:** **Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

Tel: 886-3-3183232  
Fax: 886-3-3185050

The address and road map of all our labs can be found in our web site also.

**---END---**