

INDEX OF SUBMITTED MEASURED DATA

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6A - RF Power Output (Table)**EXHIBIT 6B - Transmit Audio Response (2 Graphs)**

- 6B-1 – 12.5 kHz Channel Spacing
- 6B-2 – 25 kHz Channel Spacing (Not for FCC Review)

EXHIBIT 6C - Transmit Audio Post Limiter Lowpass Filter Response (2 Graphs)

- 6C-1 – 12.5 kHz Transmit Audio Post Limiter LPF Response
- 6C-2 – 25 kHz Transmit Audio Post Limiter LPF Response (Not for FCC Review)

EXHIBIT 6D - Modulation Limiting Characteristics (6 Graphs)

- 6D-1 – 12.5 kHz Carrier Squelch Mode
- 6D-2 – 12.5 kHz Tone Private Line (CTCSS) Mode
- 6D-3 – 12.5 kHz Digital Private Line (CDCSS) Mode
- 6D-4 – 25 kHz Carrier Squelch Mode (Not for FCC Review)
- 6D-5 – 25 kHz Tone Private Line (CTCSS) Mode (Not for FCC Review)
- 6D-6 – 25 kHz Digital Private Line (CDCSS) Mode (Not for FCC Review)

EXHIBIT 6E – Modulation Techniques and Occupied Bandwidth (20 Spectrum Analyzer Plots)

- 6E-1 – 12.5 kHz 2500 Hz Audio Modulation Only
- 6E-2 – 12.5 kHz 2500 Hz Audio and TPL (CTCSS) Modulation
- 6E-3 – 12.5 kHz 2500 Hz Audio and DPL (CDCSS) Modulation
- 6E-4 – 12.5 kHz DTMF Modulation Only
- 6E-5 – 12.5 kHz DTMF Modulation and TPL (CTCSS) Modulation
- 6E-6 – 12.5 kHz DTMF Modulation and DPL (CDCSS) Modulation
- 6E-7 – 12.5 kHz 2000/3000 Hz FSK Data Modulation Only
- 6E-8 – 12.5 kHz 2000/3000 Hz FSK Data and TPL (CTCSS) Modulation
- 6E-9 – 12.5 kHz 2000/3000 Hz FSK Data and DPL (CDCSS) Modulation
- 6E-10 – 12.5 kHz 4-Level FSK Digital Data
- 6E-11 – 12.5 kHz 4-Level FSK Digital Voice and Data
- 6E-12 – 25 kHz 2500 Hz Audio Modulation Only (Not for FCC Review)
- 6E-13 – 25 kHz 2500 Hz Audio and TPL (CTCSS) Modulation (Not for FCC Review)
- 6E-14 – 25 kHz 2500 Hz Audio and DPL (CDCSS) Modulation (Not for FCC Review)
- 6E-15 – 25 kHz DTMF Modulation Only (Not for FCC Review)
- 6E-16 – 25 kHz DTMF Modulation and TPL (CTCSS) Modulation (Not for FCC Review)
- 6E-17 – 25 kHz DTMF Modulation and DPL (CDCSS) Modulation (Not for FCC Review)
- 6E-18 – 25 kHz 2000/3000 Hz FSK Data Modulation Only (Not for FCC Review)
- 6E-19 – 25 kHz 2000/3000 Hz FSK Data and TPL (CTCSS) Modulation (Not for FCC Review)
- 6E-20 – 25 kHz 2000/3000 Hz FSK Data and DPL (CDCSS) Modulation (Not for FCC Review)

EXHIBIT 6F - Conducted Spurious Emissions (6 Graphs)

- 6F-1 – 30 Watts, 136.000 MHz
- 6F-2 – 30 Watts, 155.000 MHz
- 6F-3 – 30 Watts, 174.000 MHz
- 6F-4 – 1 Watt, 136.000 MHz
- 6F-5 – 1 Watt, 155.000 MHz
- 6F-6 – 1 Watt, 174.000 MHz

INDEX OF SUBMITTED MEASURED DATA (CONTINUED)**EXHIBIT 6G** – Radiated Spurious Emissions – (16 Graphs)

- 6G-1 – 30 Watts, 136.0125 MHz, 12.5 kHz
- 6G-2 – 30 Watts, 150.8125 MHz, 12.5 kHz
- 6G-3 – 30 Watts, 162.4125 MHz, 12.5 kHz
- 6G-4 – 30 Watts, 173.9875 MHz, 12.5 kHz
- 6G-5 – 1 Watt, 136.0125 MHz, 12.5 kHz
- 6G-6 – 1 Watt, 150.8125 MHz, 12.5 kHz
- 6G-7 – 1 Watt, 162.4125 MHz, 12.5 kHz
- 6G-8 – 1 Watt, 173.9875 MHz, 12.5 kHz
- 6G-9 – 30 Watts, 136.0125 MHz, 25 kHz (Not for FCC Review)
- 6G-10 – 30 Watts, 150.8125 MHz, 25 kHz (Not for FCC Review)
- 6G-11 – 30 Watts, 162.4125 MHz, 25 kHz (Not for FCC Review)
- 6G-12 – 30 Watts, 173.9875 MHz, 25 kHz (Not for FCC Review)
- 6G-13 – 1 Watt, 136.0125 MHz, 25 kHz (Not for FCC Review)
- 6G-14 – 1 Watt, 150.8125 MHz, 25 kHz (Not for FCC Review)
- 6G-15 – 1 Watt, 162.4125 MHz, 25 kHz (Not for FCC Review)
- 6G-16 – 1 Watt, 173.9875 MHz, 25 kHz (Not for FCC Review)

EXHIBIT 6H – Frequency Stability (2 Graphs)

- 6H-1 – Frequency Stability vs. Temperature
- 6H-2 – Frequency Stability vs. Voltage

EXHIBIT 6I – Transient Frequency Behavior (8 Graphs)

- 6I-1 – 30 Watts, 12.5 kHz Key-Up Attack Time
- 6I-2 – 30 Watts, 12.5 kHz De-Key Decay Time
- 6I-3 – 1 Watt, 12.5 kHz Key-Up Attack Time
- 6I-4 – 1 Watt, 12.5 kHz De-Key Decay Time
- 6I-5 – 30 Watts, 25 kHz Key-Up Attack Time (Not for FCC Review)
- 6I-6 – 30 Watts, 25 kHz De-Key Decay Time (Not for FCC Review)
- 6I-7 – 1 Watt, 25 kHz Key-Up Attack Time (Not for FCC Review)
- 6I-8 – 1 Watt, 25 kHz De-Key Decay Time (Not for FCC Review)

RF OUTPUT DATA

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device, pursuant to 47 CFR 2.1033(c)(8) and 2.1046.

HIGH POWER SETTING, FREQUENCY 136.000 MHz

Measured RF Output Power:	30.0 Watts
Measured DC Voltage:	13.6 Volts
Measured DC Input Current:	4.71 Amperes
Measured DC Input Power:	64.1 Watts

LOW POWER SETTING, FREQUENCY 136.000 MHz

Measured RF Output Power:	1.0 Watts
Measured DC Voltage:	13.6 Volts
Measured DC Input Current:	1.28 Amperes
Measured DC Input Power:	17.5 Watts

HIGH POWER SETTING, FREQUENCY 155.000 MHz

Measured RF Output Power:	30.0 Watts
Measured DC Voltage:	13.6 Volts
Measured DC Input Current:	5.03 Amperes
Measured DC Input Power:	68.4 Watts

LOW POWER SETTING, FREQUENCY 155.000 MHz

Measured RF Output Power:	1.0 Watts
Measured DC Voltage:	13.6 Volts
Measured DC Input Current:	1.39 Amperes
Measured DC Input Power:	18.8 Watts


HIGH POWER SETTING, FREQUENCY 174.000 MHz

Measured RF Output Power:	30.0 Watts
Measured DC Voltage:	13.6 Volts
Measured DC Input Current:	4.77 Amperes
Measured DC Input Power:	64.9 Watts


LOW POWER SETTING, FREQUENCY 174.000 MHz

Measured RF Output Power:	1.0 Watts
Measured DC Voltage:	13.6 Volts
Measured DC Input Current:	1.34 Amperes
Measured DC Input Power:	18.2 Watts


Transmit Audio Response, 155 MHz, 12.5 kHz Channel Spacing

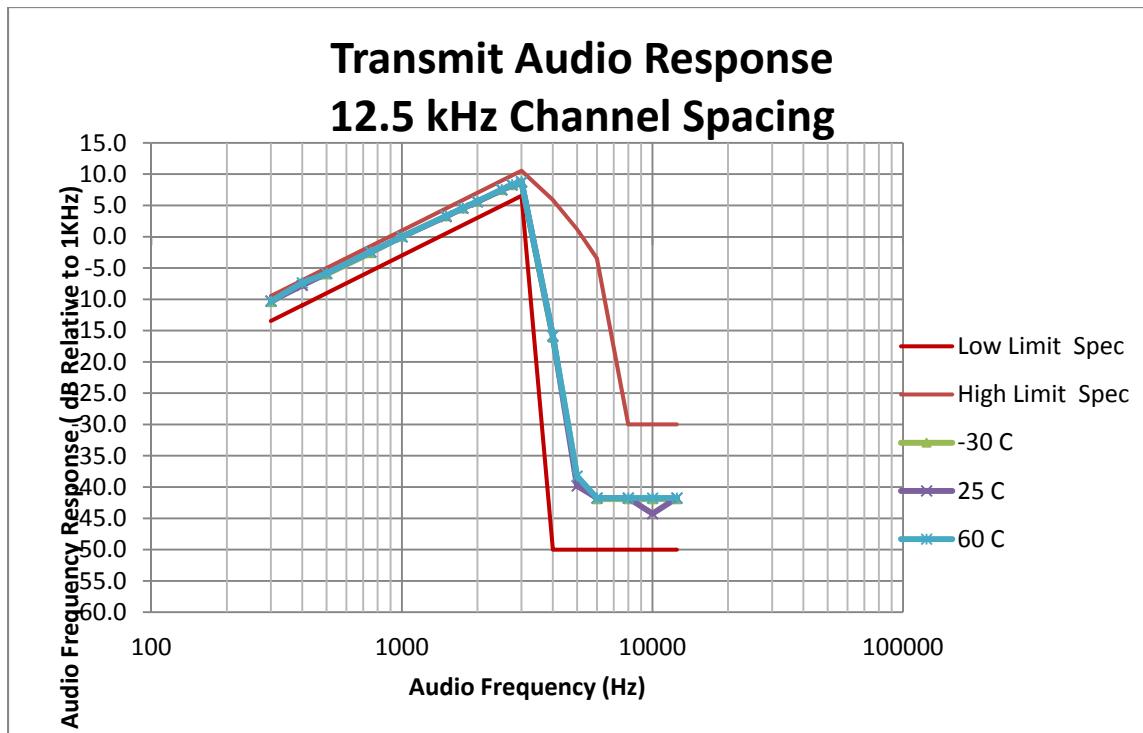


**Transmit Audio Response, 155 MHz, 25 kHz Channel Spacing
(Not for FCC Review)**

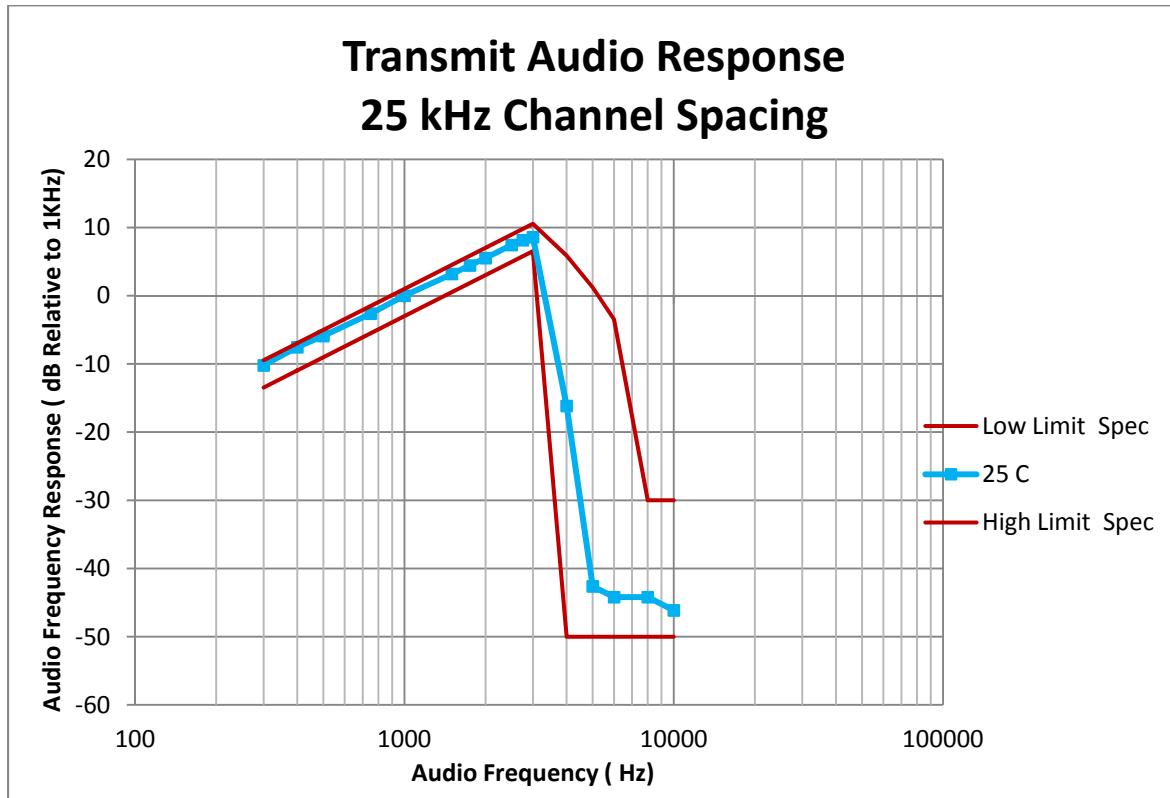

POST-LIMITER LOWPASS FILTER RESPONSE
12.5 kHz Channel Spacing

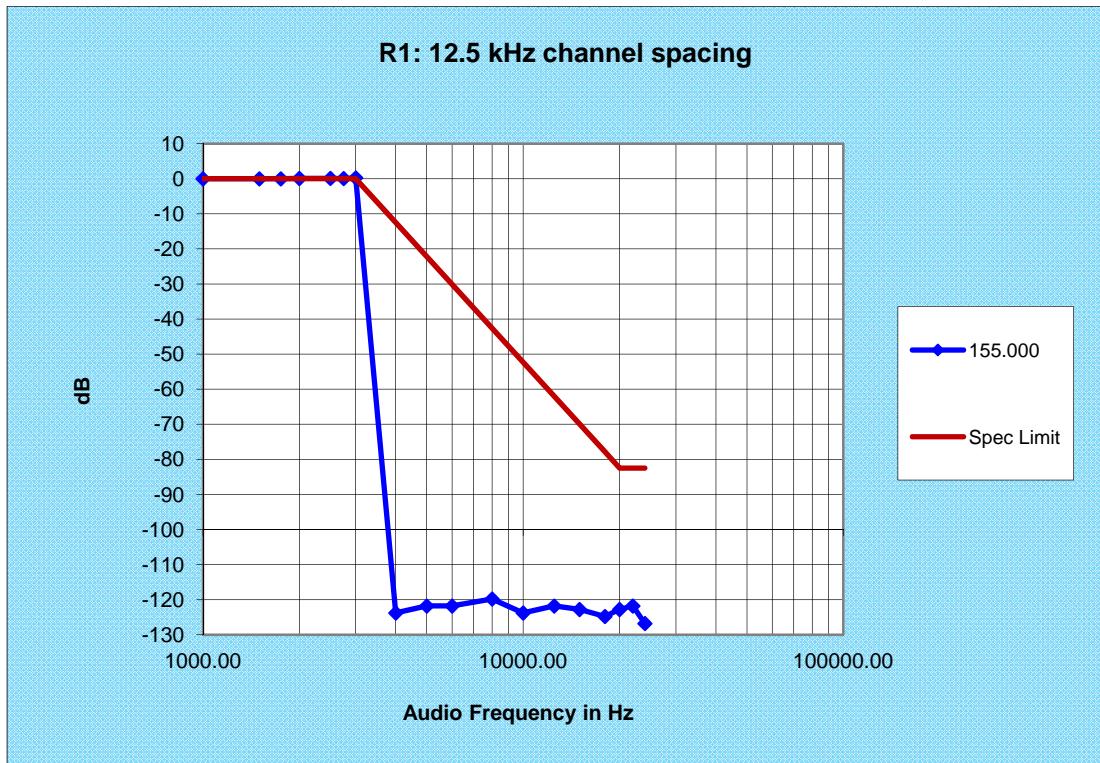


POST-LIMITER LOWPASS FILTER RESPONSE
25 kHz Channel Spacing
(Not for FCC Review)

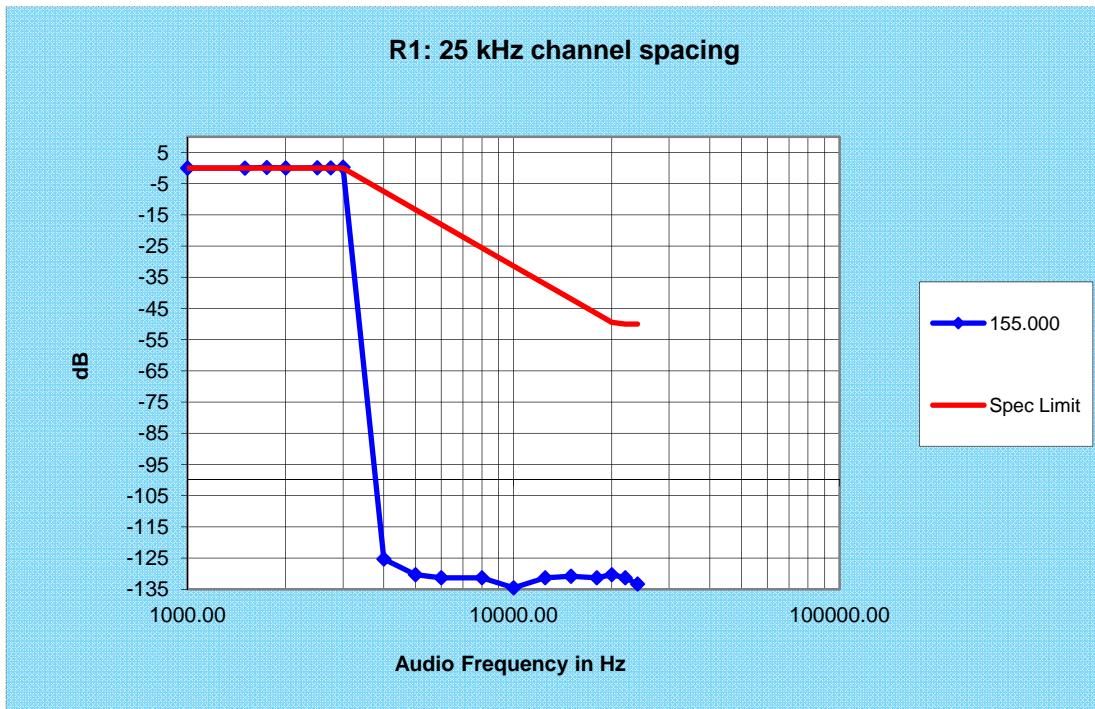

MODULATION LIMITING CHARACTERISTIC
12.5 kHz CARRIER SQUELCH MODE

XPR 5550


12.5 kHz Channel Spacing
TX Modulation Limiting
CSQ Mode

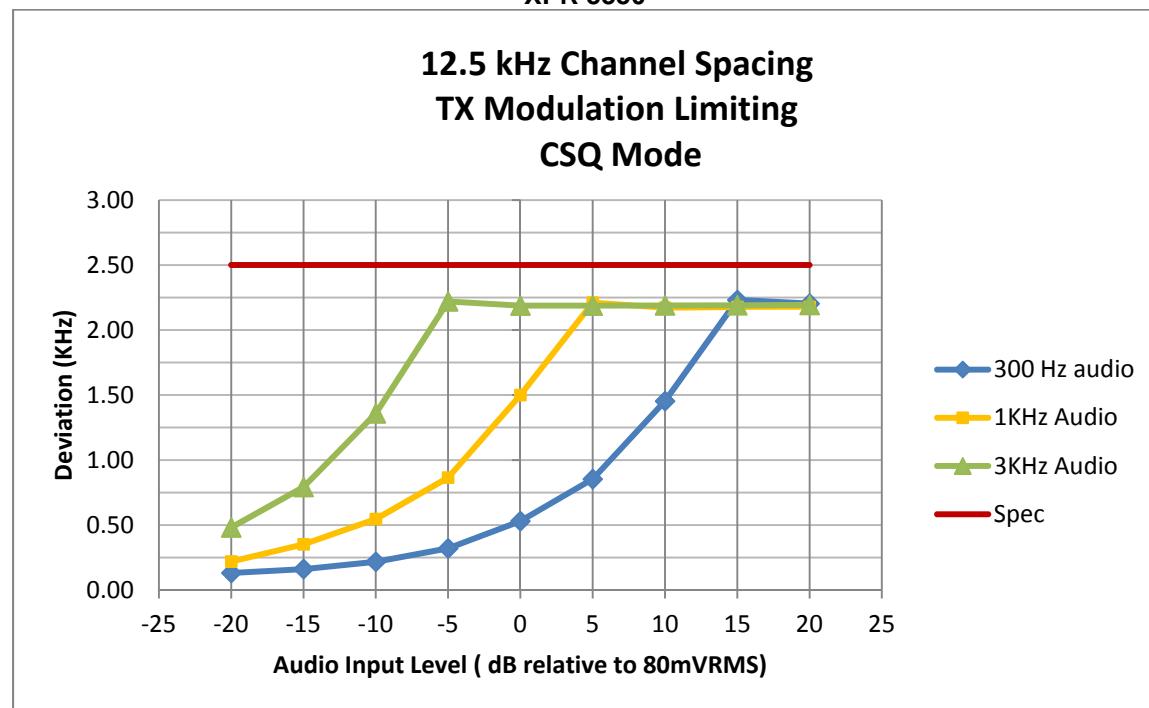

**MODULATION LIMITING CHARACTERISTIC
12.5 kHz TONE PL MODE**

XPR 5550


**12.5 kHz Channel Spacing
TX Modulation Limiting
TPL Mode**

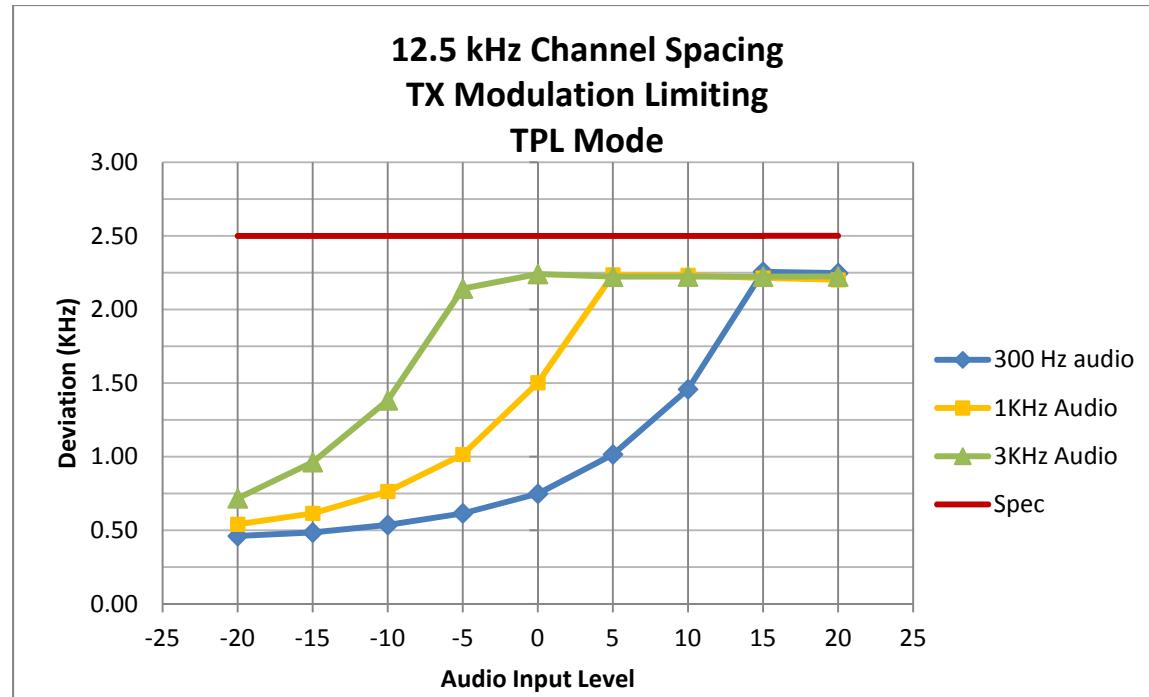

**MODULATION LIMITING CHARACTERISTIC
12.5 kHz DPL MODE**


XPR 5550

**12.5 kHz Channel Spacing
TX Modulation Limiting
DPL Mode**

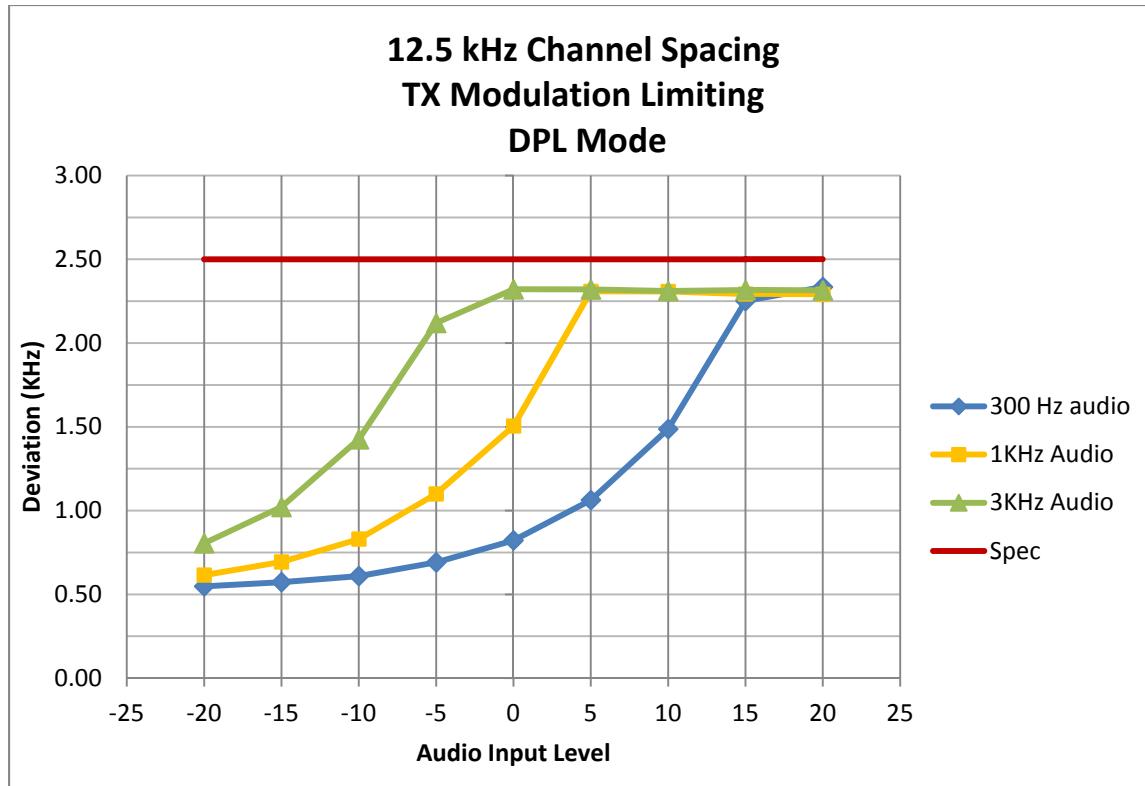

**MODULATION LIMITING CHARACTERISTIC
25 kHz CARRIER SQUELCH MODE
(Not for FCC Review)**


XPR 5550

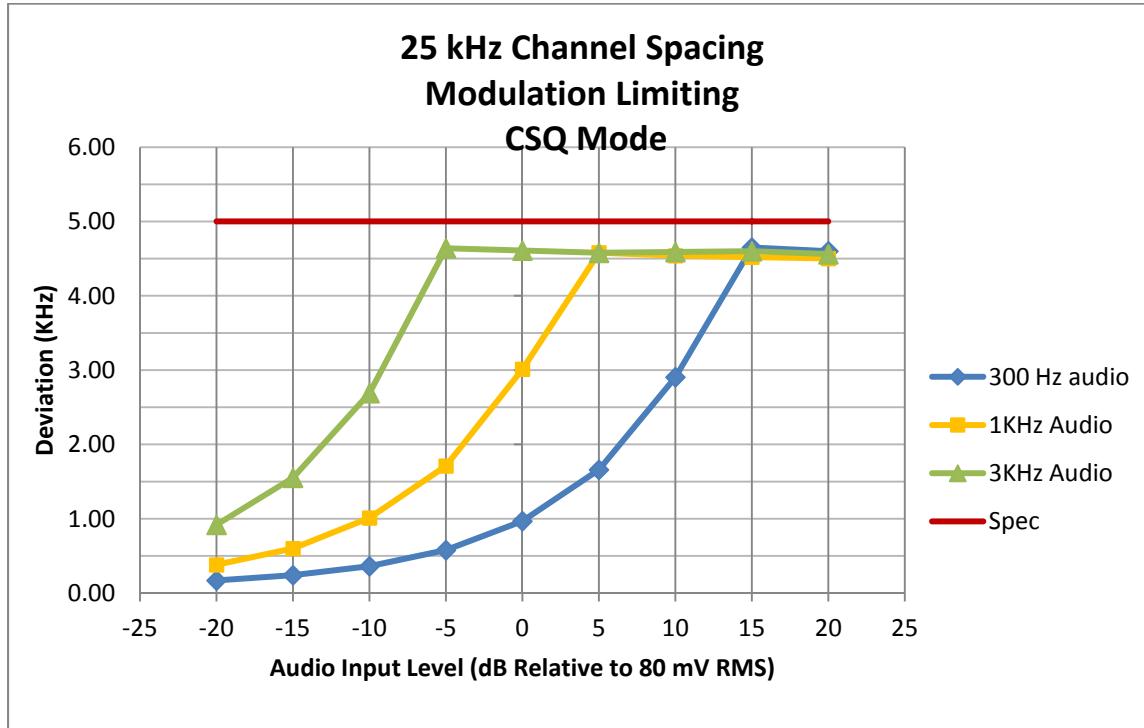

MODULATION LIMITING CHARACTERISTIC
25 kHz TONE PL MODE
(Not for FCC Review)

XPR 5550

25 kHz Channel Spacing
Modulation Limiting
TPL Mode

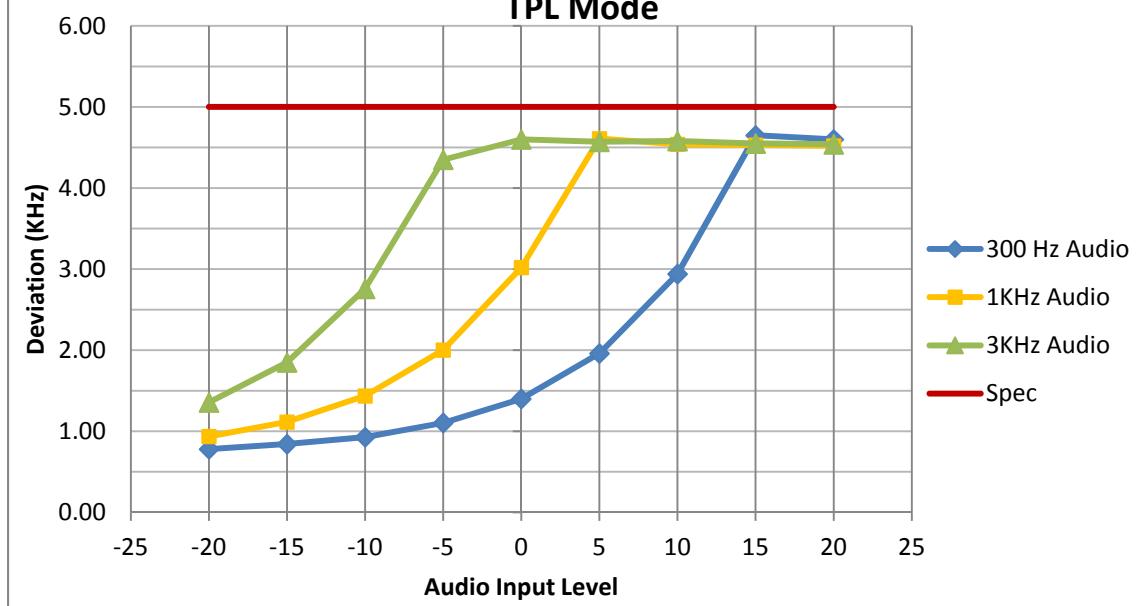

MODULATION LIMITING CHARACTERISTIC
25 kHz DPL MODE
(Not for FCC Review)

XPR 5550

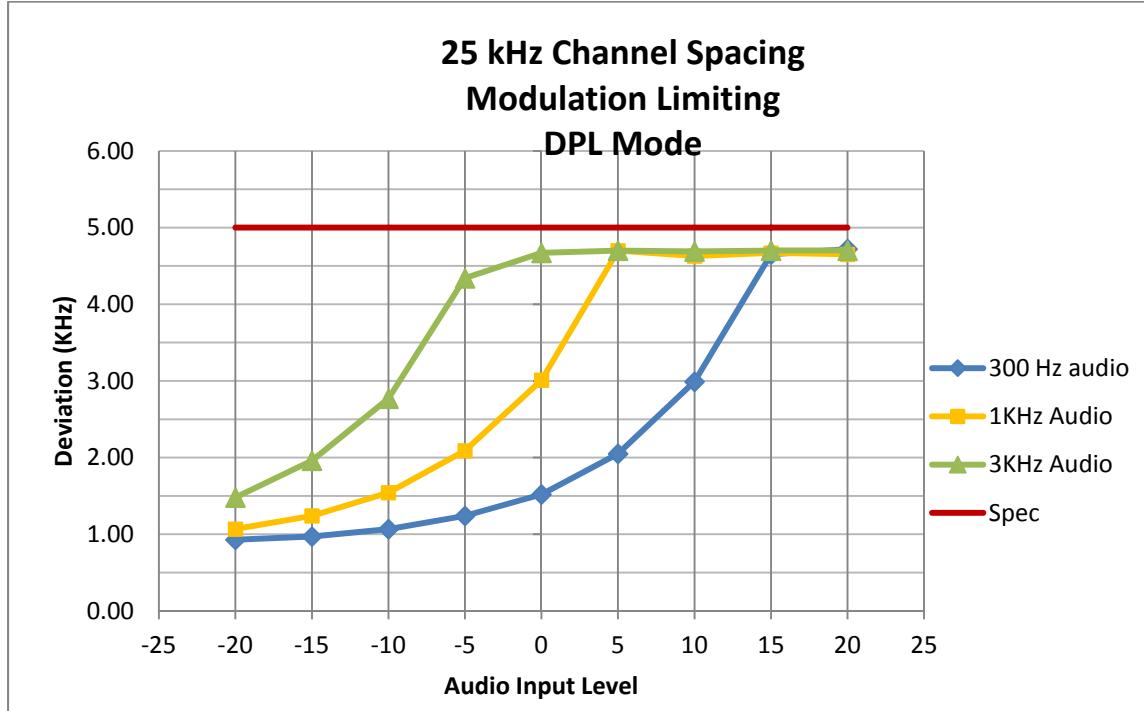


EXHIBIT 6E – MODULATION TECHNIQUES

The transmitter is capable of the following types of modulation:

- i) Modulation of PL (Private Line) – Direct FM tone modulation of 67 Hz to 250.3 Hz at 15% of full system deviation. Also referred to as TPL (Tone Private Line).
- ii) Modulation of DPL (Digital Private Line) – Direct FM modulation at 134 bps at 15% of full system deviation.
- iii) Modulation of 2000/3000 Hz FSK Data – FM modulation at nominally 60% of full system deviation.
- iv) Modulation of DTMF (Dual Tone Multi Frequency) – FM modulation at nominally 60% of full system deviation
- v) Modulation of 9600 bps 4 level FSK Data

Standard Audio Modulation (25 kHz Channelization, Analog Voice) (Not for FCC Review)

Per CFR Title 47, Part 2, Section 2.201, the Carson's Rule calculation for necessary bandwidth, $BW = 2M + 2DK$, where M = maximum modulating frequency in Hz, D = peak deviation in Hz, and $K=1$, is as follows:

In this case the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} \quad (\mathbf{16K0} \text{ designator})$$

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing analogue information.....	3
Telephony (including sound broadcasting)	E

The complete emissions designator for this transmitter is **16K0F3E**.

Standard Audio Modulation (12.5 kHz Channelization, Analog Voice)

Per CFR Title 47, Part 2, Section 2.201, the Carson's Rule calculation for necessary bandwidth, $BW = 2M + 2DK$, where M = maximum modulating frequency in Hz, D = peak deviation in Hz, and $K=1$, is as follows:

In this case the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \quad (\mathbf{11K0} \text{ designator})$$

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing analogue information.....	3
Telephony (including sound broadcasting).....	E

The complete emissions designator for this transmitter is **11K0F3E**.

4 Level FSK Digital Modulation Techniques

The modulation sends 4800 symbols/sec with each symbol conveying 2 bits of information for a data rate of 9600 bps in a 12.5 kHz channel, which is equivalent to 4800 bps per 6.25kHz. The maximum deviation D , of the symbol is defined as:

$$D = 3h / 2T$$

where:

h is the deviation index defined for the modulation

T is the symbol time (1/4800) in seconds

The deviation index, h , is 0.27. This yields a symbol deviation of 1.944 kHz at the symbol center. The mapping between symbols and bits is shown below:

Information Bits		Symbol	4FSK Deviation
Bit 1	Bit 0		
0	1	+3	+1.944 kHz
0	0	+1	+0.648 kHz
1	0	-1	-0.648 kHz
1	1	-3	-1.944 kHz

A Square Root Raised Cosine Filter is implemented for the modulation low pass filter. The input to the modulation low pass filter consists of a series of impulses separated in time by 208.33 microseconds (1/4800 sec). The group delay of the filter is flat over the passband for $|f| < 2880$ Hz. The magnitude response of the filter is given by the following formula.

$|F(f)|$ = magnitude response of the Square Root Raised Cosine Filter

$|F(f)| = 1$ for $|f| \leq 1920$ Hz

$|F(f)| = |\cos(\pi f / 1920)|$ for $1920 \text{ Hz} < |f| \leq 2880 \text{ Hz}$

$|F(f)| = 0$ for $|f| > 2880$ Hz

where f = frequency in hertz.

The 4FSK modulator consists of a Square Root Raised Cosine Filter, cascaded with a frequency modulator.



4 Level FSK Digital Modulation (12.5 kHz Channelization, Digital Data)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore, the 99% energy rule (Title 47 CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing quantized or digital information without the use of a modulating sub-carrier, excluding time-division multiplex	1
Data Transmission, telemetry, telecommand	D

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60F1D**.

4 Level FSK Digital Modulation (12.5 kHz Channelization, Digital Voice and Data)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore the 99% energy rule (title 47CFR2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing quantized or digital information without the use of a modulating sub-carrier, excluding time-division multiplex	1
Telephony (including sound broadcasting)	E

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60F1E**.

Digital (12.5 kHz Channelization, Digital TDMA)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore the 99% energy rule (title 47CFR2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
A single channel containing quantized or digital information without the use of a modulating sub-carrier, excluding time-division multiplex	1
Combination of Data Transmission, telemetry, telecommand (D), and Telephony (E)...	W

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60F1W**.

4 Level FSK Digital Modulation (12.5 kHz Channelization, Digital Data)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore, the 99% energy rule (Title 47 CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).

Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
Case not otherwise covered	X
Data Transmission, telemetry, telecommand	D

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.

The complete emissions designator for this transmitter is **7K60FXD**.

MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3090

IC: 109AB-99FT3090

4 Level FSK Digital Modulation (12.5 kHz Channelization, Digital Voice and Data)

Measurement's per Rule Part 2.202(c)(4) where employed because Part 2.202(g) Table III A formulation produces an excessive result using the value of K recommended in the Table. Therefore the 99% energy rule (title 47CFR2.989) was used for digital mode and is more accurate than Carson's rule. It states that 99% of the modulation energy falls within X kHz, which in this case is 7.6 kHz (**7K60** designator).


Per CFR Title 47, Part 2, Section 2.201:

Frequency Modulation	F
Case not otherwise covered	X
Telephony (including sound broadcasting)	E

Note: This product utilizes a Time Division Multiple Access (TDMA) protocol.


The complete emissions designator for this transmitter is **7K60FXE**.

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, 2500 Hz TONE, CARRIER SQUELCH
EMISSION MASK: D**

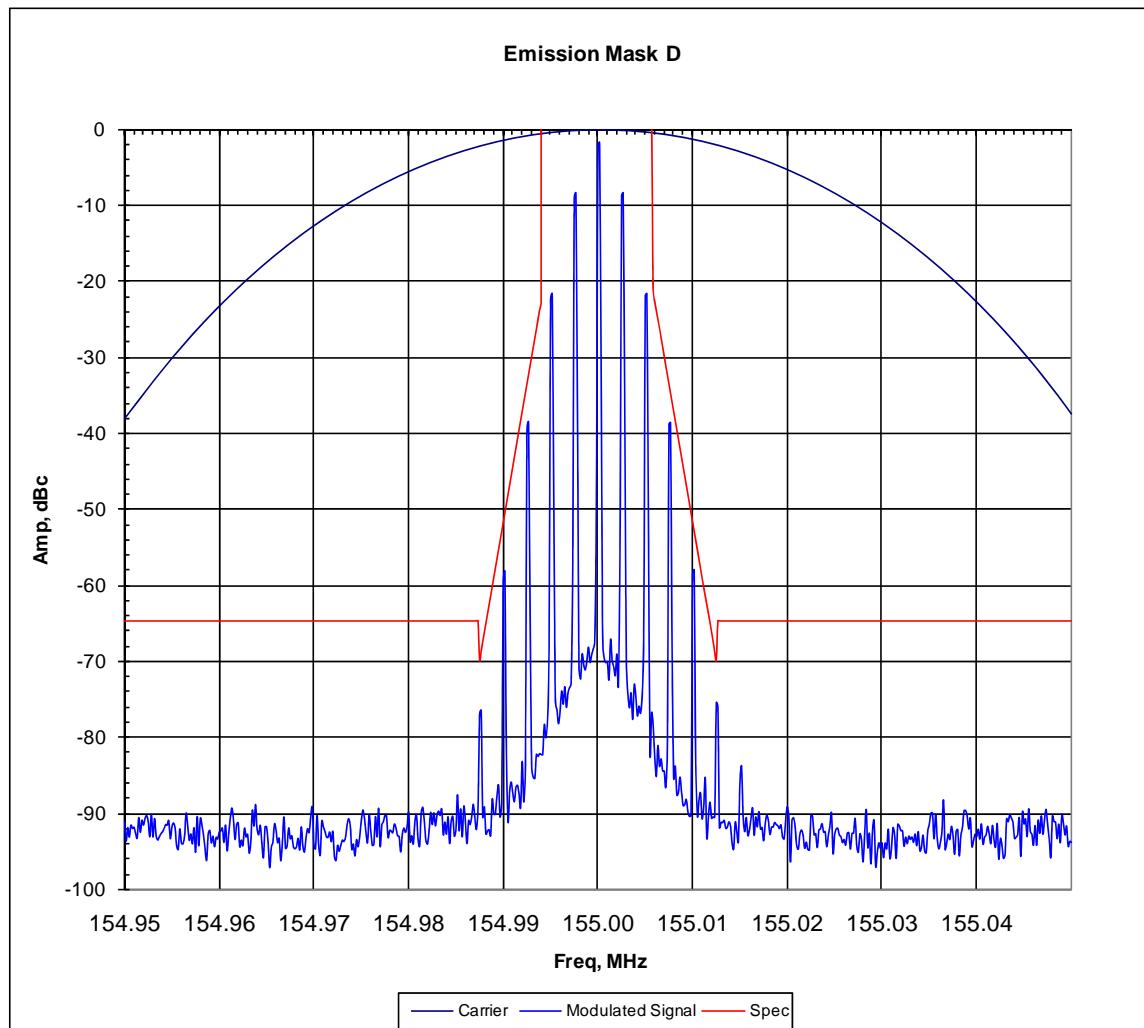


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, 2500 Hz TONE, TPL 250.3 Hz
EMISSION MASK: D**

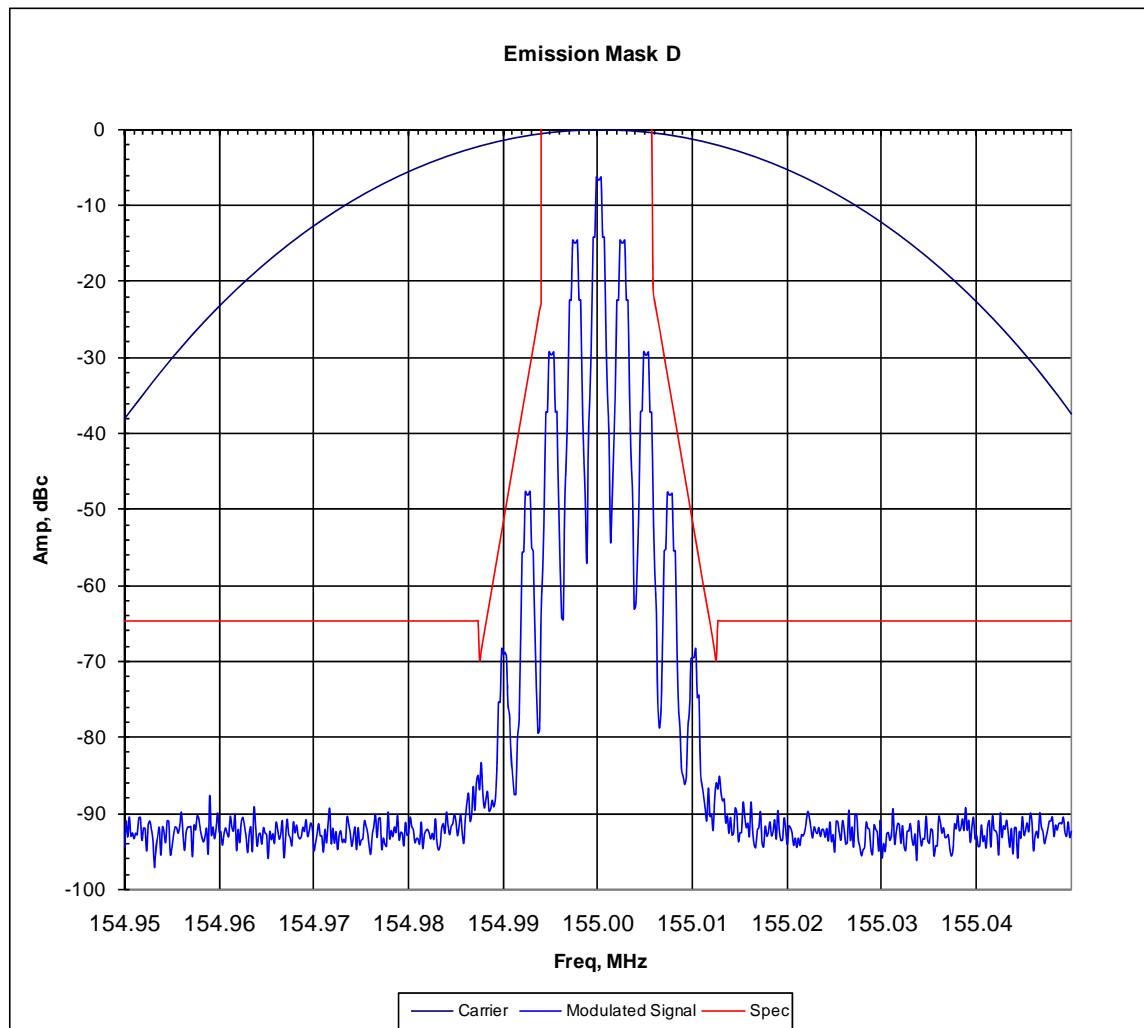


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, 2500 Hz TONE, DPL 131
EMISSION MASK: D**

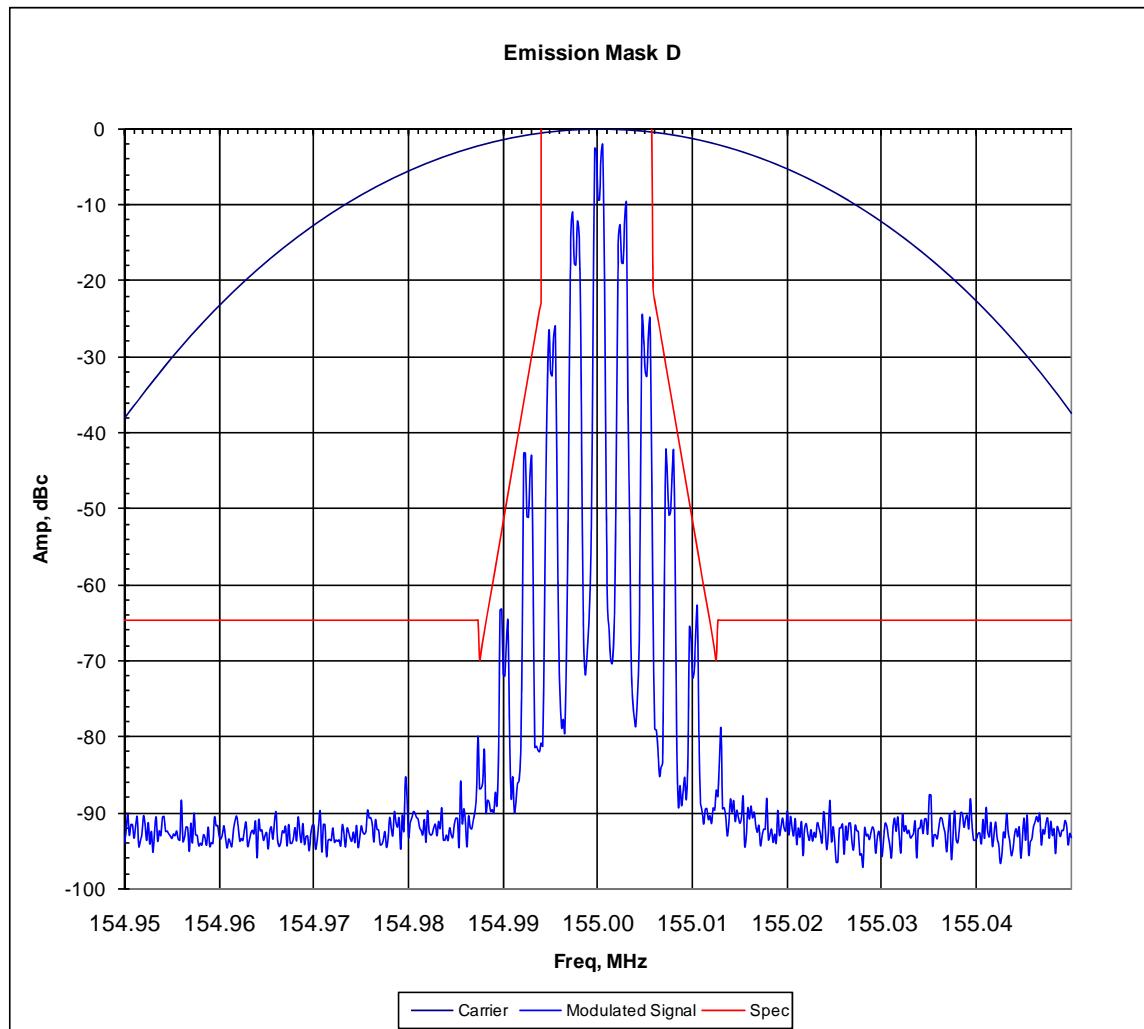


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, DTMF MODULATION, CARRIER SQUELCH
EMISSION MASK: D**

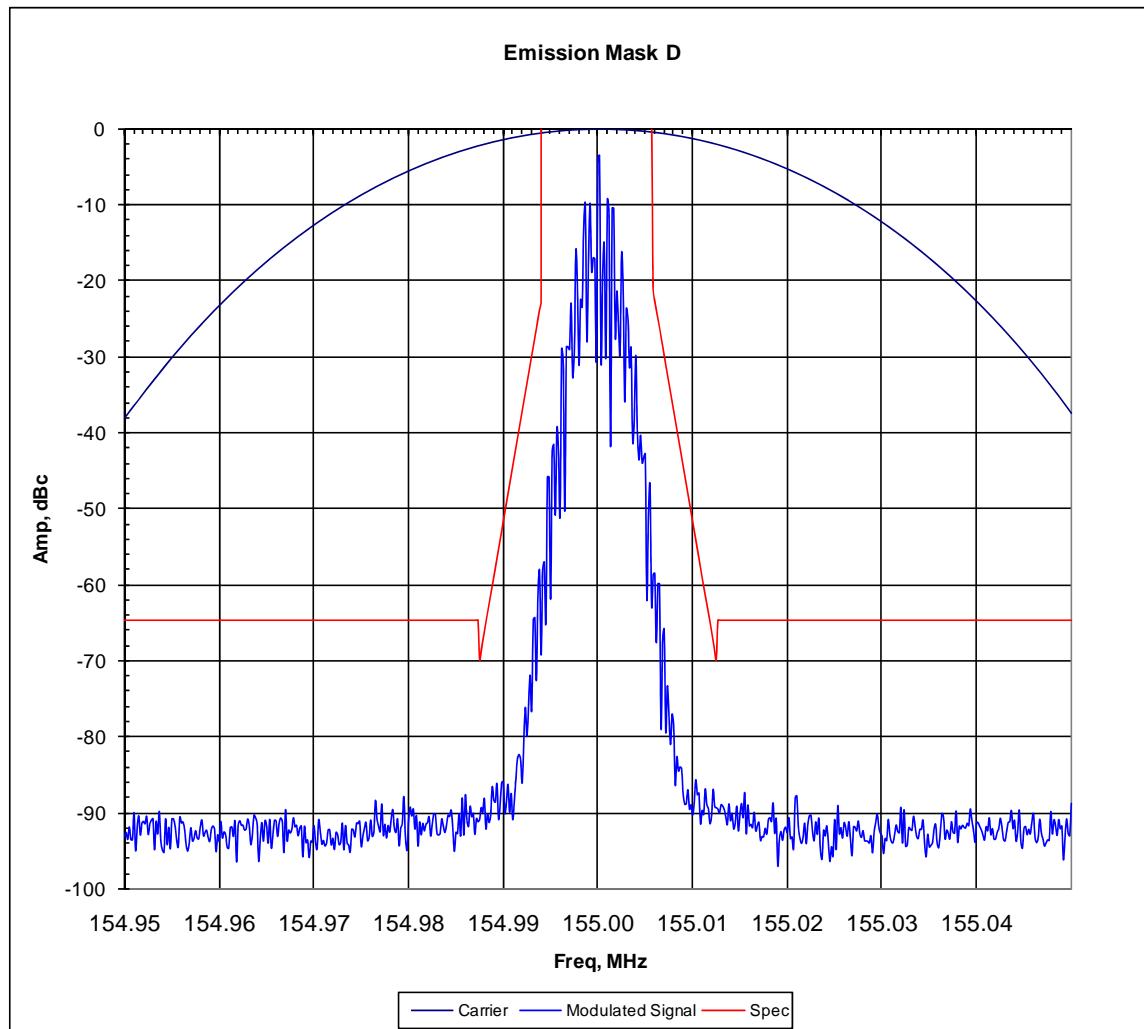


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, DTMF MODULATION, TPL 250.3 Hz
EMISSION MASK: D**

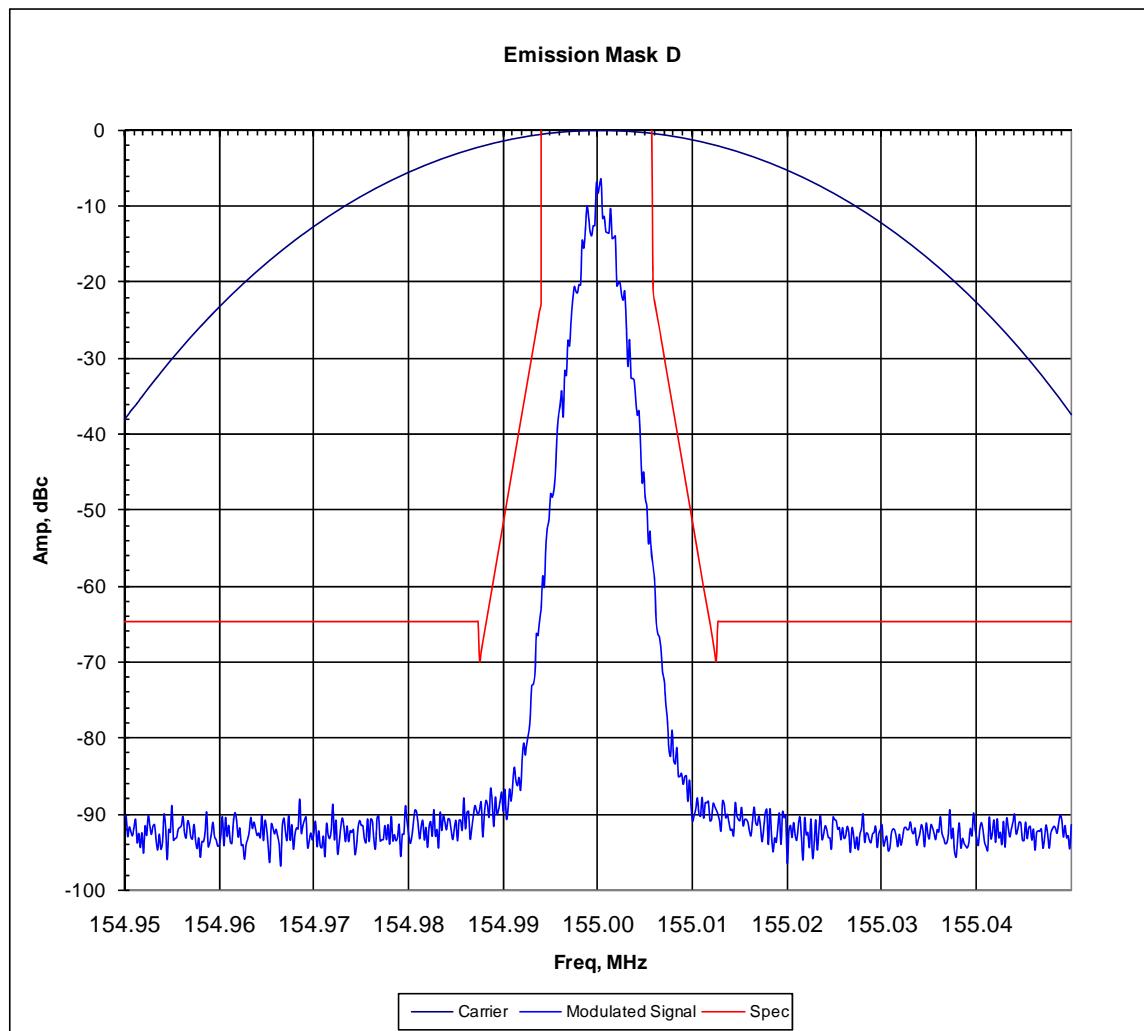


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, DTMF MODULATION, DPL 131
EMISSION MASK: D**

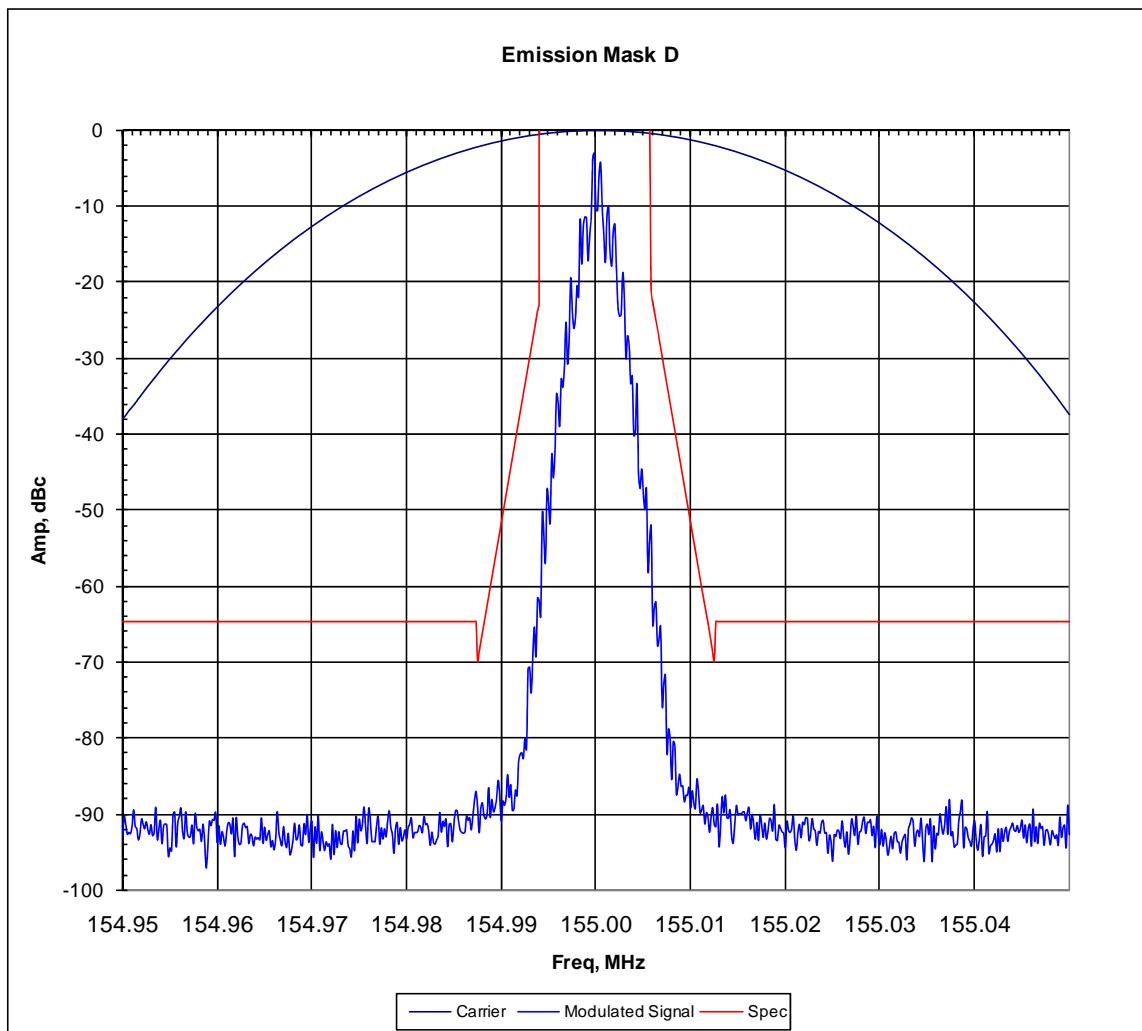


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, 2000/3000 Hz FSK, CARRIER SQUELCH
EMISSION MASK: D**

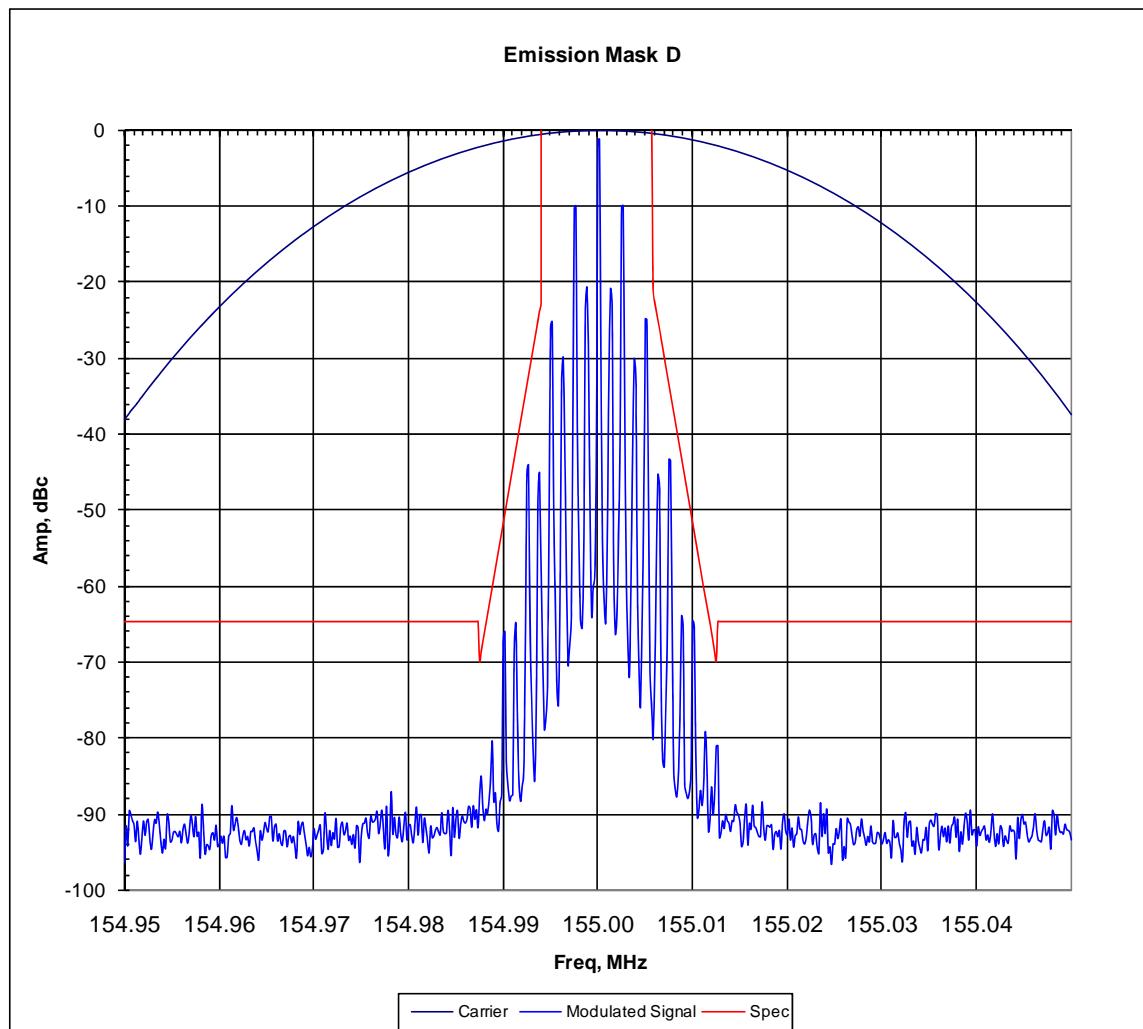


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, 2000/3000 Hz FSK, TPL 250.3 Hz
EMISSION MASK: D**

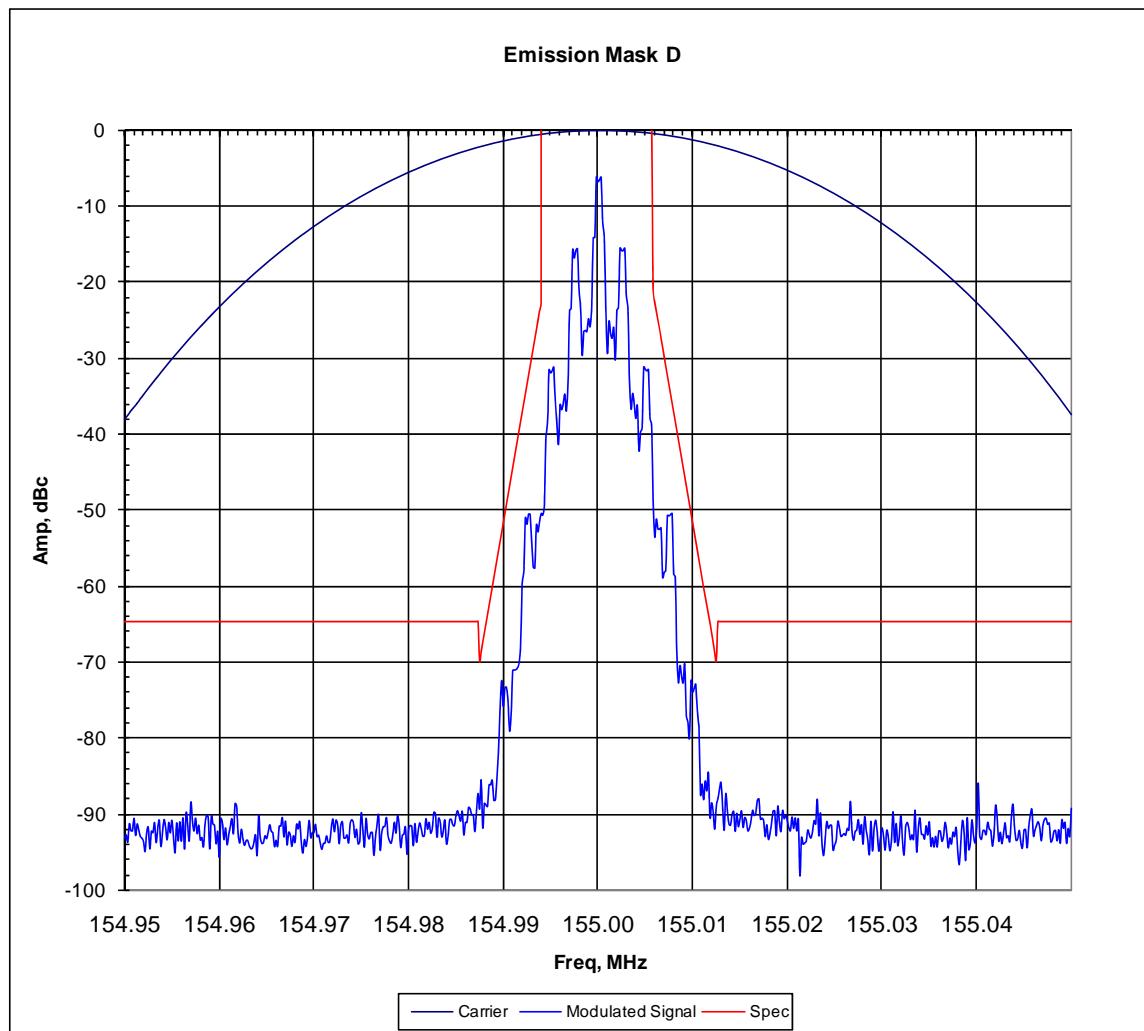


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, 2000/3000 Hz FSK, DPL 131
EMISSION MASK: D**

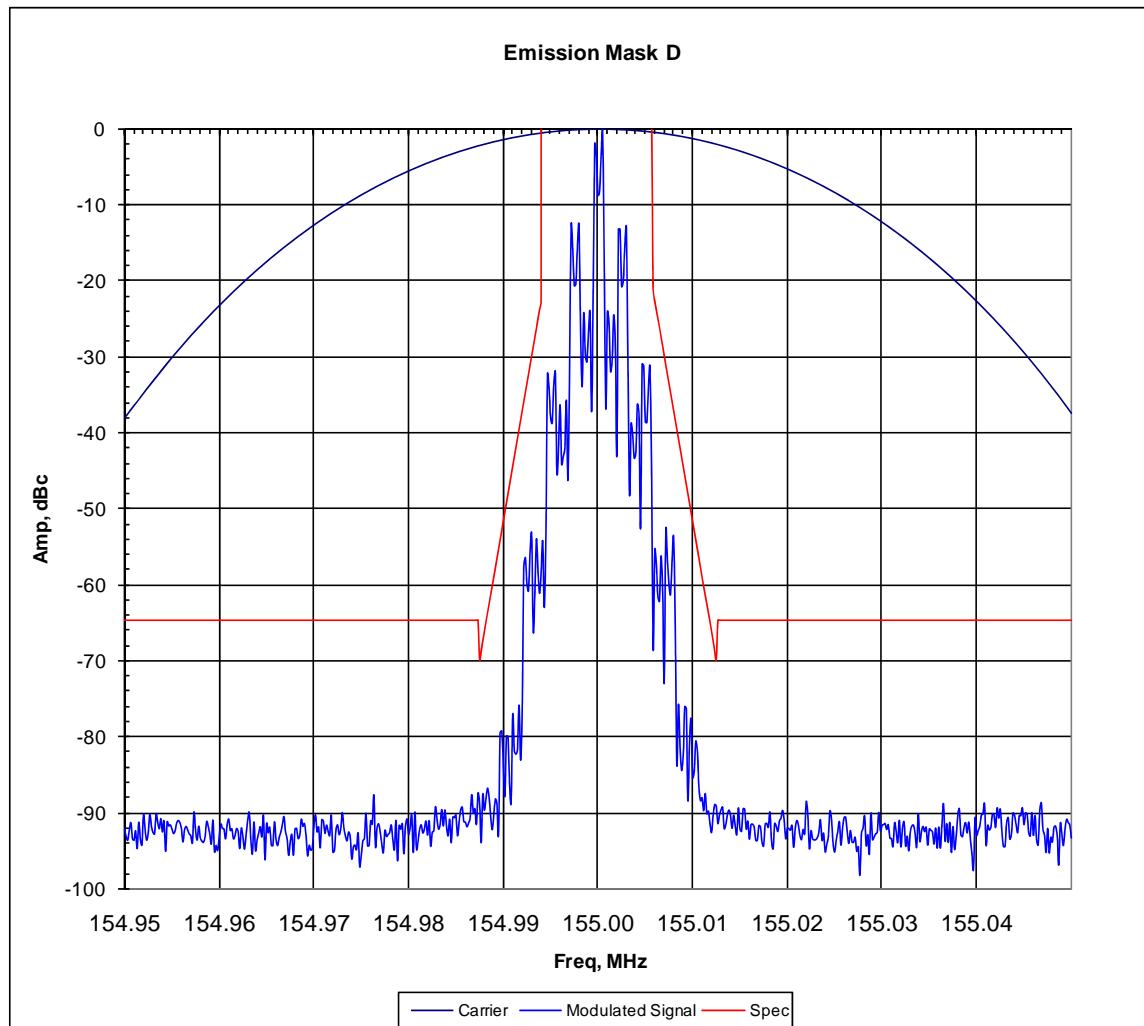


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, 4-LEVEL FSK DATA
EMISSION MASK: D**

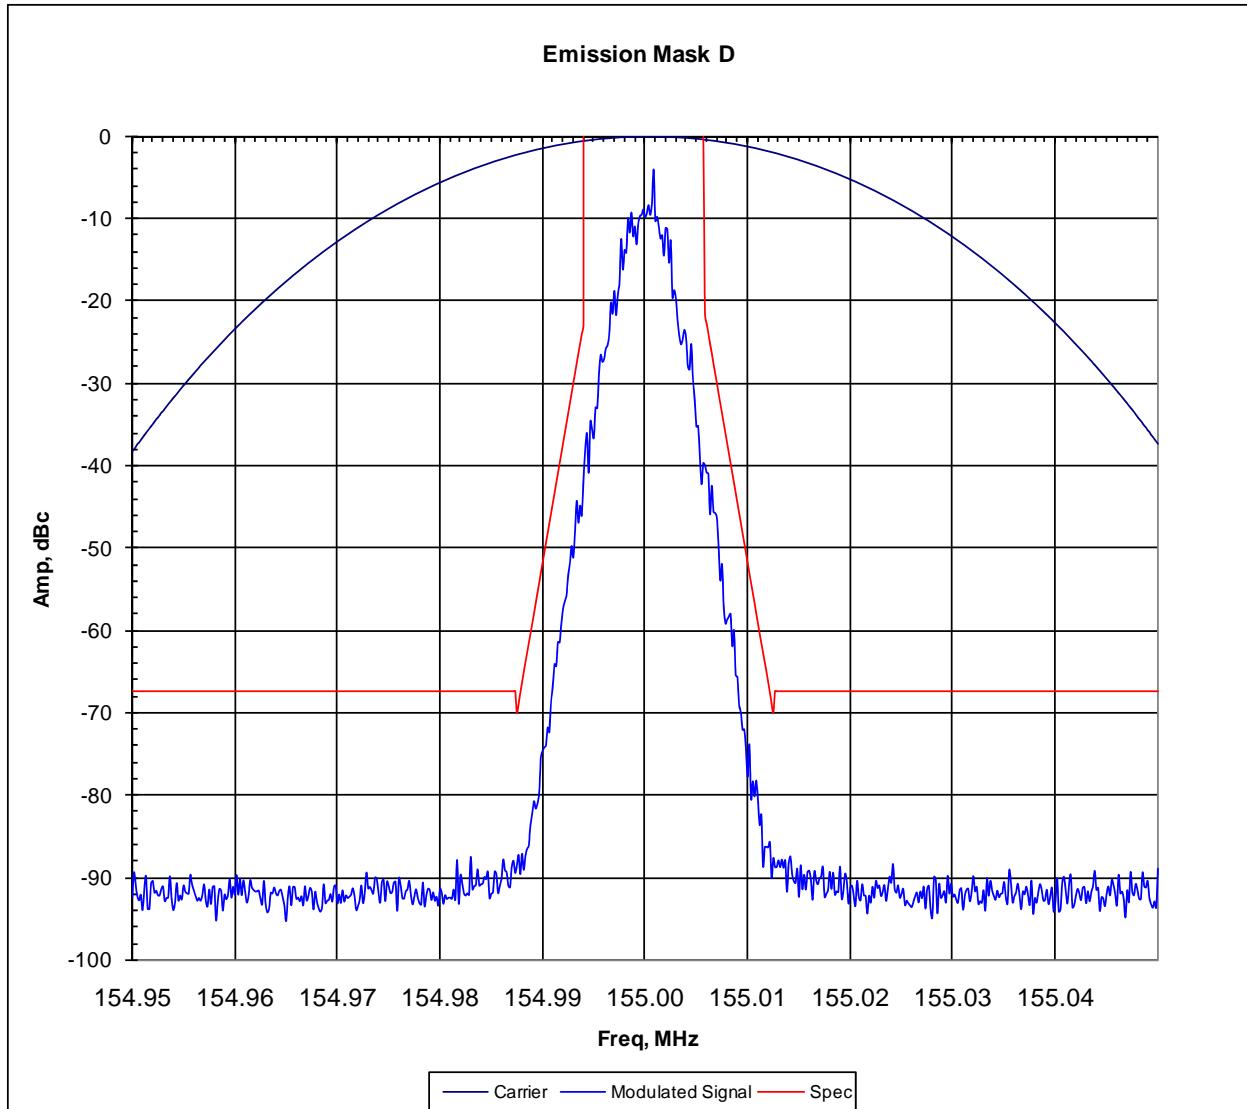


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
12.5 kHz CHANNEL SPACING, 4-LEVEL FSK VOICE AND DATA
EMISSION MASK: D**

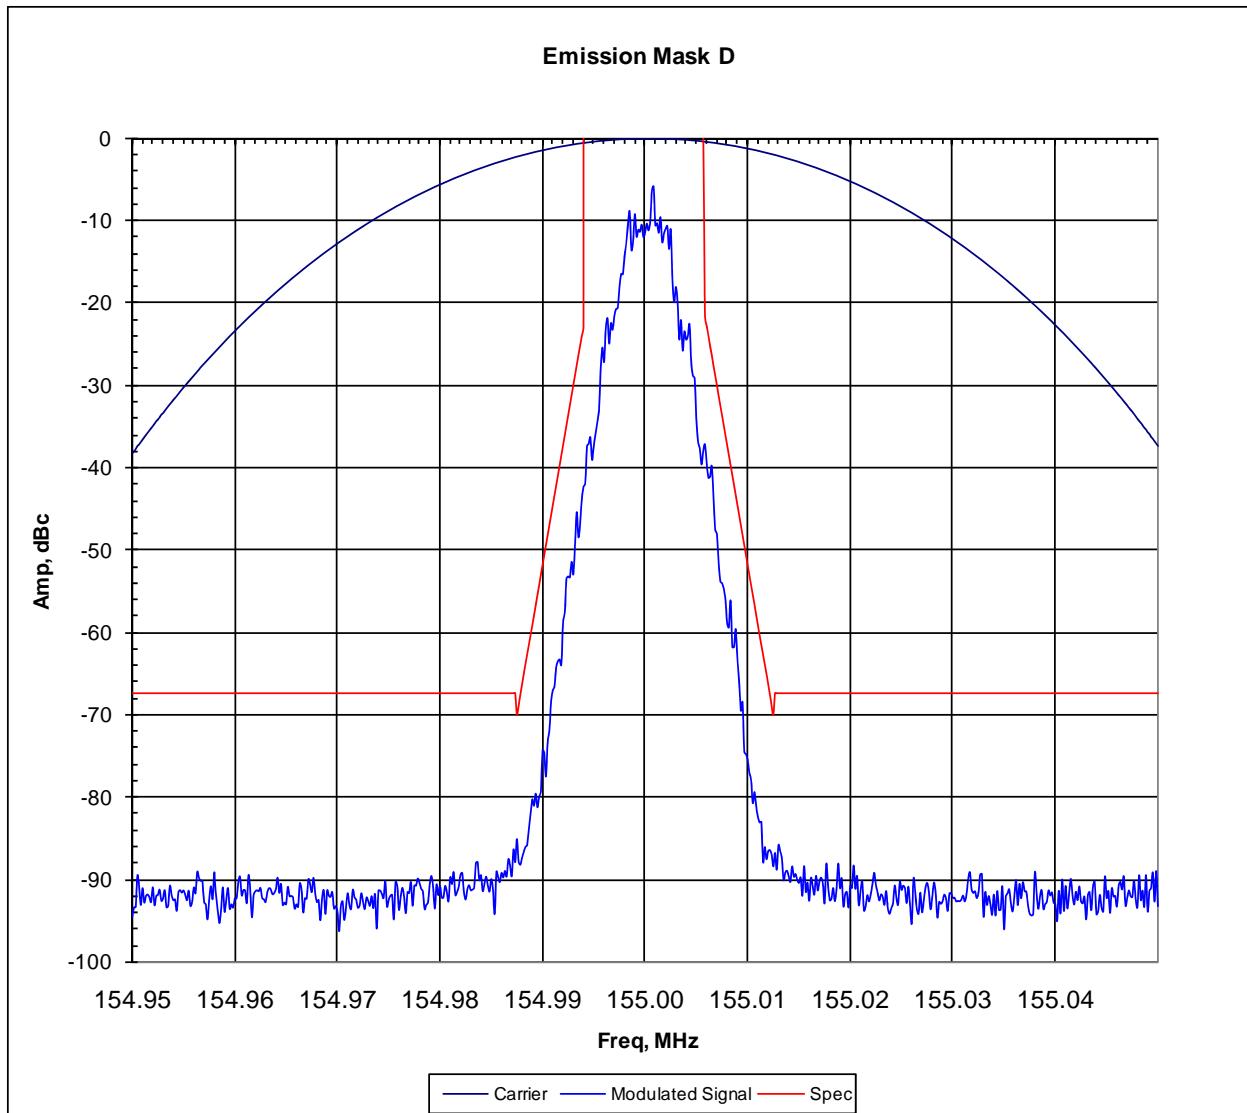


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, 2500 Hz TONE, CARRIER SQUELCH
EMISSION MASK: B
(Not for FCC Review)**

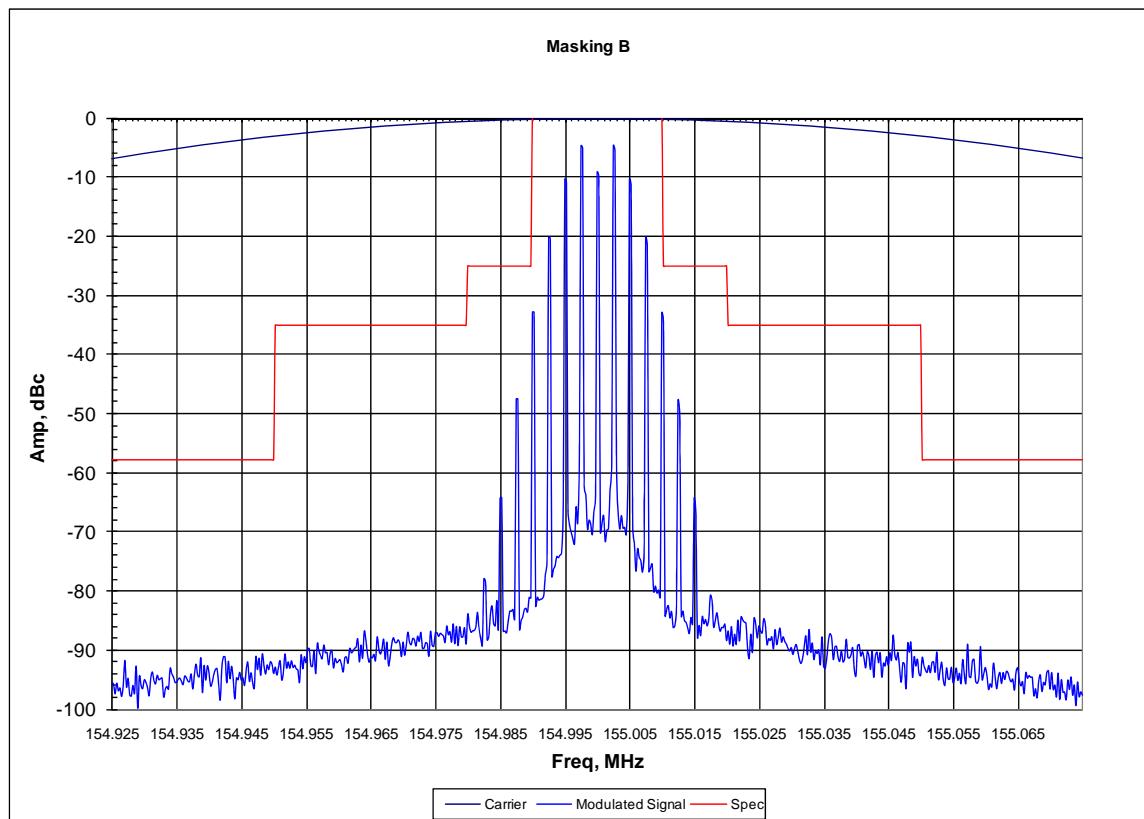


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, 2500 Hz TONE, TPL 250.3 Hz
EMISSION MASK: B
(Not for FCC Review)**

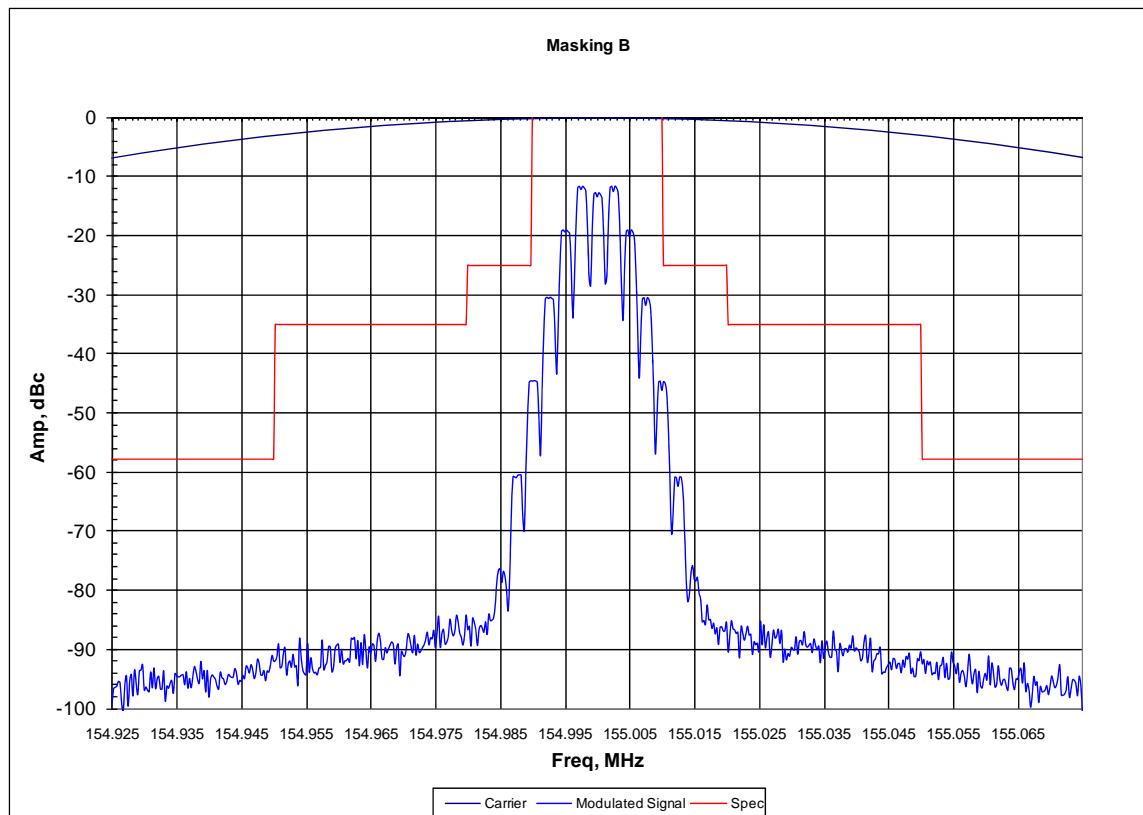


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, 2500 Hz TONE, DPL 131
EMISSION MASK: B
(Not for FCC Review)**

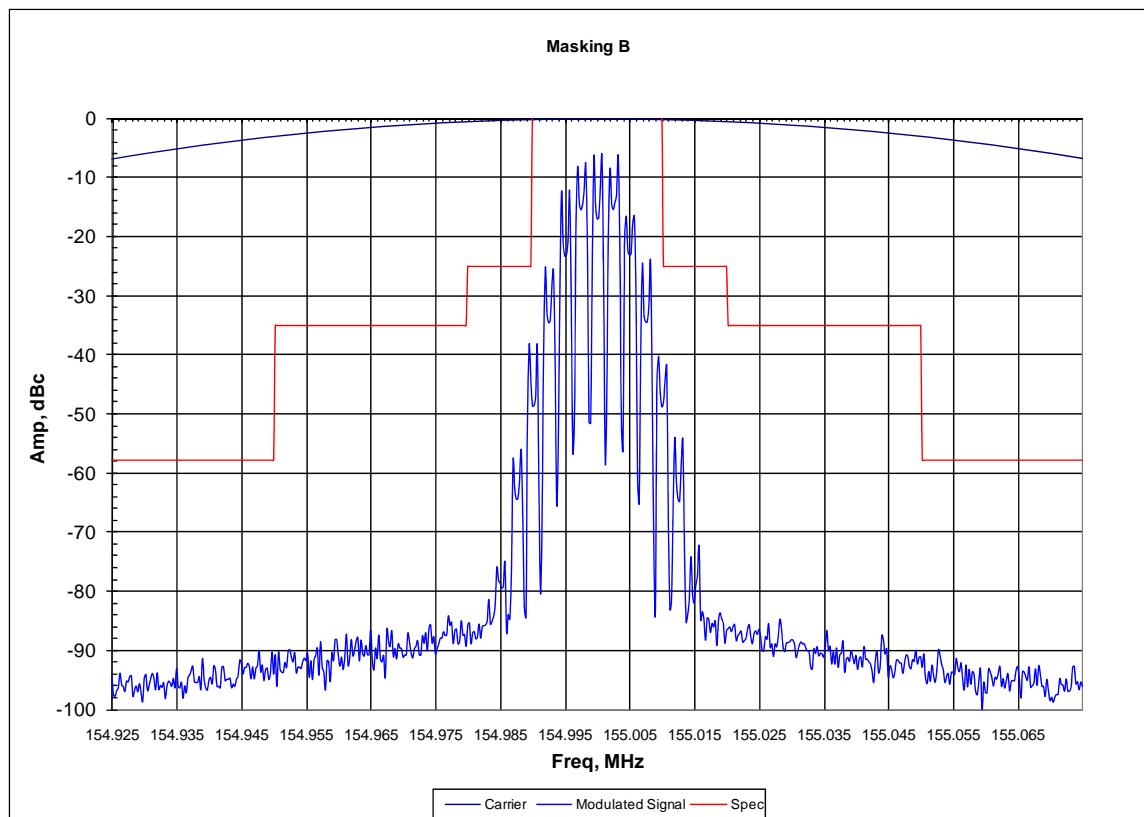


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, DTMF MODULATION, CARRIER SQUELCH
EMISSION MASK: B
(Not for FCC Review)**

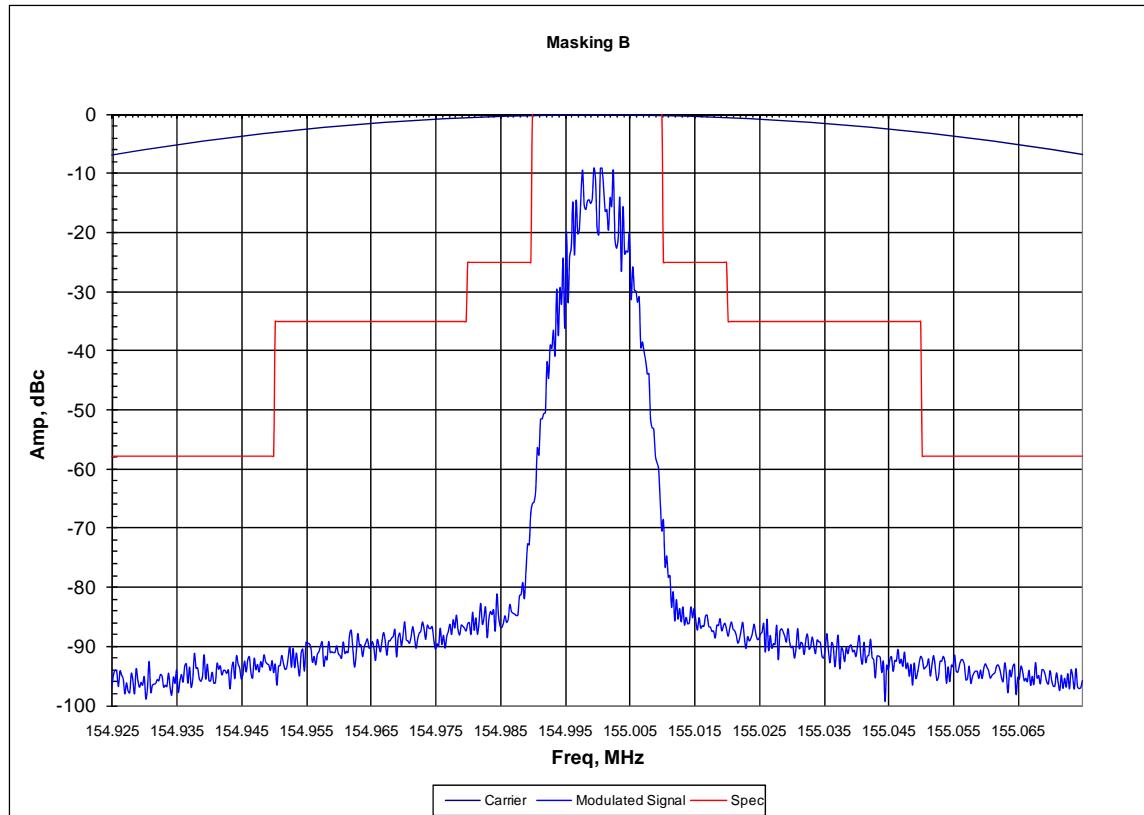


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, DTMF MODULATION, TPL 250.3 Hz
EMISSION MASK: B
(Not for FCC Review)**

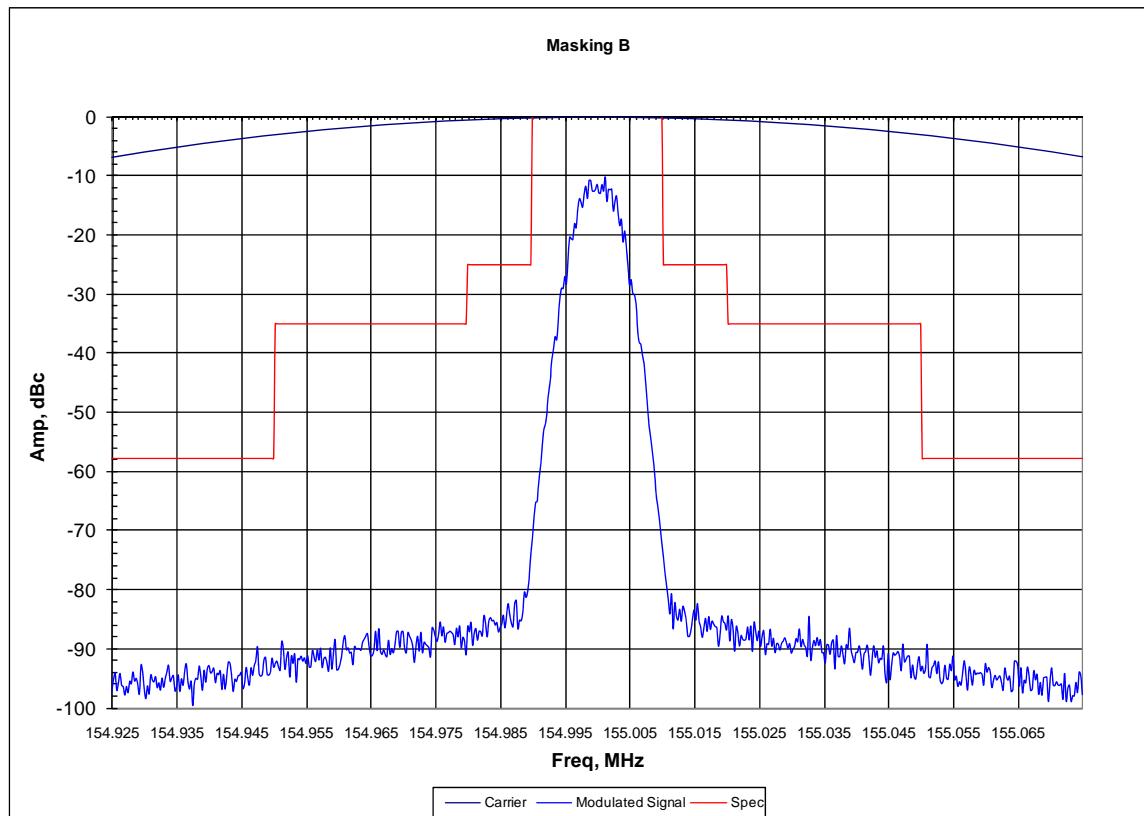


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEET TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, DTMF MODULATION, DPL 131
EMISSION MASK: B
(Not for FCC Review)**

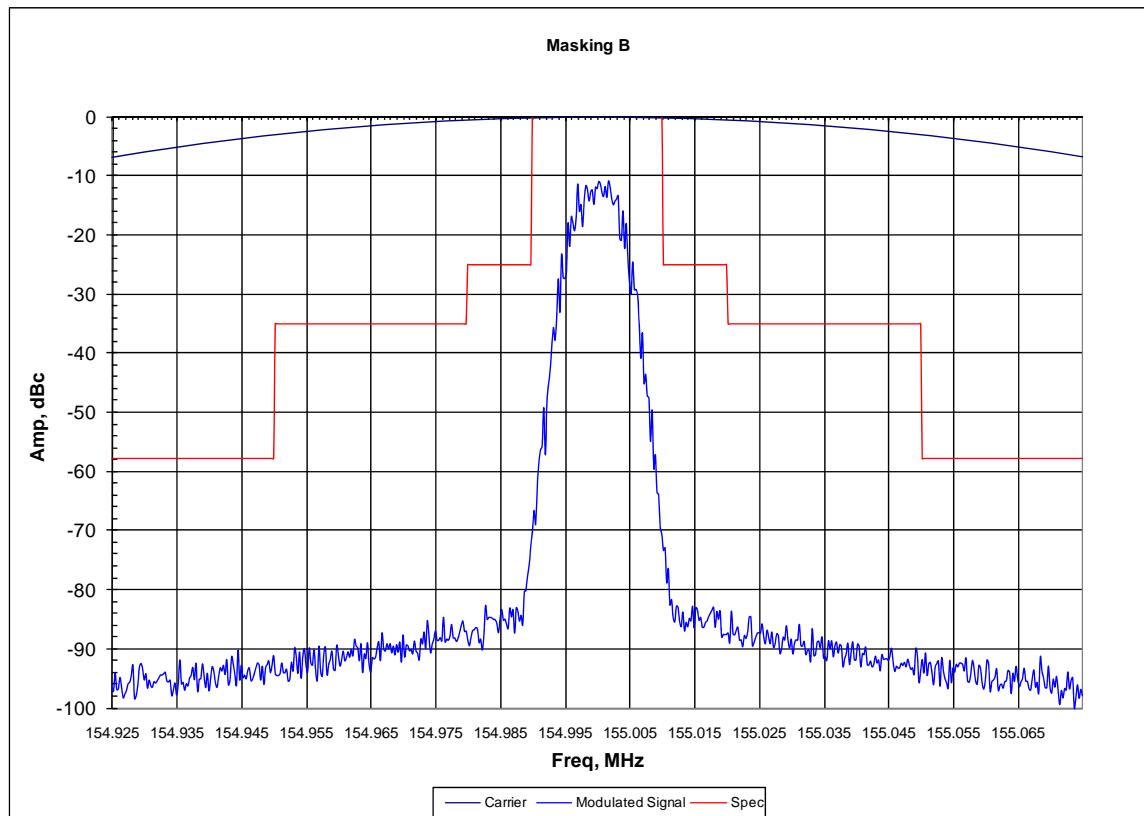


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEET TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, 2000/3000 Hz FSK, CARRIER SQUELCH
EMISSION MASK: B
(Not for FCC Review)**

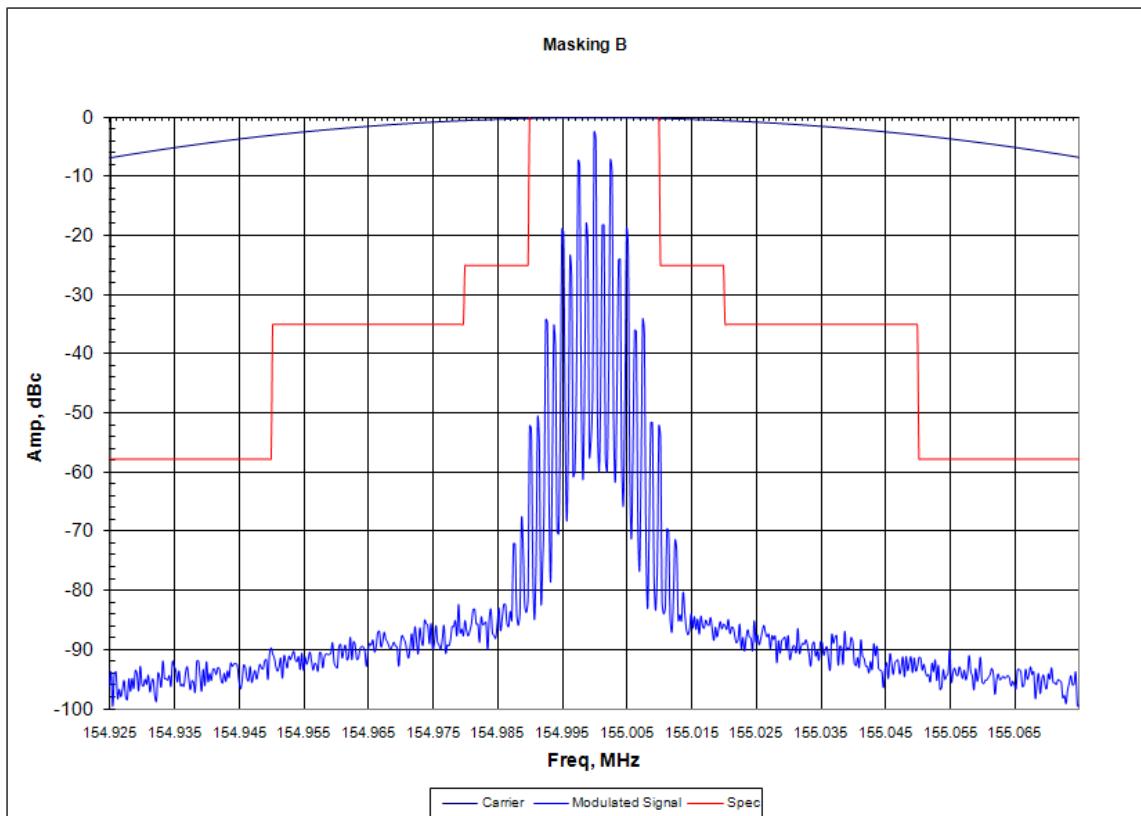


CENTER FREQUENCY: 155.00 MHz
RESOLUTION BANDWIDTH: 100 Hz
VIDEO BANDWIDTH: 1 kHz
SPAN: 100 kHz
HORIZONTAL SCALE: 10 kHz/div
SWEEP TIME: 50 Sec.
VERTICAL SCALE: 10 dB/div
REFERENCE LEVEL: 0 dB (47.3 dBm = 54W)
ATTENUATION: 30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, 2000/3000 Hz FSK, TPL 250.3 Hz
EMISSION MASK: B
(Not for FCC Review)**

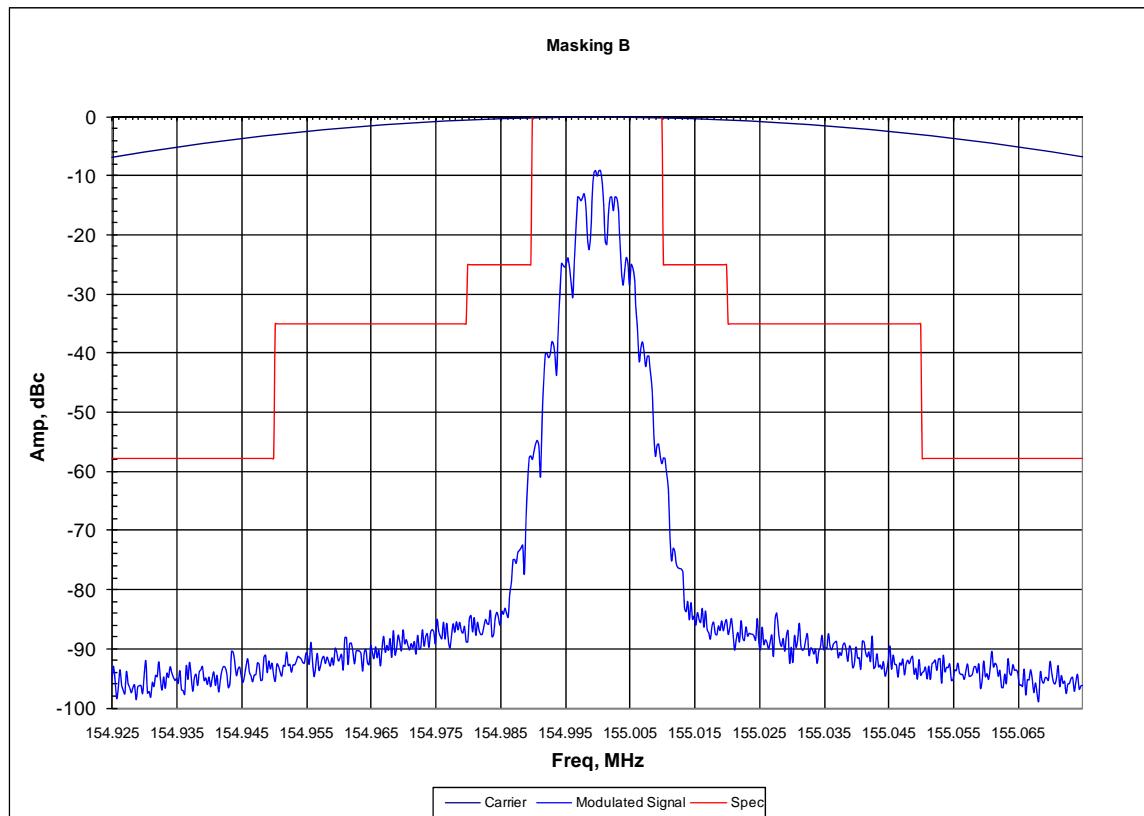


CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEET TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB

**OCCUPIED BANDWIDTH MEASUREMENT FOR
25 kHz CHANNEL SPACING, 2000/3000 Hz FSK, DPL 131
EMISSION MASK: B
(Not for FCC Review)**

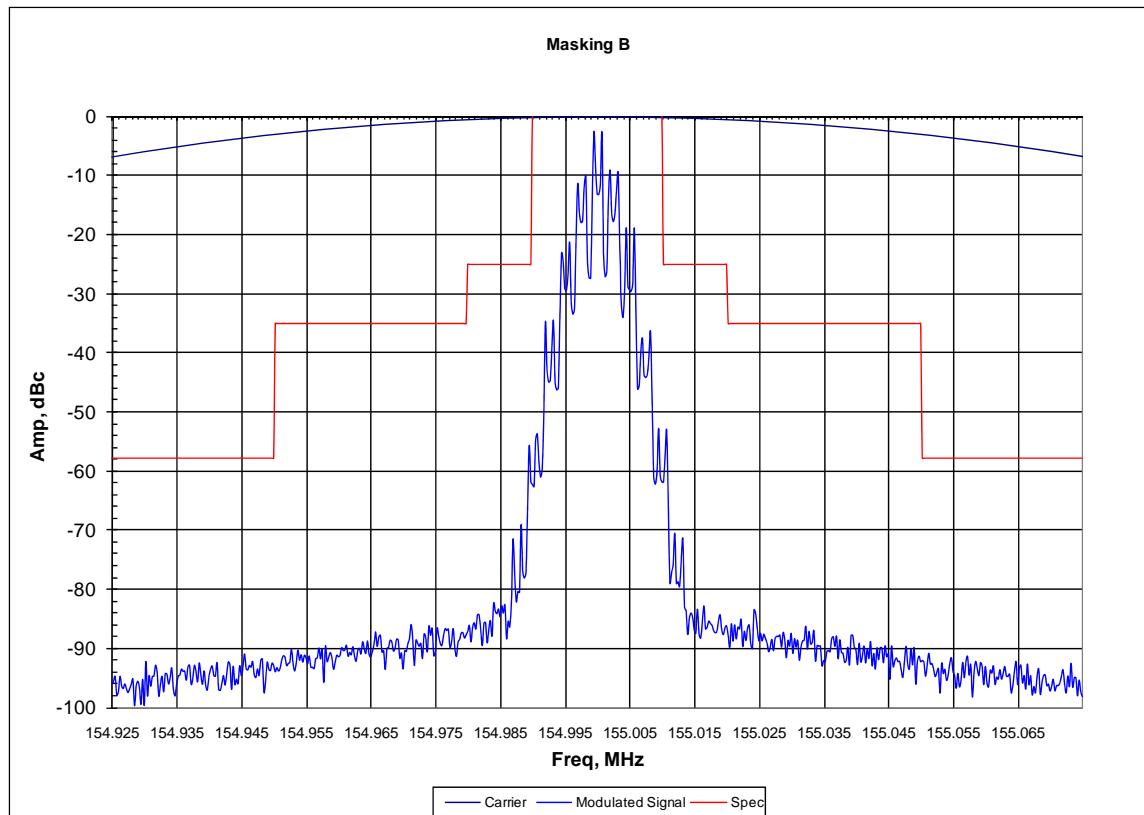

CENTER FREQUENCY:	155.00 MHz
RESOLUTION BANDWIDTH:	100 Hz
VIDEO BANDWIDTH:	1 kHz
SPAN:	100 kHz
HORIZONTAL SCALE:	10 kHz/div
SWEEP TIME:	50 Sec.
VERTICAL SCALE:	10 dB/div
REFERENCE LEVEL:	0 dB (47.3 dBm = 54W)
ATTENUATION:	30 dB


**CONDUCTED SPURIOUS EMISSIONS
HIGH POWER (30W), 136.000 MHz**

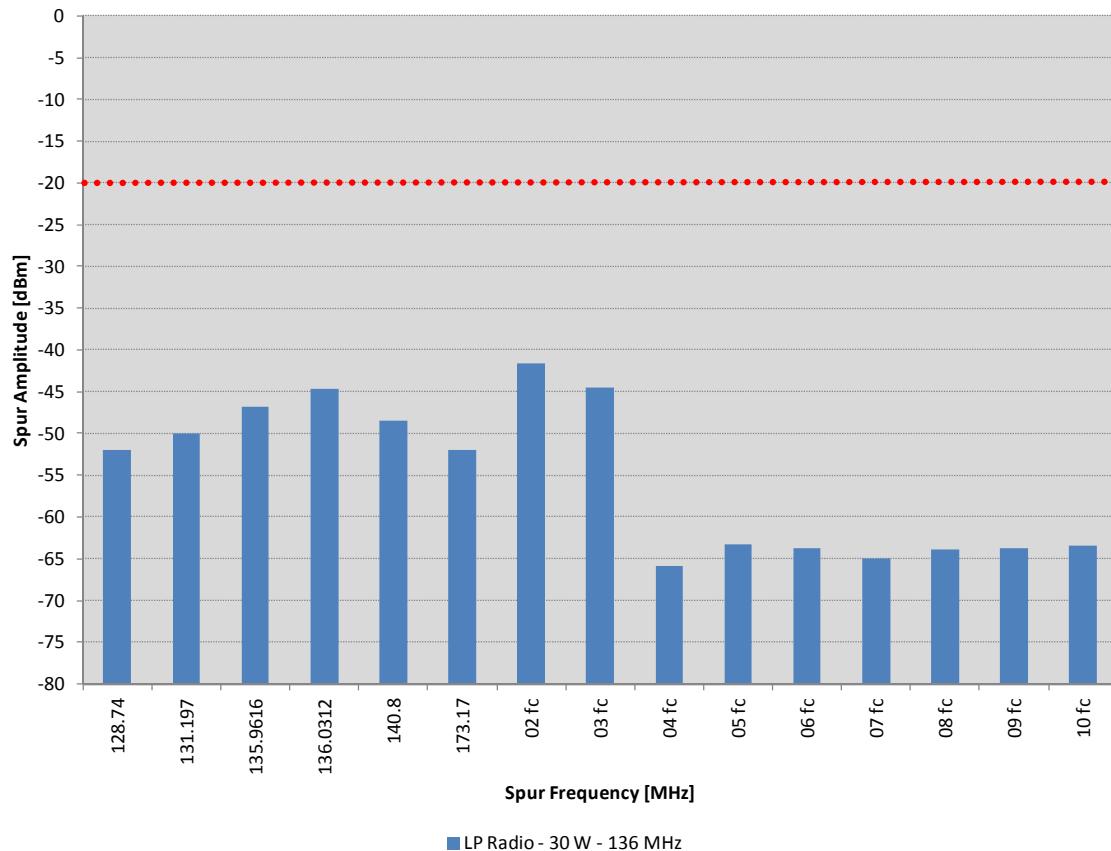

The conducted spurious level is plotted in dBm on the vertical axis.

The specification for conducted spurious emissions is -20 dBm.


**CONDUCTED SPURIOUS EMISSIONS
HIGH POWER (30W), 155.000 MHz**

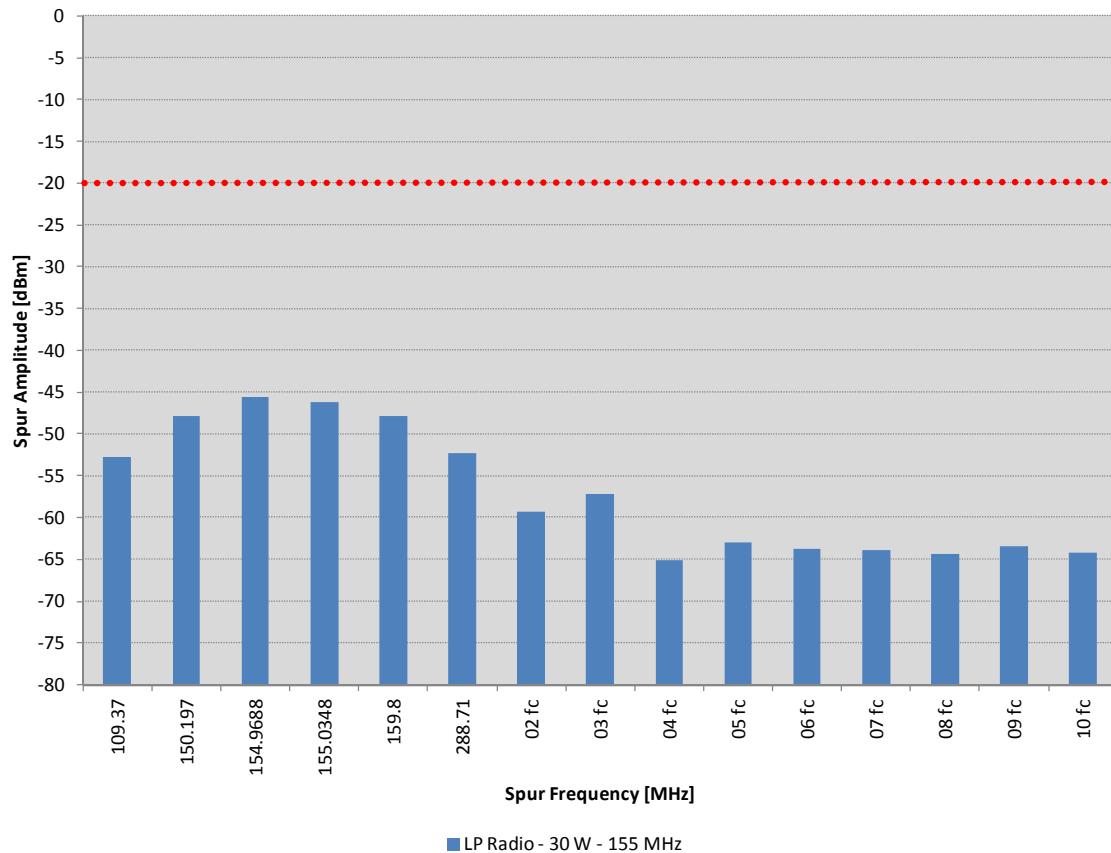

The conducted spurious level is plotted in dBm on the vertical axis.

The specification for conducted spurious emissions is -20 dBm.


**CONDUCTED SPURIOUS EMISSIONS
HIGH POWER (30W), 174.000 MHz**

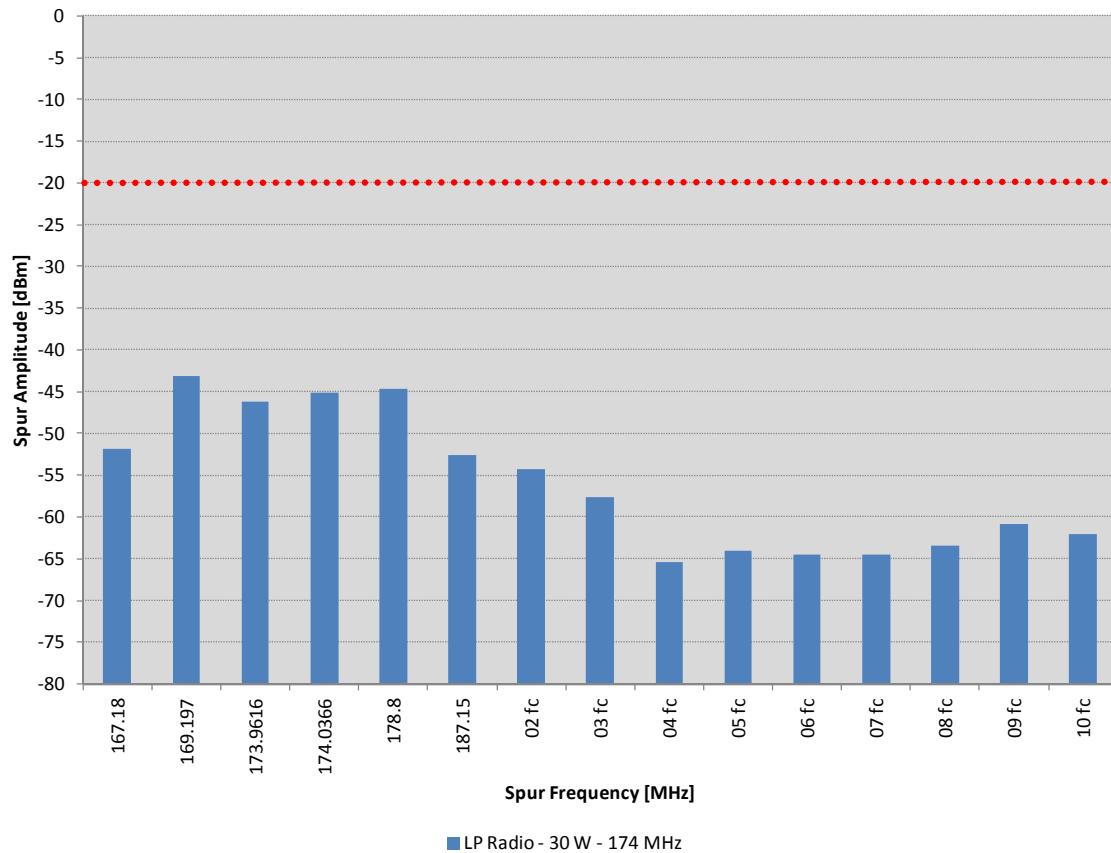

The conducted spurious level is plotted in dBm on the vertical axis.

The specification for conducted spurious emissions is -20 dBm.


**CONDUCTED SPURIOUS EMISSIONS
LOW POWER (1W), 136.000 MHz**

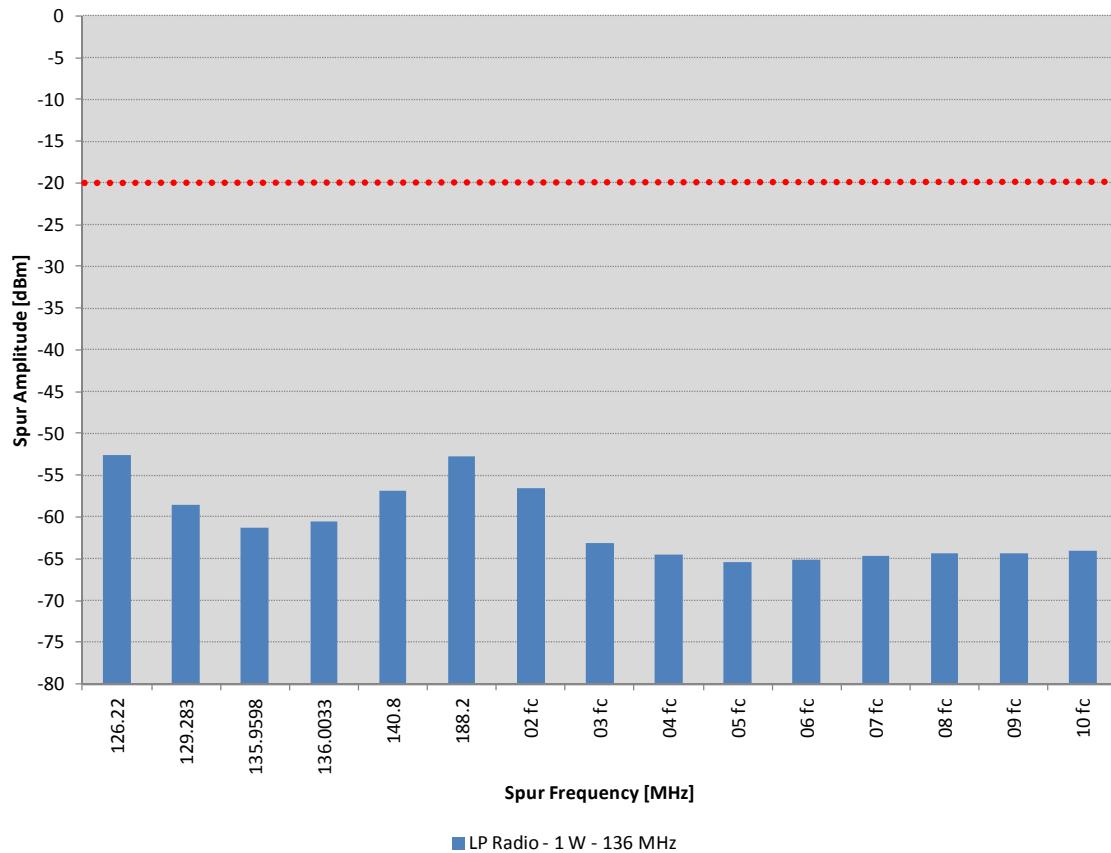

The conducted spurious level is plotted in dBm on the vertical axis.

The specification for conducted spurious emissions is -20 dBm.


**CONDUCTED SPURIOUS EMISSIONS
LOW POWER (1W), 155.000 MHz**

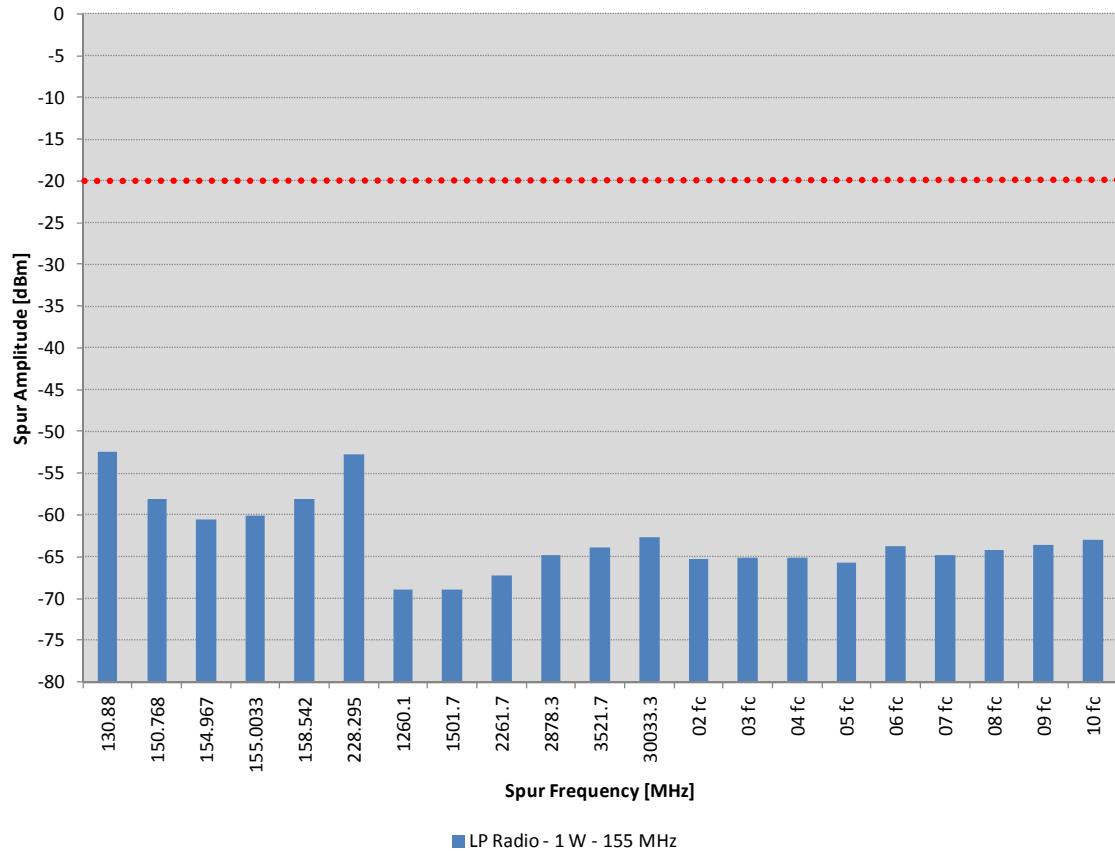

The conducted spurious level is plotted in dBm on the vertical axis.

The specification for conducted spurious emissions is -20 dBm.

**CONDUCTED SPURIOUS EMISSIONS
LOW POWER (1W), 174.000 MHz**

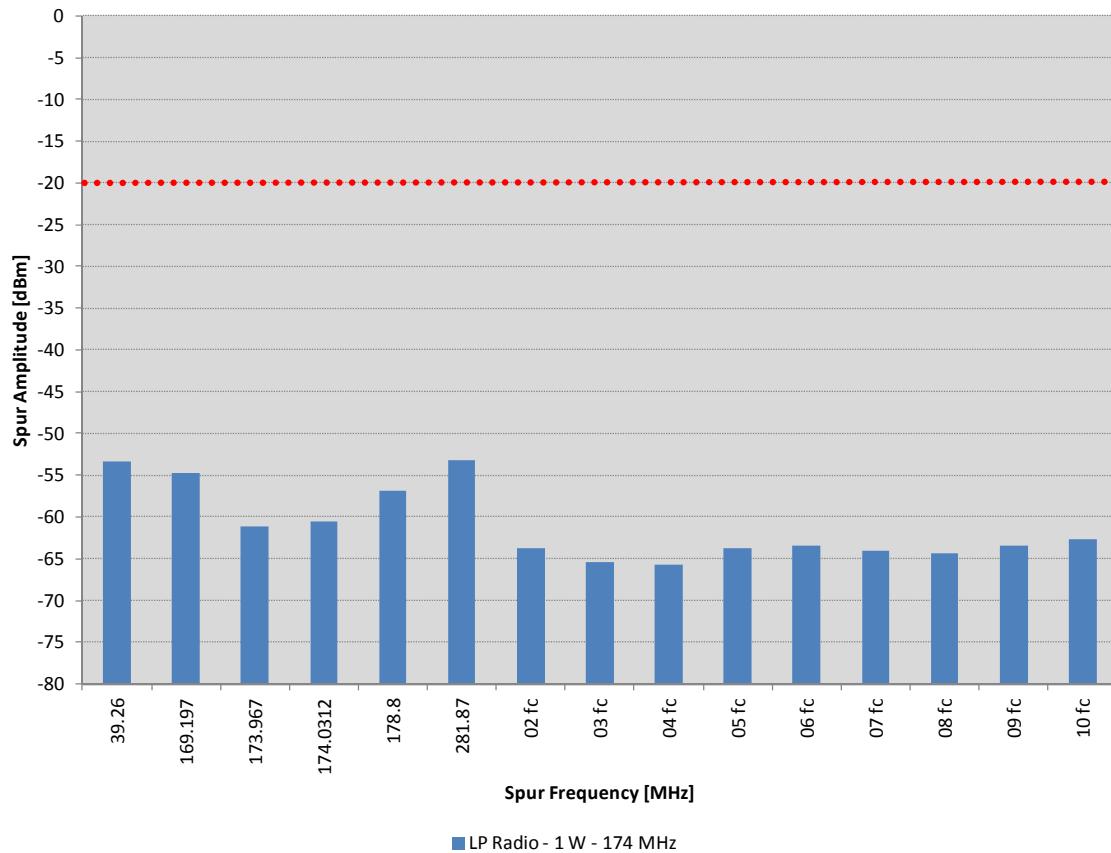

The conducted spurious level is plotted in dBm on the vertical axis.

The specification for conducted spurious emissions is -20 dBm.

MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3090

IC: 109AB-99FT3090

Motorola Solutions

FCC ID:ABZ99FT3090 \ IC ID:109AB-99FT3090


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 30 Watts

136.0125 MHz

Channel Spacing 12.5kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
272.0250	-20	*	*
408.0375	-20	*	*
544.0500	-20	*	*
680.0625	-20	*	*
816.0750	-20	*	*
952.0875	-20	*	*
1088.1000	-20	*	*
1224.1125	-20	*	*
1360.1250	-20	*	*

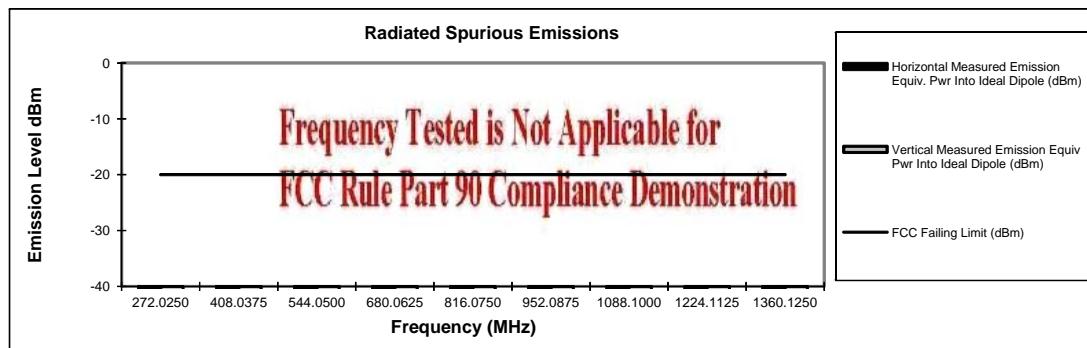


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 30 Watts

150.8125 MHz

Channel Spacing 12.5kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
301.6250	-20	*	*
452.4375	-20	*	*
603.2500	-20	*	*
754.0625	-20	*	*
904.8750	-20	*	*
1055.6875	-20	*	*
1206.5000	-20	*	*
1357.3125	-20	*	*
1508.1250	-20	*	*

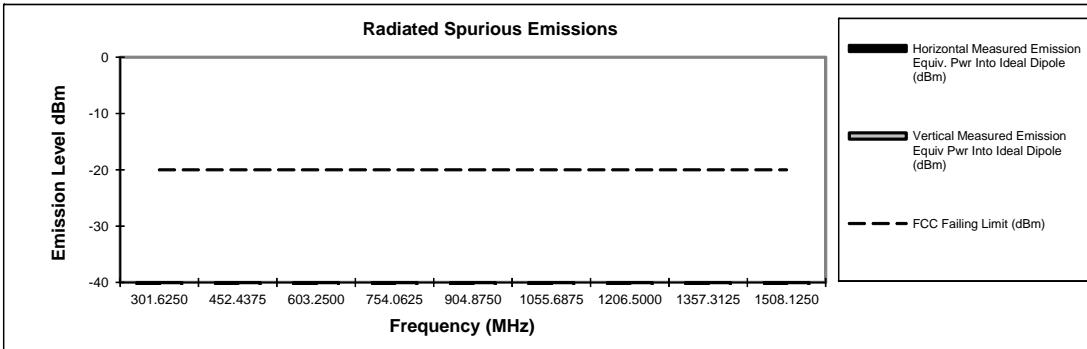

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Alberto Cordero

December 5, 2012

FCC Registration: 91932 / Industry Canada: IC109U-1

EXHIBIT 6G-1, 2

MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3090

IC: 109AB-99FT3090

Motorola Solutions

FCC ID: ABZ99FT3090 | IC ID: 109AB-99FT3090


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 30 Watts

162.4125 MHz

Channel Spacing 12.5kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
324.8250	-20	*	*
487.2375	-20	*	*
649.6500	-20	*	*
812.0625	-20	*	*
974.4750	-20	*	*
1136.8875	-20	*	*
1299.3000	-20	*	*
1461.7125	-20	*	*
1624.1250	-20	*	*

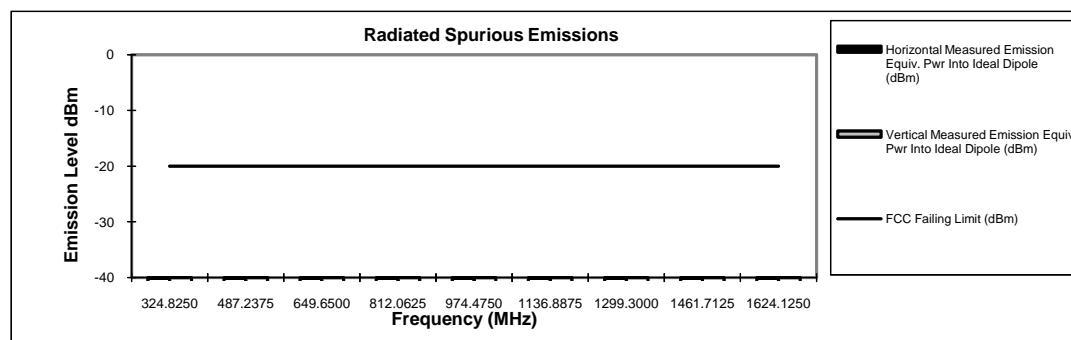


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 30 Watts

173.9875 MHz

Channel Spacing 12.5kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
347.9750	-20	*	*
521.9625	-20	*	*
695.9500	-20	*	*
869.9375	-20	*	*
1043.9250	-20	*	*
1217.9125	-20	*	*
1391.9000	-20	*	*
1565.8875	-20	*	*
1739.8750	-20	*	*

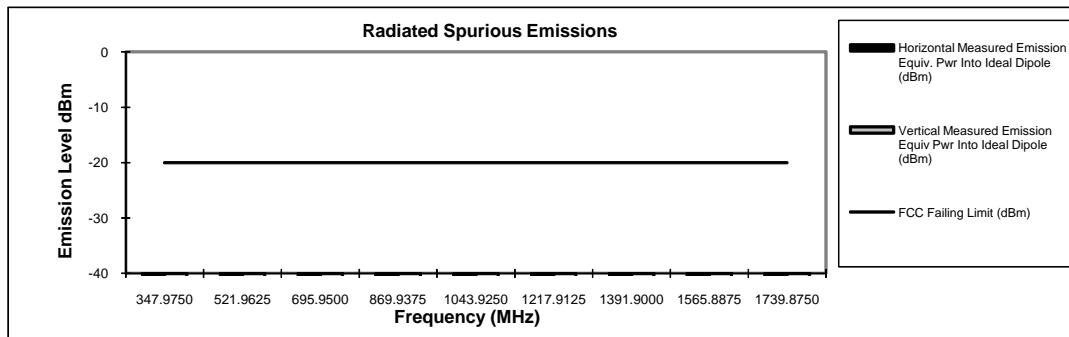

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Alberto Cordero

December 5, 2012

FCC Registration: 91932 / Industry Canada: IC109U-1

EXHIBIT 6G-3, 4

Motorola Solutions

FCC ID:ABZ99FT3090 \ IC ID:109AB-99FT3090


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 1 Watts

136.0125 MHz

Channel Spacing 12.5kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
272.0250	-20	*	*
408.0375	-20	*	*
544.0500	-20	*	*
680.0625	-20	*	*
816.0750	-20	*	*
952.0875	-20	*	*
1088.1000	-20	*	*
1224.1125	-20	*	*
1360.1250	-20	*	*

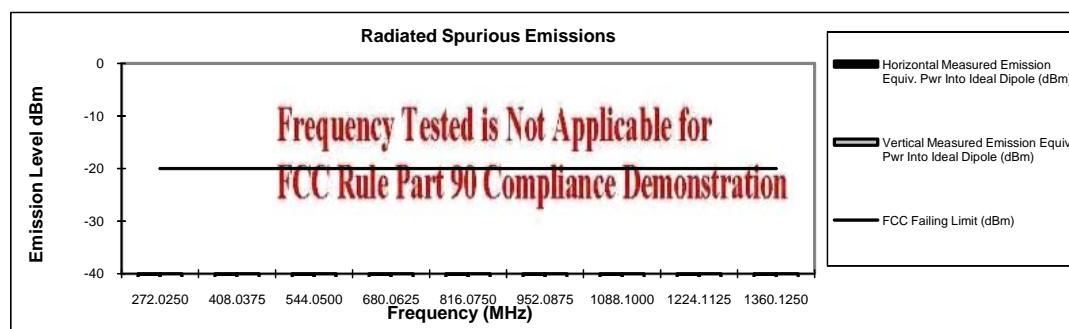


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 1 Watts

150.8125 MHz

Channel Spacing 12.5kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
301.6250	-20	*	*
452.4375	-20	*	*
603.2500	-20	*	*
754.0625	-20	*	*
904.8750	-20	*	*
1055.6875	-20	*	*
1206.5000	-20	*	*
1357.3125	-20	*	*
1508.1250	-20	*	*

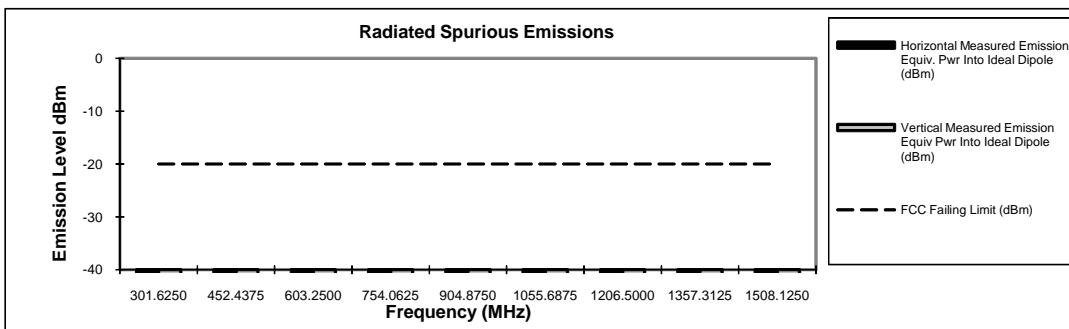

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Alberto Cordero
 FCC Registration: 91932 / Industry Canada: IC109U-1

December 5, 2012

EXHIBIT 6G-5, 6

MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3090

IC: 109AB-99FT3090

Motorola Solutions

FCC ID:ABZ99FT3090 \ IC ID:109AB-99FT3090


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 1 Watts

162.4125 MHz

Channel Spacing 12.5kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
324.8250	-20	*	*
487.2375	-20	*	*
649.6500	-20	*	*
812.0625	-20	*	*
974.4750	-20	*	*
1136.8875	-20	*	*
1299.3000	-20	*	*
1461.7125	-20	*	*
1624.1250	-20	*	*

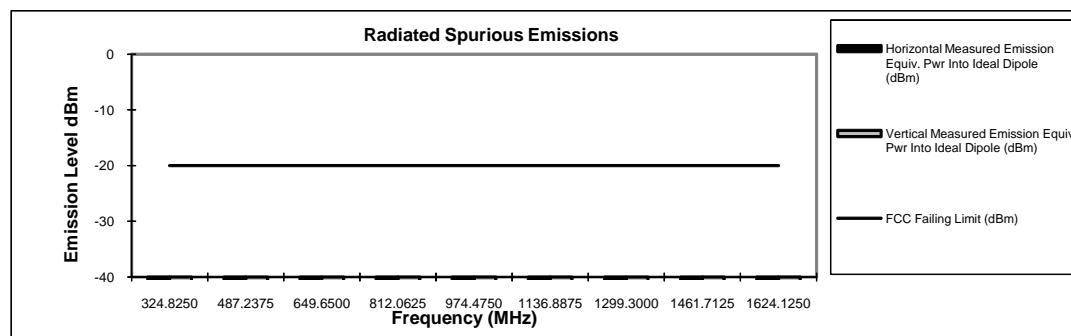


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 1 Watts

173.9875 MHz

Channel Spacing 12.5kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
347.9750	-20	*	*
521.9625	-20	*	*
695.9500	-20	*	*
869.9375	-20	*	*
1043.9250	-20	*	*
1217.9125	-20	*	*
1391.9000	-20	*	*
1565.8875	-20	*	*
1739.8750	-20	*	*

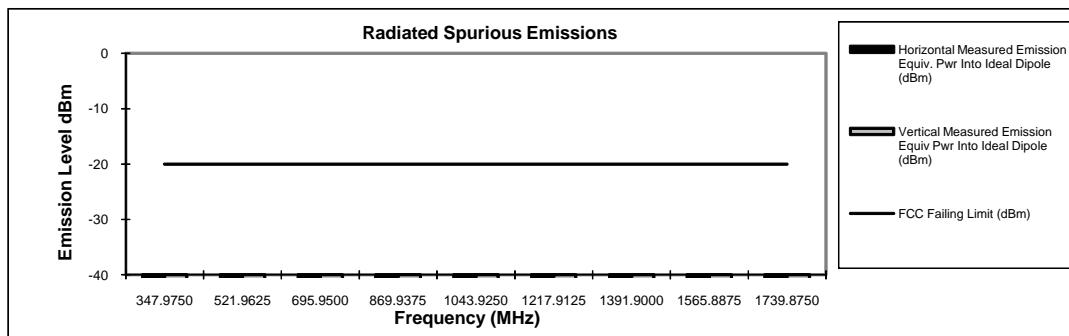

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Alberto Cordero

December 5, 2012

FCC Registration: 91932 / Industry Canada: IC109U-1

EXHIBIT 6G-7, 8

MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3090

IC: 109AB-99FT3090

Motorola Solutions

FCC ID:ABZ99FT3090 \ IC ID:109AB-99FT3090


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 30 Watts

136.0125 MHz

Channel Spacing 25kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
272.0250	-13	*	*
408.0375	-13	*	*
544.0500	-13	*	*
680.0625	-13	*	*
816.0750	-13	*	*
952.0875	-13	*	*
1088.1000	-13	*	*
1224.1125	-13	*	*
1360.1250	-13	*	*

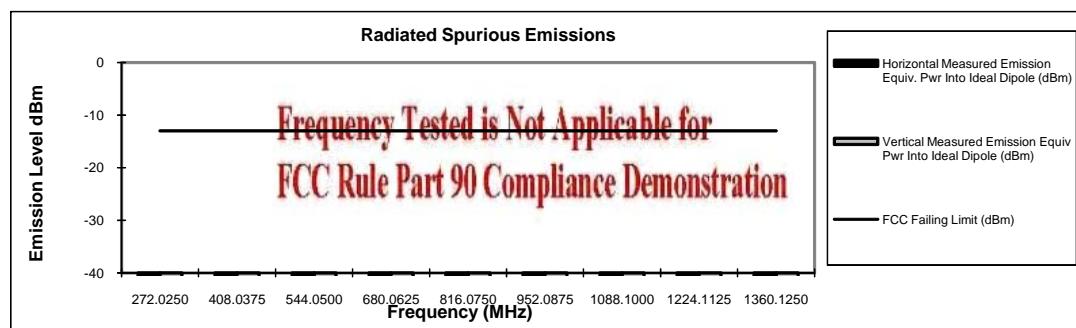


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 30 Watts

150.8125 MHz

Channel Spacing 25kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
301.6250	-13	*	*
452.4375	-13	*	*
603.2500	-13	*	*
754.0625	-13	*	*
904.8750	-13	*	*
1055.6875	-13	*	*
1206.5000	-13	*	*
1357.3125	-13	*	*
1508.1250	-13	*	*

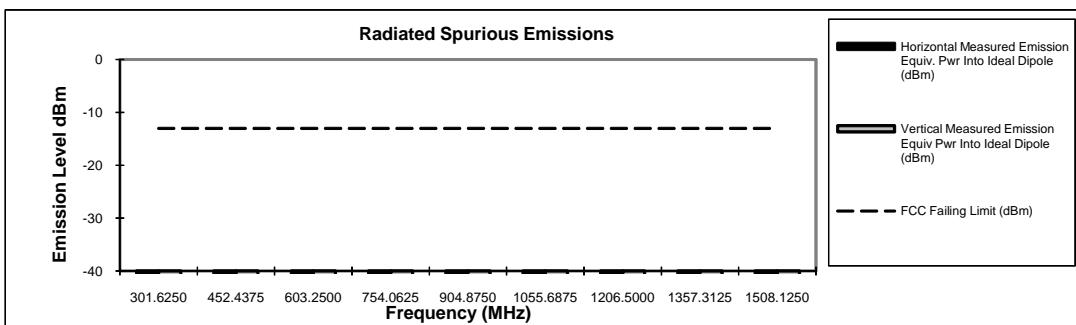

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Alberto Cordero

December 5, 2012

FCC Registration: 91932 / Industry Canada: IC109U-1

EXHIBIT 6G-9, 10 (Not for FCC Review)

MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3090

IC: 109AB-99FT3090

Motorola Solutions

FCC ID:ABZ99FT3090 \ IC ID:109AB-99FT3090


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 30 Watts

162.4125 MHz

Channel Spacing 25kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
324.8250	-13	*	*
487.2375	-13	*	*
649.6500	-13	*	*
812.0625	-13	*	*
974.4750	-13	*	*
1136.8875	-13	*	*
1299.3000	-13	*	*
1461.7125	-13	*	*
1624.1250	-13	*	*

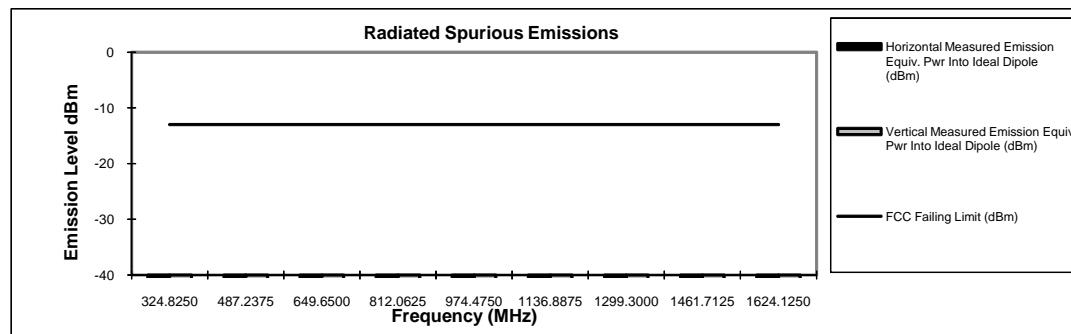


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 30 Watts

173.9875 MHz

Channel Spacing 25kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
347.9750	-13	*	*
521.9625	-13	*	*
695.9500	-13	*	*
869.9375	-13	*	*
1043.9250	-13	*	*
1217.9125	-13	*	*
1391.9000	-13	*	*
1565.8875	-13	*	*
1739.8750	-13	*	*

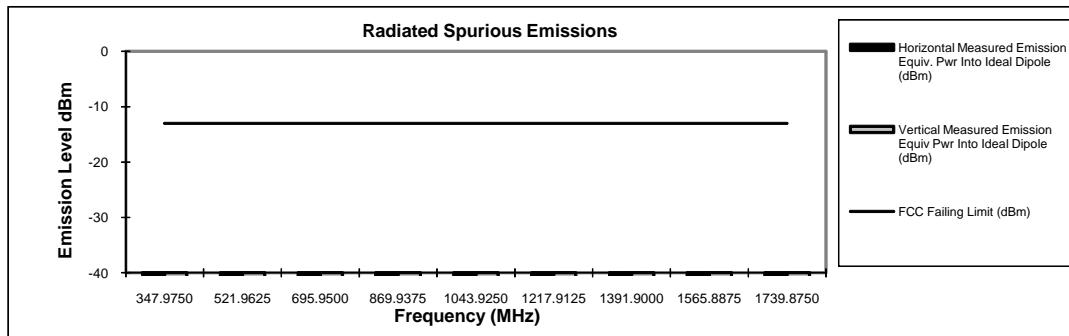

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Alberto Cordero

December 5, 2012

FCC Registration: 91932 / Industry Canada: IC109U-1

EXHIBIT 6G-11, 12 (Not for FCC Review)

MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3090

IC: 109AB-99FT3090

Motorola Solutions

FCC ID:ABZ99FT3090 \ IC ID:109AB-99FT3090


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 1 Watts

136.0125 MHz

Channel Spacing 25kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
272.0250	-13	*	*
408.0375	-13	*	*
544.0500	-13	*	*
680.0625	-13	*	*
816.0750	-13	*	*
952.0875	-13	*	*
1088.1000	-13	*	*
1224.1125	-13	*	*
1360.1250	-13	*	*

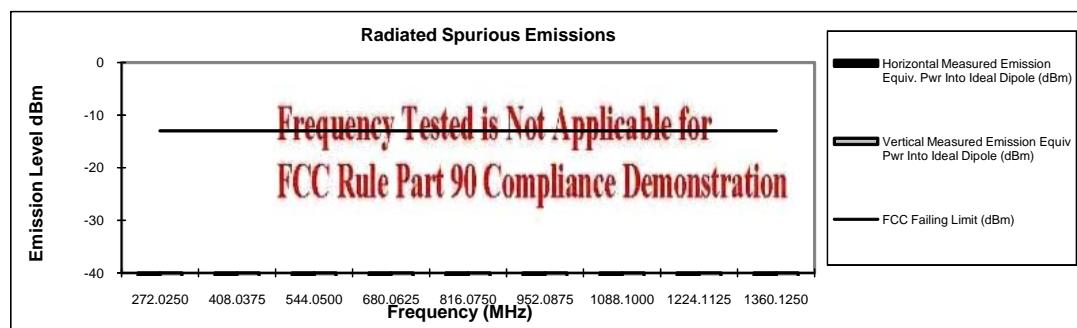


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 1 Watts

150.8125 MHz

Channel Spacing 25kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
301.6250	-13	*	*
452.4375	-13	*	*
603.2500	-13	*	*
754.0625	-13	*	*
904.8750	-13	*	*
1055.6875	-13	*	*
1206.5000	-13	*	*
1357.3125	-13	*	*
1508.1250	-13	*	*

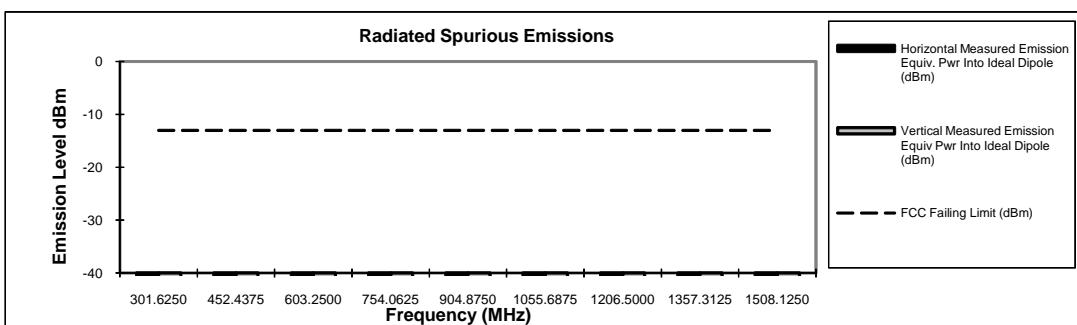

* Indicates the spurious emission could not be detected due to noise limitations or ambients.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Alberto Cordero
FCC Registration: 91932 / Industry Canada: IC109U-1

December 5, 2012

EXHIBIT 6G-13, 14 (Not for FCC Review)

MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT3090

IC: 109AB-99FT3090

Motorola Solutions

FCC ID:ABZ99FT3090 \ IC ID:109AB-99FT3090


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 1 Watts

162.4125 MHz

Channel Spacing 25kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
324.8250	-13	*	*
487.2375	-13	*	*
649.6500	-13	*	*
812.0625	-13	*	*
974.4750	-13	*	*
1136.8875	-13	*	*
1299.3000	-13	*	*
1461.7125	-13	*	*
1624.1250	-13	*	*

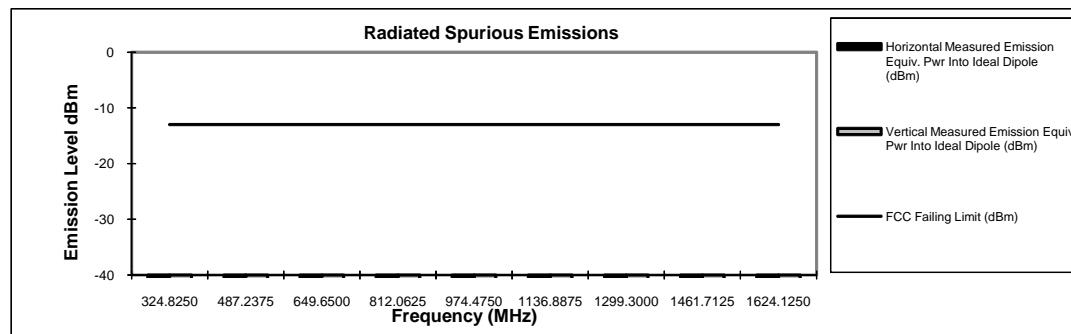


Transmit Radiated Spurious Emissions: PMUD3241AABNAA

Tx Power: 1 Watts

173.9875 MHz

Channel Spacing 25kHz | S/N 776TNV0316

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
347.9750	-13	*	*
521.9625	-13	*	*
695.9500	-13	*	*
869.9375	-13	*	*
1043.9250	-13	*	*
1217.9125	-13	*	*
1391.9000	-13	*	*
1565.8875	-13	*	*
1739.8750	-13	*	*

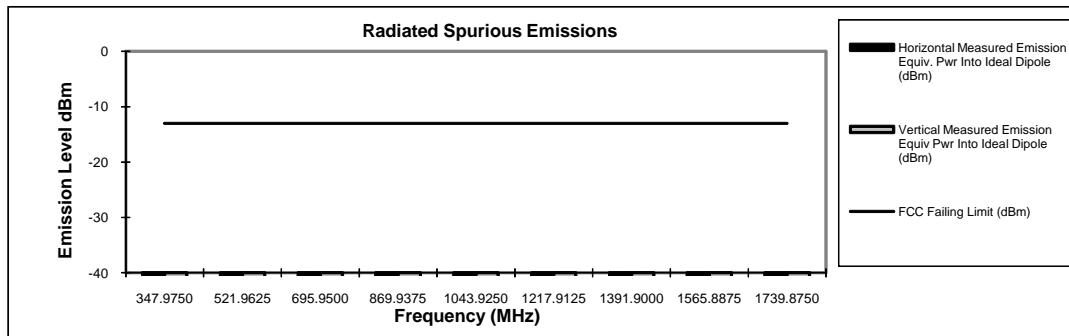

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.


The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Alberto Cordero
FCC Registration: 91932 / Industry Canada: IC109U-1


December 5, 2012

EXHIBIT 6G-15, 16 (Not for FCC Review)

FREQUENCY STABILITY VS. TEMPERATURE
SPECIFIED LIMITS: ± 0.5 PPM (-30 TO +60 DEGREES C)

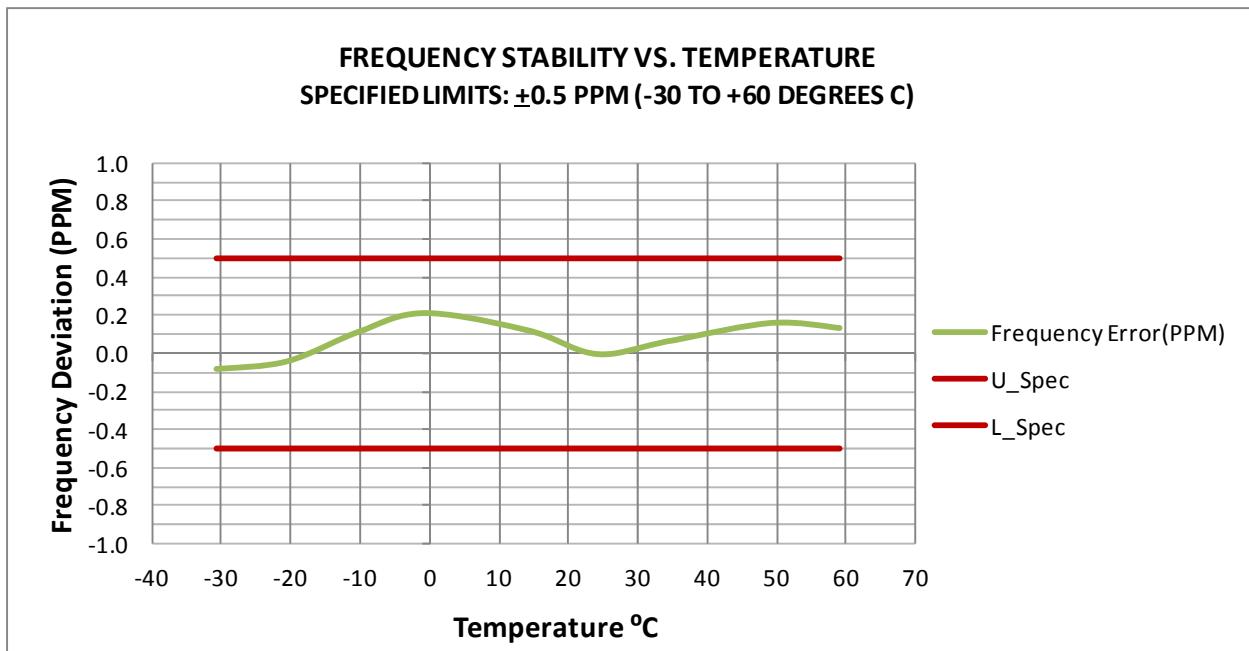


FREQUENCY STABILITY VS. SUPPLY VOLTAGE

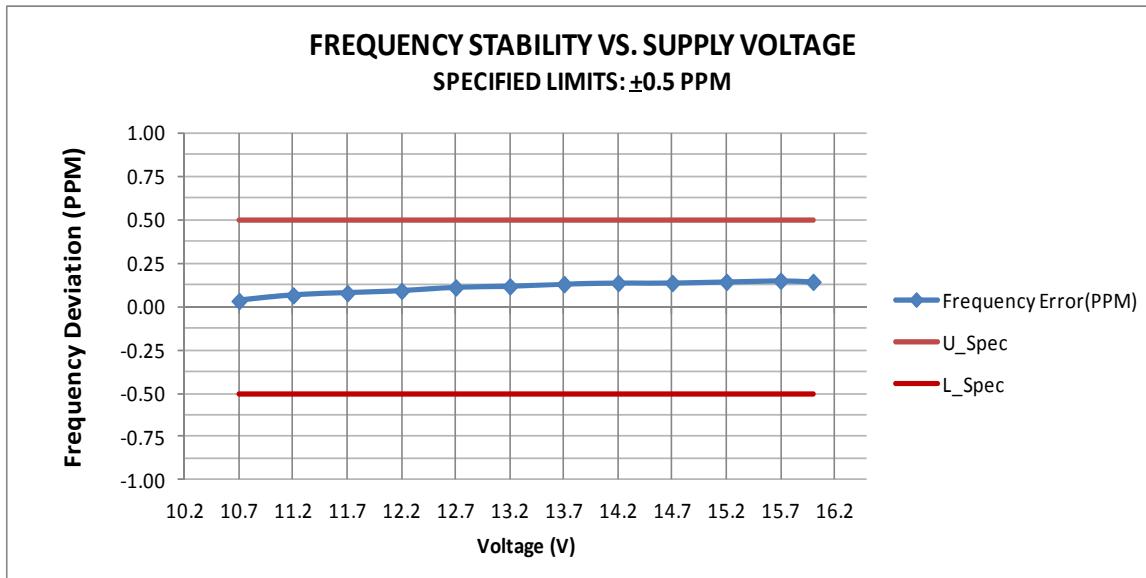


RADIO LOW-VOLTAGE RESET OCCURS AT 5.5 VOLTS DC.


TRANSIENT FREQUENCY BEHAVIOR
High Power (30W) Key-up Attack Time, 155 MHz, 12.5 kHz channel spacing

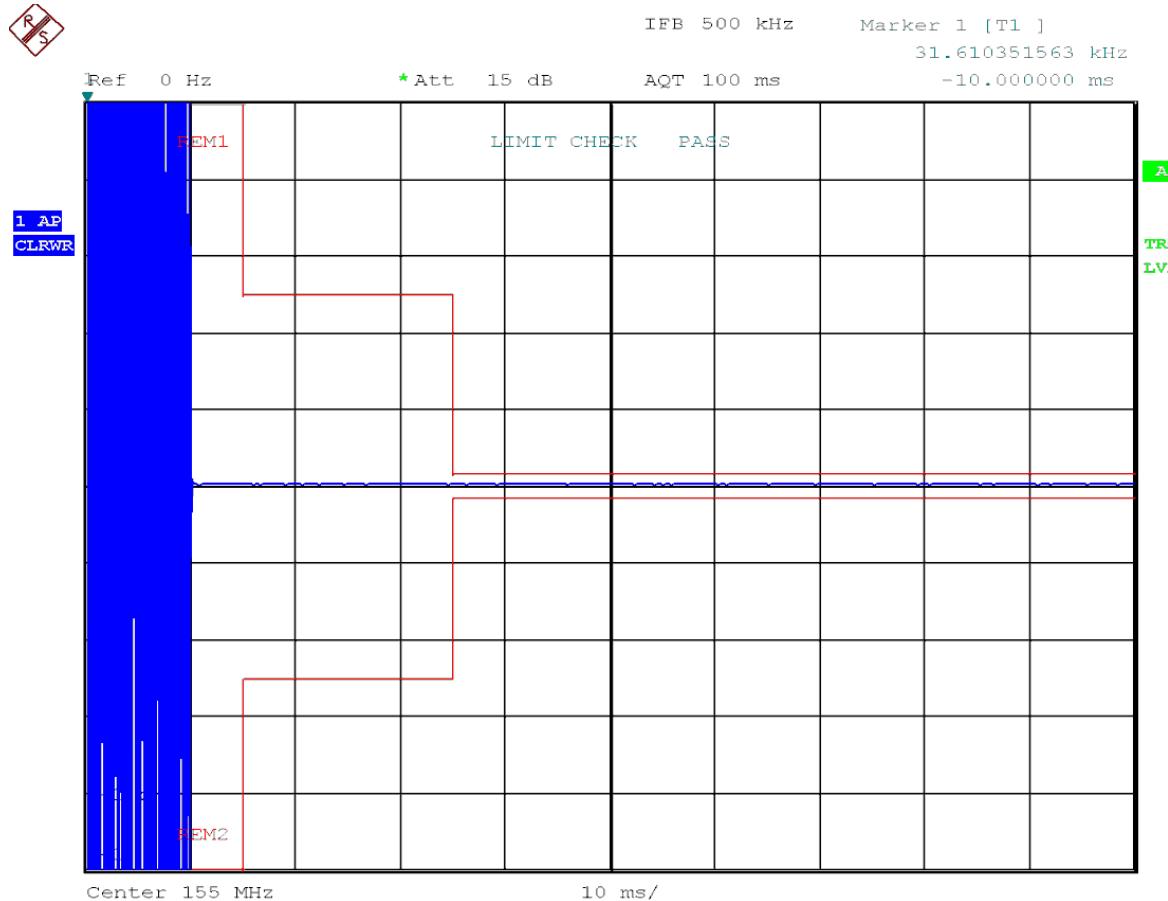


TRANSIENT FREQUENCY BEHAVIOR
High Power (30W) De-Key Decay Time, 155 MHz, 12.5 kHz channel spacing

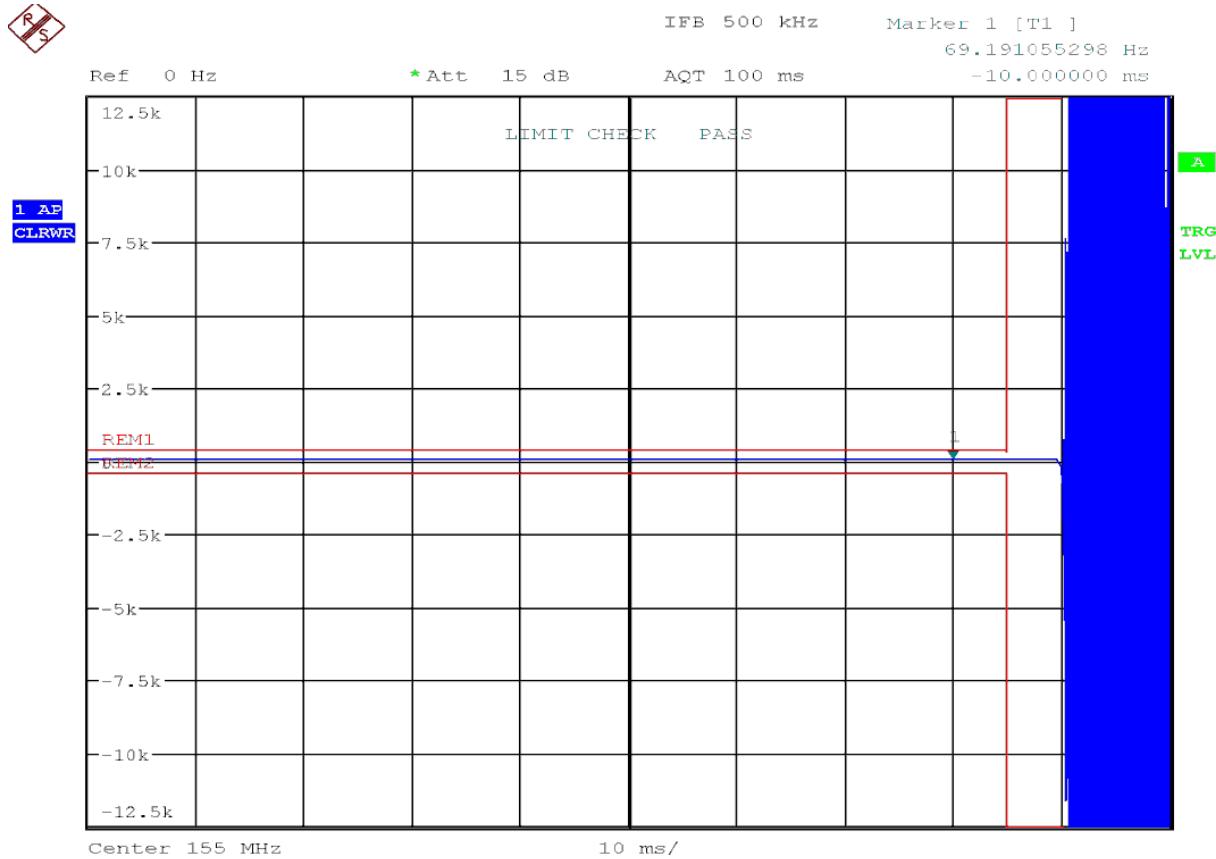


TRANSIENT FREQUENCY BEHAVIOR
Low Power (1W) Key-up Attack Time, 155 MHz, 12.5 kHz channel spacing

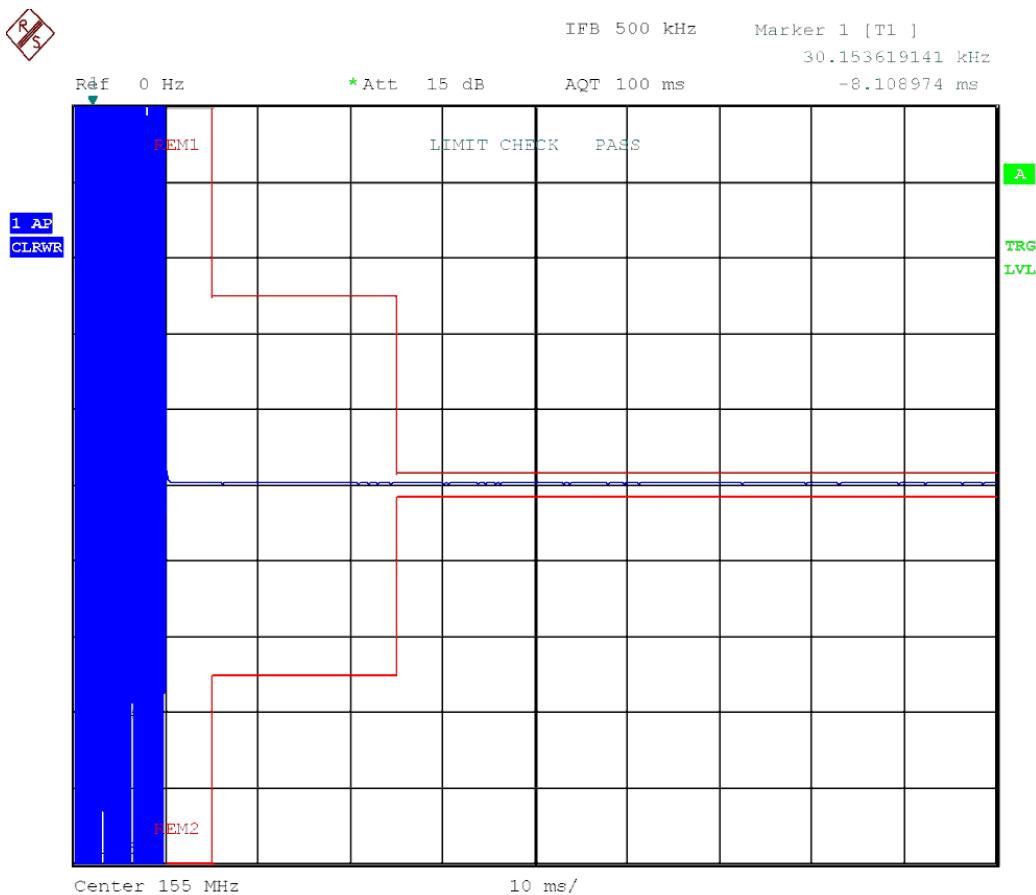


TRANSIENT FREQUENCY BEHAVIOR
Low Power (1W) De-Key Decay Time, 155 MHz, 12.5 kHz channel spacing

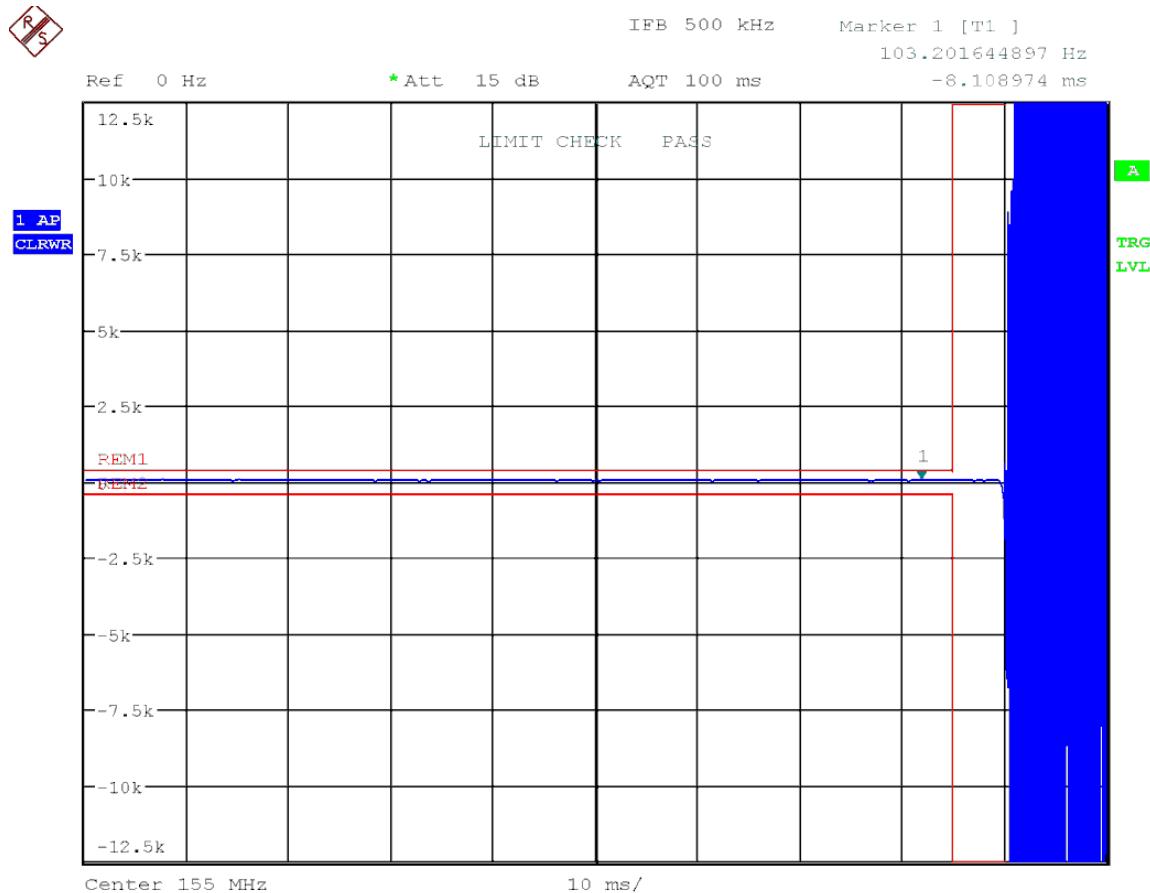


TRANSIENT FREQUENCY BEHAVIOR
High Power (30W) Key-up Attack Time, 155 MHz, 25 kHz channel spacing
(Not for FCC Review)

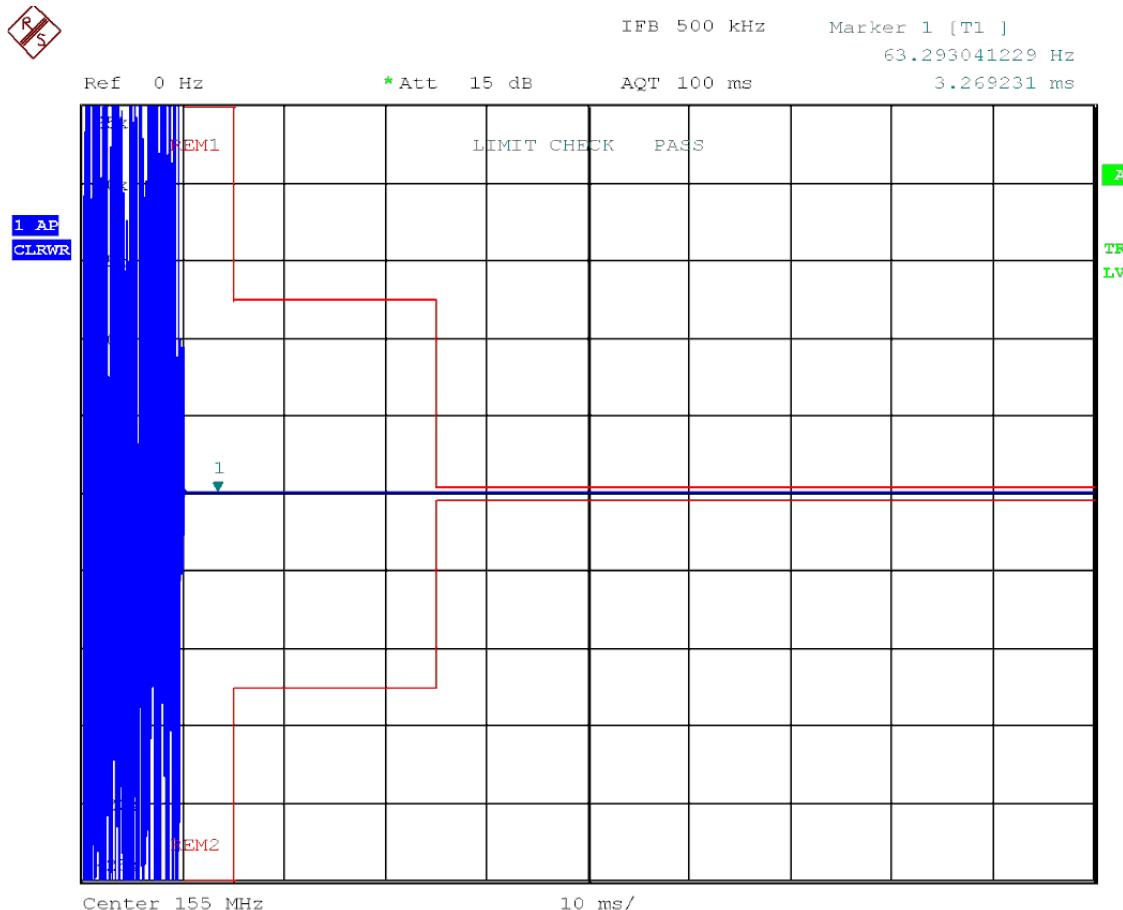

TRANSIENT FREQUENCY BEHAVIOR
High Power (30W) De-Key Decay Time, 155 MHz, 25 kHz channel spacing
(Not for FCC Review)

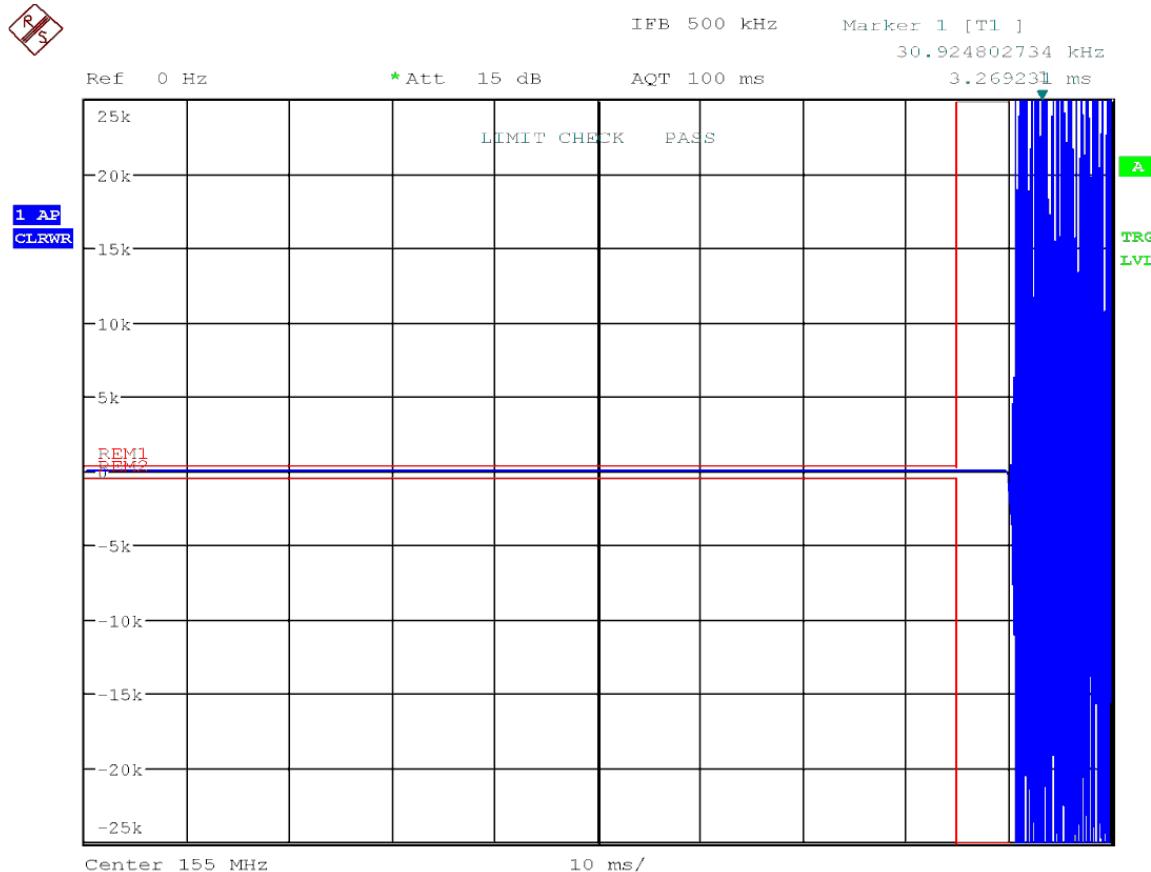

TRANSIENT FREQUENCY BEHAVIOR
Low Power (1W) Key-up Attack Time, 155 MHz, 25 kHz channel spacing
(Not for FCC Review)

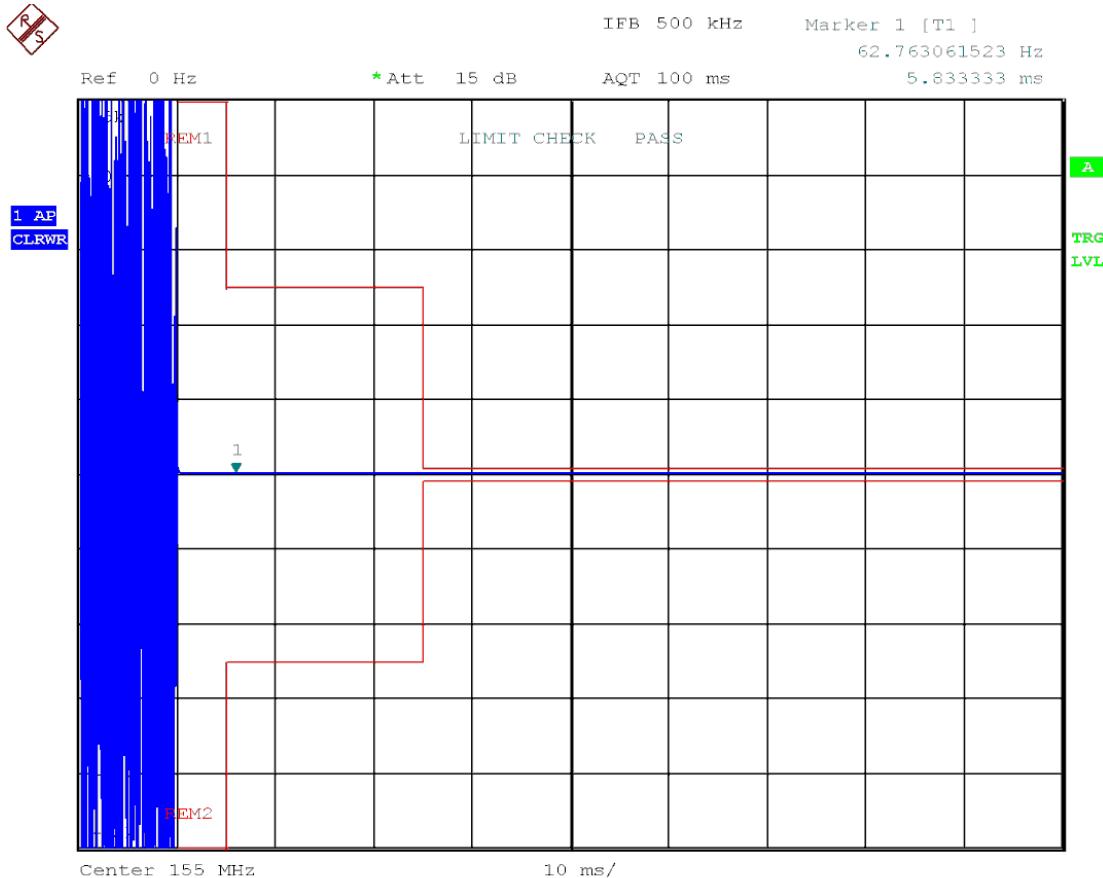

TRANSIENT FREQUENCY BEHAVIOR
Low Power (1W) De-Key Decay Time, 155 MHz, 25 kHz channel spacing
(Not for FCC Review)

