



MOTOROLA



CGISS EME Test Laboratory

8000 West Sunrise Blvd
Fort Lauderdale, FL. 33322

S.A.R. EME Compliance Test Report
Part 1 of 2

Attention: FCC
Date of Report: August 8, 2003
Report Revision: Rev. A
Manufacturer: Motorola
Product Description: Portable 403-440 MHz 1-4W
16 Channel
FCC ID: ABZ99FT4057
Device Model: AAH50QDC9AA2AN

Test Period: 5/16/03-7/29/03

EME Tech: Ed Church

EME Engineer: Deanna Zakharia
Elect. Principle Staff Engineer

Author: Michael Sailsman
Global EME Regulatory Affairs Liaison
and
Deanna Zakharia
Elect. Principle Staff Engineer

Note: Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 2.0 of this report.

Signature on file

8/8/2003

Ken Enger
Senior Resource Manager, Laboratory Director, CGISS EME Lab

Date Approved

Note: This report shall not be reproduced without written approval from an officially designated representative of the Motorola EME Laboratory.

TABLE OF CONTENTS

Part 1 of 2

- 1.0 Introduction
- 2.0 Reference Standards and Guidelines
- 3.0 Description of Test Sample
 - 3.1 Test Signal
 - 3.2 Test Output Power
- 4.0 Description of Test Equipment
 - 4.1 Description of S.A.R Measurement System
 - 4.2 Description of Phantom
 - 4.2.1 Flat Phantom
 - 4.2.2 SAM phantom
 - 4.3 Simulated Tissue Properties
 - 4.3.1 Type of Simulated Tissue
 - 4.3.2 Simulated Tissue Composition
 - 4.4 Test condition
- 5.0 Description of Test Procedure
 - 5.1 Device Test Positions
 - 5.1.1 Abdomen
 - 5.1.2 Head
 - 5.1.3 Face
 - 5.2 Test Position Photographs
 - 5.3 Probe Scan Procedures
- 6.0 Measurement Uncertainty
- 7.0 S.A.R. Test Results
 - 7.1 S.A.R. results
 - 7.2 Peak S.A.R. location
 - 7.3 Highest S.A.R. results calculation methodology
- 8.0 Conclusion

Part 2 of 2

- Appendix A: Power Slump Data/Shortened scan
- Appendix B: Data Results
- Appendix C: Dipole System Performance Check Results
- Appendix D: Calibration Certificates
- Appendix E: Illustration of Body-worn Accessories
- Appendix F: Accessories and options test status and separation distances

REVISION HISTORY

Date	Revision	Comments
7/22/03	O	Initial release Prototype results
8/8/03	A	Expanded frequency range from 403-438 MHz to 403-440 MHz; replaced the optional antenna with a new one; updated data and scans to reflect the changes.

1.0 Introduction

This report details the utilization, test setup, test equipment, and updated test results of the Specific Absorption Rate (S.A.R.) measurements performed at the CGISS EME Test Lab for model number AAH50QDC9AA2AN, FCC ID: ABZ99FT4057.

The applicable exposure environment is Occupational/Controlled.

The test results included herein represent the highest S.A.R. levels applicable to this product and clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limit of 8.0 mW/g per the requirements of 47 CFR 2.1093(d).

2.0 Reference Standards and Guidelines

This product is designed to comply with the following national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; 47CFR part 2 sub-part J
- American National Standards Institute (ANSI) / Institute of Electrical and Electronic Engineers (IEEE) C95.1-1992
- Institute of Electrical and Electronic Engineers (IEEE) C95.1-1999 Edition
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6. Limits of Human Exposure to Terminal frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz, 1999
- Australian Communications Authority Terminal communications (Electromagnetic Radiation - Human Exposure) Standard 2003
- ANATEL, Brazil Regulatory Authority, Resolution 256 (April 11, 2001) "additional requirements for SMR, cellular and PCS product certification."

3.0 Description of Test Sample



The portable handheld transceiver, FCC ID: ABZ99FT4057, operates using frequency modulation (FM) and incorporates traditional simplex two-way radio transmission protocol. The intended operating positions are “at the face” with the microphone 1 to 2 inches from the mouth, and “at the abdomen” by means of the offered body-worn accessories. Audio and PTT operation while the radio is at the abdomen is accomplished by means of optional remote accessories that connect to the radio. This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies, who can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means. Motorola also makes available to its customers training classes on the proper use of two-way radios and wireless data devices.

FCC ID: ABZ99FT4057 is capable of operating in the 403-440 MHz band. The rated power is 1-4 watts with a maximum output capability of 4.6 watts as defined by the upper limit of the production line final test station.

FCC ID: ABZ99FT4057 is offered with the following options and accessories:

Antenna

NAE6483AR	Whip 403-520 MHz 1/4 wave; -0.0 dBi
NAE6522AR	Heliflex 438-470 MHz 1/4 wave; -2.0 dBi

Batteries

NNTN4497AR	Lithium Ion Battery 1800 mAh
NNTN4496AR	NiCd Battery 1100 mAh

Body-worn Accessories

HLN6602A	Universal Chest Pack
1505596Z02	Replacement Strap for HLN6602 Universal Chest Pack
RLN4570A	Break-A-Way Chest Pack
RLN4815A	Universal Radio Pak
4280384F89	Replacement Belt Lengthener for RLN4815
HLN9985B	Waterproof Bag
NTN5243A	Shoulder Carry Strap, attaches to D-Shaped Rings on Carry Case
HLN8255B	3 inch Spring Action Belt Clip
HLN9701B	Nylon Carry Case with Belt Loop and D-Shaped Rings
RLN5383A	Leather Carry Case with Belt Loop and D-Shaped Rings
RLN5384A	Leather Carry Case with High Activity 2.5" Swivel Belt Loop
RLN5385A	Leather Carry Case with High Activity 3" Swivel Belt Loop

Audio attachments

HMN9030A	Remote Speaker Microphone
PMMN4008A	Remote Speaker Microphone (Mag One)
PMLN4442A	Earbud w/ Microphone & PTT combined w/ VOX (Mag One)
PMLN4443A	Flexible Ear Receiver w/ Microphone & PTT combined (Mag One)
PMLN4444A	Earset w/ Flexible Boom Microphone (Mag One)
PMLN4445A	Ultra Lightweight headset w/ Boom Microphone (Mag One)
PMLN4294C	Earbud w/ Microphone & PTT combined (Mag One)
PMLN4425A	Ultra-Lite Earset w/ Mic and Remote Ring PTT
BDN6646C	Standard 95dB Ear Microphone w/ PTT Interface Module
BDN6706B	Standard 95dB Ear Microphone w/ VOX and PTT Interface Module
0180358B38	Ring PTT Switch for Ear Mic System
0180300E83	Body PTT switch for Ear Mic System (works w/ BDN6646C, BDN6706B)
HMN9727B	Earpiece without Volume Control - 1 Wire (Beige)
RLN4894A	Earpiece without Volume Control – 1 wire (Black)
HMN9752B	Earpiece with Volume Control - 1 Wire (Beige)
HMN9754D	Earpiece with Microphone & PTT Combined - 2 Wire (Beige)
RLN4895A	Earpiece with Microphone & PTT Combined – 2 Wire (Black)
HMN9036A	Earbud with Microphone & PTT Combined

HLN9132A	Earbud Single Wire Receive Only
RLN5198AP	2 Wire Surveillance Kit w/ Clear Comfortable Acoustic Tube Included (includes HMN9754D and NTN8371A)
BDN6720A	Flexible Ear Receiver
PMMN4001A	Ultra-Lite Earset with Mic and PTT
HMN9013A	Lightweight Headset
RMN4016A	Lightweight Headset with In-Line PTT
RLN5238A	Lightweight Headset with In-Line PTT, NFL style
HMN9021A	Medium Weight Over-The-Head Dual Muff Headset
HMN9022A	Medium Weight Behind-The-Head Dual Muff Headset
BDN6647F	Medium Weight Single Speaker Headset
BDN6648C	Heavy Duty, Dual Muff Headset with Noise Canceling Mic
RMN5015A	Heavy Duty, Dual Muff, Racing Headset (requires RKN4090A Headset Adapter Cable)
RMN4051B	2-way Hard Hat Mount, Black, Noise Reduction Rating = 22dB(Requires RKN4094A adapter cable)
RKN4094A	In-Line PTT adapter (Use w/ RMN4051B, RMN4052A, RMN4053A)
RMN4052A	Tactical Headband Style Headset, Gray, Noise Reduction Rating = 24dB (Requires RKN4094A Adapter Cable)
RMN4053A	Tactical Hard Hat Mount Headset, Gray, Noise Reduction Rating = 22dB (Requires RKN4094A Adapter Cable)
RMN4054B	Receive-Only Hard Hat Mount Headset with 3.5mm right angle plug
RMN4055A	Receive only Headband Style Headset w/ 3.5mm right angle plug
HLN9133A	VOX adapter kit (for use w/ PMLN4442A, PMLN4443A, PMLN4444A, PMLN4445A, BDN6706B, HMN9013A, HMN9021A, HMN9022A, BDN6647A, BDN6648C)
RKN4090A	In-Line PTT Adapter (Use with RMN5015A)
RLN5411A	Ultra-Lite Breeze Behind the Head Headset
TDN9327A	Portable Radio Hanger (Metal hanger for vehicular doors. Not body worn)
TDN9373A	Portable Radio Hanger (Metal hanger for vehicular doors. Not body worn)

3.1 Test Signal

Test Signal mode:



Transmission Mode:

CW	<input checked="" type="checkbox"/>
Native Transmission	<input type="checkbox"/>
TDM:	<input type="checkbox"/>
Other	<input type="checkbox"/>

3.2 Test Output Power

Output power was measured before each test. The DASY3™ system's S.A.R. drift function was used to determine the power slump characteristic of the device. A characteristic power slump table based on 50 ohms measurements is provided in APPENDIX A for the batteries producing the highest S.A.R. results.

4.0 Description of Test Equipment

4.1 Descriptions of S.A.R. Measurement System

The laboratory utilizes a Dosimetric Assessment System (DASY3™) S.A.R. measurement system manufactured by Schmid & Partner Engineering AG (SPEAG™), of Zurich Switzerland. The test system consists of a Stäubli RX90L robot with an ET3DV6 E-Field probe. Please reference the SPEAG user manual and application notes for detailed probe, robot, and S.A.R. computational procedures.

The S.A.R. measurements were conducted with probe model/serial number ET3DV6/SN1393. The system performance check was conducted daily and within 24 hours prior to testing. DASY output files of the system performance test results and the probe/dipole calibration certificates are included in appendices C and D respectively. The table below summarizes the system performance check results normalized to 1W.

Probe Serial #	Tissue Type	Probe Cal Date	Dipole Kit / Serial #	System Perf. Result when normalized to 1W (mW/g)	Reference S.A.R @ 1W (mW/g)	Test Date(s)
1393	IEEE Head	4/16/03	SPEAG D450V2 MHz /1002	4.66 +/- 0.05	4.70 +/- 10%	5/16/03 & 7/15/03 & 7/29/03
1393	FCC Body	4/16/03	SPEAG D450V2 MHz /1002	4.63 +/- 0.18	4.52 +/- 10%	5/17/03-7/15/03 & 7/28/03-7/29/03

The DASY3™ system is operated per the instructions in the DASY3™ Users Manual. The complete manual is available directly from SPEAG™. All measurement equipment used to assess EME S.A.R. compliance was calibrated according to 17025 A2LA guidelines.

4.2 Description of Phantom

4.2.1 Flat Phantom

A rectangular shaped box made of high-density polyethylene (HDPE) with a dielectric constant of 2.26 and a loss tangent of less than 0.00031. The phantom is mounted on a wooden supporting structure that has a loss tangent of < 0.05. Two flat phantoms were used for this assessment. The structures have a 68.58 cm x 20.32 cm and 68.58cm x 25.4 cm opening at its center to allow positioning the DUT to the phantom's surface. The flat phantom dimensions used for S.A.R. performance assessment at the abdomen and face were: length=80cm, Width=60cm, Height=20cm, Surface thickness=0.2cm and length=80cm, Width=30cm, Height=20cm, Surface thickness=0.2cm respectively.

4.2.2 SAM Phantom

SAM Phantom assessment was not applicable for this filing.

4.3 Simulated Tissue Properties

4.3.1 Type of Simulated Tissue

The simulated tissue used is compliant to that specified in FCC Supplement C (Edition 01 - 01) to OET Bulletin 65 (Edition 97 - 01).

Simulated Tissue	Body Position
FCC Body	Abdomen
IEEE Head	Face

4.3.2 Simulated Tissue Composition

Tissue Ingredient (%) @ 450 MHz		
	Head	Body
Sugar	56	46.5
DGBE (Glycol)	-	-
De ionized -Water	39.1	50.53
Salt	3.8	1.87
HEC	1.0	1.0
Bact.	0.1	0.1

Characterization of Simulated tissue materials and ambient conditions:

Simulated tissue prepared for S.A.R. measurements is measured daily and within 24 hours prior to actual S.A.R. testing to verify that the tissue is within 5% of target parameters at the center of the transmit band. This measurement is done using the Agilent (HP) probe kit model 85070C and a HP8753D Network Analyzer.

Target tissue parameters

FCC Body				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target S/m	Conductivity Meas. (Range) S/m
450	56.70	55.4-56.8	0.94	0.91-0.97
415/420	57.1/57.00	57.3-57.5/ 55.9-57.0	0.94	0.91-0.94/ 0.90-0.92

IEEE Head				
Frequency (MHz)	Di-electric Constant Target	Di-electric Constant Meas. (Range)	Conductivity Target S/m	Conductivity Meas. S/m
450	43.5	44.6-45.4	0.87	0.88-0.91
415/420	43.9/43.9	46.0-46.0/ 45.2-45.3	0.87/0.87	0.87-0.87/ 0.85-0.85

Note: Tissue parameters were assessed at 415 and 420MHz during the period of 5/16/03-5/19/03. 2% tolerance is allowed per the IEEE P1528 standard.

4.4 Test conditions

The EME Laboratory ambient environment is well controlled resulting in very stable simulated tissue temperature and therefore stable dielectric properties. Simulated tissue temperature is measured prior to each scan to insure it is within +/- 2°C of the temperature at which the dielectric properties were determined. Additional precautions are routinely taken to ensure the stability of the simulated tissue such as covering the phantoms when scans are not actively in process in order to minimize evaporation. The lab environment is continuously monitored. The table below presents the range and average environmental conditions during the S.A.R. tests reported herein:

Ambient Temperature	Target	Measured
	20 - 25 °C	Range: 20.4-24.7°C Avg. 22.6°C
Relative Humidity	30 - 70 %	Range: 40.4-65.5% Avg. 50.7%
Tissue Temperature	NA	Range: 20.5-21.9°C Avg. 21.0°C

The EME Lab RF environment uses a Spectrum Analyzer to monitor for extraneous large signal RF contaminants that could possibly affect the test results. If such unwanted signals are discovered the S.A.R. scans are repeated. However, the lab environment is sufficiently protected such that no S.A.R. impacting interference has been experienced to date.

5.0 Description of Test Procedure

All options and accessories listed in section 3.0 were considered in order to develop the S.A.R. test plan for this product. S.A.R. measurements were performed using a flat phantom to assess performance at the abdomen and face. All assessments were done using the flat phantom containing either FCC body or IEEE head tissue where applicable, and with the DUT in CW mode.

Battery search assessment w/ antenna model NAE6483AR:

To determine the battery that exhibited the highest S.A.R. results at the abdomen, each of the offered batteries were tested using the standard antenna at the center of the DUT's transmit band. The measurements were performed with the body worn accessory that provided the minimum separation distance from the phantom and that offered the best positioning repeatability. The standard remote speaker microphone (RSM) was also included in this assessment.

Carry Case Assessment w/ antenna model NAE6483AR:

The DUT was assessed at the center of the DUT's transmit band, with the applicable carry case accessories against the phantom, with the standard RSM attached, using the worst-case battery from above.

The DUT was assessed at the band edges of the DUT's transmit band, against the flat phantom, using the worst-case configuration from above.

Battery search assessment w/ antenna model NAE6522AR:

The DUT was assessed at the center of the offered optional antenna's transmit band, with the body worn accessory that offered the best positioning repeatability against the flat phantom, with the standard RSM attached, along with each of the offered batteries.

Carry Case Assessment w/ antenna model NAE6522AR:

The DUT was assessed at the center of the offered optional antenna's transmit band, with the applicable carry case accessories against the phantom, with the standard RSM attached, using the worst-case battery from above.

Audio accessory assessment w/ worst-case test configuration from above:

The DUT was assessed using the worst-case configuration from above, against the flat phantom, with each of the offered audio accessories.

2.5cm Assessment at the abdomen:

The DUT was assessed with its front, back, and antenna separated 2.5 cm distance from the flat phantom containing FCC body tissue, using the worst-case case configuration from the audio accessory assessment above.

2.5 cm assessment at the face:

The DUT was assessed at the center of the DUT's transmit band as well as at the center of the optional antenna's transmit band, with the DUT separated 2.5cm from the flat phantom containing IEEE head tissue, using the offered batteries and respective antennas.

The DUT was assessed at the band edges of the DUT's transmission band, with the DUT separated 2.5cm from the flat phantom containing IEEE head tissue, using the worst-case configuration from above.

The DUT was assessed with its front housing separated 2.5 cm distance from the flat phantom containing IEEE head tissue, using the offered audio accessories applicable for use at the face.

Shortened Scan assessment:

The DUT was assessed using a “shortened” cube scan using the worst-case configuration overall from above.

5.1 Device Test Positions

Reference Figure 1 for the device orientation and position which exhibited the highest S.A.R. performance.

5.1.1 Abdomen

The DUT was positioned such that it was centered against the flat phantom with the applicable body-worn accessories or with 2.5cm separation distance from the phantom.

5.1.2 Head

Assessments at the head was not applicable for this filing

5.1.3 Face


The DUT was positioned at the center of the flat phantom with a 2.5cm separation distance from the microphone with and without the applicable audio accessories.

5.2 Test Position Photographs


Figure 1: Highest S.A.R. Test Position

(DUT with Universal Chest Pack model HLN6602A against the flat phantom w/ attached headset model PMLN4444A)


All applicable audio accessories were tested in this position

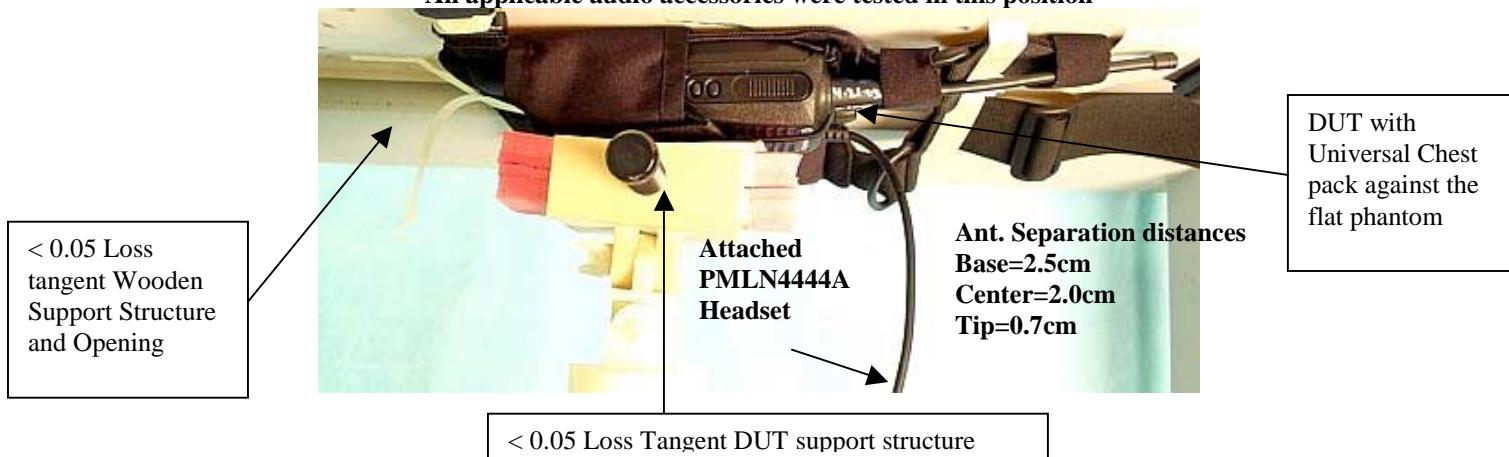


**Figure 2. Assessment @ the Abdomen; DUT w/ body worn accessory model HLN9701B
W/ attached shoulder strap and model NTN5243A and attached HMN9030A RSM**

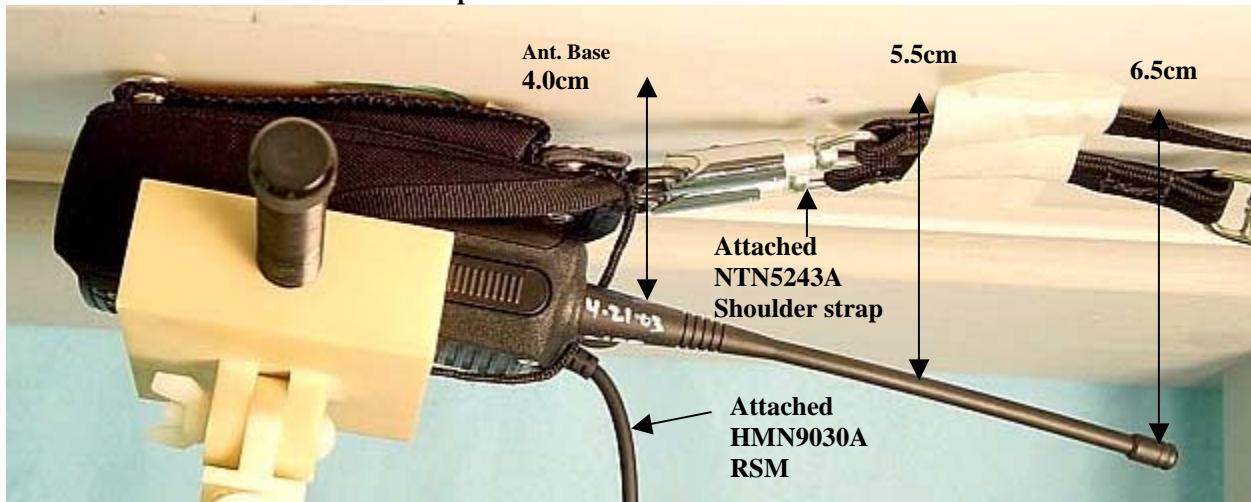

**Figure 3. Assessment @ the Abdomen;
DUT w/ body worn accessory model HLN8255 and attached HMN9030A RSM**

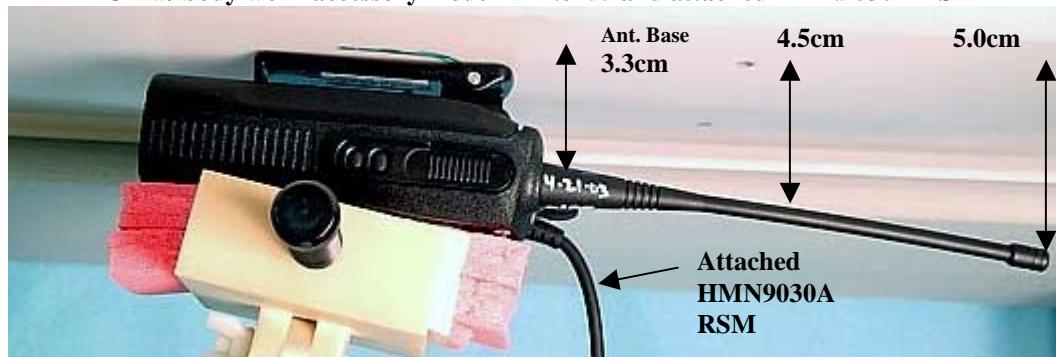

**Figure 4: Assessment @ the Abdomen;
DUT w/ body worn accessory model RLN5383A and attached HMN9030A RSM**

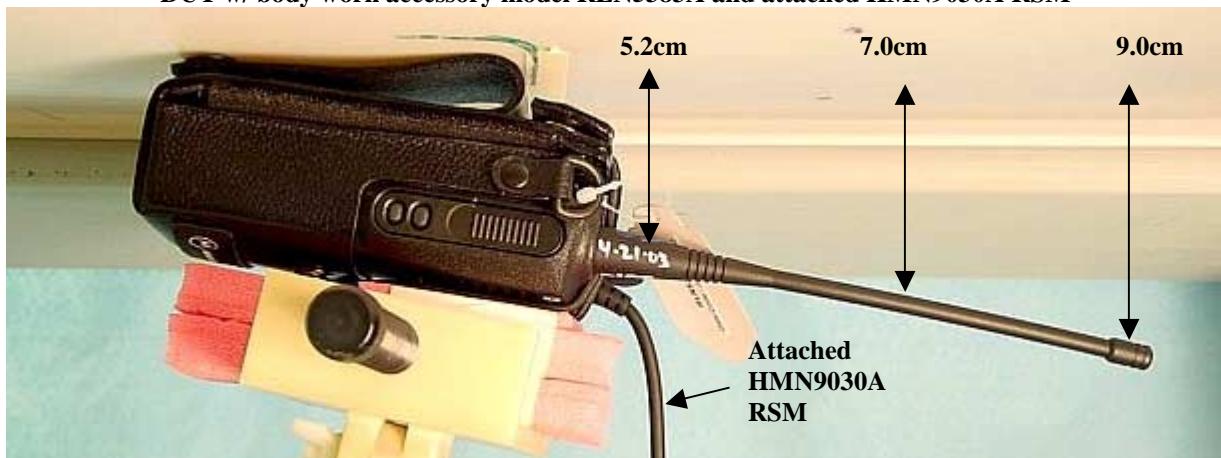

**Figure 5: Assessment @ the Abdomen; DUT w/
Body worn accessory model RLN5385A and attached HMN9030A RSM**




**Figure 6: Assessment @ the Abdomen; DUT front w/ body worn accessory model RLN4815A
and attached HMN9030A RSM**



**Figure 7: Assessment @ the Face; DUT front w/ 2.5cm separation
Audio accessory model HMN9752B (same position used for audio accessory model HMN9727B)**



**Figure 8: Assessment @ the Abdomen; DUT w/ Front 2.5cm separation
w/ attached Audio accessory model HMN9013A headset**

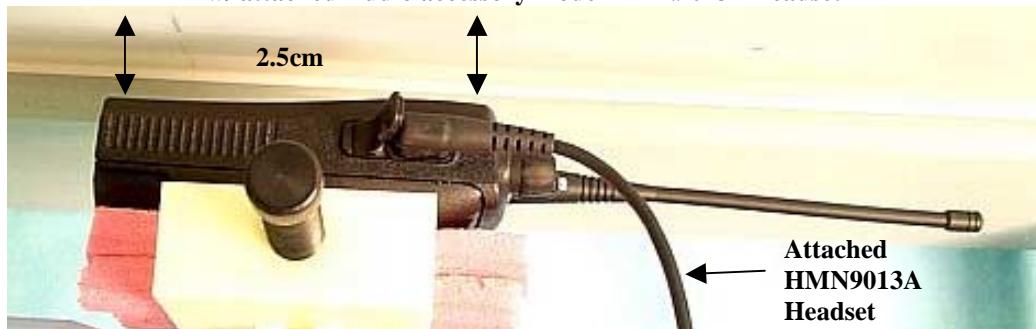

**Figure 9: Assessment @ the Abdomen; DUT w/ back 2.5cm separation
w/ attached Audio accessory model HMN9013A headset**



**Figure 10: Assessment @ the Abdomen; DUT w/ antenna 2.5cm separation
w/ attached Audio accessory model HMN9013A headset**



Figure 11: Robot Test setup (Abdomen)

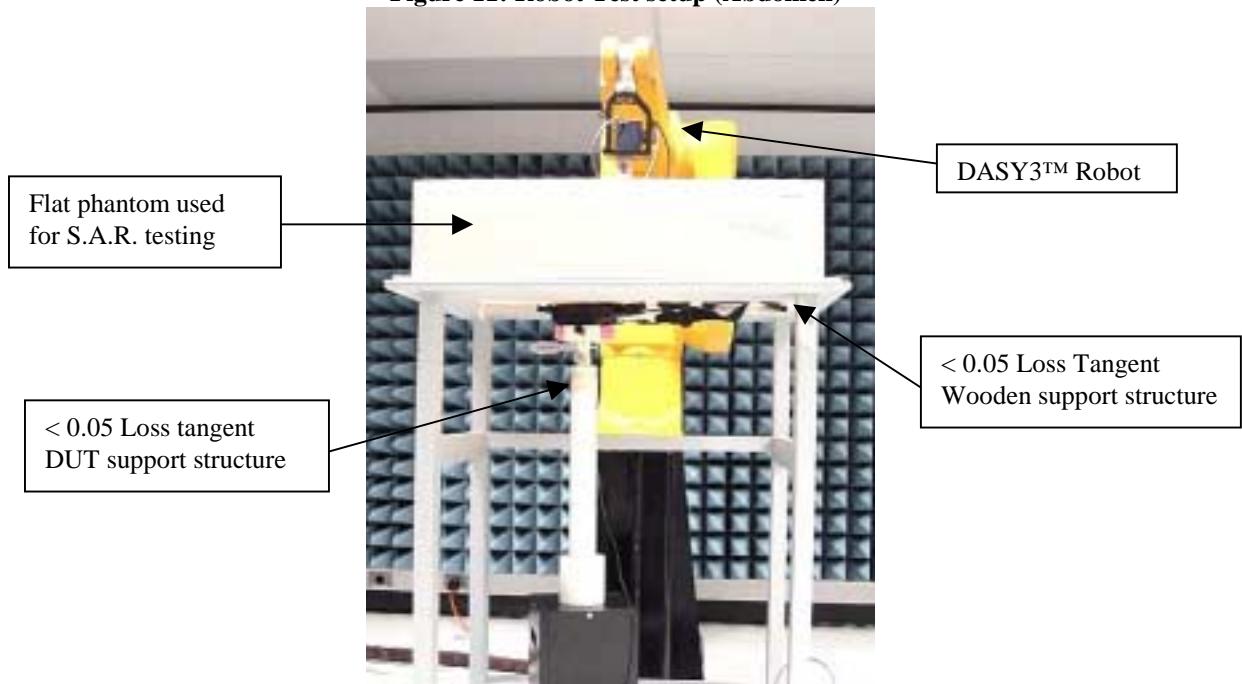


Figure 12: Robot Test Setup (Face)



5.3 Probe Scan Procedures

The E-field probe first scans in a coarse grid over a large area inside the phantom in order to locate the interpolated maximum S.A.R. distribution. After the coarse scan measurement, the probe is automatically moved to a position at the interpolated maximum. The subsequent scan can directly use this position as reference for the cube evaluations.

6.0 Measurement Uncertainty

Table 1: Uncertainty Budget for Device Under Test

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>c = f(d, k)</i>	<i>f</i>	<i>g</i>	<i>h = c x f / e</i>	<i>i = c x g / e</i>	<i>k</i>
	Section of IEEE P1528	Tol. (%)	Prob. Dist.		<i>c₁</i> (1 g)	<i>c₂</i> (10 g)	<i>1 g</i> <i>u₁</i> (%)	<i>10 g</i> <i>u₂</i> (%)	
Uncertainty Component									
Measurement System									
Probe Calibration	E.2.1	4.8	N	1.00	1	1	4.8	4.8	=
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	=
Spherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	=
Boundary Effect	E.2.3	5.8	R	1.73	1	1	3.3	3.3	=
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	=
System Detection Limits	E.2.5	1.0	R	1.73	1	1	0.6	0.6	=
Readout Electronics	E.2.6	1.0	N	1.00	1	1	1.0	1.0	=
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	=
Integration Time	E.2.8	1.3	R	1.73	1	1	0.8	0.8	=
RF Ambient Conditions	E.6.1	3.0	R	1.73	1	1	1.7	1.7	=
Probe Positioner Mechanical Tolerance	E.6.2	0.3	R	1.73	1	1	0.2	0.2	=
Probe Positioning with respect to Phantom Shell	E.6.3	1.1	R	1.73	1	1	0.6	0.6	=
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	3.9	R	1.73	1	1	2.3	2.3	=
Test sample Related									
Test Sample Positioning	E.4.2	3.6	N	1.00	1	1	3.6	3.6	29
Device Holder Uncertainty	E.4.1	2.8	N	1.00	1	1	2.8	2.8	8
Output Power Variation - SAR drift measurement	E.6.2	5.0	R	1.73	1	1	2.9	2.9	=
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4.0	R	1.73	1	1	2.3	2.3	=
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	=
Liquid Conductivity - measurement uncertainty	E.3.3	10.0	R	1.73	0.64	0.43	3.7	2.5	=
Liquid Permittivity - deviation from target values	E.3.2	10.0	R	1.73	0.6	0.49	3.5	2.8	=
Liquid Permittivity - measurement uncertainty	E.3.3	5.0	R	1.73	0.6	0.49	1.7	1.4	=
Combined Standard Uncertainty				RSS			12	11	1363
Expanded Uncertainty (95% CONFIDENCE LEVEL)			<i>k</i> =2				23	22	

Table 2: Uncertainty Budget for System Performance Check

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e</i> = $f(d,k)$	<i>f</i>	<i>g</i>	<i>h</i> = $c x f/e$		<i>i</i> = $c x g/e$	<i>k</i>	
							<i>c_i</i>	<i>c_i</i>	1 g	10 g	
Uncertainty Component					Div.		(1 g)	(10 g)	(\pm %)	(\pm %)	<i>v_i</i>
Measurement System											
Probe Calibration	E 2.1	4.8	N	1.00	1	1	4.8	4.8	—	—	
Axial Isotropy	E 2.2	4.7	R	1.73	1	1	2.7	2.7	—	—	
Spherical Isotropy	E 2.2	9.6	R	1.73	0	0	0.0	0.0	—	—	
Boundary Effect	E 2.3	5.8	R	1.73	1	1	3.3	3.3	—	—	
Linearity	E 2.4	4.7	R	1.73	1	1	2.7	2.7	—	—	
System Detection Limits	E 2.5	1.0	R	1.73	1	1	0.6	0.6	—	—	
Readout Electronics	E 2.6	1.0	N	1.00	1	1	1.0	1.0	—	—	
Response Time	E 2.7	0.0	R	1.73	1	1	0.0	0.0	—	—	
Integration Time	E 2.8	0.0	R	1.73	1	1	0.0	0.0	—	—	
RF Ambient Conditions	E 6.1	3.0	R	1.73	1	1	1.7	1.7	—	—	
Probe Positioner Mechanical Tolerance	E 6.2	0.3	R	1.73	1	1	0.2	0.2	—	—	
Probe Positioning with respect to Phantom Shell	E 6.3	1.1	R	1.73	1	1	0.6	0.6	—	—	
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E 5	3.9	R	1.73	1	1	2.3	2.3	—	—	
Dipole											
Dipole Axis to Liquid Distance	8, E 4.2	1.0	R	1.73	1	1	0.6	0.6	—	—	
Input Power and SAR Drift Measurement	8, E 6.2	4.7	R	1.73	1	1	2.7	2.7	—	—	
Phantom and Tissue Parameters											
Phantom Uncertainty (shape and thickness tolerances)	E 3.1	4.0	R	1.73	1	1	2.3	2.3	—	—	
Liquid Conductivity - deviation from target values	E 3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	—	—	
Liquid Conductivity - measurement uncertainty	E 3.3	10.0	R	1.73	0.64	0.43	3.7	2.5	—	—	
Liquid Permittivity - deviation from target values	E 3.2	10.0	R	1.73	0.6	0.49	3.5	2.8	—	—	
Liquid Permittivity - measurement uncertainty	E 3.3	5.0	R	1.73	0.6	0.49	1.7	1.4	—	—	
Combined Standard Uncertainty											
Expanded Uncertainty				RSS					10	9.4	—
95% CONFIDENCE LEVEL)					<i>k</i> =2				20	18	

Notes for Tables 1 and 2

- Column headings *a-k* are given for reference.
- Tol. - tolerance in influence quantity.
- Prob. Dist. – Probability distribution
- N, R - normal, rectangular probability distributions
- Div. - divisor used to translate tolerance into normally distributed standard uncertainty
- c_i* - sensitivity coefficient that should be applied to convert the variability of the uncertainty component into a variability of SAR.
- ui* – SAR uncertainty
- vi* - degrees of freedom for standard uncertainty and effective degrees of freedom for the expanded uncertainty.

7.0 S.A.R. Test Results

All S.A.R. results obtained by the tests described in Section 5.0 are listed in section 7.1 below. The bolded result indicates the highest observed S.A.R. performance. DASY3™ S.A.R. measurement scans are provided in APPENDIX B for the highest observed S.A.R.

APPENDIX A presents a shortened S.A.R. cube scan to assess the validity of the calculated results presented herein. Note that the results of the shortened cube scans presented in APPENDIX A demonstrate that the scaling methodology used to determine the calculated S.A.R. results presented herein are valid.

7.1 S.A.R. results

Compliance Assessment at the abdomen; CW mode												
Run Number/ SN	Freq. (MHz)	Battery	Test position	Body- worn Acc.	Additional attachments	Initial Power (W)	End Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
Assessment of offered batteries w/ standard antenna model NAE6483AR												
EC-Ab-R3-030626-03/012UHF0060	420.5	NNTN4497AR	Against phantom	HLN8255B	HMN9030A	4.54	NA	-0.89	3.760	2.34	2.760	1.72
EC-Ab-R3-030626-05/012UHF0060	420.5	NNTN4496AR	Against phantom	HLN8255B	HMN9030A	4.52	NA	-1.11	3.660	2.41	2.690	1.77
Assessment of offered carry case accessories and band edges w/ worst-case battery from above and standard antenna model NAE6483AR												
EC-Ab-R3-030626-06/012UHF0060	420.5	NNTN4496AR	Against phantom	HLN9701B	HMN9030A	4.44	NA	-0.880	2.820	1.79	2.09	1.33
EC-Ab-R3-030626-07/012UHF0060	420.5	NNTN4496AR	Against phantom	RLN5383A	HMN9030A	4.52	NA	-0.770	1.840	1.12	1.39	0.85
EC-Ab-R3-030626-08/012UHF0060	420.5	NNTN4496AR	Against phantom	RLN5385A	HMN9030A	4.49	NA	-0.710	1.240	0.75	0.94	0.57
EC-Ab-R3-030626-09/012UHF0060	420.5	NNTN4496AR	Against phantom	NTN5243A HLN9701B	HMN9030A	4.46	NA	-0.950	2.780	1.78	2.08	1.34
EC-Ab-R3-030708-02/012UHF0060	420.5	NNTN4496AR	Against phantom	RLN4815A	HMN9030A	4.51	NA	-0.770	2.960	1.80	2.22	1.35
EC-Ab-R3-030707-04/012UHF0060	420.5	NNTN4496AR	Against phantom	HLN6602A	HMN9030A	4.38	NA	-0.690	5.900	3.63	4.19	2.58
EC-Ab-R3-030707-06/012UHF0060	403	NNTN4496AR	Against phantom	HLN6602A	HMN9030A	4.34	NA	-0.350	6.210	3.57	4.45	2.56
EC-Ab-R3-030707-07/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	HMN9030A	4.55	NA	-0.810	6.670	4.06	4.77	2.91
EC-Ab-R3-030728-02/012UHF0060	440	NNTN4496AR	Against phantom	HLN6602A	HMN9030A	4.65	NA	-1.02	6.23	3.94	4.47	2.83
Assessment of offered batteries w/ optional antenna model NAE6522AR												
EC-Ab-R3-030728-03/012UHF0060	440	NNTN4496AR	Against phantom	HLN8255B	HMN9030A	4.66	NA	-0.570	3.38	1.93	2.43	1.39
EC-Ab-R3-030728-04/012UHF0060	440	NNTN4497AR	Against phantom	HLN8255B	HMN9030A	4.68	NA	-0.440	3.25	1.80	2.38	1.32
Assessment of offered carry case accessories w/ optional antenna model NAE6522AR												
EC-Ab-R3-030728-05/012UHF0060	440	NNTN4496AR	Against phantom	HLN9701B	HMN9030A	4.75	NA	-0.570	2.44	1.39	1.82	1.04
EC-Ab-R3-030728-06/012UHF0060	440	NNTN4496AR	Against phantom	RLN5383A	HMN9030A	4.70	NA	-0.420	1.99	1.10	1.50	0.82

Assessment of offered carry case accessories w/ optional antenna model NAE6522AR (Continued)												
Run Number/ SN	Freq. (MHz)	Battery	Test position	Body- worn Acc.	Additional attachments	Initial Power (W)	End Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
EC-Ab-R3-030728-07/012UHF0060	440	NNTN4496AR	Against phantom	RLN5385A	HMN9030A	4.68	NA	-0.430	1.30	.718	.984	.543
EC-Ab-R3-030728-08/012UHF0060	440	NNTN4496AR	Against phantom	NTN5243A HLN9701B	HMN9030A	4.69	NA	-0.600	2.39	1.37	1.78	1.02
EC-Ab-R3-030728-09/012UHF0060	440	NNTN4496AR	Against phantom	RLN4815A	HMN9030A	4.76	NA	-0.510	2.54	1.43	1.89	1.06
EC-Ab-R3-030728-10/012UHF0060	440	NNTN4496AR	Against phantom	HLN6602A	HMN9030A	4.73	NA	-0.500	4.66	2.61	3.35	1.88
Assessment of offered audio accessories w/ worst-case test configuration from above												
EC-Ab-R3-030517-03/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	BDN6647F	4.67	NA	-0.650	7.470	4.34	5.210	3.03
EC-Ab-R3-030517-04/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	BDN6648C	4.68	NA	-0.600	6.900	3.96	4.870	2.80
EC-Ab-R3-030517-05/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	RMN5015A & RKN4090A	4.65	NA	-0.690	6.800	3.99	4.780	2.80
EC-Ab-R3-030517-07/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	RLN5411A	4.79	NA	-0.680	6.820	3.99	4.830	2.82
EC-Ab-R3-030517-08/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	RMN4054B	4.78	NA	-0.710	7.280	4.29	5.120	3.02
EC-Ab-R3-030517-09/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	RMN4055A	4.76	NA	-0.720	6.030	3.56	4.280	2.53
EC-Ab-R3-030518-05/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	RMN4051B & RKN4094A	4.79	NA	-0.700	7.360	4.32	5.170	3.04
EC-Ab-R3-030519-04/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	HMN9013A & HLN9133A	4.79	NA	-0.300	7.500	4.02	5.280	2.83
EC-Ab-R3-030708-11/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	PMMN4008A	4.55	NA	-0.650	7.160	4.20	5.130	3.01
EC-Ab-R3-030708-12/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	PMLN4425A	4.63	NA	-0.610	7.030	4.05	5.000	2.88
EC-Ab-R3-030708-13/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	PMLN4442A	4.6	NA	-0.710	6.940	4.09	4.950	2.92
EC-Ab-R3-030709-08/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	PMLN4443A	4.61	NA	-0.820	6.700	4.05	4.790	2.89
EC-Ab-R3-030709-09/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	PMLN4444A	4.65	NA	-0.650	7.560	4.39	5.390	3.13
EC-Ab-R3-030729-03/012UHF0060	440	NNTN4496AR	Against phantom	HLN6602A	PMLN4444A	4.77	NA	-0.790	7.26	4.35	5.18	3.11
EC-Ab-R3-030714-03/012UHF0062	438	NNTN4496AR	Against phantom	HLN6602A	PMLN4444A	4.68	NA	-0.720	8.07	4.76	5.74	3.39
EC-Ab-R3-030729-04/012UHF0062	440	NNTN4496AR	Against phantom	HLN6602A	PMLN4444A	4.75	NA	-0.860	8.37	5.10	5.97	3.64
EC-Ab-R3-030709-10/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	PMLN4445A	4.62	NA	-0.540	6.270	3.55	4.490	2.54
EC-Ab-R3-030710-02/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	HMN9754D	4.64	NA	-0.760	5.970	3.56	4.290	2.56

Assessment of offered audio accessories w/ worst-case test configuration from above (Continued)												
Run Number/ SN	Freq. (MHz)	Battery	Test position	Body- worn Accessories	Additional attachments	Initial Power (W)	End Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
EC-Ab-R3-030710-03/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	BDN6706B & 0180358E83	4.58	NA	-0.640	5.620	3.27	4.020	2.34
EC-Ab-R3-030710-05/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	PMLN4294C	4.63	NA	-0.410	6.700	3.68	4.840	2.66
EC-Ab-R3-030710-12/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	PMMN4001A	4.57	NA	-0.630	5.510	3.21	3.990	2.32
EC-Ab-R3-030710-08/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	HMN9013A Headset	4.65	NA	-0.670	6.240	3.64	4.520	2.64
EC-Ab-R3-030710-09/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	RMN4016A Headset	4.63	NA	-0.720	5.720	3.38	4.140	2.44
EC-Ab-R3-030710-10/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	RLN5238A headset	4.64	NA	-0.680	5.800	3.39	4.230	2.47
EC-Ab-R3-030710-11/012UHF0060	438	NNTN4496AR	Against phantom	HLN6602A	HMN9021A headset	4.61	NA	-0.660	5.940	3.46	4.300	2.50
Assessment at 2.5cm distance w/ worst-case test configuration from audio assessment above												
DH-Ab-R3-030715-02/012UHF0060	438	NNTN4496AR	DUT back/ant. 2.5cm	None	PMLN4444A	4.60	NA	-0.670	6.630	3.87	4.780	2.79
DH-Ab-R3-030715-03/012UHF0060	438	NNTN4496AR	DUT back 2.5cm	None	PMLN4444A	4.60	NA	-2.240	2.930	2.45	2.200	1.84
EC-Ab-R3-030715-04/012UHF0060	438	NNTN4496AR	DUT front 2.5cm	None	PMLN4444A	4.65	NA	-0.870	3.100	1.89	2.300	1.41

Compliance assessment at the Face; CW mode												
Run Number/ SN	Freq. (MHz)	Battery	Test position	Body- worn Accessories	Additional attachments	Initial Power (W)	End Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
Assessment of offered batteries and antennas including band edge assessment												
EC-Face-R3-030516-07/012UHF0060	420.5	NNTN4496AR	DUT front 2.5cm	None	None	4.45	NA	-0.750	4.140	2.54	3.010	1.85
EC-Face-R3-030516-08/012UHF0060	420.5	NNTN4497AR	DUT front 2.5cm	None	None	4.50	NA	-0.710	4.050	2.44	2.950	1.78
EC-Face-R3-030729-08/012UHF0060	440/ optional ant.	NNTN4496AR	DUT front 2.5cm	None	None	4.75	NA	-0.470	3.51	1.96	2.57	1.43
EC-Face-R3-030729-09/012UHF0060	440/ optional ant.	NNTN4497AR	DUT front 2.5cm	None	None	4.72	NA	-0.370	3.63	1.98	2.66	1.45
EC-Face-R3-030516-11/012UHF0060	403	NNTN4496AR	DUT front 2.5cm	None	None	4.45	NA	-0.770	5.79	3.57	4.20	2.59
EC-Face-R3-030516-12/012UHF0060	438	NNTN4496AR	DUT front 2.5cm	None	None	4.63	NA	-0.680	3.92	2.29	2.82	1.65
EC-Face-R3-030729-10/012UHF0060	440	NNTN4496AR	DUT front 2.5cm	None	None	4.78	NA	-0.640	3.78	2.19	2.78	1.61

Assessment at the face of applicable offered audio accessories w/ worst-case test configuration from above												
Run Number/ SN	Freq. (MHz)	Battery	Test position	Body- worn Accessories	Additional attachments	Initial Power (W)	End Power (W)	S.A.R. Drift (dB)	Measured 1g-S.A.R. (mW/g)	Max Calc. 1g-S.A.R. (mW/g)	Meas. 10g-S.A.R. (mW/g)	Max Calc. 10g-S.A.R. (mW/g)
EC-Face-R3-030516-14/012UHF0060	403	NNTN4496AR	DUT front 2.5cm	None	HMN9727B	4.600	NA	-0.820	5.390	3.29	3.910	2.39
EC-Face-R3-030715-12/012UHF0060	403	NNTN4496AR	DUT front 2.5cm	None	HMN9752B	4.600	NA	-0.770	5.490	3.29	4.070	2.44
EC-Face-R3-030715-11/012UHF0062	403	NNTN4496AR	DUT front 2.5cm	None	HMN9752B	4.600	NA	-0.840	5.730	3.59	4.260	2.67

7.2 Peak S.A.R. location

Refer to APPENDIX B for detailed S.A.R. scan distributions.

7.3 Highest S.A.R. results calculation methodology

The calculated maximum 1-gram and 10-gram averaged S.A.R. value is determined by scaling the measured S.A.R. to account for power leveling variations and power output slump below the reported maximum power during the S.A.R. measurements. For this device the Maximum Calculated 1-gram and 10-gram averaged peak S.A.R. is calculated using the following formula:

$$\text{Max. Calc. 1-g Avg. SAR} = ((\text{S.A.R. meas.} / (10^{(\text{Pdrift}/10)})) * (\text{Pmax}/\text{Pint})) * \text{DC\%}$$

P_{max} = Maximum Power (W)

P_{int} = Initial Power (W)

Pdrift = DASY drift results (dB)

SAR_{meas.} = Measured 1 gram averaged peak S.A.R. (mW/g)

DC % = Transmission mode duty cycle in % where applicable

Note: If intial power is > than max power then Pmax/Pint = 1

8.0 Conclusion

The highest Operational Maximum Calculated 1-gram and 10-gram average S.A.R. values found for FCC ID: ABZ99FT4057

At the abdomen: **1-g Avg. = 5.10mW/g; 10-g Avg. = 3.64 mW/g**

At the Face: **1-g Avg. = 3.59 mW/g; 10-g Avg. = 2.67 mW/g**

At the Head: **N/A**

These test results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits of **8.0 mW/g** per the requirements of 47 CFR 2.1093(d)