



Excellence in Compliance Testing

Certification Test Report

FCC ID: ABZ99FT4090
IC: 109AB-99FT4090

FCC Rule Part: 15.247
IC Radio Standards Specification: RSS-210

ACS Report Number: 11-2072.W06.11.A

Manufacturer: Motorola Solutions
Model: Mototrbo Elite

Test Begin Date: **August 25, 2011**
Test End Date: **August 31, 2011**

Report Issue Date: September 7, 2011



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ACLASS, ANSI, or any agency of the Federal Government.

Project Manager:

Thierry Jean-Charles
EMC Engineer
Advanced Compliance Solutions, Inc.

Reviewed by:

Kirby Munroe
Director, Wireless Certifications
Advanced Compliance Solutions, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 52 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	Purpose.....	3
1.2	Manufacturer Information	3
1.3	Product description	3
1.4	Test Methodology and Considerations	4
2	TEST FACILITIES	5
2.1	Location.....	5
2.2	Laboratory Accreditations/Recognitions/Certifications	5
2.3	Radiated & Conducted Emissions Test Site Description	6
3	APPLICABLE STANDARD REFERENCES.....	7
4	LIST OF TEST EQUIPMENT.....	8
5	SUPPORT EQUIPMENT	9
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	9
7	SUMMARY OF TESTS.....	10
7.1	Antenna Requirement – FCC: Section 15.203	10
7.2	Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4.....	10
7.3	Peak Output Power - FCC Section 15.247(b)(1) IC: RSS-210 A8.4(2).....	13
7.4	Channel Usage Requirements.....	14
7.5	Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC:RSS-210 A8.5.....	29
8	CONCLUSION.....	51

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210.

1.2 Manufacturer Information

Motorola Solutions SDNBHD
Plot 2 Bayan Lepas
Technoplex Industrial Park
MK 12 SWD
11900 Pulau Pinang

1.3 Product description

The Mototrbo Elite, Model No: SL7550, is a PTT radio with 2 Watt RF output operating in the UHF band of 403 - 470 MHz. The EUT also includes a Bluetooth 2.0+EDR2. It is powered by 3.7V Li-ion battery pack and compliant with the ETSI DMR Tier 2 protocol.

Table1.3-1: Bluetooth Radio Properties

Mode of Operation	Frequency Range (MHz)	Number of Channels	Channel Separation (kHz)	Data Rates Supported (kbps)
GFSK	2402 - 2480	79	1000	1000
$\pi/4$ -DQPSK	2402 - 2480	79	1000	2000
8DPSK	2402 - 2480	79	1000	3000

Model Number: Mototrbo Elite

Test Sample Serial Number(s): DFLTMN03Z0, DFLTMN03VD

Test Sample Condition: Good

1.4 Test Methodology and Considerations

The Mototrbo Elite was evaluated in the Bluetooth transmit mode for radiated, RF conducted and power line conducted emissions.

Preliminary radiated emissions evaluation was performed for the EUT set in three orthogonal orientations corresponding to the XY, XZ and YZ planes. The final measurements were performed on the EUT orientation leading to the highest emissions.

Additionally, the unit was investigated for inter-modulation products resulting from the Bluetooth and the UHF radio being on at the same time. All inter-modulation products from the simultaneous operation of the collocated Bluetooth and UHF radios were attenuated below the noise floor of the measurement equipment and the applicable limits.

For the conducted power line emissions evaluation, the EUT was set on the hopping mode. Data are reported on the EUT configuration leading to the highest emissions.

Mode of Operations	Frequency (MHz)	Data Rate (kbps)
GFSK	2402	1000
	2441	1000
	2480	1000
$\pi/4$ DQPSK	2402	2000
	2441	2000
	2480	2000
8 DPSK	2402	3000
	2441	3000
	2480	3000

The unintentional emissions data are covered separately in a DOC/Verification report.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.
3998 FAU Blvd, Suite 310
Boca Raton, Florida 33431
Phone: (561) 961-5585
Fax: (561) 961-5587
www.acstestlab.com

FCC Test Firm Registration #: 587595
Industry Canada Lab Code: 4175C

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ACCLASS program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl floor.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flushed with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:


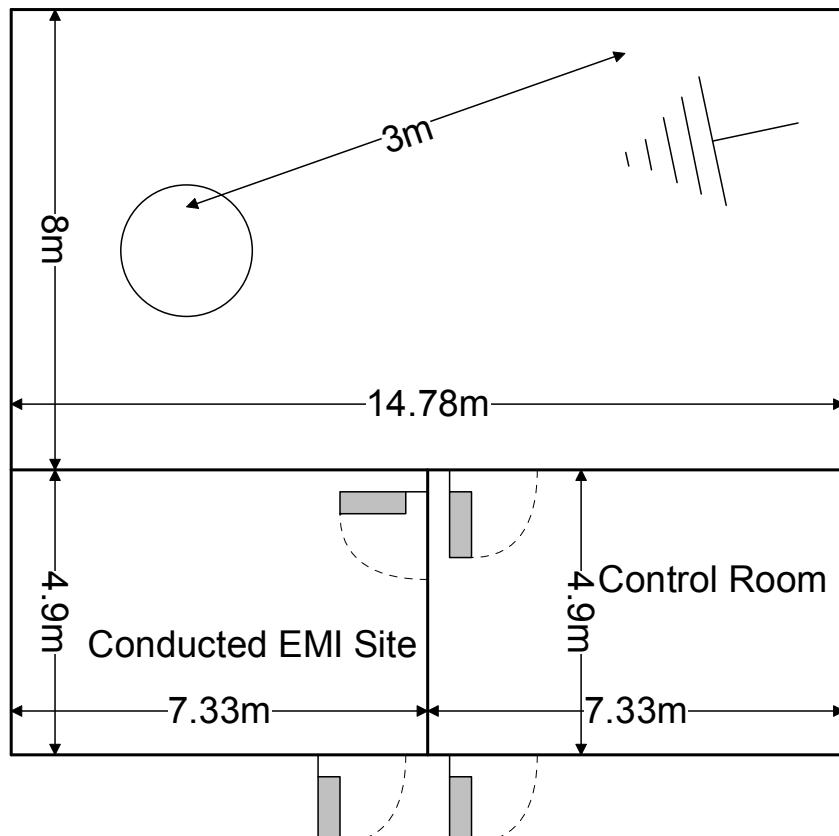


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are $7.3 \times 4.9 \times 3 \text{ m}^3$. As per ANSI C63.4 2003 requirements, the data were taken using two LISNs; a Solar Model 8028-50 50 Ω /50 μH and an EMCO Model 3825, which are installed as shown in Photograph 3. For 220 V, 50 Hz, a Polarad LISN (S/N 879341/048) is used in conjunction with a 1 kVA, 50 Hz/220 V EDGAR variable frequency generator, Model 1001B, to filter conducted noise from the generator.

A diagram of the room is shown below in figure 2.3.2-1:

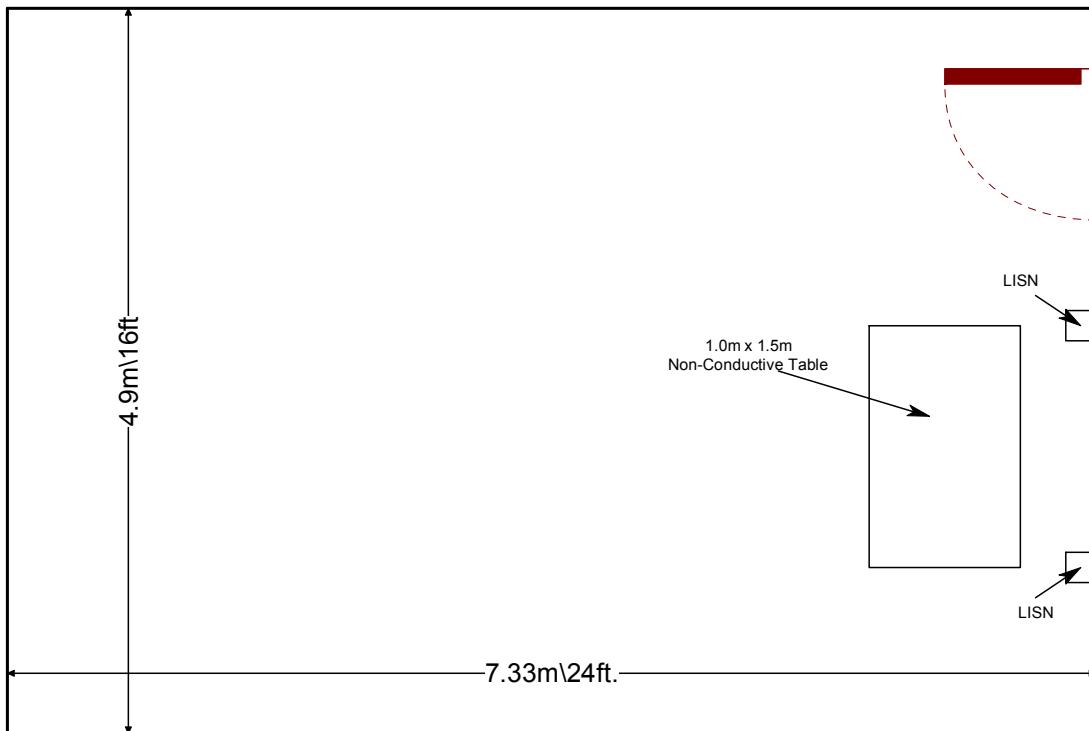

Figure

2.3.2-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2010
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2010
- ❖ FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems, March 30, 2000
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8 December 2010.
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, December 2010.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
523	Agilent	E7405	Spectrum Analyzers	MY45103293	1/5/2011	1/5/2013
524	Chase	CBL6111	Antennas	1138	1/7/2011	1/7/2013
2006	EMCO	3115	Antennas	2573	3/2/2011	3/2/2013
2008	COM-Power	AH-826	Antennas	81009	NCR	NCR
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	1/3/2011	1/3/2012
2012	Hewlett-Packard	HP83017A	Amplifiers	3123A00324	2/25/2011	2/25/2012
2013	Hewlett Packard	HP8566B	Spectrum Analyzers	2407A03233	8/5/2010	8/5/2012
2014	Hewlett Packard	HP 85650A	Quasi Peak Adapter	2430A00559	8/5/2010	8/5/2012
2022	EMCO	LISN3825/2R	LISN	1095	8/19/2011	8/19/2013
2037	ACS Boca	Chamber EMI Cable Set	Cable Set	2037	1/7/2011	1/7/2012
2044	QMI	N/A	Cables	2044	1/7/2011	1/7/2012
2045	ACS Boca	Conducted Cable Set	Cable Set	2045	1/6/2011	1/6/2012
2064	CIR Q-TEL	FHT/22-10K-13/50-3A/3A	Filter	9	1/15/2011	1/15/2012
2066	Hewlett Packard	11170B	Cables	2066	7/4/2011	7/4/2012
2070	Mini Circuits	VHF-8400+	Filter	2070	2/3/2011	2/3/2012
2072	Mini Circuits	VHF-3100+	Filter	30737	2/3/2011	2/3/2012
2082	Teledyne Storm Products	90-010-048	Cables	2082	6/6/2011	6/6/2012


NCR=No Calibration Required

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	EUT	Motorola	Mototrbo Elite SL7550	DFLTMN03Z0, DFLTMN03VD
2	AC Power Supply	Motorola	DCH4-050MV-0301	21JUN11-C6-0821306-4009A

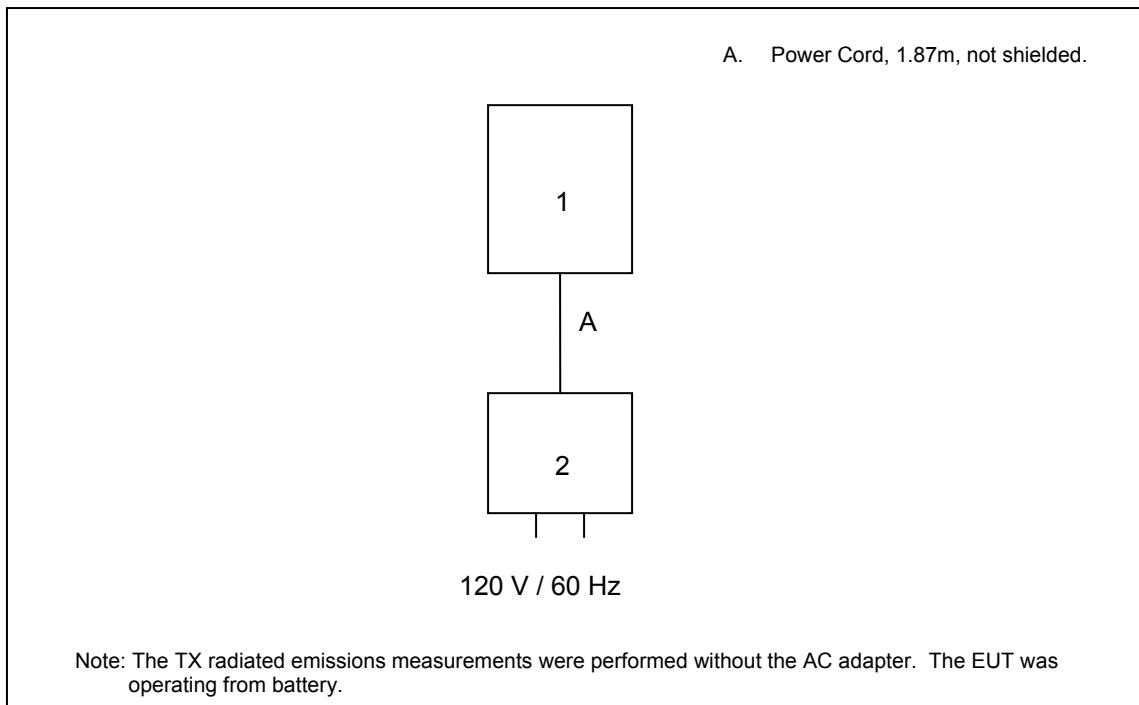6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM



7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The Mototrbo Elite uses an internal inverted-F antenna for the Bluetooth radio.

7.2 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4

7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Results of the test corresponding to the EUT configuration leading to the worse case emissions are shown below in Table 7.2.2-1 and Figure 7.2.2-1 to Figure 7.2.2-2.

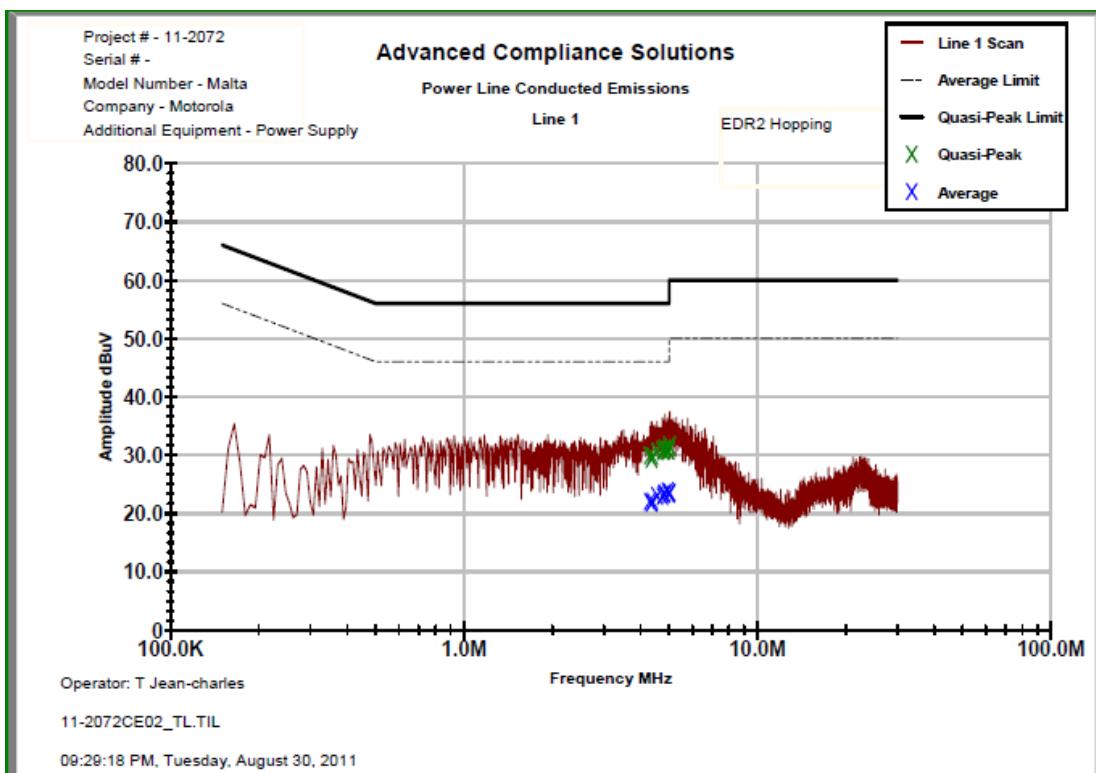


Figure 7.2.2-1: Conducted Emissions Results – Line 1

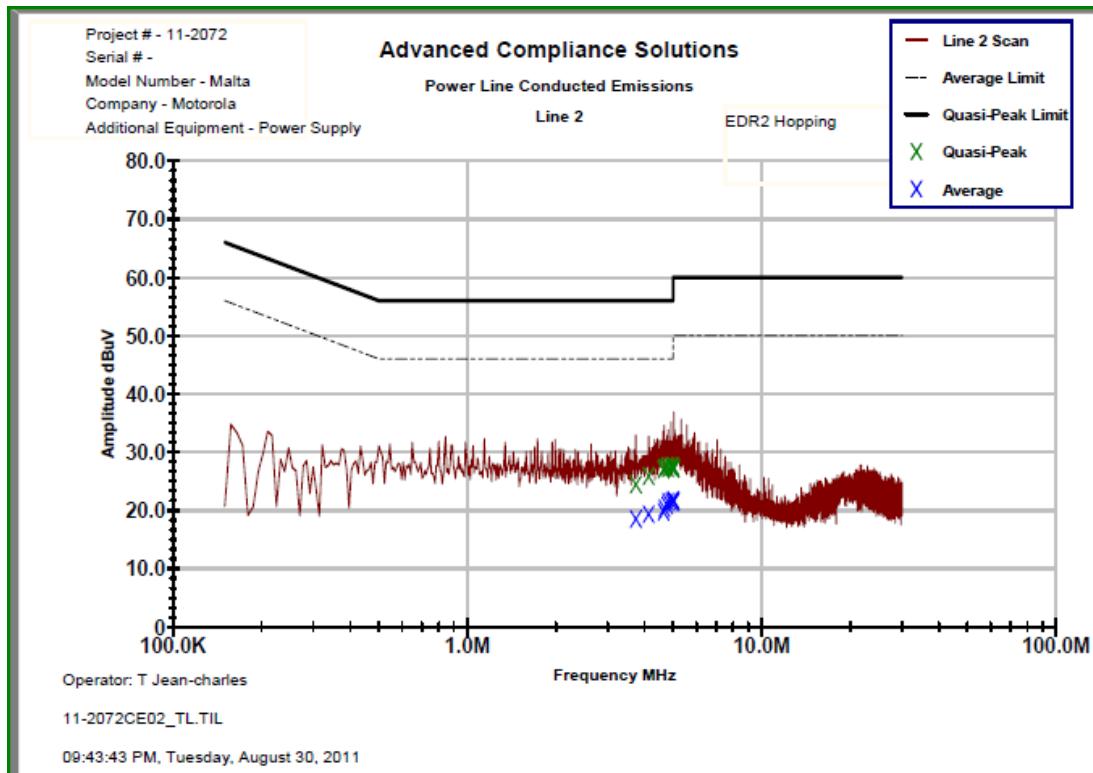


Figure 7.2.2-2: Conducted Emissions Results – Line 2

Table 7.2.2-1: Conducted EMI Results

<input checked="" type="checkbox"/> Line 1 <input checked="" type="checkbox"/> Line 2 <input type="checkbox"/> Line 3 <input type="checkbox"/> Line 4 <input type="checkbox"/> To Ground <input checked="" type="checkbox"/> Floating <input type="checkbox"/> Telecom Port _____ <input checked="" type="checkbox"/> dB μ V <input type="checkbox"/> dB μ A											
Plot Number: 11-2072CE02 Power Supply Description: 5 <u>VDC</u>											
			Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)			
Frequency (MHz)	Uncorrected Reading			Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	
	Quasi-Peak	Average								Average	
Line 1											
4.29345	29.409	21.549	0.59	30.00	22.14	56.00	46.00	26.0	23.9		
4.35823	28.852	21.32	0.59	29.44	21.91	56.00	46.00	26.6	24.1		
4.38719	29.287	21.562	0.59	29.88	22.15	56.00	46.00	26.1	23.9		
4.55526	30.162	22.482	0.59	30.75	23.07	56.00	46.00	25.3	22.9		
4.7513	30.288	22.459	0.59	30.88	23.05	56.00	46.00	25.1	23.0		
4.79082	30.215	22.817	0.59	30.80	23.41	56.00	46.00	25.2	22.6		
4.83306	30.548	22.941	0.59	31.14	23.53	56.00	46.00	24.9	22.5		
4.94107	30.371	23.329	0.59	30.96	23.92	56.00	46.00	25.0	22.1		
4.9888	30.264	22.833	0.59	30.85	23.42	56.00	46.00	25.1	22.6		
5.0122	31.022	23.031	0.58	31.60	23.61	60.00	50.00	28.4	26.4		
Line 2											
3.737	23.887	17.958	0.63	24.52	18.59	56.00	46.00	31.5	27.4		
4.13021	25.268	18.761	0.66	25.93	19.42	56.00	46.00	30.1	26.6		
4.64315	26.41	19.141	0.66	27.07	19.80	56.00	46.00	28.9	26.2		
4.67296	26.697	19.774	0.66	27.36	20.43	56.00	46.00	28.6	25.6		
4.77464	27.036	20.26	0.66	27.70	20.92	56.00	46.00	28.3	25.1		
4.80591	26.597	20.884	0.66	27.26	21.54	56.00	46.00	28.7	24.5		
4.92564	26.86	20.88	0.66	27.52	21.54	56.00	46.00	28.5	24.5		
5.00025	26.853	21.163	0.67	27.52	21.83	60.00	50.00	32.5	28.2		
5.01035	26.906	20.906	0.67	27.57	21.57	60.00	50.00	32.4	28.4		
5.02127	26.549	20.992	0.67	27.22	21.66	60.00	50.00	32.8	28.3		

* Note: Results are reported for the EUT configuration leading to the worst case emissions.

7.3 Peak Output Power - FCC Section 15.247(b)(1) IC: RSS-210 A8.4(2)

7.3.1 Measurement Procedure (Conducted Method)

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. Offset values were input for cable and attenuation.

7.3.2 Measurement Results

Results are shown below in Table 7.3.2-1 to Table 7.3.2-3 below:

Table 7.3.2-1: RF Output Power (GFSK)

Frequency (MHz)	Reading (dBm)	Insertion Loss (dB)	Power (dBm)
2402.00	4.216	0.555	4.771
2441.00	3.760	0.555	4.315
2480.00	2.984	0.555	3.539

Table 7.3.2-2: RF Output Power ($\pi/4$ DQPSK)

Frequency (MHz)	Reading (dBm)	Insertion Loss (dB)	Power (dBm)
2402.00	6.166	0.555	6.721
2441.00	5.995	0.555	6.55
2480.00	5.294	0.555	5.849

Table 7.3.2-3 RF Output Power (8DPSK)

Frequency (MHz)	Reading (dBm)	Insertion Loss (dB)	Power (dBm)
2402.00	6.828	0.555	7.383
2441.00	6.688	0.555	7.243
2480.00	5.948	0.555	6.503

7.4 Channel Usage Requirements

7.4.1 Carrier Frequency Separation – FCC: Section 15.247(a)(1) IC: RSS-210 A8.1(b)

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to $\geq 1\%$ of the span.

7.4.1.2 Measurement Results

Results are shown below in Figure 7.4.1.2-1.

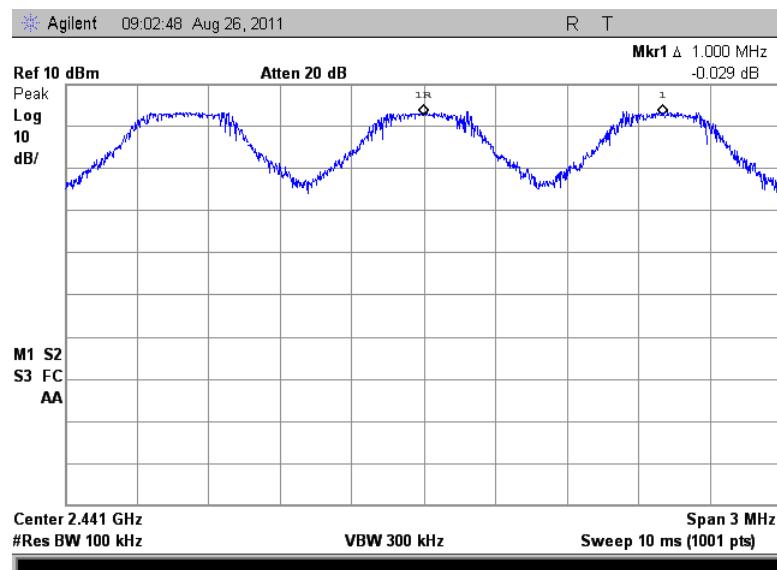


Figure 7.4.1.2-1: Carrier Frequency Separation

7.4.2 Number of Hopping Channels – FCC: Section 15.247(a)(1)(iii) IC: RSS-210 A8.1(d)

7.4.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture the number of hopping channels. The peak detector max hold function.

7.4.2.2 Measurement Results

Results are shown below in Figures 7.4.2.2-1 to 7.4.2.2-3.

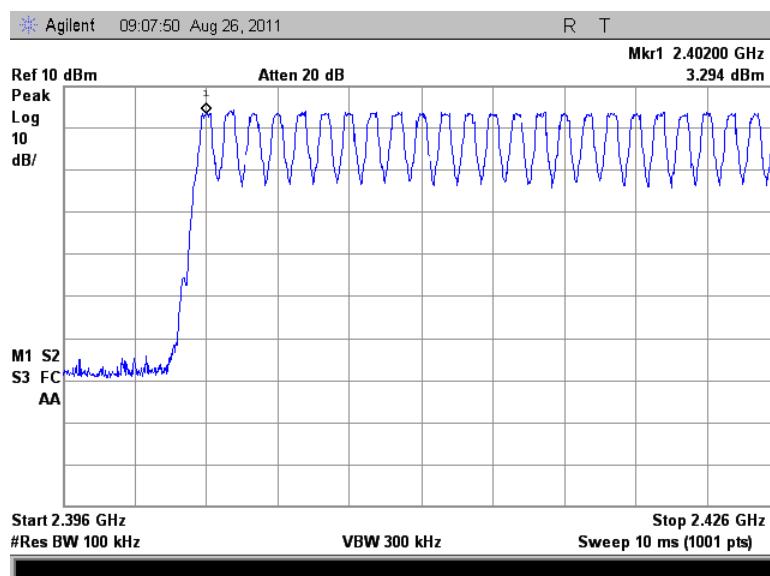


Figure 7.4.2.2-1: Number of Hopping Channels (1 – 25)

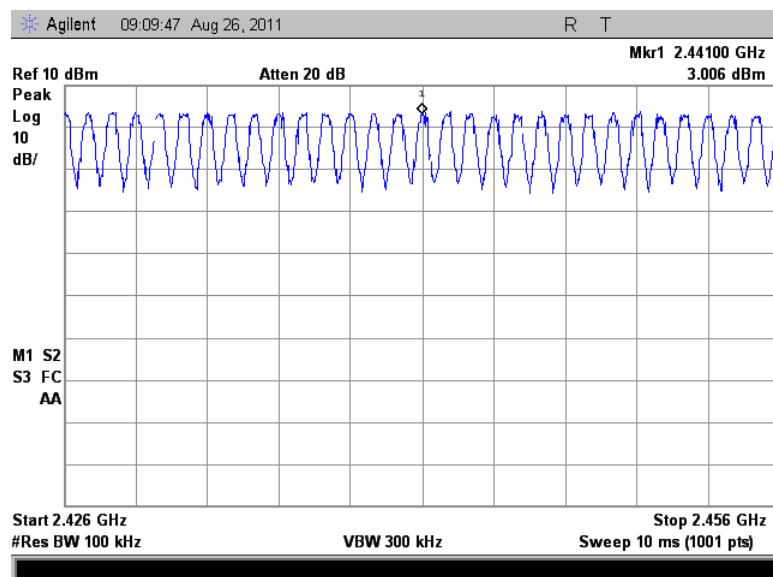


Figure 7.4.2.2-2: Number of Hopping Channels (25 – 55)

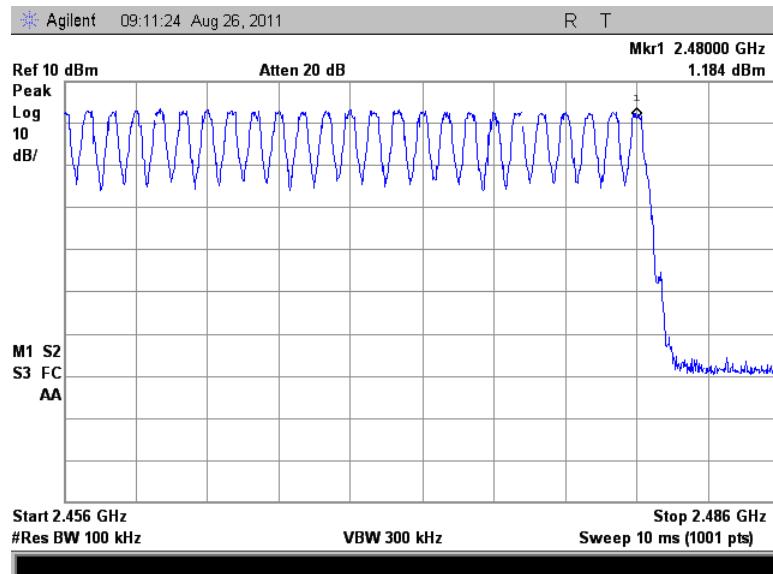


Figure 7.4.2.2-3: Number of Hopping Channels (55 – 79)

7.4.3 Channel Dwell Time – FCC: Section 15.247(a)(1)(iii) IC: RSS-210 A8.1(d)

7.4.3.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set 0 Hz centered on a hopping channel. The RBW was set to 100 kHz and the sweep time adjusted to capture the entire dwell time per channel with peak detector max hold function.

7.4.3.2 Measurement Results

Results are shown below in Table 7.4.3.2-1 and Figure 7.4.3.2-1 to Figure 7.4.3.2-3

Table 7.4.3.2-1 Dwell Time on a 31.6 Second Cycle

Packet Format	Number of Hops Per Sec. (NHPS)	Number of Hops per Channel Per Sec. (NHPCPS)	Number of hops on a 31.6 s Cycle (NHPC)	Measured Dwell Times (ms)	Dwell Times on a 31.6 s Cycle	Limit (ms)	Status
DH1	800.00	10.13	320.00	0.42	134.40	400.00	PASS
DH3	400.00	5.06	160.00	1.69	270.40	400.00	PASS
DH5	266.67	3.38	106.67	2.98	317.88	400.00	PASS

*Notes:

NHPS = (1600 /sec)/ (NT+NR) (where NT and NR are the number of transmit and receive packets, respectively)

NHPCPS = NHPS/79

NHPC = NHPCPS * 31.6s

Dwell Time per Cycle = NHPC* Measured Dwell Time

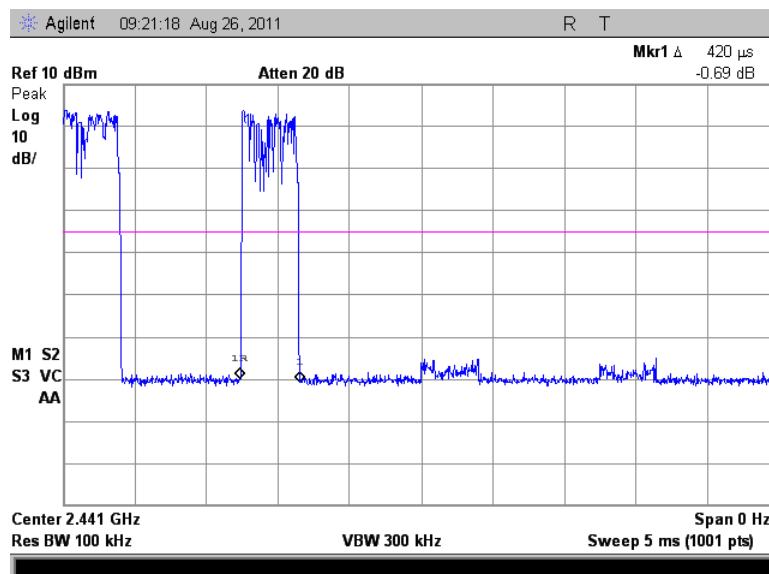


Figure 7.4.3.2-1: Channel Dwell Time – DH1

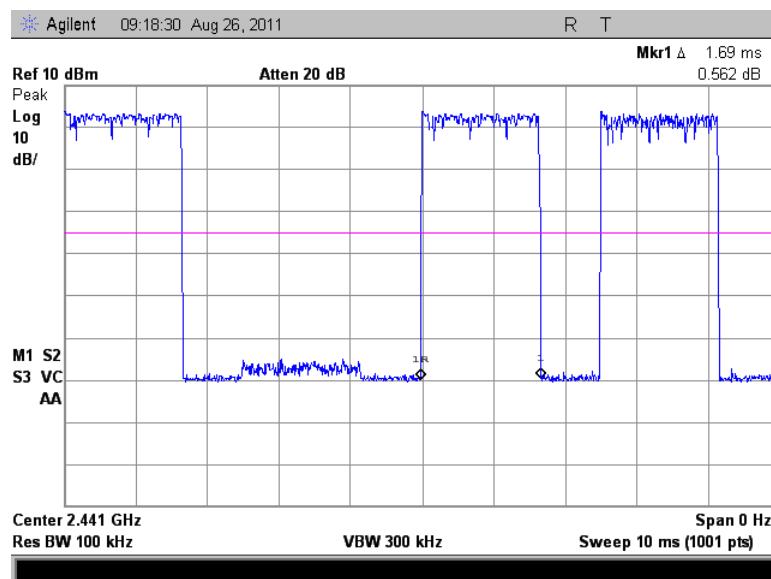


Figure 7.4.3.2-2: Channel Dwell Time – DH3

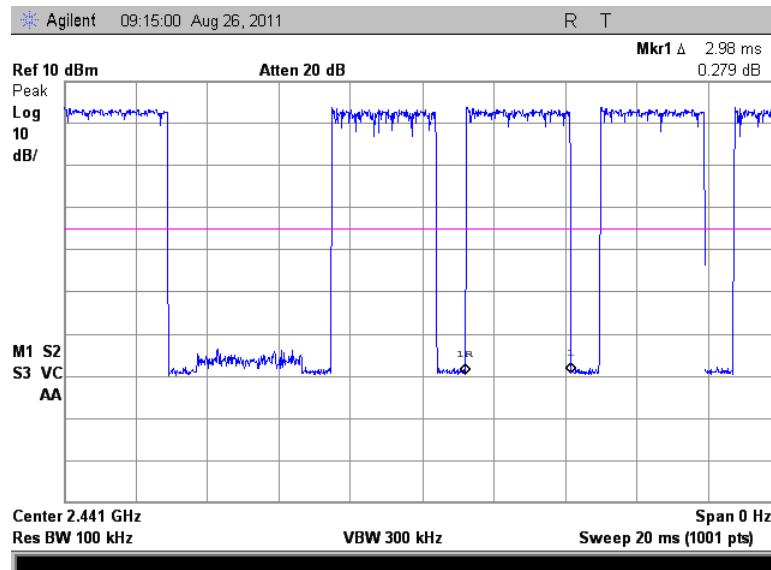


Figure 7.4.3.2-3: Channel Dwell Time – DH5

7.4.4 20dB / 99% Bandwidth - FCC: Section 15.247(a)(1)(i) IC: RSS-210 A8.1(a)

7.4.4.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The spectrum analyzer span was set to 2 to 3 times the estimated bandwidth of the emission. The RBW was to $\geq 1\%$ of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was to 1% of the span. The occupied 99% bandwidth was measured by using a delta marker at the lower and upper frequencies leading to 0.5% of the total power.

7.4.4.2 Measurement Results

Results are shown below in Table 7.4.4.2-1 and Table 7.4.4.2-3 and Figures 7.4.4.2-1 to 7.4.4.2-18.

Table 7.4.4.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
2402	960	1153
2442	960	1171
2480	958	1153

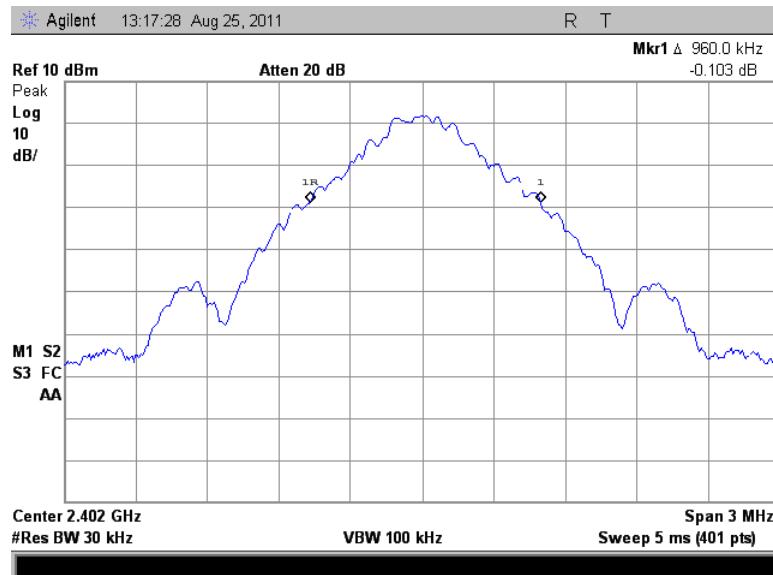


Figure 7.4.4.2-1: 20dB BW Low Channel (GFSK)

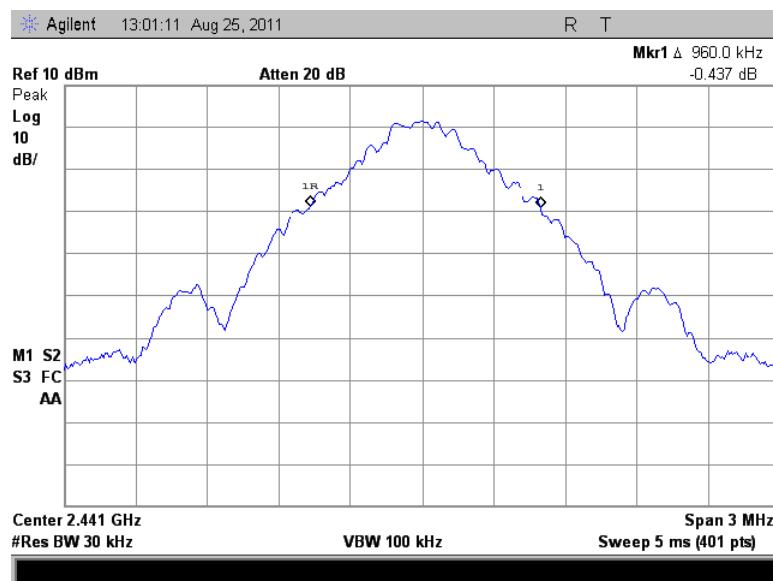


Figure 7.4.4.2-2: 20dB BW Middle Channel (GFSK)

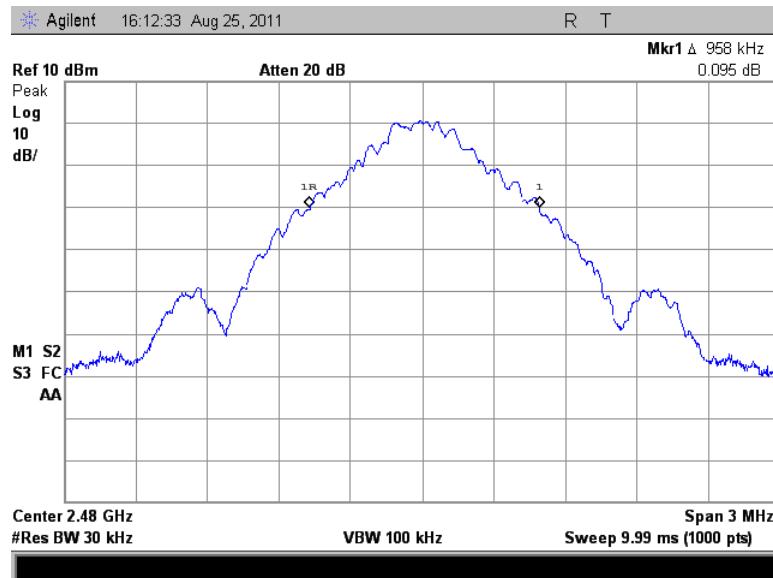


Figure 7.4.4.2-3: 20dB BW High Channel (GFSK)

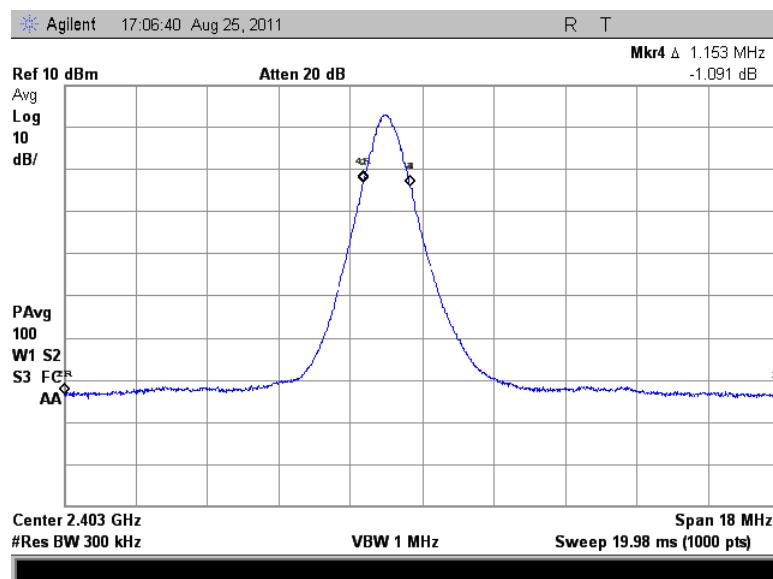


Figure 7.4.4.2-4: 99% OBW Low Channel (GFSK)

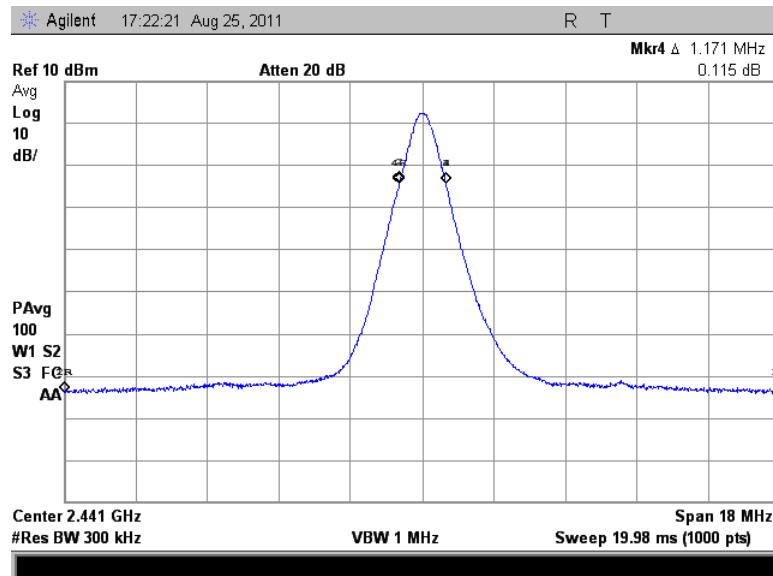


Figure 7.4.4.2-5: 99% OBW Middle Channel (GFSK)

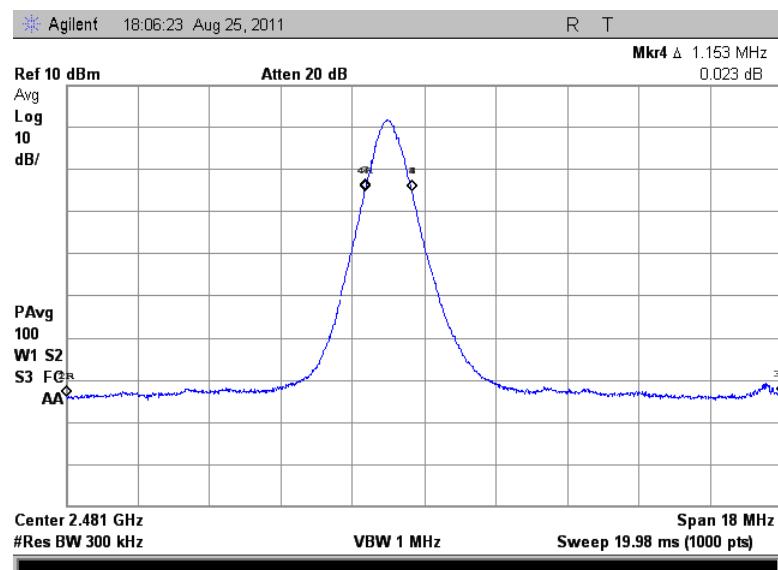
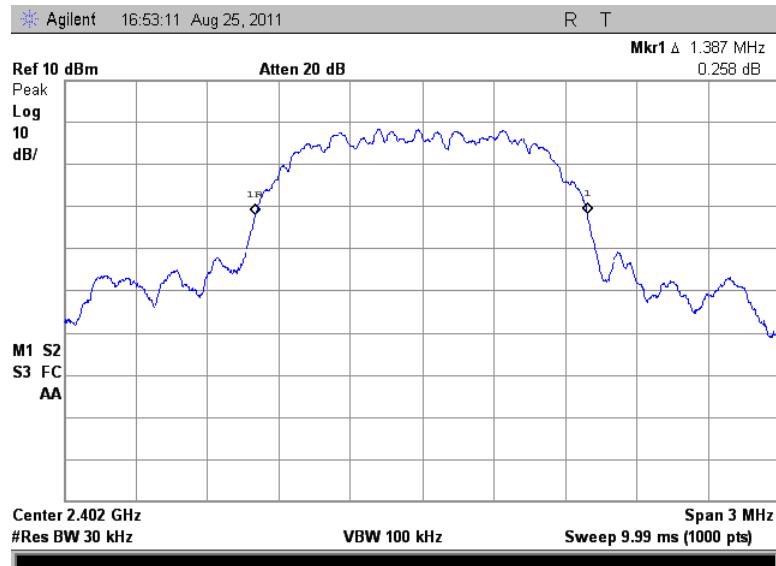
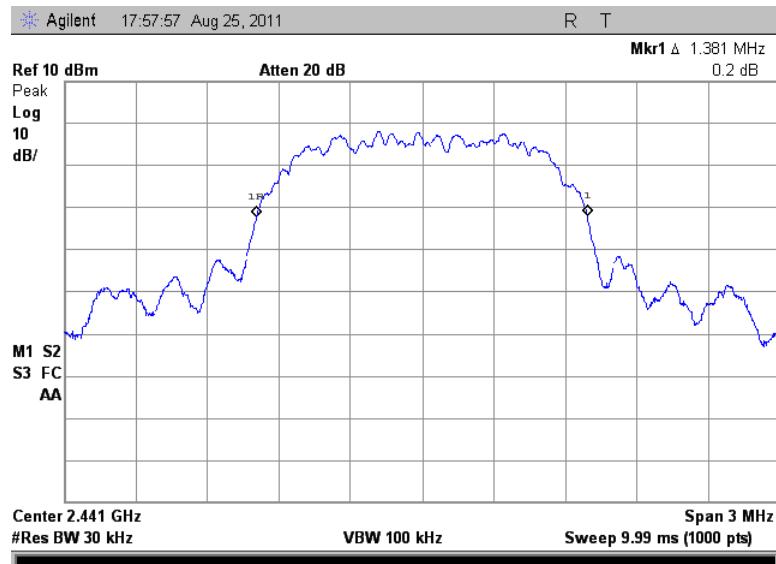
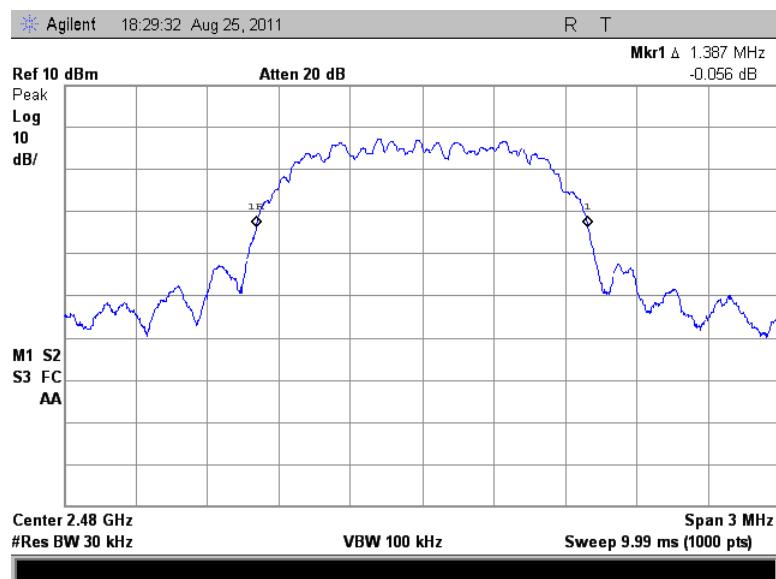
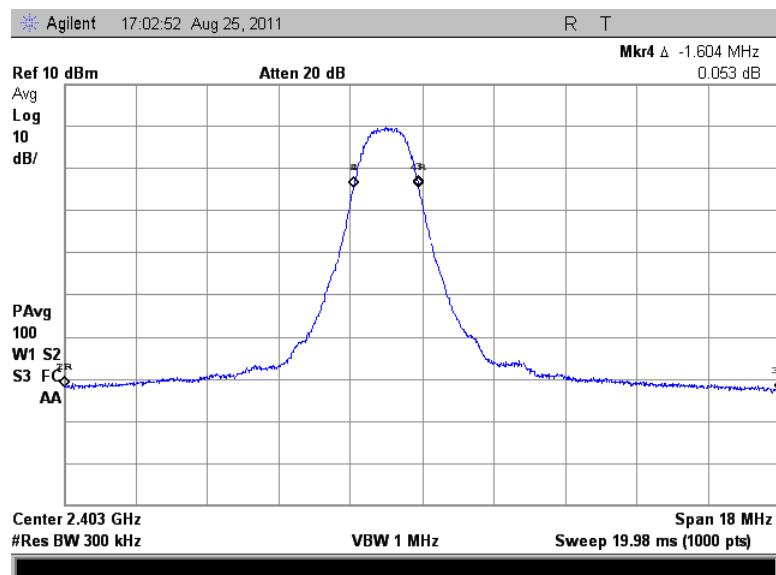


Figure 7.4.4.2-6: 99% OBW High Channel (GFSK)

Table 7.4.4.2-2: 20dB / 99% Bandwidth ($\pi/4$ DQPSK)

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
2402	1387	1604
2441	1381	1568
2480	1387	1568

**Figure 7.4.4.2-7: 20dB BW Low Channel ($\pi/4$ DQPSK)****Figure 7.4.4.2-8: 20dB BW Middle Channel ($\pi/4$ DQPSK)**

Figure 7.4.4.2-9: 20dB BW High Channel ($\pi/4$ DQPSK)Figure 7.4.4.2-10: 99% OBW Low Channel ($\pi/4$ DQPSK)

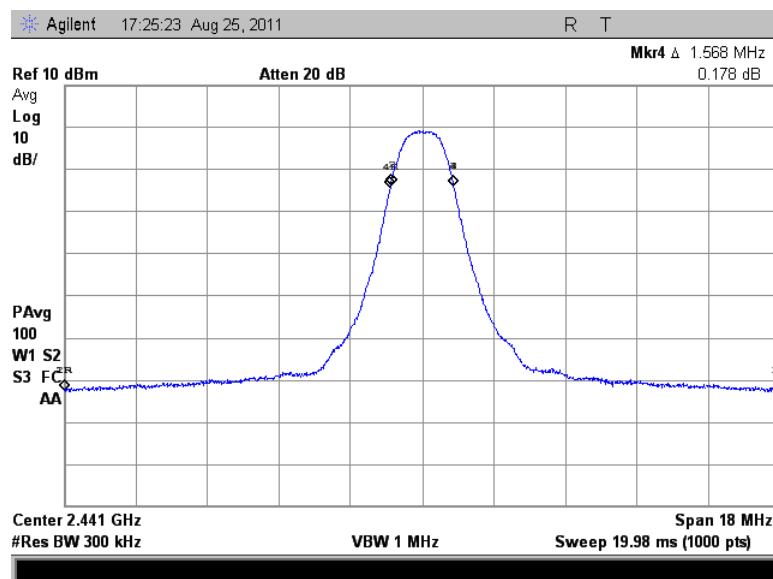


Figure 7.4.4.2-11: 99% OBW Middle Channel ($\pi/4$ DQPSK)

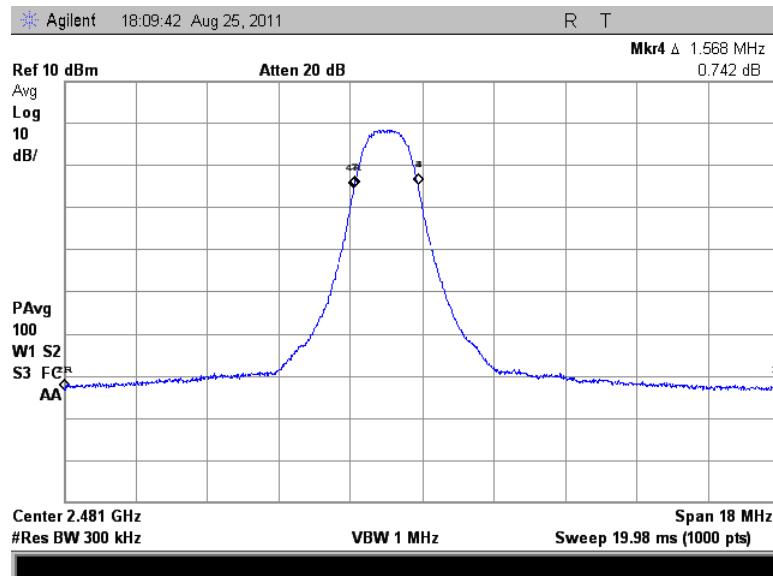


Figure 7.4.4.2-12: 99% OBW High Channel ($\pi/4$ DQPSK)

Table 7.4.4.2-3: 20dB / 99% Bandwidth (8DPSK)

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
2402	1372	1586
2441	1372	1568
2480	1366	1568

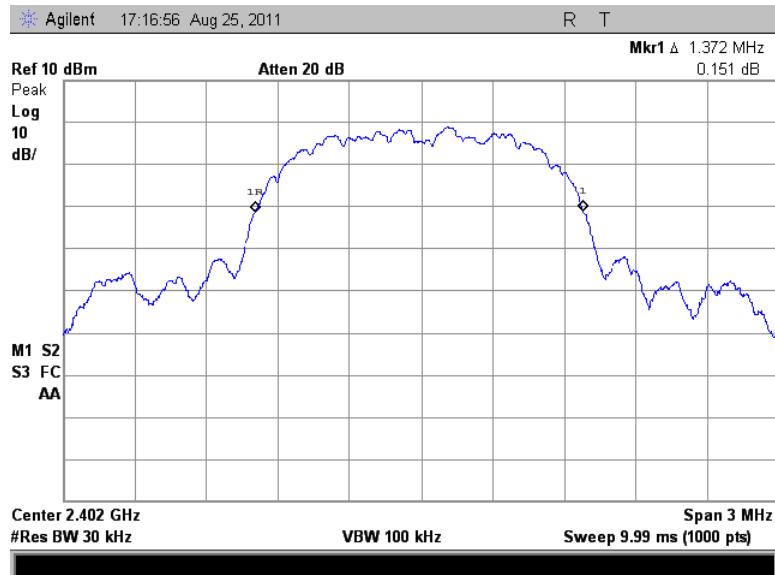


Figure 7.4.4.2-13: 20dB BW Low Channel (8DPSK)

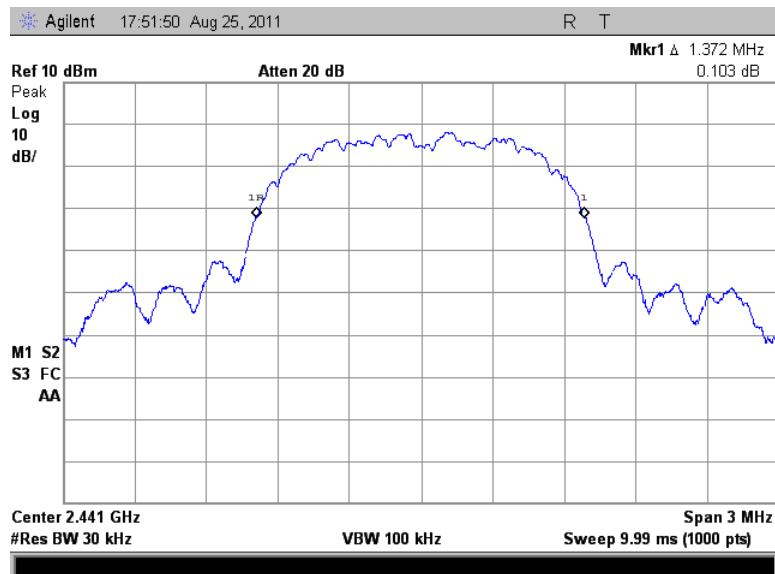


Figure 7.4.4.2-14: 20dB BW Middle Channel (8DPSK)

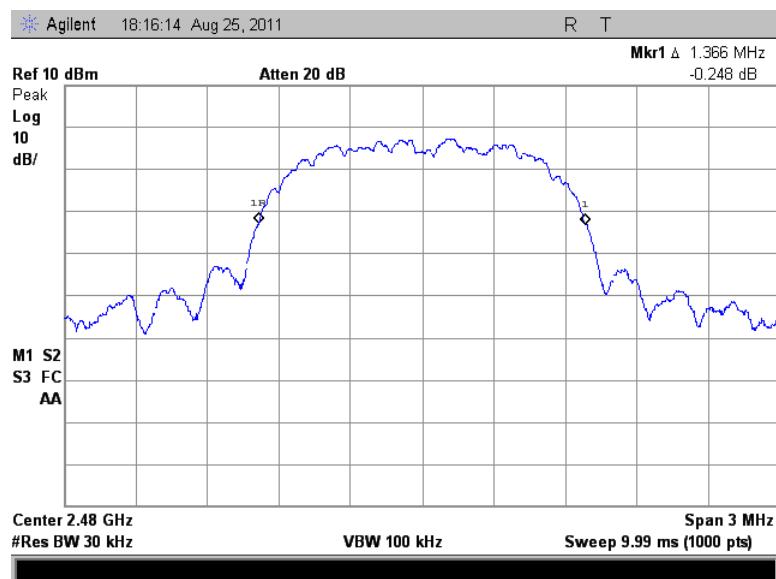


Figure 7.4.4.2-15: 20dB BW High Channel (8DPSK)

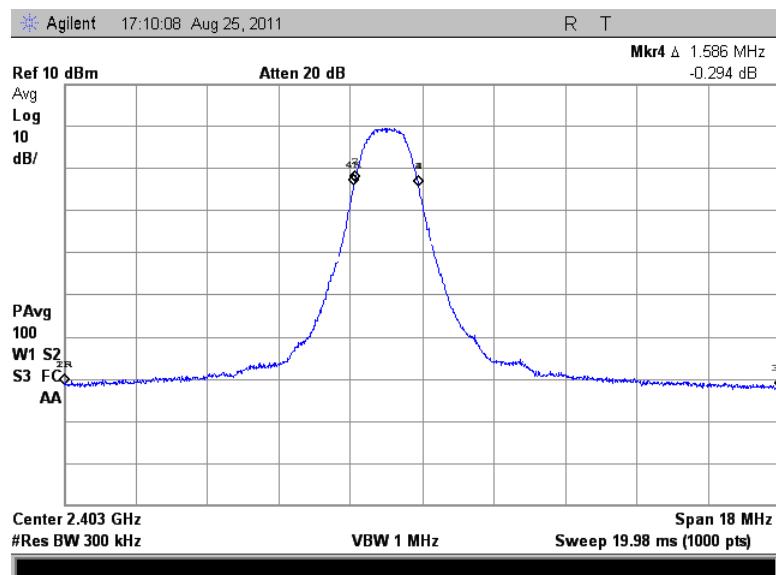


Figure 7.4.4.2-16: 99% OBW Low Channel (8DPSK)

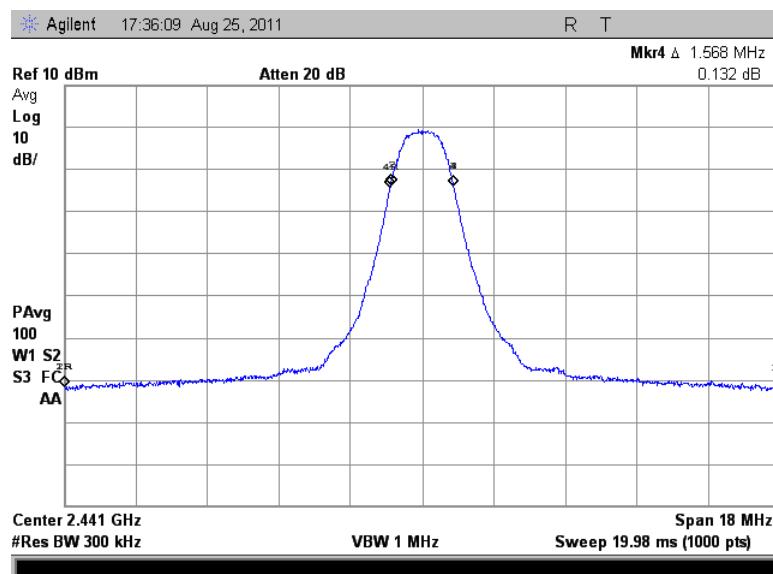


Figure 7.4.4.2-17: 99% OBW Middle Channel (8DPSK)

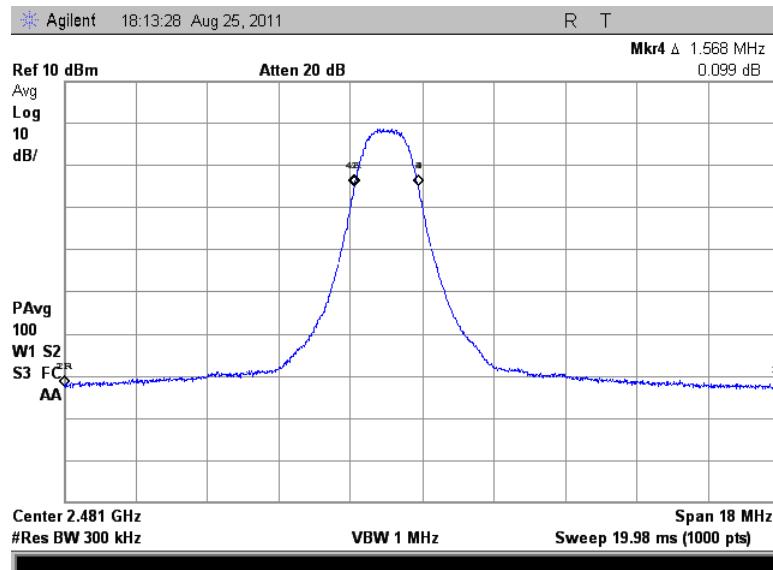


Figure 7.4.4.2-18: 99% OBW High Channel (8DPSK)

7.5 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC:RSS-210 A8.5

7.5.1 Band-Edge Compliance of RF Conducted Emissions

7.5.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, which is $\geq 1\%$ of the span, and the VBW was set to 300 kHz.

7.5.1.2 Measurement Results

Results are shown in Table 7.5.1.2-1 to Table 7.5.1.2-3 and Figure 7.5.1.2-1 to Figure 7.5.1.2-12 below.

Table 7.5.1.2-1: Conducted Band Edge - GFSK

	Measured Delta (dB)		Requirements	Band Edge	
	Single TX	Hopping Mode		Single TX	Hopping Mode
Lower Band-Edge	58.73	60.64	> 20 dB	Passed	Passed
Upper Band-Edge	56.65	58.21	>20dB	Passed	Passed

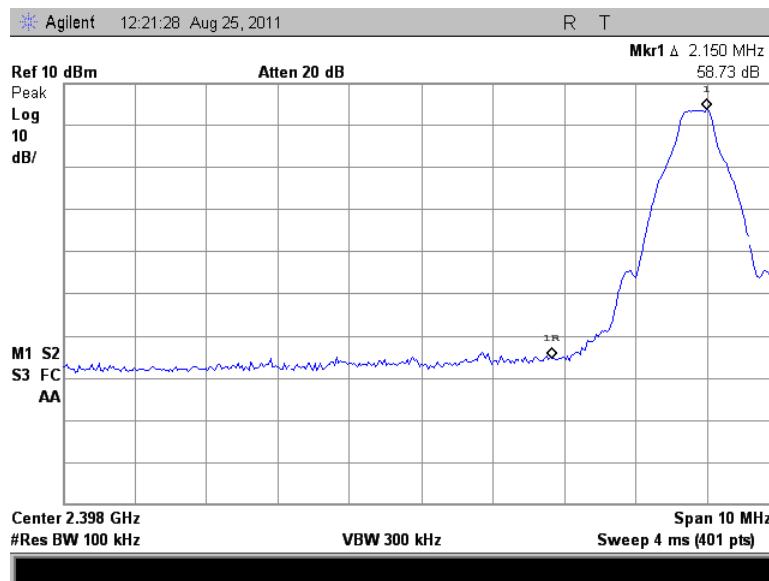


Figure 7.5.1.2-1: Lower Band-edge (GFSK)

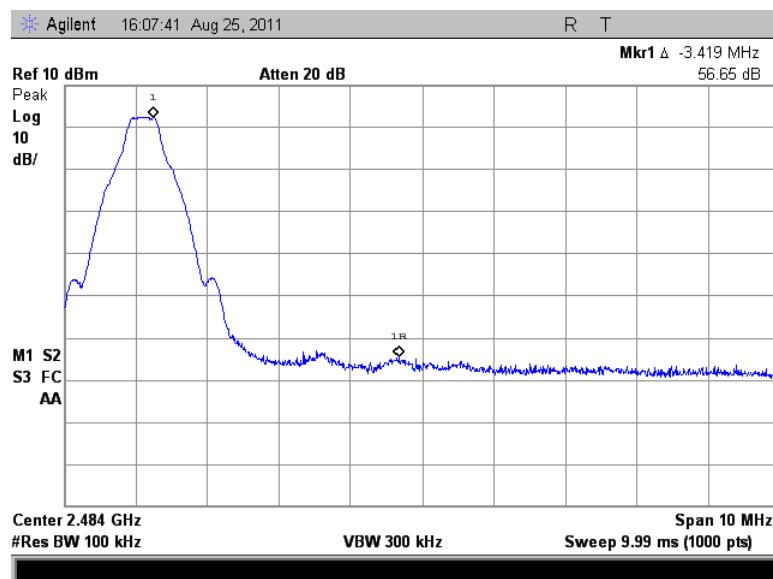


Figure 7.5.1.2-2: Upper Band-edge (GFSK)

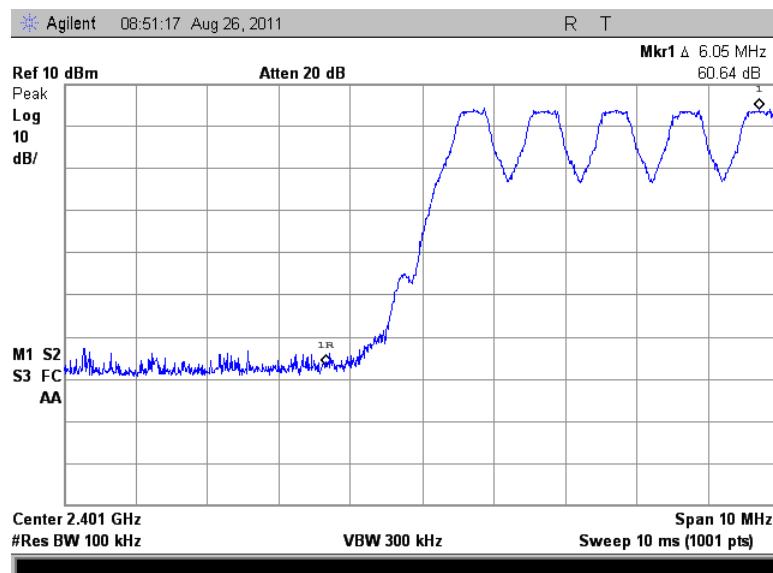


Figure 7.5.1.2-3: Lower Band-edge – Hopping Mode (GFSK)

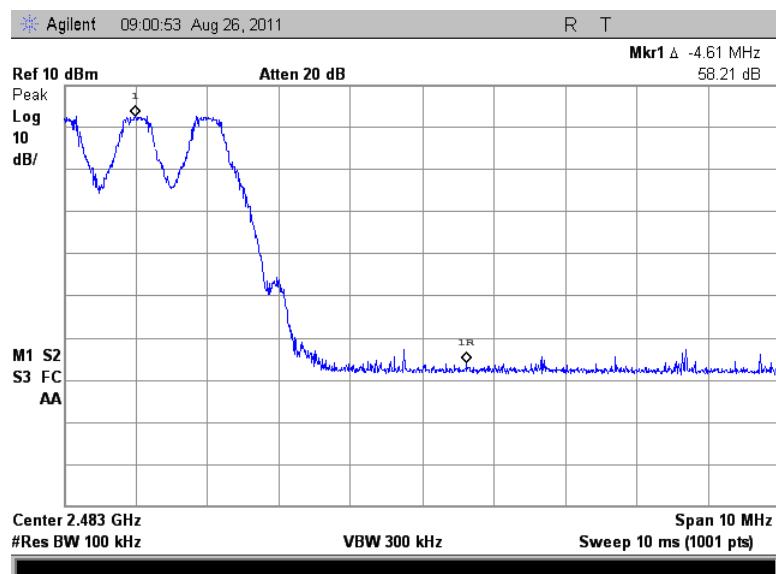


Figure 7.5.1.2-4: Upper Band-edge – Hopping Mode (GFSK)

Table 7.5.1.2-2: Conducted Band Edge - $\pi/4$ DQPSK

	Measured Delta (dB)		Requirements	Band Edge	
	Single TX	Hopping Mode		Single TX	Hopping Mode
Lower Band-Edge	47.80	53.47	> 20 dB	Passed	Passed
Upper Band-Edge	56.06	57.09	> 20 dB	Passed	Passed

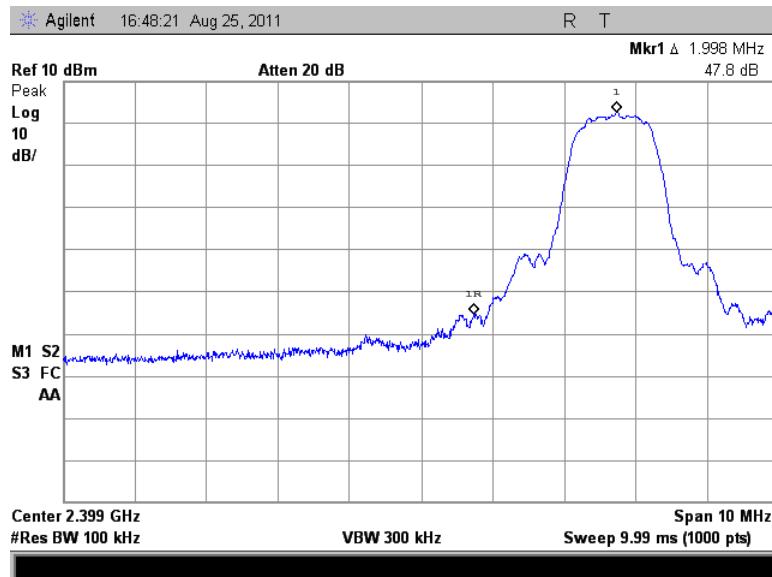
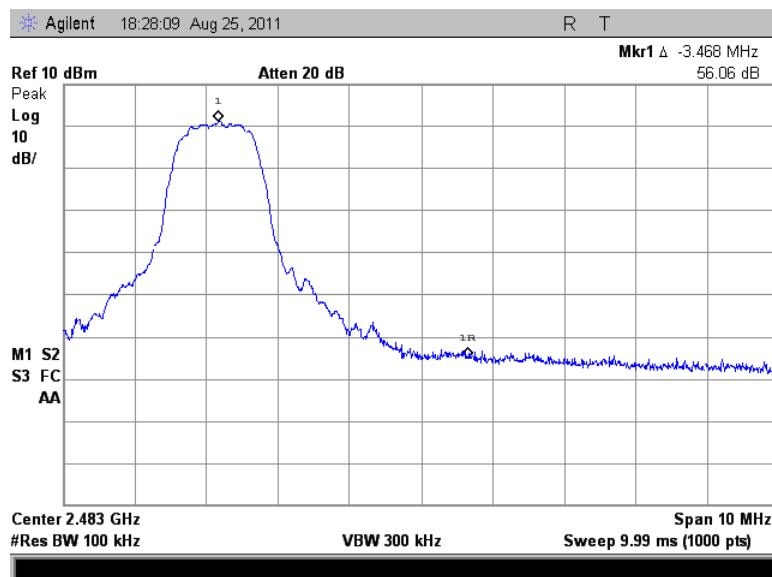
Figure 7.5.1.2-5: Lower Band-edge ($\pi/4$ DQPSK)Figure 7.5.1.2-6: Upper Band-edge ($\pi/4$ DQPSK)



Figure 7.5.1.2-7: Lower Band-edge – Hopping Mode ($\pi/4$ DQPSK)

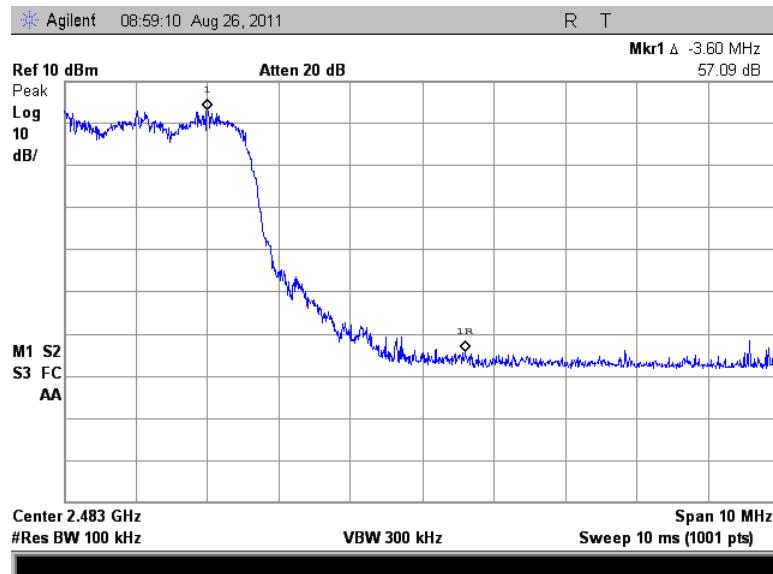


Figure 7.5.1.2-8: Upper Band-edge – Hopping Mode ($\pi/4$ DQPSK)

Table 7.5.1.2-3: Conducted Band Edge – 8DPSK

	Measured Delta (dB)		Requirements	Band Edge	
	Single TX	Hopping Mode		Single TX	Hopping Mode
Lower Band-Edge	48.53	50.05	> 20 dB	Passed	Passed
Upper Band-Edge	53.63	54.20	> 20 dB	Passed	Passed

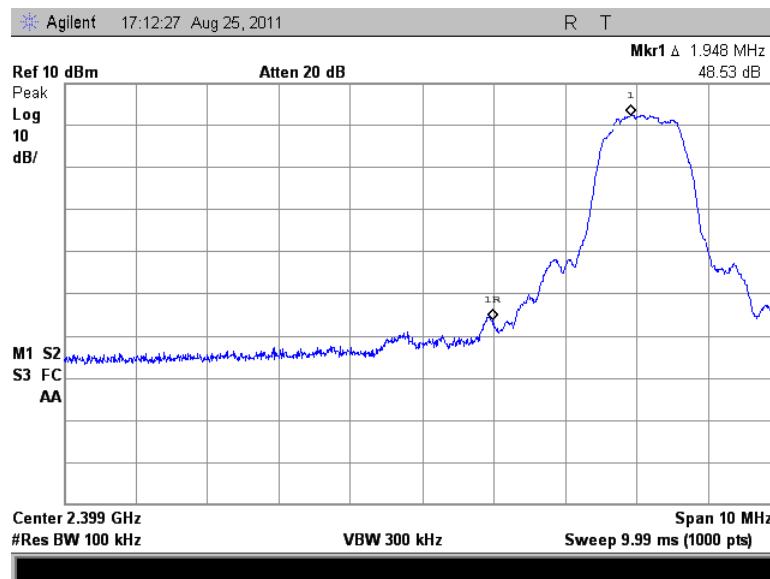


Figure 7.5.1.2-9: Lower Band-edge (8DPSK)

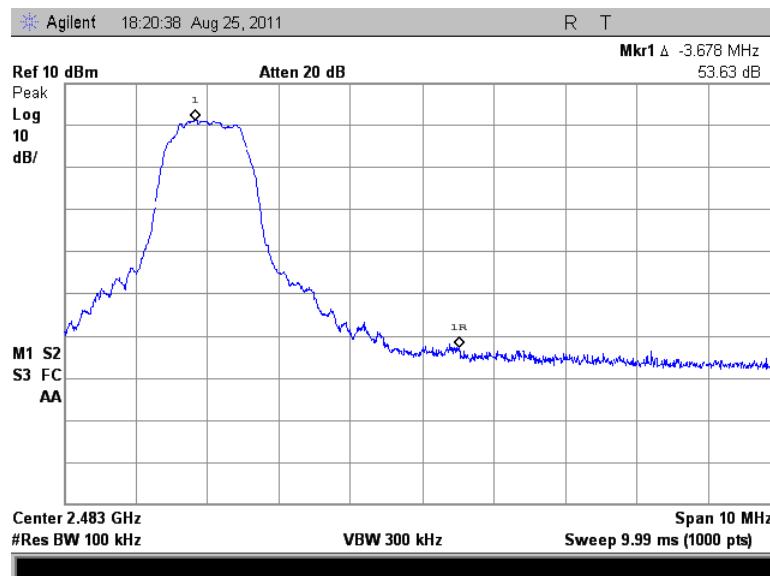


Figure 7.5.1.2-10: Upper Band-edge (8DPSK)

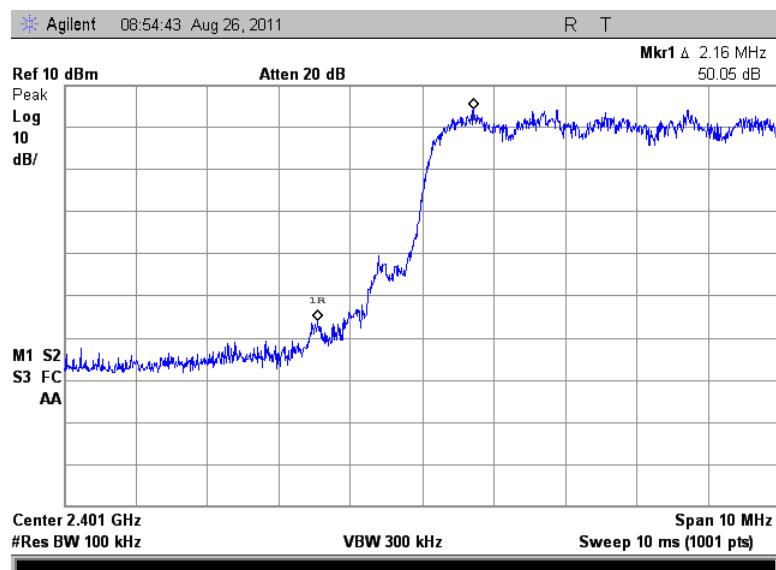


Figure 7.5.1.2-11: Lower Band-edge – Hopping Mode (8DPSK)

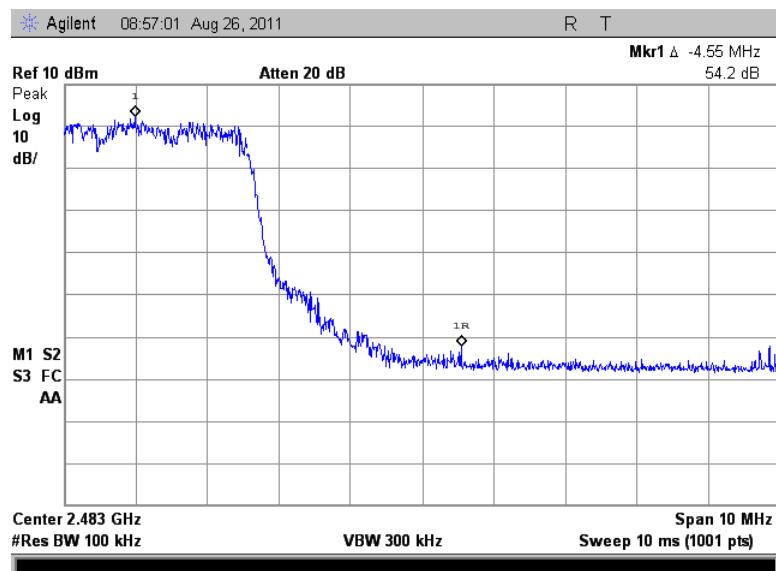


Figure 7.5.1.2-12: Upper Band-edge – Hopping Mode (8DPSK)

7.5.2 Band-Edge Compliance of Radiated Spurious Emissions

7.5.2.1 Measurement Procedure

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated mark-delta method. The radiated field strength of the fundamental emission was first determined and then the mark-delta method was used to determine the field strength of the band-edge emission

7.5.2.2 Measurement Results

Band-edge compliance is displayed in Table 7.5.2.2-1 to Table 7.5.2.2-3 and Figure 7.5.2.2-1 to Figure 7.5.2.2-6.

Table 7.5.2.2-1: Upper Band-edge – GFSK

Frequency (MHz)	Uncorrected Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Fundamental Level (dBuV/m)		Marker- Delta (dB)	Band-Edge Level (dBuV/m)		Margin to Limits (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg		pk	Qpk/Avg	pk	Qpk/Avg
	2480	103.20	102.00	H	-3.39	99.81	98.61	58.35	41.46	40.26	32.54
2480	102.70	101.50	V	-3.39	99.31	98.11	57.34	41.97	40.77	32.03	13.23

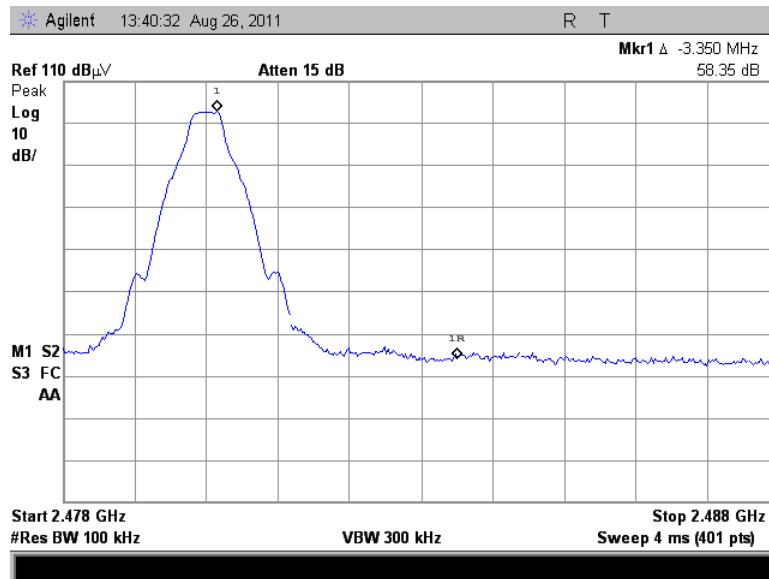


Figure 7.5.2.2-1: Upper Band-edge (GFSK - Horizontal)

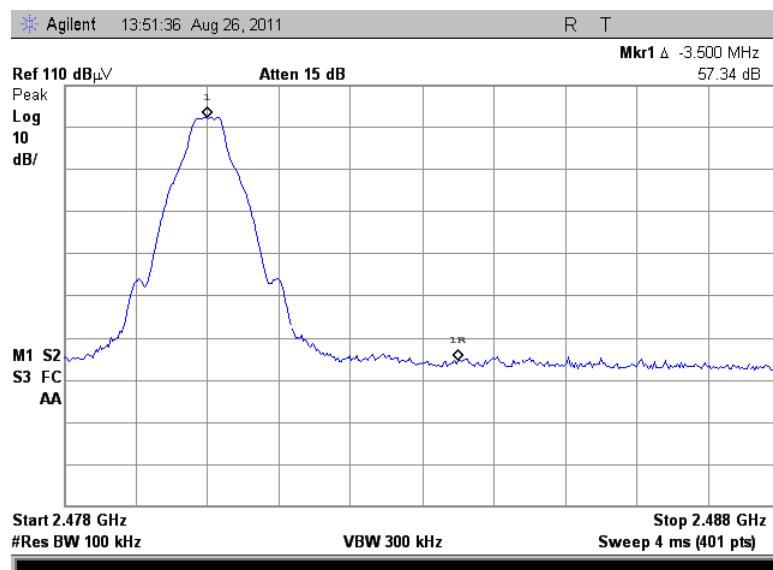


Figure 7.5.2.2-2: Upper Band-edge (GFSK - Vertical)

Table 7.5.2.2-2: Upper Band-edge – $\pi/4$ DQPSK

Frequency (MHz)	Uncorrected Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Fundamental Level (dBuV/m)		Marker- Delta (dB)	Band-Edge Level (dBuV/m)		Margin to Limits (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg		pk	Qpk/Avg	pk	Qpk/Avg
2480	105.50	101.40	H	-3.39	102.11	98.01	53.82	48.29	44.19	25.71	9.81
2480	104.20	100.10	V	-3.39	100.81	96.71	54.35	46.46	42.36	27.54	11.64

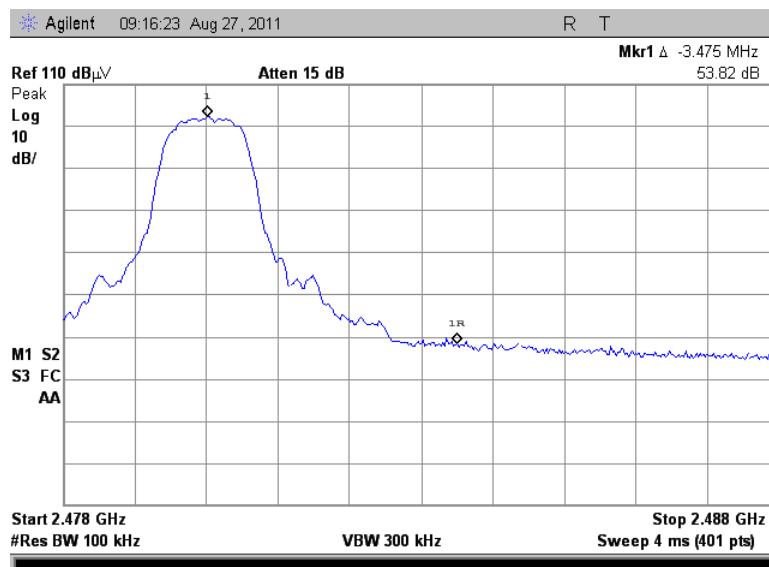
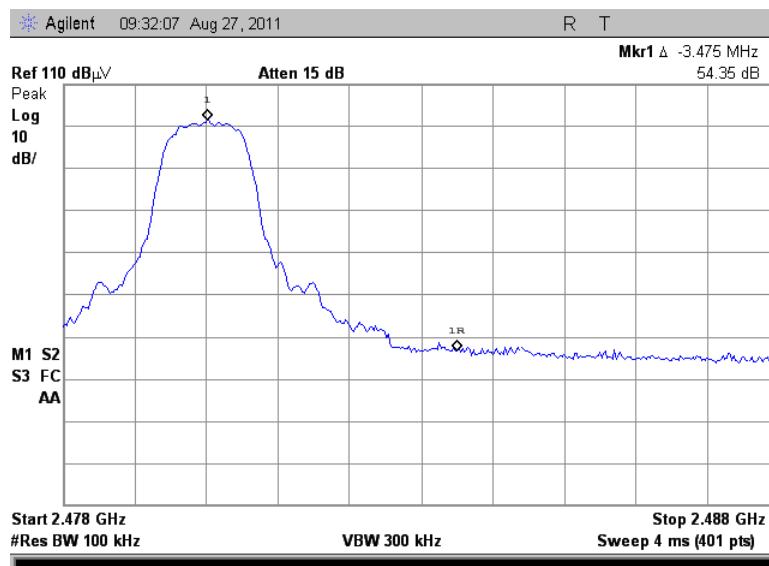
Figure 7.5.2.2-3: Upper Band-edge ($\pi/4$ DQPSK - Horizontal)Figure 7.5.2.2-4: Upper Band-edge ($\pi/4$ DQPSK - Vertical)

Table 7.5.2.2-3: Upper Band-edge – 8DPSK

Frequency (MHz)	Uncorrected Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Fundamental Level (dBuV/m)		Marker- Delta (dB)	Band-Edge Level (dBuV/m)		Margin to Limits (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg		pk	Qpk/Avg	pk	Qpk/Avg
2480	106.00	102.10	H	-3.39	102.61	98.71	53.83	48.78	44.88	25.22	9.12
2480	104.20	100.30	V	-3.39	100.81	96.91	53.51	47.30	43.40	26.70	10.60

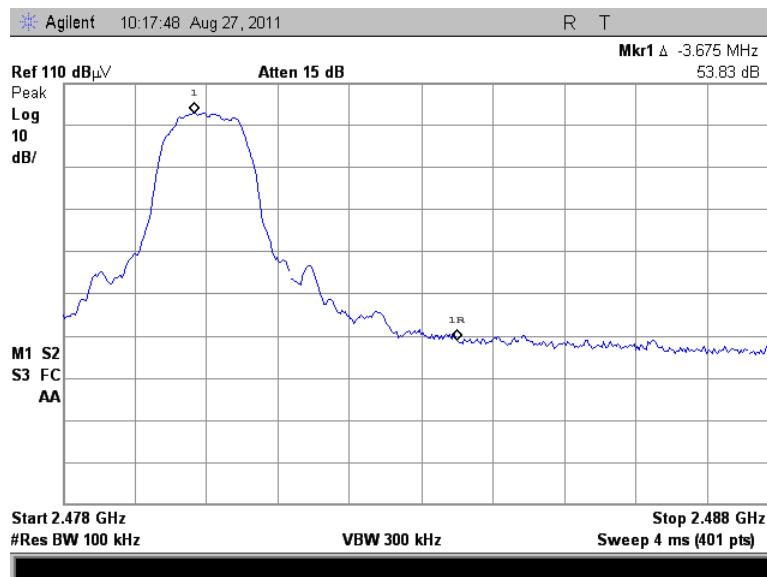


Figure 7.5.2.2-5: Upper Band-edge (8DPSK- Horizontal)

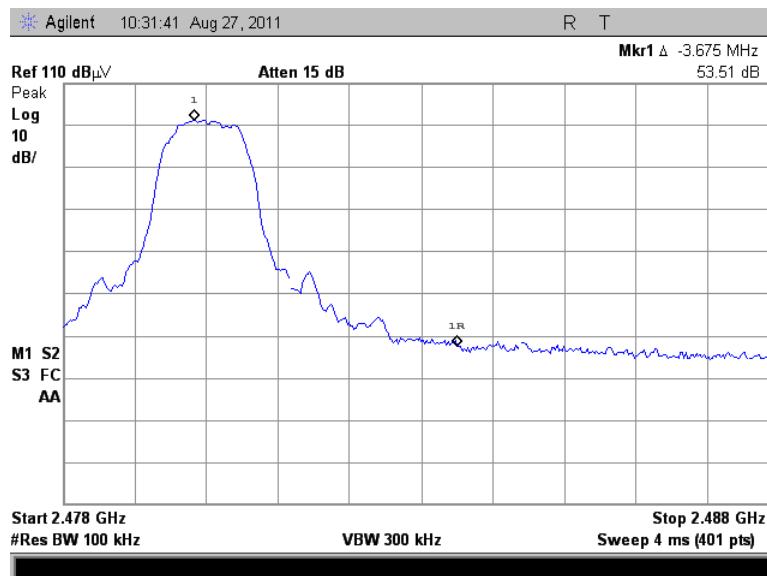


Figure 7.5.2.2-6: Upper Band-edge (8DPSK - Horizontal)

7.5.3 RF Conducted Spurious Emissions

7.5.3.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 26 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz. A peak detector function was used with the trace set to max hold.

7.5.3.2 Measurement Results

Results are shown below in Figure 7.5.3.2-1 to Figure 7.5.3.2-18:

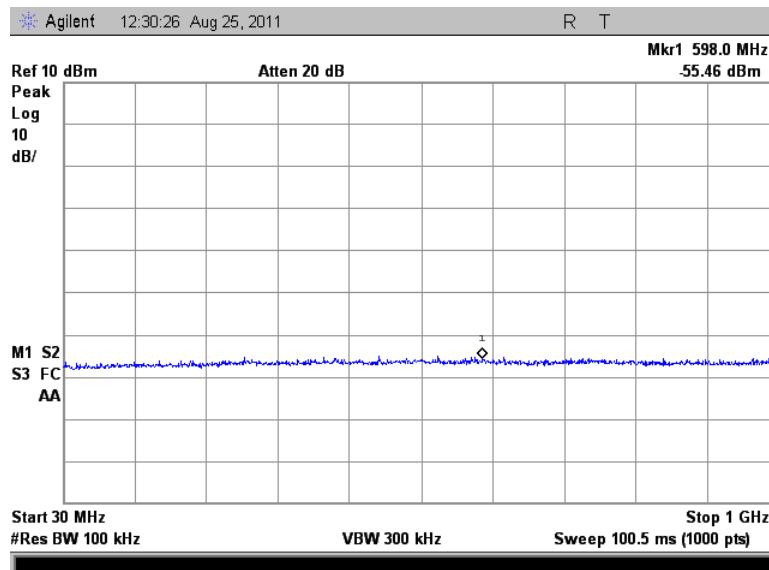


Figure 7.5.3.2-1: 30 MHz – 1 GHz – Low Channel (GFSK)

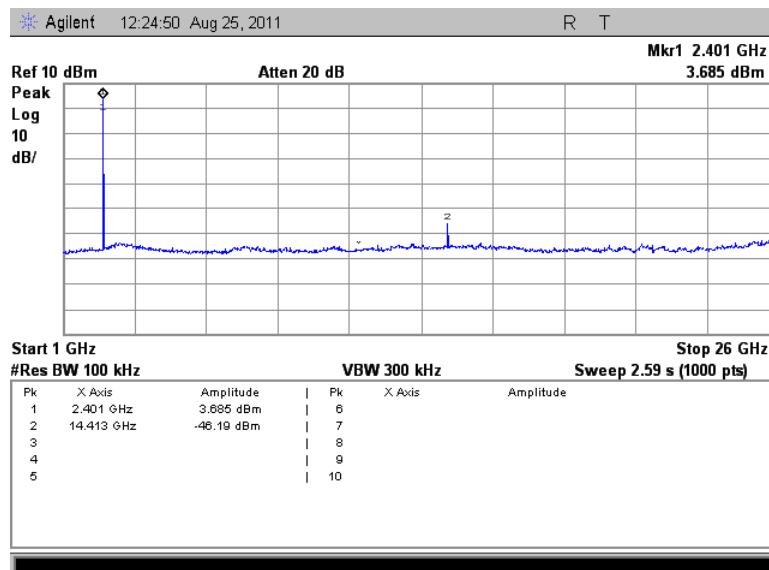


Figure 7.5.3.2-2: 1 GHz –26 GHz – Low Channel (GFSK)

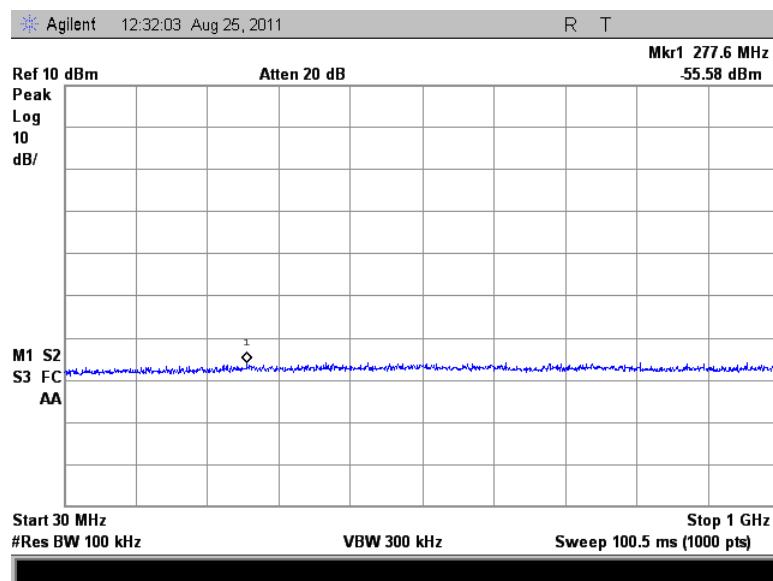


Figure 7.5.3.2-3: 30 MHz – 1 GHz – Middle Channel (GFSK)

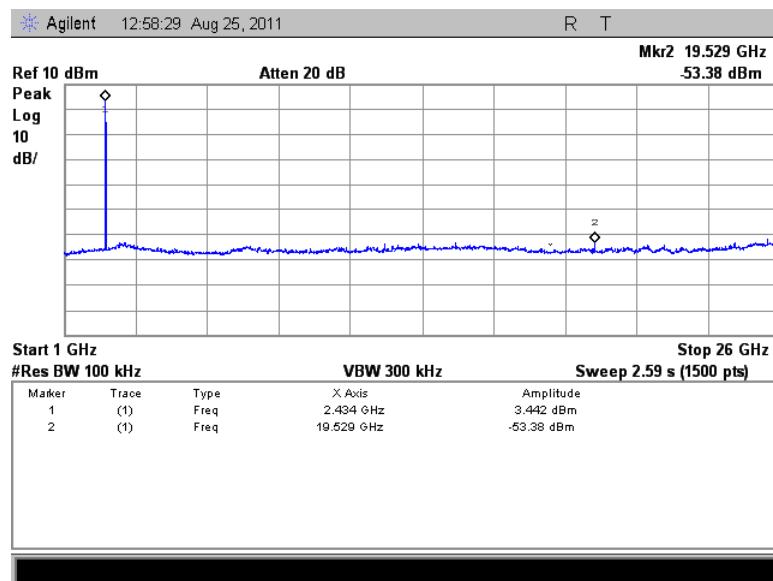


Figure 7.5.3.2-4: 1 GHz – 26 GHz – Middle Channel (GFSK)

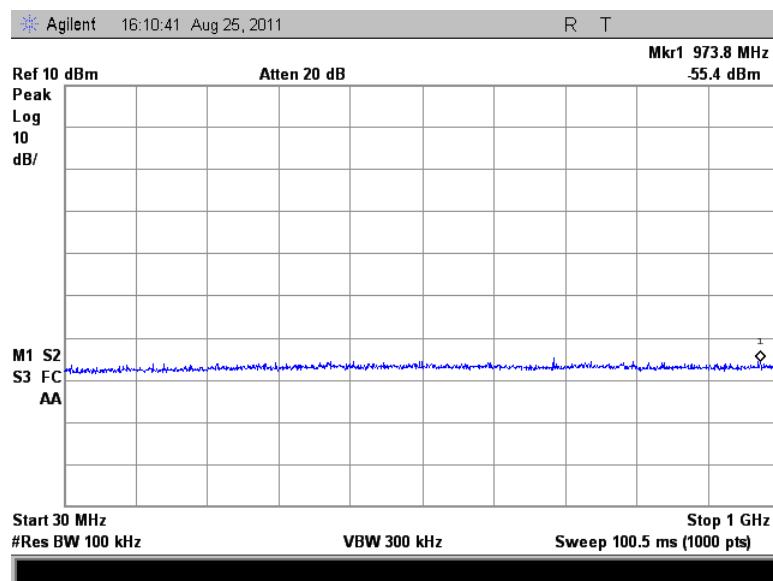


Figure 7.5.3.2-5: 30 MHz – 1 GHz – High Channel (GFSK)

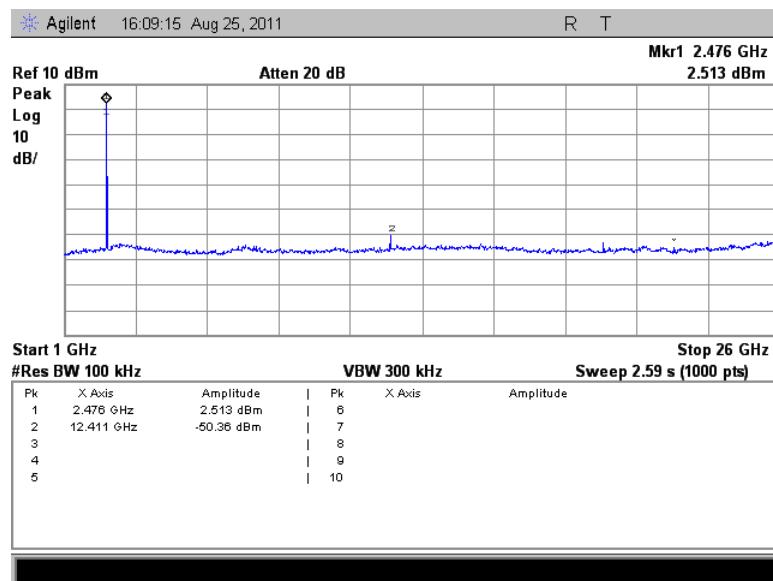
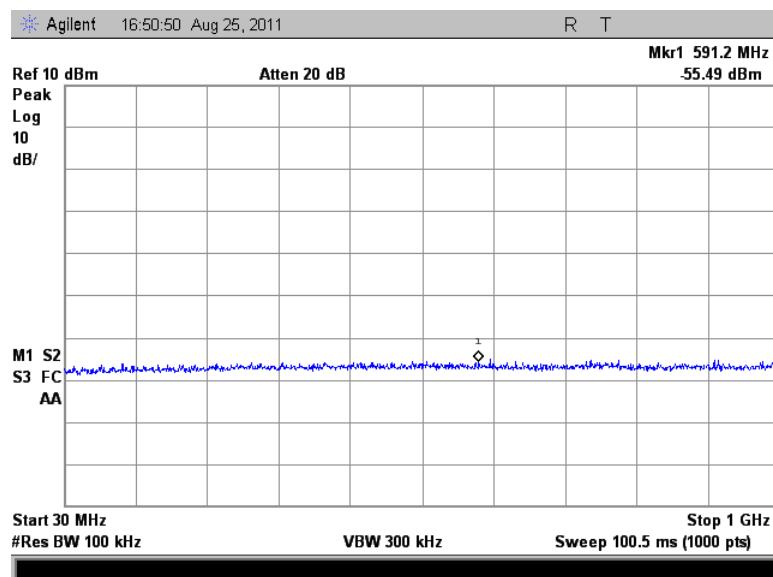
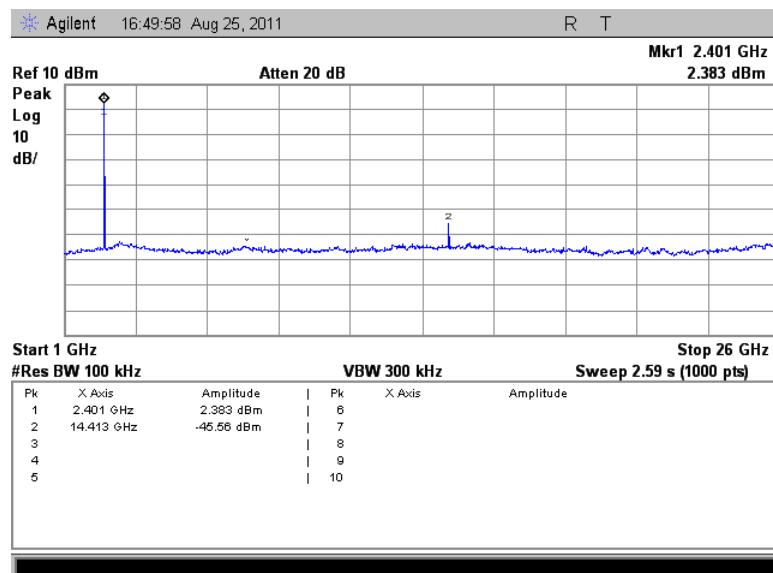
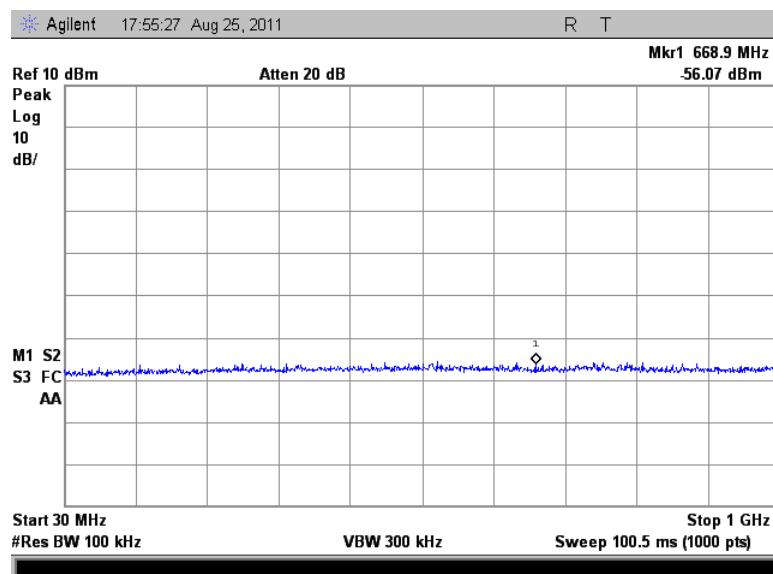
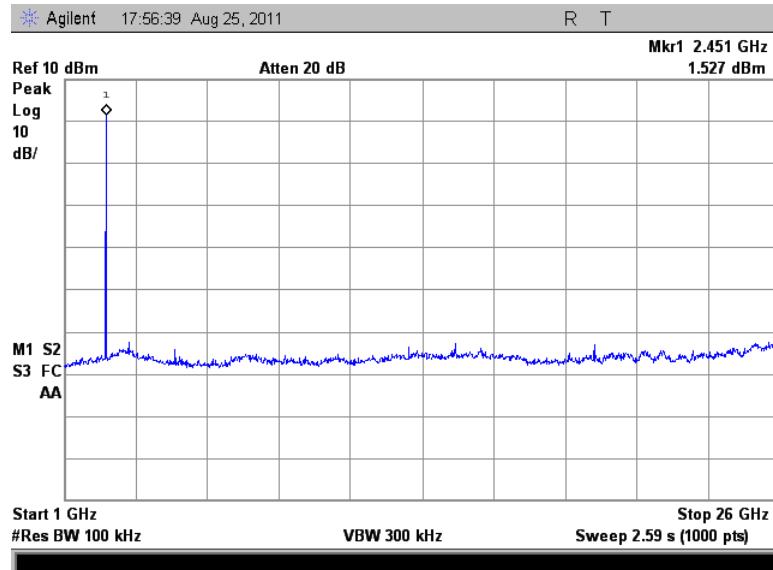
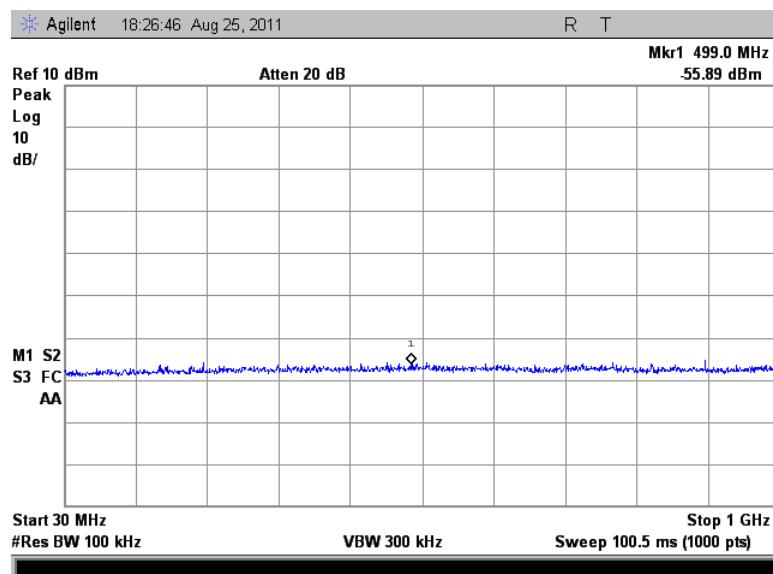
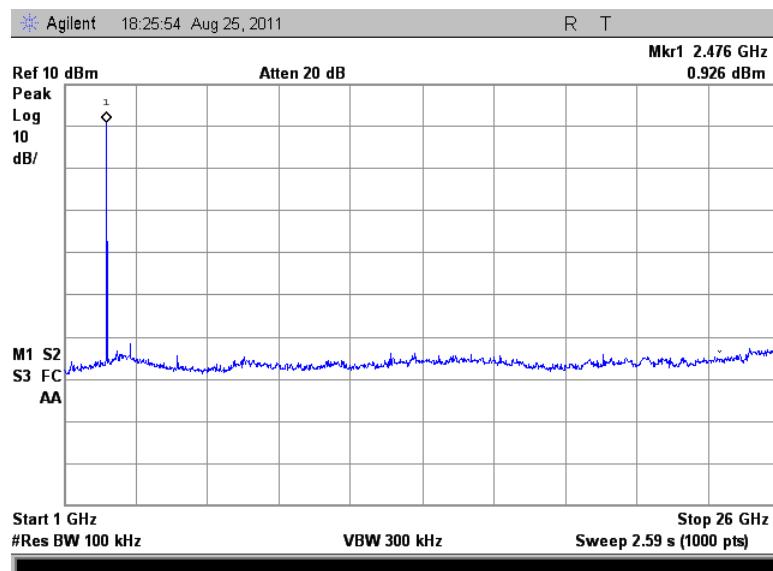


Figure 7.5.3.2-6: 1 GHz –26 GHz –High Channel (GFSK)

Figure 7.5.3.2-7: 30 MHz – 1 GHz – Low Channel ($\pi/4$ DQPSK)Figure 7.5.3.2-8: 1 GHz – 26 GHz – Low Channel ($\pi/4$ DQPSK)

Figure 7.5.3.2-9: 30 MHz – 1 GHz – Middle Channel ($\pi/4$ DQPSK)Figure 7.5.3.2-10: 1 GHz – 26 GHz – Middle Channel ($\pi/4$ DQPSK)

Figure 7.5.3.2-11: 30 MHz – 1 GHz – High Channel ($\pi/4$ DQPSK)Figure 7.5.3.2-12: 1 GHz –26 GHz –High Channel ($\pi/4$ DQPSK)

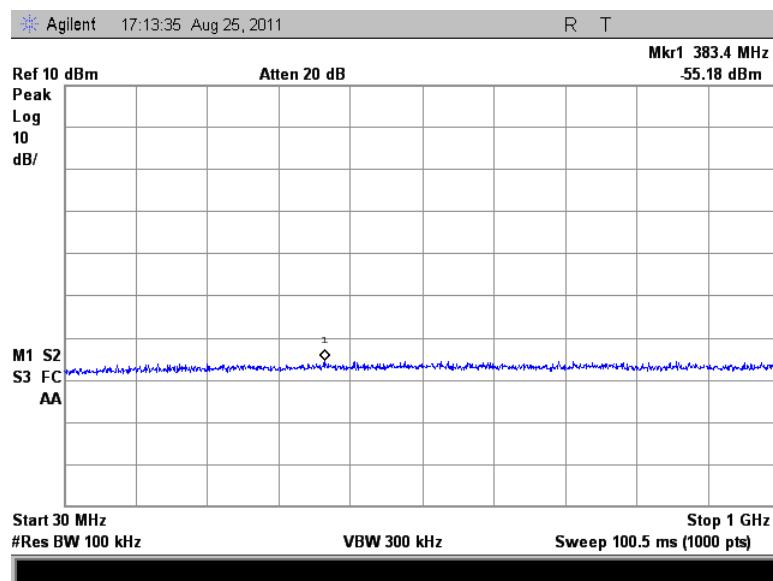


Figure 7.5.3.2-13: 30 MHz – 1 GHz – Low Channel (8DPSK)

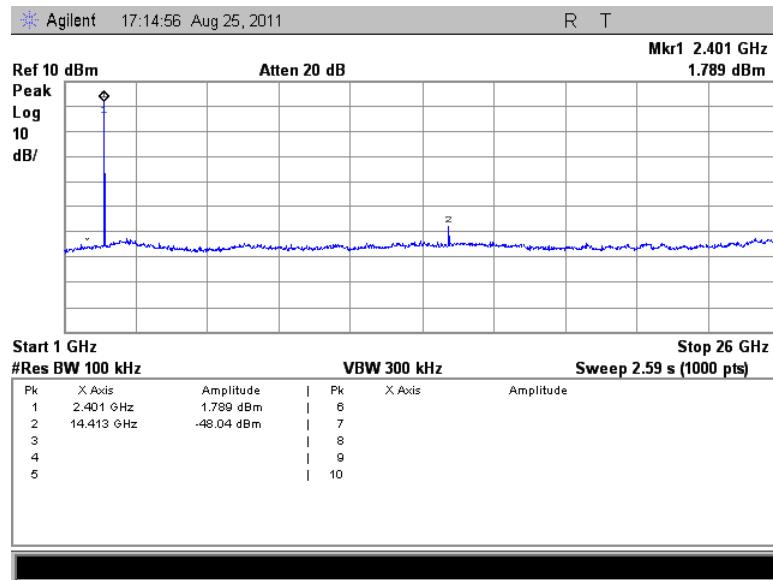


Figure 7.5.3.2-14: 1 GHz – 26 GHz – Low Channel (8DPSK)

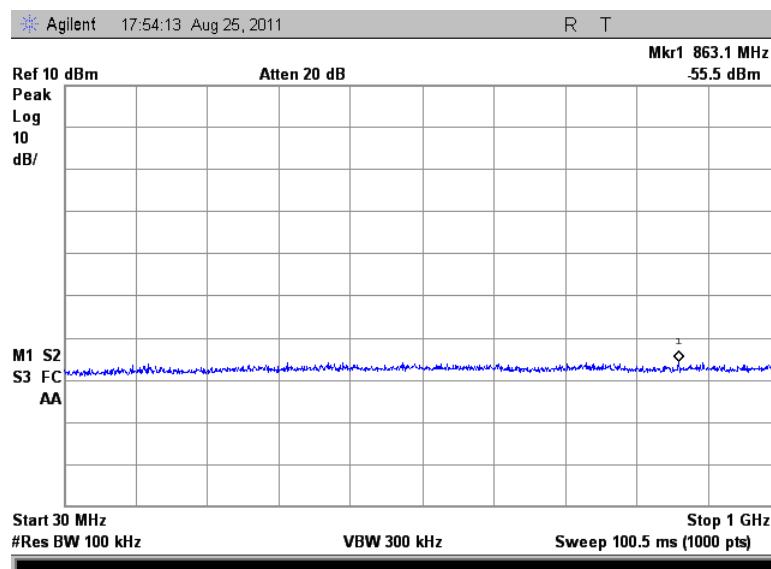


Figure 7.5.3.2-15: 30 MHz – 1 GHz –Middle Channel (8DPSK)

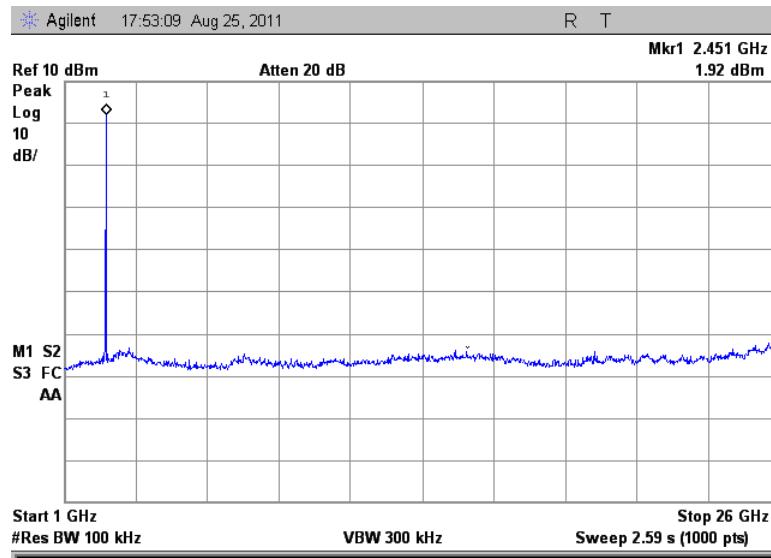


Figure 7.5.3.2-16: 1 GHz –26 GHz – Middle Channel (8DPSK)

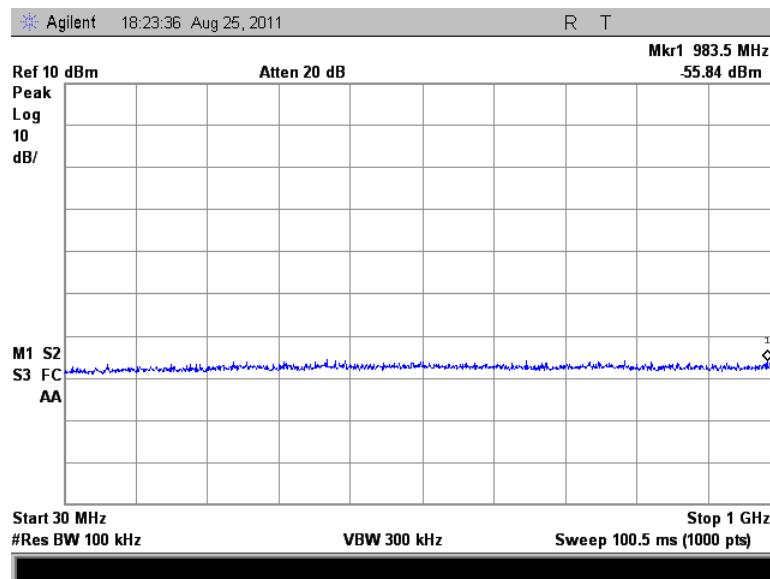


Figure 7.5.3.2-17: 30 MHz – 1 GHz – High Channel (8DPSK)

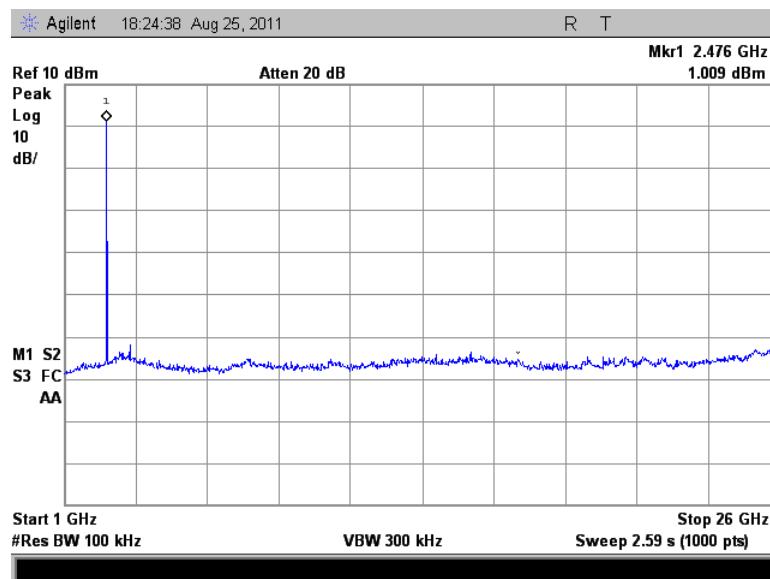


Figure 7.5.3.2-18: 1 GHz – 26 GHz – High Channel (8DPSK)

7.5.4 Radiated Spurious Emissions - FCC Section 15.205 IC: RSS-Gen 7.2.5

7.5.4.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 26GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements made with RBW and VBW of 1 MHz and 3MHz respectively.

The EUT was caused to generate a continuous carrier signal on the hopping channel.

7.5.4.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 26 GHz are reported in the Tables 7.5.4.2-1 to 7.5.4.2-3 below.

Table 7.5.4.2-1: Radiated Spurious Emissions Tabulated Data - GFSK

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel 2402 MHz										
19216	45.56	34.79	H	9.24	54.80	44.03	83.5	63.5	28.70	19.50
19216	45.41	33.28	V	9.24	54.65	42.52	83.5	63.5	28.90	21.00
Middle Channel 2441 MHz										
Noise Floor										
High Channel 2480 MHz										
Noise Floor										

* Notes:

All emissions above 19216 MHz were attenuated below the permissible limit.

The limits are corrected for 1m measurements using the distance factor $20 \log(3)$ dB

Table 7.5.4.2-2: Radiated Spurious Emissions Tabulated Data – ($\pi/4$) DQPSK

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel 2402 MHz										
19216	47.72	35.79	H	9.24	56.96	45.03	83.5	63.5	26.50	18.50
19216	45.57	33.80	V	9.24	54.81	43.04	83.5	63.5	28.70	20.50
Middle Channel 2441 MHz										
Noise Floor										
High Channel 2480 MHz										
Noise Floor										

* Notes:

All emissions above 19216 MHz were attenuated below the permissible limit.

The limits are corrected for 1m measurements using the distance factor $20 \log(3)$ dB

Table 7.5.4.2-3: Radiated Spurious Emissions Tabulated Data – 8DPSK

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel 2402 MHz										
19216	47.07	35.19	H	9.24	56.31	44.43	83.5	63.5	27.20	19.10
19216	45.92	33.56	V	9.24	55.16	42.80	83.5	63.5	28.30	20.70
Middle Channel 2441 MHz										
Noise Floor										
High Channel 2480 MHz										
Noise Floor										

* Notes:

All emissions above 19216 MHz were attenuated below the permissible limit.

The limits are corrected for 1m measurements using the distance factor $20 \log(3)$ dB

7.5.4.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF _T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R _U	=	Uncorrected Reading
R _C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: 45.56 + 9.24 = 54.80dBuV/m

Margin: 83.5 dBuV/m - 54.80dBuV/m = 28.7dB

Example Calculation: Average

Corrected Level: 34.79 + 9.24 - 0 = 44.03dBuV

Margin: 63.5BuV - 44.03dBuV = 19.5dB

8 CONCLUSION

In the opinion of ACS, Inc. the Mototrbo Elite, manufactured by Motorola Solutions, Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT