

# Dynamic Frequency Selection Test Report

**EUT Name:** IPTV WIFI SET TOP BOX

**Model No.:** VIP5662W

CFR 47 Part 15.407 2015 and RSS 247: 2015

*Prepared for:*

Chris Rubis  
ARRIS Group  
6450 Sequence Drive  
San Diego, CA 92121  
Tel: (858) 404 3570

*Prepared by:*

TUV Rheinland of North America, Inc.  
1279 Quarry Lane  
Pleasanton, CA 94566  
Tel: (925) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

*Report/Issue Date:* 02 November 2015  
*Report Number:* 31563064.001 Rev1

## Revisions

<b>Revision No.</b>	<b>Date MM/DD/YYYY</b>	<b>Reason for Change</b>	<b>Author</b>
0	10/24/2015	Original Document	N/A
1	11/2/2015	Updated Power table as per clients request	SK

Note: Latest revision report will replace all previous reports.

This report is prepared by:

Suresh Kondapalli

David Spencer

Test Engineer  
Date: Nov 02, 2015

Lab Manager  
Date Nov 02, 2015,

# 1 Dynamic Frequency Selection

Testing was performed in accordance with CFR47 Part 15.407 (h). These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures and verifies the characteristics and probability of EUT to switch to different operating channel, once the radar signal is detected. Procedures described in FCC-06-96A1 were used.

## 1.1 DFS Applicability

*All devices operated in the frequency range of 5250 MHz-5350 MHz and 5470 MHz-5725MHz must equip with the DFS mechanism. Base on the operational mode of VIP5662W the following requirements shall apply per FCC-06-96A1 procedures.*

**Table 1:** Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

**Table 2:** Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client w/o Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

## 1.2 DFS Requirements

Base on the applicability of VIP5662W, the following parameters and probability must be tested for conformance.

**Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection**

Maximum Transmit Power	Value
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

**Table 4: DFS Response Requirement Values**

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds. See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 80% of the U-NII 99% transmission power Bandwidth. See Note 3.

**Note 1:** The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

**Table 5: Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See	See
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a  Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	Roundup {(1/360)x (19x10E6/PRI uS	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

Details are available in 905462 D02 UNII DFS Compliance Procedures New Rules v01r01

**Table 6: Long Pulse Radar Test Waveform**

<b>Radar Type</b>	<b>Pulse Width (µsec)</b>	<b>Chirp Width (MHz)</b>	<b>PRI (µsec)</b>	<b>Number of Pulses per Burst</b>	<b>Number of Bursts</b>	<b>Minimum Percentage of Successful Detection</b>	<b>Minimum Number of Trials</b>
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


**Table 7: Frequency Hopping Radar Test Waveform**

<b>Radar Type</b>	<b>Pulse Width (µsec)</b>	<b>PRI (µsec)</b>	<b>Pulses per Hop</b>	<b>Hopping Rate (kHz)</b>	<b>Hopping Sequence Length (msec)</b>	<b>Minimum Percentage of Successful Detection</b>	<b>Minimum Number of Trials</b>
6	1	333	9	0.333	300	70%	30

### 1.3 Test Setup Protocol

The following test setup was used to evaluate the IPTV WIFI SET TOP BOX for DFS conformance.

Dynamic Frequency Selection in Block Diagram: Radiated Setup

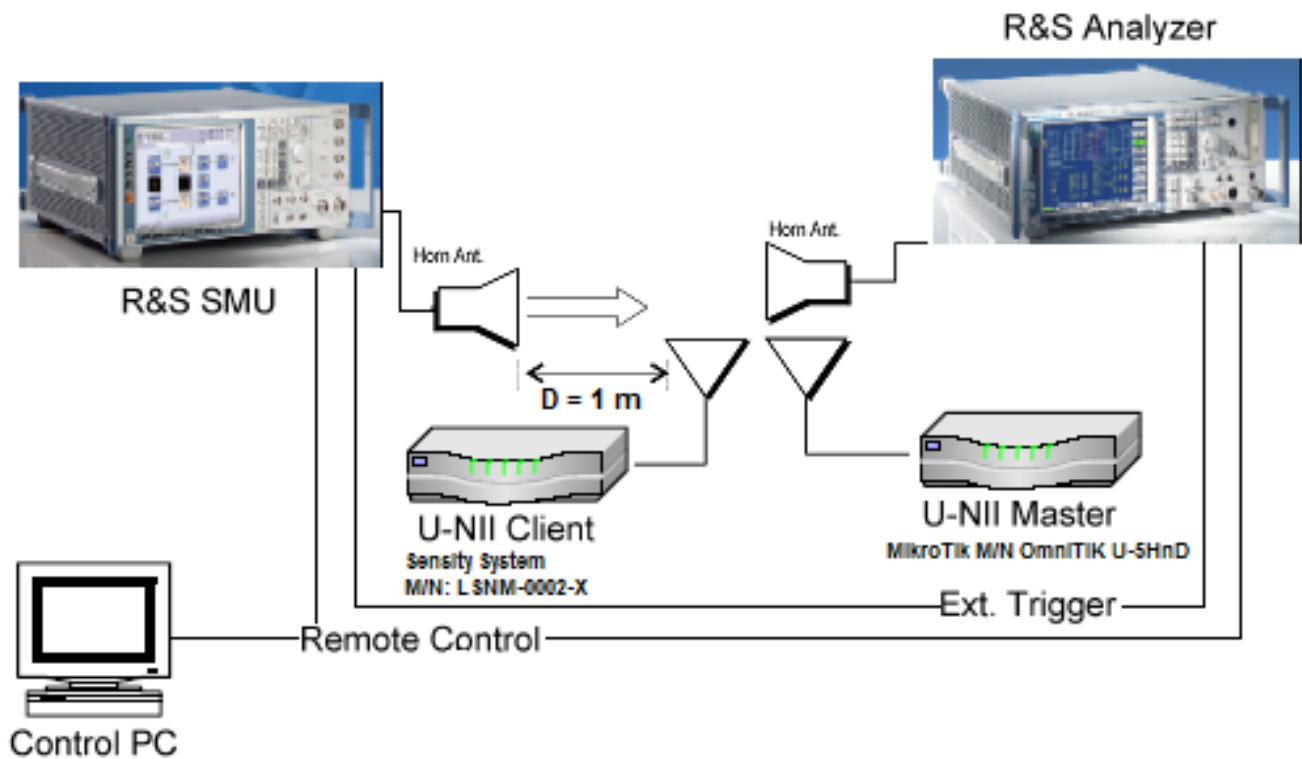

Simplified Block diagram of Dynamic Frequency Selection Testing

### 1.4 Radar Waveform Verifications

The radar signal level must be -60 dBm (-64 dBm+ 3dB +1dB).

Note:

3dB is added for minimum antenna gain for Host Device to insure that the Radar-Injection-Level is above the AP-Detection-Threshold-Level

These waveforms were compensated for the path loss as offset on spectrum analyzer.

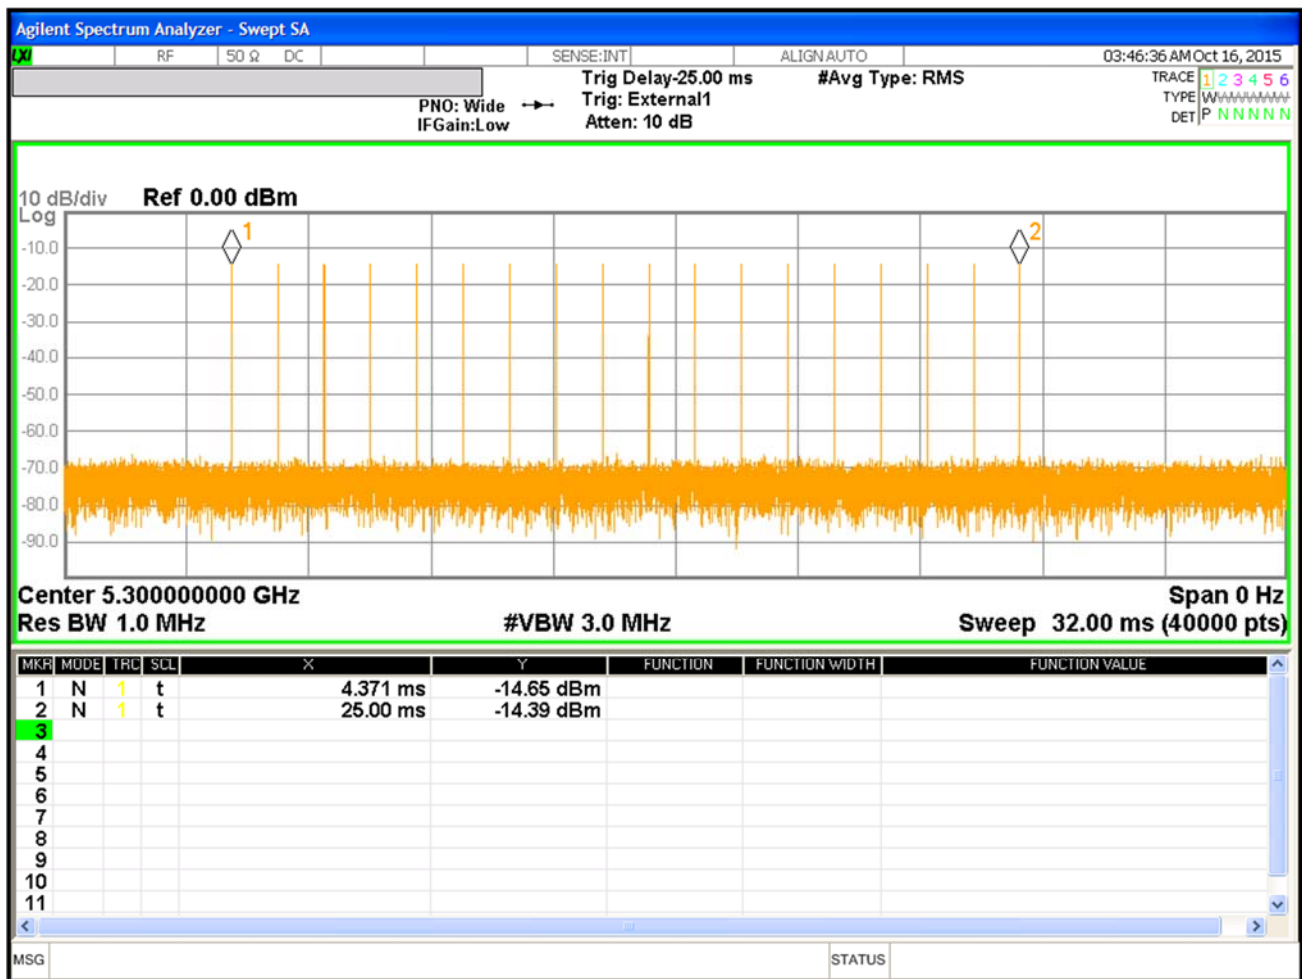


Figure 1: 5300 MHz Radar Pulse Type 0 at Master



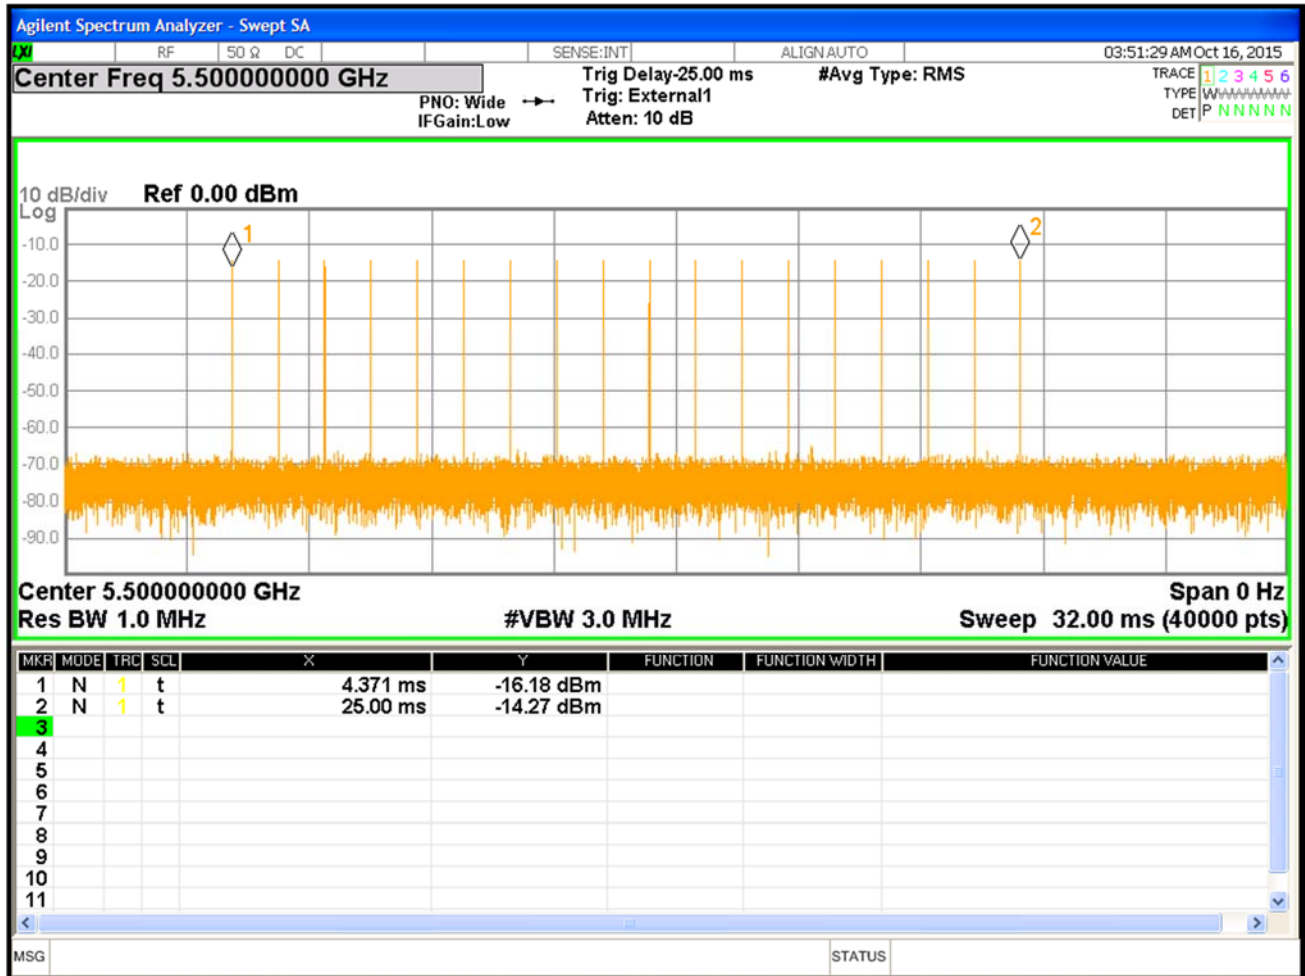


Figure 2: 5500 MHz Radar Pulse Type 0 at Master

## 1.5 In-Service Monitoring

*In-service monitoring performance checks consist of the channel move time, channel Closing transmission time, and non-occupancy period. These parameters of the WIFI 802.11AC 4X4 5GHZ WIRELESS SETTOP BOX is verified to give the radar system the priority of the frequency Band and minimize the interference with nearby radar systems when the WIFI 802.11AC 4X4 5GHZ WIRELESS SETTOP BOX is being used.*


*The IPTV WIFI SET TOP BOX is a client device without any radar detection.*

The verified Pulse #0 was conductively injected to the above test circuit. Since Arris VAP3400 series Wireless Access Point was qualified for DFS, the IPTV WIFI SET TOP BOX was evaluated with the Arris VAP3400 series Wireless Access Point as a whole network system for conformance to the channel move time and channel closing transmission time.

As originally tested, the IPTV WIFI SET TOP BOX was found to be compliant to the requirements of the test standard(s).

**Table 8: DFS Response – Test Results**

<b>Test Method:</b> Conducted					
<b>Center Frequency:</b> see below.				<b>EUT State:</b> Streaming MPEG Video	
<b>Min. Antenna Gain:</b> 0.5dB				<b>Max. Transmitted Power:</b> nominal	
<b>Required Threshold:</b> -64dBm				<b>Detection Threshold:</b> -40dBm used at supporting AP	
<b>Ambient Temperature:</b> 21° C				<b>Relative Humidity:</b> 38 RH%	
<b>Bandwidth (MHz)</b>	<b>Channel (MHz)</b>	<b>CMT (msec)</b>	<b>CCTT (msec)</b>	<b>Figure</b>	<b>Results</b>
20	5300	49.5	165.5	Plot 3	Complies
20	5500	8.7	157.3	Plot 4, 5	Complies
40	5300	13.8	151.3	Plot 6, 7	Complies
40	5500	71.4	170.2	Plot 8, 9	Complies
80	5305	12.6	171.4	Plot 10, 11	Complies
80	5500	3.0	128.4	Plot 12, 13	Complies
<p><b>Note:</b> One channel was evaluated as Pace VIP5662W employs as same chip set for all bands of operation.</p> <p><i>CCTT= Channel Closing Transmission Time.</i></p> <p><i>CMT= Channel Move Time</i></p>					

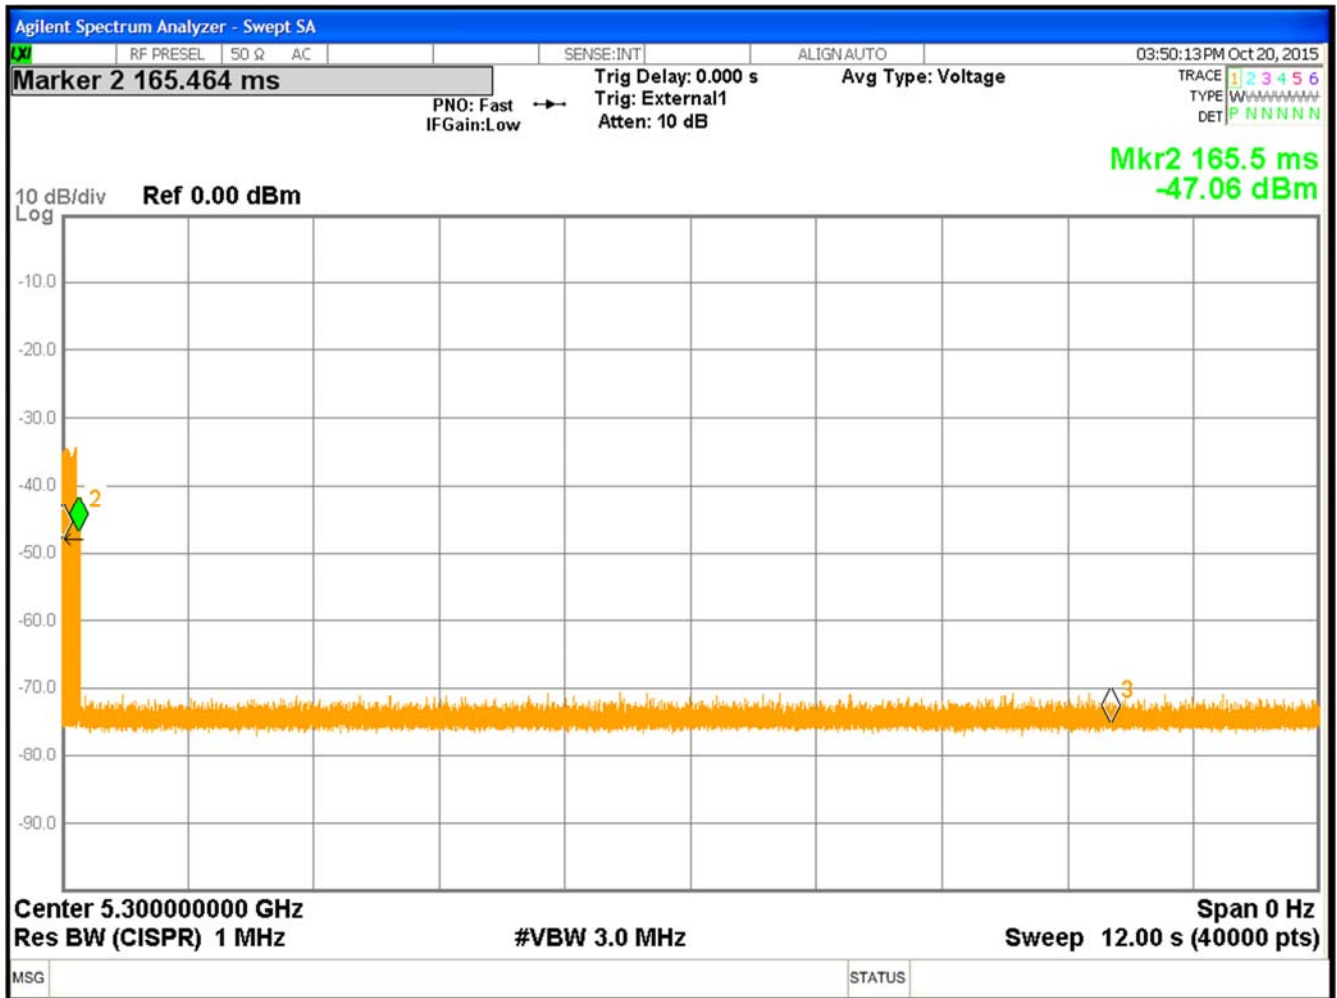

**Figure 3:** Channel move time, signal plotted 10 secs after radar signal is applied at 5300 MHz for 20MHz BW

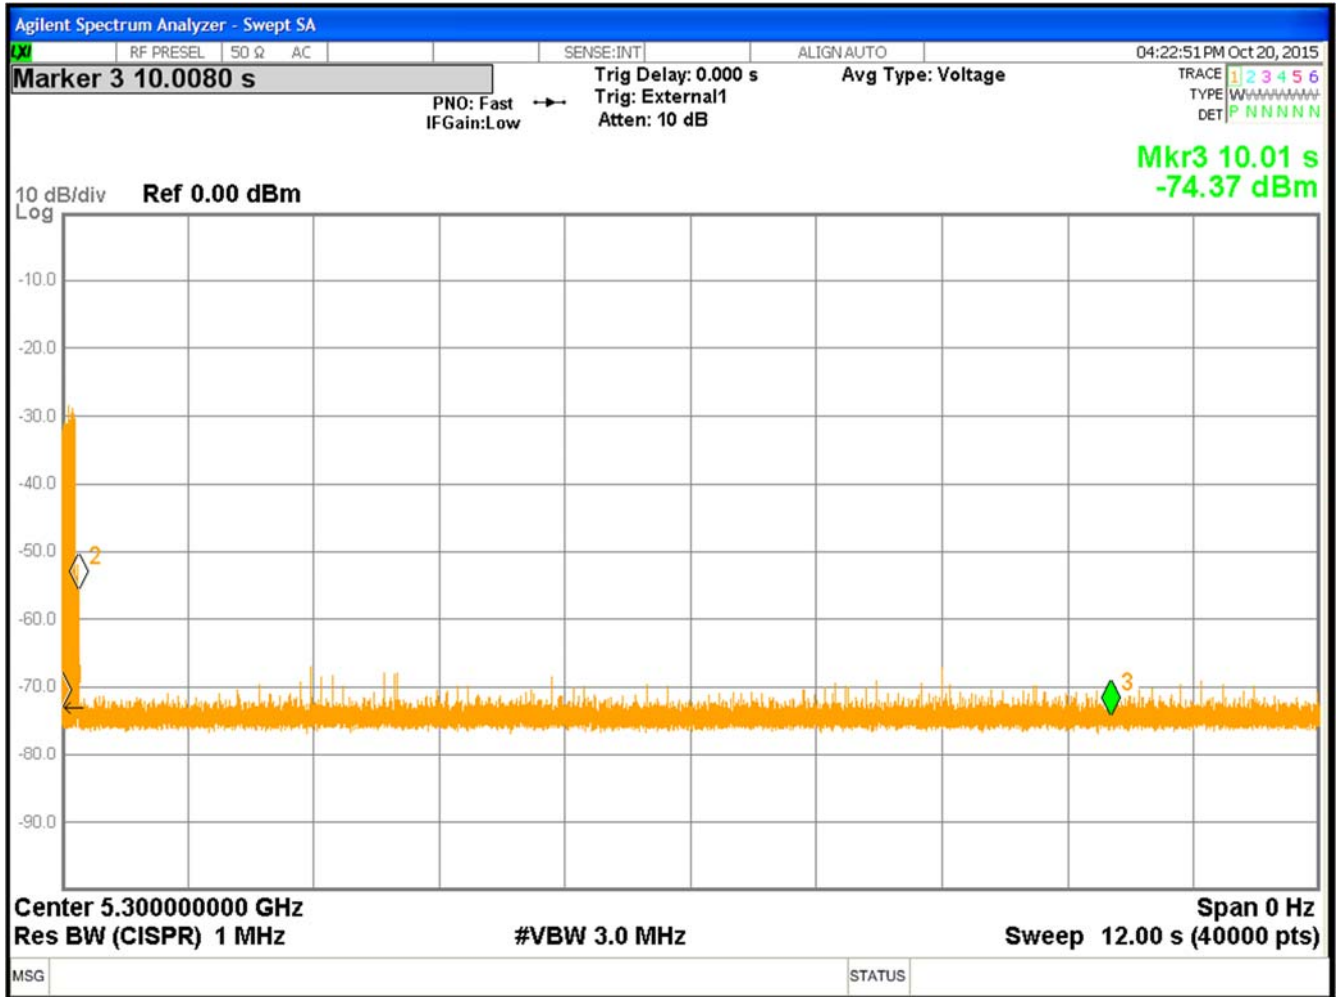


Figure 4: Channel moving time at 5300MHz with 40MHz BW

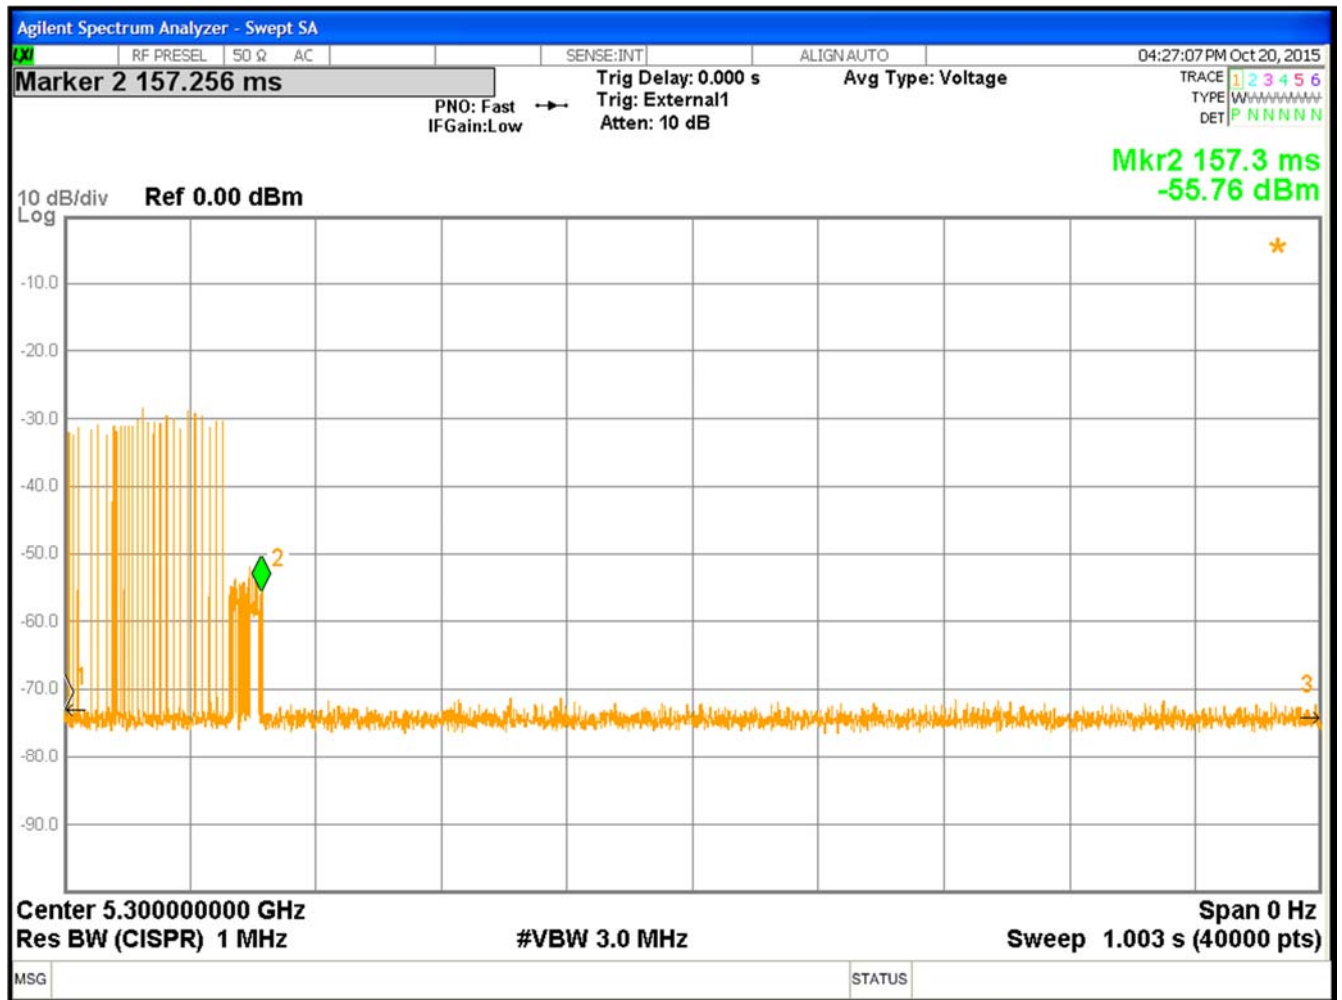


Figure 5: Channel moving time at 5300MHz Zoom in Plot with 40MHz BW

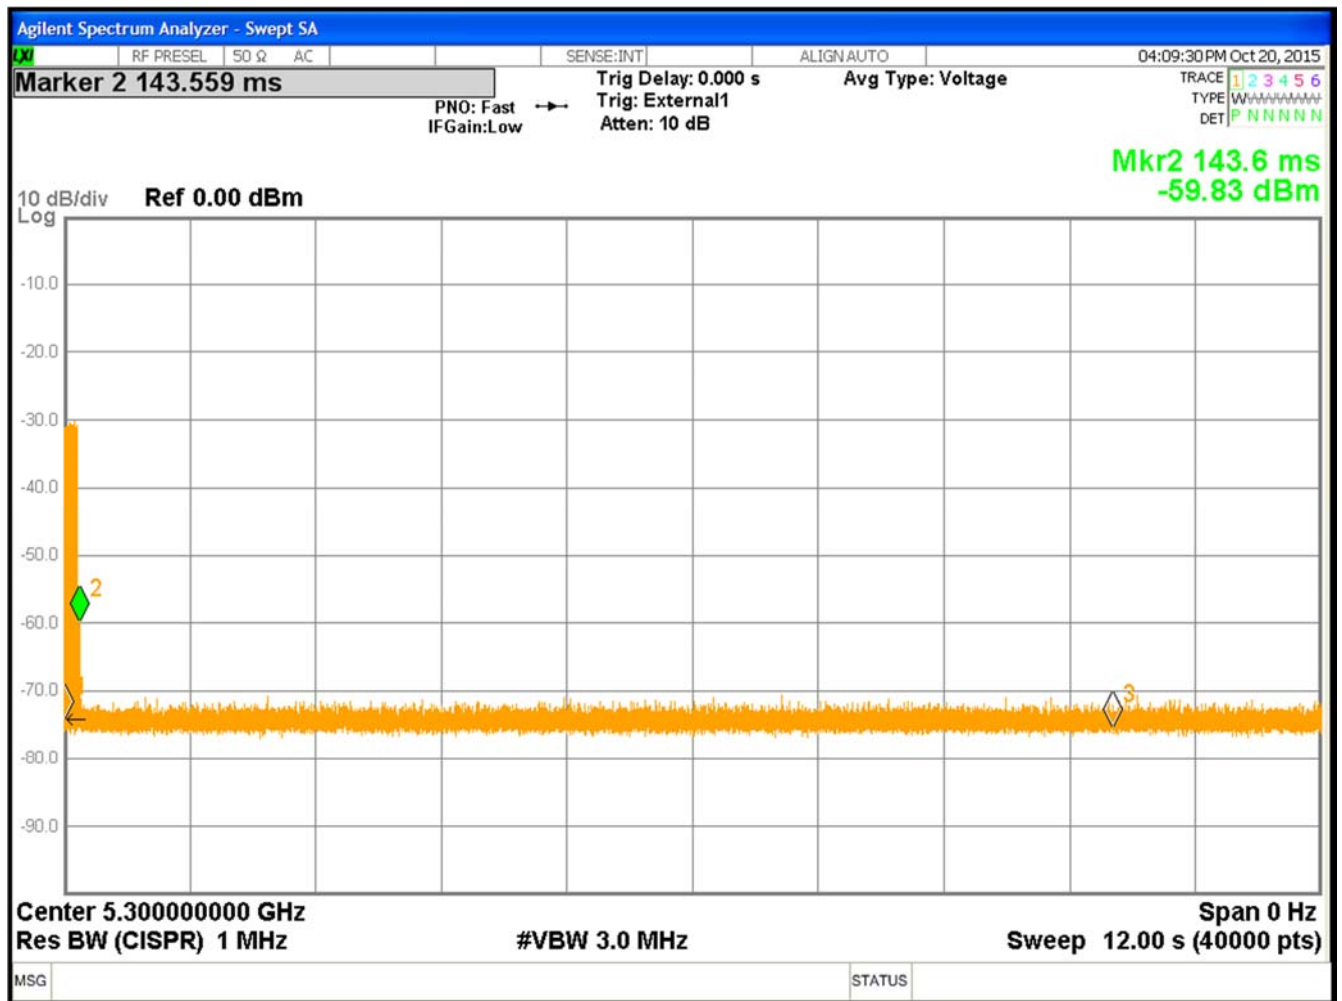


Figure 6: Channel moving time at 5300MHz with 80MHz BW

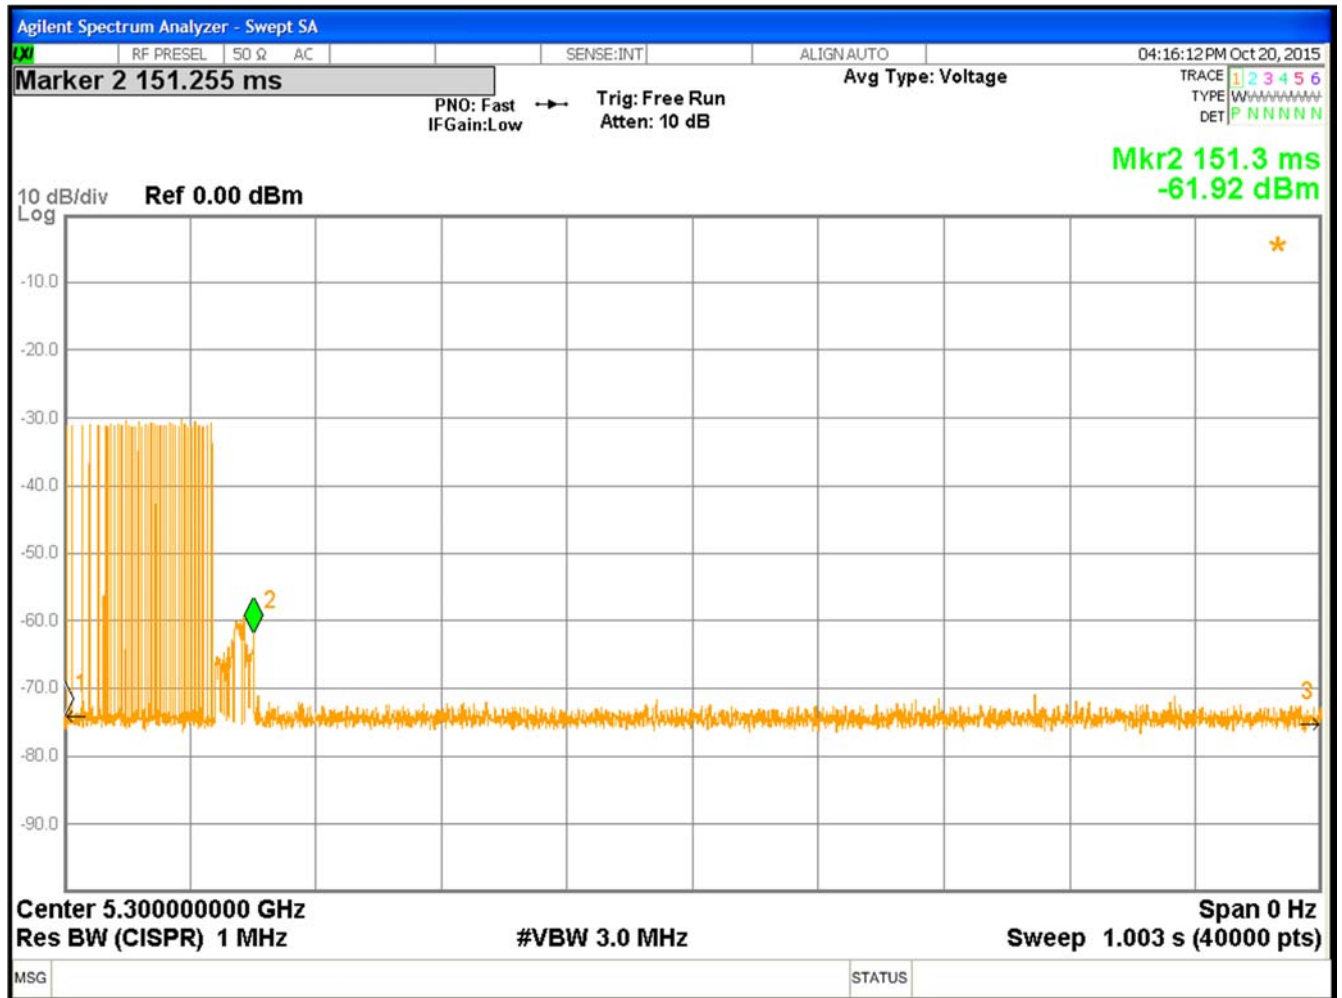


Figure 7: Channel moving time at 5300MHz Zoom in Plot \_with 80MHz BW



Figure 8: Channel moving time at 5500MHz in Plot \_with 20MHz BW




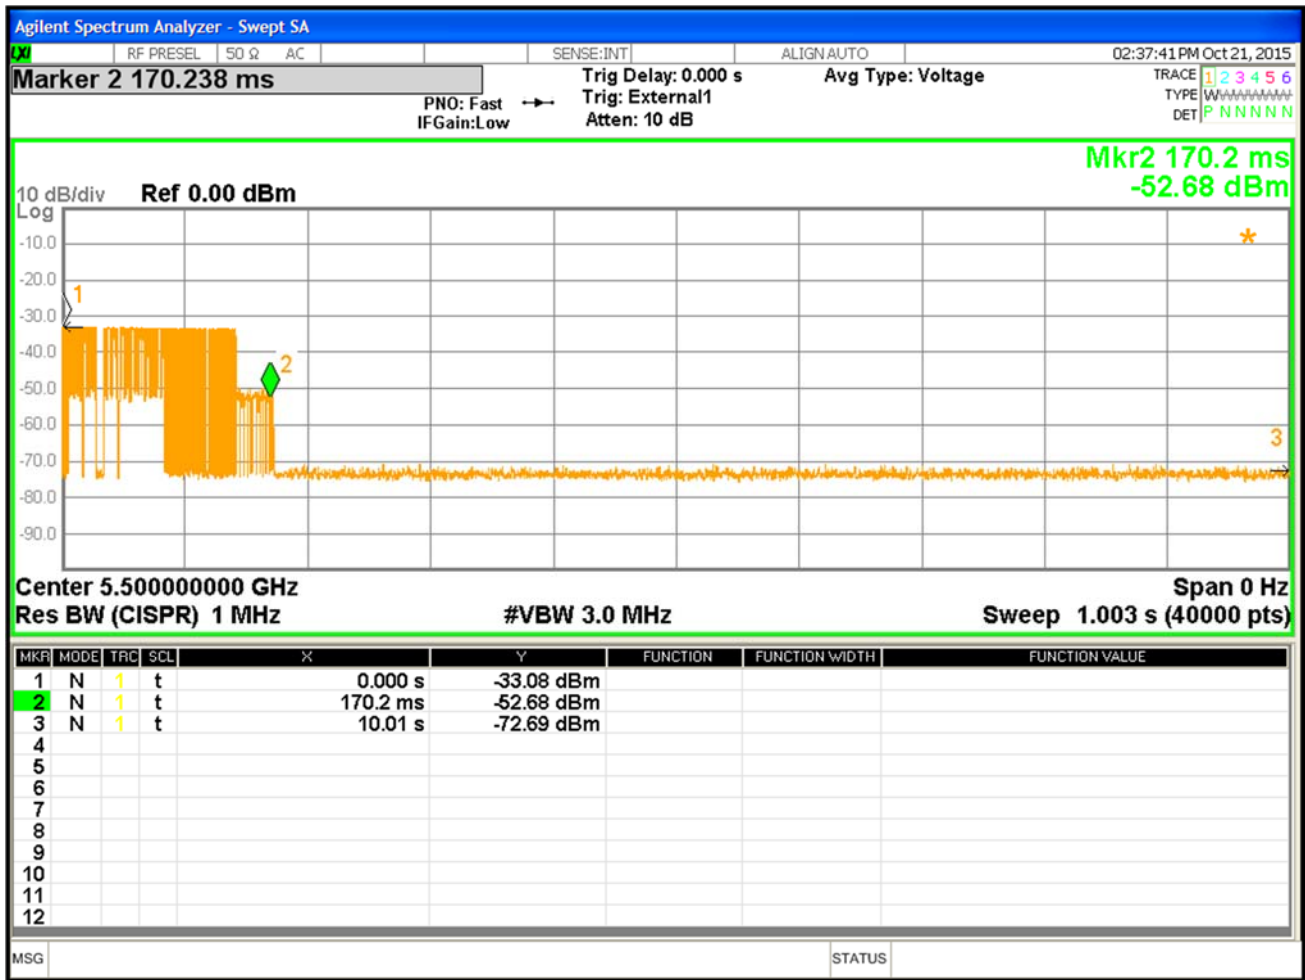


Figure 9: Channel moving time at 5500MHz Zoom in Plot \_with 20MHz BW



Figure 10: Channel moving time at 5500MHz Plot \_with 40MHz BW

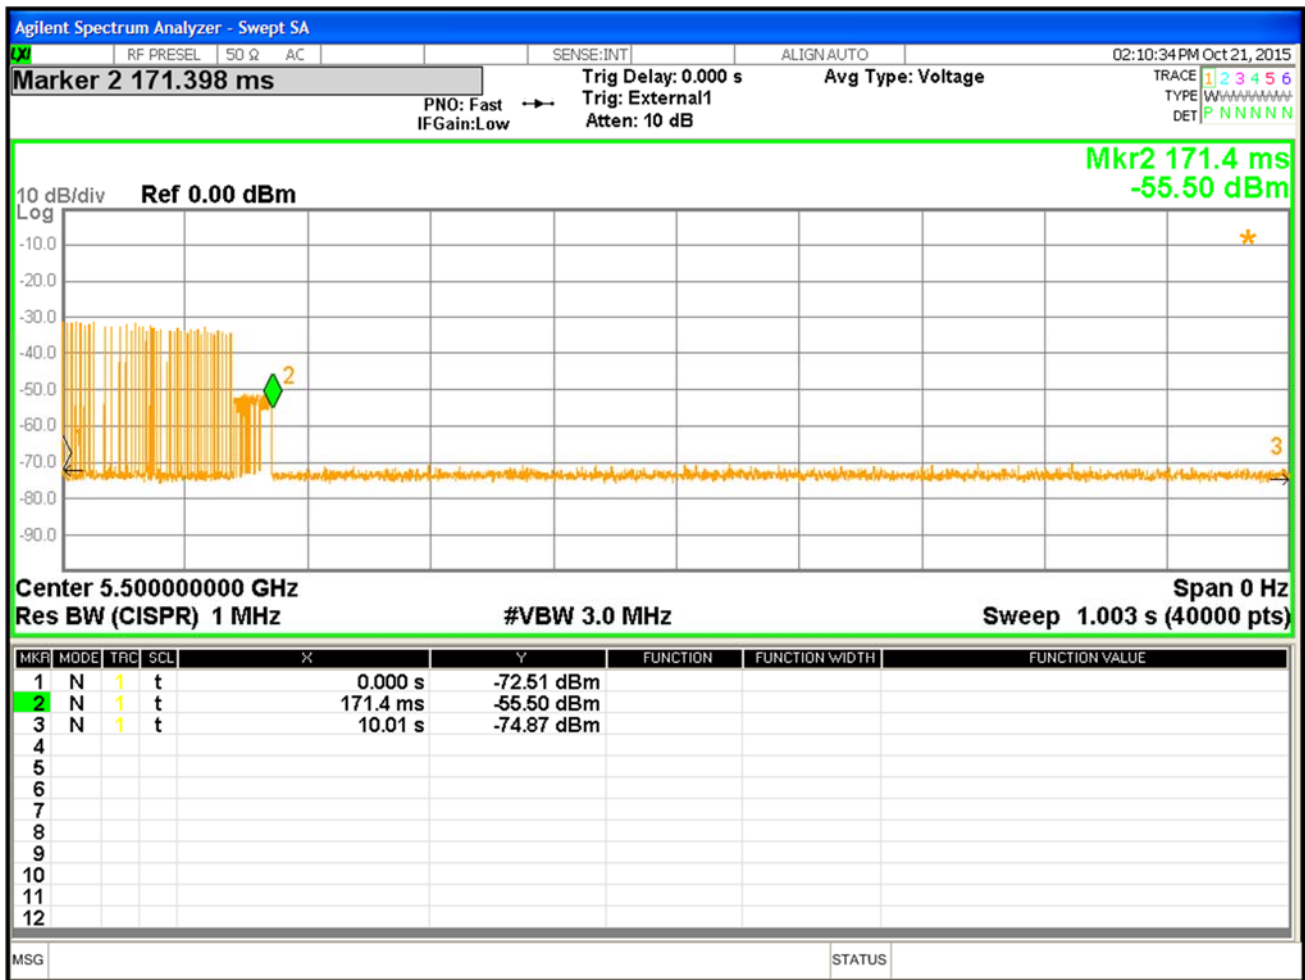

**Figure 11:** Channel moving time at 5500MHz Zoom in Plot \_with 40MHz BW



Figure 12: Channel moving time at 5500MHz Plot \_with 80MHz BW



Figure 13: Channel moving time at 5500MHz Zoom in Plot \_with 80MHz BW

### 1.5.1 Bandwidth of 20 MHz

Channel Move Time and Channel Closing Transmission Time at 5300 MHz

1.5.1.1 Analysis of data from plot #: 3 for 20MHz Bw

Sweep Bins	40000	bins
Start time	0.000	ms
SweepTime	12000	ms
<b>Threshold Level</b>	<b>-40</b>	<b>dBm</b>
End of Radar Burst Bin	165.	bins
Last of Radar Burst	0.00	ms
<b>Total Bin Above Threshold</b>	<b>124</b>	<b>bins</b>
Bin on After Burst	124	bins
<b>Channel Closing Trans. Time</b>	<b>49.5</b>	<b>ms</b>
Last Transmission	165.00	ms
Chanel Move Time	165.00	ms

### 1.5.2 Bandwidth of 40 MHz

Channel Move Time and Channel Closing Transmission Time at 5300 MHz

Analysis of data from plot #: 5 for 40MHz Bw

Sweep Bins	40000	bins
Start time	0	ms
SweepTime	12.000	ms
<b>Threshold Level</b>	<b>-40</b>	<b>dBm</b>
End of Radar Burst Bin	157.	bins
Last of Radar Burst		ms
<b>Total Bin Above Threshold</b>	<b>29</b>	<b>bins</b>
Bin on After Burst	29	bins
<b>Channel Closing Trans. Time</b>	<b>8.7</b>	<b>ms</b>
Last Transmission	157.3	ms
Chanel Move Time	157.3	ms

### 1.5.3 Bandwidth of 80 MHz

Channel Move Time and Channel Closing Transmission Time at 5300 MHz

Analysis of data from plot#: 7 for 80MHz Bw

Sweep Bins	40000	bins
Start time	0	ms
Sweep Time	12000	ms
<b>Threshold Level</b>	<b>-40</b>	<b>dBm</b>
End of Radar Burst Bin	0	bins
Last of Radar Burst	000	ms
<b>Total Bin Above Threshold</b>	<b>46</b>	<b>bins</b>
Bin on After Burst	46	bins
<b>Channel Closing Trans. Time</b>	<b>13.8</b>	<b>ms</b>
Last Transmission	128.40	ms
Chanel Move Time	128.40	ms

Channel Move Time and Channel Closing Transmission Time at 5500 MHz

1.5.1.1 Analysis of data from plot #: 9 for 20MHz Bw

Sweep Bins	40000	bins
Start time	0.000	ms
SweepTime	12000	ms
<b>Threshold Level</b>	<b>-40</b>	<b>dBm</b>
End of Radar Burst Bin	0.00	bins
Last of Radar Burst	0.00	ms
<b>Total Bin Above Threshold</b>	<b>238</b>	<b>bins</b>
Bin on After Burst	238	bins
<b>Channel Closing Trans. Time</b>	<b>71.4</b>	<b>ms</b>
Last Transmission	170.2	ms
Chanel Move Time	170.2	ms

**1.5.2 Bandwidth of 40 MHz**

Channel Move Time and Channel Closing Transmission Time at 5500 MHz

Analysis of data from plot #: 11 for 40MHz Bw

Sweep Bins	40000	bins
Start time	0	ms
Sweep Time	12000	ms
<b>Threshold Level</b>	<b>-40</b>	<b>dBm</b>
End of Radar Burst Bin	0	bins
Last of Radar Burst	0	ms
<b>Total Bin Above Threshold</b>	<b>42</b>	<b>bins</b>
Bin on After Burst	42	bins
<b>Channel Closing Trans. Time</b>	<b>12.6</b>	<b>ms</b>
Last Transmission	171.4	ms
Chanel Move Time	171.4	ms



### 1.5.3 Bandwidth of 80 MHz

Channel Move Time and Channel Closing Transmission Time at 5500 MHz

Analysis of data from plot#: 13 for 80MHz Bw

Sweep Bins	40000	bins
Start time	0	ms
Sweep Time	12000	ms
<b>Threshold Level</b>	<b>-40</b>	<b>dBm</b>
End of Radar Burst Bin	0	bins
Last of Radar Burst	000	ms
<b>Total Bin Above Threshold</b>	<b>10</b>	<b>bins</b>
Bin on After Burst	10	bins
<b>Channel Closing Trans. Time</b>	<b>3.0</b>	<b>ms</b>
Last Transmission	128.40	ms
Chanel Move Time	128.40	ms

## 2 Test Equipment Use List

Equipment	Manufacturer	Model	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Horn Antenna	EMCO	3115	9710-5301	10/08/2015	10/08/2016
Horn Antenna	Sunol Sciences	DRH-118	A040806	02/10/2015	02/10/2016
Spectrum Analyzer	Agilent	N9030A	100169	03/02/2015	03/02/2016
Spectrum Analyzer	Agilent	N9038A	MY51210195	01/12/2015	01/12/2016
Vector Signal Generator	Rohde & Schwarz	SMU200	1141.2005.02	10/01/2015	10/1/2016

\* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly. NCR=No Calibration Required

## 3.0 Photos

### 3.1 EUT Photos



**Figure 14** – Photo of VIP5662W (Front)



**Figure 15** – Photo of VIP5662W (Front)



**Figure 16** – Photo of VIP5662W (Rear)



**Figure 17** – Photo of VIP5662W (Right)



**Figure 18** – Photo of VIP5662W (Left)



**Figure 19:** Dynamic Frequency Selection Test Setup – Front View





**Figure 1:** Dynamic Frequency Selection Test Setup – Rear View

### 3 EMC Test Plan

#### 3.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

#### 3.2 Customer

**Table 1** – Customer Information

<b>Company Name</b>	ARRIS Group, Inc
<b>Address</b>	6450 sequence Drive
<b>City, State, Zip</b>	San Diego, CA 92121
<b>Country</b>	United States of America

**Table 10:** Technical Contact Information

<b>Name</b>	Chris Rubis
<b>E-mail</b>	<a href="mailto:Chris.Rubis@arris.com">Chris.Rubis@arris.com</a>
<b>Phone</b>	(858) 404 3570

### 3.3 Equipment Under Test (EUT)

**Table 11:** EUT Specifications

<b>EUT Specification</b>	
IPTV WIFI SET TOP BOX	24 cm x 17.7 cm x 5.3 cm
AC Adapter	120 – 277 Vac, 50 - 60Hz Netbit part #595889-001-00 Model: NBS30B120250VU Output 12V DC 2.5A
Environment	Indoor
Operating Temperature Range:	0 to 40 degrees C
Multiple Feeds:	<input checked="" type="checkbox"/> Yes and how many 4
Hardware Version	1.00
Part Number	597604-001
RF Software Version	37.4.0.25
Radio Module 802.11-radio modules	
Operating Mode	802.11a, HT20, and HT40 and 802.11AC
Transmitter Frequency Band	5.15 GHz to 5.25 GHz 5.25 GHz to 5.35 GHz 5.47 GHz to 5.725 GHz 5.725 GHz to 5.85 GHz
Max. Rated Power Output	See Channel Planning Table.
Power Setting @ Operating Channel	See Channel Planning Table.
Antenna Type	Internal Bi-Polar 0.5dBi
Modulation Type	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">AM <input type="checkbox"/></div> <div style="text-align: center;">FM <input type="checkbox"/></div> <div style="text-align: center;">DSSS <input type="checkbox"/></div> <div style="text-align: center;">OFDM <input type="checkbox"/></div> </div> <p style="text-align: center;">other describe: QAM</p>

Date Rate	802.11a - 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n HT20 – 6.5, 13, 19.5, 26, 39, 52, 58.5, 65 Mbps 802.11n HT40 – 13.5, 27, 40.5, 54, 81, 108, 121.5, 135 Mbps 802.11nVHT80 - 32.5, 65, 97.5, 130, 195, 260, 292.5, 325, 390, 433.3 520, 780, 1040, 1170, 1269, 1560, 1733 Mbps
TX/RX Chain (s)	MIMO (4x4)
Directional Gain Type	<input checked="" type="checkbox"/> Uncorrelated <input checked="" type="checkbox"/> No Beam-Forming Other describe:
Type of Equipment	<input checked="" type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input type="checkbox"/> Other
<b>Note:</b> This report documents only the DFS requirements for 5150 – 5250 MHz, 5250-5350, 5470-5725MHz bands	

**Table 12:** EUT Channel Power Specifications

Power Setting @ Operating Channel	802.11ac @	802.11n @	802.11a @
	Ch 80MHz	40MHz	20MHz
36	13	14	16
40	13	14	20
44	13	20	20
48	13	20	20
52	14	17	18
56	14	17	18
60	14	15	18
64	14	15	17
100	13	14	16
104	13	14	16
108	13	15	16
112	13	15	16
116	17	17	17
120	17	17	17
124	17	17	16
128	17	17	16
132	18	17	15
136	18	17	15
140	18	16	15
144	18	16	16
149	12	13	15
153	12	13	16
157	12	17	17
161	12	17	17
165	-1	-1	17

**Table 13:** Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
HDMI	HDMI	YES	2m	M

**Table 14:** Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Dell	Precision M20	4SFSC91	EUT setup operating channel and mode
Access Point	Arris Group	VAP3402	M91531SA00 2L	Master device. It pings and controls set top box
HD TV	Vizio	VIZIO VX20L HDTV	LSAAAAH25 03020	HD TV for display of Streaming video
<b>Note:</b>				

**Configuration(s)**

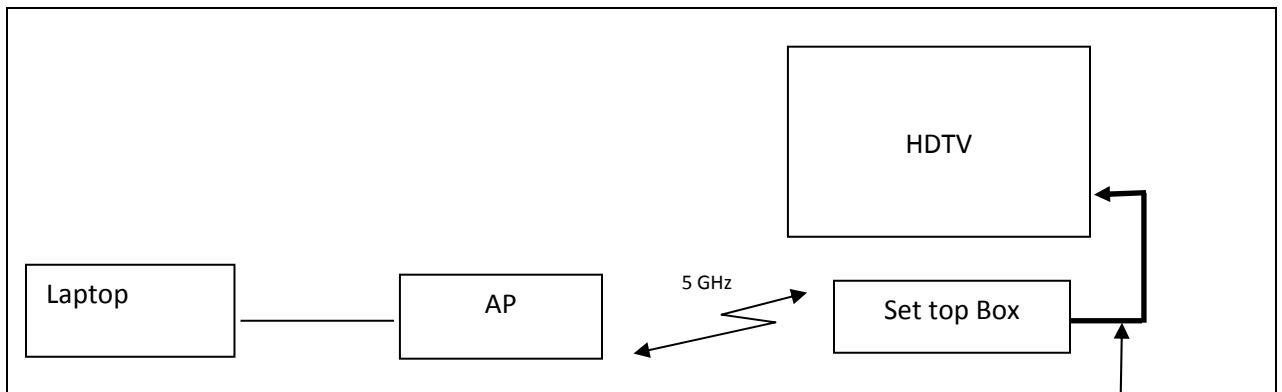


Figure 2 - Block Diagram of EUT Setup

HDMI cable 1m

**Note:** The EUT was connected to the USB Port of the supporting laptop.

**Table 15:** Description of Sample used for Testing

Device	Serial Number	Config.	Test	Mode
VIP5662W	595996-004-00	Transmit & Receive to AP. Streaming Video on HDMI port	Channel Shutdown	20MHz Bandwidth: 5300 MHz, 5500 MHz 40MHz Bandwidth: 5300 MHz, 5500 MHz 80 MHz bandwidth :5300MHz, 5500MHz
<b>Note:</b>				

**Table 16:** Description of Test Configuration used for DFS Evaluation.

Device	Antenna	Mode	Setup Description
VIP5662W	Attached	Transmit & Receive	EUT was positioned horizontally; a typical orientation.
<b>Note:</b> . The EUT designed to lay flat on the table			

### 3.4 Test Specifications

Testing requirements

**Table 18:** Test Specifications

<b>Emissions and Immunity</b>	
Standard	Requirement
CFR 47 Part 15.407: 2014	All
RSS 247 Issue 1, 2015	All