



FCC TEST REPORT

REPORT NO.: RF960503H02

MODEL NO.: RSGu3502

RECEIVED: May 03, 2007

TESTED: May 17, 2007

ISSUED: May 18, 2007

APPLICANT: Motorola Inc.

ADDRESS: 101 Toumament Drive, Horsham, PA 19044

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 70 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	9
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.5	DESCRIPTION OF SUPPORT UNITS	13
3.6	CONFIGURATION OF SYSTEM UNDER TEST	14
4	TEST TYPES AND RESULTS	16
4.1	CONDUCTED EMISSION MEASUREMENT.....	16
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
4.1.2	TEST INSTRUMENTS	16
4.1.3	TEST PROCEDURES.....	17
4.1.4	TEST SETUP	17
4.1.5	EUT OPERATING CONDITIONS.....	18
4.1.6	TEST RESULTS	19
4.2	RADIATED EMISSION MEASUREMENT	23
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	23
4.2.2	TEST INSTRUMENTS	24
4.2.3	TEST PROCEDURES.....	25
4.2.4	TEST SETUP	26
4.2.5	EUT OPERATING CONDITIONS.....	26
4.2.6	TEST RESULTS	27
4.2.7	TEST RESULTS - DSSS.....	28
4.2.8	TEST RESULTS - OFDM.....	35
4.3	6dB BANDWIDTH MEASUREMENT.....	42
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2	TEST INSTRUMENTS	42
4.3.3	TEST PROCEDURE	43
4.3.4	TEST SETUP	43
4.3.5	EUT OPERATING CONDITIONS.....	43
4.3.6	TEST RESULTS -DSSS	44
4.3.7	TEST RESULTS-OFDM	47
4.4	MAXIMUM PEAK OUTPUT POWER.....	50
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	50
4.4.2	TEST INSTRUMENTS	50
4.4.3	TEST PROCEDURES.....	51



4.4.4	TEST SETUP	51
4.4.5	EUT OPERATING CONDITIONS.....	51
4.4.6	TEST RESULTS – DSSS	52
4.4.7	TEST RESULTS –OFDM	53
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	54
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	54
4.5.2	TEST INSTRUMENTS	54
4.5.3	TEST PROCEDURE	55
4.5.4	TEST SETUP	55
4.5.5	EUT OPERATING CONDITIONS.....	55
4.5.6	TEST RESULTS –DSSS	56
4.5.7	TEST RESULTS –OFDM	59
4.6	CONDUCTED EMISSION AND BAND EDGES MEASUREMENT.....	62
4.6.1	LIMITS OF CONDUCTED EMISSION AND BAND EDGES MEASUREMENT	62
4.6.2	TEST INSTRUMENTS	62
4.6.3	TEST PROCEDURE	62
4.6.4	DEVIATION FROM TEST STANDARD	62
4.6.5	EUT OPERATING CONDITION	62
4.6.6	TEST RESULTS	63
4.7	ANTENNA REQUIREMENT	68
4.7.1	STANDARD APPLICABLE.....	68
4.7.2	ANTENNA CONNECTED CONSTRUCTION	68
5	INFORMATION ON THE TESTING LABORATORIES.....	69
	APPENDIX-A	A-1



1 CERTIFICATION

PRODUCT : Residential Seamless Mobility Gateway
BRAND NAME : Motorola
MODEL NO. : RSGu3502
TESTED: May 17, 2007
APPLICANT : Motorola Inc.
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (Model: RSGu3502) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** May 18, 2007
(Carol Liao)

**TECHNICAL
ACCEPTANCE :** Hank Chung , **DATE:** May 18, 2007
Responsible for RF
(Hank Chung)

APPROVED BY : May Chen , **DATE:** May 18, 2007
(May Chen, Deputy Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -12.64 dB at 0.181 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.40 dB at 2483.50 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Residential Seamless Mobility Gateway
MODEL NO.	RSGu3502
H/W REVISION	Rev. A
FCC ID	ACQRSGU3502
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b: 111.686mW 802.11g: 366.438mW
ANTENNA TYPE	Please see note 3 (on next page)
DATA CABLE	NA
I/O PORT	LAN Port*4, WAN Port*1, RJ-11 PORT*2

NOTE:

1. The EUT was manufactured by following manufacturers:

Manufacturer	Manufacturer Address
HONG FU JIN PRECISION INDUSTRY (SHENZHEN) CO LTD	10TH YOUSONG INDUSTRIAL DISTRICT, 2ND DONGHUAN RD NO 2, BAO'AN LONGHUA TOWN, SHENZHEN GUANGDONG CHINA
WISTRON INFOCOMM (ZHONGSHAN) CORP	ZHONGSHAN TORCH HIGH-TECH, INDUSTRIAL DEVELOPMENT ZONE, ZHONGSHAN GUANGDONG CHINA
MOTOTECH INC.	SCIENCE-BASED INDUSTRIAL PARK, 9, PARK AVENUE II RD., HSIN CHU 300, TAIWAN, R.O.C.

2. The EUT was pre-tested under following test modes:

Pre-test Mode	Model No.
Mode A	Talking Mode + LAN (100Mbps) + WAN (100Mbps) + RF + SDRAM Micron (MT48LC16M16A2P-75) + Delta Adapter
Mode B	Talking Mode + LAN (100Mbps) + WAN (100Mbps) + RF + SDRAM Samsung (K4S561632H-UC75) + Delta Adapter
Mode C	Talking Mode + LAN (100Mbps) + WAN (100Mbps) + RF + SDRAM Hynix (HY57V561620CTP-H) + Delta Adapter
Mode D	Talking Mode + LAN (100Mbps) + WAN (100Mbps) + RF + SDRAM Hynix (HY57V561620CTP-H) + Leader Adapter
Mode E	Talking Mode + LAN (10Mbps) + WAN (10Mbps) + RF + SDRAM Hynix (HY57V561620CTP-H) + Leader Adapter

The worst case was found in **Mode C**. Their test data were recorded in this report individually.

3. There are two antennas provided to this EUT, please refer to the following table:

No.	Gain (dBi)	Antenna Type	Connector
1	1.5	Dipole	Right-Angle Reverse Polarity SMA
2	2	Chip (only Rx function)	NA

4. The EUT could be supplied with the following power adapters:

Adapter 1:	
Brand:	LEADER ELECTRONICS INC.
Model No.:	NU20-5120125-I2
Input power :	AC 100-240V 1.0A, 50-60Hz, Non-shielded, w/o core,2.0M
Output power :	DC 12V, 1.25A, w/o core,Non-shielded, 1.9 M
Adapter 2:	
Brand:	DELTA ELECTRONICS, INC.
Model No.:	ADP-15ZB B
Input power :	AC 100-240V 0.5A, 50-60Hz,Non-shielded, w/o core,2.0M
Output power :	DC 12V, 1.25A, with one core, Non-shielded,1.9M

For radiated test, the EUT was pre-tested with above adapters, the worse case was found in **adapter 2**. Its test data was recorded in this report individually.



5. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
6. The EUT complies with IEEE 802.11g standards, and backwards compatible with IEEE 802.11b products.
7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
Antenna 2	√	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1	DSSS	CCK	1

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	11	DSSS	CCK	1

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

**Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Residential Seamless Mobility Gateway. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP18L	6976685584	DoC
2	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70166-5C A-0448	PIW632500516610
3	TELEPHONE	Fujisu	K-903S	1380001742	NA
4	TELEPHONE	Fujisu	K-903S	1380001524	NA
5	HUB	AVSYS	110H8	01-20E-000002	DoC

No.	Signal cable description
1	NA
2	NA
3	10.0 m nonshielded telephone wire, terminated with RJ11 connector, w/o core.
4	10.0 m nonshielded telephone wire, terminated with RJ11 connector, w/o core.
5	NA

NOTE: All power cords of the above support units are non-shielded (1.8m).


3.6 CONFIGURATION OF SYSTEM UNDER TEST

For conducted test item:

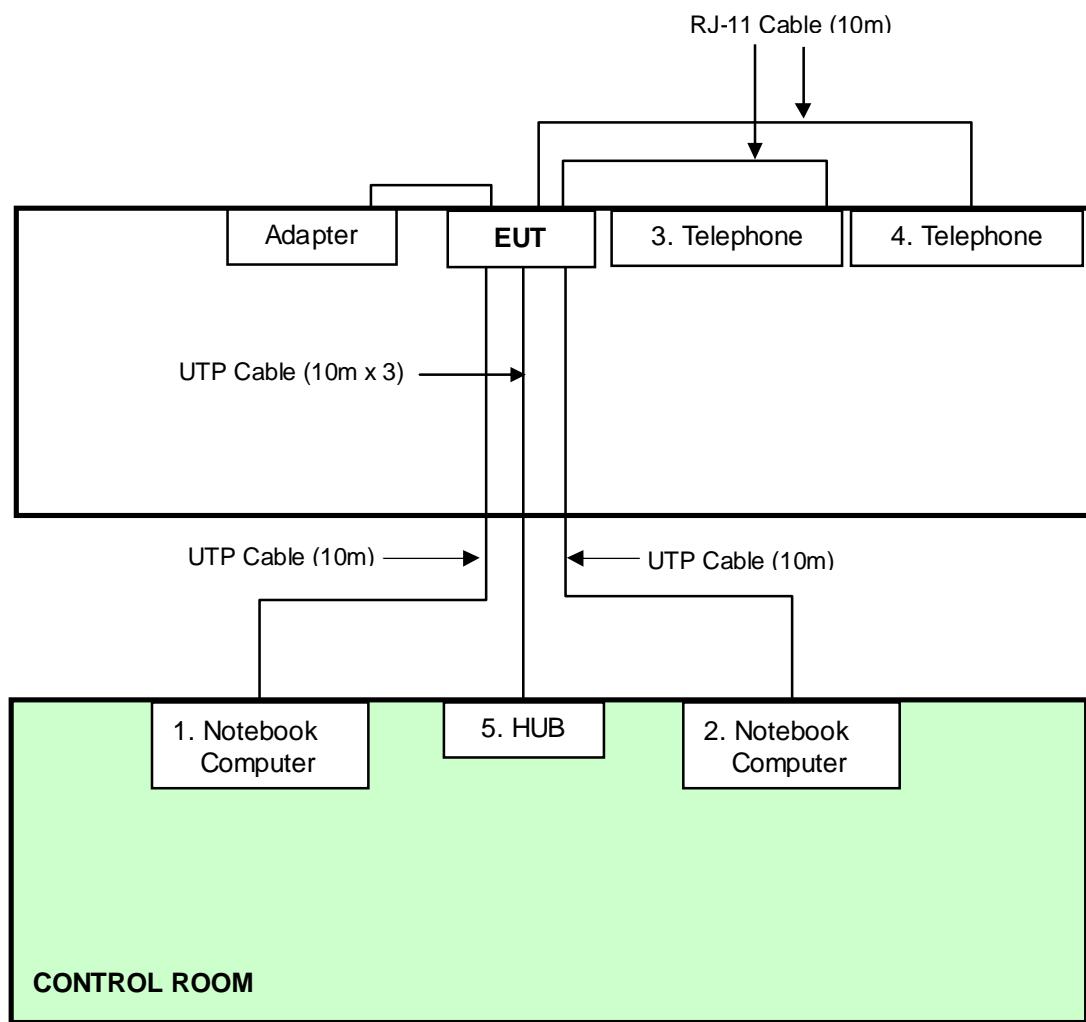

NOTE: 1. Support units 1-2, 5 were kept in the control room during the test.

For Radiated test item:

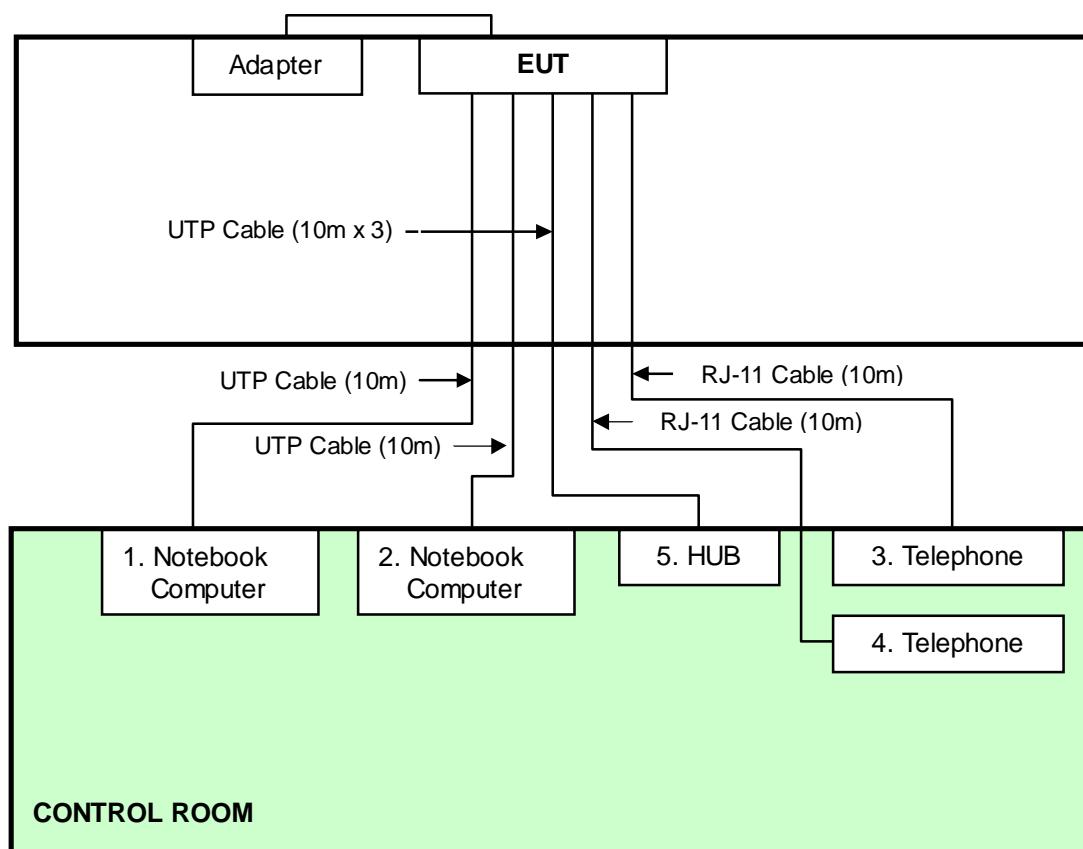

NOTE: 1. Support units 1-5 were kept in the control room during the test.



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56	56 to 46
	56	46
	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Mar. 28, 2008
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 26, 2007
Line-Impedance Stabilization Network(for Peripheral)	ESH3-Z5	848773/004	Oct. 26, 2007
RF Cable (JETBAO)	RG233/U	Cable_CB_01	Dec. 09, 2007
Terminator	50	2	Oct. 30, 2007
Software	ADT_Cond_V7.3.2	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- a. The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

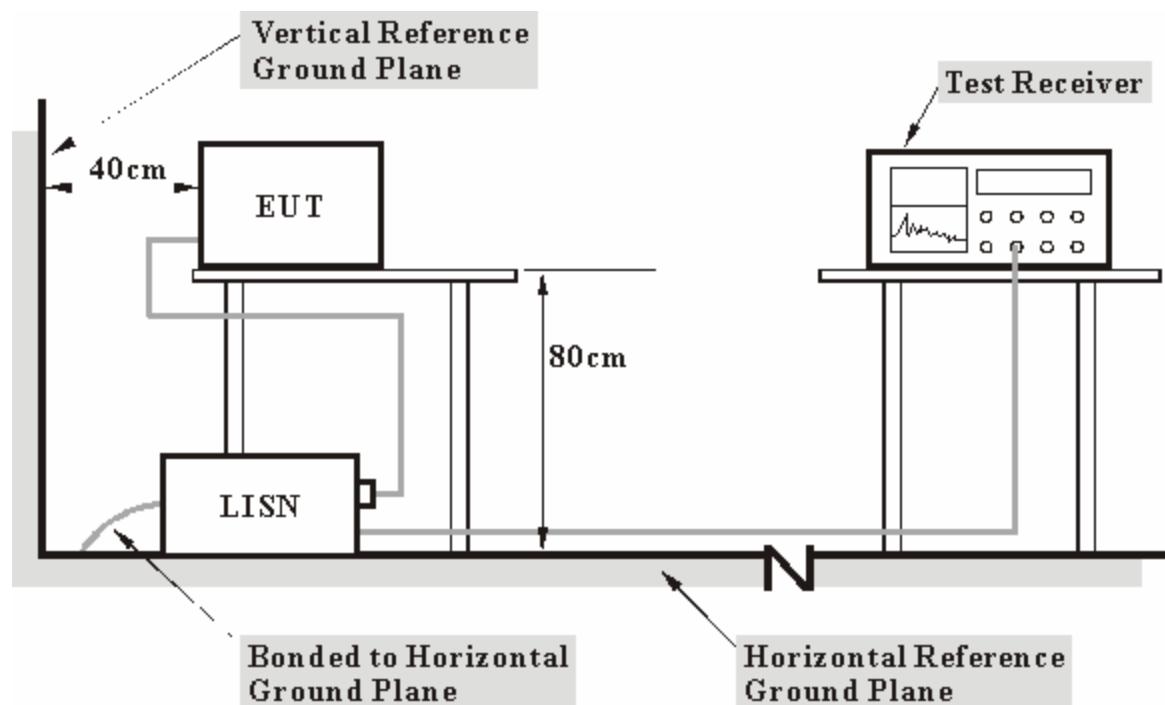

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared other computer systems (support unit 1 and 2) to act as communication partners and placed them outside of testing area.
- c. The communication partners run test program "Radio Scope V_03_07" to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cables and wireless.
- d. Support unit 3 and support unit 4 communicated to each other via EUT.


4.1.6 TEST RESULTS

TEST MODE	With Adapter 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 961hPa	TRANSFER RATE	1Mbps
TESTED BY	Moris Lin		

No	Freq. Factor	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.40	51.39	-	51.79	-	64.43	54.43	-12.64	-
2	0.240	0.40	44.04	-	44.44	-	62.10	52.10	-17.66	-
3	0.298	0.40	37.57	-	37.97	-	60.29	50.29	-22.32	-
4	0.482	0.40	30.35	-	30.75	-	56.30	46.30	-25.55	-
5	1.021	0.40	25.04	-	25.44	-	56.00	46.00	-30.56	-
6	2.939	0.55	29.31	-	29.86	-	56.00	46.00	-26.14	-
7	22.461	1.00	32.90	-	33.90	-	60.00	50.00	-26.10	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

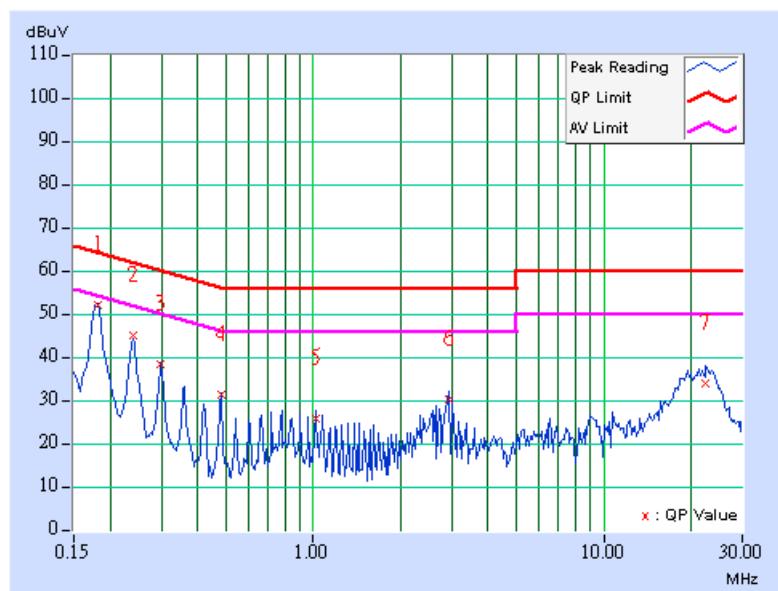


TEST MODE	With Adapter 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 961hPa	TRANSFER RATE	1Mbps
TESTED BY	Moris Lin		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	38.29	-	38.49	-	66.00	56.00	-27.51	-
2	0.177	0.20	50.04	-	50.24	-	64.61	54.61	-14.37	-
3	0.300	0.20	37.89	-	38.09	-	60.25	50.25	-22.16	-
4	0.360	0.20	40.55	-	40.75	-	58.73	48.73	-17.98	-
5	0.780	0.26	26.74	-	27.00	-	56.00	46.00	-29.00	-
6	1.320	0.33	23.25	-	23.58	-	56.00	46.00	-32.42	-
7	2.880	0.44	31.12	-	31.56	-	56.00	46.00	-24.44	-
8	21.422	1.33	32.05	-	33.38	-	60.00	50.00	-26.62	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

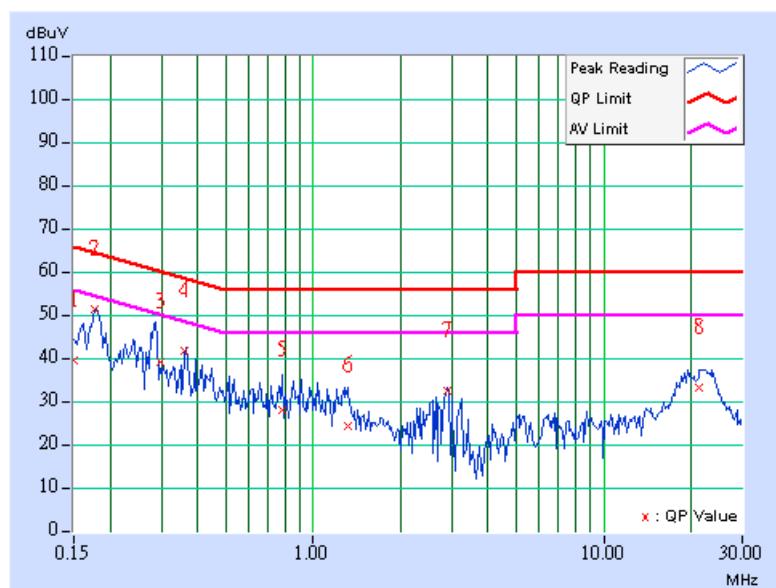


TEST MODE	With Adapter 2	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 961hPa	TRANSFER RATE	1Mbps
TESTED BY	Moris Lin		

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.185	0.40	47.62	-	48.02	-	64.25	54.25	-16.23	-
2	0.232	0.40	41.09	-	41.49	-	62.38	52.38	-20.89	-
3	0.322	0.40	36.53	-	36.93	-	59.66	49.66	-22.73	-
4	0.741	0.40	25.18	-	25.58	-	56.00	46.00	-30.42	-
5	2.451	0.52	25.88	-	26.40	-	56.00	46.00	-29.60	-
6	22.320	1.00	27.33	-	28.33	-	60.00	50.00	-31.67	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

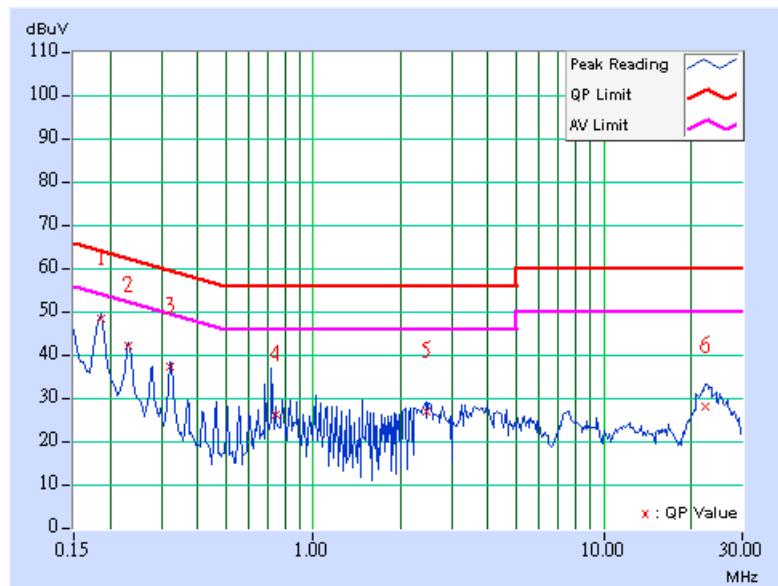


TEST MODE	With Adapter 2	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 961hPa	TRANSFER RATE	1Mbps
TESTED BY	Moris Lin		

No	Freq. Factor	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.20	48.47	-	48.67	-	64.25	54.25	-15.58	-
2	0.232	0.20	42.60	-	42.80	-	62.38	52.38	-19.58	-
3	0.279	0.20	37.69	-	37.89	-	60.85	50.85	-22.96	-
4	0.322	0.20	39.32	-	39.52	-	59.66	49.66	-20.14	-
5	1.205	0.32	26.60	-	26.92	-	56.00	46.00	-29.08	-
6	25.484	1.40	29.08	-	30.48	-	60.00	50.00	-29.52	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

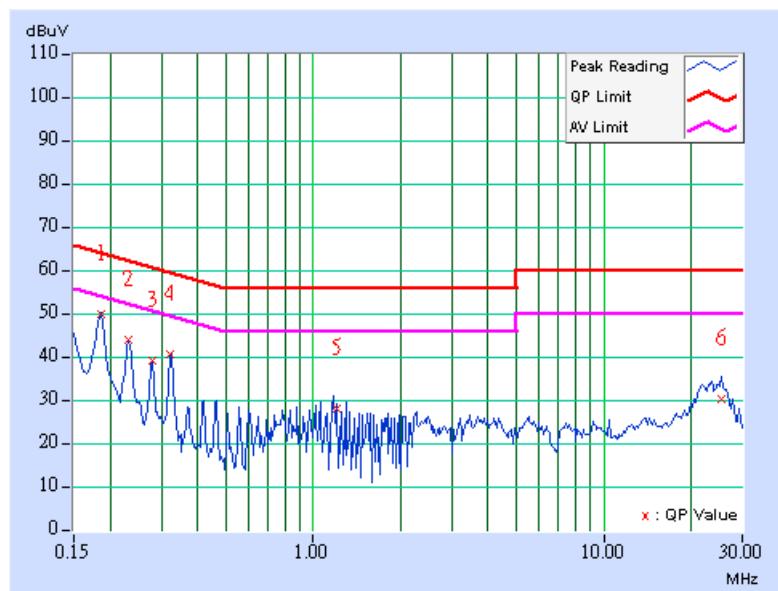



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 03, 2007
HP Pre_Amplifier	8449B	3008A01922	Sep. 18, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 20, 2007
CHASE Broadband Antenna	VULB 9168	138	July 17, 2007
Schwarzbeck Horn_Antenna	BBHA9120	D124	Jan. 01, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2008
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
R&S Loop Antenna	HFH2-Z2	881058/15	Nov. 29, 2007
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 14. 2007
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Jul. 15, 2007
Software	ADT_Radiated_V 7.6.15.7	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna)and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in ADT Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 4824A-3.

7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~40GHz)	1.88 dB

8. Loop antenna was used for all emissions below 30 MHz.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

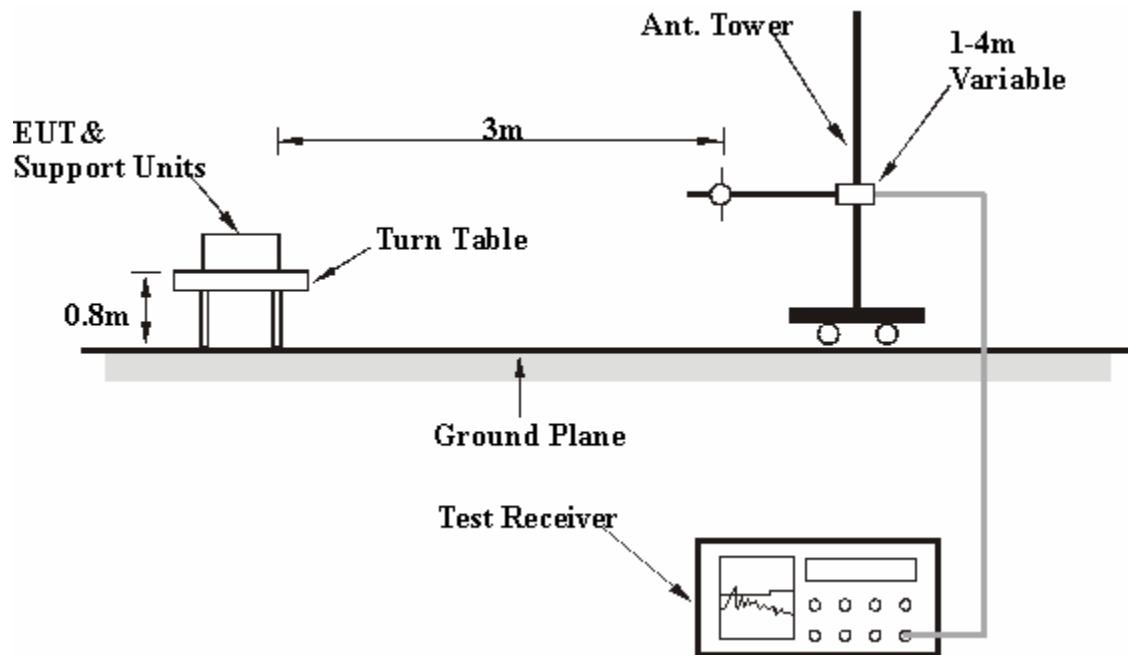

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5



4.2.6 TEST RESULTS

Below 1GHz Worst-Case Data

MODULATION TYPE	DSSS	CHANNEL	Channel 1
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 75%RH, 961hPa	TRANSFER RATE	1Mbps
TESTED BY	Eason Chang	DETECTOR FUNCTION	Quasi-Peak, 120kHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.20	28.15 QP	43.50	-15.35	1.00 H	200	15.36	12.79
2	187.51	29.36 QP	43.50	-14.14	1.27 H	120	18.90	10.46
3	250.00	38.57 QP	46.00	-7.43	1.35 H	25	24.22	14.35
4	300.00	37.44 QP	46.00	-8.56	1.00 H	179	21.44	16.00
5	312.51	43.29 QP	46.00	-2.71	1.00 H	39	26.90	16.39
6	350.01	42.96 QP	46.00	-3.04	1.00 H	79	25.40	17.56
7	375.01	43.92 QP	46.00	-2.08	1.00 H	84	25.50	18.42
8	437.52	40.82 QP	46.00	-5.18	1.00 H	273	20.63	20.19
9	625.03	41.53 QP	46.00	-4.47	1.42 H	0	17.70	23.83
10	750.03	38.86 QP	46.00	-7.14	1.00 H	230	12.16	26.70
11	875.03	42.41 QP	46.00	-3.59	1.00 H	9	14.40	28.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.34	32.42 QP	40.00	-7.58	1.09 V	272	25.10	7.32
2	125.00	32.39 QP	43.50	-11.11	1.00 V	134	19.61	12.78
3	250.50	35.81 QP	46.00	-10.19	1.00 V	95	21.41	14.40
4	312.51	40.89 QP	46.00	-5.11	1.00 V	291	24.50	16.39
5	350.01	43.56 QP	46.00	-2.44	1.00 V	9	26.00	17.56
6	375.01	42.90 QP	46.00	-3.10	1.00 V	326	24.48	18.42
7	500.00	38.01 QP	46.00	-7.99	1.00 V	34	15.97	22.04
8	625.30	37.62 QP	46.00	-8.38	1.00 V	210	13.79	23.83
9	725.50	39.06 QP	46.00	-6.94	1.00 V	352	13.30	25.76
10	875.03	38.46 QP	46.00	-7.54	1.36 V	54	10.45	28.01
11	937.54	36.37 QP	46.00	-9.63	1.50 V	144	7.45	28.92

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



4.2.7 TEST RESULTS - DSSS 802.11b DSSS modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.40 PK	74.00	-14.60	1.38 H	266	29.00	30.40
2	2390.00	47.40 AV	54.00	-6.60	1.38 H	266	17.00	30.40
3	*2412.00	106.10 PK			1.40 H	266	75.61	30.49
4	*2412.00	100.70 AV			1.40 H	266	70.21	30.49
5	4824.00	50.70 PK	74.00	-23.30	1.61 H	112	15.01	35.69
6	4824.00	46.10 AV	54.00	-7.90	1.61 H	112	10.41	35.69
7	7236.00	52.70 PK	74.00	-21.30	1.23 H	214	10.46	42.24
8	7236.00	38.60 AV	54.00	-15.40	1.23 H	214	-3.64	42.24

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.80 PK	74.00	-13.20	1.05 V	112	30.40	30.40
2	2390.00	48.80 AV	54.00	-5.20	1.05 V	112	18.40	30.40
3	*2412.00	109.20 PK			1.05 V	175	78.71	30.49
4	*2412.00	104.40 AV			1.05 V	175	73.91	30.49
5	4824.00	51.00 PK	74.00	-23.00	1.35 V	209	15.31	35.69
6	4824.00	46.90 AV	54.00	-7.10	1.35 V	209	11.21	35.69
7	7236.00	53.20 PK	74.00	-20.80	1.17 V	200	10.96	42.24
8	7236.00	39.20 AV	54.00	-14.80	1.17 V	200	-3.04	42.24

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.30 PK			1.41 H	105	74.69	30.61
2	*2437.00	100.20 AV			1.41 H	105	69.59	30.61
3	4874.00	61.50 PK	74.00	-12.50	1.57 H	133	25.70	35.80
4	4874.00	47.10 AV	54.00	-6.90	1.57 H	133	11.30	35.80
5	7311.00	51.50 PK	74.00	-22.50	1.44 H	178	8.98	42.52
6	7311.00	39.20 AV	54.00	-14.80	1.44 H	178	-3.32	42.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.90 PK			1.06 V	357	79.29	30.61
2	*2437.00	105.10 AV			1.06 V	357	74.49	30.61
3	4874.00	63.50 PK	74.00	-10.50	1.32 V	317	27.70	35.80
4	4874.00	49.20 AV	54.00	-4.80	1.32 V	317	13.40	35.80
5	7311.00	52.50 PK	74.00	-21.50	1.22 V	244	9.98	42.52
6	7311.00	39.80 AV	54.00	-14.20	1.22 V	244	-2.72	42.52

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.70 PK			1.10 H	267	70.98	30.72
2	*2462.00	96.70 AV			1.10 H	267	65.98	30.72
3	2483.50	57.90 PK	74.00	-16.10	1.08 H	272	27.08	30.82
4	2483.50	45.30 AV	54.00	-8.70	1.08 H	272	14.48	30.82
5	4924.00	49.30 PK	74.00	-24.70	1.49 H	122	13.40	35.90
6	4924.00	42.50 AV	54.00	-11.50	1.49 H	122	6.60	35.90
7	7386.00	49.70 PK	74.00	-24.30	1.26 H	109	6.90	42.80
8	7386.00	38.20 AV	54.00	-15.80	1.26 H	109	-4.60	42.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.10 PK			1.04 V	162	81.38	30.72
2	*2462.00	106.80 AV			1.04 V	162	76.08	30.72
3	2483.50	63.10 PK	74.00	-10.90	1.04 V	356	32.28	30.82
4	2483.50	48.70 AV	54.00	-5.30	1.04 V	356	17.88	30.82
5	4924.00	51.60 PK	74.00	-22.40	1.18 V	162	15.70	35.90
6	4924.00	47.00 AV	54.00	-7.00	1.18 V	162	11.10	35.90
7	7386.00	51.40 PK	74.00	-22.60	1.34 V	108	8.60	42.80
8	7386.00	38.70 AV	54.00	-15.30	1.34 V	108	-4.10	42.80



REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

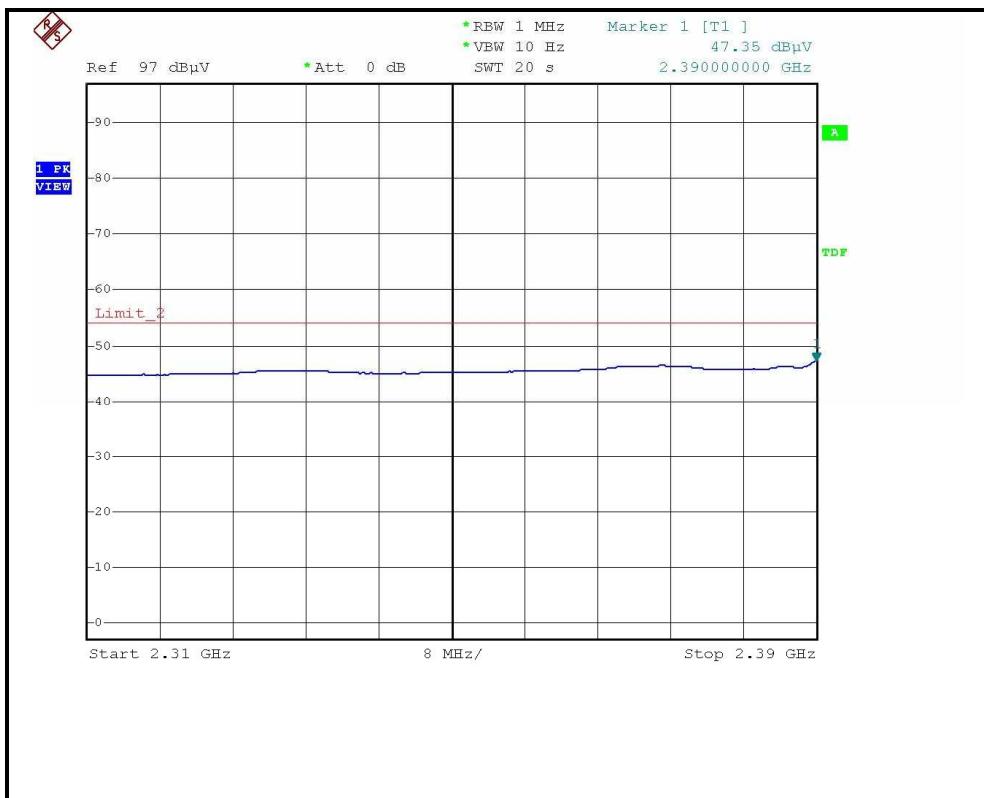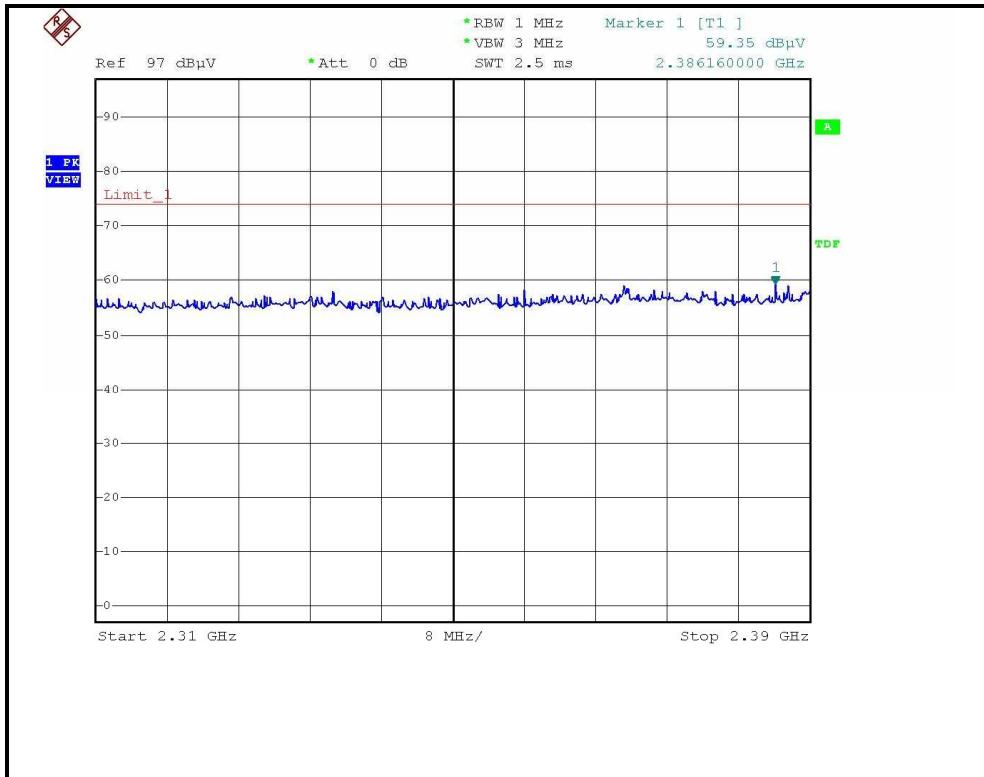



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

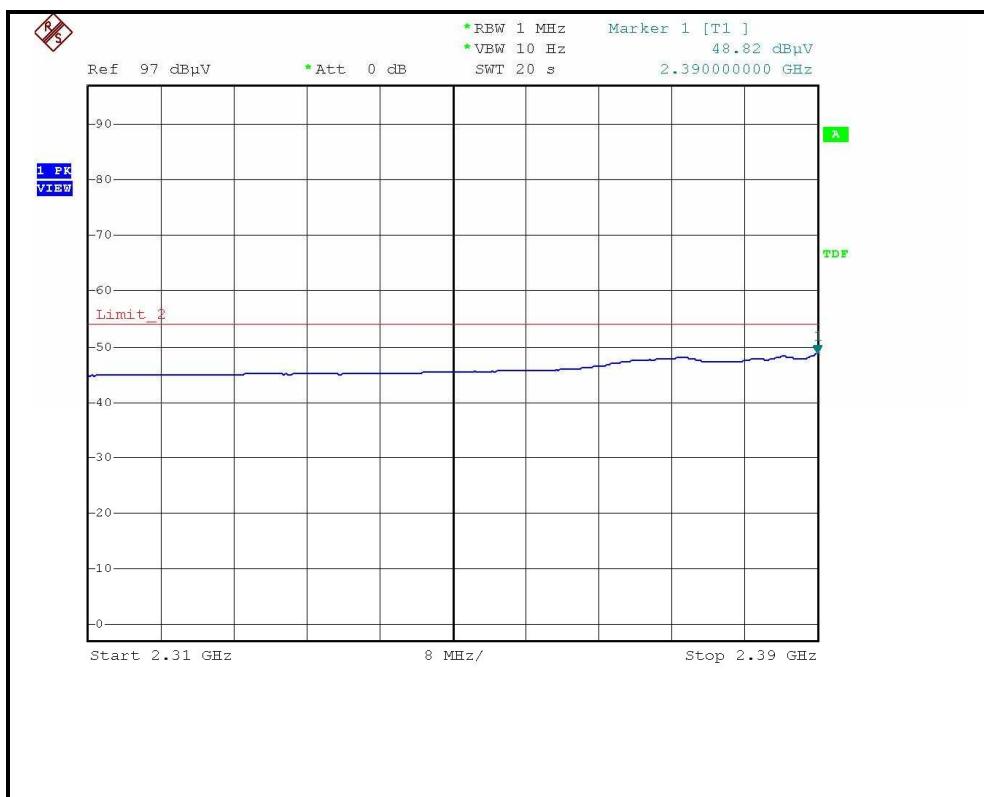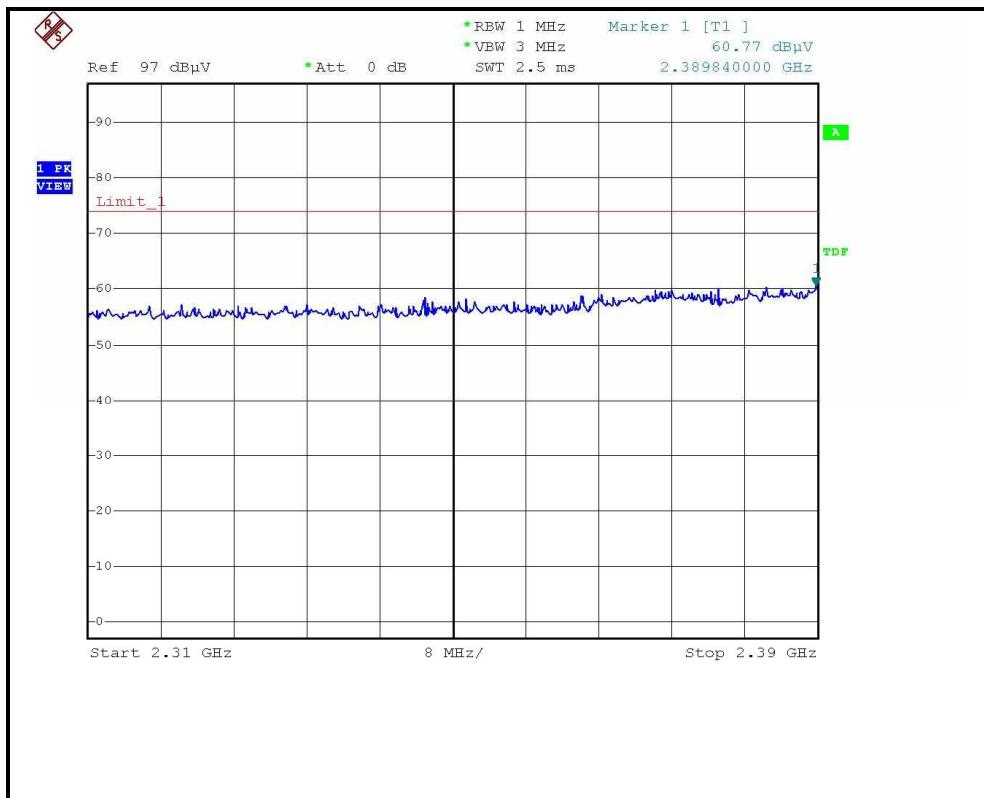

RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

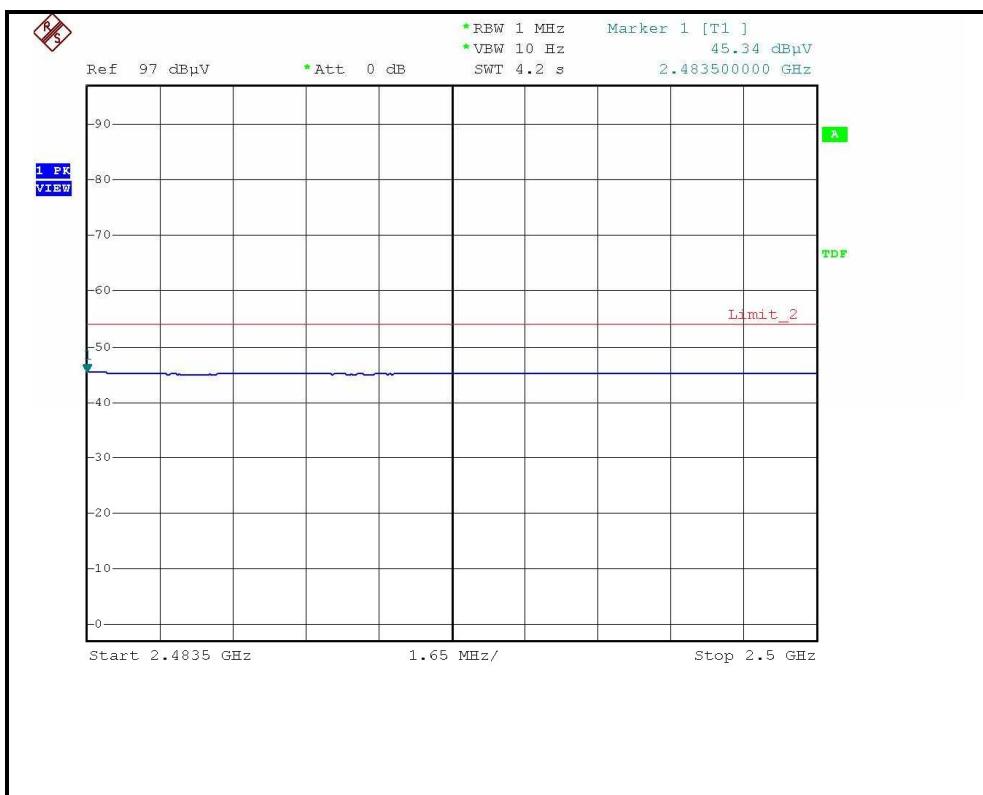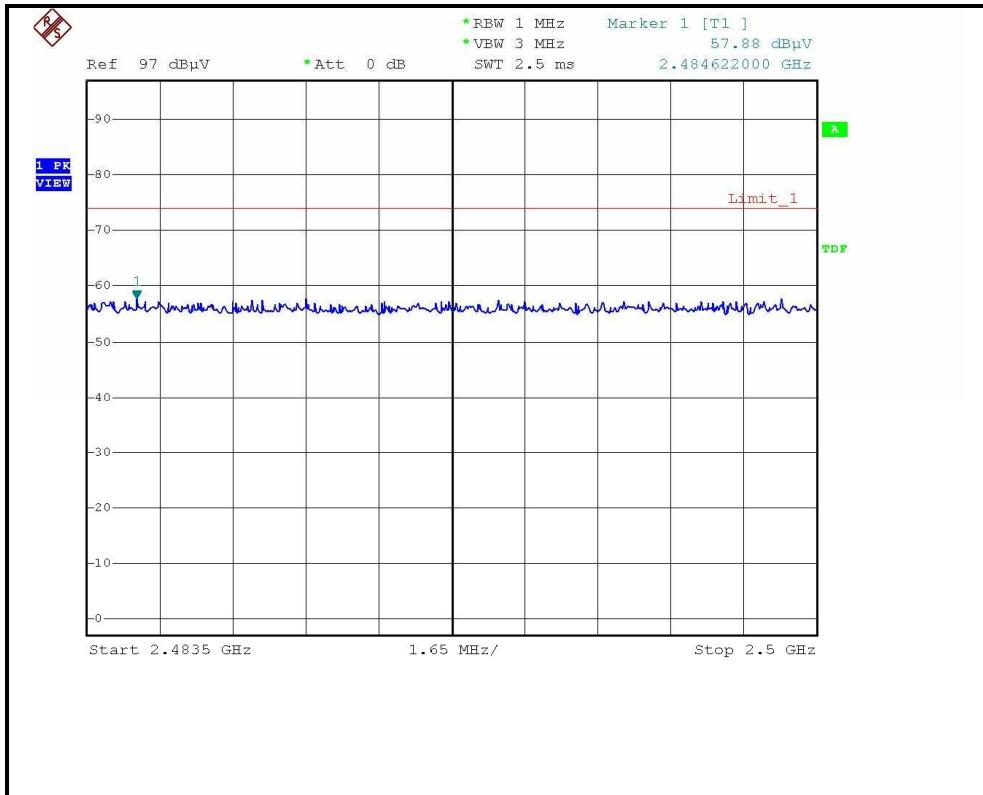

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

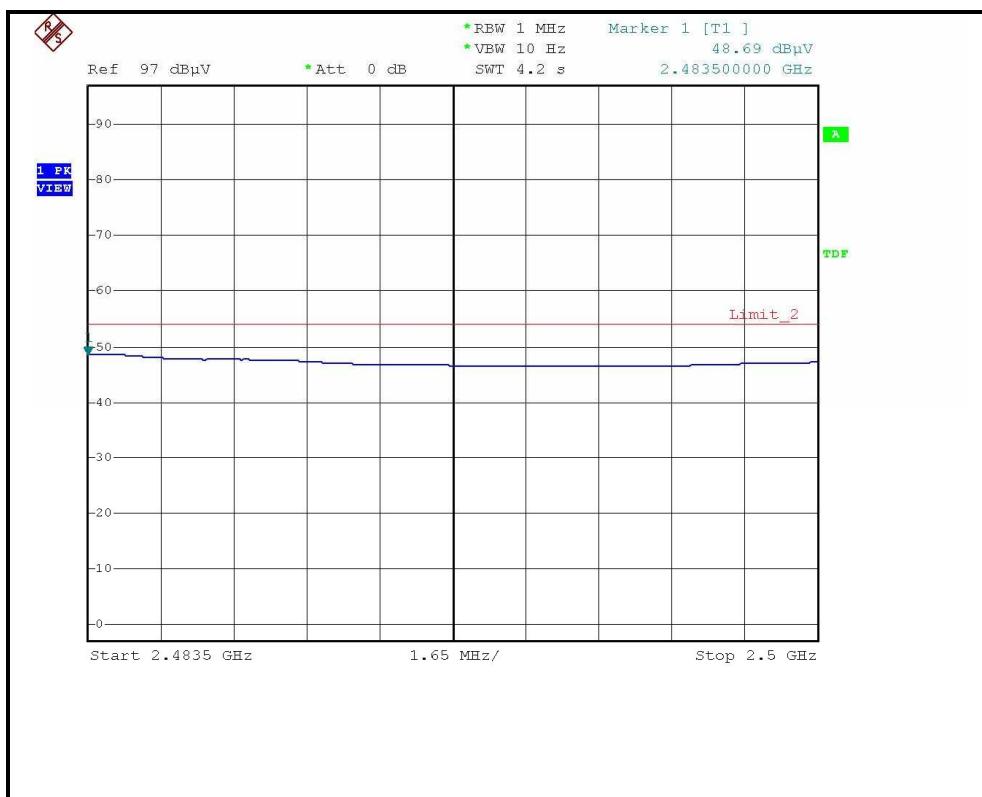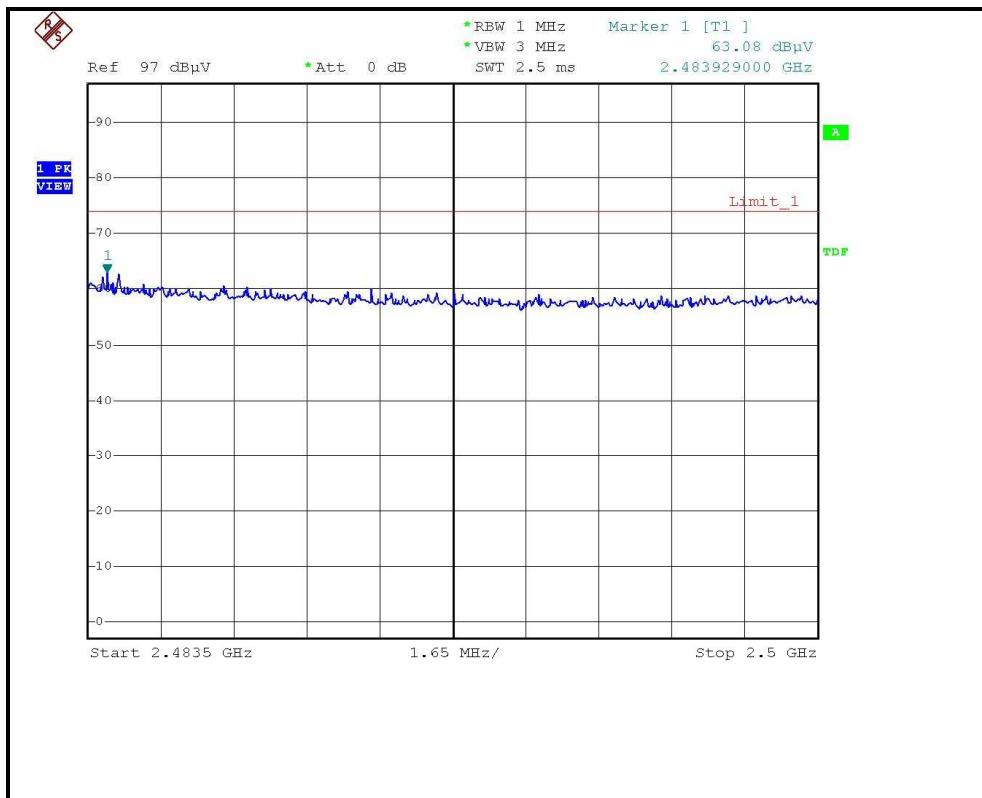



4.2.8 TEST RESULTS - OFDM 802.11g Normal OFDM modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.30 PK	74.00	-7.70	1.40 H	265	35.90	30.40
2	2390.00	47.90 AV	54.00	-6.10	1.40 H	265	17.50	30.40
3	*2412.00	105.90 PK			1.40 H	265	75.41	30.49
4	*2412.00	95.70 AV			1.40 H	265	65.21	30.49
5	4824.00	47.70 PK	74.00	-26.30	1.44 H	277	12.01	35.69
6	4824.00	33.90 AV	54.00	-20.10	1.44 H	277	-1.79	35.69
7	7236.00	52.50 PK	74.00	-21.50	1.36 H	201	10.26	42.24
8	7236.00	38.20 AV	54.00	-15.80	1.36 H	201	-4.04	42.24

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.20 PK	74.00	-1.80	1.05 V	334	41.80	30.40
2	2390.00	49.50 AV	54.00	-4.50	1.05 V	334	19.10	30.40
3	*2412.00	110.40 PK			1.01 V	332	79.91	30.49
4	*2412.00	99.80 AV			1.01 V	332	69.31	30.49
5	4824.00	54.10 PK	74.00	-19.90	1.47 V	33	18.41	35.69
6	4824.00	38.20 AV	54.00	-15.80	1.47 V	33	2.51	35.69
7	7236.00	52.10 PK	74.00	-21.90	1.27 V	269	9.86	42.24
8	7236.00	38.70 AV	54.00	-15.30	1.27 V	269	-3.54	42.24

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*” : Fundamental frequency



MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.90 PK			1.42 H	110	79.29	30.61
2	*2437.00	99.50 AV			1.42 H	110	68.89	30.61
3	4874.00	55.90 PK	74.00	-18.10	1.38 H	239	20.10	35.80
4	4874.00	41.80 AV	54.00	-12.20	1.38 H	239	6.00	35.80
5	7311.00	53.10 PK	74.00	-20.90	1.29 H	311	10.58	42.52
6	7311.00	38.80 AV	54.00	-15.20	1.29 H	311	-3.72	42.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	116.10 PK			1.00 V	0	85.49	30.61
2	*2437.00	105.60 AV			1.00 V	0	74.99	30.61
3	4874.00	63.70 PK	74.00	-10.30	1.30 V	298	27.90	35.80
4	4874.00	48.90 AV	54.00	-5.10	1.30 V	298	13.10	35.80
5	7311.00	52.60 PK	74.00	-21.40	1.20 V	257	10.08	42.52
6	7311.00	39.10 AV	54.00	-14.90	1.20 V	257	-3.42	42.52

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 66%RH, 961hPa	TESTED BY	Phoenix Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.90 PK			1.42 H	108	71.18	30.72
2	*2462.00	92.30 AV			1.42 H	108	61.58	30.72
3	2483.50	63.50 PK	74.00	-10.50	1.10 H	265	32.68	30.82
4	2483.50	45.90 AV	54.00	-8.10	1.10 H	265	15.08	30.82
5	4924.00	49.70 PK	74.00	-24.30	1.33 H	147	13.80	35.90
6	4924.00	35.30 AV	54.00	-18.70	1.33 H	147	-0.60	35.90
7	7386.00	52.00 PK	74.00	-22.00	1.21 H	323	9.20	42.80
8	7386.00	39.10 AV	54.00	-14.90	1.21 H	323	-3.70	42.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.20 PK			1.00 V	66	80.48	30.72
2	*2462.00	100.90 AV			1.00 V	66	70.18	30.72
3	2483.50	72.60 PK	74.00	-1.40	1.00 V	91	41.78	30.82
4	2483.50	48.90 AV	54.00	-5.10	1.00 V	91	18.08	30.82
5	4924.00	53.80 PK	74.00	-20.20	1.31 V	172	17.90	35.90
6	4924.00	40.50 AV	54.00	-13.50	1.31 V	172	4.60	35.90
7	7386.00	53.30 PK	74.00	-20.70	1.22 V	253	10.50	42.80
8	7386.00	39.80 AV	54.00	-14.20	1.22 V	253	-3.00	42.80



REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL)

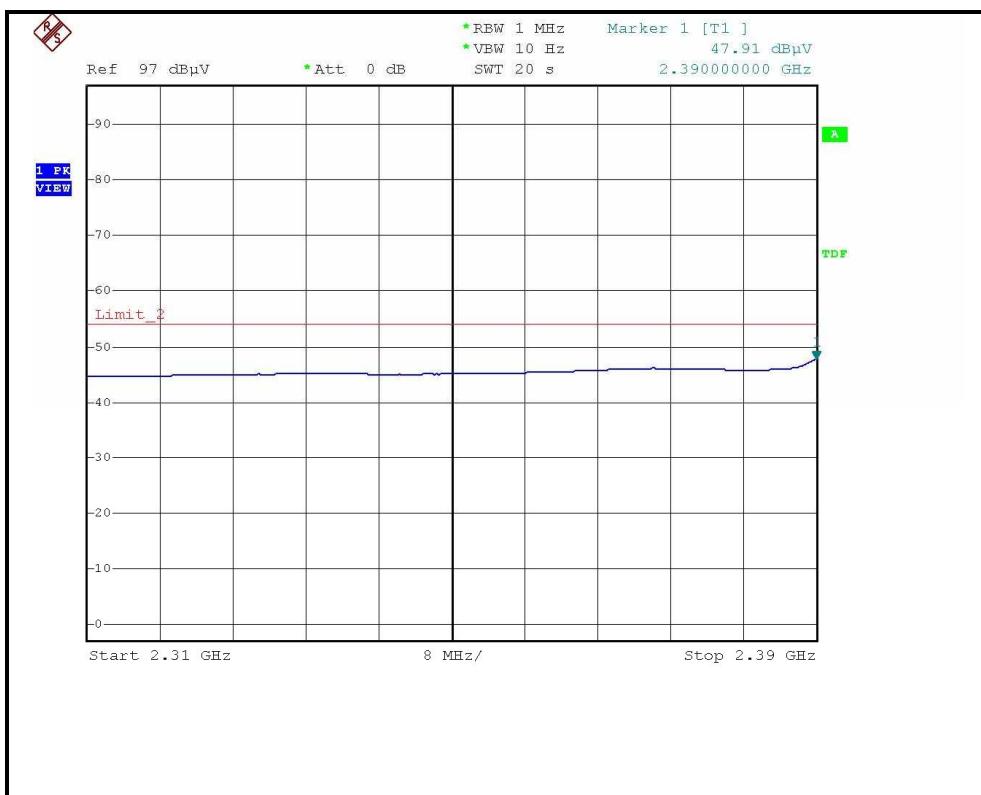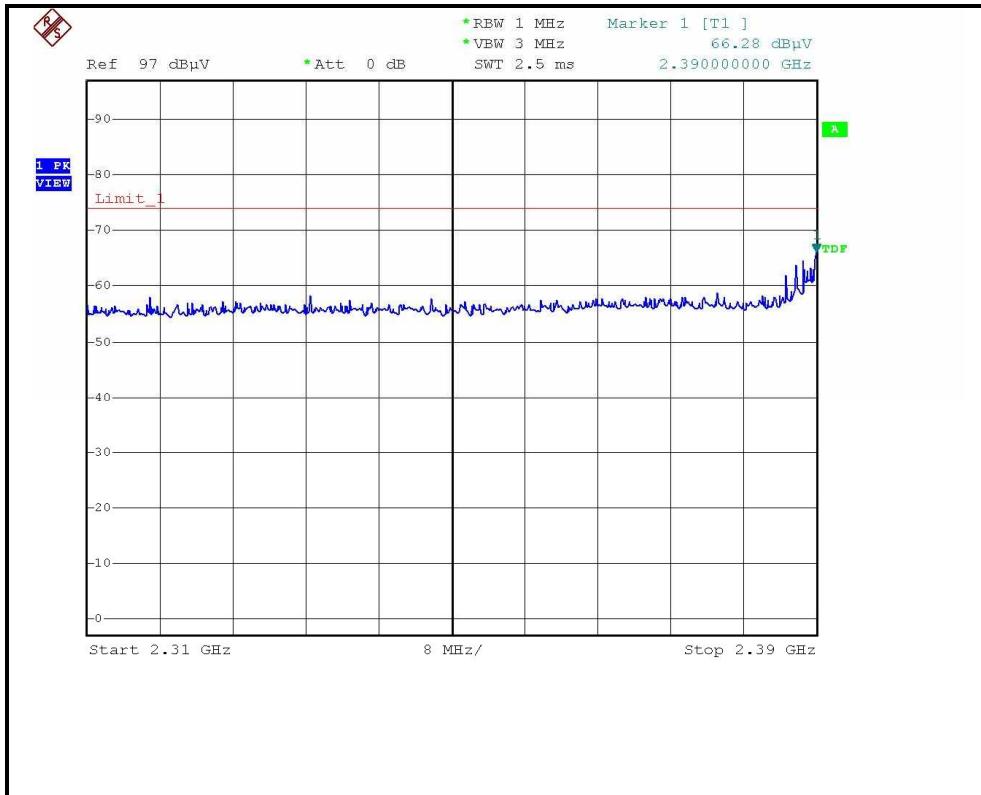



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

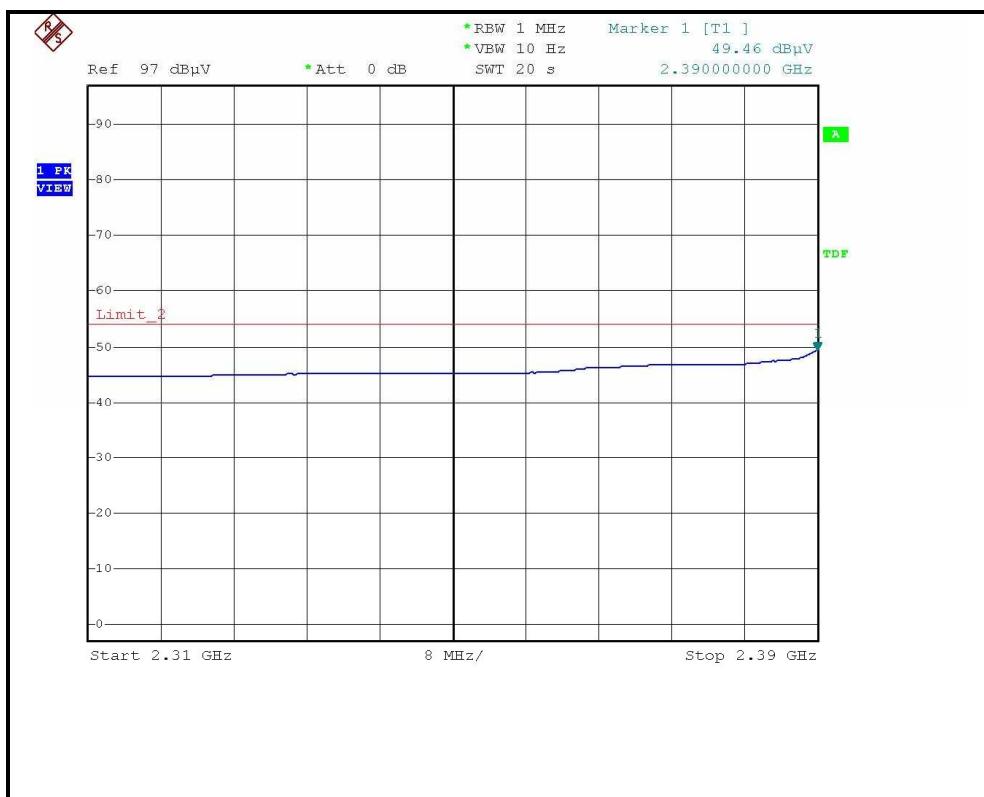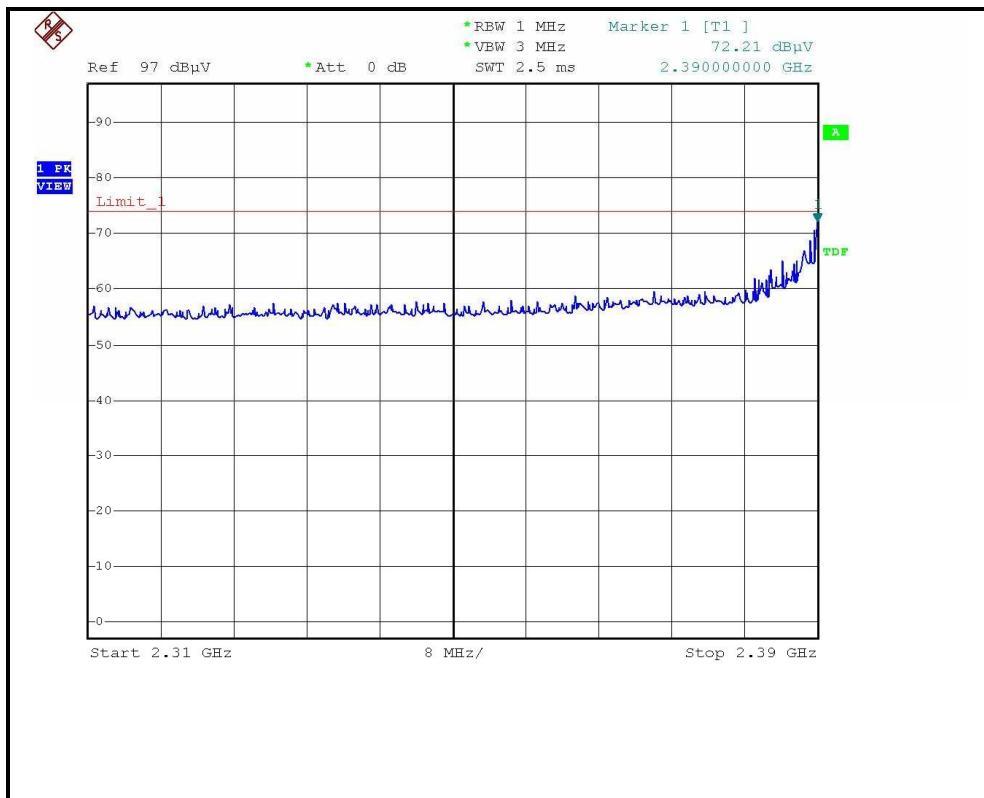

RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

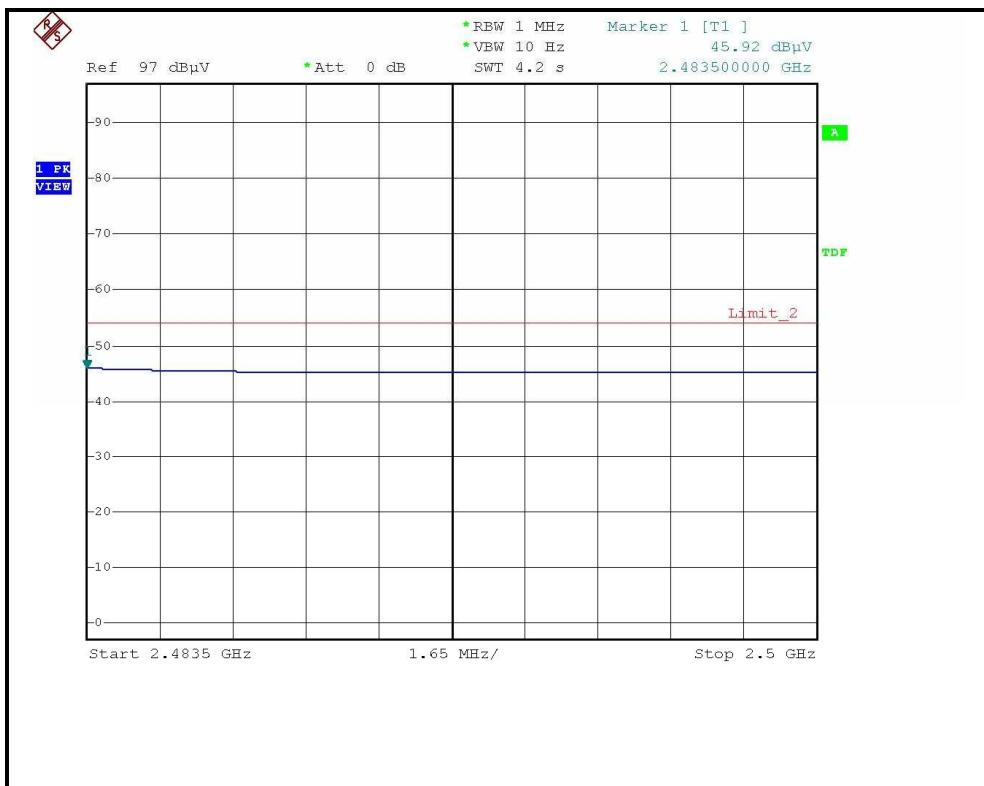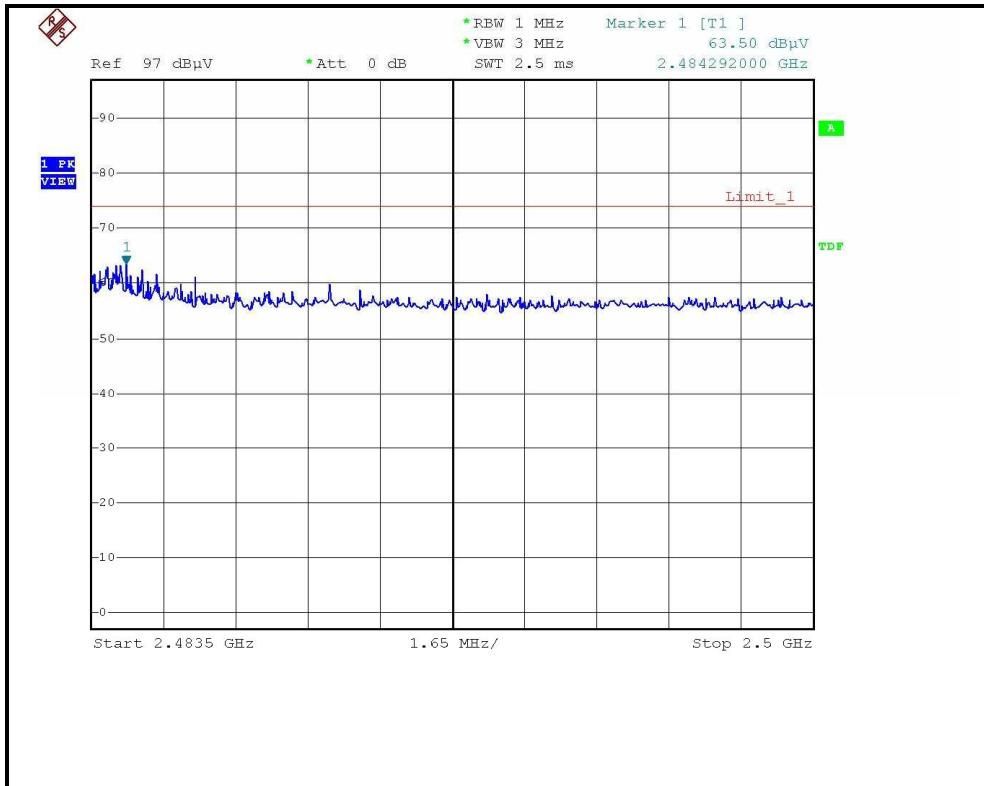

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

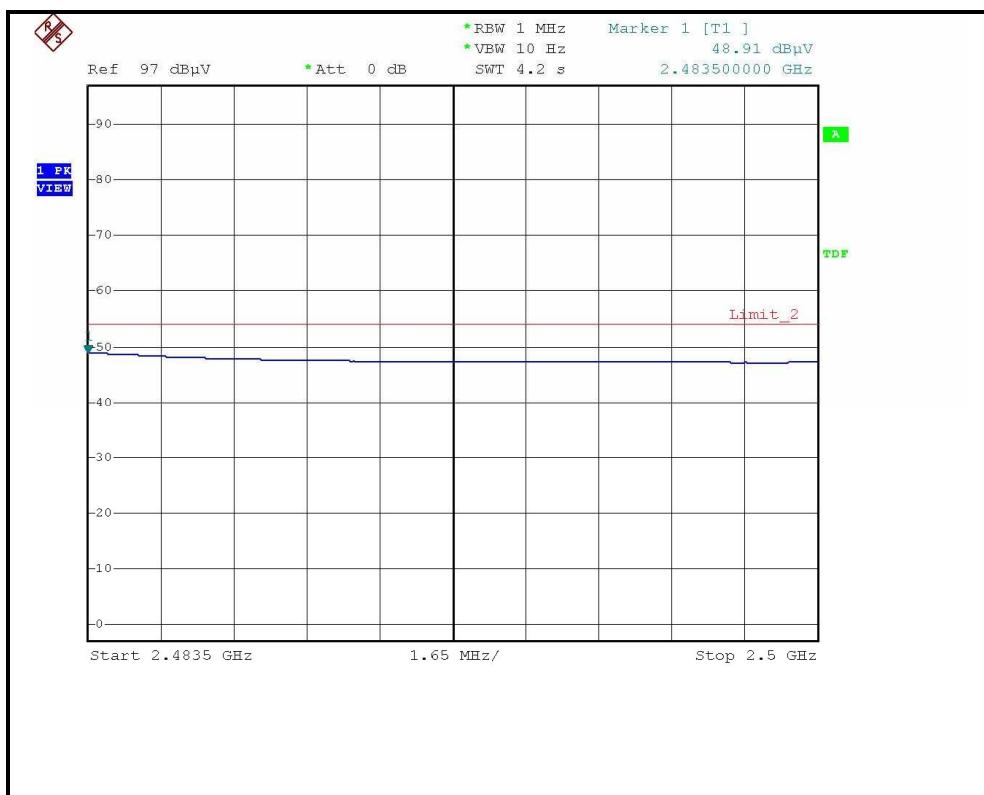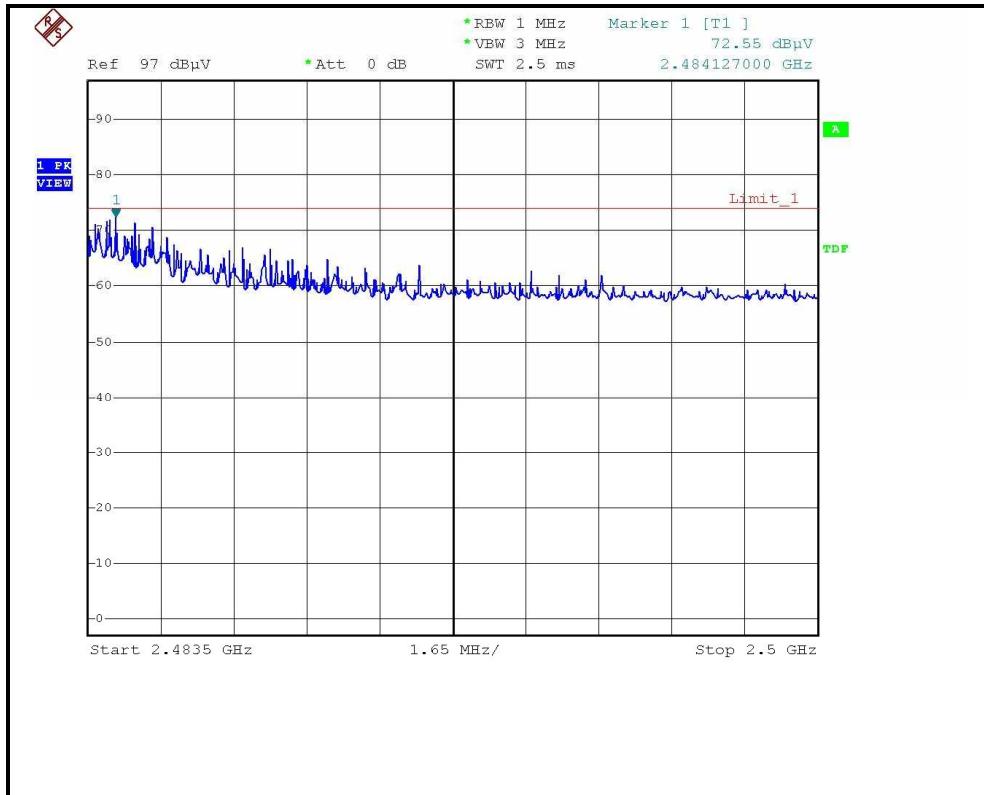



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2007


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP

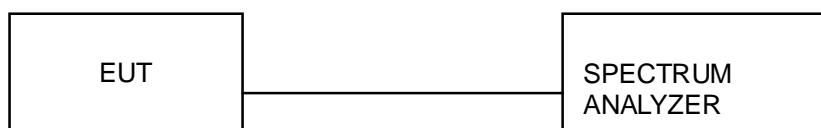

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.6 TEST RESULTS –DSSS

802.11b DSSS modulation


MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 62%RH, 961hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.04	0.5	PASS
6	2437	12.60	0.5	PASS
11	2462	13.02	0.5	PASS


CH1

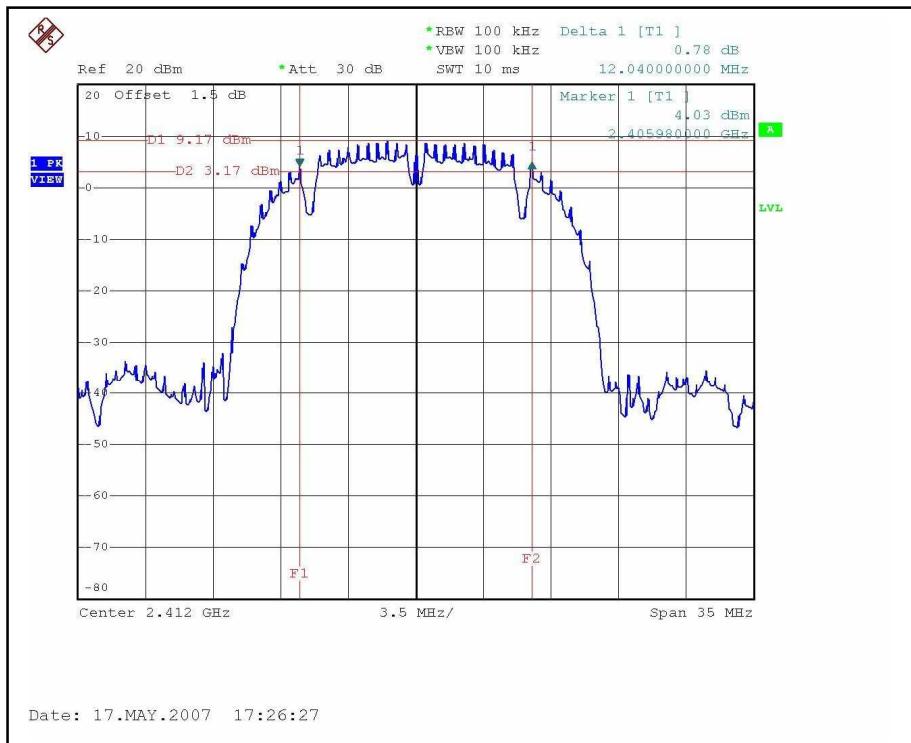

CH6

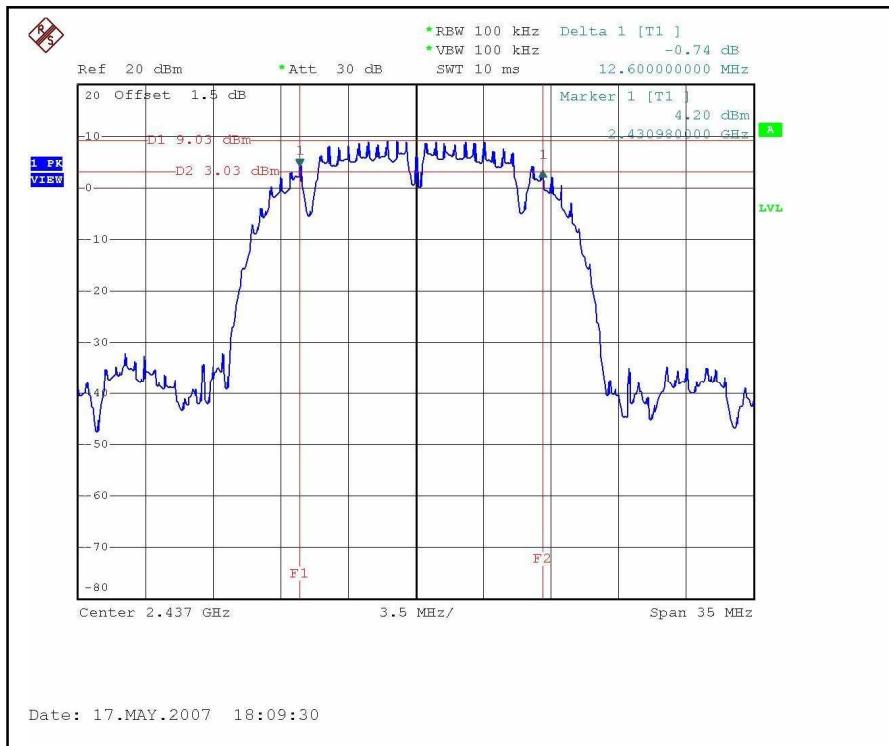

CH11

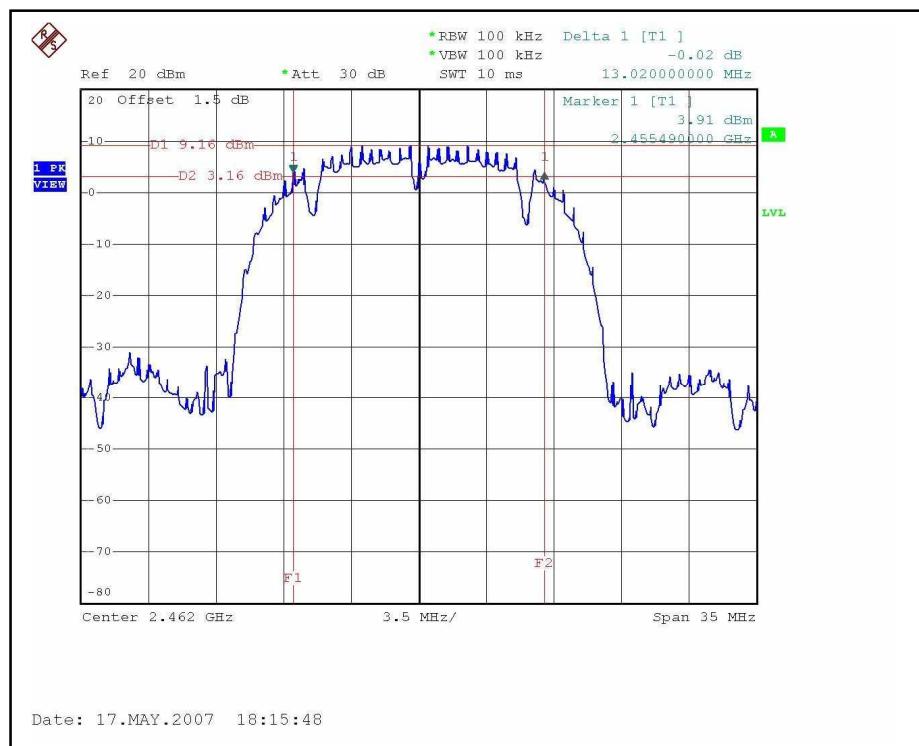




4.3.7 TEST RESULTS-OFDM

802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 62%RH, 961hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.38	0.5	PASS
6	2437	16.38	0.5	PASS
11	2462	16.38	0.5	PASS


CH1

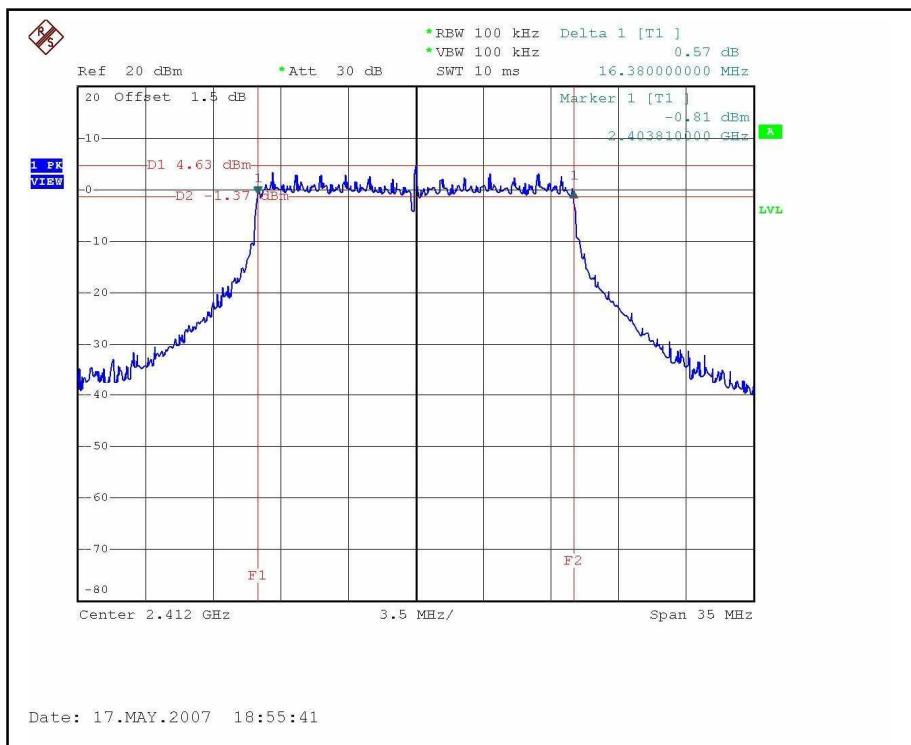

CH6

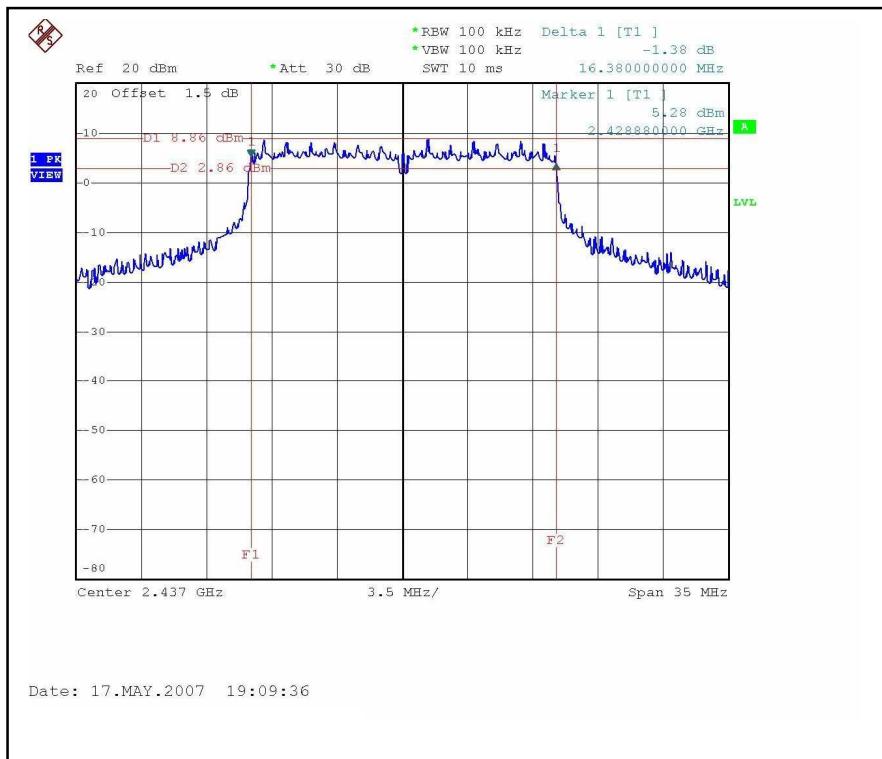

CH11

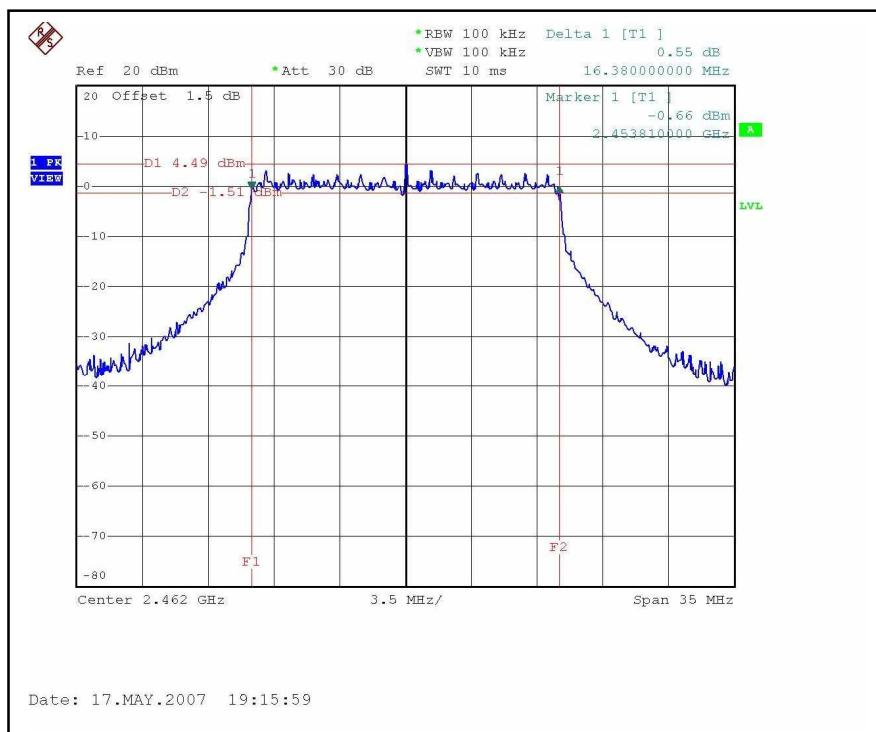



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2007
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2007
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jun. 21, 2007
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP

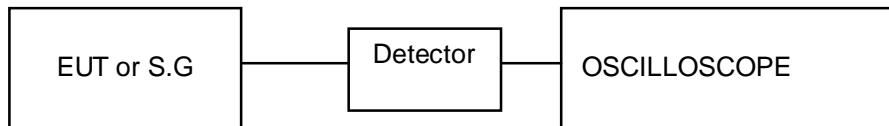

4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



4.4.6 TEST RESULTS – DSSS

802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 62%RH, 961hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	111.686	20.48	30	PASS
6	2437	69.984	18.45	30	PASS
11	2462	66.222	18.21	30	PASS



4.4.7 TEST RESULTS –OFDM

802.11g OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 62%RH, 961hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	98.401	19.93	30	PASS
6	2437	366.438	25.64	30	PASS
11	2462	101.391	20.06	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2007

NOTE:


- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP

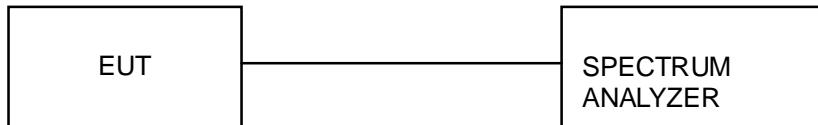

4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5





4.5.6 TEST RESULTS –DSSS


802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 62%RH, 961hPa
TESTED BY	Wen Yu		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	2.91	8	PASS
6	2437	2.71	8	PASS
11	2462	2.54	8	PASS

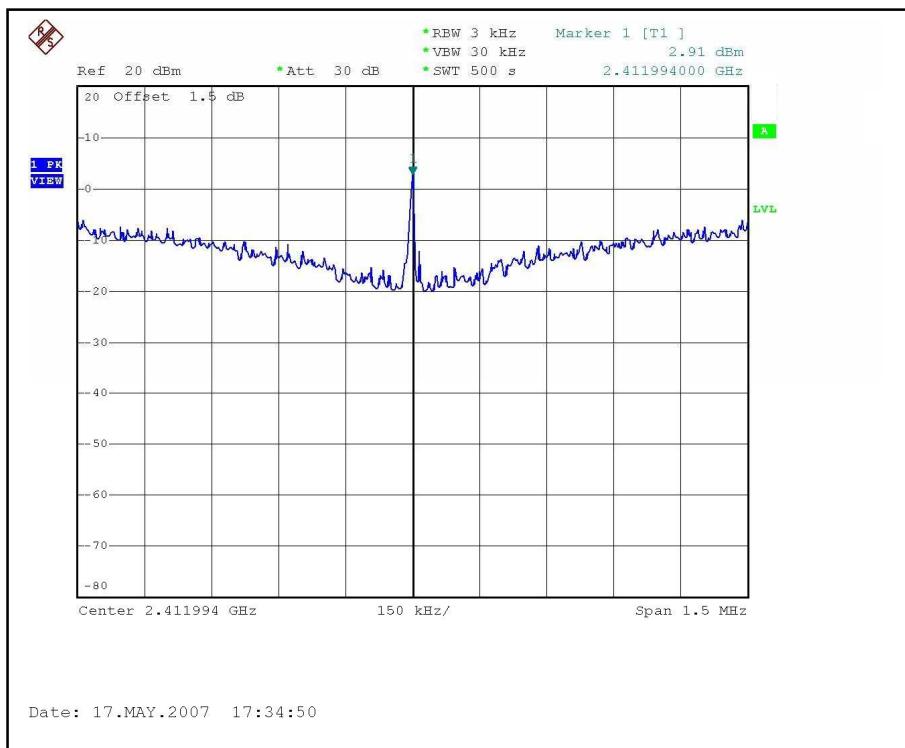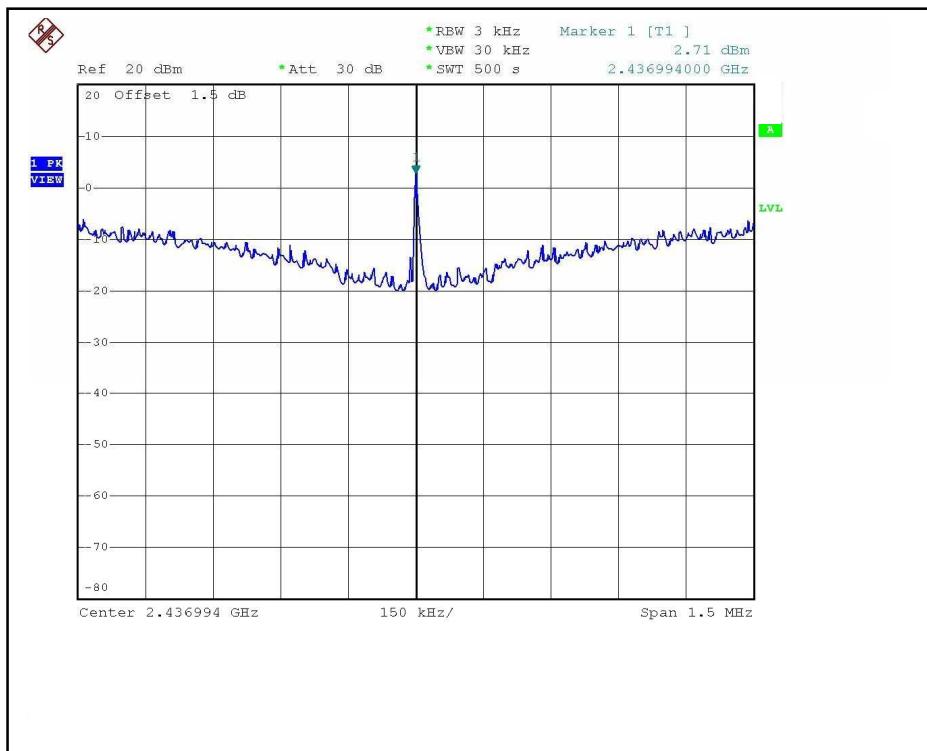CH1

CH6

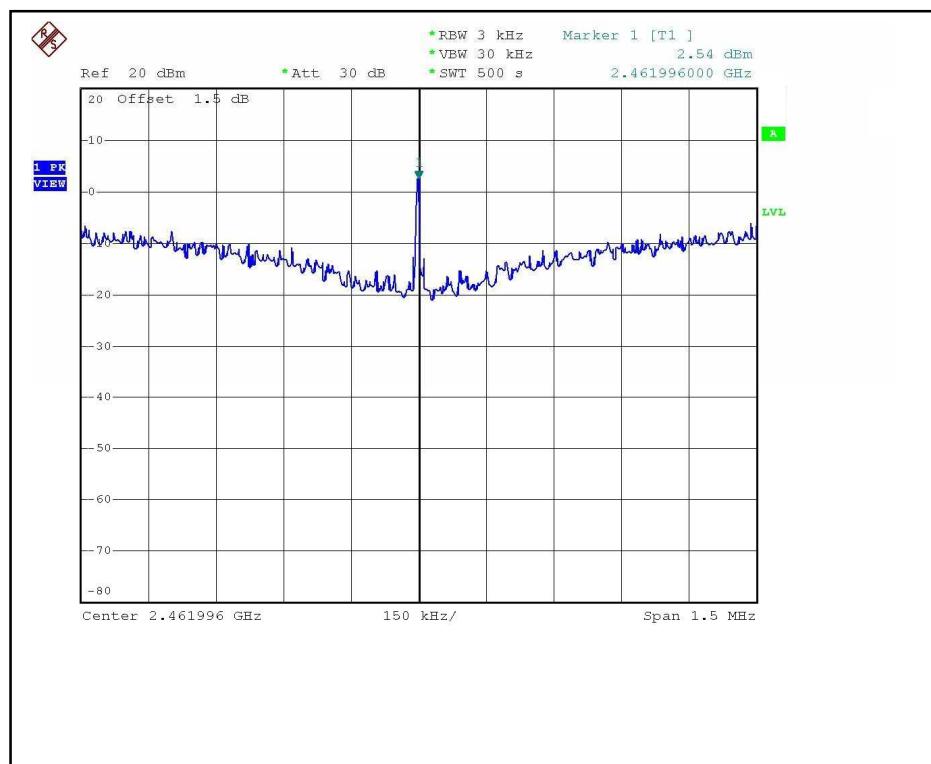
CH11







4.5.7 TEST RESULTS –OFDM


802.11g OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 62%RH, 961hPa
TESTED BY	Wen Yu		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	2.79	8	PASS
6	2437	2.91	8	PASS
11	2462	2.42	8	PASS

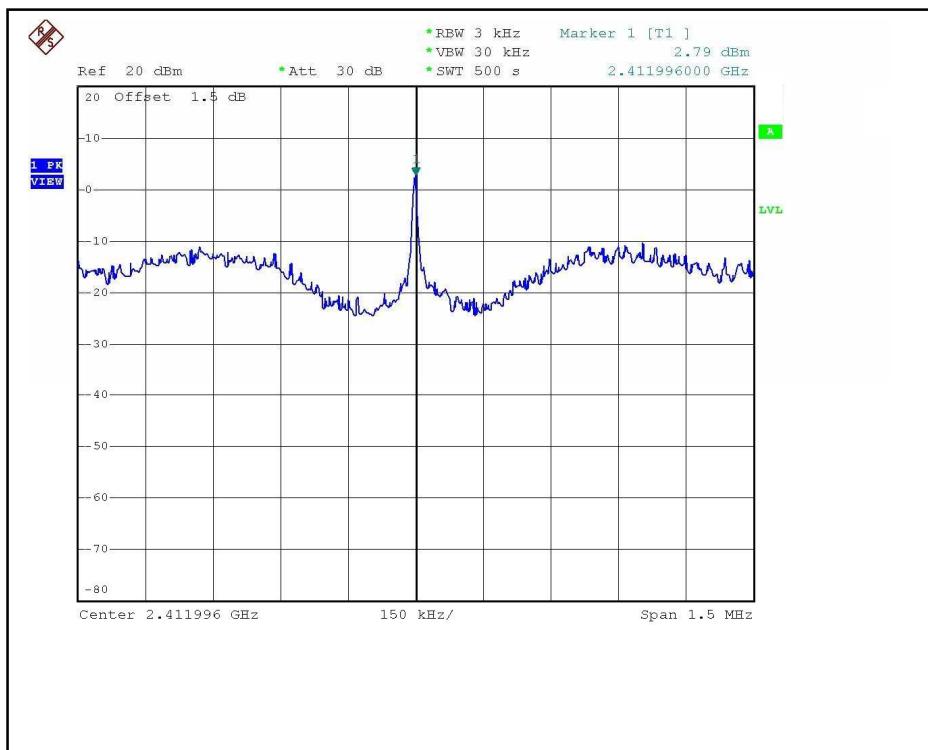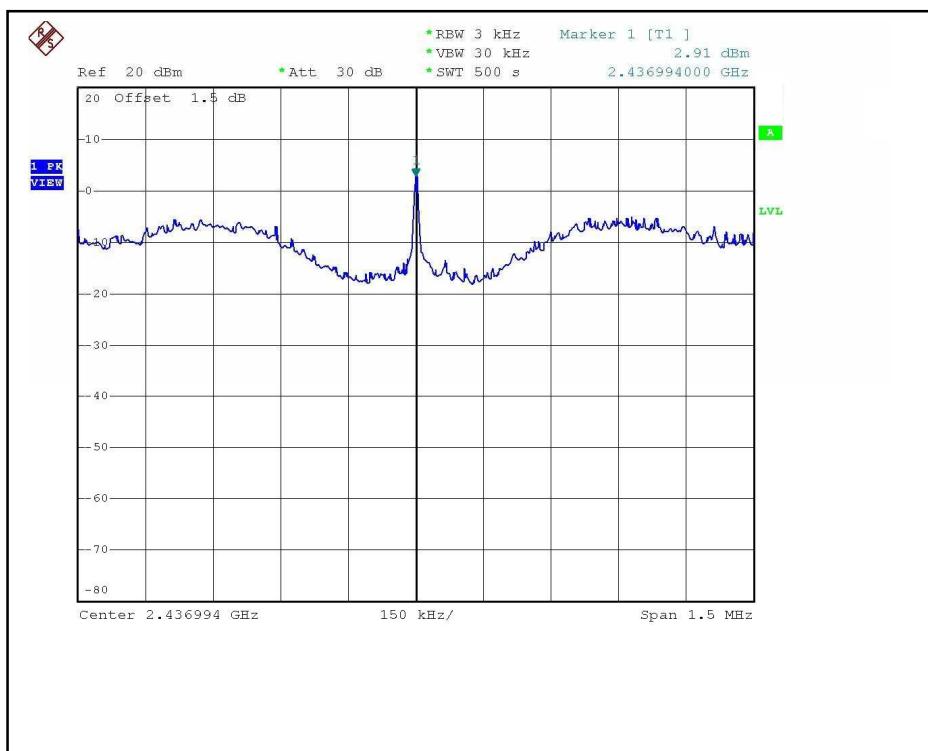CH1

CH6

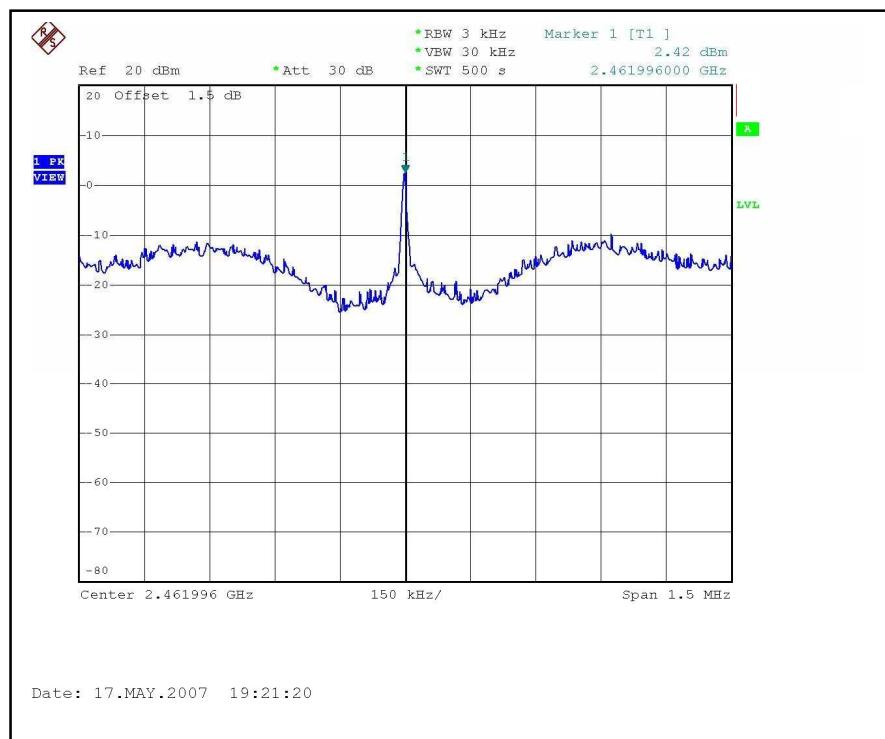
CH11





4.6 CONDUCTED EMISSION AND BAND EDGES MEASUREMENT

4.6.1 LIMITS OF CONDUCTED EMISSION AND BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2007

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (RBW = VBW = 100kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6




4.6.6 TEST RESULTS


The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS MODULATION:

CH1

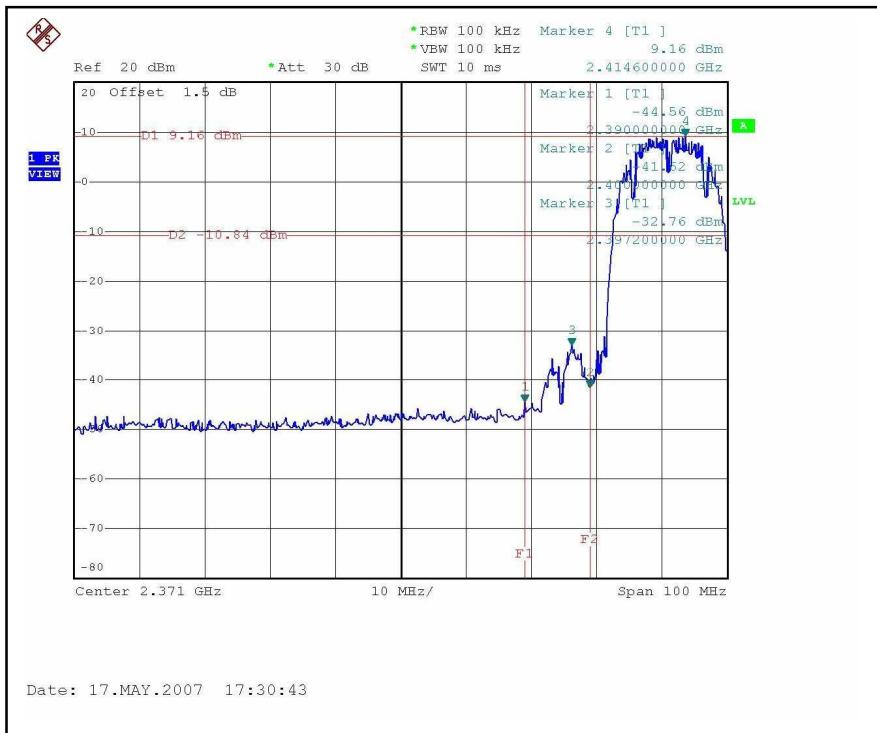


CH11

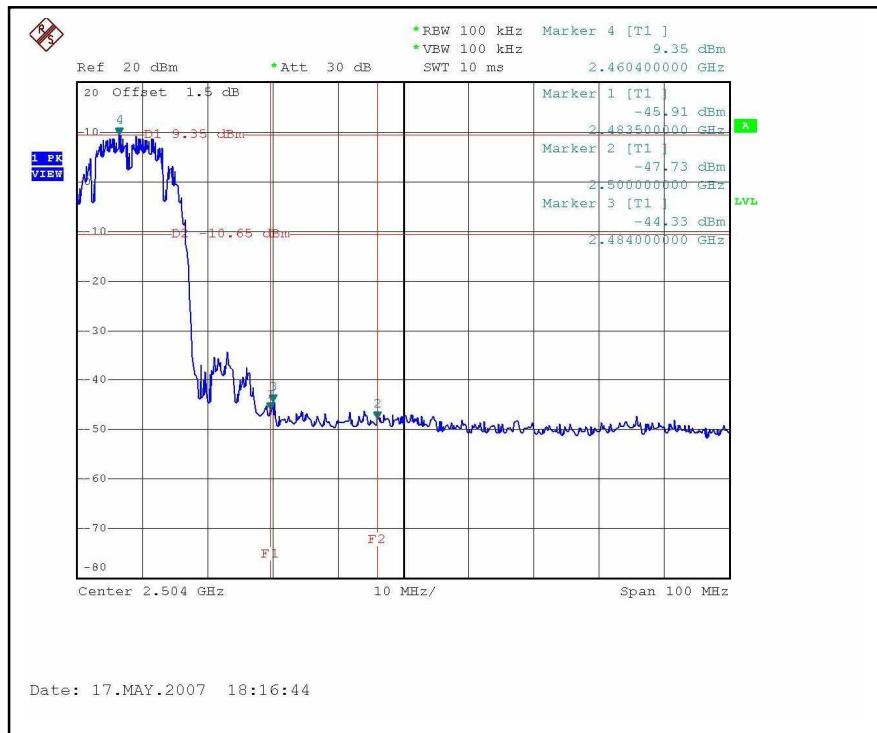


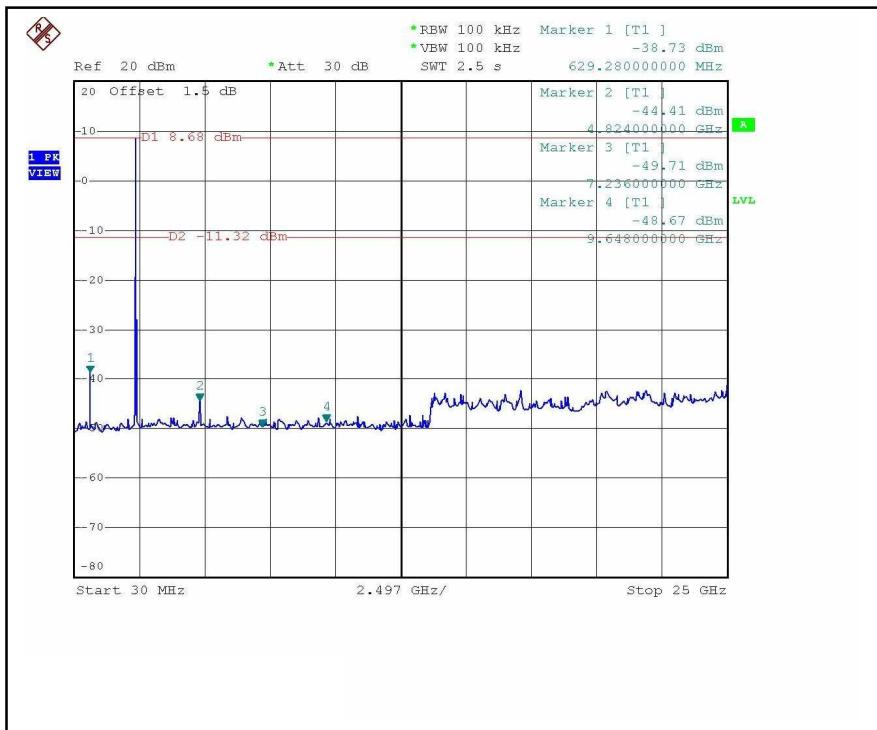
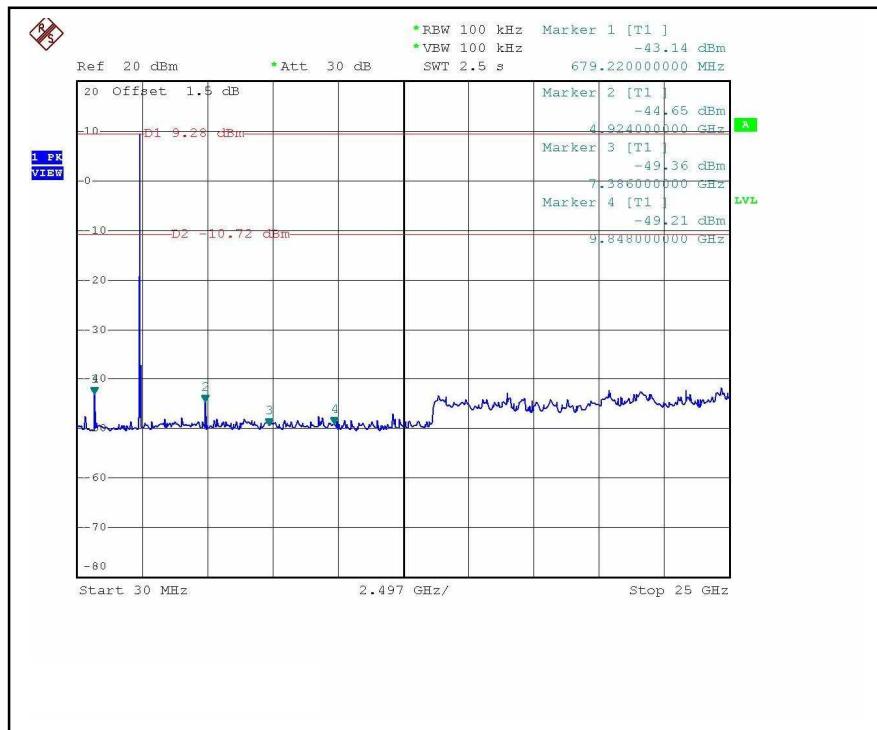
CH1

CH11

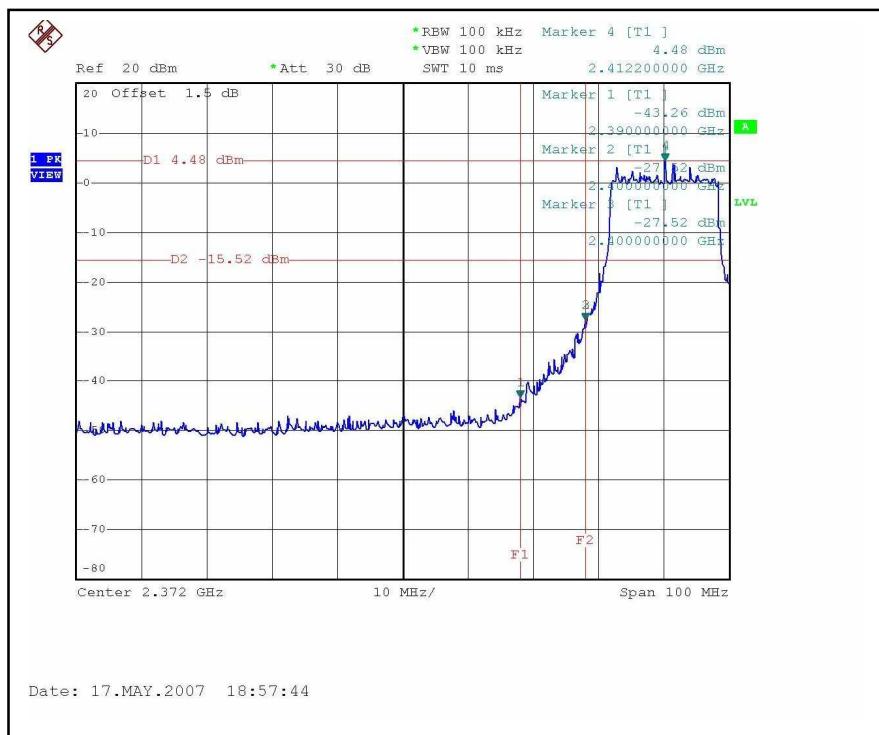
802.11g OFDM MODULATION: CH1

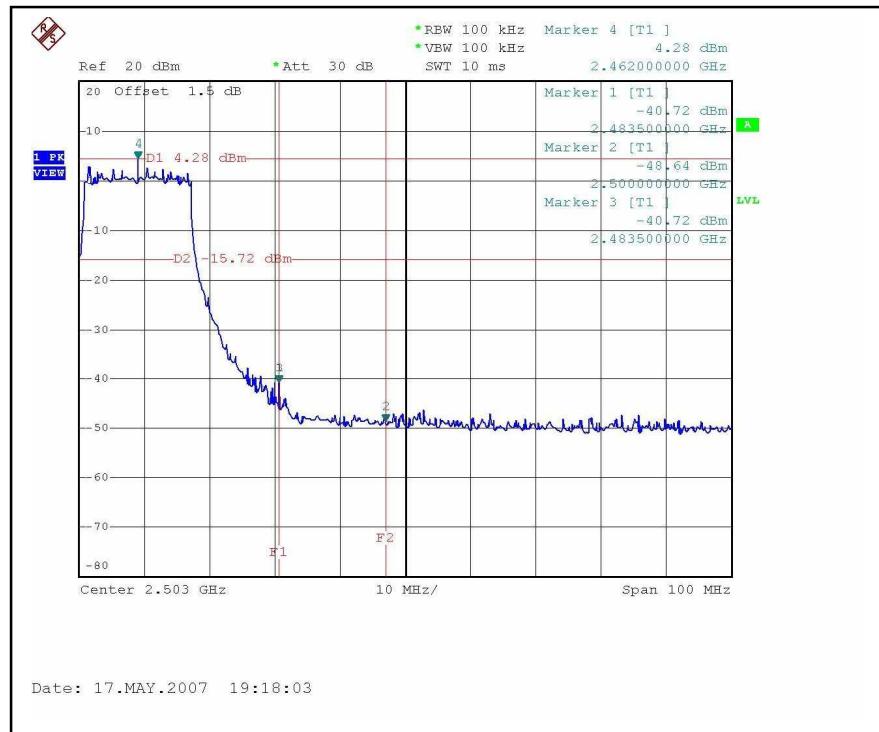

CH11

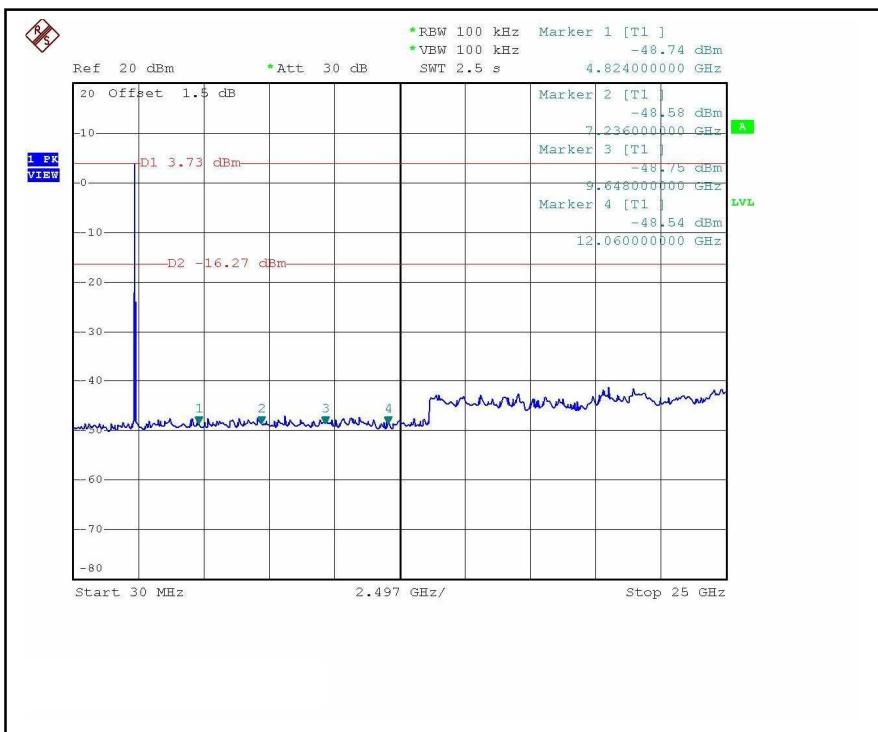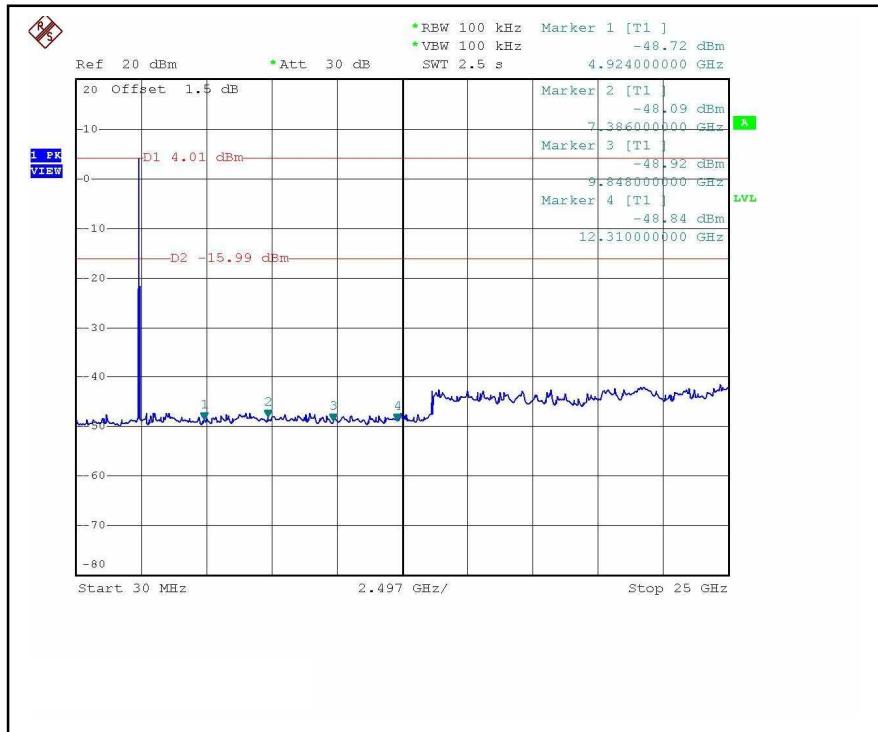

CH1

CH11




4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

There are two antennas provided to this EUT, please refer to the following table:

No.	Gain (dBi)	Antenna Type	Connector
1	1.5	Dipole	Right-Angle Reverse Polarity SMA
2	2	Chip (only Rx function)	NA



5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.