

**A RADIO TEST REPORT**  
**FOR**  
**TOUMAZ TECHNOLOGY LTD**  
**ON**  
**SensiumVitals Patch**  
**MODEL: TZ202055**

**DOCUMENT NO. TRA-008895-W-US-1**

**HULL**

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.  
**T** +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com  
[www.tracglobal.com](http://www.tracglobal.com)

**TRaC Wireless Test Report** : TRA-008895-W-US-1

**Applicant** : Toumaz Technology Ltd

**Apparatus** : SensiumVitals Patch  
: MODEL: TZ202055

**Specification(s)** : CFR47 Part 15 (c)

**Purpose of Test** : **Certification**

**FCCID** : AEJ-TZ202055R1

**Authorised by** :



: Radio Product Manager

**Issue Date** : 2<sup>nd</sup> May 2012

**Authorised Copy Number** : PDF

**Contents**

Section 1:	Introduction	4
1.1	General	4
1.2	Tests Requested By	5
1.3	Manufacturer	5
1.4	Apparatus Assessed	5
1.5	Test Result Summary	6
1.6	Notes Relating To The Assessment	7
1.7	Deviations from Test Standards	7
Section 2:	Measurement Uncertainty	8
2.1	Measurement Uncertainty Values	8
Section 3:	Modifications	10
3.1	Modifications Performed During Assessment	10
Appendix A:	Formal Emission Test Results	11
A1	Transmitter Intentional Emission Radiated	12
A2	Band occupancy	13
A3	Radiated Electric Field Emissions	14
A4	Unintentional Radiated Emissions	18
Appendix B:	Supporting Graphical Data	20
Appendix C:	Additional Test and Sample Details	26
Appendix D:	Additional Information	32
Appendix E:	Photographs and Figures	33
Appendix F:	MPE Calculation	36

**Section 1:****Introduction****1.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global [ ]  
Unit E  
South Orbital Trading Park  
Hedon Road  
Hull, HU9 1NJ.  
United Kingdom.

Telephone: +44 (0) 1482 801801  
Fax: +44 (0) 1482 801806

TRaC Global [X]  
Unit 1  
Pendle Place  
Skelmersdale  
West Lancashire, WN8 9PN  
United Kingdom

Telephone: +44 (0) 1695 556666  
Fax: +44 (0) 1695 577077

Email: [test@tracglobal.com](mailto:test@tracglobal.com)  
Web site: <http://www.tracglobal.com>

Tests performed by: D. Winstanley

Report author: D. Winstanley

**This report must not be reproduced except in full without prior written permission from TRaC Global.**

## **1.2 Tests Requested By**

This testing in this report was requested by :

Toumaz Technology Ltd  
Building 3  
115 Milton Park  
Abingdon  
Oxfordshire  
OX14 4RZ

## **1.3 Manufacturer**

Toumaz Technology Ltd  
Building 3  
115 Milton Park  
Abingdon  
Oxfordshire  
OX14 4RZ

## **1.4 Apparatus Assessed**

The following apparatus was assessed between 19<sup>th</sup> – 21<sup>st</sup> April 2012:

SensiumVitals Patch  
MODEL: TZ202055

The TZ202055 is part of a patient monitoring system.

The disposable patch, when applied to the patient and activated, collects and transmits patient vital sign data: heart rate, respiratory rate, and auxiliary temperature. The vital sign data are then displayed on the Wireless Monitoring Application.

For the purposes of testing a load was attached to the electrode connectors on the underside of the patch to simulate a body. Detail of this load can be found in Appendix D.

Testing was performed with the unit operating at the following frequencies

- 903.2 MHz
- 915.0 MHz
- 927.8 MHz

## 1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
Spurious Emissions Radiated <1000MHz	Title 47 of the CFR: Part 15 Subpart (c) 15.209 & 15.249(a)	ANSI C63.10:2009	Pass
Spurious Emissions Radiated >1000MHz	Title 47 of the CFR: Part 15 Subpart (c) 15.209 & 15.249(a)	ANSI C63.10:2009	Pass
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart (c) 15.207	ANSI C63.10:2009	N/A
Intentional Emission Frequency	Title 47 of the CFR: Part 15 Subpart (c) 15.249(a)	ANSI C63.10:2009	Pass
Intentional Emission Field Strength	Title 47 of the CFR: Part 15 Subpart (c) 15.249(a)	ANSI C63.10:2009	Pass
Intentional Emission Band Occupancy	Title 47 of the CFR: Part 15 Subpart (c) 15.215(c)	ANSI C63.10:2009	Pass
Intentional Emission ERP (mW)	Title 47 of the CFR: Part 15 Subpart (c)	ANSI C63.10:2009	N/A
Unintentional Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart (b) 15.109	ANSI C63.10:2009	Pass
Antenna Arrangements Integral:	Title 47 of the CFR: Part 15 Subpart (c) 15.203	-	Pass
Antenna Arrangements External Connector	Title 47 of the CFR: Part 15 Subpart (c) 15.204	-	N/A
Restricted Bands	Title 47 of the CFR: Part 15 Subpart (c) 15.205	-	-
Maximum Frequency of Search	Title 47 of the CFR: Part 15 Subpart (c) 15.33	-	-
Extrapolation Factor	Title 47 of the CFR: Part 15 Subpart (c) 15.31(f)	-	-

Abbreviations used in the above table:

ANSI C 63.10:2009 is outside the scope of the laboratories UKAS accreditation.

CFR : Code of Federal Regulations  
REFE : Radiated Electric Field Emissions

ANSI : American National Standards Institution  
PLCE : Power Line Conducted Emissions

## **1.6 Notes Relating To The Assessment**

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

## **1.7 Deviations from Test Standards**

There were no deviations from the standards tested to.

**Section 2:****Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For the test data recorded in accordance with note (iii) of Section 2.1 the following measurement uncertainty was calculated:

**Radio Testing – General Uncertainty Schedule**

*All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.*

**[1] Adjacent Channel Power**

Uncertainty in test result = **1.86dB**

**[2] Carrier Power**

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

**[3] Effective Radiated Power**

Uncertainty in test result = **4.71dB**

**[4] Spurious Emissions**

Uncertainty in test result = **4.75dB**

**[5] Maximum frequency error**

Uncertainty in test result (Power Meter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

**[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field**

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

**[7] Frequency deviation**

Uncertainty in test result = **3.2%**

**[8] Magnetic Field Emissions**

Uncertainty in test result = **2.3dB**

**[9] Conducted Spurious**

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

**[10] Channel Bandwidth**

Uncertainty in test result = **15.5%**



**[11] Amplitude and Time Measurement – Oscilloscope**

Uncertainty in overall test level = **2.1dB**,  
Uncertainty in time measurement = **0.59%**,  
Uncertainty in Amplitude measurement = **0.82%**

**[12] Power Line Conduction**

Uncertainty in test result = **3.4dB**

**[13] Spectrum Mask Measurements**

Uncertainty in test result = **2.59% (frequency)**  
Uncertainty in test result = **1.32dB (amplitude)**

**[14] Adjacent Sub Band Selectivity**

Uncertainty in test result = **1.24dB**

**[15] Receiver Blocking – Listen Mode, Radiated**

Uncertainty in test result = **3.42dB**

**[16] Receiver Blocking – Talk Mode, Radiated**

Uncertainty in test result = **3.36dB**

**[17] Receiver Blocking – Talk Mode, Conducted**

Uncertainty in test result = **1.24dB**

**[18] Receiver Threshold**

Uncertainty in test result = **3.23dB**

**[19] Transmission Time Measurement**

Uncertainty in test result = **7.98%**

## **Section 3:**

## **Modifications**

### **3.1 Modifications Performed During Assessment**

No modifications were performed during the assessment

**Appendix A:****Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test		
SE	: Support Equipment	Ref	: Reference
		Freq	: Frequency
L	: Live Power Line		
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

**A1 Transmitter Intentional Emission Radiated**

<b>Carrier power was verified with the EUT transmitting Test Details:</b>	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.249(b)(1)
Measurement standard	ANSI C63.10:2003
EUT sample number	S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	17
Photographs (Appendix F)	1&2

<b>FREQ. (MHz)</b>	<b>MEASUREMENT Rx. READING (dBµV)</b>	<b>CABLE LOSS (dB)</b>	<b>ANT FACTOR (dB/m)</b>	<b>PRE AMP (dB)</b>	<b>FIELD STRENGTH (dBµV/m)</b>	<b>FIELD STRENGTH (mV/m)</b>
903.2	63.4	3.5	23.9	-	90.8	34.67
915.0	65.7	3.5	24.3	-	93.5	47.32
927.8	64.4	3.5	24.6	-	92.5	42.17
Limit value @ fc			50mV/m @ 3m			

- Notes:**
- 1 Results quoted are extrapolated as indicated
  - 2 Receiver detector @ fc = Quasi Peak 120kHz bandwidth
  - 3 When battery powered the EUT was powered with new batteries

- Test Method:**
- 1 As per, ANSI C63.10
  - 2 Measuring distances 3m
  - 3 EUT 0.8 metre above ground plane
  - 4 Emissions maximised by rotation of EUT, on an automatic turntable.  
Raising and lowering the receiver antenna between 1m & 4m.  
Horizontal and vertical polarisations, of the receive antenna.  
EUT orientation in three orthogonal planes.  
Maximum results recorded

**A2 Band occupancy**

<b>Carrier power was verified with the EUT transmitting Test Details:</b>	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.215(c)
Measurement standard	ANSI C63.10:2003
EUT sample number	S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	17
Photographs (Appendix F)	1&2

<b>Frequency</b>	<b>f lower</b>	<b>f higher</b>
903.2 MHz	903.112 MHz	903.300 MHz
	188.00kHz	
915.0 MHz	914.912 MHz	915.100 MHz
	188.00kHz	
927.8 MHz	927.707 MHz	927.901 MHz
	194.00kHz	

**Notes:** 1 When battery powered the EUT was powered with new batteries

**Test Method:** 1 As per ANSI C63.10

**A3 Radiated Electric Field Emissions**

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : ☐

3m alternative test site : ☒

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details: 903.2 MHz	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.209
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz – 10GHz
EUT sample number	S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	17
Photographs (Appendix F)	1&2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

Ref No.	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
1.	912.013	5.0	4.0	22.6	-	31.6	-	38.02	200
2.	915.206	1.0	4.0	23.0	-	27.9	-	24.83	200
3.	931.204	0.9	4.0	23.8	-	28.7	-	27.23	200
4.	935.213	1.0	4.0	24.2	-	29.2	-	28.84	200
5.	927.923	0.5	4.0	23.5	-	28.0	-	25.12	200
6.	1605.65 <sub>pk</sub>	50.7	1.7	25.9	36.4	41.9	-	125.03	5000
7.	1605.65 <sub>av</sub>	40.4	1.7	25.9	36.4	31.6	-	37.89	500
8.	1806.48 <sub>pk</sub>	50.8	2.1	27.1	36	44.0	-	157.94	5000
9.	1806.48 <sub>av</sub>	40.8	2.1	27.1	36	34.0	-	50.00	500

Test Details: 915.0 MHz	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.209
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz – 10GHz
EUT sample number	S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	17
Photographs (Appendix F)	1&2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

Ref No.	FREQ. (MHz)	MEAS Rx (dBμV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBμV/m)	EXTRAP FACT (dB)	FIELD ST'GH (μV/m)	LIMIT (μV/m)
1.	813.34	1	3.7	21.7	-	26.5	-	21.13	200
2.	912.013	5	4.0	22.6	-	31.6	-	38.02	200
3.	924.805	-0.9	4.0	23.4	-	26.5	-	21.13	200
4.	926.34	0	4.0	23.4	-	27.4	-	23.44	200
5.	931.204	0.6	4.0	23.8	-	28.4	-	26.30	200
6.	935.666	0.3	4.0	24.2	-	28.5	-	26.61	200
7.	1626.63 <sub>pk</sub>	53.1	1.8	26.1	36.4	44.6	-	169.82	5000
8.	1626.63 <sub>av</sub>	40.4	1.8	26.1	36.4	31.9	-	39.36	500
9.	1830.06 <sub>pk</sub>	51.4	1.9	27.2	35.9	44.6	-	169.82	5000
10.	1830.06 <sub>av</sub>	43.0	1.9	27.2	35.9	36.2	-	64.57	500

Test Details: 927.8 MHz	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.209
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz – 10GHz
EUT sample number	S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	17
Photographs (Appendix F)	1&2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

Ref No.	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
1.	909.98	2.8	3.9	22.7	-	29.4	-	29.51	200
2.	912.013	5.0	4.0	22.6	-	31.6	-	38.02	200
3.	931.213	1.3	4.0	23.8	-	29.1	-	28.51	200
4.	1649.39 <sub>pk</sub>	50.8	1.9	26.2	36.3	42.6	-	134.90	5000
5.	1649.39 <sub>av</sub>	42.8	1.9	26.2	36.3	34.6	-	53.70	500
6.	1855.60 <sub>pk</sub>	50.7	2	27.3	35.9	44.1	-	160.32	5000
7.	1855.60 <sub>av</sub>	40.4	2	27.3	35.9	33.8	-	48.98	500



**Notes:**

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1 For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak                      RBW=VBW= 1MHz  
Average                  RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR Part 15: Clause 15.209 for all emissions:

Frequency of emission (MHz)	Field strength $\mu\text{V/m}$	Measurement Distance m	Field strength $\text{dB}\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left( \frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels	✓			
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

**A4 Unintentional Radiated Emissions**

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to all spurious emissions on directly related to the transmitter. The maximum permitted field strength is listed in Section 15.109. The EUT was set to operate in a transmit standby / receive mode.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :

☐

3m alternative test site :

☒

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details:	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.109
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz – 10GHz
EUT sample number	S02
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Temperature	17
Photographs (Appendix F)	1&2

The worst case radiated emission measurements for spurious emissions are listed below:

Ref No.	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
No Significant Emissions									

**Notes:**

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1 For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak                      RBW=VBW= 1MHz  
Average                  RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15:2008 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR Part 15: Clause 15.209 for all emissions:

Frequency of emission (MHz)	Field strength $\mu\text{V/m}$	Measurement Distance m	Field strength $\text{dB}\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left( \frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :


	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels	✓			
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

**Appendix B:****Supporting Graphical Data**

This appendix contains graphical data obtained during testing.


Notes:

- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

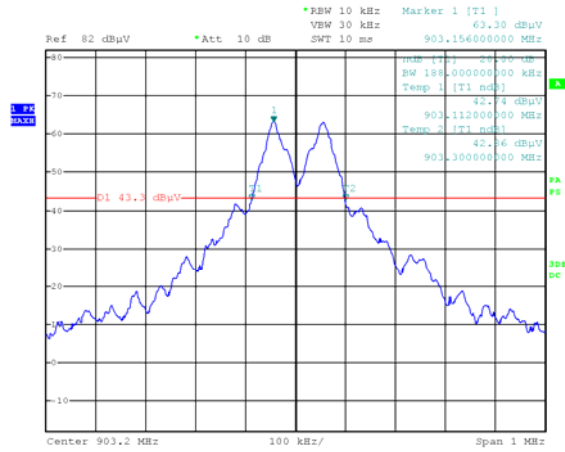


Date: 19.APR.2012 12:08:30

### 20dB Bandwidth – 903.2 MHz

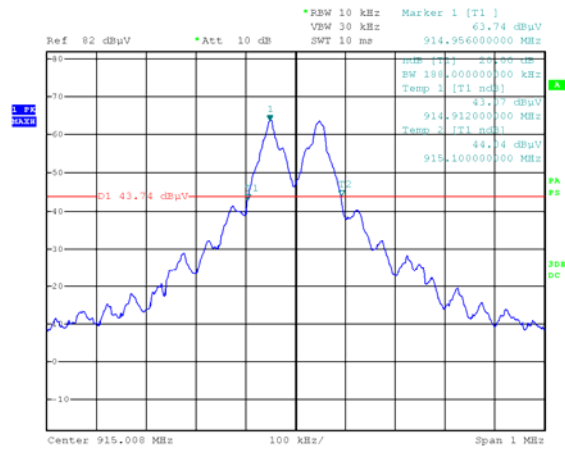


Date: 19.APR.2012 12:06:37

### 20dB Bandwidth – 915.0 MHz

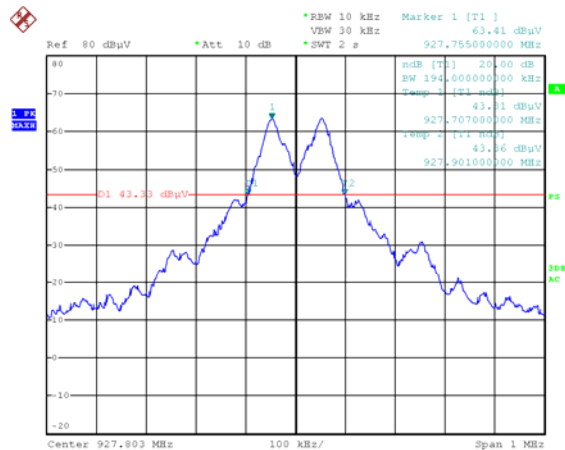


Date: 19.APR.2012 11:38:51

### 20dB Bandwidth – 927.8 MHz

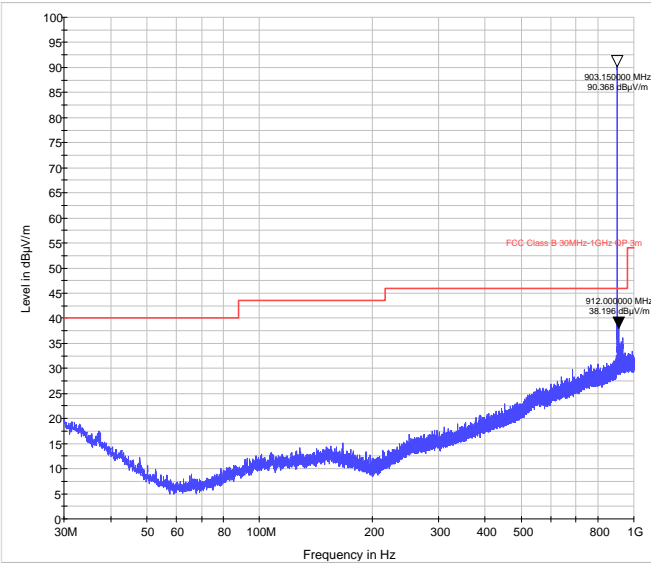


Radiated spurious emissions 30 MHz to 1 GHz – 903.2 MHz

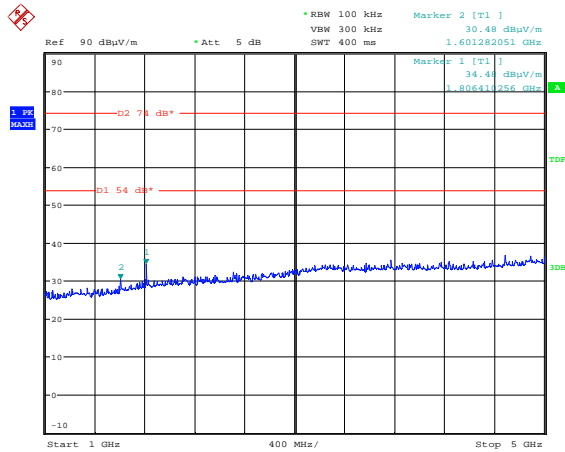


Date: 19.APR.2012 17:32:35

Radiated spurious emissions 1 GHz to 5 GHz – 903.2 MHz

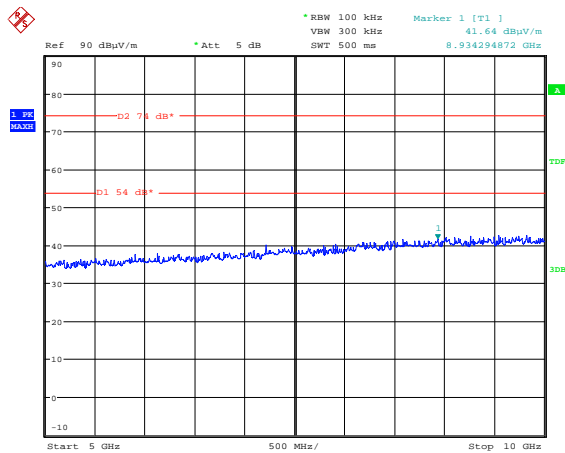


Date: 19.APR.2012 17:40:58

Radiated spurious emissions 5 GHz to 10 GHz – 903.2 MHz

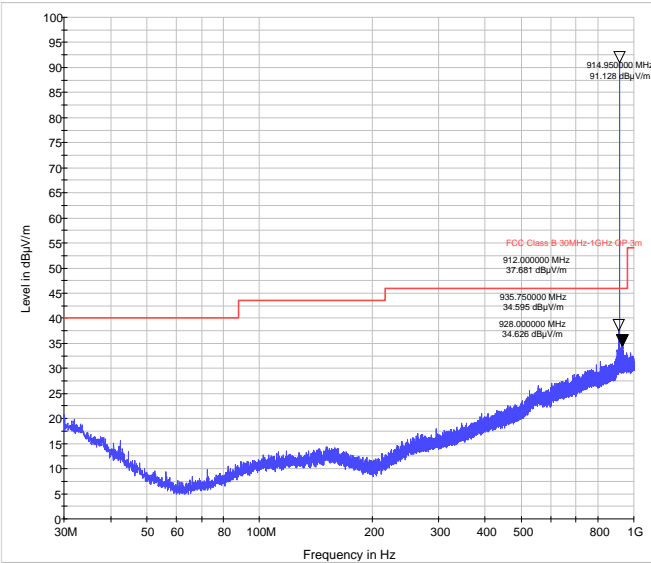


Radiated spurious emissions 30 MHz to 1 GHz – 915.0 MHz

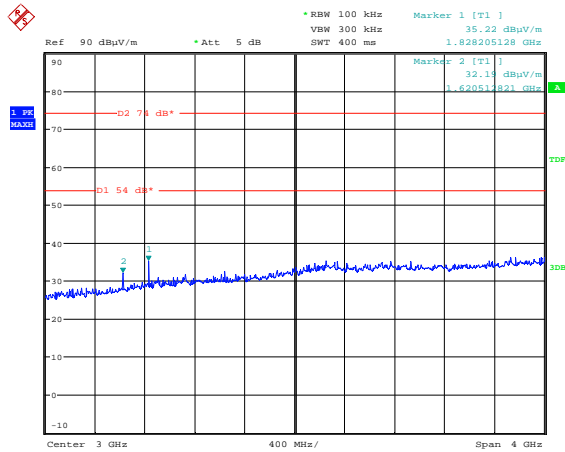


Date: 19.APR.2012 17:24:54

Radiated spurious emissions 1 GHz to 5 GHz – 915.0 MHz

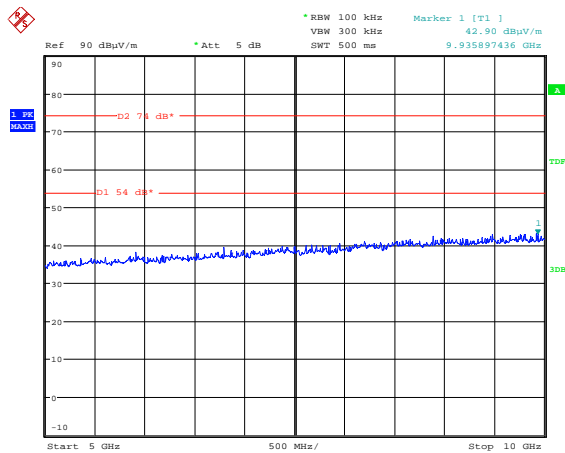


Date: 19.APR.2012 17:26:08

Radiated spurious emissions 5 GHz to 10 GHz – 915.0 MHz

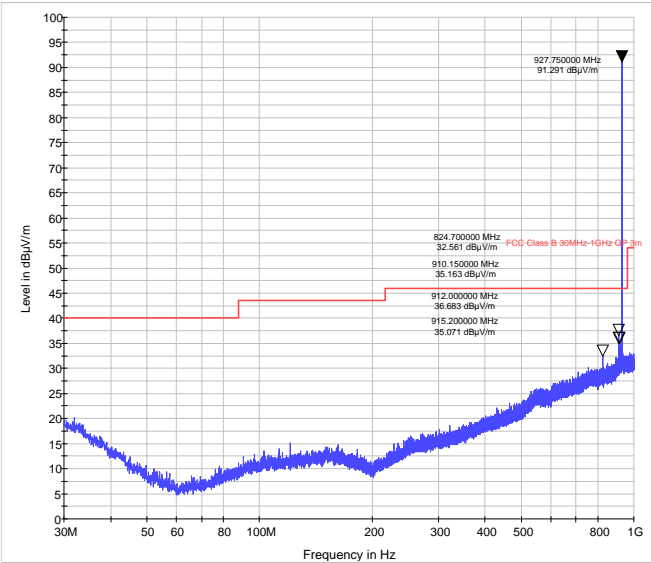


Radiated spurious emissions 30 MHz to 1 GHz – 927.8 MHz

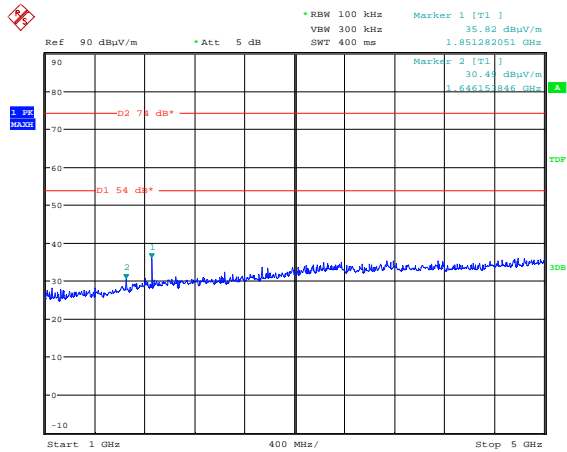

Date: 19.APR.2012 17:34:46


Radiated spurious emissions 1 GHz to 5 GHz – 927.8 MHz

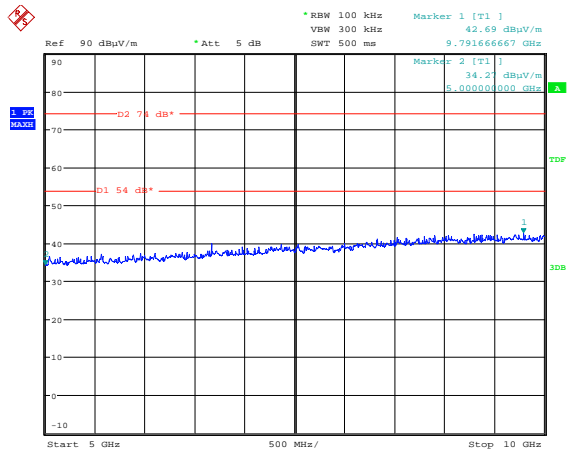


Date: 19.APR.2012 17:36:02

Radiated spurious emissions 5 GHz to 10 GHz – 927.8 MHz



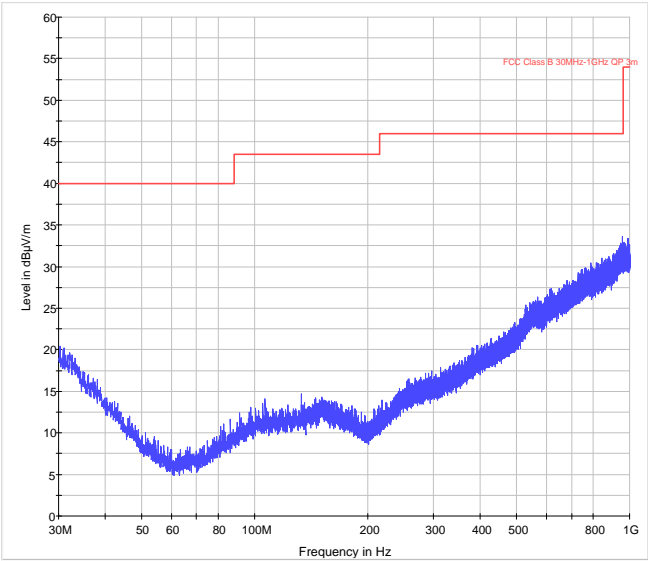


Radiated spurious emissions 30 MHz to 1 GHz

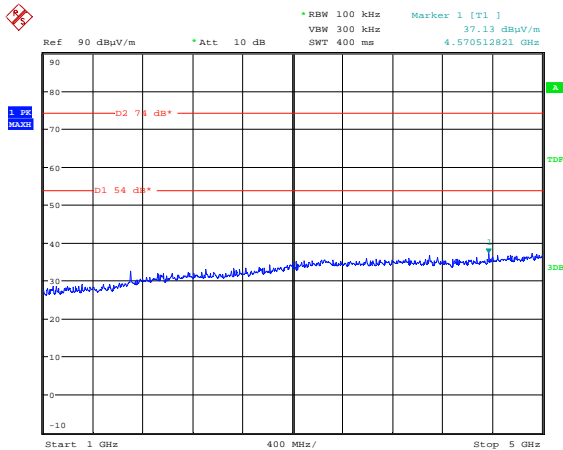

Date: 19.APR.2012 17:14:16

Radiated spurious emissions 1 GHz to 5 GHz

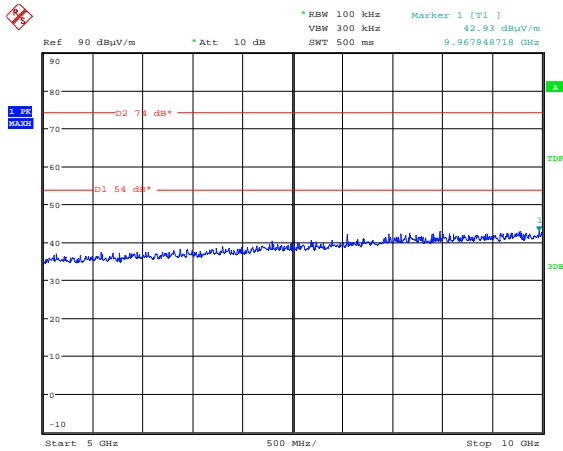

Date: 19.APR.2012 17:16:26

Radiated spurious emissions 5 GHz to 10 GHz

**Appendix C:****Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

**Sample No:** Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

**Support Equipment (SE)** is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

**EUT configuration** refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

**EUT arrangement** refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Global upon request.

**C1) Test samples**

The following samples of the apparatus were submitted by the client for testing :

Sample No.	Description	Identification
S02	SensiumVitals Patch	Model: TZ202055

The following samples of apparatus were submitted by the client as host, support or drive equipment (auxiliary equipment):

Sample No.	Description	Identification
S08	Load Simulating body (See Annex D for description)	

The following samples of apparatus were supplied by TRaC Global as support or drive equipment (auxiliary equipment):

Identification	Description
None	

**C2) EUT Operating Mode During Testing.**

During testing, the EUT was exercised as described in the following tables :

Test	Description of Operating Mode:
All Transmitter Tests detailed in this report	EUT active and transmitting a permanently modulated carrier. Load was attached to the electrode connectors on the underside of the patch to simulate a body.

Test	Description of Operating Mode:
Unintentional radiated spurious emissions	EUT active but non-transmitting.

**C3) EUT Configuration Information.**

The EUT was submitted for testing in one single possible configuration.

**C4) List of EUT Ports**

The tables below describe the termination of EUT ports:

Sample : 02  
Tests : Radiated Emissions

Port	Description of Cable Attached	Cable length	Equipment Connected
No External Ports			

\* Only connected during setup.

**C5 Details of Equipment Used**

For Radiated Measurements:

TRAC Ref	Type	Description	Manufacturer	Date Calibrated.
TRLUH281	FSU46	Spectrum Analyser	Rhode & Schwarz	09/02/2012
TRL138	3115	1-18GHz Horn Antenna	EMCO	08/11/2011
TRL572	8499B	1 – 26.5 GHz Pre Amplifier	Agilent	24/11/2010
TRLUH403	ESHS10	Receiver	Rhode & Schwarz	06/04/2011
TRLUH191	CBL611/A	BiLog Periodic Antenna	York	08/11/2010

## Appendix D:

## Additional Information

**From:** Chris Nunn [mailto:chris.nunn@toumaz.com]  
**Sent:** 27 April 2012 09:06  
**To:** Daniel Winstanley  
**Subject:** RE: Toumaz FCC Testing

Hi Daniel

Name: SensiumVitals Patch  
Model: TZ202055  
FCC ID: AEJ-TZ202055V1

The load is a string of 6 qty 100 $\Omega$  resistors to simulate the resistance at 32 kHz plus 2 qty 2661000301 Fair-Rite beads to simulate the additional losses at RF frequencies.  
The beads are nearest the connection points.

Regards

Chris




## **Appendix E:**


## **Photographs and Figures**

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement: TZ202055 front view.
2. Radiated electric field emissions arrangement: TZ202055 close up.

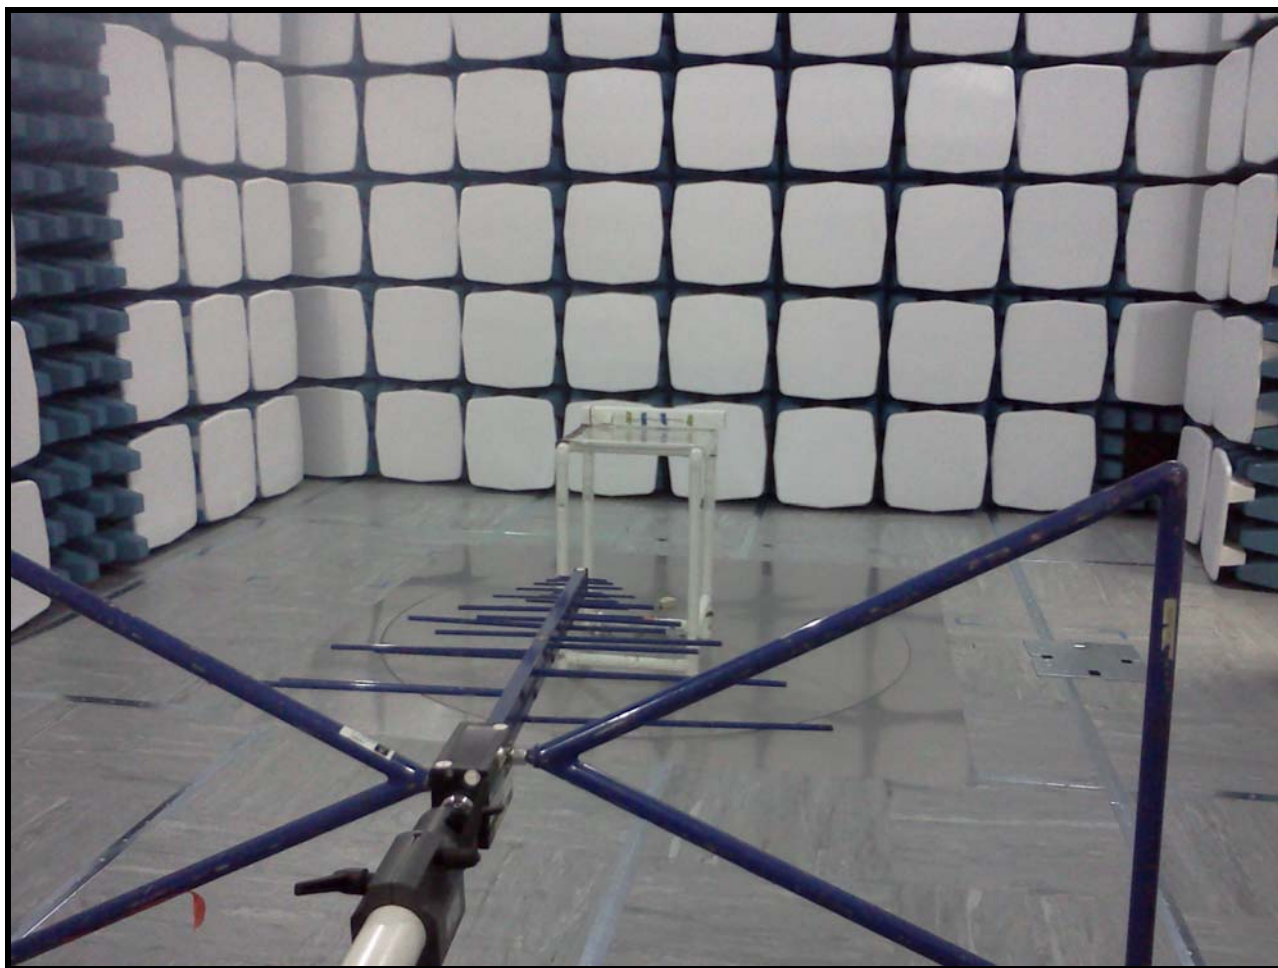

Photograph 1

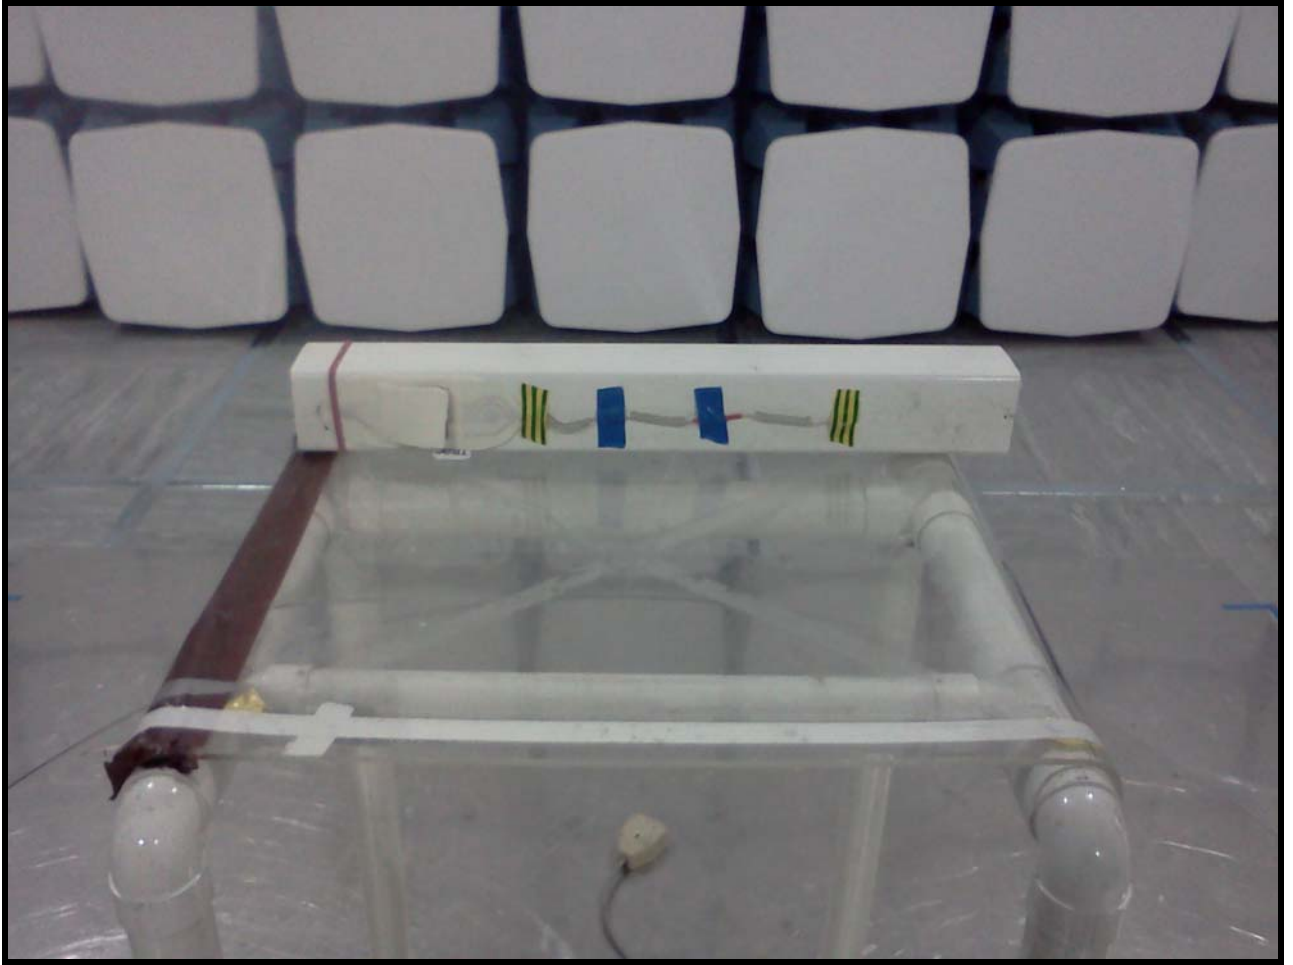

Photograph 2

**Appendix F:****MPE Calculation**

OET Bulletin No. 65, Supplement C 01-01

**47 CFR §§1.1307 and 2.1091**

2.1091 Radio frequency radiation exposure evaluation: mobile devices.

For purposes of these requirements mobile devices are defined by the FCC as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimetres is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits. As the 20cm separation specified under FCC rules may not be achievable under normal operation of the EUT, an RF exposure calculation is needed to show the minimum distance required to be less than 1mW/cm<sup>2</sup> power density limit, as required under FCC rules.

**Prediction of MPE limit at a given distance**

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{EIRP}{4 \pi R^2} \text{ re - arranged} \quad R = \sqrt{\frac{EIRP}{S 4 \pi}}$$

where:

S = power density

R = distance to the centre of radiation of the antenna

EIRP = EUT Maximum power

Note:

The EIRP measurement was performed using a signal substitution method.

Result

Prediction Frequency (MHz)	Maximum EIRP (mW)	Power density limit (S) (mW/cm <sup>2</sup> )	Distance (R) cm required to be less than 0.61mW/cm <sup>2</sup>
915.0	0.4	0.61	1.22

