



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6554  
<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE

**Applicant Name:**

Sanyo Electric Co Ltd  
c/o Sanyo Fisher Company  
21605 Plummer Street  
Chatsworth, CA 91311  
USA

**Date of Testing:**

August 21-22, 2006

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0608150678

**FCC ID:**

AEZSCP-M1

**APPLICANT:**

Sanyo Electric Co Ltd

**EUT Type:**

Dual-Band CDMA Phone with Bluetooth and EVDO

**FCC Rule Part(s):**

FCC Part 15 Subpart B

**FCC Classification:**

FCC Class B Digital Device (JBP)

**Test Procedure:**

ANSI C63.4-2003 / EN55022: 1998 w/ A1 (2000) + A2 (2003)

The device bearing the FCC Identifier specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 (See Test Report). These measurements were performed with no deviation from the standards.



I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*NVLAP accreditation does not constitute any product endorsement by NVLAP or any agency of the United States Government. PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

  
Randy Ortanez  
President



**NVLAP**<sup>®</sup>  
Lab Code 100431-0

<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth and EVDO	<b>FCC ID:</b> AEZSCP-M1	Page 1 of 13



## TABLE OF CONTENTS

### ATTACHMENT A. ATTESTATION STATEMENT(S)

### ATTACHMENT B. TEST REPORT

FCC Class B MEASUREMENT REPORT .....	3
1.0 INTRODUCTION .....	4
1.1 EVALUATION PROCEDURE .....	4
1.2 SCOPE .....	4
1.3 PCTEST TEST LOCATION .....	4
2.0 PRODUCT INFORMATION .....	5
2.1 EQUIPMENT DESCRIPTION .....	5
2.2 OPERATION MODE .....	5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....	5
3.0 DESCRIPTION OF TEST .....	6
3.1 CONDUCTED EMISSIONS .....	6
3.2 RADIATED EMISSIONS .....	7
4.0 SAMPLE CALCULATIONS .....	8
4.1 CONDUCTED EMISSION MEASUREMENT SAMPLE CALCULATION: .....	8
4.2 RADIATED EMISSION MEASUREMENT SAMPLE CALCULATION: .....	8
5.0 UNCERTAINTY OF MEASUREMENT .....	9
5.1 LINE CONDUCTED MEASUREMENT UNCERTAINTY CALCULATIONS: .....	9
5.2 RADIATED EMISSIONS MEASUREMENT UNCERTAINTY CALCULATIONS: .....	10
6.0 TEST EQUIPMENT CALIBRATION DATA .....	11
7.0 ENVIRONMENTAL CONDITIONS .....	12
8.0 CONCLUSION .....	13

### ATTACHMENT C. SUMMARY OF TEST RESULTS

RADIATED TEST DATA

LINE-CONDUCTED TEST DATA/PLOT(S)

SUPPORT EQUIPMENT USED

### ATTACHMENT D. FCC ID LABEL & LOCATION

### ATTACHMENT E. BLOCK(S)/ SCHEMATIC(S) DIAGRAM



### ATTACHMENT F. OPERATIONAL DESCRIPTION

### ATTACHMENT G. TEST SETUP PHOTOGRAPHS

### ATTACHMENT H. EXTERNAL PHOTOGRAPHS

### ATTACHMENT I. INTERNAL PHOTOGRAPHS

### ATTACHMENT J. USER'S MANUAL

<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth and EVDO	<b>FCC ID:</b> AEZSCP-M1	Page 2 of 13



## MEASUREMENT REPORT



### FCC Part 15B – Unintentional Radiators

#### A. § 2.1033 General Information

**APPLICANT:** Sanyo Electric Co Ltd  
**APPLICANT ADDRESS:** c/o Sanyo Fisher Company  
21605 Plummer Street  
Chatsworth, CA 91311  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** FCC Part 15 Subpart B  
**FCC ID:** AEZSCP-M1  
**Test Device Serial No.:** FCC No. 1      ☐ Production    ☒ Pre-Production    ☐ Engineering  
**FCC CLASSIFICATION:** FCC Class B Digital Device (JBP)  
**DATE(S) OF TEST:** August 21-22, 2006



#### A.1 Test Methodology

Both conducted and radiated measurements were taken using the methods and procedures described in ANSI C63.4-2003. Radiated testing was performed at an antenna-to-EUT distance of 3 meters.

#### A.2 Test Facility / NVLAP Accreditation

Conducted and radiated tests were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and all Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth and EVDO	<b>FCC ID:</b> AEZSCP-M1	Page 3 of 13

## 1.0 INTRODUCTION

### 1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of **SANYO Dual-Band CDMA Phone with Bluetooth and EVDO (FCC ID: AEZSCP-M1)**.

Deviation from measurement procedure.....**NONE**


### 1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.



### 1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.3-1).

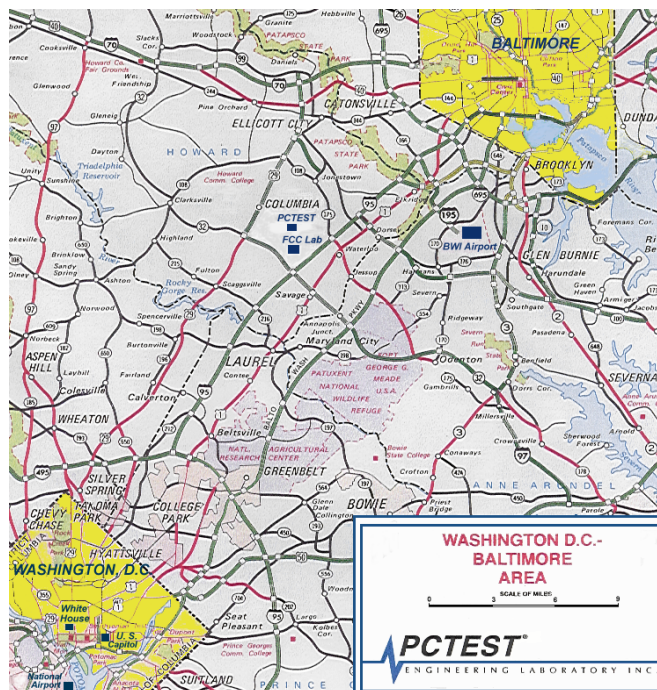These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada



**Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth and EVDO	<b>FCC ID:</b> AEZSCP-M1	Page 4 of 13

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **SANYO Dual-Band CDMA Phone with Bluetooth and EVDO (FCC ID: AEZSCP-M1)**.



### 2.2 Operation Mode

The SANYO Dual-Band CDMA Phone with Bluetooth and EVDO (FCC ID: AEZSCP-M1) was tested with a NOTEBOOK connected via USB interface port. Please see ATTACHMENT C for more information on the test setup and ATTACHMENT G for test setup photographs.

### 2.3 EMI Suppression Device(s)/Modifications


EMI suppression device(s) added and/or modifications made during testing.

- None


PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608150678	Test Dates: August 21-22, 2006	EUT Type: Dual-Band CDMA Phone with Bluetooth and EVDO	FCC ID: AEZSCP-M1	Page 5 of 13

## 3.0 DESCRIPTION OF TEST


### 3.1 Conducted Emissions

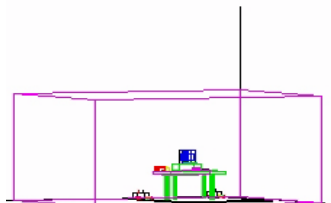


**Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility**

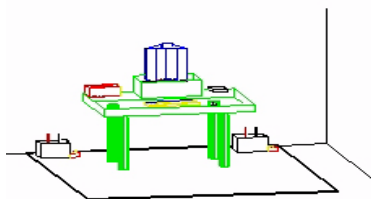

**Figure 3.1-2. Line Conducted Emission Test Set-Up**

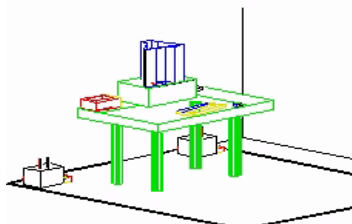

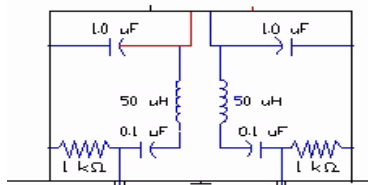

**Figure 3.1-3. Wooden Table & Bonded LISNs**



**Figure 3.1-4. LISN Schematic Diagram**


The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a 20ms sweep time. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Attachment G. Each EME reported was calibrated using the HP8640D signal generator.


<b>PCTEST™ PT. 15B TEST REPORT</b>  <b>Test Report S/N:</b> 0608150678	  <b>Test Dates:</b> August 21-22, 2006	<b>CERTIFICATION REPORT (FCC PART 15B)</b>  <b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth and EVDO	  <b>FCC ID:</b> AEZSCP-M1	<b>Reviewed by:</b> Quality Manager  Page 6 of 13
---	---	--	---	--




## 3.2 Radiated Emissions

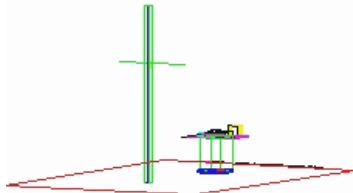


**Figure 3.2-1. Meter Test Site**



**Figure 3.2-2. Dimensions of Outdoor Test Site**

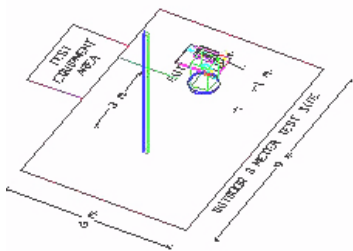

**Figure 3.2-3. Turntable and System Setup**

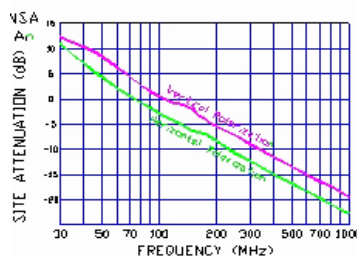

**Figure 3.2-4. Normalized Site Attenuation Curves (H&V)**

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts<sup>TM</sup> Dipole antennas or horn antennas (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Attachment G. Each EME reported was calibrated using the HP8640D signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

<b>PCTEST<sup>TM</sup> PT. 15B TEST REPORT</b>	<b>PCTEST</b> WIRELESS	<b>CERTIFICATION REPORT (FCC PART 15B)</b>	<b>SANYO</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth and EVDO	<b>FCC ID:</b> AEZSCP-M1	Page 7 of 13

## 4.0 SAMPLE CALCULATIONS

### 4.1 Conducted Emission Measurement Sample Calculation:

@ 20.3 MHz

Class B limit	= 250 $\mu$ V = 47.96 dB $\mu$ V
Reading	= - 67.8 dBm (calibrated level)
Convert to dB $\mu$ V	= - 67.8 + 107 = 39.2 dB $\mu$ V
$10^{(39.2/20)}$	= 91.2 $\mu$ V
Margin	= 39.2 - 47.96 = - 8.76 dB
	= <b>8.8 dB below limit</b>

### 4.2 Radiated Emission Measurement Sample Calculation:



@ 66.7 MHz

Class B limit	= 100 $\mu$ V/m = 40.0 dB $\mu$ V/m
Reading	= - 76.0 dBm (calibrated level)
Convert to dB $\mu$ V	= - 76.0 + 107 = 31.0 dB $\mu$ V
Antenna Factor + Cable Loss	= 5.8 dB/m
Total	= 36.8 dB $\mu$ V/m
Margin	= 36.8 - 40.0 = - 3.2 dB
	= <b>3.2 dB below limit</b>

#### Note:

$$\text{Level [dB}\mu\text{V]} = 20 \log_{10} (\text{Level } [\mu\text{V/m}])$$

$$\text{Level [dB}\mu\text{V]} = \text{Level [dBm]} + 107$$

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608150678	Test Dates: August 21-22, 2006	EUT Type: Dual-Band CDMA Phone with Bluetooth and EVDO	FCC ID: AEZSCP-M1	Page 8 of 13



## 5.0 UNCERTAINTY OF MEASUREMENT

### 5.1 Line Conducted Measurement Uncertainty Calculations:



The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Line Conducted)	Probability Distribution	Uncertainty ( $\pm$ dB)	
		9kHz-150kHz	150-30MHz
Receiver specification	Rectangular	1.5	1.5
LISN coupling specification	Rectangular	1.5	1.5
Cable and input attenuator calibration	Normal (k=2)	0.3	0.5
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8$ (9kHz) 0.2 (30MHz) Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	0.2	0.35
System repeatability	Std. deviation	0.2	0.05
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	1.26	1.30
Expanded uncertainty	Normal (k=2)	2.5	2.6

Table 5-1. Line Conducted Measurement Uncertainty Calculations

$$\text{Calculations for 150kHz to 30MHz: } u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{\frac{1.5^2 + 1.5^2}{3} + \left(\frac{0.5}{2}\right)^2 + 0.35^2} = \pm 1.298\text{dB}$$

$$U = 2U_c(y) = \pm 2.6\text{dB}$$

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608150678	Test Dates: August 21-22, 2006	EUT Type: Dual-Band CDMA Phone with Bluetooth and EVDO	FCC ID: AEZSCP-M1	Page 9 of 13

## 5.2 Radiated Emissions Measurement Uncertainty Calculations:



The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Radiated Emissions)	Probability Distribution	Uncertainties ( $\pm$ dB)	
		3 m	10 m
Ambient Signals		-	-
Antenna factor calibration	Normal (k=2)	$\pm 1.0$	$\pm 1.0$
Cable loss calibration	Normal (k=2)	$\pm 0.5$	$\pm 0.5$
Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Antenna directivity	Rectangular	+ 0.5 / - 0	+ 0.5
Antenna factor variation with height	Rectangular	$\pm 2.0$	$\pm 0.5$
Antenna phase centre variation	Rectangular	0.0	$\pm 0.2$
Antenna factor frequency interpolation	Rectangular	$\pm 0.25$	$\pm 0.25$
Measurement distance variation	Rectangular	$\pm 0.6$	$\pm 0.4$
Site imperfections	Rectangular	$\pm 2.0$	$\pm 2.0$
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67$ (Bi) 0.3 (Lp) Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+ 1.1 - 1.25	$\pm 0.5$
System repeatability	Std. Deviation	$\pm 0.5$	$\pm 0.5$
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+ 2.19 / - 2.21	+ 1.74 / - 1.72
Expanded uncertainty	Normal (k=2)	+ 4.38 / - 4.42	+ 3.48 / - 3.44

**Table 5-2. Radiated Emissions Measurement Uncertainty Calculations**

Calculations for 3m-biconical antenna. Coverage factor of k=2 will ensure that the level of confidence will be approximately 95%, therefore:

$$U=2u_c(y) = 2 \times \pm 2.19 = \pm 4.38\text{dB}$$



<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth and EVDO	<b>FCC ID:</b> AEZSCP-M1	Page 10 of 13

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

TYPE	MODEL	CAL. DUE DATE	CAL. INTERVAL	SERIAL No.
Spectrum Analyzer/Tracking Generator	HP 8591A (9kHz-1.8GHz)	09/12/06	Annual	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/06	Annual	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/06	Annual	3051A00187
Spectrum Analyzer	HP 8566B (100Hz-22GHz)	12/22/06	Annual	3638A08713
PSG Analog Signal Generator	Agilent E8257D (250kHz-20GHz)	02/11/07	Annual	MY45470194
Quasi-Peak Adapter	HP 85650A	12/22/06	Annual	2043A00301
Preamplifier	HP 8449B (1-26.5GHz)	12/22/06	Annual	3008A00985
Attenuation/Switch Driver	HP 11713A	12/22/06	Annual	N/A
Preselector	HP 85685A (20Hz-2GHz)	12/22/06	Annual	N/A
6dB Res BW Spec. Analyzer Display	OPT 462	12/22/06	Annual	3701A22204
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	12/19/06	Annual	0194-04082
Ailtech/Eaton EMI/Field Intensity Meter	NM 37/57A-SL (30MHz – 1GHz)	06/07/07	Annual	0805-03334
Broadband Amplifier (2)	HP 8447D (0.1 – 1300MHz)	N/A	N/A	2443A01900, 1937A03348
Horn Antenna	EMCO Model 3115 (1-18GHz)	08/25/07	Bi-Annual	9704-5182
Roberts Dipoles	Compliance Design (1 set) A100	08/31/06	Bi-Annual	5118
EMCO LISN (3)	3816/2, 3816/2, 3725/2	10/26/06	Annual	1077, 1079, 2099
SOLAR LISN (2)	8012-50	11/18/07	Bi-Annual	0313233, 0310234
Microwave Preamp 40dB Gain	HP 83017A (0.5-26.5GHz)	N/A	N/A	3123A00181
Coax Cable	RG58	N/A	Quarterly	N/A
Microwave Cables	MicroCoax (1.0-26.5GHz)	02/26/07	Annual	N/A
Shielded Screen Room	RF Lindgren Model 26-2/2-0	N/A	N/A	6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81	N/A	N/A	R2437 (PCT278)
Temperature & Humidity Chamber	ESPEC SCP-220	06/08/07	Annual	017620
OATS	N/A	01/27/2009	Tri-annual	N/A

Table 6-1. Annual Test Equipment Calibration Schedule



PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608150678	Test Dates: August 21-22, 2006	EUT Type: Dual-Band CDMA Phone with Bluetooth and EVDO	FCC ID: AEZSCP-M1	Page 11 of 13

## 7.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C.



The relative humidity is controlled within range of 10% to 75%.

The atmospheric pressure is controlled within the range 86-106kPa (860-1060mbar).

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608150678	Test Dates: August 21-22, 2006	EUT Type: Dual-Band CDMA Phone with Bluetooth and EVDO	FCC ID: AEZSCP-M1	Page 12 of 13

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **SANYO Dual-Band CDMA Phone with Bluetooth and EVDO (FCC ID: AEZSCP-M1)** has been tested to comply with the requirements specified in §15.107 and §15.109 of the FCC Rules.

PCTEST™ PT. 15B TEST REPORT		CERTIFICATION REPORT (FCC PART 15B)		Reviewed by: Quality Manager
Test Report S/N: 0608150678	Test Dates: August 21-22, 2006	EUT Type: Dual-Band CDMA Phone with Bluetooth and EVDO	FCC ID: AEZSCP-M1	Page 13 of 13

## ATTACHMENT C – TEST DATA

### Summary of Results



Test Date(s): August 21 - 22, 2006

Test Engineer:



FCC Part 15 Section	Description	Result
15.107	Conducted Emissions	PASS
15.109	Radiated Spurious Emissions	PASS

**Table C-1. Summary of Test Results**

<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth	<b>FCC ID:</b> AEZSCP-M1	Page C1



## ATTACHMENT C – Test Data (Cont'd)

### Radiated Test Data



FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (mV/m)	Margin (dB)
67.26	-84.41	5.92	V	2.6	235	26.66	-11.5
135.16	-89.81	12.61	V	2.5	270	30.95	-13.7
147.61	-89.75	13.46	V	1.6	200	34.33	-12.8
166.25	-92.37	14.68	H	1.6	210	29.22	-14.2
262.30	-89.14	19.24	V	1.4	190	71.66	-8.9
456.50	-94.55	25.06	H	1.1	180	75.04	-8.5

**Table C-2. Radiated Measurements at 3-meters**

### NOTES:


1. All modes of operation were investigated and the worst-case emissions are reported.
2. Radiated Emissions were measured from 30 MHz – 2000 MHz.

- 
1. All readings are calibrated by HP8640D signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
  2. AFCL = Antenna Factor (Roberts dipole) and Cable Loss (30 ft. RG58C/U).
  3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used with a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth	<b>FCC ID:</b> AEZSCP-M1	Page C2

## ATTACHMENT C – Test Data (Cont'd)

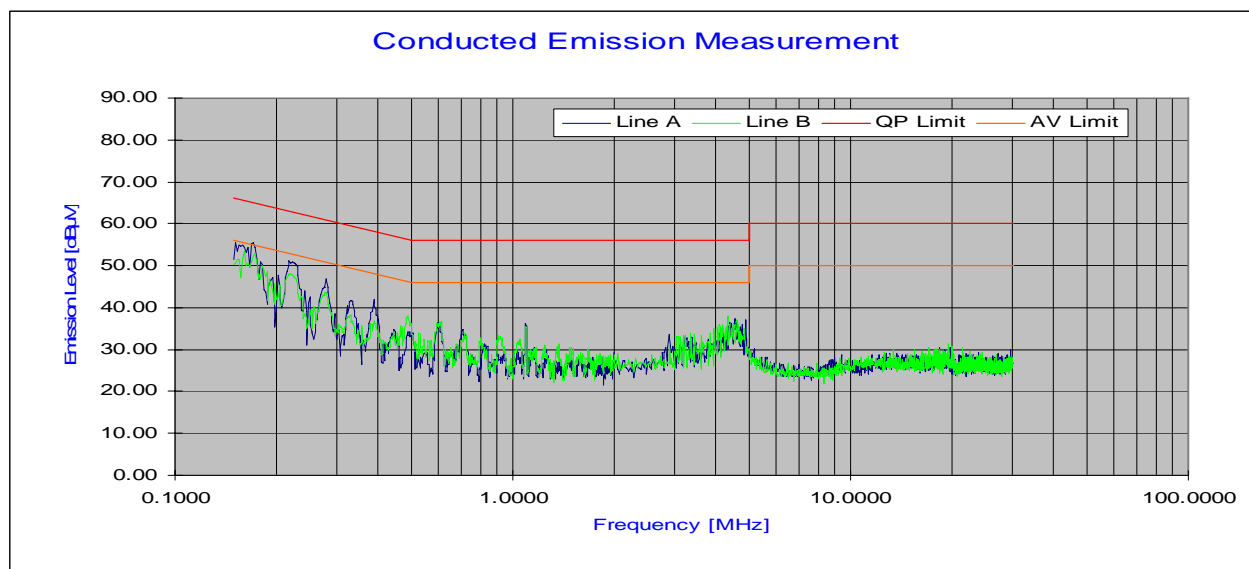

### Line Conducted Test Data



No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.152	8.18	50.54	65.87	-15.33	39.82	55.87	-16.05
2	A	0.222	7.85	49.84	62.76	-12.92	35.56	52.76	-17.20
3	A	0.275	7.66	43.21	60.95	-17.74	40.36	50.95	-10.59
4	A	0.185	8.00	45.63	64.26	-18.63	31.08	54.26	-23.18
5	A	0.388	7.50	38.03	58.10	-20.07	34.15	48.10	-13.95
6	A	0.177	8.05	47.13	64.63	-17.50	31.63	54.63	-23.00
7	A	0.332	7.54	38.68	59.41	-20.73	28.56	49.41	-20.85
8	A	0.229	7.82	43.23	62.47	-19.24	27.07	52.47	-25.40
9	A	4.537	7.50	31.52	56.00	-24.48	22.10	46.00	-23.90
10	A	4.841	7.51	29.15	56.00	-26.85	20.78	46.00	-25.22
11	B	0.150	8.20	54.24	66.00	-11.76	46.94	56.00	-9.06
12	B	0.155	8.17	52.73	65.73	-13.00	48.42	55.73	-7.31
13	B	0.201	7.93	46.33	63.57	-17.24	39.80	53.57	-13.77
14	B	0.275	7.66	42.39	60.96	-18.57	38.57	50.96	-12.39
15	B	4.283	7.49	30.12	56.00	-25.88	20.62	46.00	-25.38
16	B	0.488	7.43	35.13	56.21	-21.08	29.70	46.21	-16.51
17	B	4.621	7.50	31.72	56.00	-24.28	20.83	46.00	-25.17
18	B	0.605	7.40	33.58	56.00	-22.42	27.48	46.00	-18.52
19	B	0.487	7.43	35.04	56.22	-21.18	29.54	46.22	-16.68
20	B	4.511	7.50	31.88	56.00	-24.12	21.49	46.00	-24.51

#### Notes:

- All Modes of operation were investigated and the worst-case emissions are reported.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in EN55022.
- Line A = Phase; Line B = Neutral
- Deviations to the Specifications: None.

<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth	<b>FCC ID:</b> AEZSCP-M1	Page C3



## ATTACHMENT C – Test Data (Cont'd)

### Test Support Equipment

1	Sanyo Dual-Band Phone with Bluetooth	FCC ID: AEZSCP-M1 1.5m Shielded USB Data Link Cable	S/N: FCC No. 1
2	Panasonic Toughbook w/ AC Adapter	FCC ID: CF-28 (DoC) Model: CF-AA1639A 1.8m Unshielded AC power cord 1.8m Unshielded DC power cord w/ ferrite bead on computer end	S/N: T0838ZA S/N: 020413255A
3	H/P Thinkjet Printer	FCC ID: DS16XU2225C 1.8m Unshielded AC power cord 1.0m Shielded parallel data cable	S/N: 2604S10169

Note: See Attachment G – Test Setup Photographs, for actual system test setup.

<b>PCTEST™ PT. 15B TEST REPORT</b>		<b>CERTIFICATION REPORT (FCC PART 15B)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0608150678	<b>Test Dates:</b> August 21-22, 2006	<b>EUT Type:</b> Dual-Band CDMA Phone with Bluetooth	<b>FCC ID: AEZSCP-M1</b>	Page C4