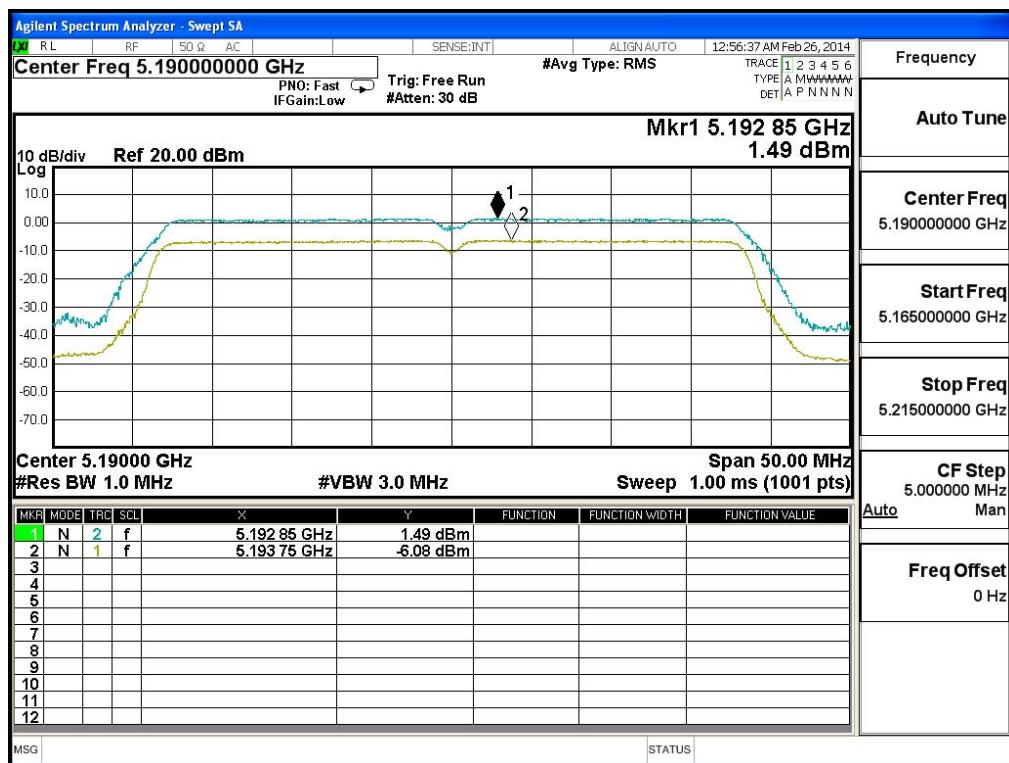
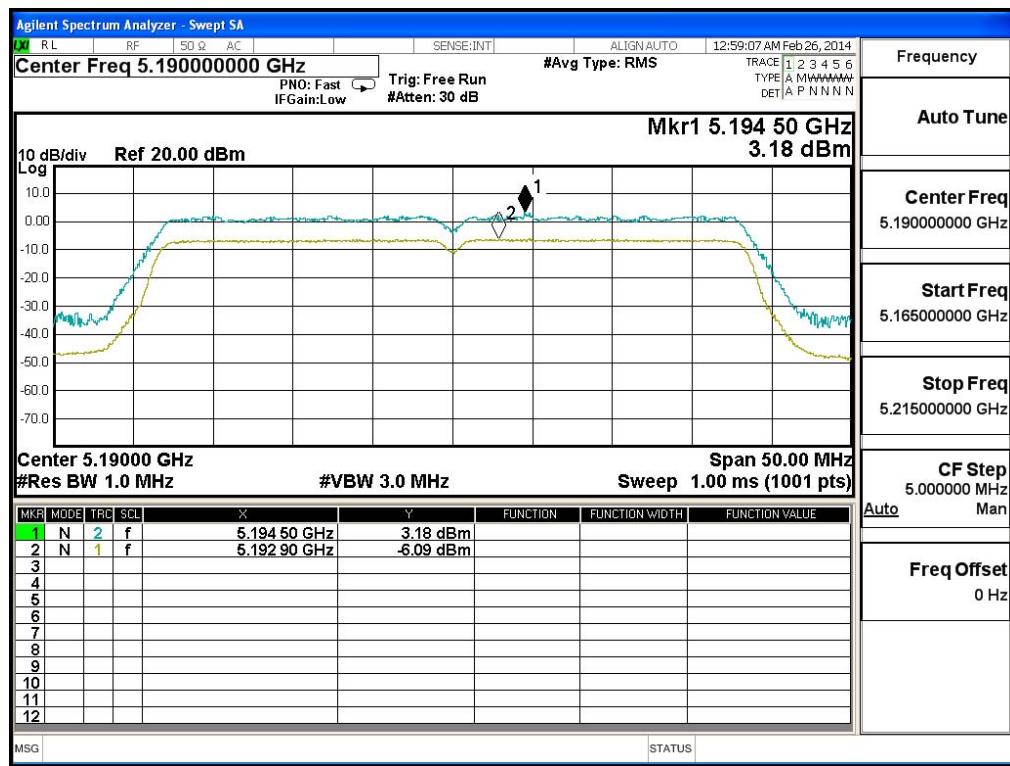
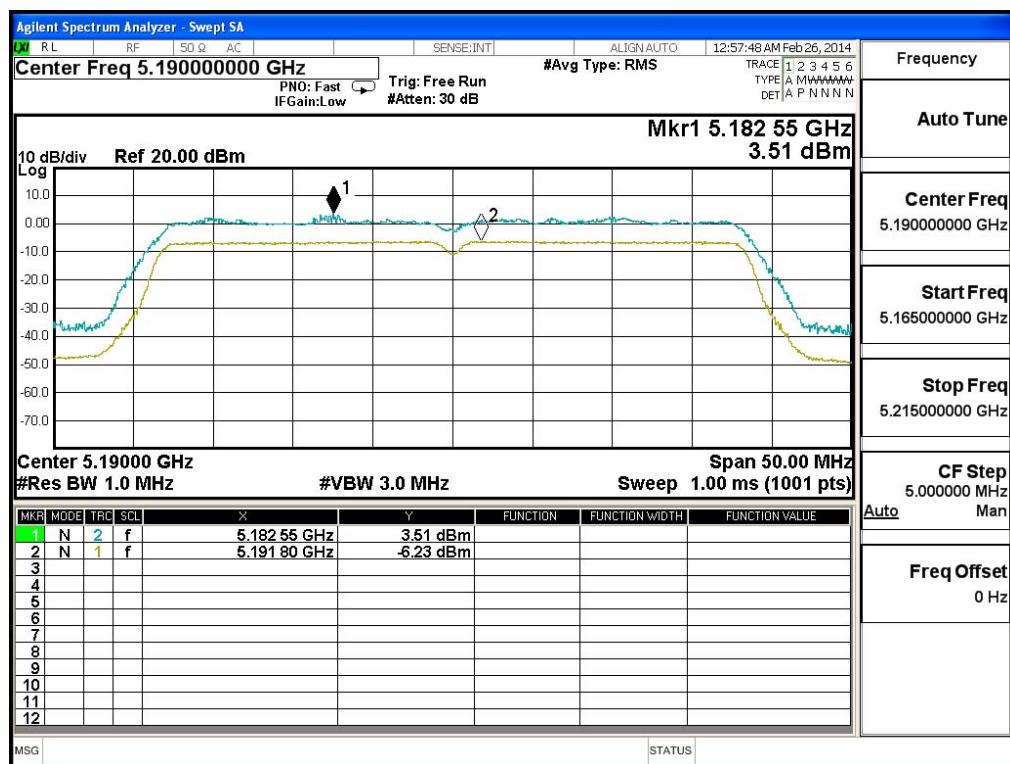



Product : IP COMMUNICATION TERMINAL
 Test Item : Peak Excursion
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps)

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Measurement Level (dB)	Required Limit (dB)	Result
38	5190	MCS (0)	7.570	<13	Pass
		MCS (2)	9.740	<13	Pass
		MCS (4)	9.270	<13	Pass
		MCS (7)	8.720	<13	Pass

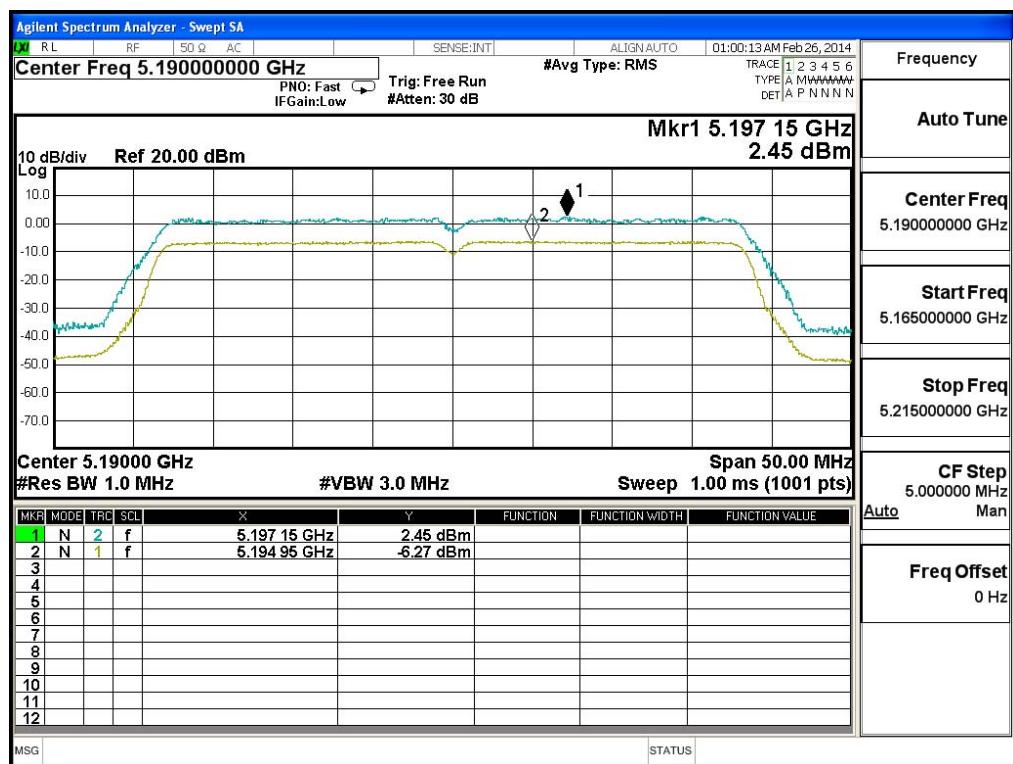Channel 46:







6. Radiated Emission

6.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2013
	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2013
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/925975	Mar., 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	QuiTek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	QuiTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

6.2. Test Setup

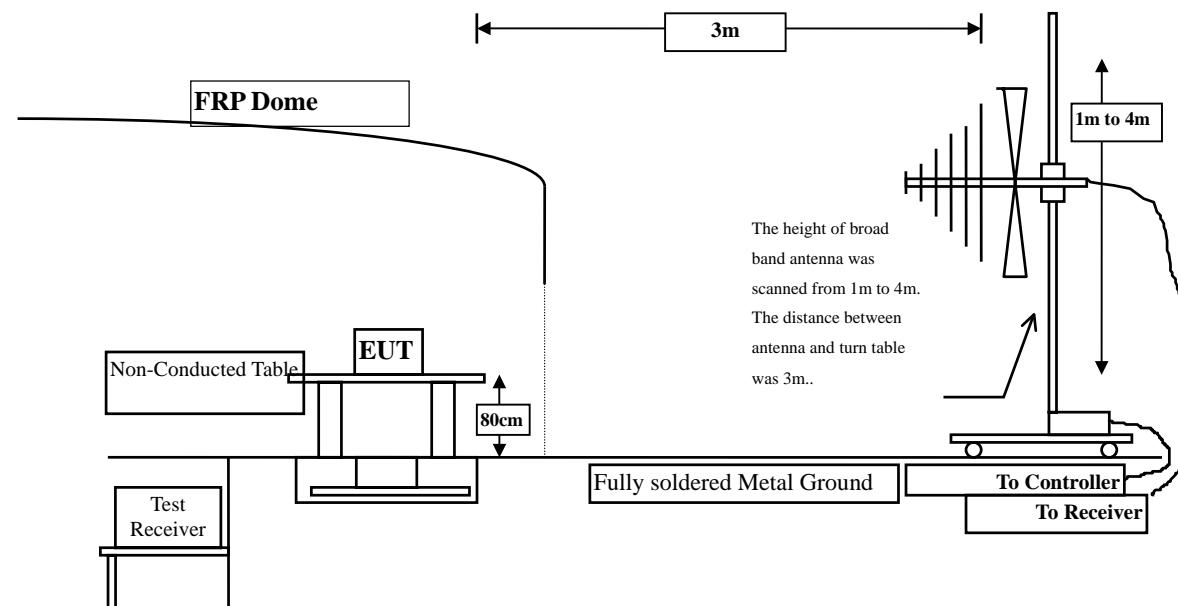Radiated Emission Below 1GHz



Radiated Emission Above 1GHz

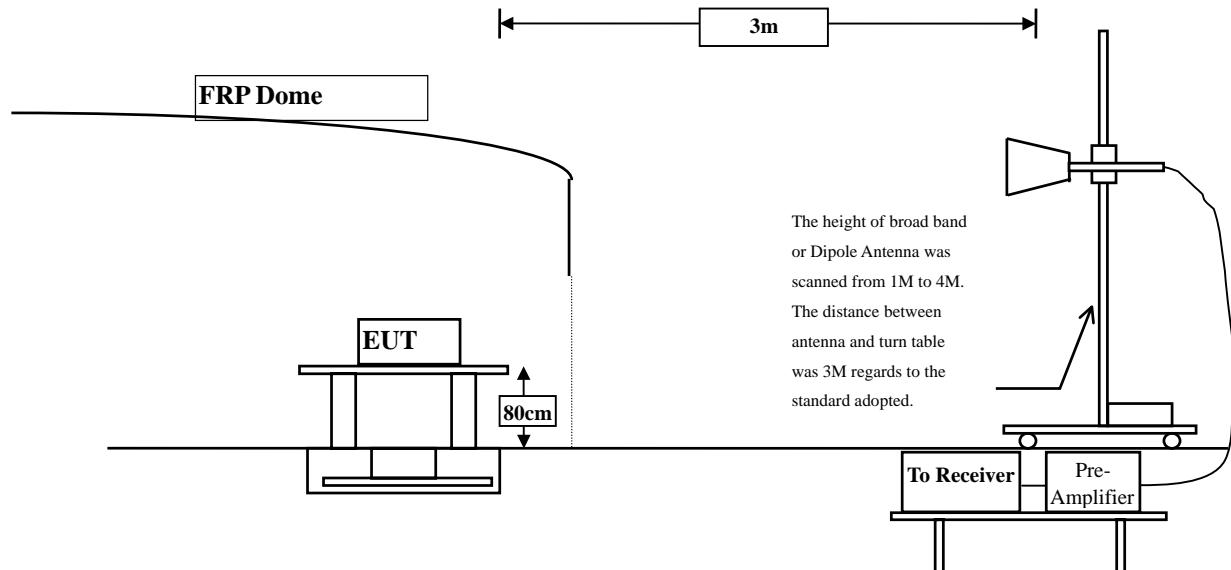

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

6.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

6.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

6.6. Test Result of Radiated Emission

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz) (Monopole Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10360.000	12.930	44.270	57.200	-16.800	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
10360.000	12.930	29.270	42.200	-11.800	54.000
Vertical					
Peak Detector:					
10360.000	13.724	42.650	56.374	-17.626	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
10360.000	13.724	28.120	41.844	-12.156	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz) (Monopole Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10440.000	13.322	46.950	60.272	-13.728	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
10440.000	13.322	31.380	44.702	-9.298	54.000
Vertical					
Peak Detector:					
10440.000	14.245	42.550	56.795	-17.205	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
10440.000	14.245	29.490	43.735	-10.265	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz) (Monopole Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10480.000	13.693	46.160	59.854	-14.146	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
10480.000	13.693	31.130	44.824	-9.176	54.000
Vertical					
Peak Detector:					
10480.000	14.620	44.210	58.831	-15.169	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average					
Detector:					
10480.000	14.620	30.990	45.611	-8.389	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz) (Monopole
 Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
10360.000	12.930	43.020	55.950	-18.050	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
10360.000	12.930	28.450	41.380	-12.620	54.000
Vertical					
Peak Detector:					
10360.000	13.724	43.020	56.744	-17.256	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
10360.000	13.724	27.840	41.564	-12.436	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5220MHz) (Monopole
 Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10440.000	13.322	45.130	58.452	-15.548	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000

**Average
Detector:**

10440.000	13.322	31.460	44.782	-9.218	54.000
-----------	--------	--------	--------	--------	--------

Vertical

Peak Detector:

10440.000	14.245	42.990	57.235	3.235	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000

**Average
Detector:**

10440.000	14.245	29.660	43.905	-10.095	54.000
-----------	--------	--------	--------	---------	--------

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5240MHz) (Monopole
 Antenna)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

Horizontal

Peak Detector:

10480.000	13.693	45.460	59.154	-14.846	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000

**Average
Detector:**

10480.000	13.693	31.420	45.114	-8.886	54.000
-----------	--------	--------	--------	--------	--------

Vertical

Peak Detector:

10480.000	14.620	43.210	57.831	-16.169	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000

**Average
Detector:**

10480.000	14.620	31.140	45.761	-8.239	54.000
-----------	--------	--------	--------	--------	--------

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz) (Monopole Antenna)

Frequency MHz	Correct Factor	Reading Level dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10380.000	12.939	41.480	54.419	-19.581	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
10380.000	12.939	26.870	39.809	-14.191	54.000
Vertical					
Peak Detector:					
10380.000	13.796	40.890	54.686	-19.314	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
10380.000	13.796	25.220	39.016	-14.984	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5230MHz) (Monopole Antenna)

Frequency MHz	Correct Factor	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10460.000	13.508	42.140	55.648	-18.352	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
10460.000	13.508	27.550	41.058	-12.942	54.000
Vertical					
Peak Detector:					
10460.000	14.433	41.200	55.633	-18.367	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
10460.000	14.433	27.230	41.663	-12.337	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10360.000	12.930	37.150	50.080	-23.920	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000

**Average
Detector:**

--

Vertical

Peak Detector:

10360.000	13.724	36.260	49.984	-24.016	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000

**Average
Detector:**

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10440.000	13.322	37.150	50.472	-23.528	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000

Average

Detector:

--

Vertical

Peak Detector:

10440.000	14.245	36.590	50.835	-23.165	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10480.000	13.693	36.590	50.284	-23.716	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000

Average

Detector:

--

Vertical

Peak Detector:

10480.000	14.620	37.050	51.671	-22.329	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5180MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10360.000	12.930	37.560	50.490	-23.510	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000

Average

Detector:

--

Vertical

Peak Detector:

10360.000	13.724	36.590	50.314	-23.686	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5220MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10440.000	13.322	37.150	50.472	-23.528	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000

Average

Detector:

--

Vertical

Peak Detector:

10440.000	14.245	36.590	50.835	-23.165	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5240MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10480.000	13.693	37.560	51.254	-22.746	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000

Average

Detector:

--

Vertical

Peak Detector:

10480.000	14.620	36.980	51.601	-22.399	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10380.000	12.939	37.160	50.099	-23.901	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000

Average

Detector:

--

Vertical

Peak Detector:

10380.000	13.796	37.560	51.356	-22.644	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5230MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

10460.000	13.508	37.150	50.658	-23.342	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000

Average

Detector:

--

Vertical

Peak Detector:

10460.000	14.433	37.230	51.663	-22.337	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : IP COMMUNICATION TERMINAL
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz) (Monopole Antenna)

Frequency MHz	Correct Factor	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
321.000	2.798	38.129	40.927	-5.073	46.000
371.440	3.000	36.379	39.379	-6.621	46.000
507.240	3.306	36.292	39.598	-6.402	46.000
582.900	3.502	31.883	35.385	-10.615	46.000
664.380	3.679	30.272	33.951	-12.049	46.000
831.220	3.928	27.944	31.872	-14.128	46.000
Vertical					
Peak Detector					
588.720	6.938	32.617	39.555	-6.445	46.000
631.400	7.015	33.466	40.481	-5.519	46.000
683.780	7.118	32.383	39.501	-6.499	46.000
749.740	7.300	29.738	37.038	-8.962	46.000
883.600	7.326	29.005	36.330	-9.670	46.000
970.900	7.362	28.081	35.443	-18.557	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : IP COMMUNICATION TERMINAL
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5220MHz) (Monopole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector					
507.240	3.306	35.653	38.959	-7.041	46.000
590.660	3.522	35.755	39.277	-6.723	46.000
613.940	3.540	33.852	37.392	-8.608	46.000
740.040	3.860	32.243	36.103	-9.897	46.000
819.580	3.876	32.334	36.211	-9.789	46.000
922.400	3.881	33.232	37.113	-8.887	46.000
Vertical					
Peak Detector					
462.620	6.652	34.689	41.341	-4.659	46.000
528.580	6.788	30.104	36.892	-9.108	46.000
604.240	6.960	33.682	40.642	-5.358	46.000
664.380	7.102	30.787	37.889	-8.111	46.000
734.220	7.269	33.326	40.595	-5.405	46.000
877.780	7.329	26.858	34.187	-11.813	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : IP COMMUNICATION TERMINAL
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz) (Monopole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector					
336.520	2.877	36.548	39.425	-6.575	46.000
507.240	3.306	35.799	39.105	-6.895	46.000
600.360	3.534	30.375	33.909	-12.091	46.000
664.380	3.679	30.672	34.351	-11.649	46.000
769.140	3.910	28.285	32.195	-13.805	46.000
914.640	3.880	25.754	29.634	-16.366	46.000
Vertical					
Peak Detector					
334.580	6.289	37.093	43.382	-2.618	46.000
450.980	6.604	36.892	43.497	-2.503	46.000
532.460	6.797	31.740	38.537	-7.463	46.000
666.320	7.101	32.361	39.463	-6.537	46.000
728.400	7.252	27.382	34.634	-11.366	46.000
916.580	7.304	28.016	35.320	-10.680	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : IP COMMUNICATION TERMINAL
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector

84.320	-10.564	44.731	34.167	-5.833	40.000
204.600	-11.166	41.351	30.184	-13.316	43.500
288.020	-4.579	39.170	34.591	-11.409	46.000
359.800	-1.680	38.379	36.699	-9.301	46.000
534.400	2.069	32.635	34.704	-11.296	46.000
666.320	2.031	33.708	35.740	-10.260	46.000

Vertical

Peak Detector

159.980	-6.185	34.968	28.783	-14.717	43.500
251.160	-7.505	37.041	29.536	-16.464	46.000
474.260	-4.556	36.026	31.469	-14.531	46.000
664.380	-1.918	31.636	29.718	-16.282	46.000
899.120	3.063	26.980	30.043	-15.957	46.000
961.200	7.260	26.229	33.489	-20.511	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : IP COMMUNICATION TERMINAL
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) (5220MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector

109.540	-7.488	42.894	35.406	-8.094	43.500
288.020	-4.579	42.321	37.742	-8.258	46.000
449.040	-2.238	31.216	28.978	-17.022	46.000
664.380	2.062	33.018	35.080	-10.920	46.000
796.300	5.161	30.670	35.831	-10.169	46.000
963.140	6.664	31.111	37.775	-16.225	54.000

Vertical

Peak Detector

117.300	-3.106	40.567	37.461	-6.039	43.500
270.560	-9.247	46.892	37.645	-8.355	46.000
421.880	-9.024	43.686	34.662	-11.338	46.000
598.420	-2.979	29.951	26.972	-19.028	46.000
817.640	3.272	25.741	29.013	-16.987	46.000
955.380	6.657	26.008	32.665	-13.335	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : IP COMMUNICATION TERMINAL
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) (5190MHz) (Dipole Antenna)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector					
152.220	-10.135	43.864	33.729	-9.771	43.500
311.300	-4.026	35.822	31.796	-14.204	46.000
443.220	-2.738	40.080	37.342	-8.658	46.000
600.360	3.977	29.284	33.261	-12.739	46.000
747.800	3.296	31.251	34.547	-11.453	46.000
932.100	6.922	22.691	29.613	-16.387	46.000
Vertical					
Peak Detector					
72.680	-5.622	34.302	28.679	-11.321	40.000
152.220	-6.215	41.258	35.043	-8.457	43.500
326.820	-5.468	34.568	29.101	-16.899	46.000
544.100	-0.688	25.559	24.871	-21.129	46.000
800.180	2.801	28.804	31.605	-14.395	46.000
965.080	7.932	22.608	30.540	-23.460	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

7. Band Edge

7.1. Test Equipment

RF Radiated Measurement:

The following test equipments are used during the band edge tests:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2013
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/925975	Mar., 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuiTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuiTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note:

1. All instruments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

7.2. Test Setup

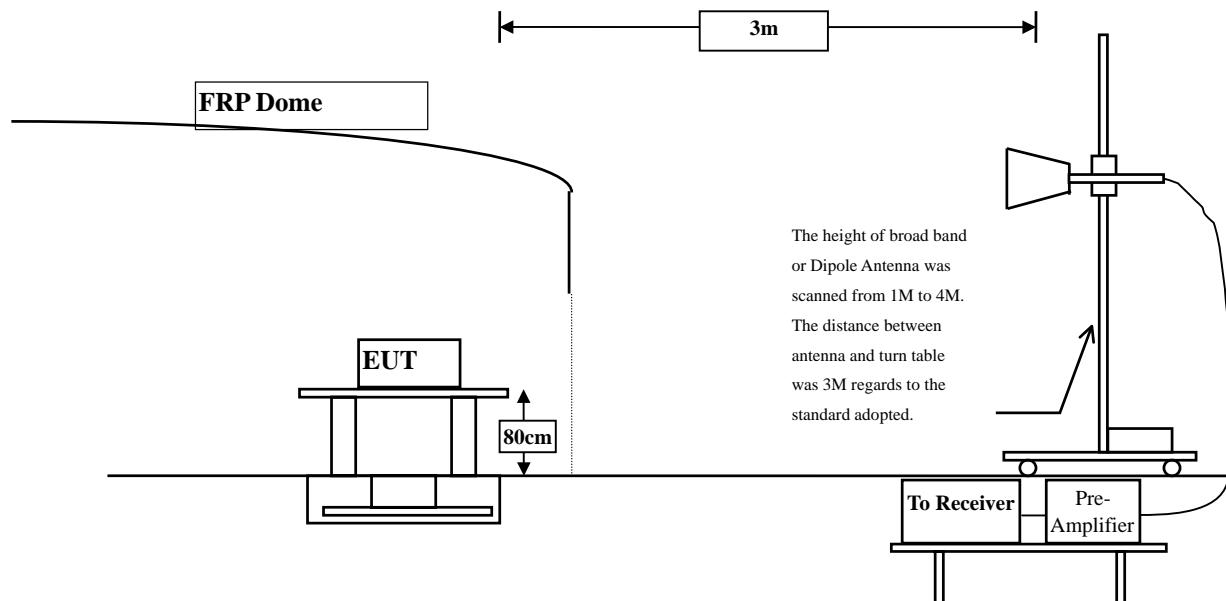RF Radiated Measurement:



7.3. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks : 1. RF Voltage (dBuV) = $20 \log \text{RF Voltage (uV)}$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz.

The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

7.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

7.6. Test Result of Band Edge

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36 (Monopole Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5150.000	3.340	36.493	39.833	74.00	54.00	Pass
36 (Peak)	5177.600	3.243	93.547	96.790	--	--	Pass
36 (Average)	5150.000	3.340	25.234	28.574	74.00	54.00	Pass
36 (Average)	5185.800	3.214	84.586	87.800	--	--	Pass

Figure Channel 36:

Horizontal (Peak)


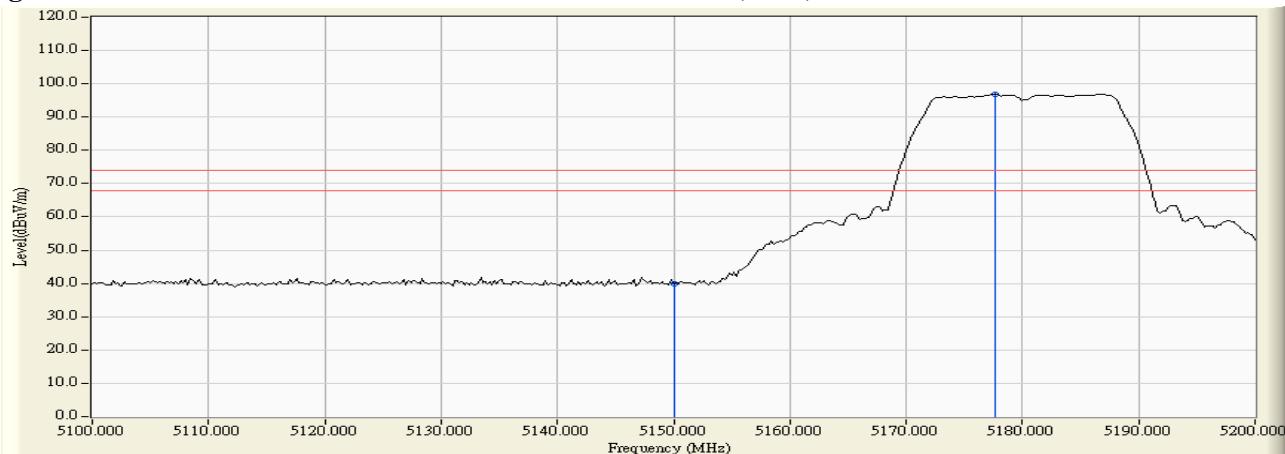


Figure Channel 36:

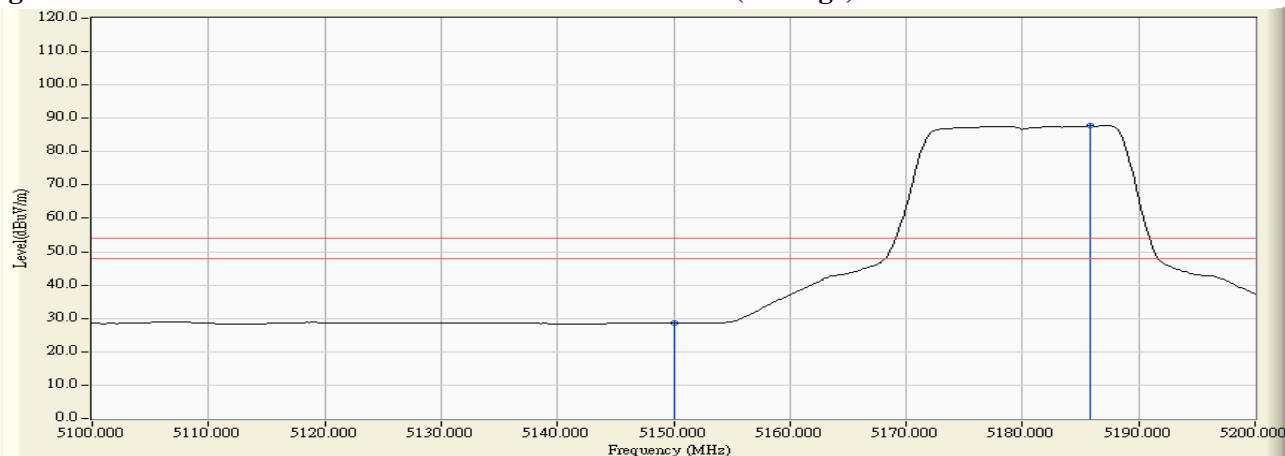Horizontal (Average)





Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36 (Monopole Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5150.000	5.260	38.282	43.542	74.00	54.00	Pass
36 (Peak)	5177.000	5.335	92.042	97.376	--	--	Pass
36 (Average)	5150.000	5.260	25.543	30.803	74.00	54.00	Pass
36 (Average)	5177.400	5.336	83.022	88.357	--	--	Pass

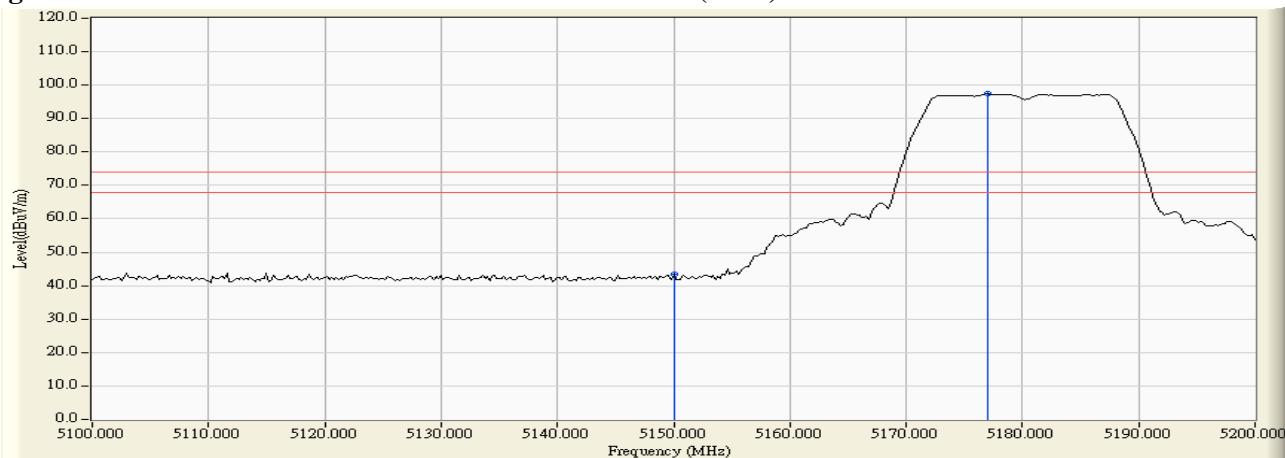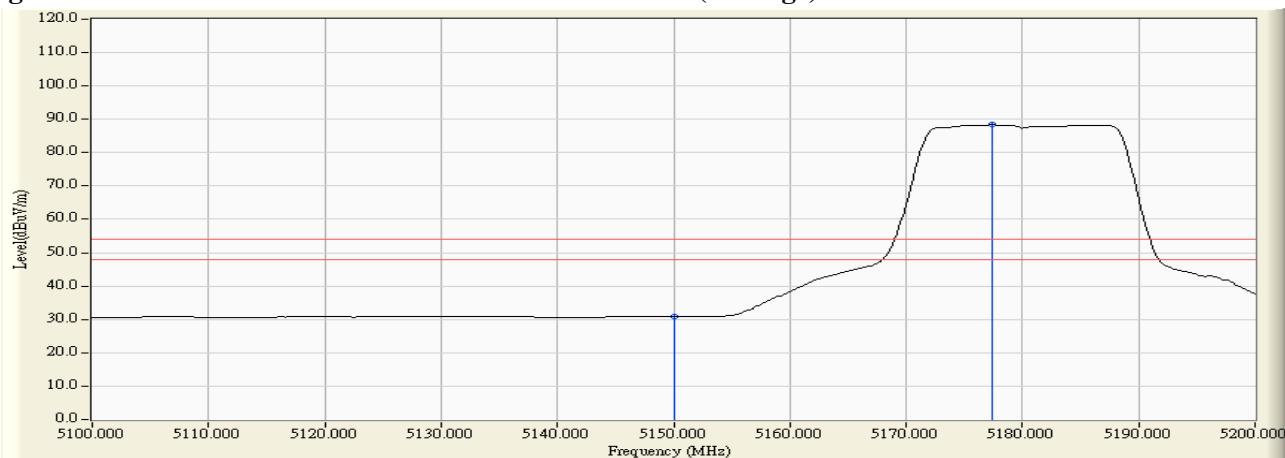Figure Channel 36:
Vertical (Peak)

Figure Channel 36:
Vertical (Average)


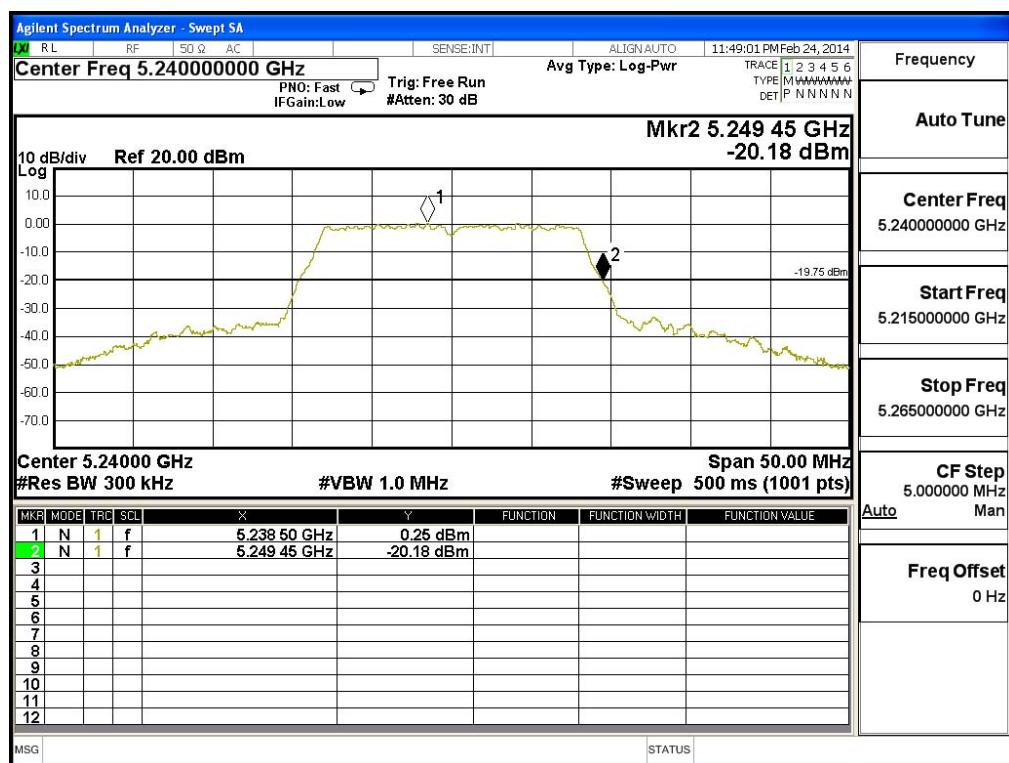
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 48

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5240	5249.45	<5250	PASS

NOTE: Accordance with 15.215 requirement.



Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 36 (Monopole Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5150.000	3.340	37.677	41.017	74.00	54.00	Pass
36 (Peak)	5187.400	3.208	93.429	96.637	--	--	Pass
36 (Average)	5150.000	3.340	25.340	28.680	74.00	54.00	Pass
36 (Average)	5188.000	3.205	83.847	87.053	--	--	Pass

Figure Channel 36:

Horizontal (Peak)


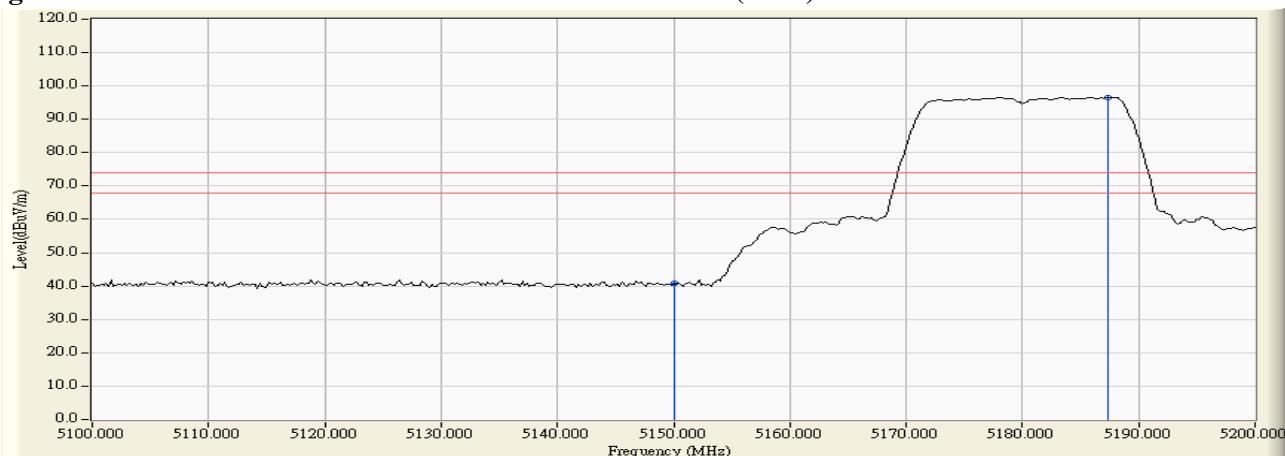


Figure Channel 36:

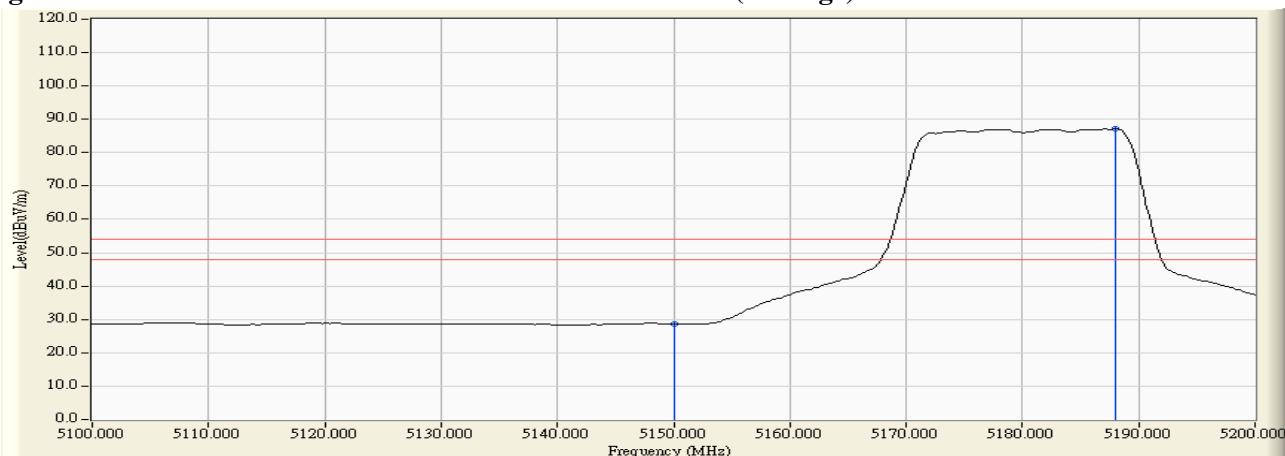Horizontal (Average)





Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 36 (Monopole
 Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5150.000	5.260	36.797	42.057	74.00	54.00	Pass
36 (Peak)	5178.000	5.335	91.622	96.958	--	--	Pass
36 (Average)	5150.000	5.260	25.583	30.843	74.00	54.00	Pass
36 (Average)	5185.600	5.358	82.106	87.463	--	--	Pass

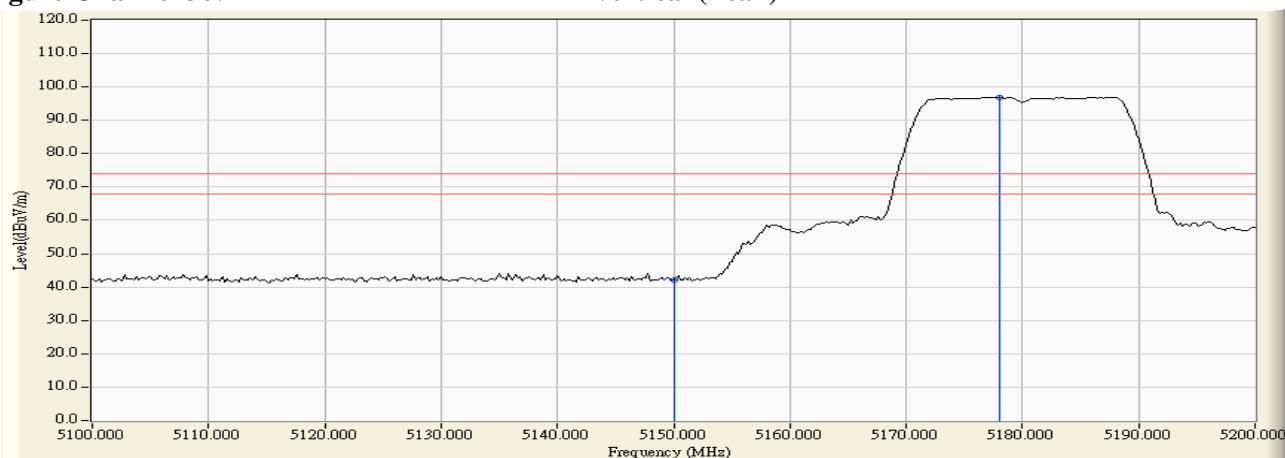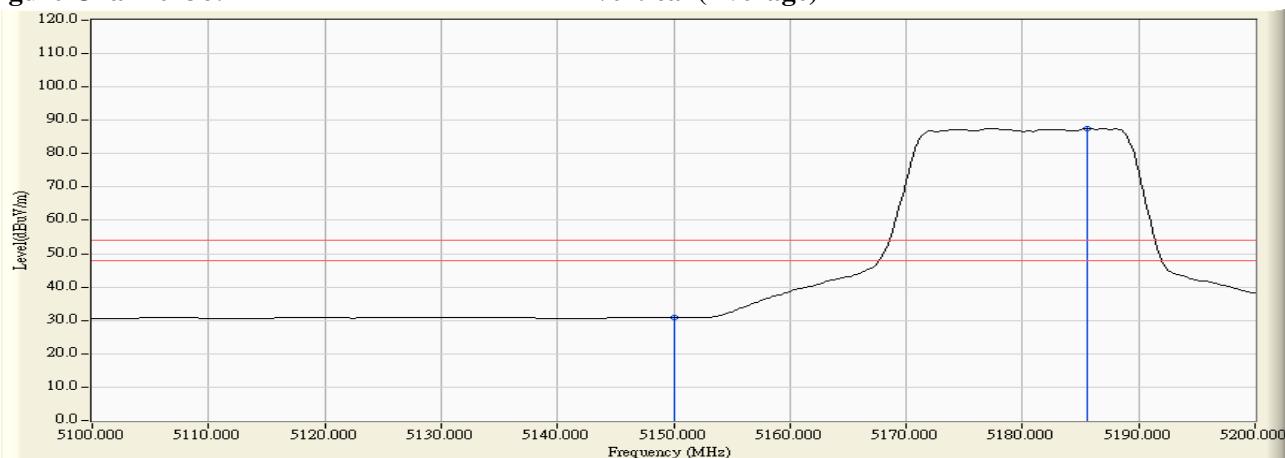Figure Channel 36:
Vertical (Peak)

Figure Channel 36:
Vertical (Average)


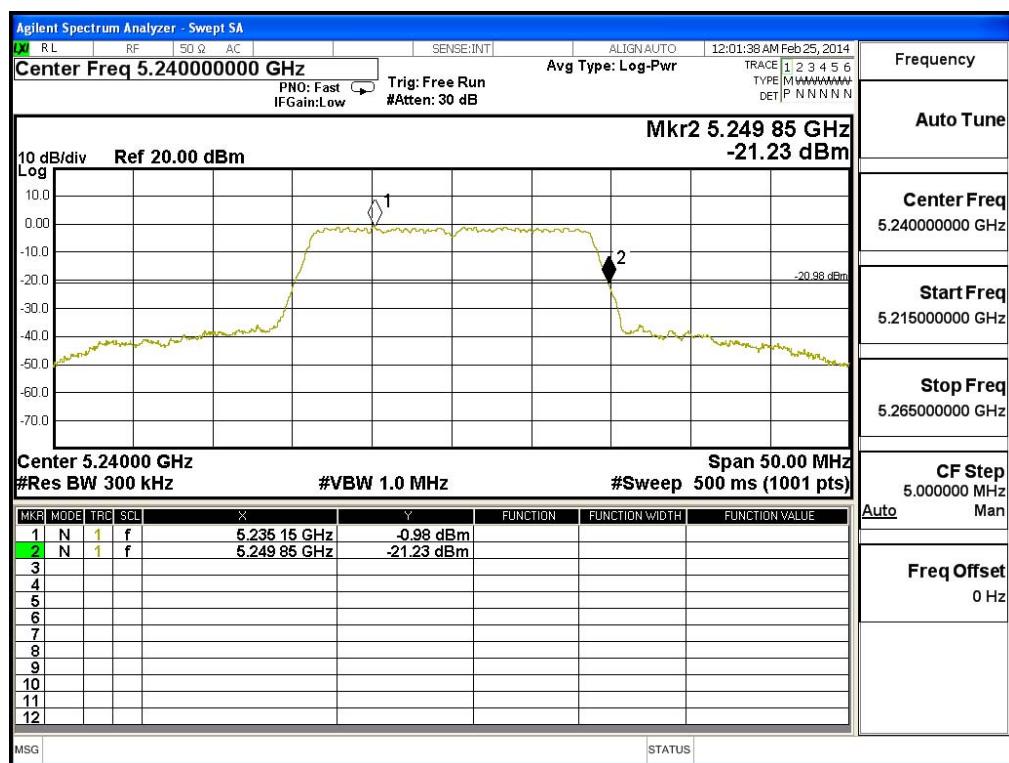
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 48

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5240	5249.85	<5250	PASS

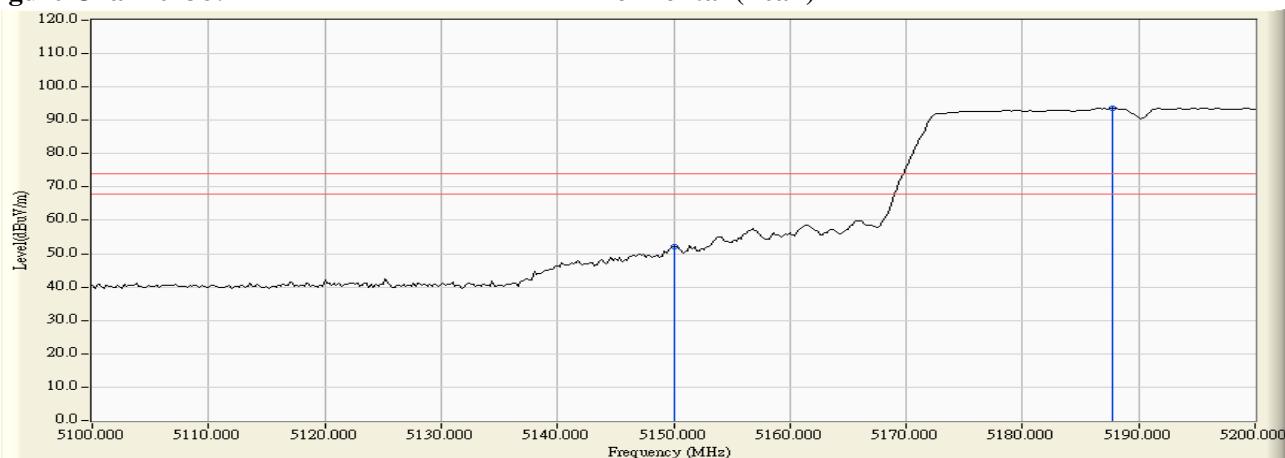
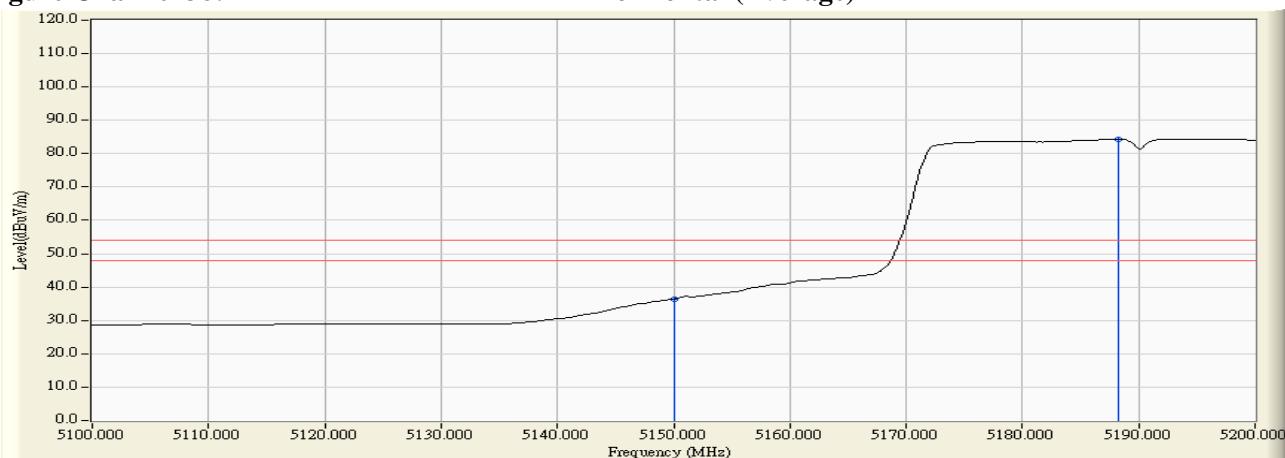
NOTE: Accordance with 15.215 requirement.



Product : IP COMMUNICATION TERMINAL
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) -Channel 38 (Monopole Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38 (Peak)	5150.000	3.340	48.741	52.081	74.00	54.00	Pass
38 (Peak)	5187.800	3.207	90.558	93.764	--	--	Pass
38 (Average)	5150.000	3.340	33.161	36.501	74.00	54.00	Pass
38 (Average)	5188.200	3.204	81.243	84.448	--	--	Pass

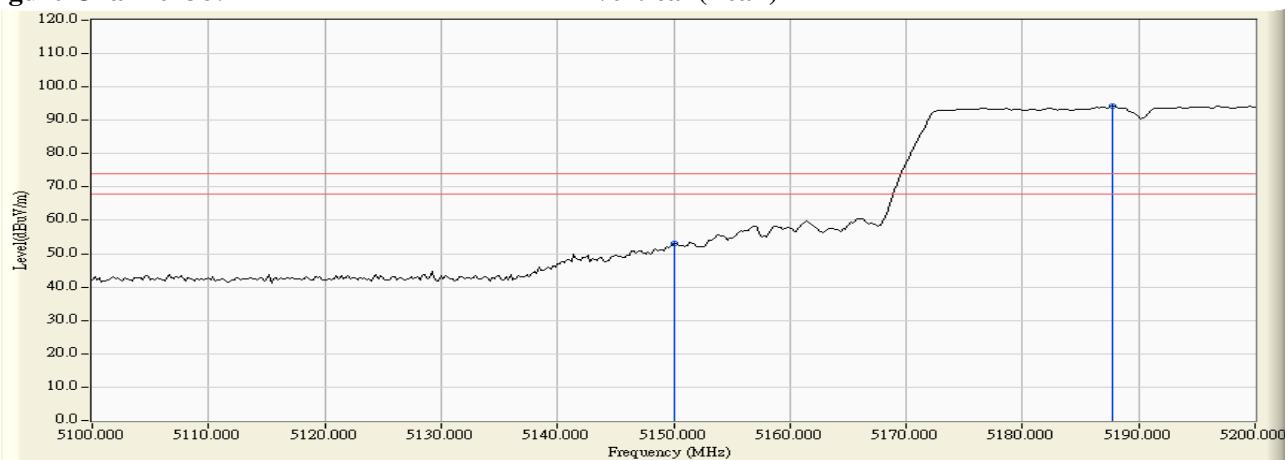
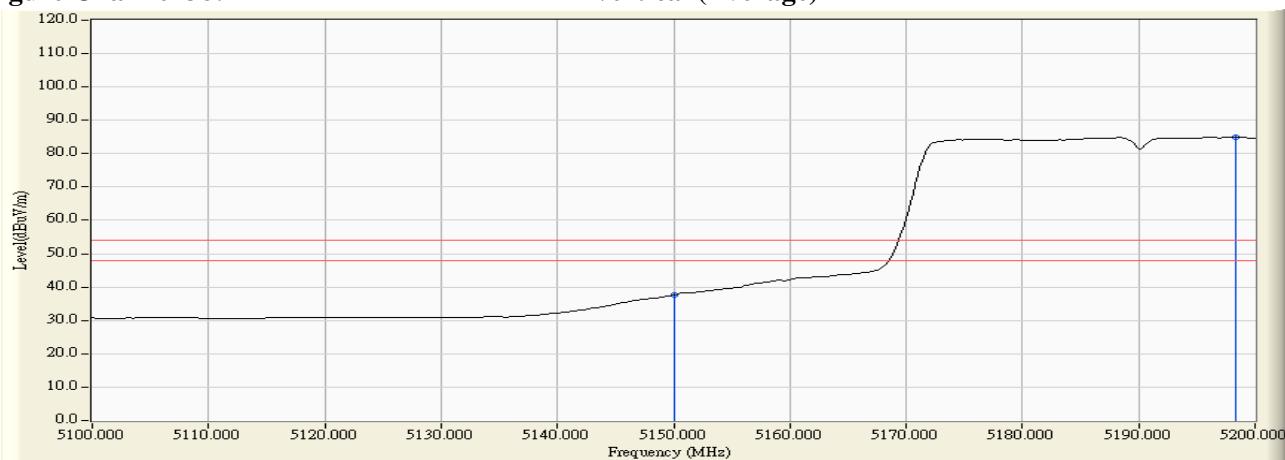
Figure Channel 38:
Horizontal (Peak)

Figure Channel 38:
Horizontal (Average)

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) -Channel 38 (Monopole
 Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38 (Peak)	5150.000	5.260	47.822	53.082	74.00	54.00	Pass
38 (Peak)	5187.800	5.363	88.885	94.248	--	--	Pass
38 (Average)	5150.000	5.260	32.355	37.615	74.00	54.00	Pass
38 (Average)	5198.400	5.382	79.526	84.908	--	--	Pass

Figure Channel 38:
Vertical (Peak)

Figure Channel 38:
Vertical (Average)


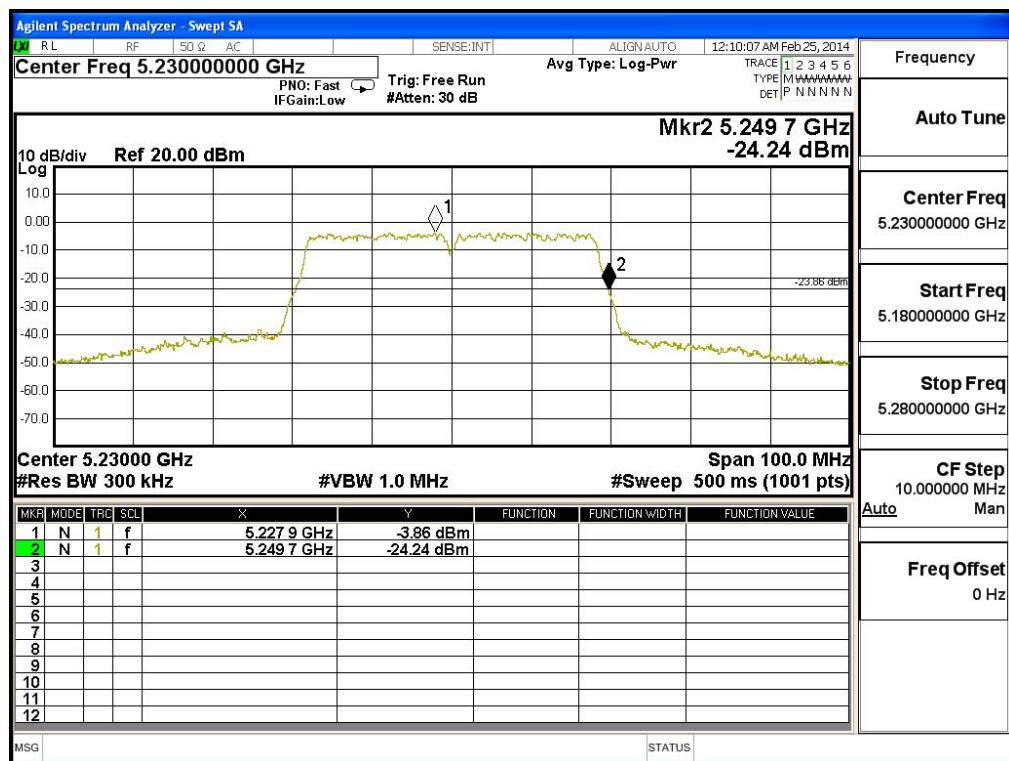
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps)-Channel 46

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5230	5249.70	<5250	PASS



NOTE: Accordance with 15.215 requirement.



Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36 (Dipole Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5148.600	3.345	42.691	46.036	74.00	54.00	Pass
36 (Peak)	5150.000	3.340	41.385	44.725	74.00	54.00	Pass
36 (Peak)	5177.000	3.246	84.255	87.500	--	--	Pass
36 (Average)	5150.000	3.340	29.357	32.697	74.00	54.00	Pass
36 (Average)	5176.600	3.246	74.733	77.979	--	--	Pass

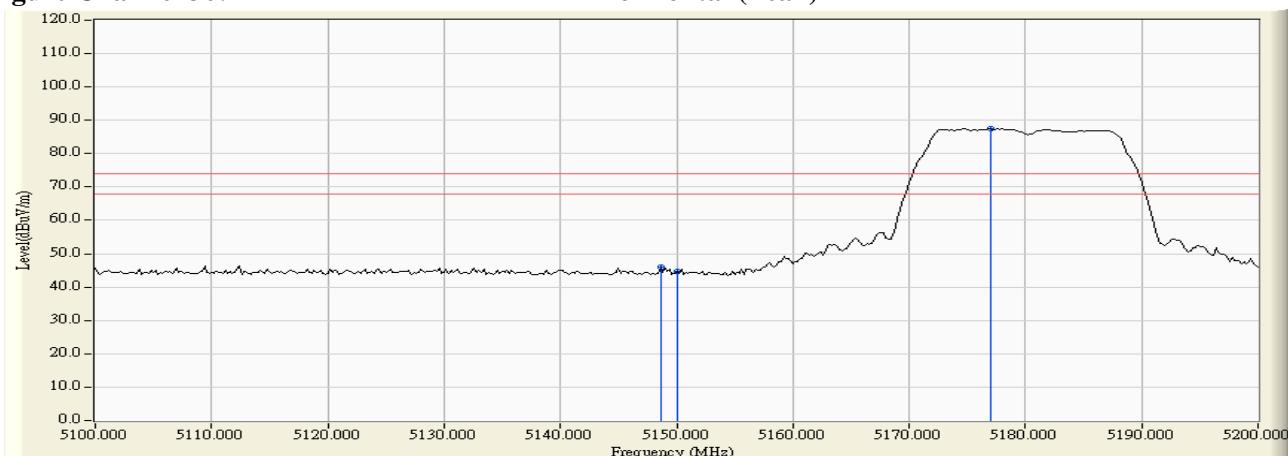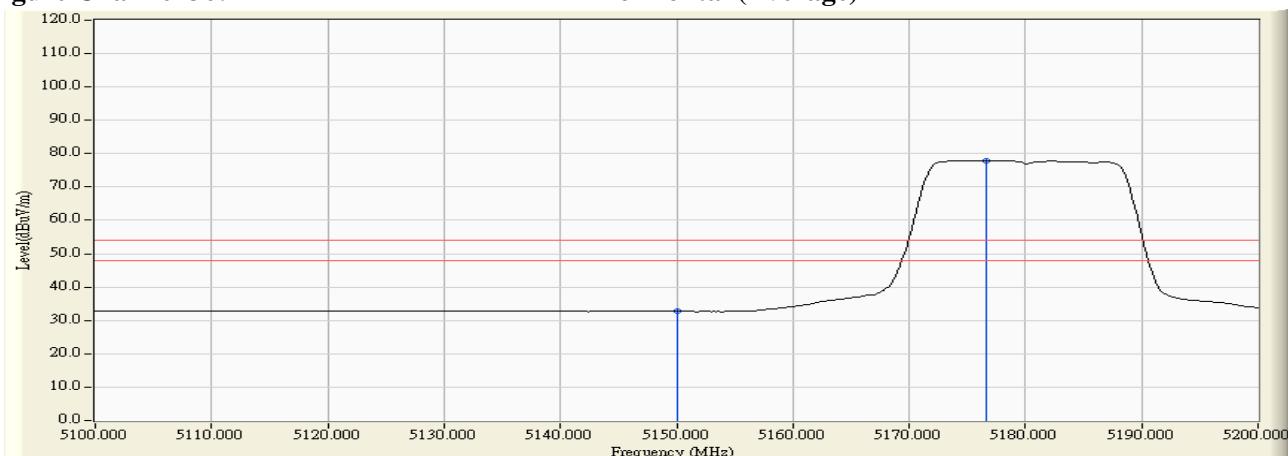Figure Channel 36:
Horizontal (Peak)

Figure Channel 36:
Horizontal (Average)


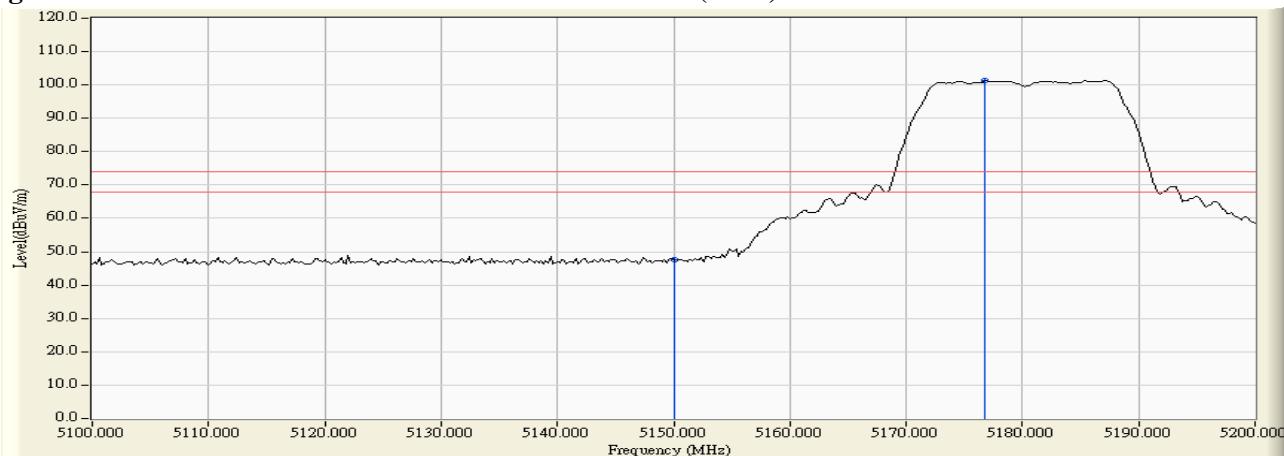
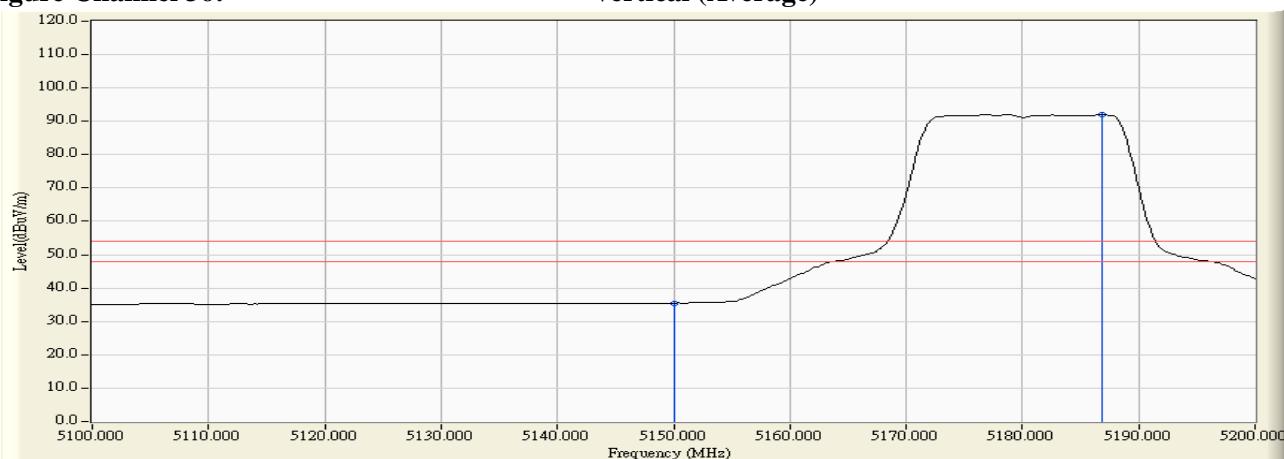
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 36 (Dipole Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5150.000	5.260	42.464	47.724	74.00	54.00	Pass
36 (Peak)	5176.800	5.334	96.005	101.338	--	--	Pass
36 (Average)	5150.000	5.260	30.279	35.539	74.00	54.00	Pass
36 (Average)	5186.800	5.360	86.592	91.953	--	--	Pass

Figure Channel 36:
Vertical (Peak)

Figure Channel 36:
Vertical (Average)


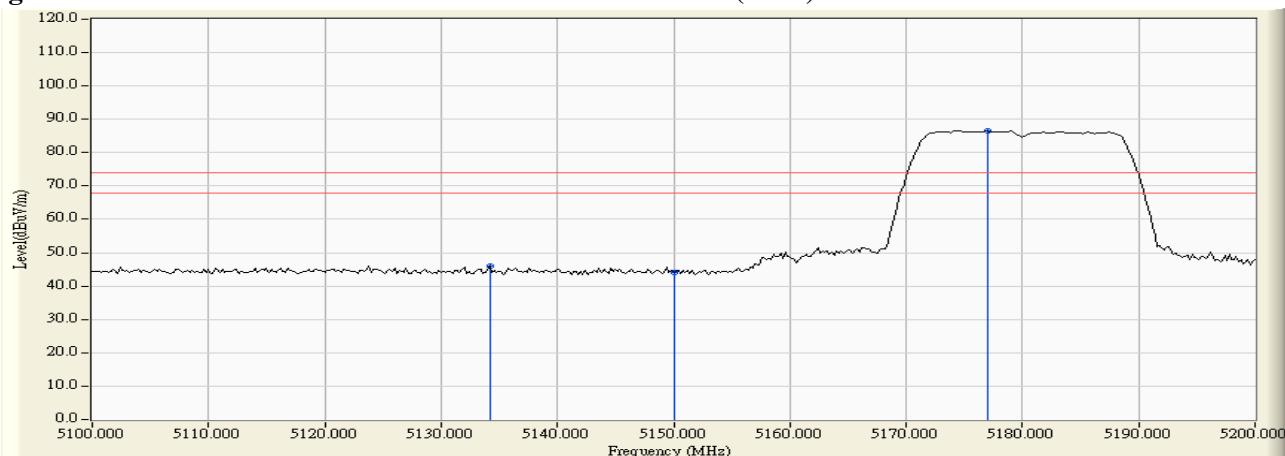
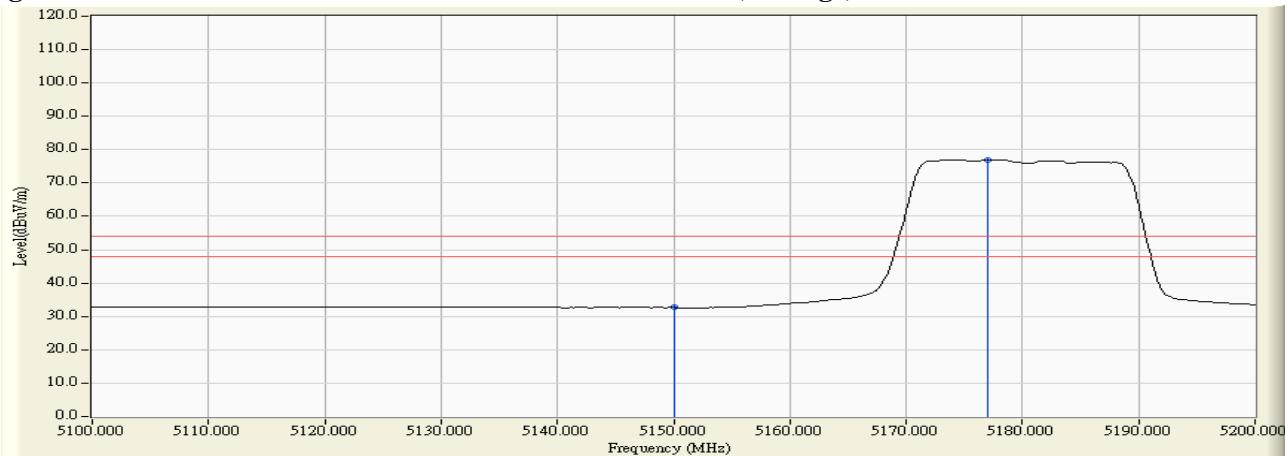
Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 36 (Dipole Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5134.200	3.395	42.694	46.089	74.00	54.00	Pass
36 (Peak)	5150.000	3.340	40.663	44.003	74.00	54.00	Pass
36 (Peak)	5177.000	3.246	83.371	86.616	--	--	Pass
36 (Average)	5150.000	3.340	29.315	32.655	74.00	54.00	Pass
36 (Average)	5177.000	3.246	73.790	77.035	--	--	Pass

Figure Channel 36:
Horizontal (Peak)

Figure Channel 36:
Horizontal (Average)


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW 7.2Mbps) -Channel 36 (Dipole Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5150.000	5.260	42.746	48.006	74.00	54.00	Pass
36 (Peak)	5177.000	5.335	94.546	99.880	--	--	Pass
36 (Average)	5150.000	5.260	30.191	35.451	74.00	54.00	Pass
36 (Average)	5177.000	5.335	85.149	90.483	--	--	Pass

Figure Channel 36:

Vertical (Peak)


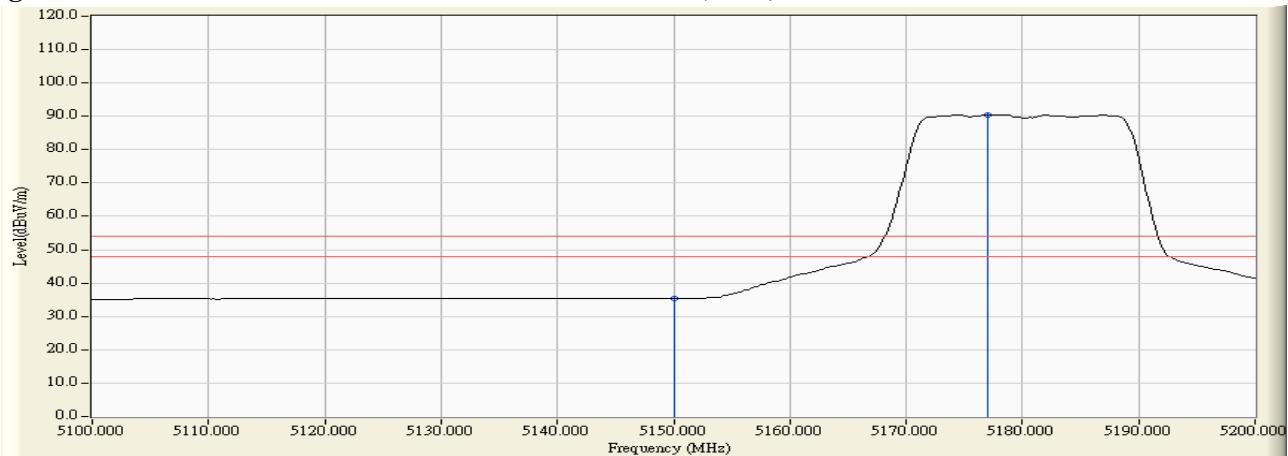


Figure Channel 36:

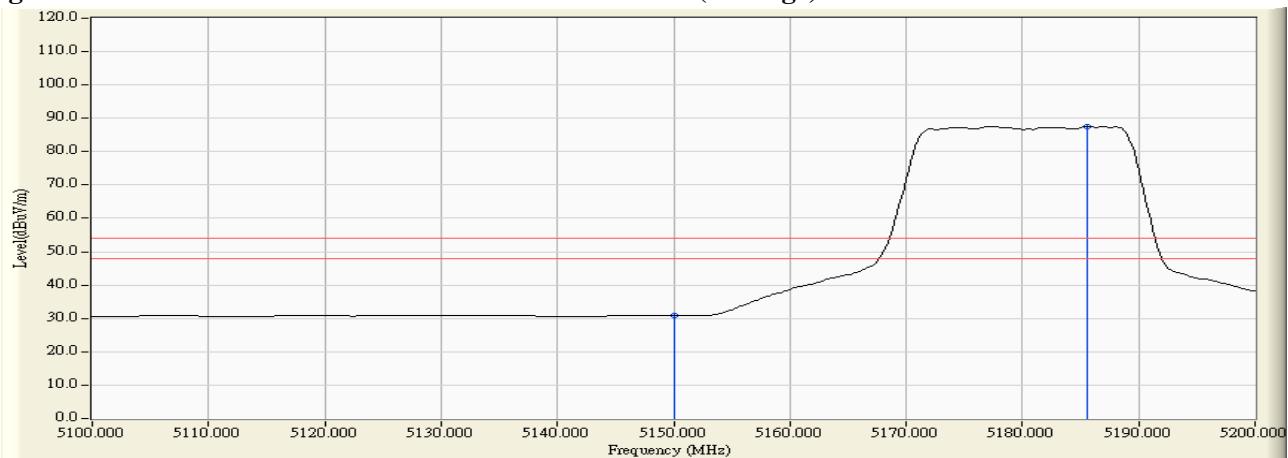Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
Test Item : Band Edge Data
Test Site : No.3 OATS
Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) -Channel 38 (Dipole Antenna)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38 (Peak)	5129.200	3.412	42.856	46.269	74.00	54.00	Pass
38 (Peak)	5150.000	3.340	41.526	44.866	74.00	54.00	Pass
38 (Peak)	5187.800	3.207	79.032	82.238	--	--	Pass
38 (Average)	5150.000	3.340	29.864	33.204	74.00	54.00	Pass
38 (Average)	5188.000	3.205	69.511	72.717	--	--	Pass

Figure Channel 38:

Horizontal (Peak)


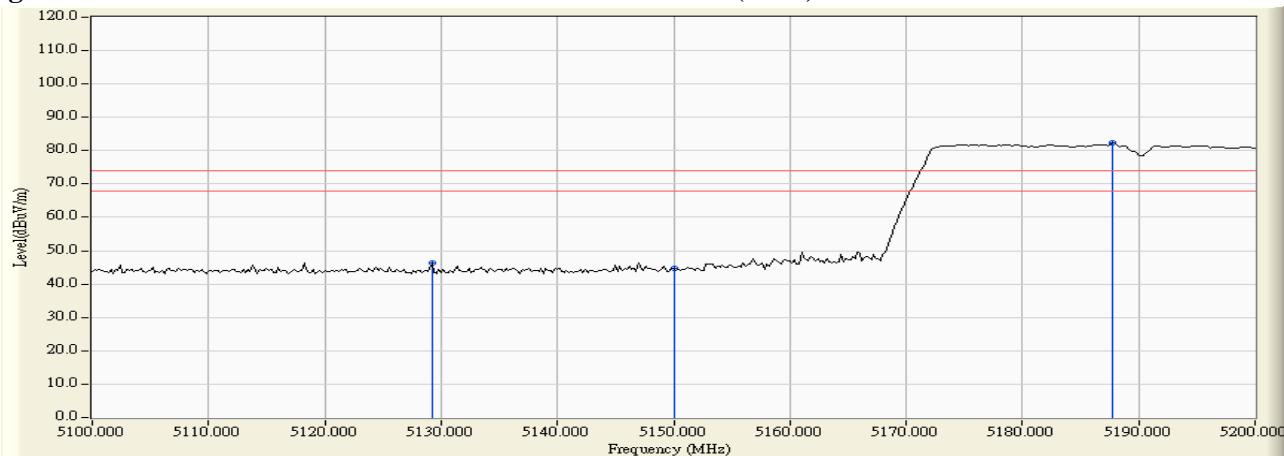


Figure Channel 38:

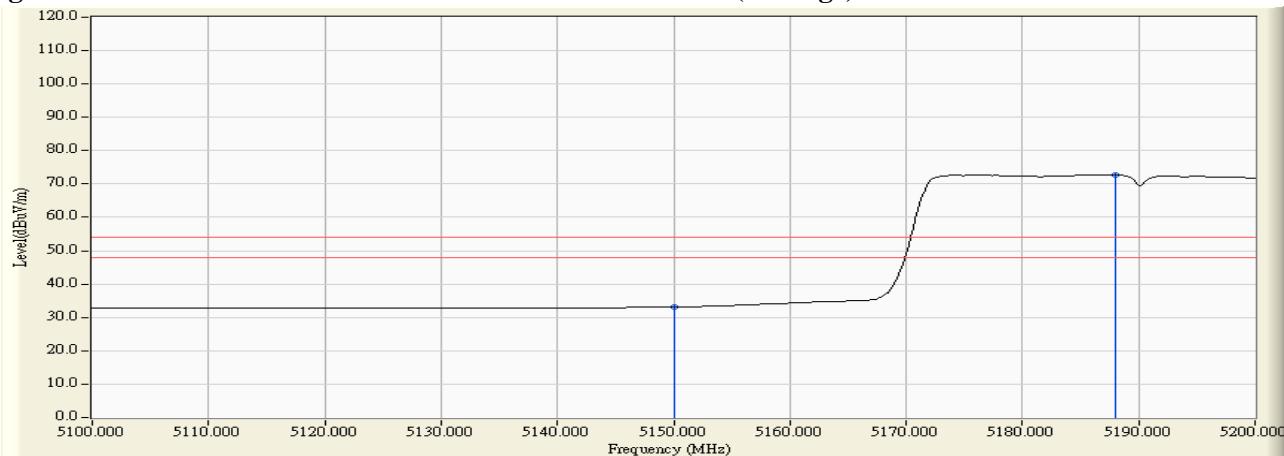Horizontal (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : IP COMMUNICATION TERMINAL
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW 15Mbps) -Channel 38 (Dipole Antenna)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38 (Peak)	5150.000	5.260	49.424	54.684	74.00	54.00	Pass
38 (Peak)	5187.800	5.363	92.657	98.020	--	--	Pass
38 (Average)	5150.000	5.260	35.402	40.662	74.00	54.00	Pass
38 (Average)	5187.800	5.363	82.962	88.325	--	--	Pass

Figure Channel 38:

Vertical (Peak)


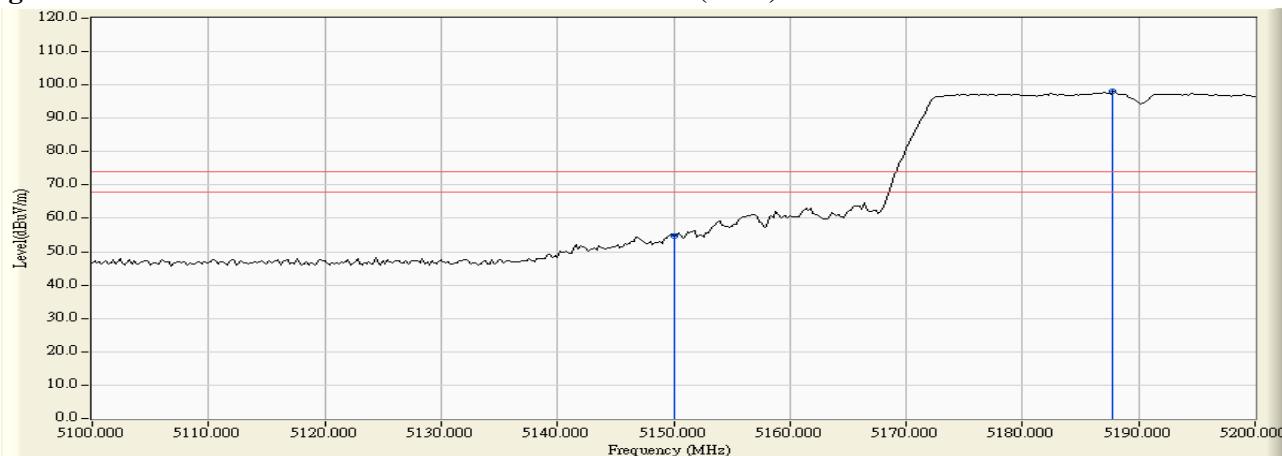


Figure Channel 38:

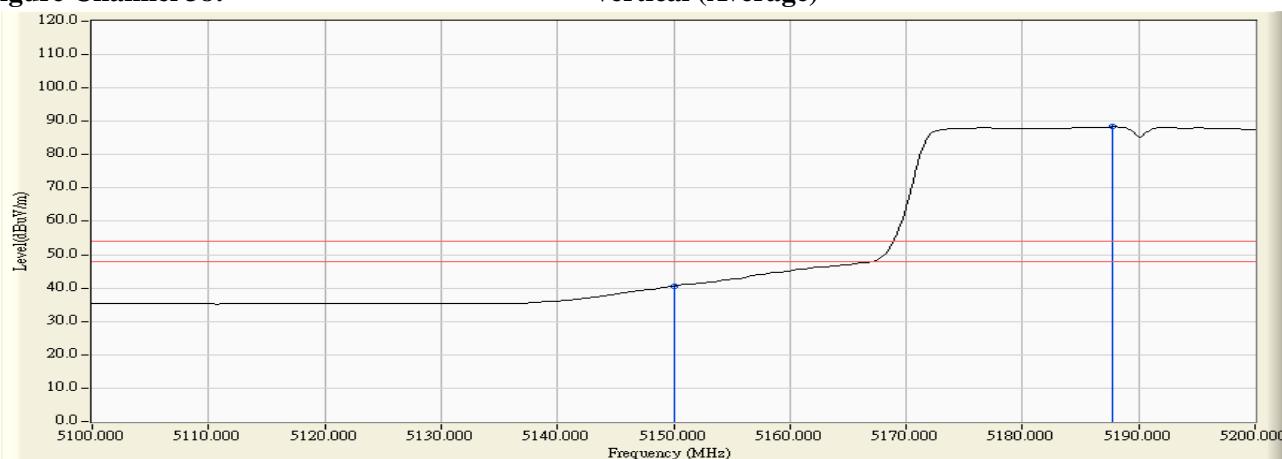Vertical (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

8. Frequency Stability


8.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2013
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2013
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

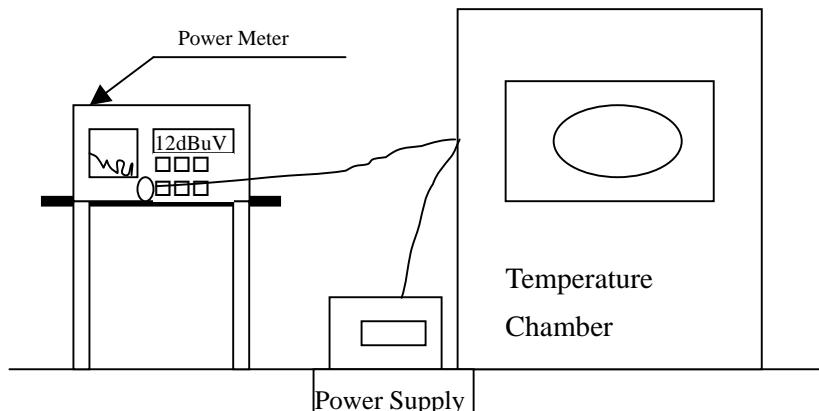8.2. Test Setup



8.3. Limits

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified

8.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

8.5. Uncertainty

± 150 Hz

8.6. Test Result of Frequency Stability

Product : IP COMMUNICATION TERMINAL
 Test Item : Frequency Stability
 Test Site : Temperature Chamber
 Test Mode : Carrier Wave

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
T _{nom} (20) °C	V _{nom} (120)V	36	5180.0000	5180.0073	-0.0073
		38	5190.0000	5190.0093	-0.0093
		44	5220.0000	5220.0096	-0.0096
		46	5230.0000	5230.0081	-0.0081
		48	5240.0000	5240.0098	-0.0098
T _{nom} (50) °C	V _{nom} (138)V	36	5180.0000	5180.0060	-0.0060
		38	5190.0000	5190.0098	-0.0098
		44	5220.0000	5220.0097	-0.0097
		46	5230.0000	5230.0086	-0.0086
		48	5240.0000	5240.0097	-0.0097
T _{nom} (50) °C	V _{nom} (102)V	36	5180.0000	5180.0061	-0.0061
		38	5190.0000	5190.0091	-0.0091
		44	5220.0000	5220.0096	-0.0096
		46	5230.0000	5230.0084	-0.0084
		48	5240.0000	5240.0097	-0.0097
		140	5180.0000	5180.0101	-0.0101
T _{nom} (0) °C	V _{nom} (138)V	36	5190.0000	5190.0090	-0.0090
		38	5220.0000	5220.0096	-0.0096
		44	5230.0000	5230.0097	-0.0097
		46	5240.0000	5240.0093	-0.0093
		48	5180.0000	5180.0101	-0.0101
T _{nom} (0) °C	V _{nom} (102)V	36	5190.0000	5190.0090	-0.0090
		38	5220.0000	5220.0096	-0.0096
		44	5230.0000	5230.0097	-0.0097
		46	5240.0000	5240.0093	-0.0093
		48	5180.0000	5180.0073	-0.0073

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.