





RADIO TEST REPORT

Test Report No. 15196050M-B-R1

Customer	PIONEER CORPORATION
Description of EUT	RDS AV RECEIVER
Model Number of EUT	DMH-WT6000NEX
FCC ID	AJDK125
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	May 28, 2024
Remarks	Bluetooth (BR / EDR) parts

Representative Test Engineer	Approved By
	
Hiromitsu Tanabe Engineer	Kazuhiro Ando Engineer
	 
	CERTIFICATE 1266.01
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- All test items in this test report are conducted by UL Japan, Inc. Kashima EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 15196050M-B

This report is a revised version of 15196050M-B. 15196050M-B is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15196050M-B	May 8, 2024	-
1	15196050M-B-R1	May 28, 2024	<u>Page 5</u> Deleted "Clock frequency (ies) in the system" and added "Operating temperature". <u>Page 6</u> Deleted the below comment. * WLAN and Bluetooth do not transmit simultaneously. Deleted the list of Supported GNSS and GNSS signals. Moved the page up from P.6 to P.5. <u>All pages</u> Changed the number of pages.

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing	10
SECTION 5: Radiated Spurious Emission.....	13
SECTION 6: Antenna Terminal Conducted Tests	15
APPENDIX 1: Test data	16
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation	16
Number of Hopping Frequency.....	20
Dwell time	22
Maximum Peak Output Power	25
Average Output Power.....	26
Radiated Spurious Emission.....	28
Conducted Spurious Emission.....	39
Conducted Emission Band Edge compliance	45
APPENDIX 2: Test Instruments	47
APPENDIX 3: Photographs of test setup.....	48
Radiated Spurious Emission.....	48
Antenna Terminal Conducted Tests	50

SECTION 1: Customer Information

Company Name	PIONEER CORPORATION
Address	25-1, Yamada, Kawagoe-shi, Saitama, 350-8555, JAPAN
Telephone Number	+81-49-228-6346
Contact Person	Takafumi Ida

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	RDS AV RECEIVER
Model Number	DMH-WT6000NEX
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	February 29, 2024
Test Date	April 2 to April 12, 2024

2.2 Product Description

General Specification

Rating	DC 14.4 V, 10 A
Operating temperature	-10 deg. C to 60 deg. C

Radio Specification

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band:	5745 MHz
	40 MHz Band:	5755 MHz
	80 MHz Band:	5775 MHz
Type of Modulation	OFDM	
Antenna Gain ^{a)} :	4.47 dBi	

Bluetooth (BR / EDR / Low Energy)

Equipment Type	Transceiver	
Frequency of Operation	2402 MHz to 2480 MHz	
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK) BT LE: GFSK	
Antenna Gain ^{a)} :	-0.83 dBi	

2.3 Variant model(s)

The EUT has following variant models.

Product description	Model number	Feature								
		Display LCD size	Movable display structure	Bluetooth	Wi-Fi	GNSS	FM/AM	HD Radio	BSD	Guard Cam
RDS AV RECEIVER *	DMH-WT6000NEX	10.1"	Type A	A	A	A	A	A	A	A
RDS AV RECEIVER	DMH-WT5000NEX	9.0"	Type B	A	A	A	A	A	NA	NA

*Tested model A: Applied NA: Not applied

Model DMH-WT6000NEX* and DMH-WT5000NEX contain the same RF module.
The differences between 2 models are above contents and do not affect wireless performance.

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	-	N/A	*1)
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ISED: RSS-247 5.1 (b)	See data.	Complied	Conducted
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ISED: RSS-247 5.1 (a)		Complied	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied	Conducted
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section15.247(b)(1) ISED: RSS-247 5.4 (b)		Complied	Conducted
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	2.2 dB 960.00 MHz, QP, Vertical (Mode: Tx, Hopping Off, 3DH5 2402 MHz)	Complied	Conducted/ Radiated (above 30 MHz) *2)
<p>Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.</p> <p>*1) The test is not applicable since the EUT does not have AC Mains. *2) Radiated test was selected over 30 MHz based on section 15.247(d).</p>					

FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the wireless transmitter regardless of input voltage. Instead of a new battery, DC power supply was used for the test. That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement. Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.2 dB
	30 MHz to 200 MHz	6.2 dB
	200 MHz to 1000 MHz	6.3 dB
	1 GHz to 6 GHz	4.7 dB
	6 GHz to 18 GHz	5.1 dB
	18 GHz to 40 GHz	5.5 dB
1 m	1 GHz to 18 GHz	5.2 dB
	18 GHz to 40 GHz	5.6 dB
0.5 m	26.5 GHz to 40 GHz	5.8 dB

Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	1.2 %
Maximum Output Power	0.58 dB
Carrier Frequency Separation	2.1×10^{-7}
Dwell time / Burst Rate	0.20 %
Conducted Spurious Emission (below 6 GHz)	2.2 dB
Conducted Spurious Emission (6 GHz to 18 GHz)	2.0 dB
Conducted Spurious Emission (18 GHz to 26.5 GHz)	2.2 dB
Conducted Spurious Emission (26.5 GHz to 40 GHz)	2.1 dB

3.5 Test Location

UL Japan, Inc. Kashima EMC Lab.

1614 Mushihata, Katori-shi, Chiba-ken, 289-0341 Japan

Telephone: +81-478-88-6500

A2LA Certificate Number: 1266.01 / FCC Test Firm Registration Number: 910230

ISED Lab Company Number: 4659A / CAB identifier: JP0006

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Open site	6.0 x 5.5 x 2.5	20 x 40	10 m
No.5 Open site	8.6 x 7.1 x 2.4	18 x 23	10 m
No.1 Shielded room	5.4 x 4.5 x 2.3	-	-
No.5 Shielded Room	4.2 x 3.1 x 2.5	-	-
No.9 Shielded Room	6.1 x 3.6 x 2.8	-	-
No.6 Semi-anechoic Chamber	8.5 x 5.5 x 5.2	-	3 m
No.10 Semi-anechoic Chamber	18.4 x 9.9 x 7.7	-	10 m
No.11 Semi-anechoic Chamber	9.0 x 6.5 x 5.2	-	3 m
No.1 Measurement room	5.0 x 3.7 x 2.6	-	-
No.2 Measurement room	4.3 x 4.4 x 2.7	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth (BT)	BR / EDR, Payload: PRBS9
<p>*EUT has the power settings by the software as follows; Power Setting: Fixed Software: Version: 0.03 (Date: 2024.3.27, Storage location: EUT memory)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>	

Details of Operating Mode(s)

Test Item	Mode	Hopping	Tested Frequency
Radiated Spurious Emission (Below 1 GHz)	Tx 3DH5 *1)	Off	2402 MHz
Radiated Spurious Emission (Above 1 GHz), Conducted Spurious Emission	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx DH5 Tx 3DH5	On	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx DH5 Tx 3DH5	On	-
Dwell time	Tx DH1, DH3, DH5 Tx 3DH1, 3DH3, 3DH5	On	-
Maximum Peak Output Power	Tx DH5 Tx 2DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2441 MHz 2480 MHz


*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)

*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.

*It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.

*1) Spurious emissions for frequencies below 1 GHz was limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.

4.2 Configuration and Peripherals

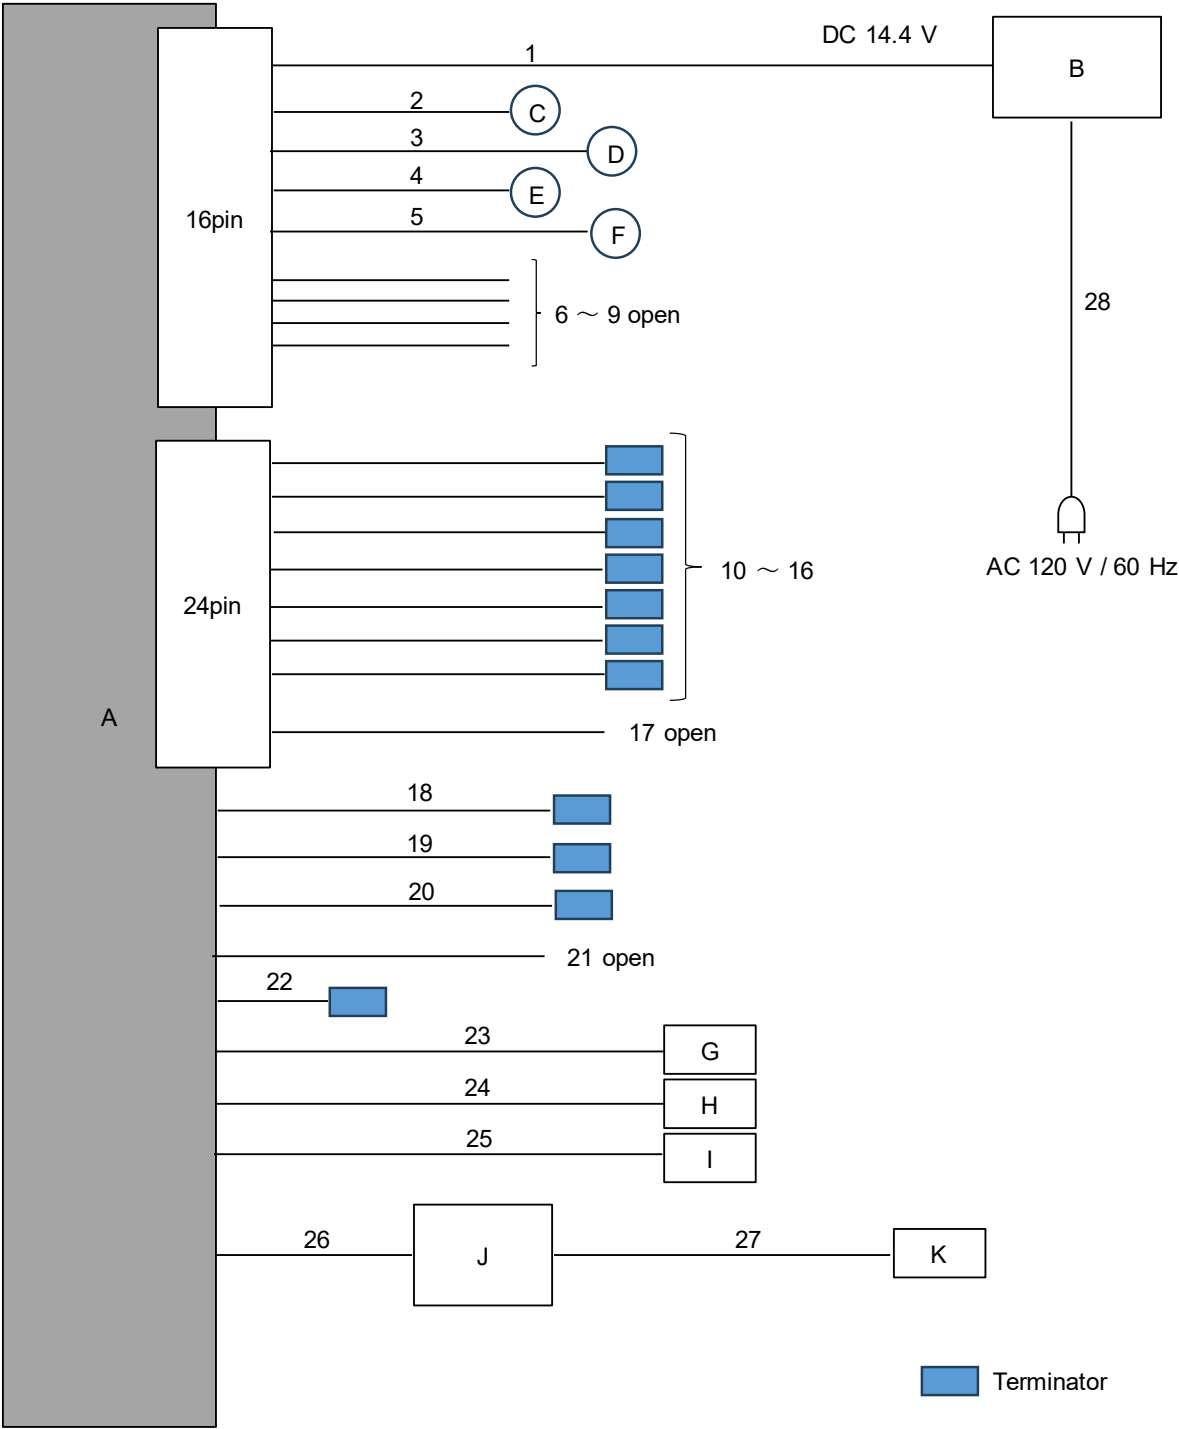

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	RDS AV RECEIVER	DMH-WT6000NEX	DATM000018UC *1) DATM000019UC *2)	PIONEER CORPORATION	EUT
B	DC Power Supply	GSV3000	1708192899	DIAMOND ANTENNA	-
C	Speaker	KFC-RS101	482C	JVCKENWOOD	-
D	Speaker	KFC-RS101	482C	JVCKENWOOD	-
E	Speaker	KFC-RS101	482C	JVCKENWOOD	-
F	Speaker	KFC-RS101	482C	JVCKENWOOD	-
G	GPS	CXF1333	-	PIONEER	-
H	MIC	CPM1127	-	PIONEER	-
I	USB Memory	RUF3-KS8G-BK	-	BAFFALO	-
J	Sirius Module	SXV300	RB2HZDML	Sirius XM Radio Inc.	-
K	Sirius Antenna	NGVA3	2126D	Sirius XM Radio Inc.	-

*1) Used for Antenna Terminal conducted test

*2) Used for Radiated Emission test

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC(+B, ACC, GND, PARKING BRAKE)	0.2 + 1.7 (+B) 0.15 + 1.75 (ACC) 0.4 + 1.5 (GND) 1.9 (PARKING)	Unshielded	Unshielded	-
2	Speaker Front Left	0.2 + 1.0	Unshielded	Unshielded	-
3	Speaker Front Right	0.2 + 1.0	Unshielded	Unshielded	-
4	Speaker Rear Left	0.2 + 1.0	Unshielded	Unshielded	-
5	Speaker Rear Right	0.2 + 1.0	Unshielded	Unshielded	-
6	CAR SPEED SIGNAL INPUT	1.9	Unshielded	Unshielded	-
7	REVERSE-GEAR SIGNAL INPUT	1.9	Unshielded	Unshielded	-
8	ANTENNA CONTROL SYSTEM CONTROL	0.1 + 1.0	Unshielded	Unshielded	-
9	ILLUMINATION	0.1 + 1.0	Unshielded	Unshielded	-
10	Front Output	0.15 + 1.55	Shield	Unshielded	-
11	Rear Output	0.15 + 1.55	Shield	Unshielded	-
12	SUBWOOFER Output	0.15 + 1.55	Shield	Unshielded	-
13	REAR MONITOR	0.25 + 0.75	Shield	Unshielded	-
14	REARVIEW CAMERA IN	0.2 + 0.7	Shield	Unshielded	-
15	SECOND CAMERA INPUT	0.2 + 1.4	Shield	Unshielded	-
16	AUX IN	0.15 + 2.0 + 1.55	Shield	Unshielded	-
17	MUTE	1.1	Unshielded	Unshielded	-
18	Signal	4.2	Unshielded	Unshielded	-
19	Signal	4.2	Unshielded	Unshielded	-
20	Signal	1.8	Unshielded	Unshielded	-
21	Audio	1.0	Shield	Unshielded	-
22	FM	0.3	Shield	Shield	-
23	GPS	3.5	Shield	Shield	-
24	MIC	3.0	Shield	Shield	-
25	USB	1.5	Shield	Shield	-
26	Sirius Module	0.6	Shield	Shield	-
27	Sirius Antenna	7.0	Shield	Shield	-
28	AC	1.7	Unshielded	Unshielded	-

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 1 GHz	Above 1 GHz
Antenna Type	Hybrid	Horn


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 1/T (T: burst length, refer to Burst rate confirmation sheet) Detector: Peak	RBW: 100 kHz VBW: 300 kHz

Figure 2: Test Setup


Below 1 GHz

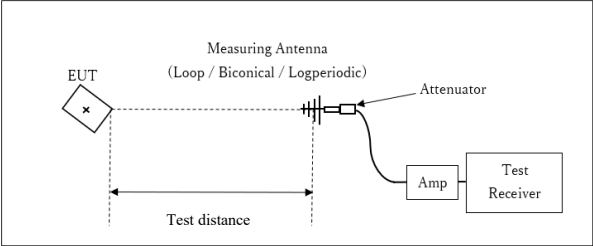

x : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

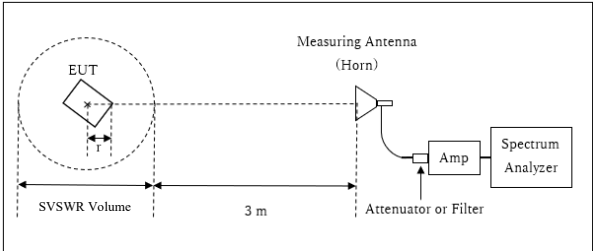


r : Radius of an outer periphery of EUT
x : Center of turn table

Distance Factor: $20 \times \log(4.35 \text{ m} / 3.0 \text{ m}) = 3.23 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 4.35 \text{ m}$

SVSWR Volume : 3.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.15 \text{ m}$

10 GHz to 26.5 GHz

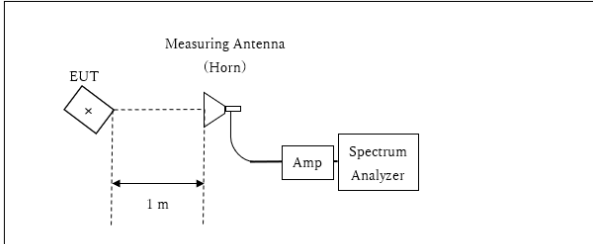

x : Center of turn table

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
*Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of 0 deg. and 40 deg. of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Antenna polarization	Carrier	Spurious (30 MHz - 1 GHz)	Spurious (1 GHz - 2.8 GHz)	Spurious (2.8 GHz - 10 GHz)	Spurious (10 GHz - 18 GHz)	Spurious (18 GHz - 26.5 GHz)
Horizontal	40 deg.	0 deg.	40 deg.	40 deg.	40 deg.	40 deg.
Vertical	40 deg.	0 deg.	40 deg.	40 deg.	40 deg.	40 deg.

Test results are rounded off and limit are rounded down, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 160MHz BW)
Carrier Frequency Separation	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	200 kHz	620 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) Peak hold was applied as Worst-case measurement.
 *2) Reference data
 *3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)
 *4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

Test results are rounded off and limit are rounded down, so some differences might be observed. The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test data

20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation


Test place Kashima EMC Lab. No.2 Measurement Room
Date April 4, 2024
Temperature / Humidity 23 deg. C / 47 % RH
Engineer Hiromitsu Tanabe
Mode Tx, Hopping Off, Tx, Hopping On

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.943	858.1	1.000	>= 0.629
DH5	2441.0	0.943	862.1	1.000	>= 0.629
DH5	2480.0	0.942	865.3	1.000	>= 0.628
DH5	Hopping On	-	78598.0	-	-
3DH5	2402.0	1.312	1193	1.000	>= 0.875
3DH5	2441.0	1.313	1194	1.000	>= 0.875
3DH5	2480.0	1.314	1194	1.000	>= 0.876
3DH5	Hopping On	-	78712.4	-	-


Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.


20dB Bandwidth and 99% Occupied Bandwidth

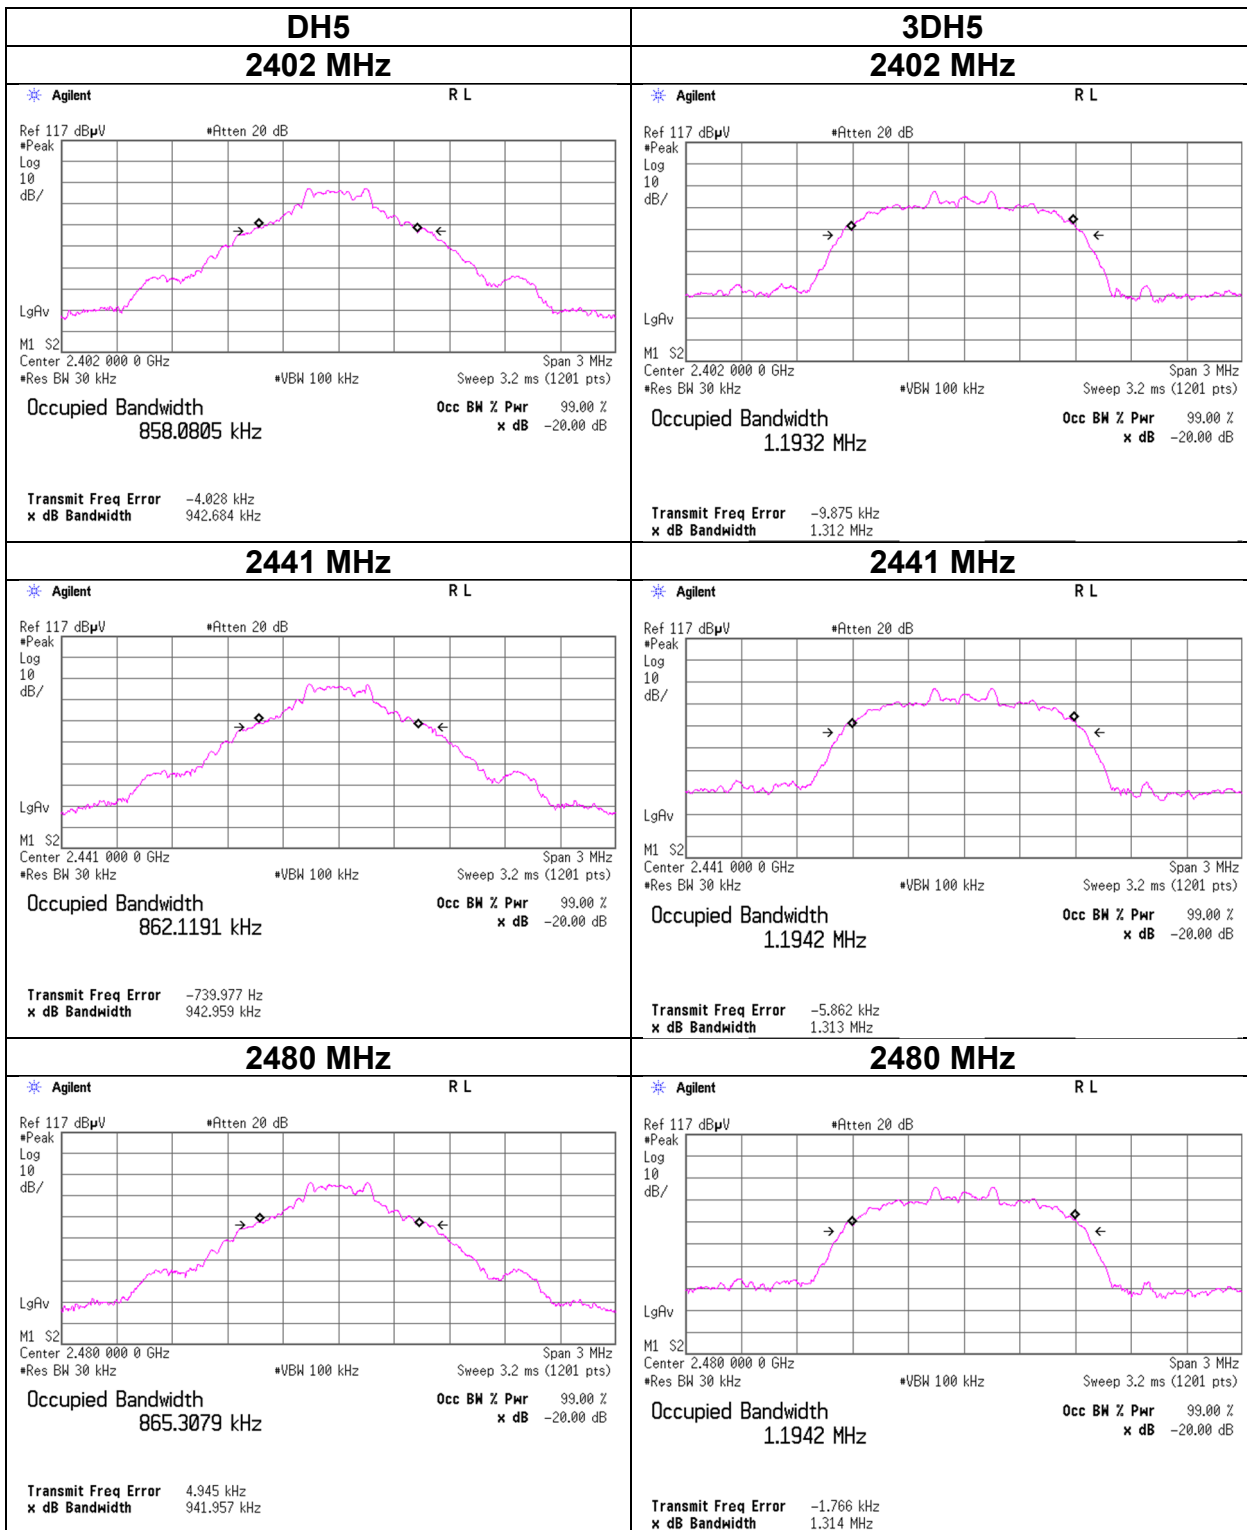

20dB Bandwidth and 99% Occupied Bandwidth

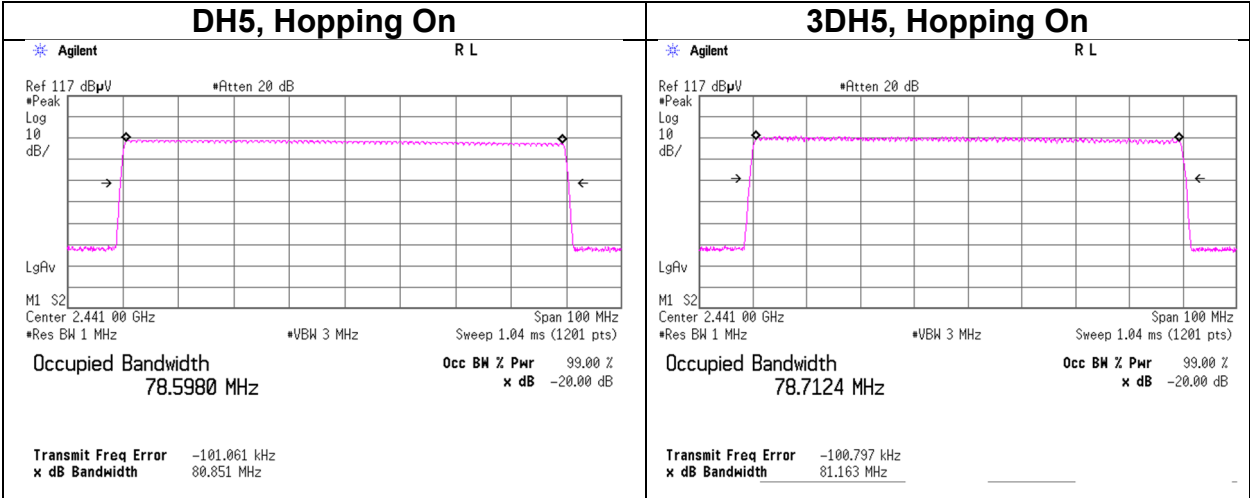

Carrier Frequency Separation

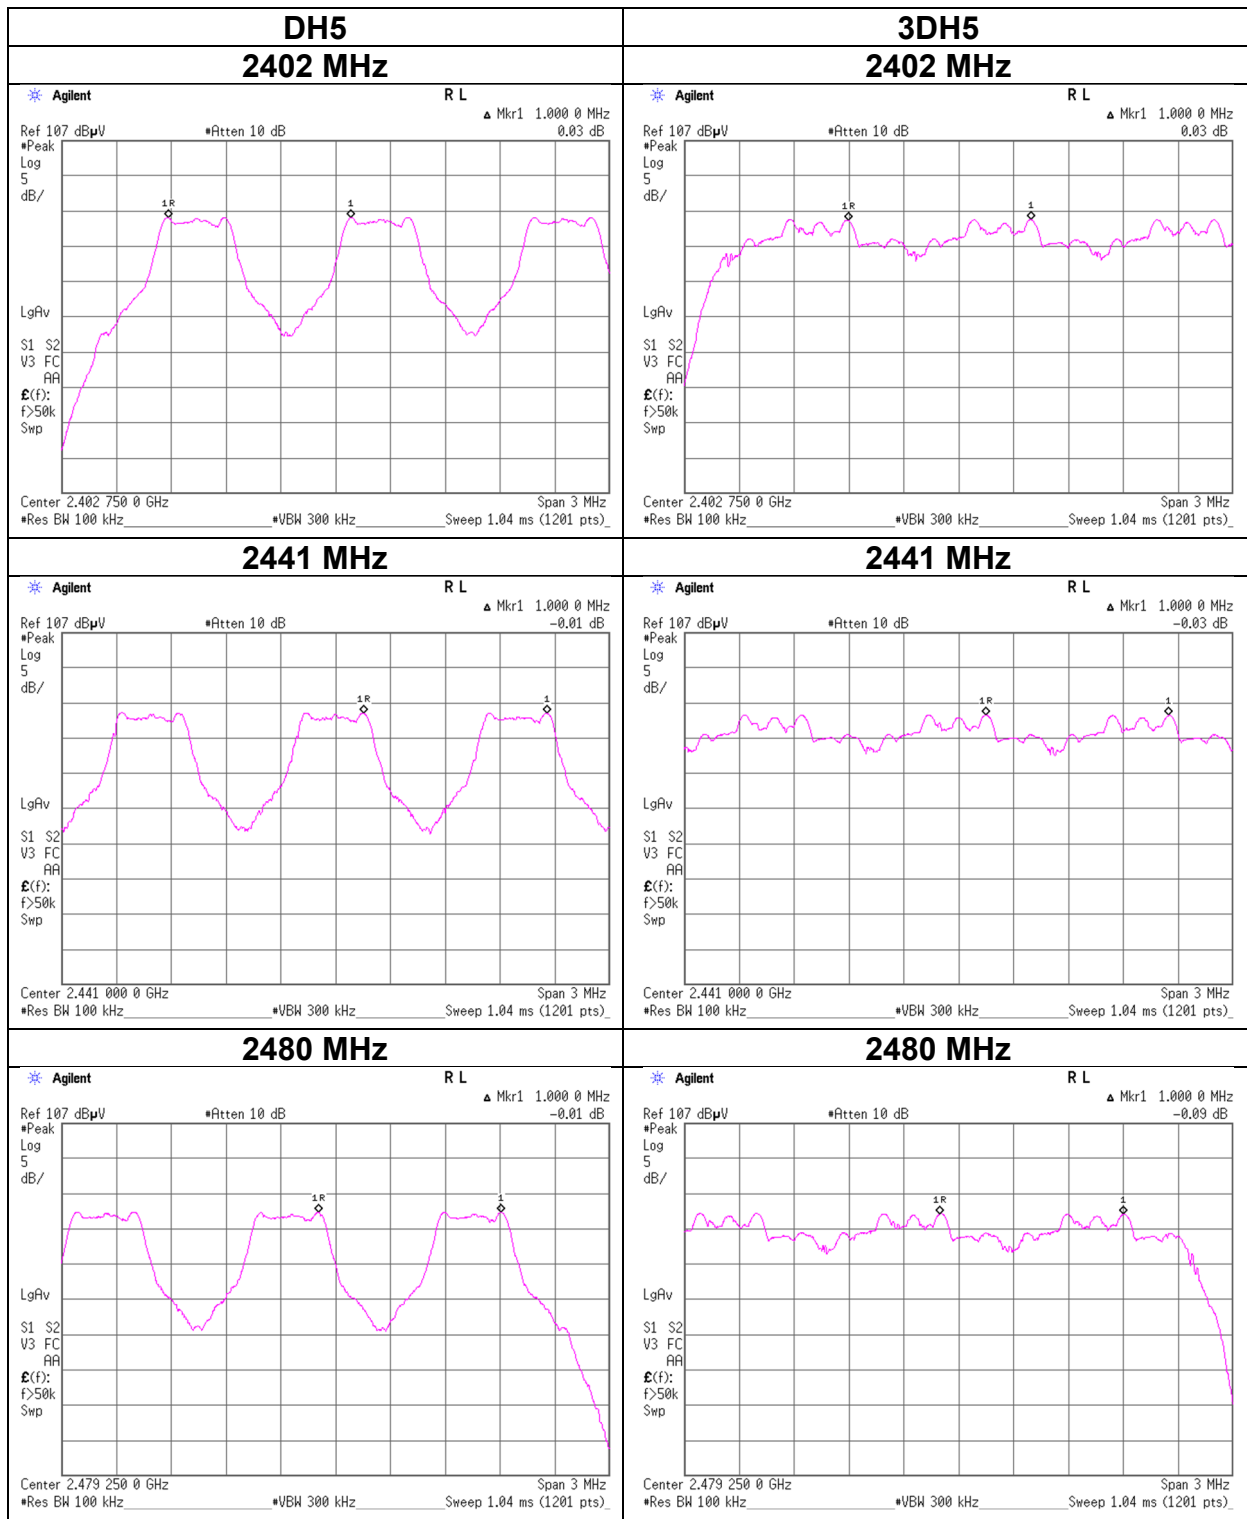


Number of Hopping Frequency

Test place Kashima EMC Lab. No.2 Measurement Room
Date April 4, 2024
Temperature / Humidity 23 deg. C / 47 % RH
Engineer Hiromitsu Tanabe
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	>= 15
3DH5	79	>= 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

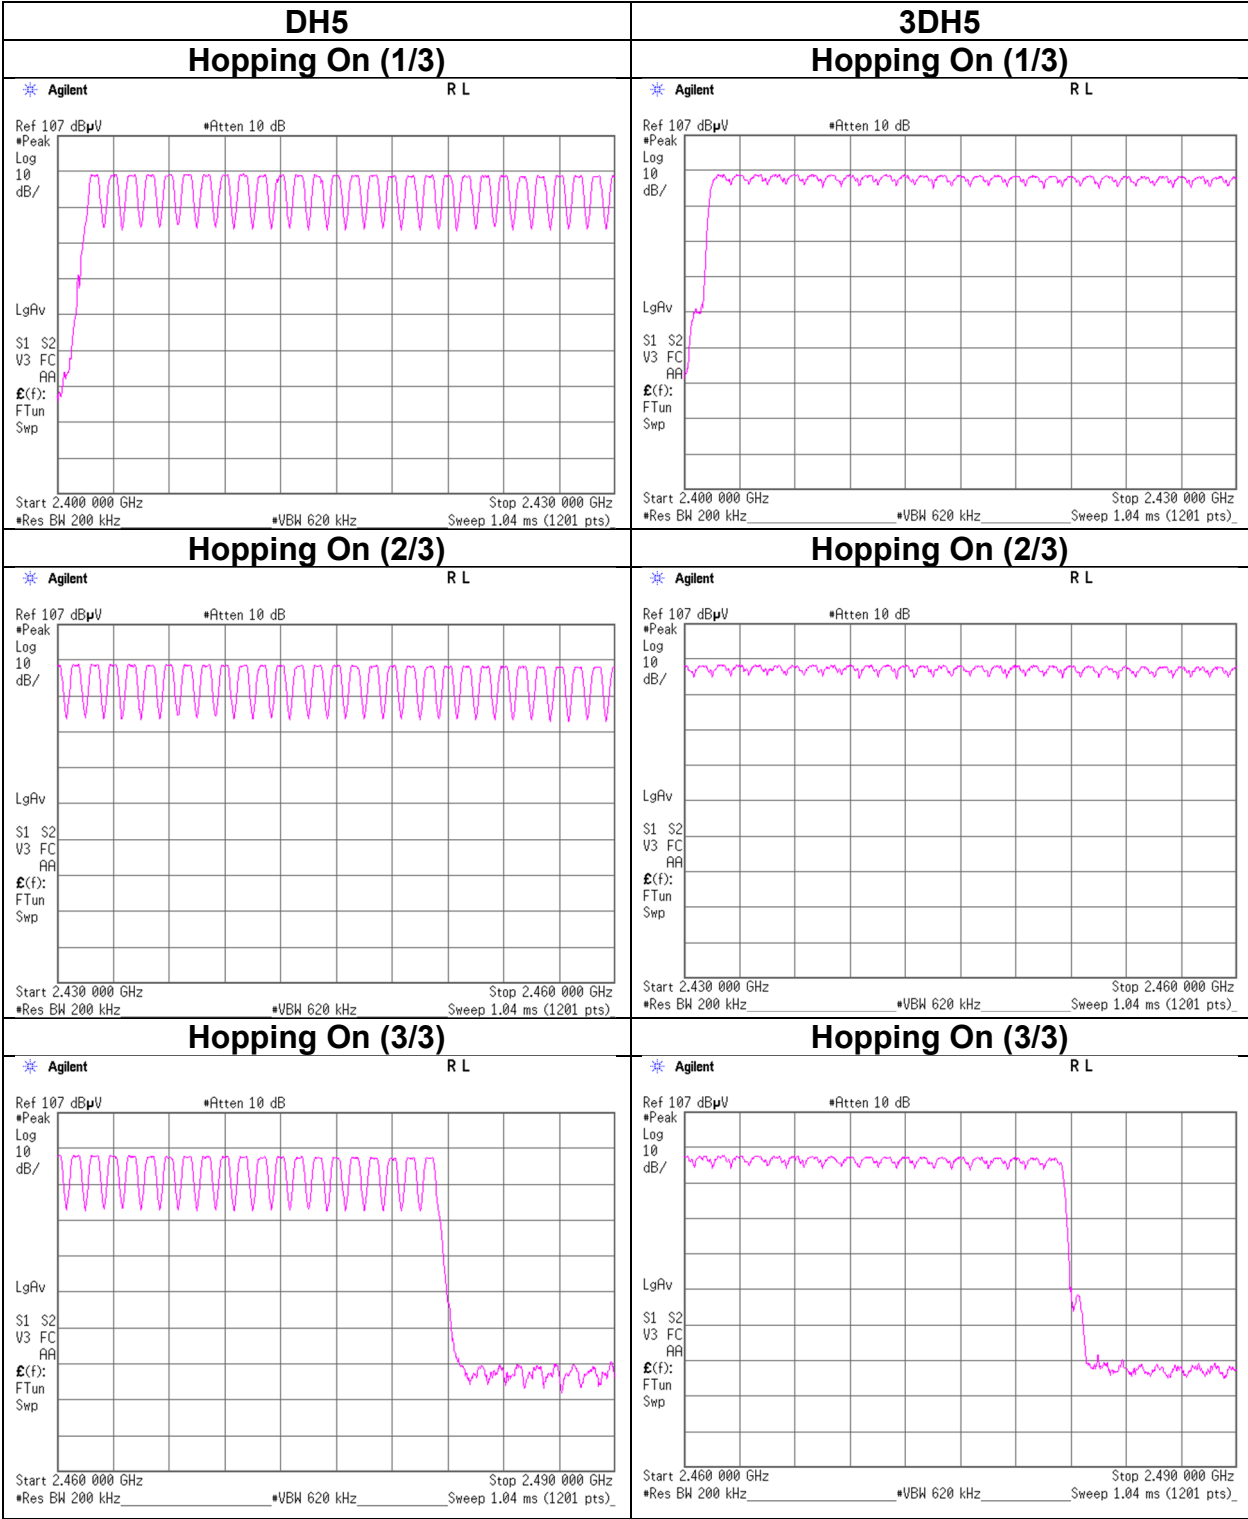

Dwell time

Test place	Kashima EMC Lab. No.2 Measurement Room
Date	April 4, 2024
Temperature / Humidity	23 deg. C / 47 % RH
Engineer	Hiromitsu Tanabe
Mode	Tx, Hopping On

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period	Length of transmission [ms]	Result [ms]	Limit [ms]
DH1	46.2 times / 5 s x 31.6 s = 292 times	0.421	123	400
DH3	25.0 times / 5 s x 31.6 s = 158 times	1.678	265	400
DH5	18.2 times / 5 s x 31.6 s = 116 times	2.928	340	400
3DH1	48.2 times / 5 s x 31.6 s = 305 times	0.425	130	400
3DH3	27.4 times / 5 s x 31.6 s = 174 times	1.678	292	400
3DH5	18.4 times / 5 s x 31.6 s = 117 times	2.929	343	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	45	47	47	45	47	46.2
DH3	26	24	23	26	26	25.0
DH5	16	19	19	18	19	18.2
3DH1	47	48	49	48	49	48.2
3DH3	27	28	27	26	29	27.4
3DH5	20	17	17	18	20	18.4

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4$ s, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than 0.4 s regardless of packet size. This is confirmed in the test report for $N = 79$.

Dwell time

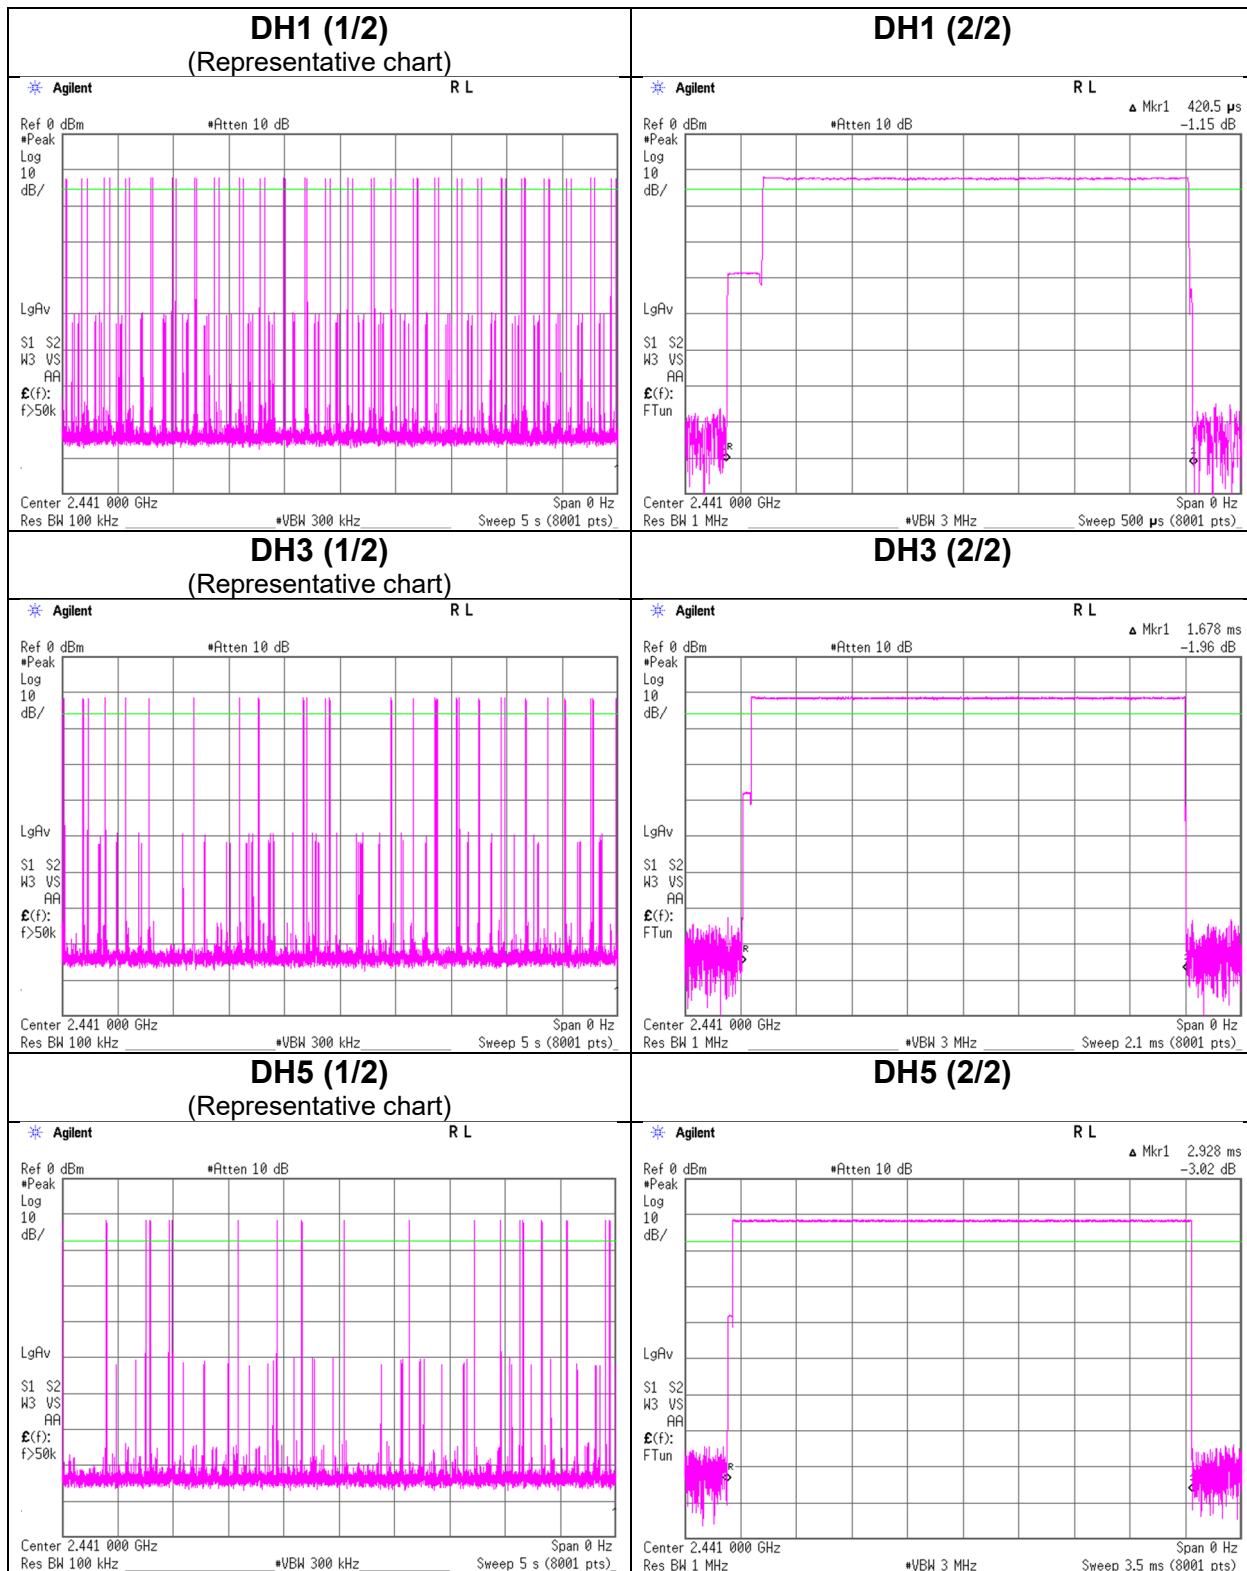

Dwell time

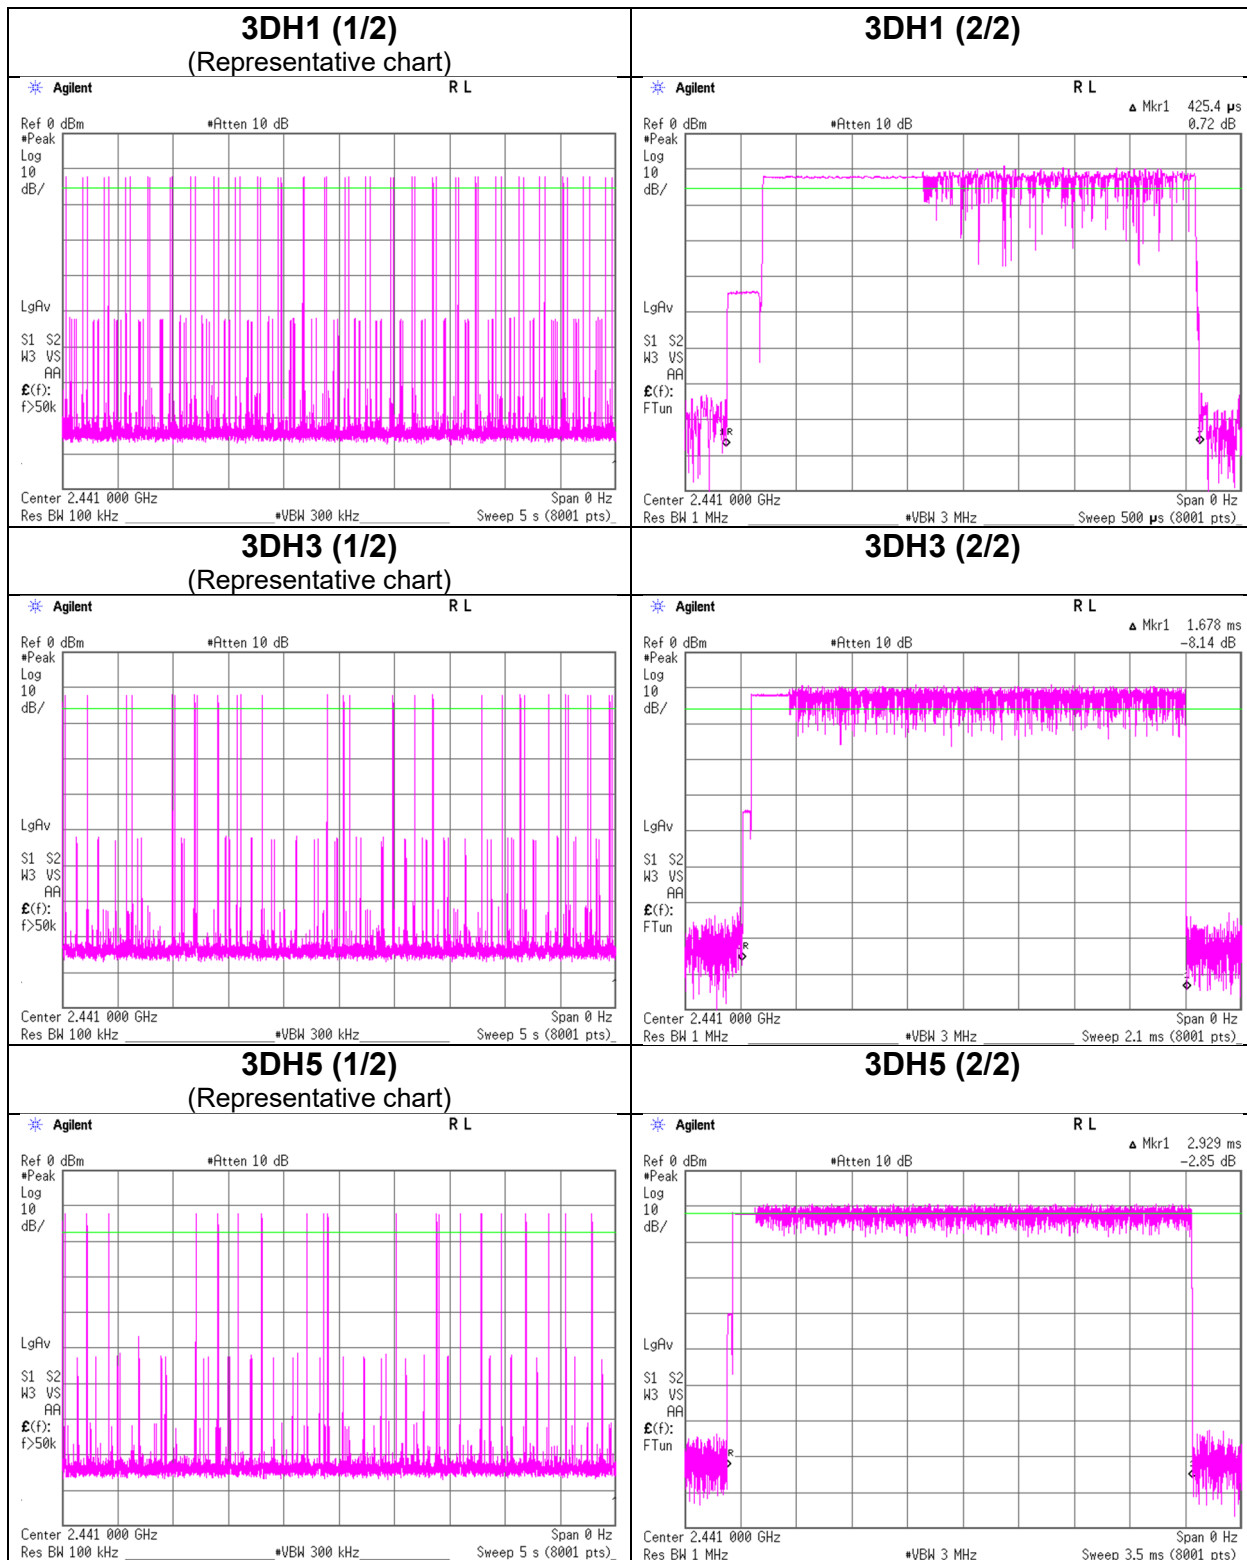

Maximum Peak Output Power

Test place Kashima EMC Lab. No.2 Measurement Room
Date April 2, 2024
Temperature / Humidity 22 deg. C / 40 % RH
Engineer Hiromitsu Tanabe
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin [dB]	Antenna Gain [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-10.97	2.10	9.73	0.86	1.22	20.96	125	20.10	-0.83	0.03	1.01	36.02	4000	35.99
DH5	2441.0	-11.23	2.11	9.73	0.61	1.15	20.96	125	20.35	-0.83	-0.22	0.95	36.02	4000	36.24
DH5	2480.0	-12.38	2.12	9.73	-0.53	0.89	20.96	125	21.49	-0.83	-1.36	0.73	36.02	4000	37.38
2DH5	2402.0	-8.66	2.10	9.73	3.17	2.07	20.96	125	17.79	-0.83	2.34	1.71	36.02	4000	33.68
2DH5	2441.0	-9.09	2.11	9.73	2.75	1.88	20.96	125	18.21	-0.83	1.92	1.56	36.02	4000	34.10
2DH5	2480.0	-10.38	2.12	9.73	1.47	1.40	20.96	125	19.49	-0.83	0.64	1.16	36.02	4000	35.38
3DH5	2402.0	-8.35	2.10	9.73	3.48	2.23	20.96	125	17.48	-0.83	2.65	1.84	36.02	4000	33.37
3DH5	2441.0	-8.75	2.11	9.73	3.09	2.04	20.96	125	17.87	-0.83	2.26	1.68	36.02	4000	33.76
3DH5	2480.0	-9.99	2.12	9.73	1.86	1.53	20.96	125	19.10	-0.83	1.03	1.27	36.02	4000	34.99

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Average Output Power
(Reference data for RF Exposure)

Test place Kashima EMC Lab. No.2 Measurement Room
Date April 2, 2024
Temperature / Humidity 22 deg. C / 40 % RH
Engineer Hiromitsu Tanabe
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-12.70	2.10	9.73	-0.87	0.82	1.08	0.21	1.05
DH5	2441.0	-13.08	2.11	9.73	-1.24	0.75	1.08	-0.16	0.96
DH5	2480.0	-14.27	2.12	9.73	-2.42	0.57	1.08	-1.34	0.73
2DH5	2402.0	-12.56	2.10	9.73	-0.73	0.85	1.07	0.34	1.08
2DH5	2441.0	-13.00	2.11	9.73	-1.16	0.77	1.07	-0.09	0.98
2DH5	2480.0	-14.34	2.12	9.73	-2.49	0.56	1.07	-1.42	0.72
3DH5	2402.0	-12.58	2.10	9.73	-0.75	0.84	1.07	0.32	1.08
3DH5	2441.0	-13.04	2.11	9.73	-1.20	0.76	1.07	-0.13	0.97
3DH5	2480.0	-14.29	2.12	9.73	-2.44	0.57	1.07	-1.37	0.73

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.


Burst Rate Confirmation

Test place Kashima EMC Lab. No.2 Measurement Room
Date April 2, 2024
Temperature / Humidity 22 deg. C / 40 % RH
Engineer Hiromitsu Tanabe
Mode Tx, Hopping Off


DH5

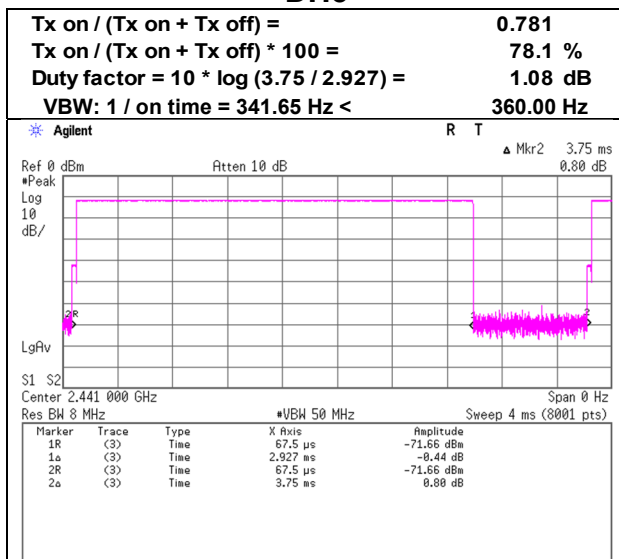

2DH5

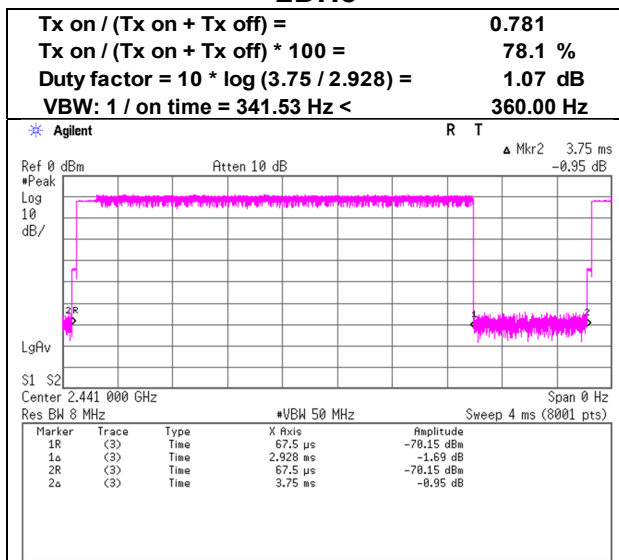

3DH5

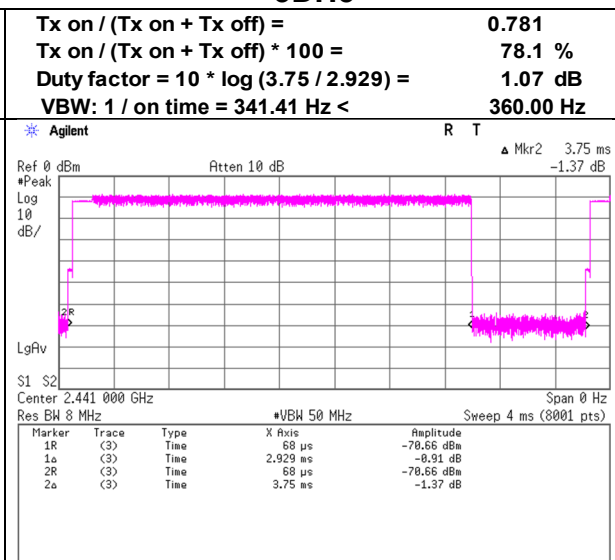

Radiated Spurious Emission

Test place	Kashima EMC Lab.		
Semi Anechoic Chamber	No.10	No.10	No.10
Date	April 9, 2024	April 11, 2024	April 10, 2024
Temperature / Humidity	20 deg. C / 55 % RH	21 deg. C / 54 % RH	19 deg. C / 57 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 10 GHz) Tx, Hopping Off, DH5 2402 MHz	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	1920.000	PK	57.02	26.97	12.95	43.69	3.23	56.48	73.9	17.4	269	179	
Hori.	2390.000	PK	49.72	27.60	13.33	43.66	3.23	50.22	73.9	23.6	249	194	
Hori.	4804.000	PK	51.05	32.53	5.41	45.10	3.23	47.12	73.9	26.7	150	0	Floor noise
Hori.	7206.000	PK	49.21	37.14	6.66	43.99	3.23	52.25	73.9	21.6	150	0	Floor noise
Hori.	9608.000	PK	47.57	38.01	7.46	41.93	3.23	54.34	73.9	19.5	150	0	Floor noise
Hori.	1920.000	AV	49.86	26.97	12.95	43.69	3.23	49.32	53.9	4.5	269	179	VBW:10 Hz
Hori.	2390.000	AV	37.59	27.60	13.33	43.66	3.23	38.09	53.9	15.8	249	194	VBW:360 Hz
Hori.	4804.000	AV	38.52	32.53	5.41	45.10	3.23	34.59	53.9	19.3	150	0	Floor noise
Hori.	7206.000	AV	37.14	37.14	6.66	43.99	3.23	40.18	53.9	13.7	150	0	Floor noise
Hori.	9608.000	AV	35.03	38.01	7.46	41.93	3.23	41.80	53.9	12.1	150	0	Floor noise
Vert.	1920.000	PK	55.60	26.97	12.95	43.69	3.23	55.06	73.9	18.8	275	180	
Vert.	2390.000	PK	49.71	27.60	13.33	43.66	3.23	50.21	73.9	23.6	131	33	
Vert.	4804.000	PK	50.97	32.53	5.41	45.10	3.23	47.04	73.9	26.8	150	0	Floor noise
Vert.	7206.000	PK	49.50	37.14	6.66	43.99	3.23	52.54	73.9	21.3	150	0	Floor noise
Vert.	9608.000	PK	47.05	38.01	7.46	41.93	3.23	53.82	73.9	20.0	150	0	Floor noise
Vert.	1920.000	AV	46.45	26.97	12.95	43.69	3.23	45.91	53.9	7.9	275	180	VBW:10 Hz
Vert.	2390.000	AV	37.47	27.60	13.33	43.66	3.23	37.97	53.9	15.9	131	33	VBW:360 Hz
Vert.	4804.000	AV	38.55	32.53	5.41	45.10	3.23	34.62	53.9	19.2	150	0	Floor noise
Vert.	7206.000	AV	37.16	37.14	6.66	43.99	3.23	40.20	53.9	13.7	150	0	Floor noise
Vert.	9608.000	AV	34.97	38.01	7.46	41.93	3.23	41.74	53.9	12.1	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.35 m / 3.0 m) = 3.23 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	96.23	27.60	13.34	43.65	3.23	96.75	-	-	Carrier
Hori.	2400.000	PK	42.81	27.60	13.34	43.65	3.23	43.33	76.75	33.4	-
Vert.	2402.000	PK	93.94	27.60	13.34	43.65	3.23	94.46	-	-	Carrier
Vert.	2400.000	PK	41.34	27.60	13.34	43.65	3.23	41.86	74.46	32.6	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.35 m / 3.0 m) = 3.23 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**Radiated Spurious Emission
(Reference Plot for band-edge)**

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 9, 2024
Temperature / Humidity	20 deg. C / 55 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

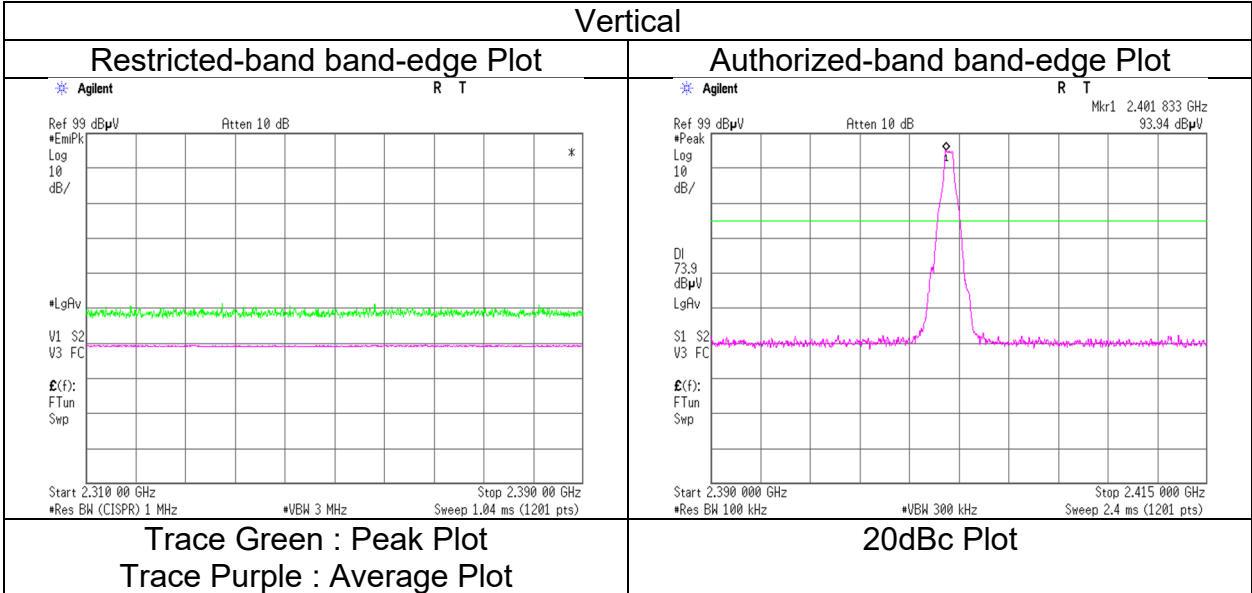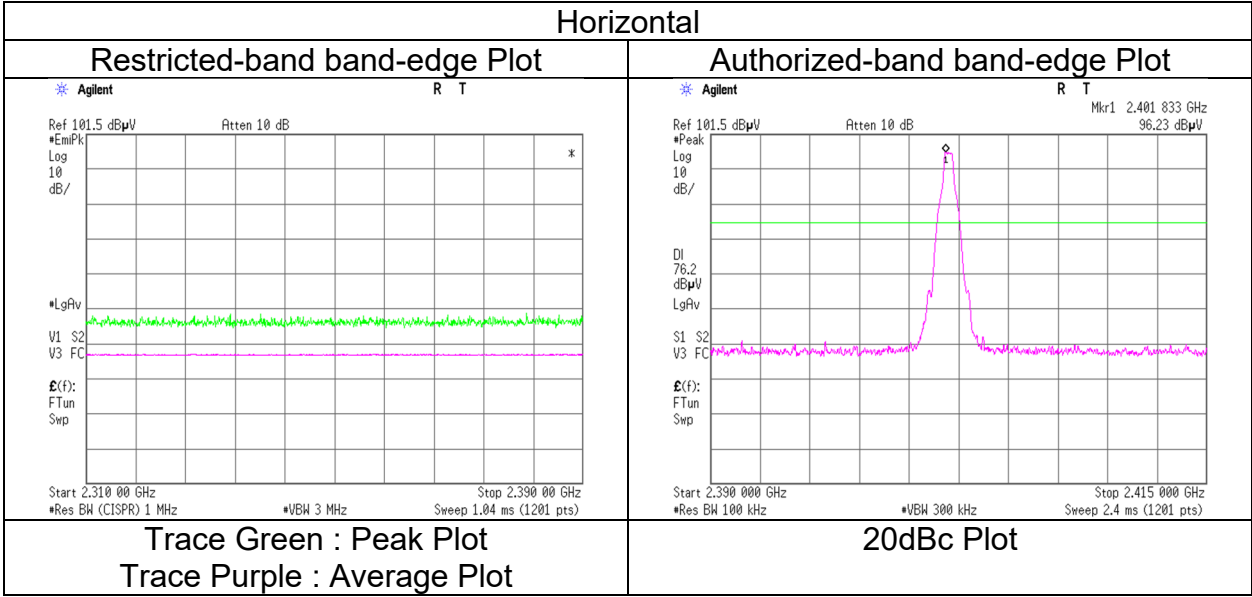

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Kashima EMC Lab.		
Semi Anechoic Chamber	No.10	No.10	No.10
Date	April 9, 2024	April 11, 2024	April 10, 2024
Temperature / Humidity	20 deg. C / 55 % RH	21 deg. C / 54 % RH	19 deg. C / 57 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
	(1 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	1920.000	PK	56.93	26.97	12.95	43.69	3.23	56.39	73.9	17.5	270	178	
Hori.	4882.000	PK	51.27	32.55	5.46	45.15	3.23	47.36	73.9	26.5	150	0	Floor noise
Hori.	7323.000	PK	49.32	37.38	6.69	43.71	3.23	52.91	73.9	20.9	150	0	Floor noise
Hori.	9764.000	PK	48.04	37.92	7.52	41.76	3.23	54.95	73.9	18.9	150	0	Floor noise
Hori.	1920.000	AV	49.77	26.97	12.95	43.69	3.23	49.23	53.9	4.6	270	178	VBW:10 Hz
Hori.	4882.000	AV	38.63	32.55	5.46	45.15	3.23	34.72	53.9	19.1	150	0	Floor noise
Hori.	7323.000	AV	36.60	37.38	6.69	43.71	3.23	40.19	53.9	13.7	150	0	Floor noise
Hori.	9764.000	AV	35.56	37.92	7.52	41.76	3.23	42.47	53.9	11.4	150	0	Floor noise
Vert.	1920.000	PK	55.45	26.97	12.95	43.69	3.23	54.91	73.9	18.9	277	179	
Vert.	4882.000	PK	50.45	32.55	5.46	45.15	3.23	46.54	73.9	27.3	150	0	Floor noise
Vert.	7323.000	PK	48.95	37.38	6.69	43.71	3.23	52.54	73.9	21.3	150	0	Floor noise
Vert.	9764.000	PK	47.77	37.92	7.52	41.76	3.23	54.68	73.9	19.2	150	0	Floor noise
Vert.	1920.000	AV	46.33	26.97	12.95	43.69	3.23	45.79	53.9	8.1	277	179	VBW:10 Hz
Vert.	4882.000	AV	38.46	32.55	5.46	45.15	3.23	34.55	53.9	19.3	150	0	Floor noise
Vert.	7323.000	AV	36.47	37.38	6.69	43.71	3.23	40.06	53.9	13.8	150	0	Floor noise
Vert.	9764.000	AV	35.44	37.92	7.52	41.76	3.23	42.35	53.9	11.5	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(4.35\text{ m} / 3.0\text{ m}) = 3.23\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Test place	Kashima EMC Lab.		
Semi Anechoic Chamber	No.10	No.10	No.10
Date	April 9, 2024	April 11, 2024	April 10, 2024
Temperature / Humidity	20 deg. C / 55 % RH	21 deg. C / 54 % RH	19 deg. C / 57 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
	(1 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	1920.000	PK	57.04	26.97	12.95	43.69	3.23	56.50	73.9	17.4	277	179	
Hori.	2483.500	PK	49.77	27.86	13.39	43.62	3.23	50.63	73.9	23.2	158	70	
Hori.	4960.000	PK	50.47	32.64	5.51	45.20	3.23	46.65	73.9	27.2	150	0	Floor noise
Hori.	7440.000	PK	49.18	37.41	6.73	43.45	3.23	53.10	73.9	20.8	150	0	Floor noise
Hori.	9920.000	PK	48.34	38.11	7.61	41.76	3.23	55.53	73.9	18.3	150	0	Floor noise
Hori.	1920.000	AV	49.61	26.97	12.95	43.69	3.23	49.07	53.9	4.8	277	179	VBW:10 Hz
Hori.	2483.500	AV	37.69	27.86	13.39	43.62	3.23	38.55	53.9	15.3	158	70	VBW:360 Hz
Hori.	4960.000	AV	38.56	32.64	5.51	45.20	3.23	34.74	53.9	19.1	150	0	Floor noise
Hori.	7440.000	AV	36.77	37.41	6.73	43.45	3.23	40.69	53.9	13.2	150	0	Floor noise
Hori.	9920.000	AV	35.52	38.11	7.61	41.76	3.23	42.71	53.9	11.1	150	0	Floor noise
Vert.	1920.000	PK	55.67	26.97	12.95	43.69	3.23	55.13	73.9	18.7	226	0	
Vert.	2483.500	PK	50.35	27.86	13.39	43.62	3.23	51.21	73.9	22.6	180	30	
Vert.	4960.000	PK	51.11	32.64	5.51	45.20	3.23	47.29	73.9	26.6	150	0	Floor noise
Vert.	7440.000	PK	49.34	37.41	6.73	43.45	3.23	53.26	73.9	20.6	150	0	Floor noise
Vert.	9920.000	PK	47.15	38.11	7.61	41.76	3.23	54.34	73.9	19.5	150	0	Floor noise
Vert.	1920.000	AV	47.28	26.97	12.95	43.69	3.23	46.74	53.9	7.1	226	0	VBW:10 Hz
Vert.	2483.500	AV	37.62	27.86	13.39	43.62	3.23	38.48	53.9	15.4	180	30	VBW:360 Hz
Vert.	4960.000	AV	38.46	32.64	5.51	45.20	3.23	34.64	53.9	19.2	150	0	Floor noise
Vert.	7440.000	AV	36.49	37.41	6.73	43.45	3.23	40.41	53.9	13.4	150	0	Floor noise
Vert.	9920.000	AV	35.32	38.11	7.61	41.76	3.23	42.51	53.9	11.3	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(4.35\text{ m} / 3.0\text{ m}) = 3.23\text{ dB}$



10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

**Radiated Spurious Emission
 (Reference Plot for band-edge)**

Test place
 Semi Anechoic Chamber
 Date
 Temperature / Humidity
 Engineer
 Mode

Kashima EMC Lab.
 No.10
 April 9, 2024
 20 deg. C / 55 % RH
 Hiromitsu Tanabe
 (1 GHz to 10 GHz)
 Tx, Hopping Off, DH5 2480 MHz

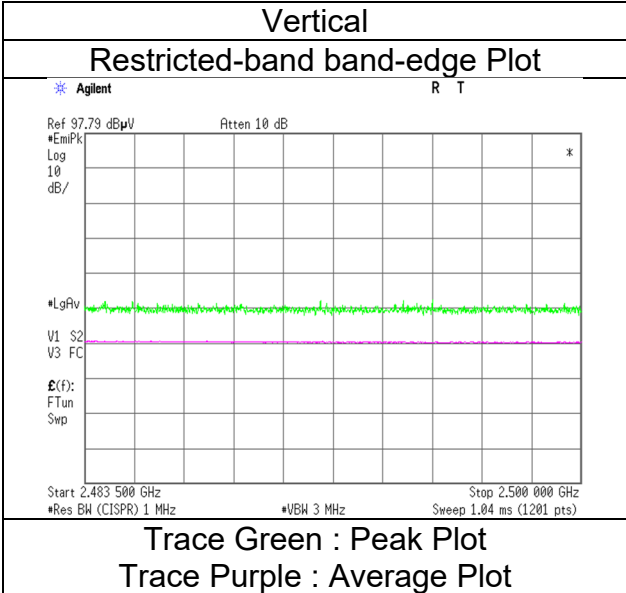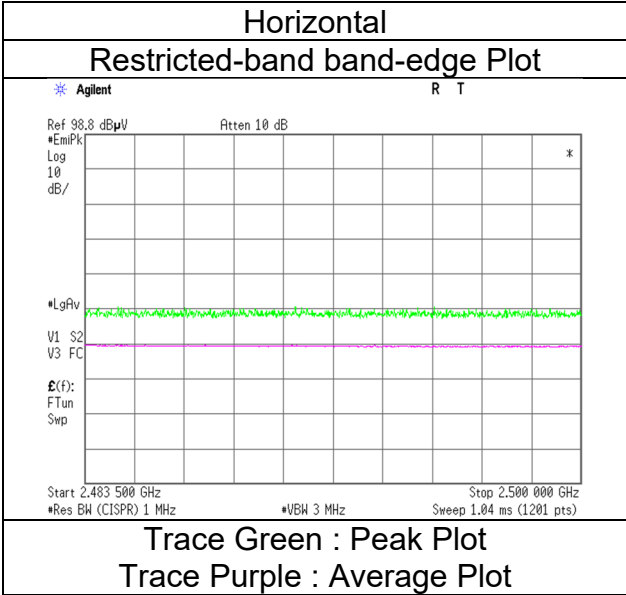

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
 Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 12, 2024	April 9, 2024	April 11, 2024	April 10, 2024
Temperature / Humidity	21 deg. C / 51 % RH	20 deg. C / 55 % RH	21 deg. C / 54 % RH	19 deg. C / 57 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	Tx, Hopping Off, 3DH5 2402 MHz			

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	248.828	QP	50.90	11.73	7.81	31.05	0.00	39.39	46.0	6.6	115	257	
Hori.	254.966	QP	51.40	11.90	7.85	31.05	0.00	40.10	46.0	5.9	100	247	
Hori.	331.197	QP	44.20	14.24	8.35	31.00	0.00	35.79	46.0	10.2	100	52	
Hori.	960.000	QP	34.20	24.05	11.16	30.46	0.00	38.95	46.0	7.0	100	72	
Hori.	1920.000	PK	57.72	26.97	12.95	43.69	3.23	57.18	73.9	16.7	274	178	
Hori.	2390.000	PK	51.91	27.60	13.33	43.66	3.23	52.41	73.9	21.4	219	190	
Hori.	4804.000	PK	50.47	32.53	5.41	45.10	3.23	46.54	73.9	27.3	150	0	Floor noise
Hori.	7206.000	PK	50.96	37.14	6.66	43.99	3.23	54.00	73.9	19.9	150	0	Floor noise
Hori.	9608.000	PK	46.91	38.01	7.46	41.93	3.23	53.68	73.9	20.2	150	0	Floor noise
Hori.	1920.000	AV	50.76	26.97	12.95	43.69	3.23	50.22	53.9	3.6	274	178	VBW:10 Hz
Hori.	2390.000	AV	37.74	27.60	13.33	43.66	3.23	38.24	53.9	15.6	219	190	VBW:360 Hz
Hori.	4804.000	AV	38.47	32.53	5.41	45.10	3.23	34.54	53.9	19.3	150	0	Floor noise
Hori.	7206.000	AV	37.11	37.14	6.66	43.99	3.23	40.15	53.9	13.7	150	0	Floor noise
Hori.	9608.000	AV	34.96	38.01	7.46	41.93	3.23	41.73	53.9	12.1	150	0	Floor noise
Vert.	147.463	QP	42.20	13.31	7.06	31.13	0.00	31.44	43.5	12.0	100	110	
Vert.	248.828	QP	49.50	11.73	7.81	31.05	0.00	37.99	46.0	8.0	185	170	
Vert.	254.941	QP	48.50	11.90	7.85	31.05	0.00	37.20	46.0	8.8	100	186	
Vert.	431.520	QP	40.00	16.60	8.91	30.92	0.00	34.59	46.0	11.4	154	198	
Vert.	554.810	QP	36.40	18.59	9.52	30.82	0.00	33.69	46.0	12.3	100	8	
Vert.	960.000	QP	39.00	24.05	11.16	30.46	0.00	43.75	46.0	2.2	100	165	
Vert.	1920.000	PK	56.21	26.97	12.95	43.69	3.23	55.67	73.9	18.2	228	0	
Vert.	2390.000	PK	51.49	27.60	13.33	43.66	3.23	51.99	73.9	21.9	127	30	
Vert.	4804.000	PK	50.37	32.53	5.41	45.10	3.23	46.44	73.9	27.4	150	0	Floor noise
Vert.	7206.000	PK	49.44	37.14	6.66	43.99	3.23	52.48	73.9	21.4	150	0	Floor noise
Vert.	9608.000	PK	46.96	38.01	7.46	41.93	3.23	53.73	73.9	20.1	150	0	Floor noise
Vert.	1920.000	AV	47.78	26.97	12.95	43.69	3.23	47.24	53.9	6.6	228	0	VBW:10 Hz
Vert.	2390.000	AV	37.69	27.60	13.33	43.66	3.23	38.19	53.9	15.7	127	30	VBW:360 Hz
Vert.	4804.000	AV	38.54	32.53	5.41	45.10	3.23	34.61	53.9	19.2	150	0	Floor noise
Vert.	7206.000	AV	37.08	37.14	6.66	43.99	3.23	40.12	53.9	13.7	150	0	Floor noise
Vert.	9608.000	AV	34.91	38.01	7.46	41.93	3.23	41.68	53.9	12.2	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.35 m / 3.0 m) = 3.23 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	96.25	27.60	13.34	43.65	3.23	96.77	-	-	Carrier
Hori.	2400.000	PK	43.13	27.60	13.34	43.65	3.23	43.65	76.8	33.1	-
Vert.	2402.000	PK	94.35	27.60	13.34	43.65	3.23	94.87	-	-	Carrier
Vert.	2400.000	PK	42.62	27.60	13.34	43.65	3.23	43.14	74.9	31.7	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.35 m / 3.0 m) = 3.23 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**Radiated Spurious Emission
 (Reference Plot for band-edge)**

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 9, 2024
Temperature / Humidity	20 deg. C / 55 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

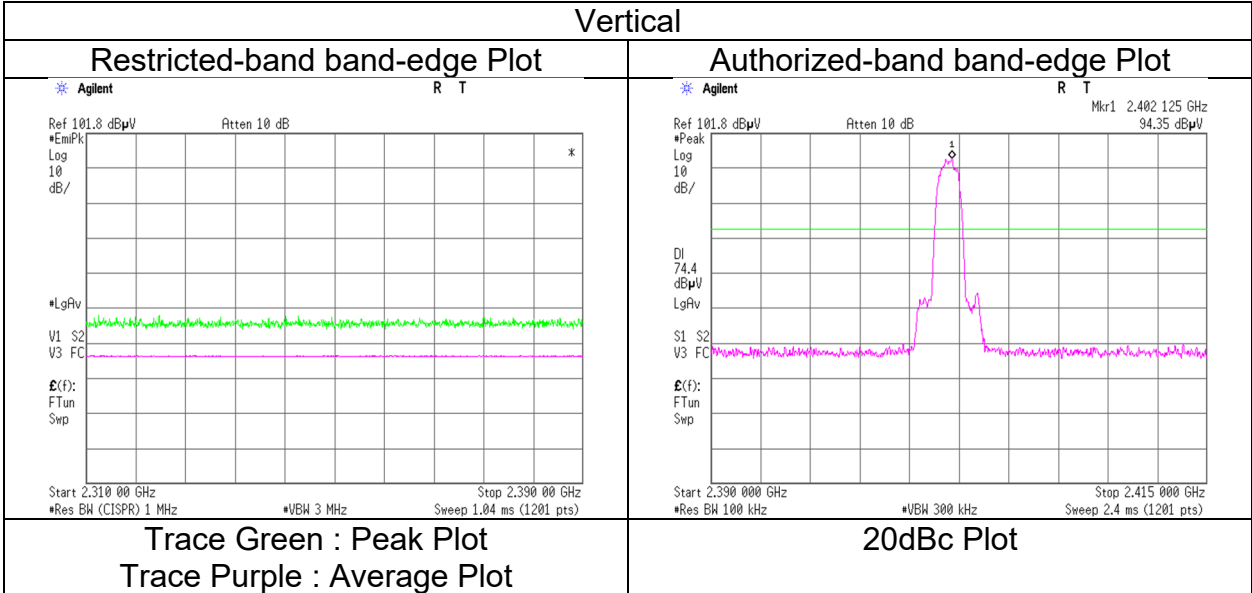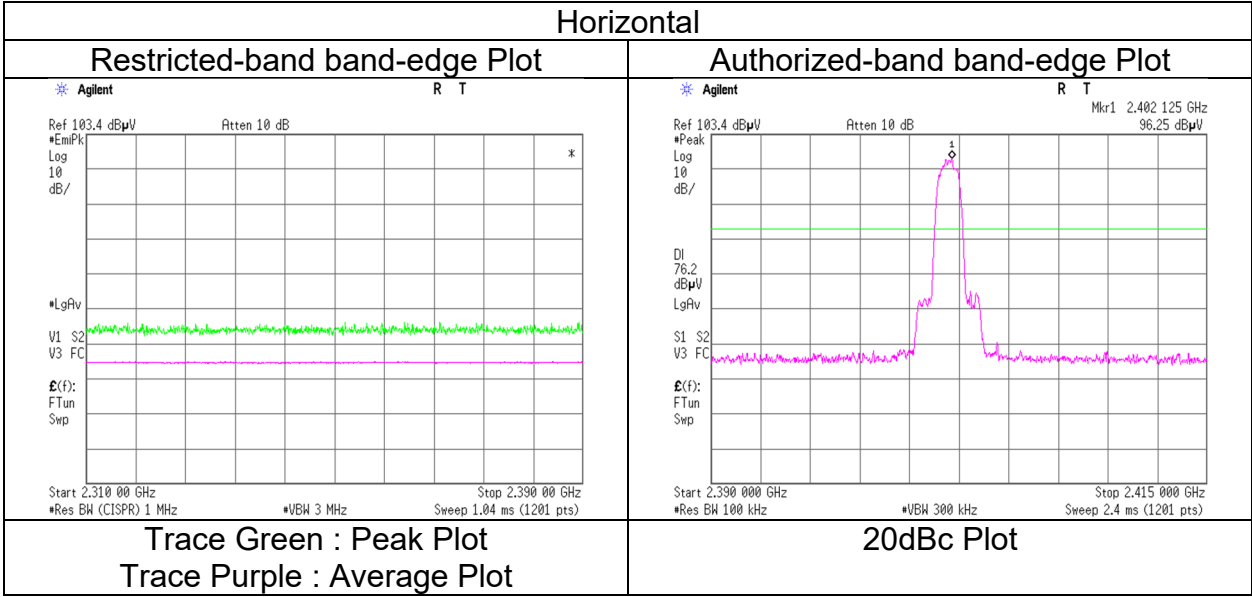

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
 Final result of restricted band edge and authorized band edge were shown in tabular data.

Radiated Spurious Emission

Test place	Kashima EMC Lab.		
Semi Anechoic Chamber	No.10	No.10	No.10
Date	April 9, 2024	April 11, 2024	April 10, 2024
Temperature / Humidity	20 deg. C / 55 % RH	21 deg. C / 54 % RH	19 deg. C / 57 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
	(1 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	1920.000	PK	57.41	26.97	12.95	43.69	3.23	56.87	73.9	17.0	269	179	
Hori.	4882.000	PK	50.11	32.55	5.46	45.15	3.23	46.20	73.9	27.7	150	0	Floor noise
Hori.	7323.000	PK	49.27	37.38	6.69	43.71	3.23	52.86	73.9	21.0	150	0	Floor noise
Hori.	9764.000	PK	47.42	37.92	7.52	41.76	3.23	54.33	73.9	19.5	150	0	Floor noise
Hori.	1920.000	AV	50.47	26.97	12.95	43.69	3.23	49.93	53.9	3.9	269	179	VBW:10 Hz
Hori.	4882.000	AV	38.55	32.55	5.46	45.15	3.23	34.64	53.9	19.2	150	0	Floor noise
Hori.	7323.000	AV	36.39	37.38	6.69	43.71	3.23	39.98	53.9	13.9	150	0	Floor noise
Hori.	9764.000	AV	35.46	37.92	7.52	41.76	3.23	42.37	53.9	11.5	150	0	Floor noise
Vert.	1920.000	PK	55.45	26.97	12.95	43.69	3.23	54.91	73.9	18.9	224	0	
Vert.	4882.000	PK	50.49	32.55	5.46	45.15	3.23	46.58	73.9	27.3	150	0	Floor noise
Vert.	7323.000	PK	48.77	37.38	6.69	43.71	3.23	52.36	73.9	21.5	150	0	Floor noise
Vert.	9764.000	PK	47.69	37.92	7.52	41.76	3.23	54.60	73.9	19.3	150	0	Floor noise
Vert.	1920.000	AV	47.11	26.97	12.95	43.69	3.23	46.57	53.9	7.3	224	0	VBW:10 Hz
Vert.	4882.000	AV	38.39	32.55	5.46	45.15	3.23	34.48	53.9	19.4	150	0	Floor noise
Vert.	7323.000	AV	36.33	37.38	6.69	43.71	3.23	39.92	53.9	13.9	150	0	Floor noise
Vert.	9764.000	AV	36.02	37.92	7.52	41.76	3.23	42.93	53.9	10.9	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(4.35\text{ m} / 3.0\text{ m}) = 3.23\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Test place	Kashima EMC Lab.		
Semi Anechoic Chamber	No.10	No.10	No.10
Date	April 9, 2024	April 11, 2024	April 10, 2024
Temperature / Humidity	20 deg. C / 55 % RH	21 deg. C / 54 % RH	19 deg. C / 57 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
	(1 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	1920.000	PK	57.41	26.97	12.95	43.69	3.23	56.87	73.9	17.0	268	179	
Hori.	2483.500	PK	52.16	27.86	13.39	43.62	3.23	53.02	73.9	20.8	142	67	
Hori.	4960.000	PK	50.99	32.64	5.51	45.20	3.23	47.17	73.9	26.7	150	0	Floor noise
Hori.	7440.000	PK	48.86	37.41	6.73	43.45	3.23	52.78	73.9	21.1	150	0	Floor noise
Hori.	9920.000	PK	47.77	38.11	7.61	41.76	3.23	54.96	73.9	18.9	150	0	Floor noise
Hori.	1920.000	AV	50.36	26.97	12.95	43.69	3.23	49.82	53.9	4.0	268	179	VBW:10 Hz
Hori.	2483.500	AV	38.11	27.86	13.39	43.62	3.23	38.97	53.9	14.9	142	67	VBW:360 Hz
Hori.	4960.000	AV	38.44	32.64	5.51	45.20	3.23	34.62	53.9	19.2	150	0	Floor noise
Hori.	7440.000	AV	36.67	37.41	6.73	43.45	3.23	40.59	53.9	13.3	150	0	Floor noise
Hori.	9920.000	AV	35.12	38.11	7.61	41.76	3.23	42.31	53.9	11.5	150	0	Floor noise
Vert.	1920.000	PK	55.45	26.97	12.95	43.69	3.23	54.91	73.9	18.9	222	0	
Vert.	2483.500	PK	50.94	27.86	13.39	43.62	3.23	51.80	73.9	22.1	180	27	
Vert.	4960.000	PK	52.08	32.64	5.51	45.20	3.23	48.26	73.9	25.6	150	0	Floor noise
Vert.	7440.000	PK	48.67	37.41	6.73	43.45	3.23	52.59	73.9	21.3	150	0	Floor noise
Vert.	9920.000	PK	46.69	38.11	7.61	41.76	3.23	53.88	73.9	20.0	150	0	Floor noise
Vert.	1920.000	AV	47.21	26.97	12.95	43.69	3.23	46.67	53.9	7.2	222	0	VBW:10 Hz
Vert.	2483.500	AV	37.85	27.86	13.39	43.62	3.23	38.71	53.9	15.1	180	27	VBW:360 Hz
Vert.	4960.000	AV	38.37	32.64	5.51	45.20	3.23	34.55	53.9	19.3	150	0	Floor noise
Vert.	7440.000	AV	36.71	37.41	6.73	43.45	3.23	40.63	53.9	13.2	150	0	Floor noise
Vert.	9920.000	AV	35.14	38.11	7.61	41.76	3.23	42.33	53.9	11.5	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(4.35\text{ m} / 3.0\text{ m}) = 3.23\text{ dB}$



10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

**Radiated Spurious Emission
 (Reference Plot for band-edge)**

Test place
 Semi Anechoic Chamber
 Date
 Temperature / Humidity
 Engineer
 Mode


Kashima EMC Lab.
 No.10
 April 9, 2024
 20 deg. C / 55 % RH
 Hiromitsu Tanabe
 (1 GHz to 10 GHz)
 Tx, Hopping Off, 3DH5 2480 MHz

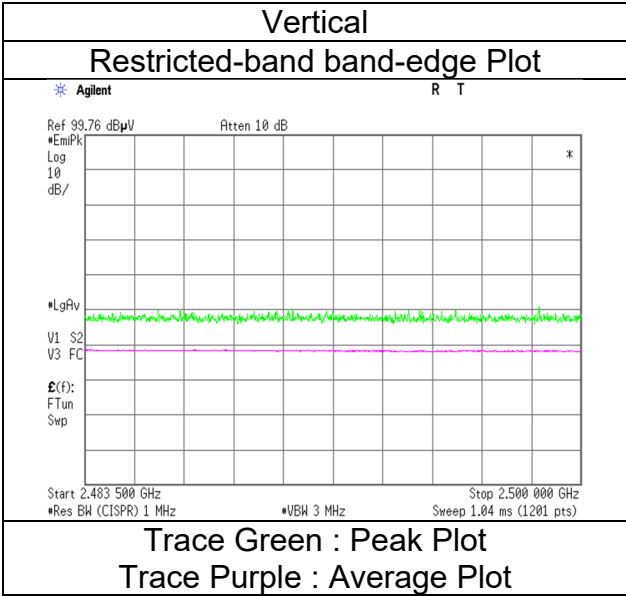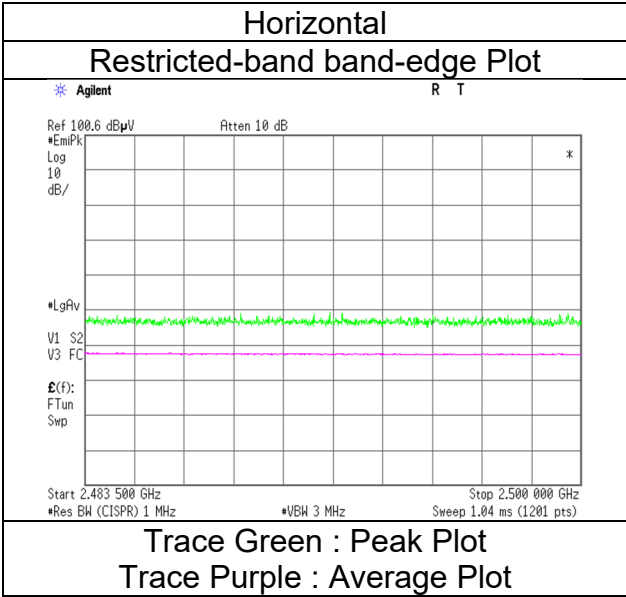

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
 Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 12, 2024	April 9, 2024	April 11, 2024	April 10, 2024
Temperature / Humidity	21 deg. C / 51 % RH	20 deg. C / 55 % RH	21 deg. C / 54 % RH	19 deg. C / 57 % RH
Engineer	Hirimitsu Tanabe	Hirimitsu Tanabe	Hirimitsu Tanabe	Hirimitsu Tanabe
Mode	(30 GHz to 1 GHz) Tx, Hopping Off, 3DH5 2402 MHz	(1 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)


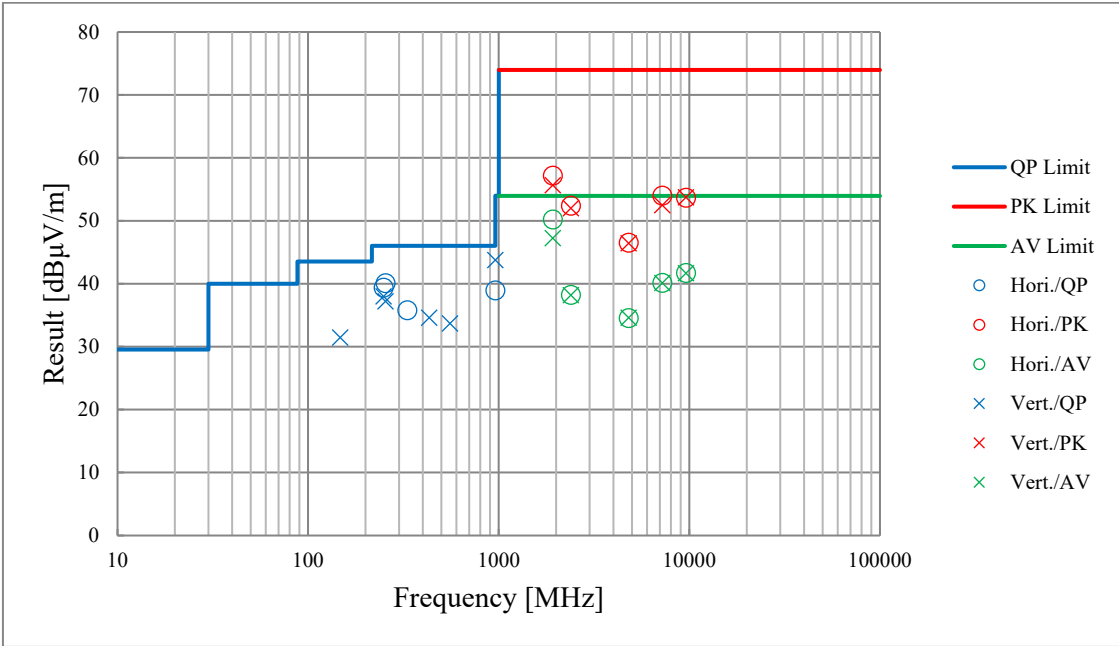


*These plots data contain sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place Kashima EMC Lab. No.2 Measurement Room
 Date April 4, 2024
 Temperature / Humidity 23 deg. C / 47 % RH
 Engineer Hiromitsu Tanabe
 Mode Tx, Hopping Off, DH5



2402 MHz

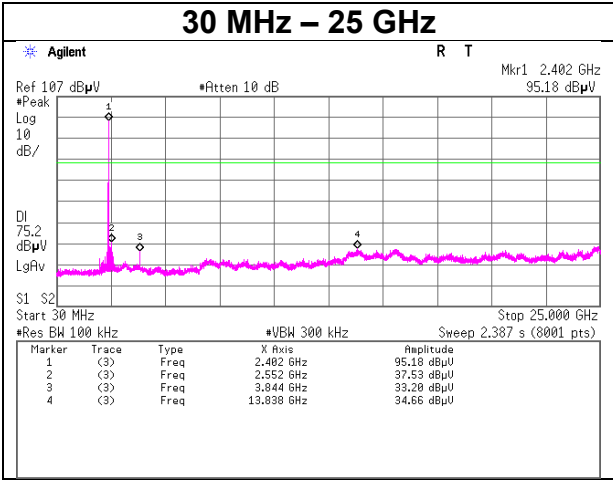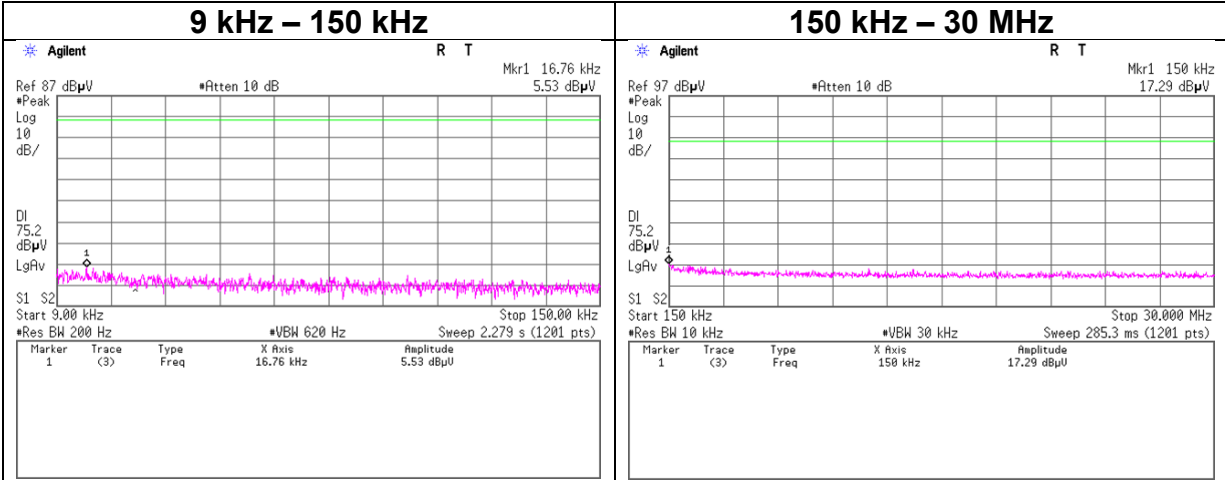

Conducted Spurious Emission

Test place Kashima EMC Lab. No.2 Measurement Room
 Date April 4, 2024
 Temperature / Humidity 23 deg. C / 47 % RH
 Engineer Hiromitsu Tanabe
 Mode Tx, Hopping Off, DH5



2441 MHz

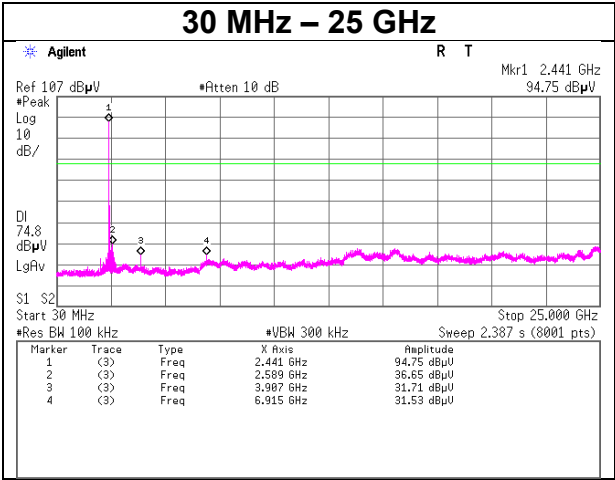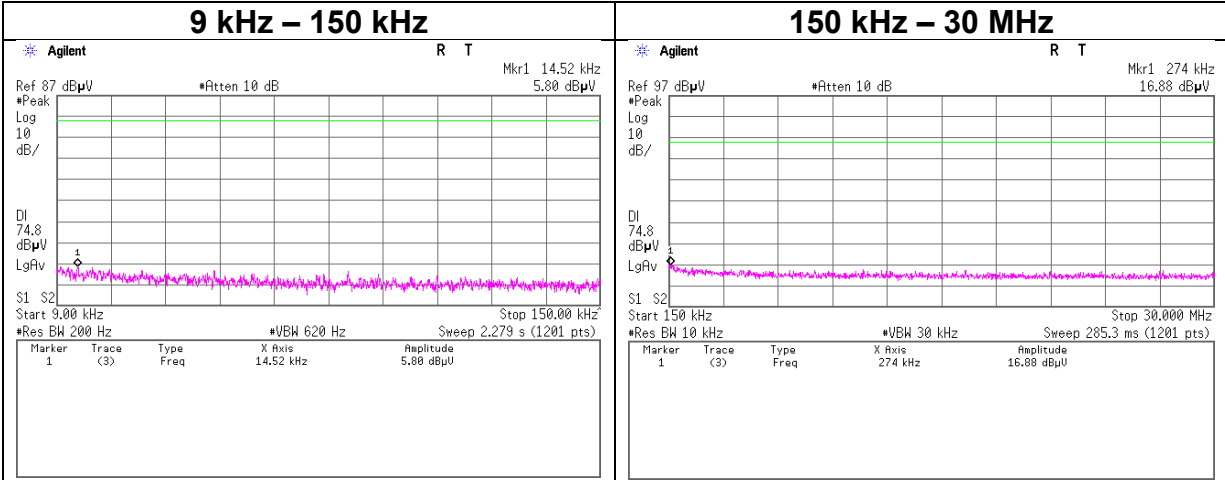

Conducted Spurious Emission

Test place Kashima EMC Lab. No.2 Measurement Room
 Date April 4, 2024
 Temperature / Humidity 23 deg. C / 47 % RH
 Engineer Hiromitsu Tanabe
 Mode Tx, Hopping Off, DH5



2480 MHz

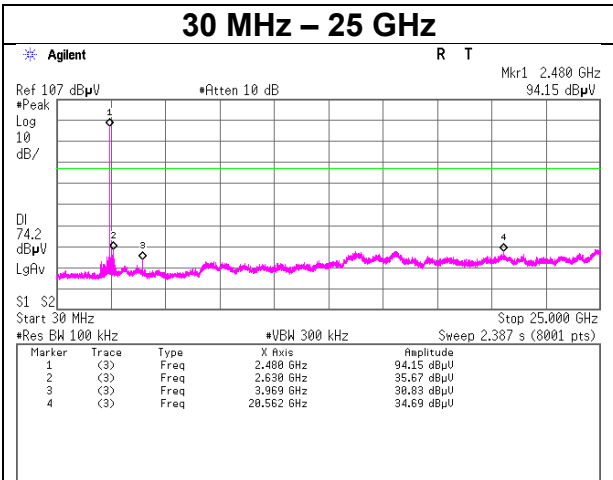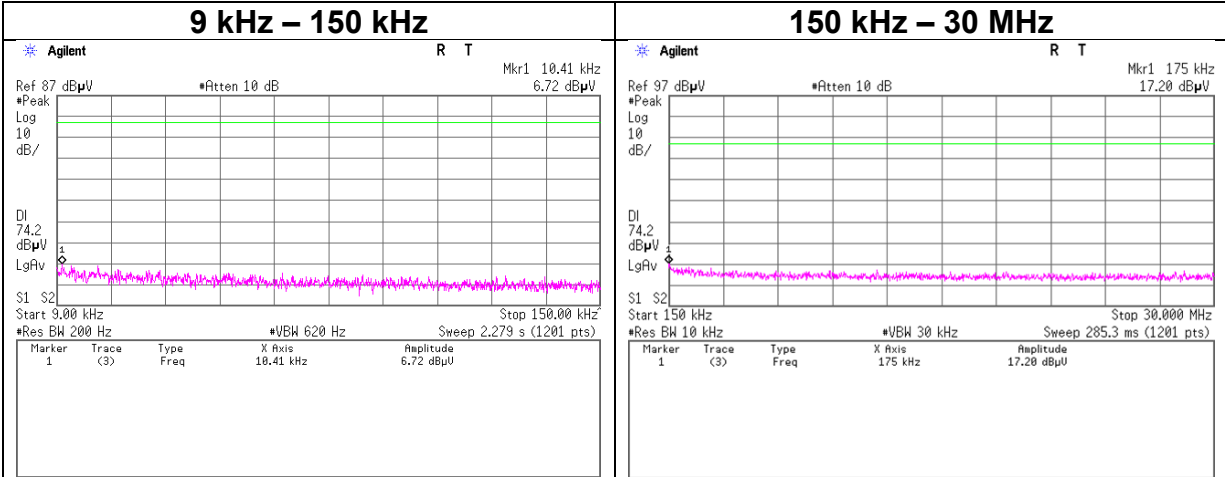

Conducted Spurious Emission

Test place	Kashima EMC Lab. No.2 Measurement Room
Date	April 4, 2024
Temperature / Humidity	23 deg. C / 47 % RH
Engineer	Hiromitsu Tanabe
Mode	Tx, Hopping Off, 3DH5



2402 MHz

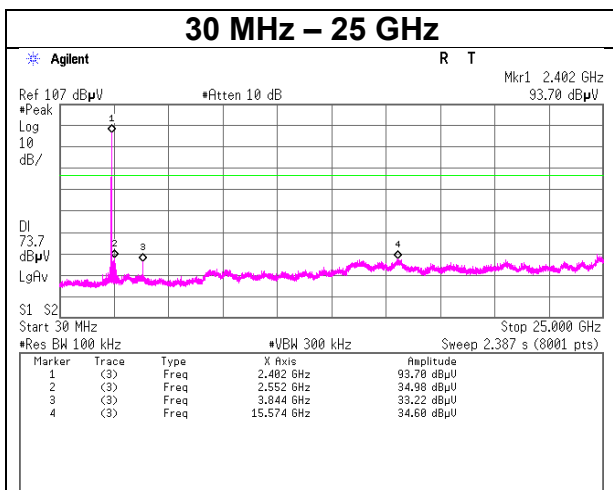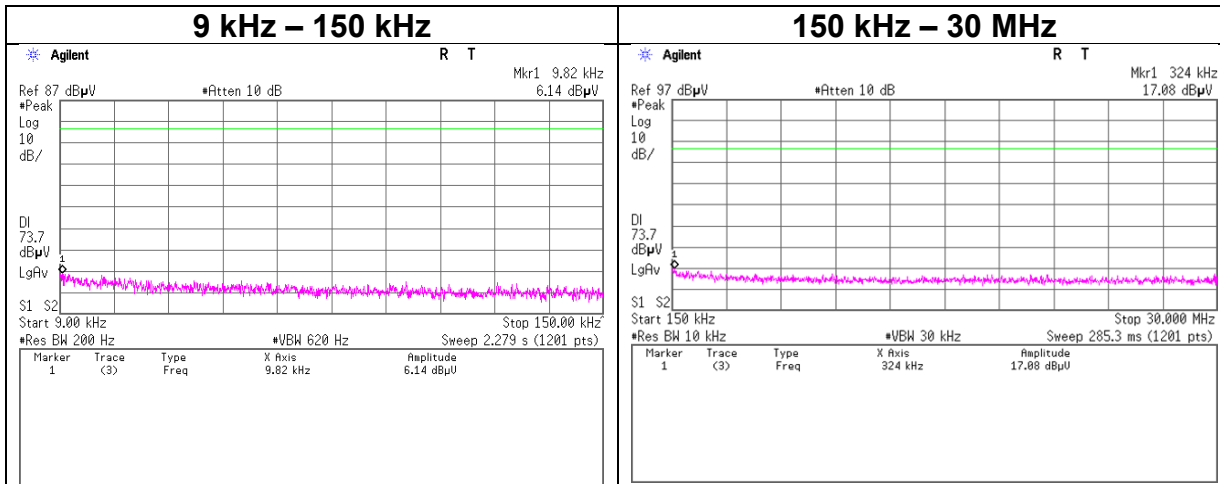

Conducted Spurious Emission

Test place Kashima EMC Lab. No.2 Measurement Room
Date April 4, 2024
Temperature / Humidity 23 deg. C / 47 % RH
Engineer Hiromitsu Tanabe
Mode Tx, Hopping Off, 3DH5



2441 MHz

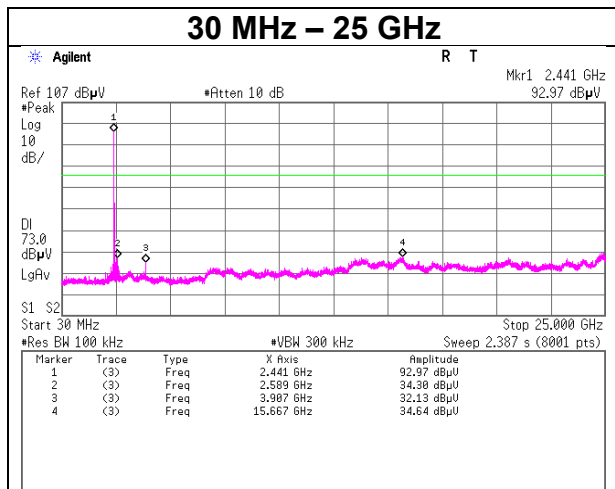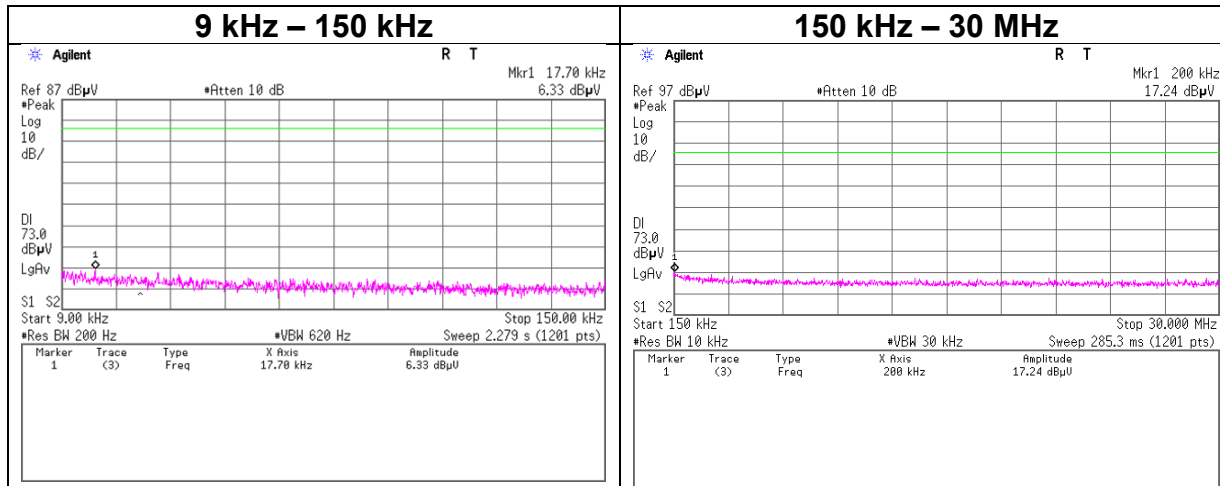

Conducted Spurious Emission

Test place Kashima EMC Lab. No.2 Measurement Room
Date April 4, 2024
Temperature / Humidity 23 deg. C / 47 % RH
Engineer Hiromitsu Tanabe
Mode Tx, Hopping Off, 3DH5


2480 MHz

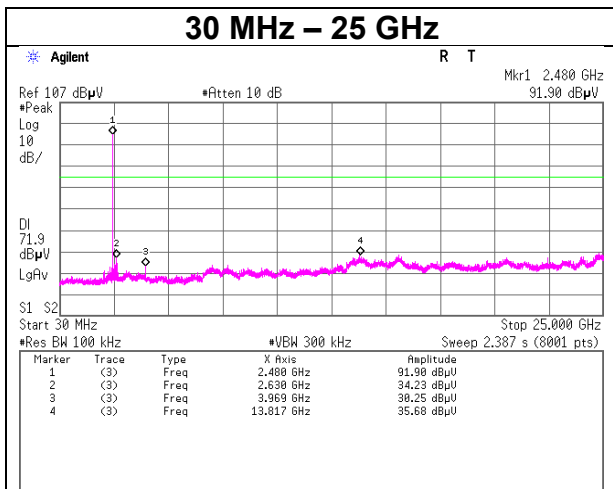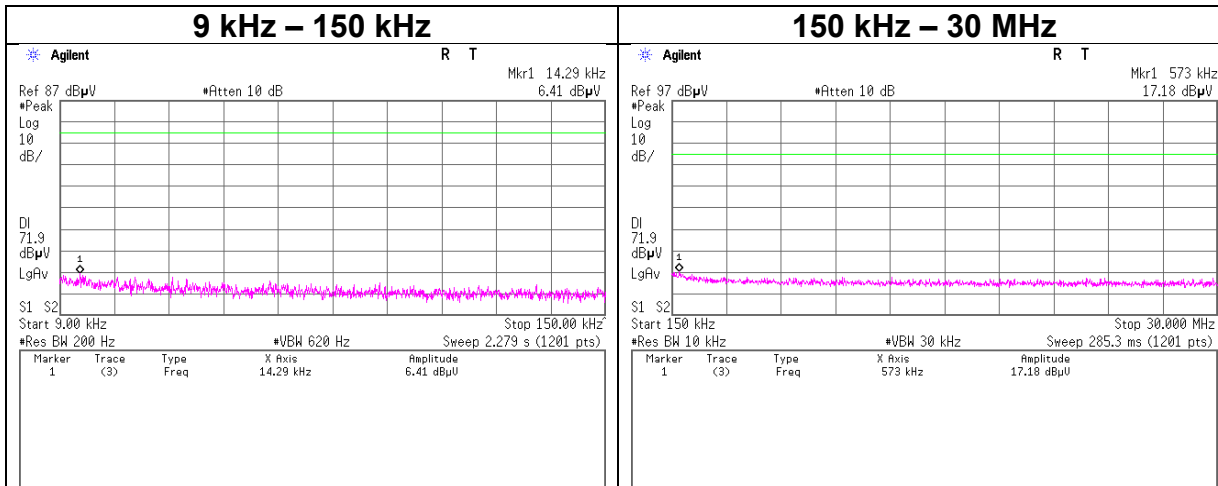


Conducted Emission Band Edge compliance

Test place Kashima EMC Lab. No.2 Measurement Room
Date April 4, 2024
Temperature / Humidity 23 deg. C / 47 % RH
Engineer Hiromitsu Tanabe
Mode Tx DH5

Hopping On

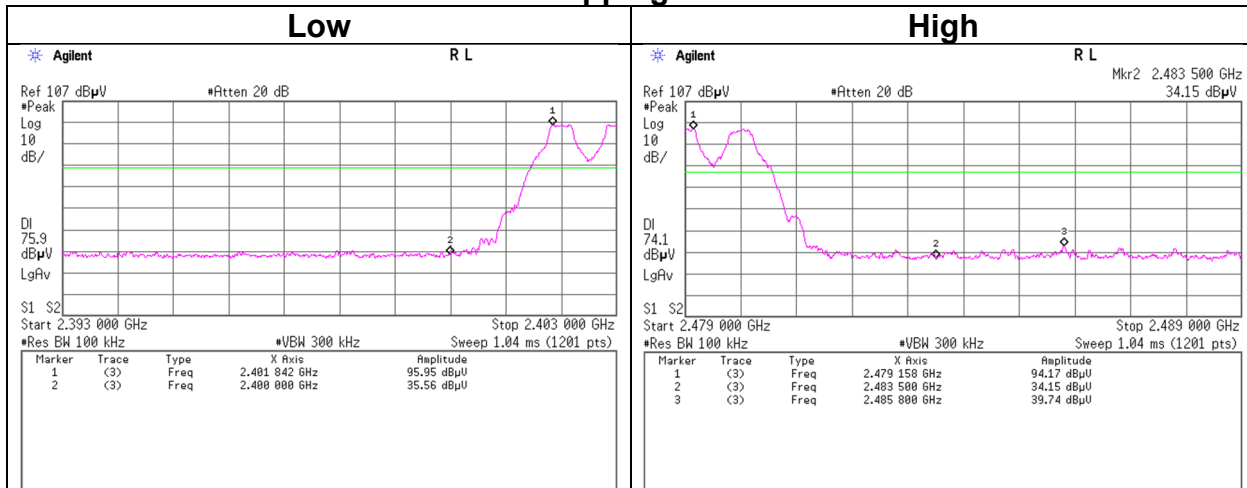


Hopping Off

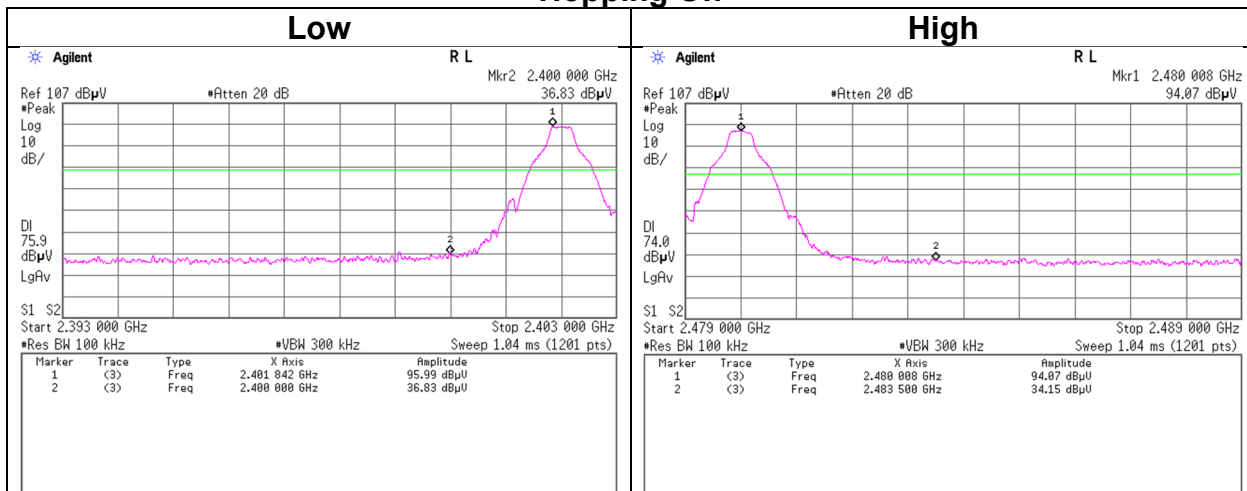


Conducted Emission Band Edge compliance

Test place	Kashima EMC Lab. No.2 Measurement Room
Date	April 4, 2024
Temperature / Humidity	23 deg. C / 47 % RH
Engineer	Hiromitsu Tanabe
Mode	Tx 3DH5

Hopping On

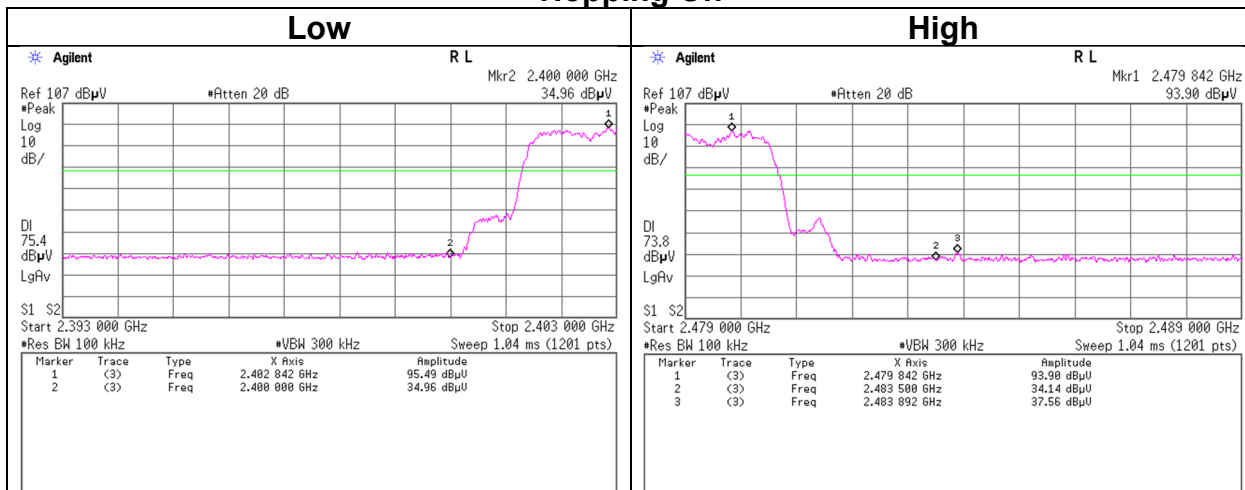

Hopping Off

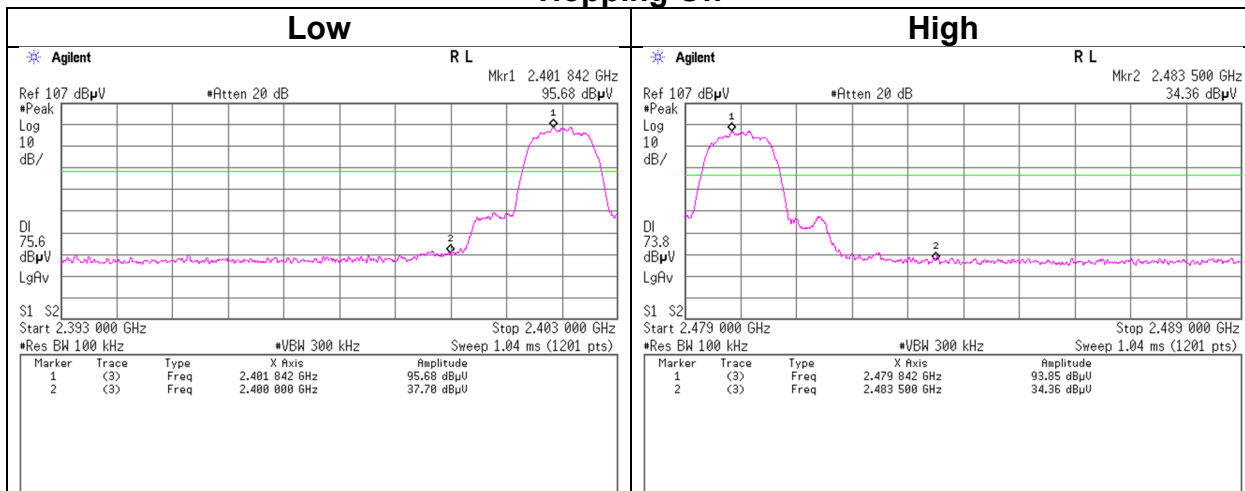

APPENDIX 2: Test Instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	143121	LOGBICON	Schwarzbeck Mess-Elektronik OHG	VULB 9168	343	2023/04/18	12
RE	178806	5dB Fixed Atten.	Pasternack Enterprises	PE7047-5	none	2023/04/18	12
RE	143165	10 Site RE 3m System	UL Japan	none	none	2023/08/01	12
RE	183880	Pre-Amplifier	UL Japan	ZKL-2	001	2023/04/21	12
RE	144199	Test Receiver	Keysight Technologies Inc	N9038A	MY53290016	2023/07/05	12
RE	144632	Semi Anechoic Chamber	TDK	NSA (No.10)	10	2023/05/08	12
RE	143455	Double Ridged Wave Guide	ETS-Lindgren (Cedar Park, Texas)	3115	00204569	2024/02/09	12
RE	143140	Micro Wave Cable	Junkosha	MWX221	1407S222	2023/11/17	12
RE	192243	Microwave Cable	Huber+Suhner	SF104/11N/11PC35/8000MM	808995/4	2024/01/19	12
RE	142940	Pre-Amplifier	Micro Wave Factory	MPR-1G26.5-35	161399	2023/06/08	12
RE	143023	10dB Fixed Atten.	Weinschel - API Technologies Corp	54A-10	56251	2023/05/25	12
RE	143442	HPF	Micro-Tronics	HPM50111-02	009	2023/05/24	12
RE	143643	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY52490024	2023/06/21	12
RE	144633	Semi Anechoic Chamber	TDK	SVSWR (No.10)	10	2023/05/08	12
RE	143438	Double Ridged Horn	ETS-Lindgren (Cedar Park, Texas)	3160-09	00166043	2023/06/19	12
RE	142937	Pre-Amplifier	TOYO	HAP18-26W	00000035	2023/06/19	12
RE	142992	Micro Wave Cable	Suhner	SUCOFLEX102	MY010/2A	2023/06/04	12
RE	144193	Test Receiver	Rohde & Schwarz	ESU40	100426	2023/04/20	12
RE	222745	Measure	SHINWA RULES CO., LTD.	80862	none	-	-
RE	143542	Temperature & Humidity Indicator	HIOKI E.E. CORPORATION	3641/9680-50	090999895/090905406	2023/06/27	12
RE	143133	Barometer	Sanoh Co., Ltd	SBR-151	001439	2023/03/10	36
RE	144216	Digital Multimeter	Fluke Corporation	115	994460954	2023/10/24	12
RE	178804	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3 (RE,CE,ME,PE)	Ver 3.1.0484	-	-
AT	143643	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY52490024	2023/06/21	12
AT	235556	10dB Fixed Attenuator	Weinschel Associates	WA54-10-1314	0H3E9	2023/06/13	12
AT	143110	Micro Wave Cable	Suhner	SUCOFLEX102	MY3773/2	2023/05/25	12
AT	143588	Peak Power Analyzer	Keysight Technologies Inc	8990B	MY51000276	2023/06/20	12
AT	143606	Power Sensor	Keysight Technologies Inc	N1923A	MY54070024	2023/06/20	12
AT	222747	Measure	SHINWA RULES CO., LTD.	80862	none	-	-
AT	144210	Digital Multimeter	Fluke Corporation	112	89790193	2023/10/24	12
AT	200034	Temperature & Humidity Logger	HIOKI E.E. CORPORATION	LR5001/LR9504	200636456/200699552	2023/07/18	12
AT	143133	Barometer	Sanoh Co., Ltd	SBR-151	001439	2023/03/10	36

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test

RE: Radiated Emission