

# RADIO TEST REPORT

**Test Report No. : 31BE0147-HO-01-A-R2**

**Applicant** : Sony EMCS Corporation Kisarazu TEC  
**Type of Equipment** : Wireless transceiver  
**Model No.** : EZW-RT50  
**FCC ID** : AK8148935911  
**Test regulation** : FCC Part 15 Subpart C 2010  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This report is a revised version of 31BE0147-HO-01-A-R1. 31BE0147-HO-01-A-R1 is replaced with this report.

**Date of test:** September 20 to 24, 2010

**Representative test engineer:**   
Tomotaka Sasagawa  
Engineer of EMC Service

**Approved by:**   
Mitsuru Fujimura  
Manager of EMC Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. \*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information</b> .....	<b>3</b>
<b>SECTION 2: Equipment under test (E.U.T.)</b> .....	<b>3</b>
<b>SECTION 3: Test specification, procedures &amp; results</b> .....	<b>4</b>
<b>SECTION 4: Operation of E.U.T. during testing</b> .....	<b>7</b>
<b>SECTION 5: Conducted Emission</b> .....	<b>9</b>
<b>SECTION 6: Spurious Emission</b> .....	<b>10</b>
<b>SECTION 7: Antenna Terminal Conducted Tests</b> .....	<b>12</b>
<b>APPENDIX 1: Photographs of test setup</b> .....	<b>13</b>
Conducted Emission .....	13
Radiated Spurious Emission .....	14
Worst Case Position (Horizontal: X-axis/ Vertical:Z-axis) .....	15
<b>APPENDIX 2: Data of EMI test</b> .....	<b>16</b>
Conducted Emission .....	16
6dB Bandwidth .....	19
Maximum Peak Output Power .....	21
Radiated Spurious Emission .....	22
The tested burst timing .....	29
Conducted Spurious Emission .....	30
Conducted Emission Band Edge compliance .....	37
Power Density .....	38
99% Occupied Bandwidth.....	40
<b>APPENDIX 3: Test instruments</b> .....	<b>41</b>

## **SECTION 1: Customer information**

Company Name : Sony EMCS Corporation Kisarazu TEC  
Brand or Trade name : SONY  
Address : 8-4 Shiomi, Kisarazu-shi, Chiba 292-0834 Japan  
Telephone Number : +81-438-37-3982  
Facsimile Number : +81-438-37-4705  
Contact Person : Kazuhiko Nagano

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Wireless transceiver  
Model No. : EZW-RT50  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : DC 3.3V  
Receipt Date of Sample : September 16, 2010  
Country of Mass-production : Malaysia  
Condition of EUT : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

#### **General Specification**

Clock frequency(ies) in the system : 22MHz

#### **Radio Specification**

Radio Type	Transceiver	
Frequency of Operation	5736MHz to 5814MHz	
Modulation	DSSS	
Power Supply (inner)	DC 3.3V	
Antenna type	Pattern Antenna	
Antenna Gain	ANT: A: -0.5dBi (5.736GHz), -0.2dBi(5.762GHz), -0.7dBi (5.814GHz)	ANT: B: -1.1dBi (5.736GHz), -1.2dBi(5.762GHz), -1.4dBi (5.814GHz)
Operating Temperature	0 deg.C to 35 deg.C	

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C: 2010, final revised on October 13, 2010

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.247 Operation within the bands 902-928MHz,  
2400-2483.5MHz, and 5725-5850MHz

\*The revision on October 13, 2010 does not affect the test specification applied to the EUT.

### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.4:2003 7. AC powerline Conducted Emission measurements IC: RSS-Gen 7.2.2	FCC: Section 15.207 IC: RSS-Gen 7.2.2	[Tx] QP 15.0dB, 0.20365MHz, L AV 11.0dB, 27.66088MHz, L [RX] QP 15.0dB, 0.20365MHz, L AV 10.9dB, 27.66088MHz, L	Complied	-
6dB Bandwidth	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: RSS-Gen 4.6.2	FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(a)	See data.	Complied	Conducted
Maximum Peak Output Power	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: RSS-Gen 4.8	FCC: Section 15.247(b)(3) IC: RSS-210 A8.4(4)		Complied	Conducted
Power Density	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: -	FCC: Section 15.247 (e) IC: RSS-210 A8.2(b)		Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: RSS-Gen 4.9 RSS-Gen 4.10	FCC: Section15.247(d) IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3	[Tx] 5.1dB 11624.000MHz, PK, Vert. [Rx] 3.4dB 76.823MHz, QP, Vert.	Complied	Conducted/ Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.

\* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

#### **FCC 15.31 (e)**

This EUT provides stable voltage(DC3.3V) constantly to RF part regardless of input voltage. Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	N/A	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Conducted emission (+dB)
	150kHz-30MHz
No.1	2.6dB
No.2	2.9dB
No.3	3.3dB
No.4	2.8dB

Test room (semi-anechoic chamber)	Radiated emission (10m*)(+dB)		
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz
No.1	2.7dB	4.8dB	5.0dB
No.2	-	-	-
No.3	-	-	-
No.4	-	-	-

\*10m = Measurement distance

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	2.9dB	4.8dB	5.0dB	3.9dB	4.3dB	4.5dB	4.3dB
No.2	3.5dB	4.8dB	5.1dB	4.0dB	4.2dB	4.4dB	4.2dB
No.3	3.8dB	4.6dB	4.7dB	4.0dB	4.2dB	4.5dB	4.2dB
No.4	3.5dB	4.4dB	4.9dB	4.0dB	4.2dB	4.6dB	4.2dB

\*3m/1m/0.5m = Measurement distance

Power meter (+dB)	
Below 1GHz	Above 1GHz
1.0dB	1.0dB

Antenna terminal conducted emission and Power density (+dB)			Antenna terminal conducted emission (+dB)		Channel power (+dB)
Below 1GHz	1GHz-3GHz	3GHz-18GHz	18GHz-26.5GHz	26.5GHz-40GHz	
1.0dB	1.1dB	2.7dB	3.2dB	3.3dB	1.5dB

#### Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

#### Radiated emission test(3m)

[Spurious Emission Tx] The data listed in this test report has enough margin, more than the site margin.

[Spurious Emission Rx] The data listed in this report meets the limits unless the uncertainty is taken into consideration.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test set up, Data of EMI, and Test instruments

Refer to APPENDIX.

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Mode(s)**

<b>Test Item</b>	<b>Operating Mode</b>	<b>Tested Antenna</b>	<b>Tested frequency</b>
Conducted Emission Spurious Emission (Radiated / Conducted)	Transmitting (Tx)	ANT: B	5736MHz 5762MHz 5814MHz
	Receiving (Rx)	ANT: B	5762MHz
6dB Bandwidth Power Density 99% Occupied Bandwidth	Transmitting (Tx)	ANT: B	5736MHz 5762MHz 5814MHz
Maximum Peak Output Power	Transmitting (Tx)	ANT: A ANT: B	5736MHz 5762MHz 5814MHz
<p>*Power of the EUT was set by the software as follows;  Software: DARR82 Controller, Version 2.0.0.0  Power setting: 29 (5.8dBm)</p> <p>*This setting of software is the worst case.  Any conditions under the normal use do not exceed the condition of setting.  In addition, end users cannot change the settings of the output power of the product.</p>			

\*As a result of preliminary check for two antennas (ANT: A and ANT: B), the formal test was performed as above-mentioned table.

#### **Preliminary check result (Worst antenna):**

Antenna Terminal Conducted test: ANT: B

**UL Japan, Inc.**


**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## 4.2 Configuration and peripherals

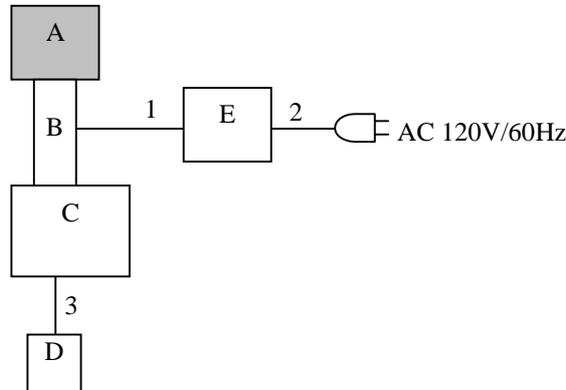

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

### Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless transceiver	EZW-RT50	D430 *1) D360 *2)	SONY	EUT
B	Extension Board	82NEW_EX_JIG	-	SONY	-
C	Jig Board	EVKL1008	EK14101600108	SONY	-
D	Battery Box	-	-	SONY	-
E	Surround Amplifier	TA-SA300WR	81711	SONY	-

\*1) Used for Conducted Emission test and Radiated Emission test

\*2) Used for Antenna Terminal conducted test

### List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	3.0	Unshielded	Unshielded	-
2	AC Cable	1.6	Unshielded	Unshielded	-
3	DC Cable	0.1	Unshielded	Unshielded	-

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 5: Conducted Emission**

### **Test Procedure and conditions**

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Detector** : QP and AV  
**Measurement range** : 0.15-30MHz  
**Test data** : APPENDIX  
**Test result** : Pass

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 6: Spurious Emission**

### **[Conducted]**

#### **Test Procedure**

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.  
The following spectrum analyzer setting was used;

- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trance: Max Hold

**Test data** : APPENDIX

**Test result** : Pass

### **[Radiated]**

#### **Test Procedure**

It was measured based on "2. Radiated emission test" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

EUT was placed on a urethane platform of nominal size, 0.5m by 2.0m, raised 0.8m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

#### **Test Antennas are used as below;**

Frequency	Below 30MHz	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

In any 100kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

**20dBc was applied to the frequency over the limit of FCC 15.209 / Table 2 of RSS-210 2.7 (IC) and outside the restricted band of FCC15.205 / Table 1 of RSS-210 2.7 (IC).**

Frequency	Below 1GHz	Above 1GHz		20dBc
Instrument used	Test Receiver	Spectrum Analyzer *1)		Spectrum Analyzer *1)
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120kHz	RBW: 1MHz VBW: 3MHz	RBW: 1MHz VBW: 10Hz *4)	RBW: 100kHz VBW: 300kHz
Test Distance	3m	3m (below 10GHz), 1m*2) (above 10GHz), 0.5m*3) (above 26.5GHz)		3m (below 10GHz), 1m*2) (above 10GHz), 0.5m*3) (above 26.5GHz)

\*1) The Spectrum Analyzer was used in 3dB resolution bandwidth.

\*2) Distance Factor:  $20 \times \log(3.0\text{m}/1.0\text{m}) = 9.5\text{dB}$

\*3) Distance Factor:  $20 \times \log(3.0\text{m}/0.5\text{m}) = 15.6\text{dB}$

\*4) The test was performed with VBW 10Hz since the EUT had no intervals during which the transmitter was off (see Appendix).

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range : 30MHz-40GHz**  
**Test data : APPENDIX**  
**Test result : Pass**

## **SECTION 7: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

<b>Test</b>	<b>Span</b>	<b>RBW</b>	<b>VBW</b>	<b>Sweep time</b>	<b>Detector</b>	<b>Trace</b>	<b>Instrument used</b>
6dB Bandwidth	20MHz	100kHz	300kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth	Enough width to display 20dB Bandwidth	1 to 3% of Span	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak	-	Power Meter (Sensor: 50MHz BW)
Peak Power Density	18MHz	30kHz	100kHz	600sec	Peak	Max Hold	Spectrum Analyzer *1) *2)
Conducted Spurious Emission	Less or equal to 5GHz (Range: 30MHz-25GHz)	100kHz	300kHz	Auto	Peak	Max Hold	Spectrum Analyzer

\*1) PSD Option 1 of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".  
\*2) The test was not performed at RBW:3kHz however the measurement is to be performed with RBW:3kHz in the regulation, because, the measurement value with RBW:3kHz is less than the value of RBW:30kHz and the test data met the limit with RBW:30kHz.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

**Test data** : **APPENDIX**  
**Test result** : **Pass**