



RADIO TEST REPORT

Test Report No. : 28CE0018-HO-01-B-R1

Applicant : Sony Corporation
Type of Equipment : Wireless transmitter
Model No. : EZW-T100
FCC ID : AK8A1368100A
Test standard : FCC Part 15 Subpart C 2007
Section 15.207, Section 15.247
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. Original test report number of this report is 28CE0018-HO-01-B.

Date of test:

December 17 to 26, 2007

Tested by:

Takahiro Hatakeda
EMC Services

Takumi Shimada
EMC Services

Kazufumi Nakai
EMC Services

Shinya Watanabe
EMC Services

Approved by :

Mitsuru Fujimura
Assistant Manager of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://uljapan.co.jp/emc/nvlap.htm>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b (09.01.08)

| CONTENTS | PAGE |
|--|-------------|
| SECTION 1: Customer information | 3 |
| SECTION 2: Equipment under test (E.U.T.) | 3 |
| SECTION 3: Test specification, procedures & results | 4 |
| SECTION 4: Operation of E.U.T. during testing..... | 8 |
| SECTION 5: Conducted Emission | 10 |
| SECTION 6: Spurious Emission..... | 11 |
| SECTION 7: Bandwidth..... | 12 |
| SECTION 8: Maximum Peak Output Power | 12 |
| SECTION 9: Peak Power Density | 12 |
| APPENDIX 1: Photographs of test setup..... | 13 |
| Conducted Emission | 13 |
| Spurious Emission (Radiated) | 14 |
| Worst Case Position..... | 15 |
| APPENDIX 2: Data of EMI test | 16 |
| Conducted Emission | 16 |
| 6dB Bandwidth | 24 |
| Maximum Peak Output Power | 26 |
| Radiated Spurious Emission (below 1GHz) | 27 |
| Radiated Spurious Emission (above 1GHz) | 35 |
| Conducted Spurious Emission..... | 44 |
| Conducted emission Band Edge compliance..... | 48 |
| Power Density..... | 49 |
| 99%Occupied Bandwidth | 51 |
| APPENDIX 3:Test instruments | 52 |

SECTION 1: Customer information

Company Name : Sony EMCS Corporation Kisarazu TEC
Address : 8-4 Shiomi Kisarazu-shi, Chiba 292-0834 Japan
Telephone Number : +81-438-37-3982
Facsimile Number : +81-438-37-4705
Contact Person : Kazuhiko Nagano

* Sony EMCS Corporation Kisarazu TEC is on behalf of the applicant: Sony Corporation.

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Wireless transmitter
Model No. : EZW-T100
Serial No. : 1 (Used for Conducted emission and Spurious emission tests)
4 (Used for Antenna terminal conducted test)
Rating : DC 4.0V/5.0V
Country of Manufacture : China
Receipt Date of Sample : November 12, 2007
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

2.2 Product Description

Model No: EZW-T100 (referred to as the EUT in this report) is the Wireless transmitter.
Feature of EUT : Digital Wireless Audio Transmitter adapter
The EUT has three channels, 2411.85MHz, 2437.85MHz and 2463.85MHz.

| | | |
|--------------------------------|---|-------------------------|
| EUT Clock | AD converter: 12.288MHz RF IC: 22MHz | |
| Equipment Type | Transceiver | |
| Frequency of Operation | 2411.85MHz to 2463.85MHz | |
| Type of Modulation | DSSS | |
| Method of Frequency Generation | Crystal | |
| Bandwidth | 22MHz | |
| Power Supply (inner) | DC 3.3V | |
| Antenna Type | ANT: A: Pattern Antenna | ANT: B: Pattern Antenna |
| Antenna Gain | ANT: A: 2.1dBi | ANT: B: 2.1dBi |

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C: 2007
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz

FCC 15.31 (e)

This EUT provides stable voltage (DC3.3V) constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is pattern antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.2 Procedures and results

[DSSS and other forms of modulation]

| No. | Item | Test Procedure | Specification | Remarks | Deviation | Worst margin | Results |
|-----|---------------------------|---|--|------------------------|-----------|---|----------|
| 1 | Conducted emission | FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.2 | FCC: Section 15.207 IC: RSS-Gen 7.2.2 | - | N/A | QP 15.3dB 0.24240MHz, L ANT: B, Tx, Ch: Low AV 12.0dB 25.40182MHz, L ANT: A, Tx, Ch: Low | Complied |
| 2 | 6dB Bandwidth | FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: RSS-Gen 4.6.2 | FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(a) | Conducted | N/A | See data. | Complied |
| 3 | Maximum Peak Output Power | FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: RSS-Gen 4.8 | FCC: Section 15.247(b)(3) IC: RSS-210 A8.4(4) | Conducted | N/A | | Complied |
| 4 | Restricted Band Edges | FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: - | FCC: Section 15.247 (d) IC: RSS-210 A8.5 | Conducted/ Radiated | N/A | | Complied |
| 5 | Power Density | FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: - | FCC: Section 15.247 (e) IC: RSS-210 A8.2(b) | Conducted | N/A | | Complied |
| 6 | Spurious Emission | FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" IC: RSS-Gen 4.9 RSS-Gen 4.10 | FCC: Section15.247(d) IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3 | Conducted/ Radiated | N/A | [Tx] 0.3dB 2390.0MHz, Horizontal, PK, ANT: A, Ch: Low [Rx] 3.2dB 258.081MHz,QP, Horizontal ANT: A, Ch: Mid | Complied |

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.

*These tests were performed without any deviations from test procedure except for additions or exclusions.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.3 Addition to standards

| No. | Item | Test Procedure | Specification | Remarks | Deviation | Worst margin | Results |
|-----|-------------------------|-------------------|-------------------|-----------|-----------|--------------|---------|
| 1 | 99% Occupied Band Width | IC: RSS-Gen 4.6.1 | IC: RSS-Gen 4.6.1 | Conducted | N/A | N/A | N/A |

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

| Test room | Conducted emission | Radiated emission (10m*) | | | Radiated emission (3m*) | | | Radiated emission (3m*) |
|----------------------------|--------------------|--------------------------|--------------|-------------|-------------------------|--------------|-------------|-------------------------|
| | 150kHz-30MHz | 9kHz-30MHz | 30MHz-300MHz | 300MHz-1GHz | 9kHz-30MHz | 30MHz-300MHz | 300MHz-1GHz | 1GHz < |
| No.1 semi-anechoic chamber | ±3.7dB | ±3.1dB | ±4.7dB | ±4.4dB | ±3.2dB | ±3.7dB | ±4.4dB | ±5.9dB |
| No.2 semi-anechoic chamber | ±3.7dB | - | - | - | ±3.2dB | ±4.3dB | ±3.9dB | ±5.9dB |
| No.3 semi-anechoic chamber | ±3.7dB | - | - | - | ±3.2dB | ±4.2dB | ±4.4dB | ±5.9dB |
| No.4 semi-anechoic chamber | ±3.7dB | - | - | - | ±3.2dB | ±4.2dB | ±4.4dB | ±5.9dB |

*10m/3m = Measurement distance

Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty for this test is ±3.0dB.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

| | FCC Registration Number | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms |
|----------------------------|-------------------------|------------------------|----------------------------|--|------------------------|
| No.1 semi-anechoic chamber | 313583 | IC4247 | 19.2 x 11.2 x 7.7m | 7.0 x 6.0m | No.1 Power source room |
| No.2 semi-anechoic chamber | 655103 | IC4247-2 | 7.5 x 5.8 x 5.2m | 4.0 x 4.0m | - |
| No.3 semi-anechoic chamber | 148738 | IC4247-3 | 12.0 x 8.5 x 5.9m | 6.8 x 5.75m | No.3 Preparation room |
| No.3 shielded room | - | - | 4.0 x 6.0 x 2.7m | N/A | - |
| No.4 semi-anechoic chamber | 134570 | IC4247-4 | 12.0 x 8.5 x 5.9m | 6.8 x 5.75m | No.4 Preparation room |
| No.4 shielded room | - | - | 4.0 x 6.0 x 2.7m | N/A | - |
| No.5 semi-anechoic chamber | - | - | 6.0 x 6.0 x 3.9m | 6.0 x 6.0m | - |
| No.6 shielded room | - | - | 4.0 x 4.5 x 2.7m | 4.75 x 5.4 m | - |
| No.6 measurement room | - | - | 4.75 x 5.4 x 3.0m | 4.75 x 4.15 m | - |
| No.7 shielded room | - | - | 4.7 x 7.5 x 2.7m | 4.7 x 7.5m | - |
| No.8 measurement room | - | - | 3.1 x 5.0 x 2.7m | N/A | - |
| No.9 measurement room | - | - | 8.0 x 4.5 x 2.8m | 2.0 x 2.0m | - |
| No.10 measurement room | - | - | 2.6 x 2.8 x 2.5m | 2.4 x 2.4m | - |
| No.11 measurement room | - | - | 3.1 x 3.4 x 3.0m | 2.4 x 3.4m | - |

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

The mode used for test :


| Test | Mode | Tested frequency | Tested antenna |
|--|-------------------|--|-----------------------|
| Conducted emission Spurious Emission (Radiated) | Transmitting (Tx) | 2411.85MHz 2437.85MHz 2463.85MHz | ANT: A ANT: B |
| | Receiving (Rx) | 2437.85MHz | ANT: A ANT: B |
| 6dB Bandwidth 99% Occupied Bandwidth | Transmitting (Tx) | 2411.85MHz 2437.85MHz 2463.85MHz | ANT: A |
| Power Density | Transmitting (Tx) | 2413.23MHz 2436.94MHz 2462.51MHz | ANT: A |
| Maximum Peak Output Power | Transmitting (Tx) | 2411.85MHz 2437.85MHz 2463.85MHz | ANT: A ANT: B |
| Spurious Emission (Conducted) | Transmitting (Tx) | 2411.85MHz 2437.85MHz 2463.85MHz | ANT: A |
| | Receiving (Rx) | 2437.85MHz | ANT: A |

*As a result of preliminary check for two antennas (ANT: A and ANT: B), the formal test was performed as above-mentioned table.

Preliminary check result (Worst antenna):

Antenna Terminal Conducted test : ANT: A

4.2 Configuration and peripherals

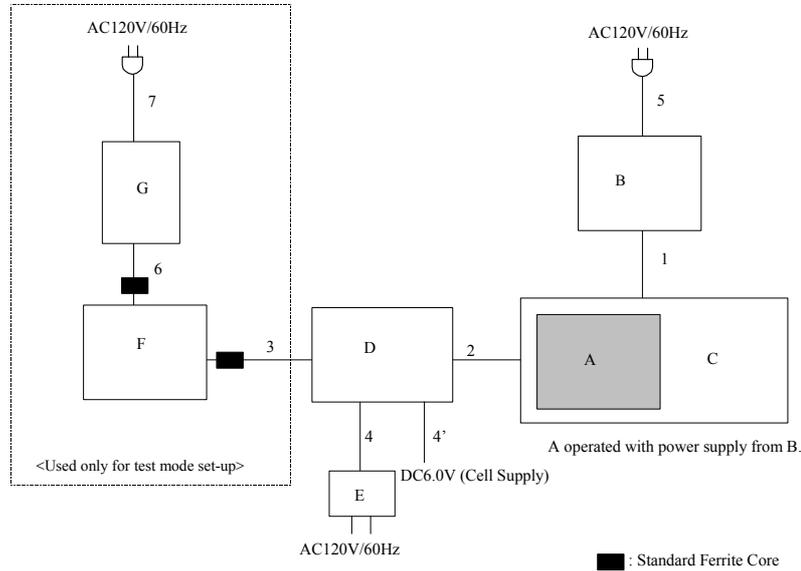

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

| No. | Item | Model number | Serial number | Manufacturer | Remarks |
|-----|----------------------|--------------|------------------|--------------|-------------|
| A | Wireless transmitter | EZW-T100 | 1 *1) 4 *2) | SONY | EUT |
| B | DVD Receiver | HCD-HDX275 | 8100042 | SONY | Host device |
| C | IF Board | - | D02 | SONY | - |
| D | EVK Board | - | 125 | WSS | - |
| E | AC Adaptor | US118-0526 | 705-0802283 | BUFFALO | *1) |
| F | Note PC | PCG-4A1N | 281654101401044 | SONY | - |
| G | AC Adaptor | PCGA-AC16V6 | 1477749521189378 | SONY | - |

*1) Used for Conducted emission and Spurious emission tests.

*2) Used for Antenna terminal conducted test.

List of cables used

| No. | Name | Length (m) | Shield | | Remarks |
|-----|--------------|------------|------------|------------|---------|
| | | | Cable | Connector | |
| 1 | DC Cable | 1.7 | Unshielded | Unshielded | - |
| 2 | Signal Cable | 0.3 | Unshielded | Unshielded | - |
| 3 | USB Cable | 1.2 | Shielded | Shielded | - |
| 4 | DC Cable | 1.8 | Unshielded | Unshielded | *1) |
| 4' | DC Cable | 0.1 | Unshielded | Unshielded | *2) |
| 5 | AC Cable | 1.8 | Unshielded | Unshielded | - |
| 6 | DC Cable | 1.8 | Unshielded | Unshielded | - |
| 7 | Signal Cable | 0.8 | Unshielded | Unshielded | - |

*1) Used for Antenna terminal conducted test.

*2) Used for all other tests.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector : quasi-peak and average detector (IF BW 9 kHz)
Measurement range : 0.15-30MHz
Test data : APPENDIX 2
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a urethane platform of nominal size, 0.5m by 1.5m, raised 80cm above the conducting ground plane.

The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 / Table 2 of RSS-210 2.7 (IC) and outside the restricted band of FCC15.205 / Table 1 of RSS-210 2.7 (IC).

| Frequency | Below 1GHz | Above 1GHz |
|-----------------|--|---|
| Instrument used | Test Receiver / Spectrum Analyzer | Spectrum Analyzer |
| Detector | QP: BW 120kHz(T/R) | PK: RBW:1MHz/VBW: 1MHz |
| IF Bandwidth | 20dBc : RBW: 100kHz VBW: 300kHz (S/A) | AV: RBW:1MHz/VBW:10Hz or RBW:1MHz/VBW:430Hz *1) 20dBc : RBW:100kHz/VBW:300kHz |

*1) Used for the band edge of the carrier and the harmonics that can be measured. The VBW is based on the inverse of the duty cycle (see page 43).

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT's antenna to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 2
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 7: Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: 50MHz
- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.
It was measured based on "Power Output Option 1" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

Test data : APPENDIX 2
Test result : Pass

SECTION 9: Peak Power Density

[Conducted]

Test Procedure

The Peak Power Density was measured with a spectrum analyzer connected to the antenna port.
It was measured based on "PSD Option 1" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

- Span: 1.5MHz
- RBW: 3kHz
- VBW: 100kHz
- Sweep: 500sec.
- Detector: Peak
- Trace: Single Clear

Test data : APPENDIX 2
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124