



RADIO TEST REPORT

Test Report No.: 27CE0018-HO-A

Applicant : Sony Computer Entertainment Inc.

Type of Equipment : PLAYSTATION®3

Model No. : CECHB01

FCC ID : AK8CBEH100Z

Test standard : FCC Part 15 Subpart C
Section 15.207, Section 15.247: 2006

Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.

Date of test:

August 9 to October 10, 2006

Tested by:

M. Fujimura

Mitsuru Fujimura
EMC Services

Y. Yoshida

Yutaka Yoshida
EMC Services

T. Shimada

Takumi Shimada
EMC Services

Approved by :

H. Shomoji

Hironobu Shomoji
Group Leader of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

CONTENTS	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results.....	4
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Conducted Emission.....	11
SECTION 6: Carrier Frequency Separation	12
SECTION 7: Bandwidth	12
SECTION 8: Number of Hopping Frequency	12
SECTION 9: Dwell time.....	12
SECTION 10: Maximum Peak Output Power	12
SECTION 11: Spurious Emission	13
APPENDIX 1: Photographs of test setup	14
Conducted Emission.....	14
Spurious Emission (Radiated).....	15
Antenna Worst Case Position.....	16
APPENDIX 2: Test instruments	17
APPENDIX 3: Data of EMI test.....	18
Conducted Emission.....	18
Carrier Frequency Separation	43
Carrier Frequency Separation(EDR).....	45
20dB Bandwidth	47
20dB Bandwidth(EDR)	49
Number of Hopping Frequency	51
Number of Hopping Frequency(EDR)	53
Dwell time.....	55
Dwell time(EDR)	58
Maximum Peak Output Power	61
Radiated Spurious Emission (30MHz-1GHz).....	63
Radiated Spurious Emission (1GHz-26GHz)	90
Conducted Spurious Emission	113
Conducted Spurious Emission(EDR)	117
99% Occupied Bandwidth.....	122
99% Occupied Bandwidth(EDR).....	123

SECTION 1: Client information

Company Name	Sony Computer Entertainment Inc.
Brand Name	SONY
Address	2-6-21 Minamiaoyama, Minato-ku, Tokyo, 107-0062, Japan
Telephone Number	+81-3-6438-8625
Facsimile Number	+81-3-6438-8607
Contact Person	Akiko Tsukada

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	PLAYSTATION®3
Model No	CECHB01
Serial No	L9G0012 (Conducted Emission/Radiated Emission tests) G1D0169 (Antenna Terminal Conducted test)
Rating	AC 120V/60Hz
Country of Manufacture	JAPAN/CHINA
Receipt Date of Sample	G1D0169: August 9, 2006 L9G0012: October 1, 2006
Condition of EUT	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	No modification by the test lab.

2.2 Product Description

Model: CECHB01, referred to as the EUT in this report, is a PLAYSTATION®3.

The EUT contains Bluetooth (Ver. 2.0+EDR) module.

Clock Frequencies are CPU:3.2GHz(CPU), 66MHz(ATA), 133MHz(ATA), 33MHz(PCI), and 750MHz(SATA1).

Bluetooth (Ver. 2.0+EDR)

Equipment Type	Transceiver	
Frequency of Operation	2402-2480MHz	
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)	
Bandwidth & Channel spacing	1MHz & 1MHz	
Power Supply (inner)	DC3.3V	
Antenna Type	ANT1: Reverse F Antenna (manufacturer: SMK / AMP)	ANT2: Dipole Antenna
Antenna Gain	ANT1: 1.35dBi (max)	ANT2: 3.46dBi (max)
Antenna Connector Type	ANT1: N/A	ANT2: N/A

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C : 2006

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits : 2006
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz: 2006

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Mode *0)	Deviation	Worst Margin*1)	Results
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.2	FCC: Section 15.207 IC: RSS-Gen 7.2.2	Conducted	1, 2, 4	N/A	8.3dB 4.47837MHz AV, N (High Ch., DH5)	Complied
2	Carrier Frequency Separation	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(a)(1) IC: RSS-210 A8.1 (2)	Conducted	5, 6, 7	N/A	See data.	Complied
3	20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(a)(1) IC: RSS-210 A8.1 (1)	Conducted	1, 2, 5	N/A		Complied
4	Number of Hopping Frequency	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(a)(1)(iii) IC: RSS-210 A8.1 (4)	Conducted	5, 6, 7	N/A		Complied
5	Dwell time	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(a)(1)(iii) IC: RSS-210 A8.1 (4)	Conducted	5, 6, 7	N/A		Complied
6	Maximum Peak Output Power	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.6	FCC: Section 15.247(b)(1) IC: RSS-210 A8.4 (2)	Conducted	1, 2, 3, 5	N/A		Complied
7	Band Edge Compliance	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.247(d) IC: RSS-210 A8.5	Conducted	1, 2, 6, 7	N/A		Complied
8	Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.7 RSS-Gen 4.8	FCC: Section 15.247(d) IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3	Conducted/ Radiated	1, 2, 4	N/A		Tx 4.8dB 480.08MHz QP, Horizontal (High Ch., 3DH5, ANT1(AMP)) Rx 1.8dB 66.51MHz QP, Horizontal

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15.

*0) Please refer to Section 4.1 for details of test mode.

*1) The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*These tests were also referred to FCC Public Notice DA 00-705 "Guidance on Measurement for Frequency Hopping Spread Spectrum Systems".

*These tests were performed without any deviations from test procedure except for additions or exclusions.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Mode *0)	Deviation	Worst margin	Results
1	99% Occupied Band Width	RSS-Gen 4.4.1	RSS-Gen 4.4.1	Conducted	1, 2, 6, 7	N/A	N/A	N/A

*0) Please refer to Section 4.1 for details of test mode.

3.4 Uncertainty

Conducted Emission

The measurement uncertainty (with a 95% confidence level) for this test is ± 2.6 dB.

The data listed in this test report has enough margin, more than the site margin.

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.59 dB(3m)/ ± 4.58 dB(10m).

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 4.62 dB(3m)/ ± 4.60 dB(10m).

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 5.27 dB.

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is ± 3.0 dB.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	655103	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247A-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247A-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	-
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	N/A	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	2.0 x 2.0 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 5.4 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No. 3, and No.4 semi-anechoic chambers and No.7 shielded room.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The mode used for test :

1. Transmitting mode: GFSK (Packet size DH1*¹), DH3*¹, DH5, Data packet: PRBS9)
 - Low Channel : 2402MHz
 - Mid Channel : 2441MHz
 - High Channel : 2480MHz

2. Transmitting mode: 8DPSK*² (Packet size 3-DH1*¹, 3-DH3*¹, 3-DH5, Data packet: PRBS9)
 - Low Channel : 2402MHz
 - Mid Channel : 2441MHz
 - High Channel : 2480MHz

3. Transmitting mode: $\pi/4$ DQPSK (Packet size: 2-DH5, Data packet: PRBS9)
 - Low Channel : 2402MHz
 - Mid Channel : 2441MHz
 - High Channel : 2480MHz

4. Receiving mode
 - Mid Channel : 2441MHz

5. Inquiry mode

6. Hopping ON mode: GFSK

7. Hopping ON mode: EDR

*¹) Used for Dwell time test only

*²) As the Conducted Power level at 8DPSK was higher than the one at $\pi/4$ DQPSK , the test was performed at 8DPSK.

*³) 3, 5, 6, 7: only for Antenna Terminal Conducted test

Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power, bandwidth, and spurious emission of the EUT. However, the limit level 125mW mode was used due to AFH and EDR mode.

UL Apex Co., Ltd.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

4.2 Configuration and peripherals

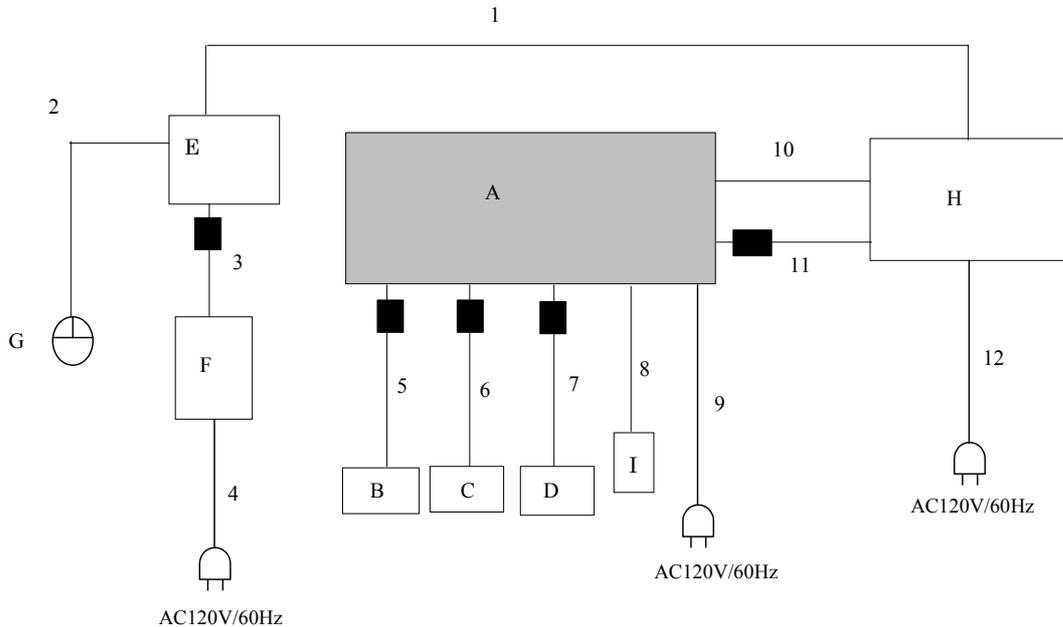

■ : Standard Ferrite Core

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	PLAYSTATION®3	CECHB01	L9G0012 *1) G1D0169 *2)	Sony Computer Entertainment Inc.	EUT
B	PLAYSTATION®3 Controller	CBEH-1010	KT44010225	Sony Computer Entertainment Inc.	-
C	PLAYSTATION®3 Controller	CBEH-1010	KT44010225	Sony Computer Entertainment Inc.	-
D	PLAYSTATION®3 Controller	CBEH-1010	KT44010225	Sony Computer Entertainment Inc.	-
E	Note PC	ThinkPad X40	KV-DNK71	IBM	-
F	AC Adaptor	02K6808	-	IBM	-
G	Mouse	M-UB48	LZE02601001	Logitech	-
H	LCD Monitor	L205GL	5Z001932GJ	MITSUBISHI	-
I	USB Memory	RUF2-M	-	BUFFALO	-

*1)Used for Conducted Emission/Radiated Emission tests

*2)Used for Antenna Terminal Conducted test

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

List of cables used

No.	Name	Length (m)	Cable Shielding	Connector Shielding	Remark
1	LAN Cable	2.8	Shielded	Shielded	-
2	USB Cable	0.8	Shielded	Shielded	-
3	DC Cable	1.8	Unshielded	Unshielded	One ferrite core (standard attachment)
4	AC Cable	1.0	Unshielded	Unshielded	-
5	USB Cable	1.4	Shielded	Shielded	One ferrite core (standard attachment)
6	USB Cable	1.4	Shielded	Shielded	One ferrite core (standard attachment)
7	USB Cable	1.4	Shielded	Shielded	One ferrite core (standard attachment)
8	USB extension Cable	1.0	Shielded	Shielded	-
9	AC Cable	2.5	Unshielded	Unshielded	-
10	HDMI Cable	1.0	Shielded	Shielded	-
11	AV Multi Cable	4.5	Unshielded	Unshielded	One ferrite core (standard attachment)
12	AC Cable	2.0	Unshielded	Unshielded	-

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 80cm above the conducting ground plane.

The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the antenna in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector : CISPR quasi-peak and average detector (IF BW 9 kHz)
Measurement range : 0.15-30MHz
Test data : APPENDIX 3
Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 6: Carrier Frequency Separation

Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

SECTION 7: Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

SECTION 8: Number of Hopping Frequency

Test Procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

SECTION 9: Dwell time

Test Procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

SECTION 10: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with power meter connected to the antenna port.

Test data : APPENDIX 3
Test result : Pass

SECTION 11: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 3

Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 80cm above the conducting ground plane.

The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequencies * over the limit of FCC 15.209 / Table 2 of RSS-210 2.7 (IC) and outside the restricted band of 15.205 / Table 1 of RSS-210 2.7 (IC).

(*frequencies at which the margin is below the site uncertainty described in Section 3.4)

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver / Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz(T/R)	PK: RBW:1MHz/VBW: 1MHz
IF Bandwidth	20dBc : RBW: 100kHz VBW: 300kHz (S/A)	AV: RBW:1MHz/VBW:10Hz 20dBc : RBW:100kHz/VBW:300kHz

The carrier level and noise levels were confirmed at each position of X and Y axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Dwell time factor

(FCC Public Notice DA 00-705 : Released March 30, 2000

Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

As the carrier frequency may occupy each channel twice for a period of 100ms when AFH functions and the number of Hopping channel is reduced to minimum 20, the following equation was used.

- Duty cycle correction factor = $20\log [Dwell\ time(ms)^2 / 100(ms)]$

Test data : APPENDIX 3

Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)