

APPENDIX 2: Data of EMI test

Conducted Emission
BDR, Tx, Ch: Low
(Power Supply: SONY)

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040133	Engineer	: Takumi Shimada

Mode / Remarks: BT, DH5, Tx 2402MHz, Power Supply(SONY)

LIMIT : FCC15.207 QP
FCC15.207 AV

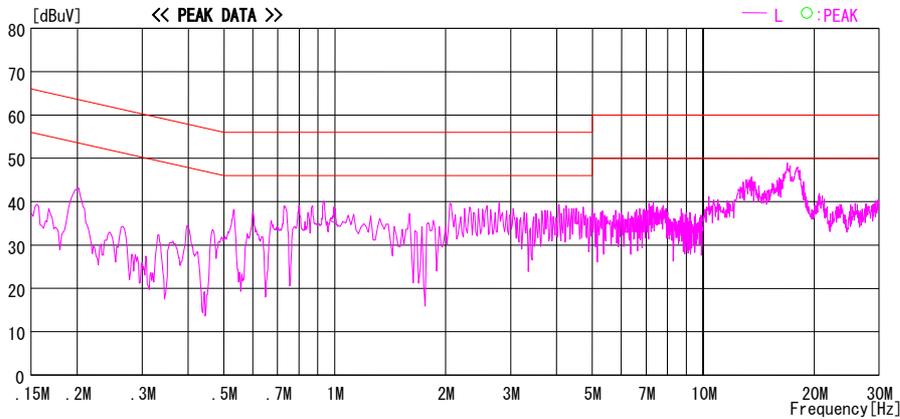
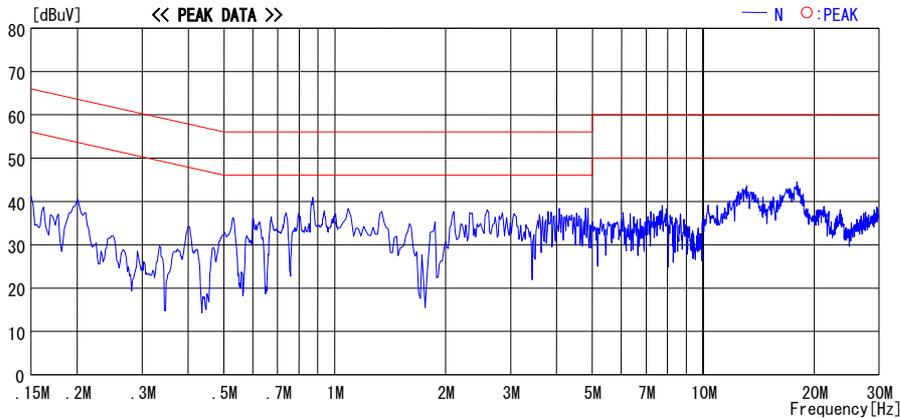


CHART: WITH FACTOR, Peak hold data. CALCURATION: RESULT [dBuV] = READING [dBuV] + C. F [dB] (LISN LOSS + CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

UL Japan, Inc.
Head Office EMC Lab.
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
 Telephone : +81 596 24 8116
 Facsimile : +81 596 24 8124

Conducted Emission
BDR, Tx, Ch: Mid
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040133	Engineer	: Takumi Shimada

Mode / Remarks: BT, DH5, Tx 2441MHz, Power Supply(SONY)

LIMIT : FCC15.207 QP
FCC15.207 AV

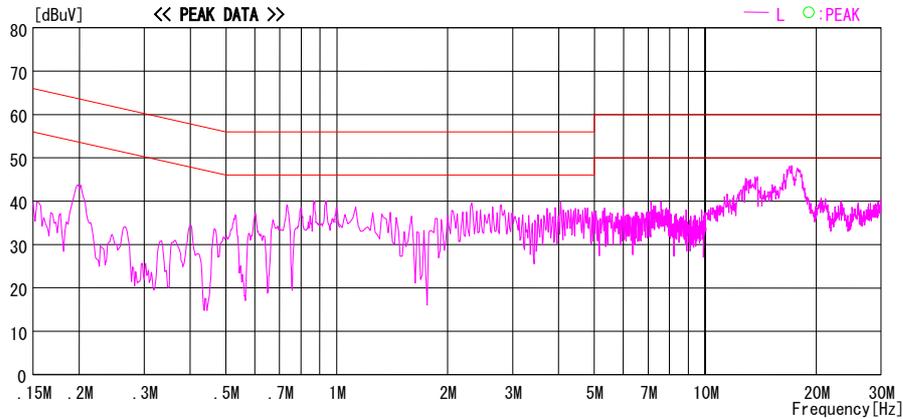
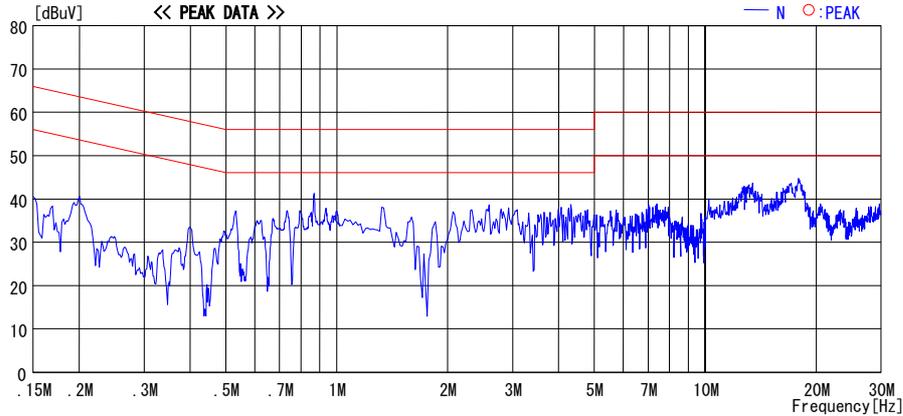


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.


Conducted Emission
BDR, Tx, Ch: Mid
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2008/07/02

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION®3 Power : AC 120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 24 deg. C. / 69%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks: BT, DH5, Tx 2441MHz, Power Supply(SONY)

LIMIT : FCC15.207 QP
FCC15.207 AV

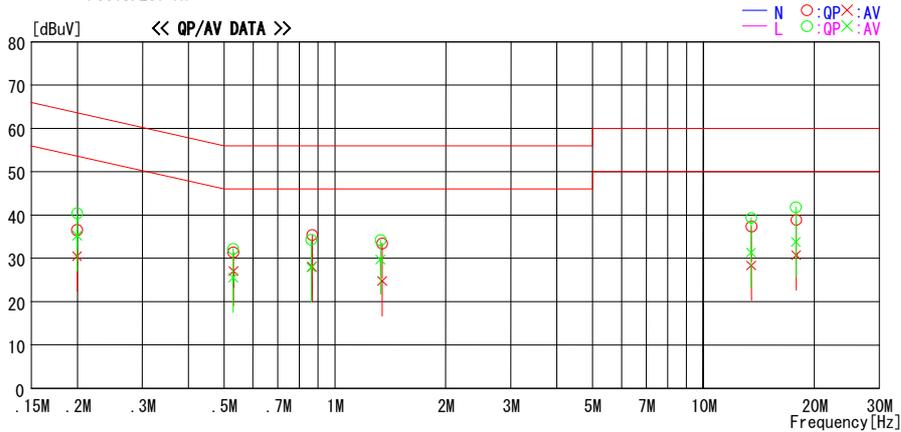

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.19966	36.3	30.3	0.2	36.5	30.5	63.6	53.6	27.1	23.1	N	
0.53078	31.1	26.8	0.3	31.4	27.1	56.0	46.0	24.6	18.9	N	
0.86683	35.0	27.7	0.4	35.4	28.1	56.0	46.0	20.6	17.9	N	
1.34312	33.0	24.4	0.4	33.4	24.8	56.0	46.0	22.6	21.2	N	
13.50250	36.0	26.9	1.4	37.4	28.3	60.0	50.0	22.7	21.7	N	
17.88390	37.2	29.0	1.7	38.9	30.7	60.0	50.0	21.1	19.3	N	
0.19982	40.3	35.0	0.2	40.5	35.2	63.6	53.6	23.2	18.4	L	
0.52973	31.9	25.3	0.3	32.2	25.6	56.0	46.0	23.8	20.4	L	
0.86219	33.9	27.5	0.4	34.3	27.9	56.0	46.0	21.7	18.1	L	
1.33006	33.8	29.3	0.4	34.2	29.7	56.0	46.0	21.8	16.3	L	
13.49101	38.0	29.9	1.4	39.4	31.3	60.0	50.0	20.6	18.7	L	
17.82220	40.2	32.1	1.7	41.9	33.8	60.0	50.0	18.1	16.2	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is round off to one or two decimal places, so some differences might be observed.

Conducted Emission
BDR, Tx, Ch: High
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040133	Engineer	: Takumi Shimada

Mode / Remarks: BT, DH5, Tx 2480MHz, Power Supply(SONY)

LIMIT : FCC15.207 QP
FCC15.207 AV

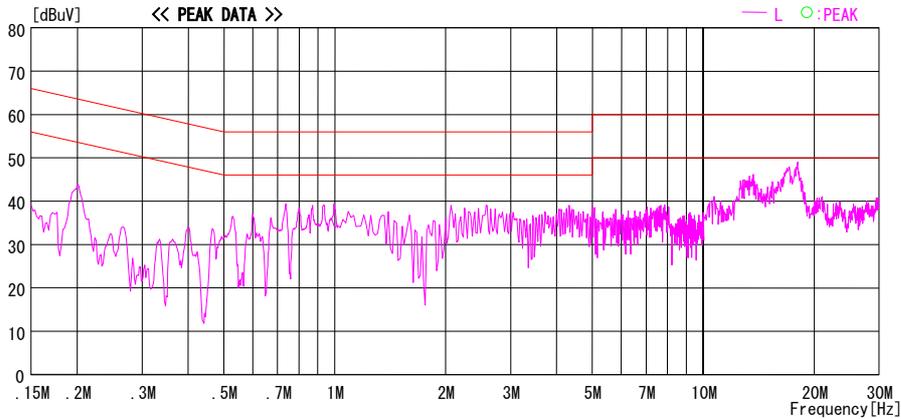
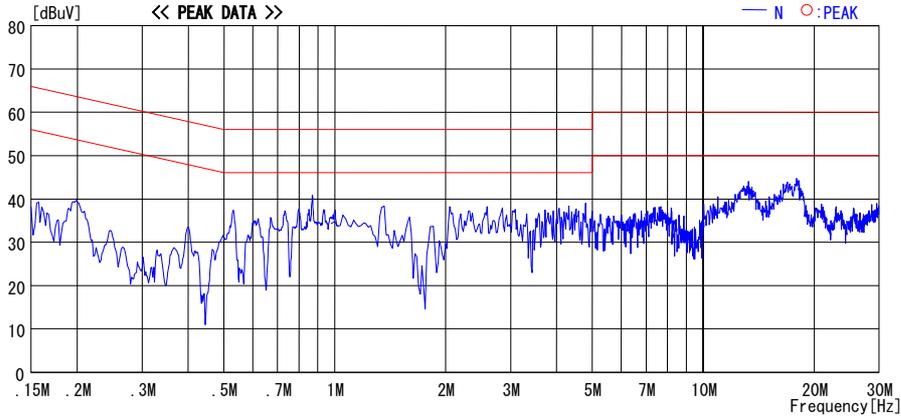


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

Conducted Emission
EDR, Tx, Ch: Low
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040133	Engineer	: Takumi Shimada

Mode / Remarks: BT, 3-DH5, Tx 2402MHz, Power Supply(SONY)

LIMIT : FCC15.207 QP
FCC15.207 AV

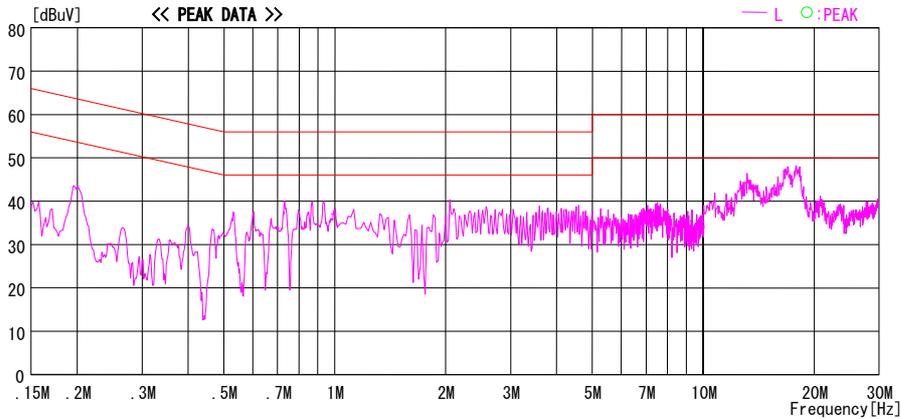
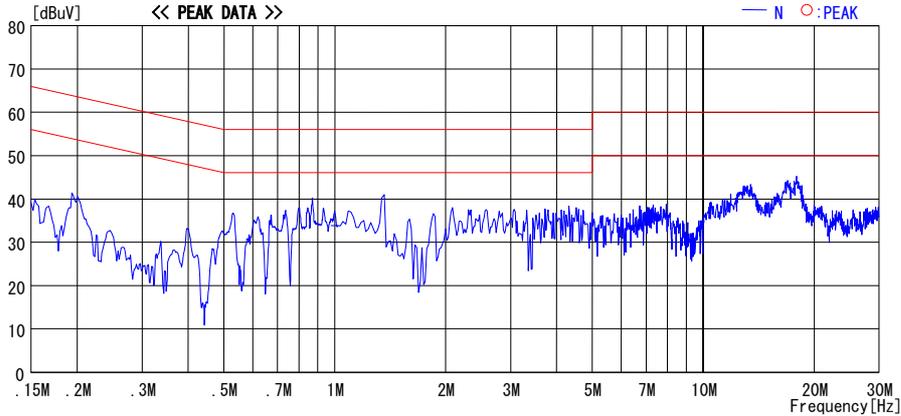


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

Conducted Emission
EDR, Tx, Ch: Mid
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040133	Engineer	: Takumi Shimada

Mode / Remarks: BT, 3-DH5, Tx 2441MHz, Power Supply(SONY)

LIMIT : FCC15.207 QP
FCC15.207 AV

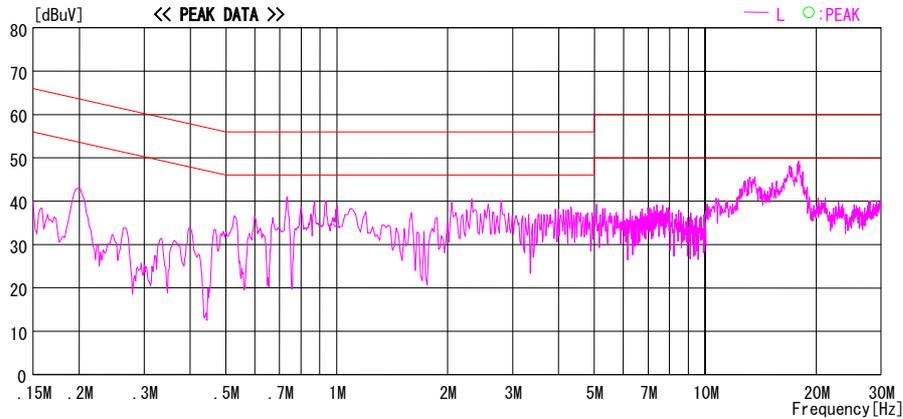
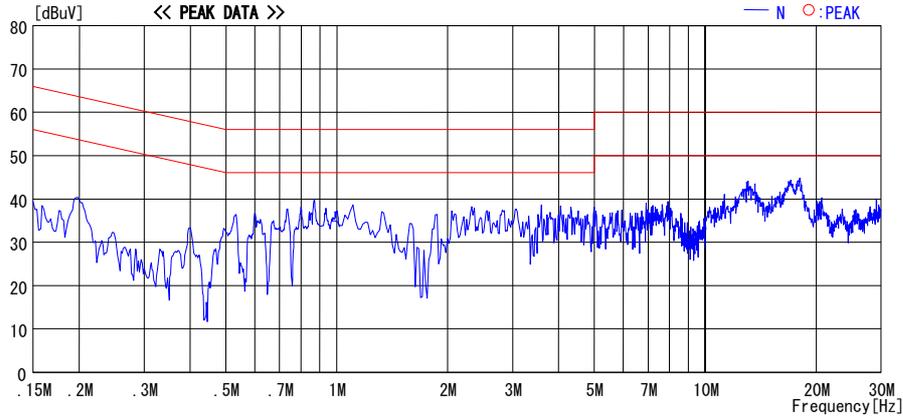


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.


Conducted Emission
EDR, Tx, Ch: Mid
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2008/07/02

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION®3 Power : AC 120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 24 deg. C. / 69%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks: BT, 3-DH5, Tx 2441MHz, Power Supply(SONY)

LIMIT : FCC15.207 QP
FCC15.207 AV

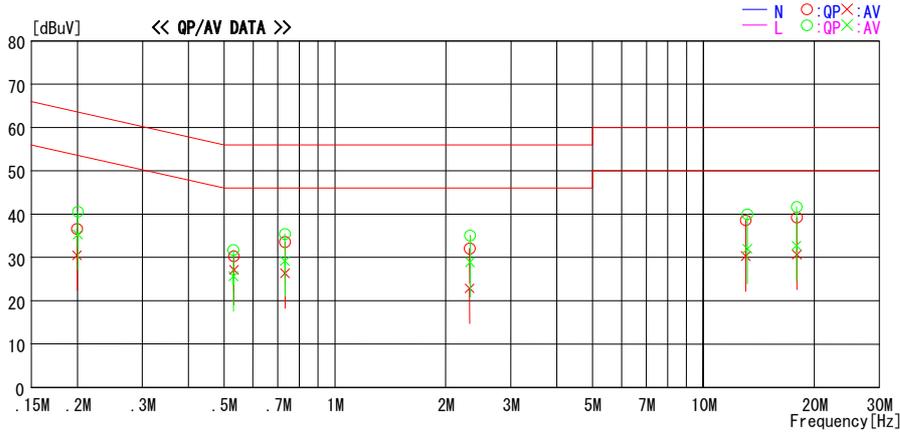

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.19960	36.4	30.3	0.2	36.6	30.5	63.6	53.6	27.0	23.1	N	
0.53220	30.0	26.8	0.3	30.3	27.1	56.0	46.0	25.7	18.9	N	
0.73272	33.3	26.1	0.3	33.6	26.4	56.0	46.0	22.4	19.6	N	
2.31944	31.5	22.3	0.5	32.0	22.8	56.0	46.0	24.0	23.2	N	
13.03890	37.2	28.9	1.4	38.6	30.3	60.0	50.0	21.4	19.7	N	
17.94765	37.5	28.9	1.7	39.2	30.6	60.0	50.0	20.8	19.4	N	
0.20056	40.3	35.0	0.3	40.6	35.3	63.6	53.6	23.0	18.4	L	
0.53036	31.4	25.3	0.3	31.7	25.6	56.0	46.0	24.3	20.4	L	
0.73143	35.1	28.8	0.3	35.4	29.1	56.0	46.0	20.6	16.9	L	
2.32615	34.6	28.4	0.5	35.1	28.9	56.0	46.0	20.9	17.1	L	
13.16490	38.6	30.6	1.4	40.0	32.0	60.0	50.0	20.0	18.0	L	
17.90785	40.0	31.0	1.7	41.7	32.7	60.0	50.0	18.3	17.3	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C. F [dB] (LISN LOSS + CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is round off to one or two decimal places, so some differences might be observed.

Conducted Emission
EDR, Tx, Ch: High
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040133	Engineer	: Takumi Shimada

Mode / Remarks: BT, 3-DH5, Tx 2480MHz, Power Supply(SONY)

LIMIT : FCC15.207 QP
FCC15.207 AV

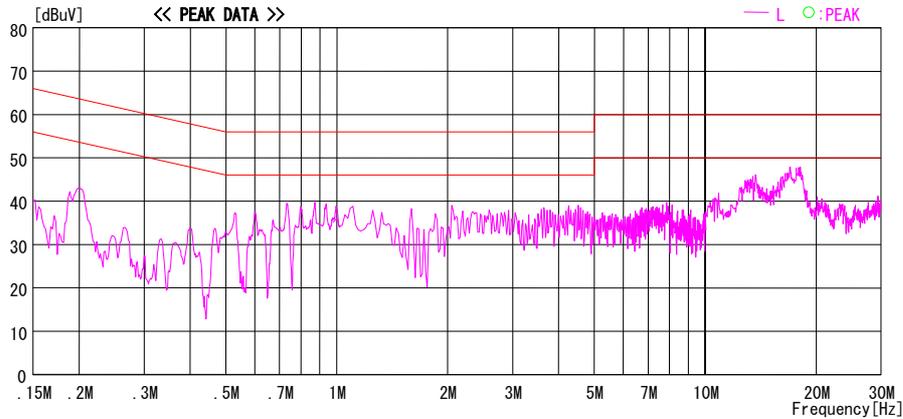
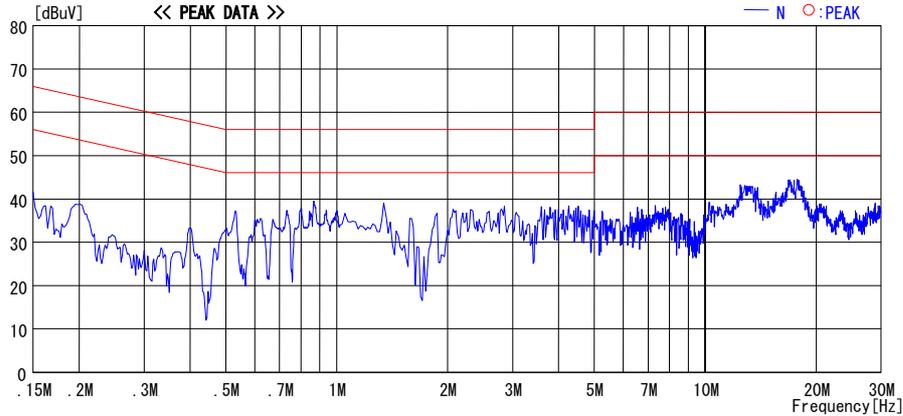


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C [dB] (LISN LOSS + CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

Conducted Emission
Rx, Ch: Mid
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040133	Engineer	: Takumi Shimada

Mode / Remarks: BT, Rx 2441MHz, Power Supply (SONY)

LIMIT : FCC15.107(a) QP
 FCC15.107(a) AV

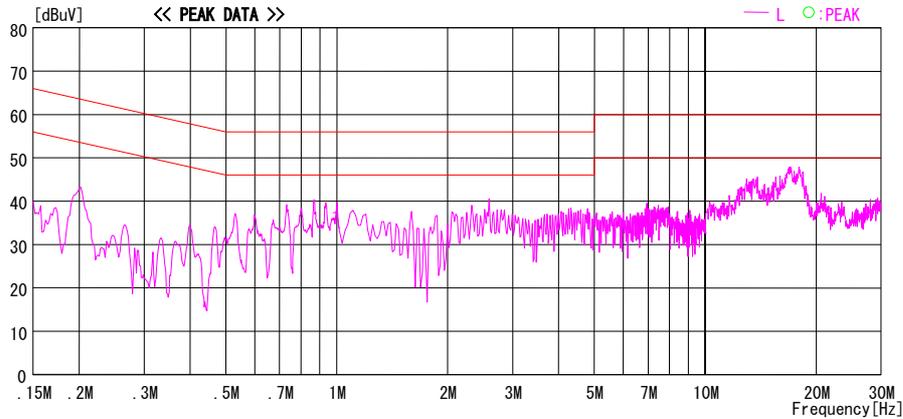
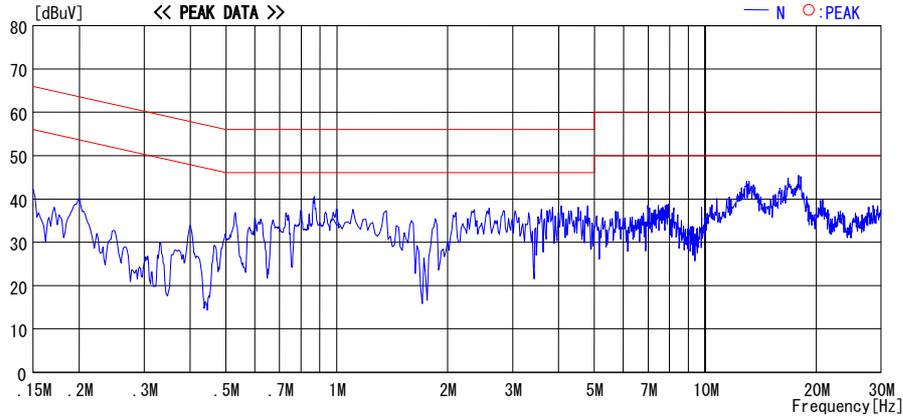


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C [dB] (LISN LOSS + CABLE LOSS)
 Except for the above table: adequate margin data below the limits.


Conducted Emission
Rx, Ch: Mid
(Power Supply: SONY)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2008/07/02

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION®3 Power : AC 120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 24 deg. C. / 69%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks: BT, Rx 2441MHz, Power Supply(SONY)

LIMIT : FCC15.107(a) QP
FCC15.107(a) AV

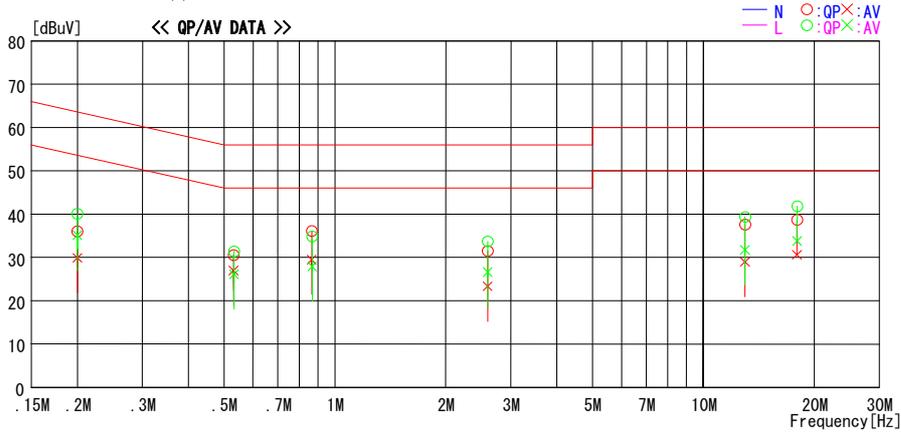

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.19999	35.8	29.7	0.2	36.0	29.9	63.6	53.6	27.6	23.7	N	
0.53108	30.3	26.7	0.3	30.6	27.0	56.0	46.0	25.5	19.0	N	
0.86478	35.7	29.1	0.4	36.1	29.5	56.0	46.0	19.9	16.5	N	
2.59979	31.0	22.8	0.5	31.5	23.3	56.0	46.0	24.5	22.7	N	
12.97808	36.2	27.6	1.4	37.6	29.0	60.0	50.0	22.4	21.0	N	
17.96334	37.0	28.9	1.7	38.7	30.6	60.0	50.0	21.3	19.4	N	
0.19998	39.9	34.9	0.2	40.1	35.1	63.6	53.6	23.5	18.5	L	
0.53251	31.1	25.9	0.3	31.4	26.2	56.0	46.0	24.6	19.9	L	
0.86782	34.4	27.5	0.4	34.8	27.9	56.0	46.0	21.2	18.1	L	
2.59889	33.2	26.1	0.5	33.7	26.6	56.0	46.0	22.3	19.4	L	
12.97620	38.0	30.4	1.4	39.4	31.8	60.0	50.0	20.6	18.3	L	
17.97684	40.1	32.1	1.7	41.8	33.8	60.0	50.0	18.2	16.3	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C. F [dB] (LISN LOSS + CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is round off to one or two decimal places, so some differences might be observed.

Conducted Emission
BDR, Tx, Ch: Low
(Power Supply: Delta)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHLO1	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040090	Engineer	: Takumi Shimada

Mode / Remarks: BT, DH5, Tx 2402MHz, Power Supply(Delta)

LIMIT : FCC15.207 QP
 FCC15.207 AV

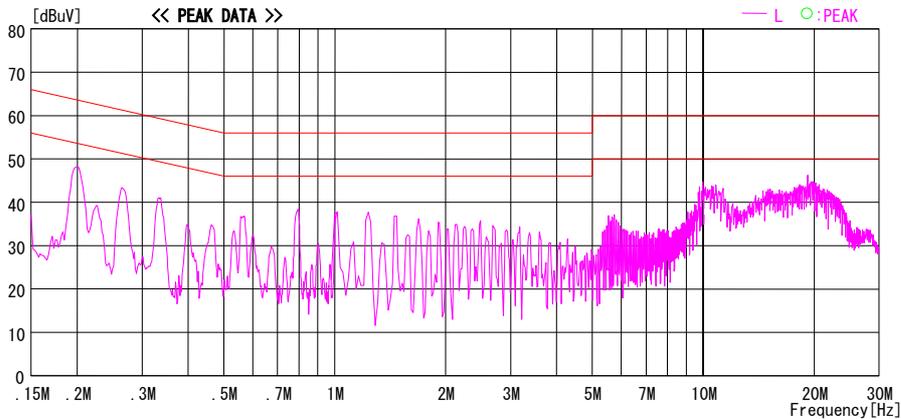
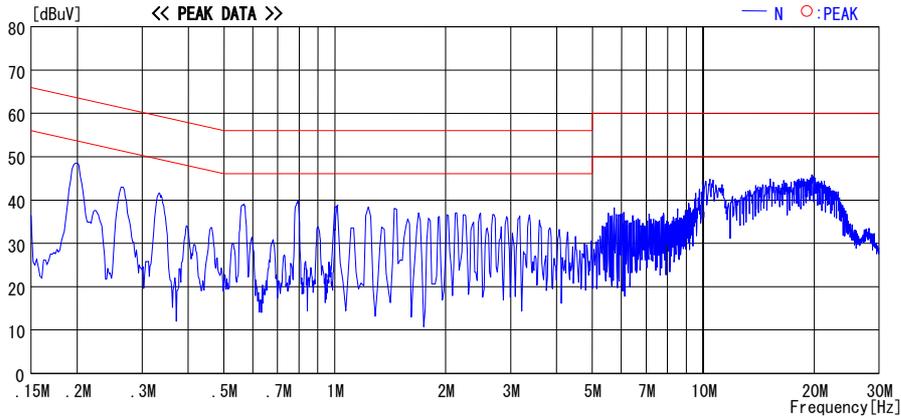


CHART: WITH FACTOR, Peak hold data. CALCURATION: RESULT[dBuV]=READING[dBuV]+C. F[db] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

Conducted Emission

**BDR, Tx, Ch: Mid
(Power Supply: Delta)**

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040090	Engineer	: Takumi Shimada

Mode / Remarks: BT, DH5, Tx 2441MHz, Power Supply(Delta)

LIMIT : FCC15.207 QP
FCC15.207 AV

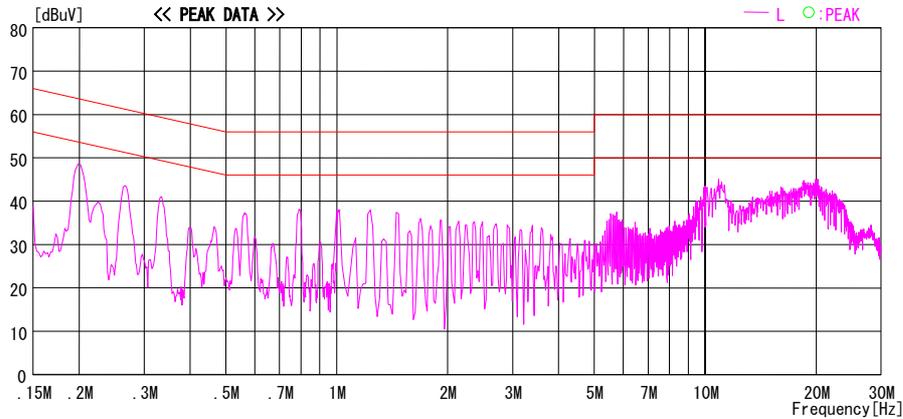
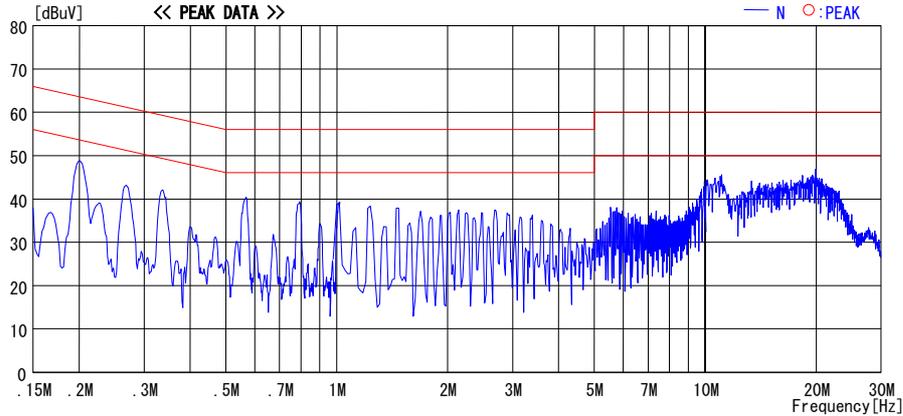


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
Except for the above table: adequate margin data below the limits.


Conducted Emission
BDR, Tx, Ch: Mid
(Power Supply: Delta)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2008/07/02

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION®3 Power : AC 120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 24 deg. C. / 69%
Serial No. : 1040090 Engineer : Takumi Shimada

Mode / Remarks: BT, DH5, Tx 2441MHz, Power Supply(Delta)

LIMIT : FCC15.207 QP
FCC15.207 AV

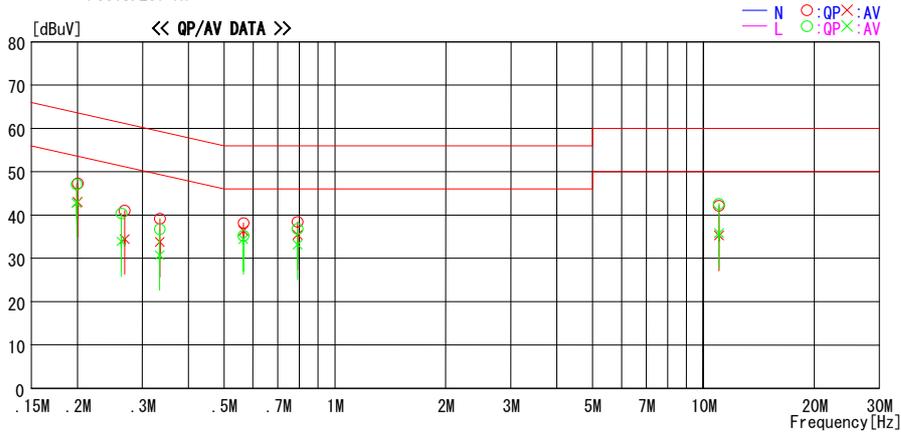

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.20041	47.0	42.7	0.3	47.3	43.0	63.6	53.6	16.3	10.6	N	
0.26876	40.7	34.1	0.3	41.0	34.4	61.2	51.2	20.2	16.8	N	
0.33495	38.8	33.4	0.3	39.1	33.7	59.3	49.3	20.2	15.6	N	
0.56545	37.9	36.0	0.3	38.2	36.3	56.0	46.0	17.8	9.7	N	
0.79125	38.0	35.1	0.4	38.4	35.5	56.0	46.0	17.6	10.5	N	
11.01960	40.9	34.0	1.2	42.1	35.2	60.0	50.0	17.9	14.8	N	
0.19891	46.8	42.6	0.2	47.0	42.8	63.7	53.7	16.7	10.9	L	
0.26327	40.1	33.6	0.3	40.4	33.9	61.3	51.3	20.9	17.4	L	
0.33451	36.4	30.5	0.3	36.7	30.8	59.3	49.3	22.6	18.6	L	
0.56396	34.9	34.1	0.3	35.2	34.4	56.0	46.0	20.8	11.6	L	
0.79189	36.4	32.8	0.4	36.8	33.2	56.0	46.0	19.2	12.8	L	
11.01778	41.4	34.6	1.2	42.6	35.8	60.0	50.0	17.4	14.2	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C. F [dB] (LISN LOSS + CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is round off to one or two decimal places, so some differences might be observed.

Conducted Emission
BDR, Tx, Ch: High
(Power Supply: Delta)

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040090	Engineer	: Takumi Shimada

Mode / Remarks: BT, DH5, Tx 2480MHz, Power Supply(Delta)

LIMIT : FCC15.207 QP
FCC15.207 AV

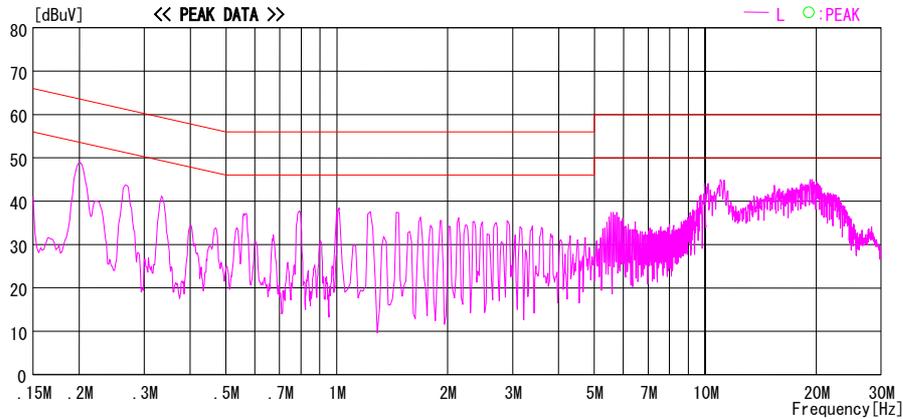
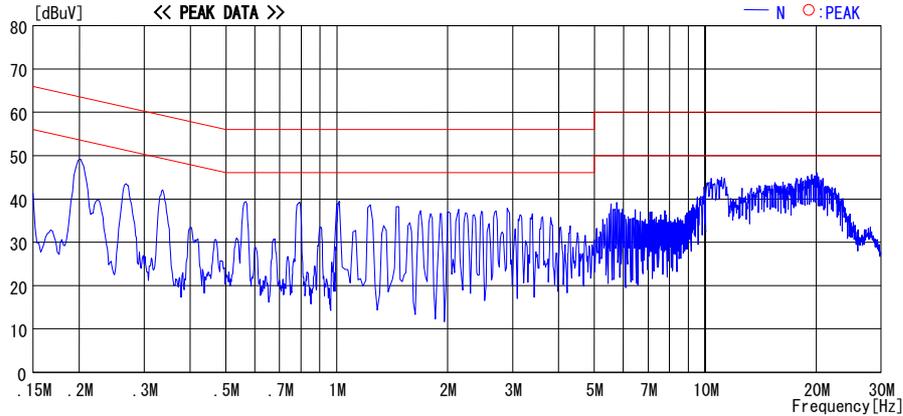


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

Conducted Emission
EDR, Tx, Ch: Low
(Power Supply: Delta)

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040090	Engineer	: Takumi Shimada

Mode / Remarks: BT, 3-DH5, Tx 2402MHz, Power Supply(Delta)

LIMIT : FCC15.207 QP
FCC15.207 AV

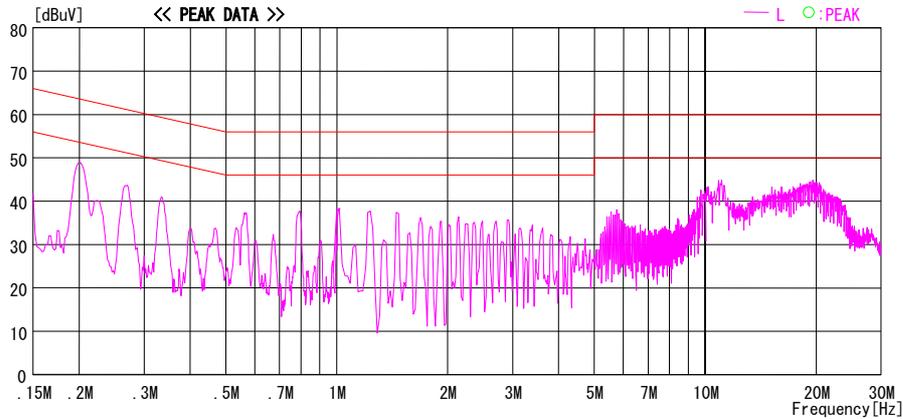
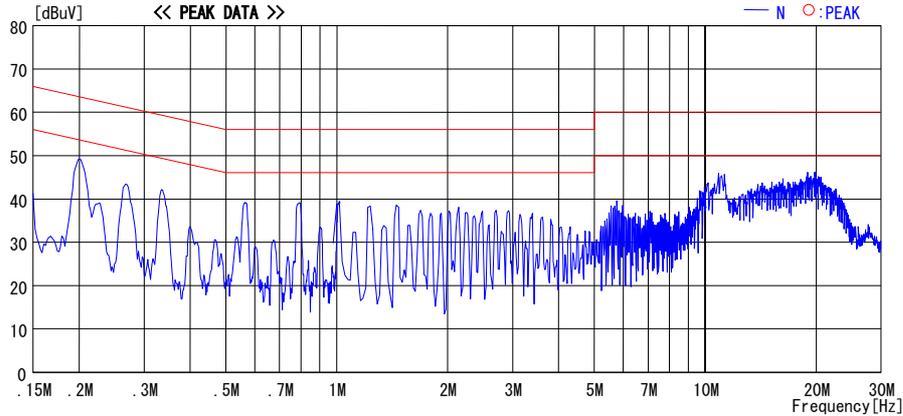


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

Conducted Emission
EDR, Tx, Ch: Mid
(Power Supply: Delta)

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040090	Engineer	: Takumi Shimada

Mode / Remarks: BT, 3-DH5, Tx 2441MHz, Power Supply(Delta)

LIMIT : FCC15.207 QP
FCC15.207 AV

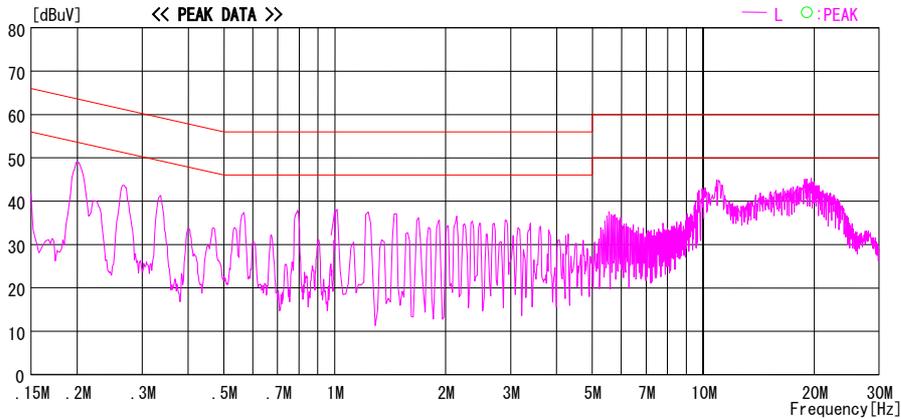
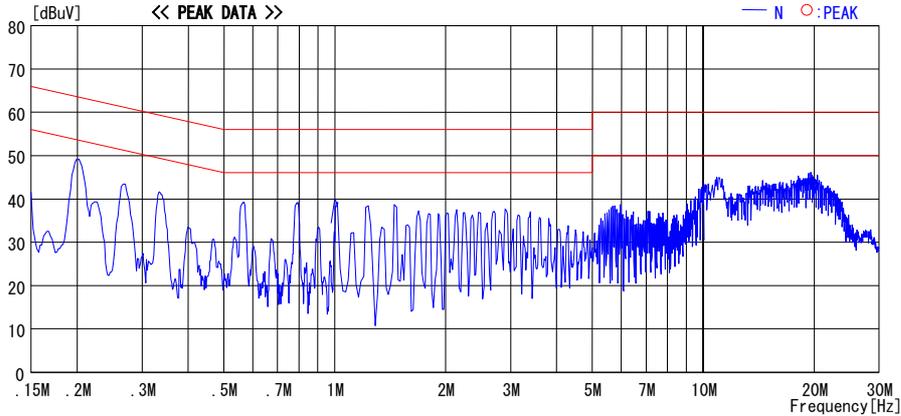


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.


Conducted Emission
EDR, Tx, Ch: Mid
(Power Supply: Delta)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2008/07/02

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION®3 Power : AC 120V / 60Hz
Model No. : CECHLO1 Temp./Humi. : 24 deg. C. / 69%
Serial No. : 1040090 Engineer : Takumi Shimada

Mode / Remarks: BT, 3-DH5, Tx 2441MHz, Power Supply(Delta)

LIMIT : FCC15.207 QP
FCC15.207 AV

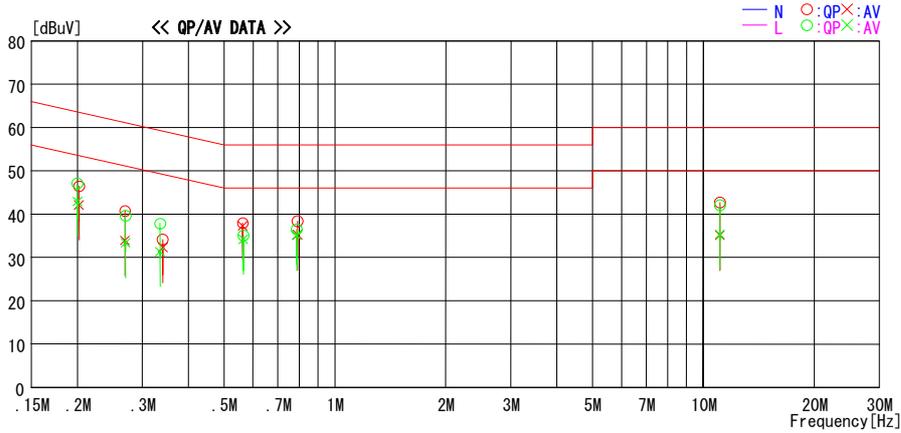

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.20228	46.1	41.8	0.3	46.4	42.1	63.5	53.5	17.1	11.4	N	
0.26915	40.4	33.6	0.3	40.7	33.9	61.1	51.1	20.4	17.2	N	
0.34062	33.8	32.0	0.3	34.1	32.3	59.2	49.2	25.1	16.9	N	
0.56253	37.6	37.0	0.3	37.9	37.3	56.0	46.0	18.1	8.7	N	
0.79153	37.9	34.8	0.4	38.3	35.2	56.0	46.0	17.7	10.8	N	
11.09665	41.5	33.9	1.2	42.7	35.1	60.0	50.0	17.3	14.9	N	
0.20019	46.7	42.6	0.3	47.0	42.9	63.6	53.6	16.6	10.7	L	
0.27017	39.3	33.0	0.3	39.6	33.3	61.1	51.1	21.5	17.8	L	
0.33531	37.5	31.0	0.3	37.8	31.3	59.3	49.3	21.5	18.0	L	
0.56447	34.8	33.9	0.3	35.1	34.2	56.0	46.0	20.9	11.8	L	
0.78768	36.0	34.7	0.4	36.4	35.1	56.0	46.0	19.6	10.9	L	
11.09535	40.9	34.1	1.2	42.1	35.3	60.0	50.0	17.9	14.7	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C. F [dB] (LISN LOSS + CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is round off to one or two decimal places, so some differences might be observed.

Conducted Emission
EDR, Tx, Ch: High
(Power Supply: Delta)

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040090	Engineer	: Takumi Shimada

Mode / Remarks: BT, 3-DH5, Tx 2480Hz, Power Supply(Delta)

LIMIT : FCC15.207 QP
FCC15.207 AV

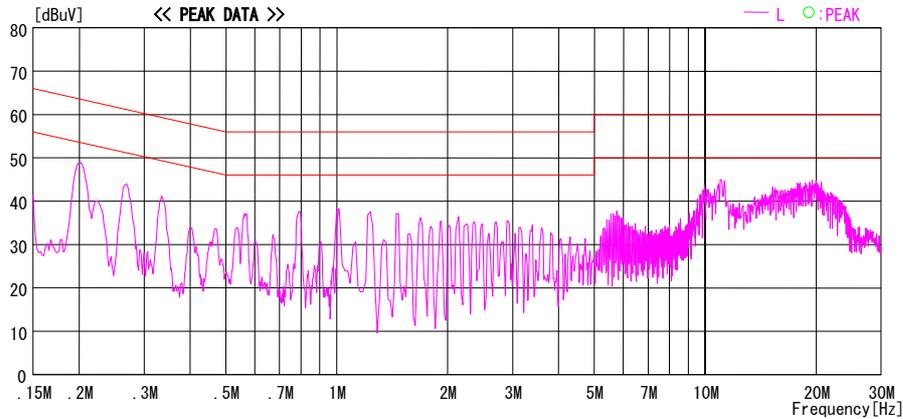
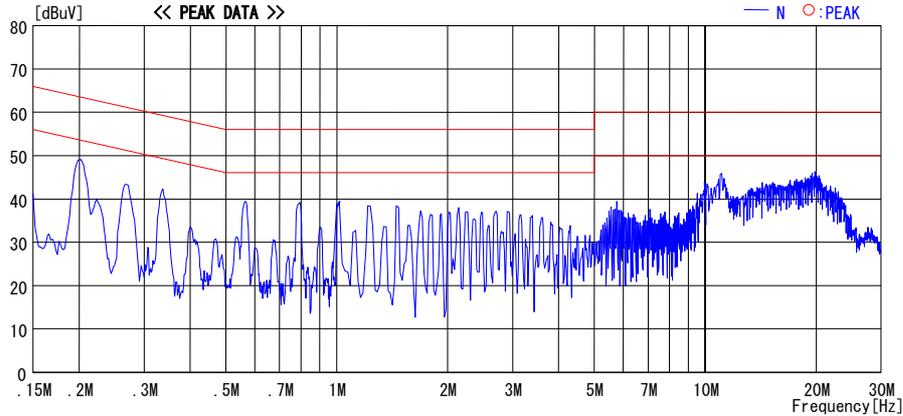


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

Conducted Emission

**Rx, Ch: Mid
(Power Supply: Delta)**

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2008/07/02

Company	: Sony Computer Entertainment Inc.	Report No.	: 28KE0107-HO-01
Kind of EUT	: PLAYSTATION®3	Power	: AC 120V / 60Hz
Model No.	: CECHL01	Temp./Humi.	: 24 deg. C. / 69%
Serial No.	: 1040090	Engineer	: Takumi Shimada

Mode / Remarks: BT, Rx 244Hz, Power Supply(Delta)

LIMIT : FCC15.107 QP
FCC15.107 AV

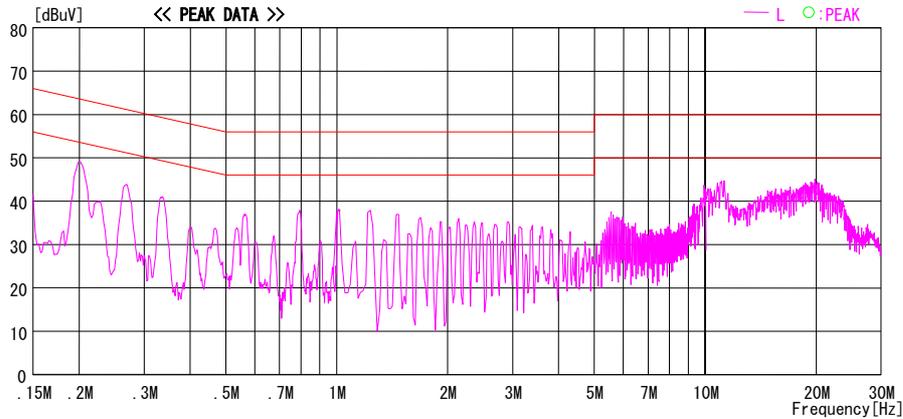
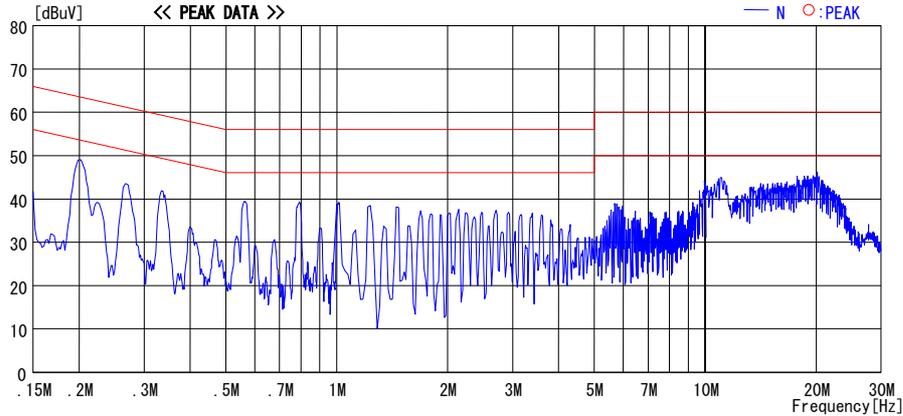


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
Except for the above table: adequate margin data below the limits.


Conducted Emission
Rx, Ch: Mid
(Power Supply: Delta)
DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2008/07/02

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION®3 Power : AC 120V / 60Hz
Model No. : CECHLO1 Temp./Humi. : 24 deg. C. / 69%
Serial No. : 1040090 Engineer : Takumi Shimada

Mode / Remarks: BT, Rx 2441Hz, Power Supply(Delta)

LIMIT : FCC15.107 QP
FCC15.107 AV

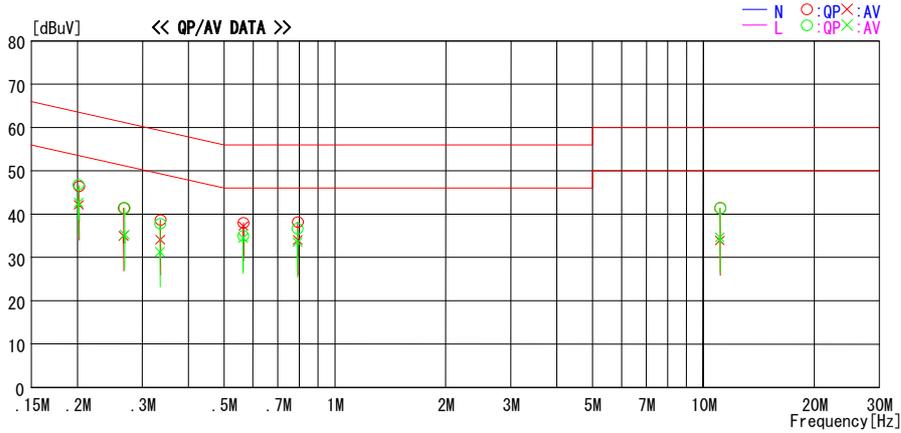

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.20225	46.1	41.8	0.3	46.4	42.1	63.5	53.5	17.1	11.4	N	
0.26711	41.1	34.7	0.3	41.4	35.0	61.2	51.2	19.8	16.2	N	
0.33612	38.3	33.8	0.3	38.6	34.1	59.3	49.3	20.7	15.2	N	
0.56431	37.7	36.9	0.3	38.0	37.2	56.0	46.0	18.0	8.8	N	
0.79256	37.8	33.6	0.4	38.2	34.0	56.0	46.0	17.9	12.0	N	
11.09765	40.2	32.7	1.2	41.4	33.9	60.0	50.0	18.6	16.1	N	
0.20145	46.5	42.4	0.3	46.8	42.7	63.6	53.6	16.8	10.9	L	
0.26866	41.1	34.9	0.3	41.4	35.2	61.2	51.2	19.8	16.0	L	
0.33555	37.5	31.0	0.3	37.8	31.3	59.3	49.3	21.5	18.0	L	
0.56386	34.7	34.1	0.3	35.0	34.4	56.0	46.0	21.0	11.6	L	
0.79164	36.2	33.1	0.4	36.6	33.5	56.0	46.0	19.4	12.5	L	
11.09785	40.2	33.4	1.2	41.4	34.6	60.0	50.0	18.6	15.4	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C. F [dB] (LISN LOSS + CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is round off to one or two decimal places, so some differences might be observed.

Carrier Frequency Separation

		UL Japan, Inc	
		Head Office EMC Lab. No.7 shielded room	
Company	Sony Computer Entertainment Inc.	Regulation	FCC Part15 Subpart C 15.247(a)(1) / RSS-210 A8.1(b)
Equipment	PLAYSTATION®3	Test Distance	-
Model	CECHL01	Date	07/01/2008
S/N	1040132	Temperature	24deg.C.
Power	AC 120V / 60Hz	Humidity	57%
Mode	Bluetooth Tx Hopping On / Inquiry DH5 / 3-DH5	Engineer	Satofumi Matsuyama

[BDR]


Ch	Freq. [MHz]	Channel separation [MHz]	Limit
Low	2402.0	1.030	> 0.577 [MHz] (two-thirds of 20dB Bandwidth (0.866 [MHz])) or 25[kHz] (whichever is grater)
Mid	2441.0	1.005	> 0.577 [MHz] (two-thirds of 20dB Bandwidth (0.866 [MHz])) or 25[kHz] (whichever is grater)
High	2480.0	1.005	> 0.578 [MHz] (two-thirds of 20dB Bandwidth (0.868 [MHz])) or 25[kHz] (whichever is grater)
Inquiry	2441.0	2.000	> 0.514 [MHz] (two-thirds of 20dB Bandwidth (0.772 [MHz])) or 25[kHz] (whichever is grater)

[EDR]


Ch	Freq. [MHz]	Channel separation [MHz]	Limit
Low	2402.0	1.005	> 0.835 [MHz] (two-thirds of 20dB Bandwidth (1.252 [MHz])) or 25[kHz] (whichever is grater)
Mid	2441.0	0.990	> 0.834 [MHz] (two-thirds of 20dB Bandwidth (1.251 [MHz])) or 25[kHz] (whichever is grater)
High	2480.0	1.000	> 0.833 [MHz] (two-thirds of 20dB Bandwidth (1.250 [MHz])) or 25[kHz] (whichever is grater)

UL Japan, Inc.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

Carrier Frequency Separation
BDR

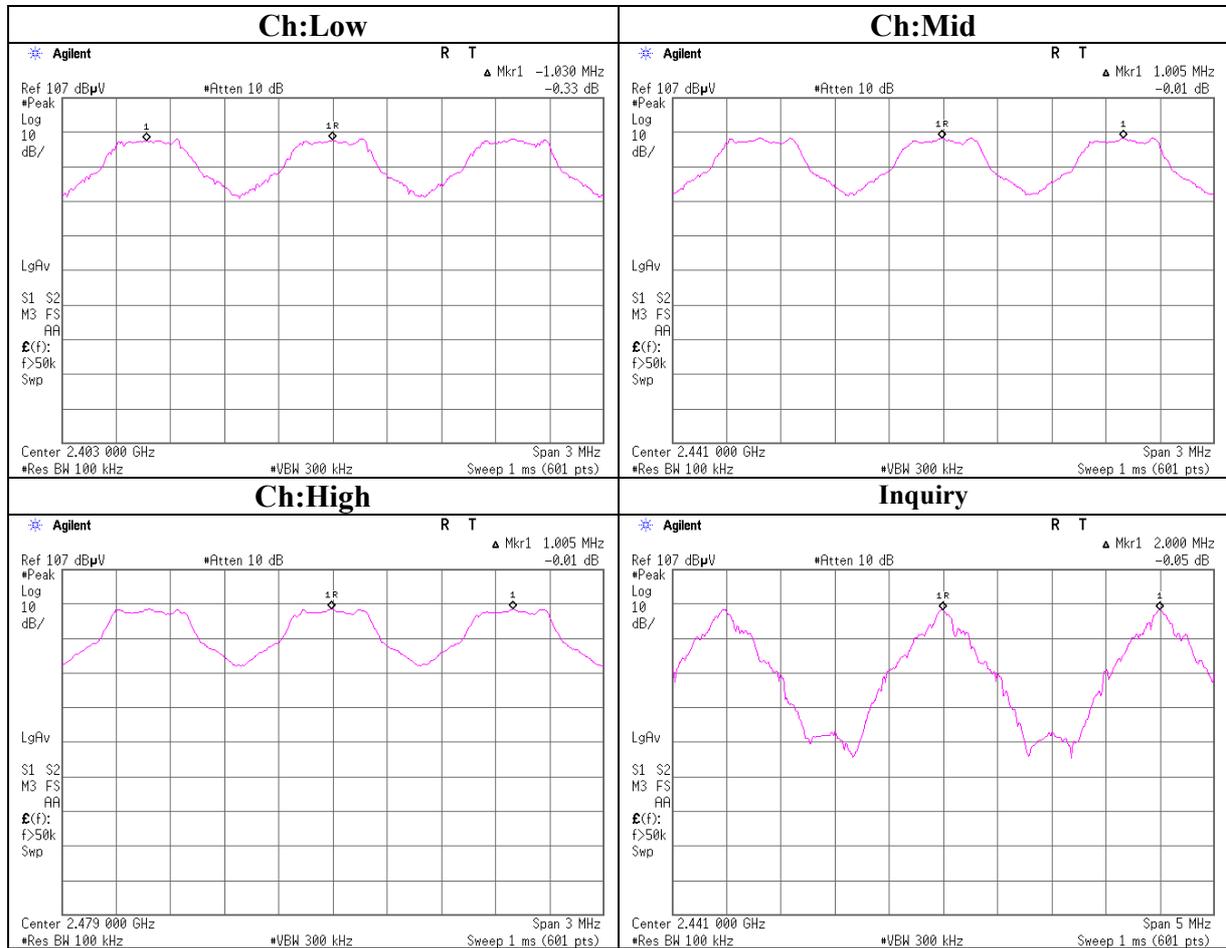

Carrier Frequency Separation EDR

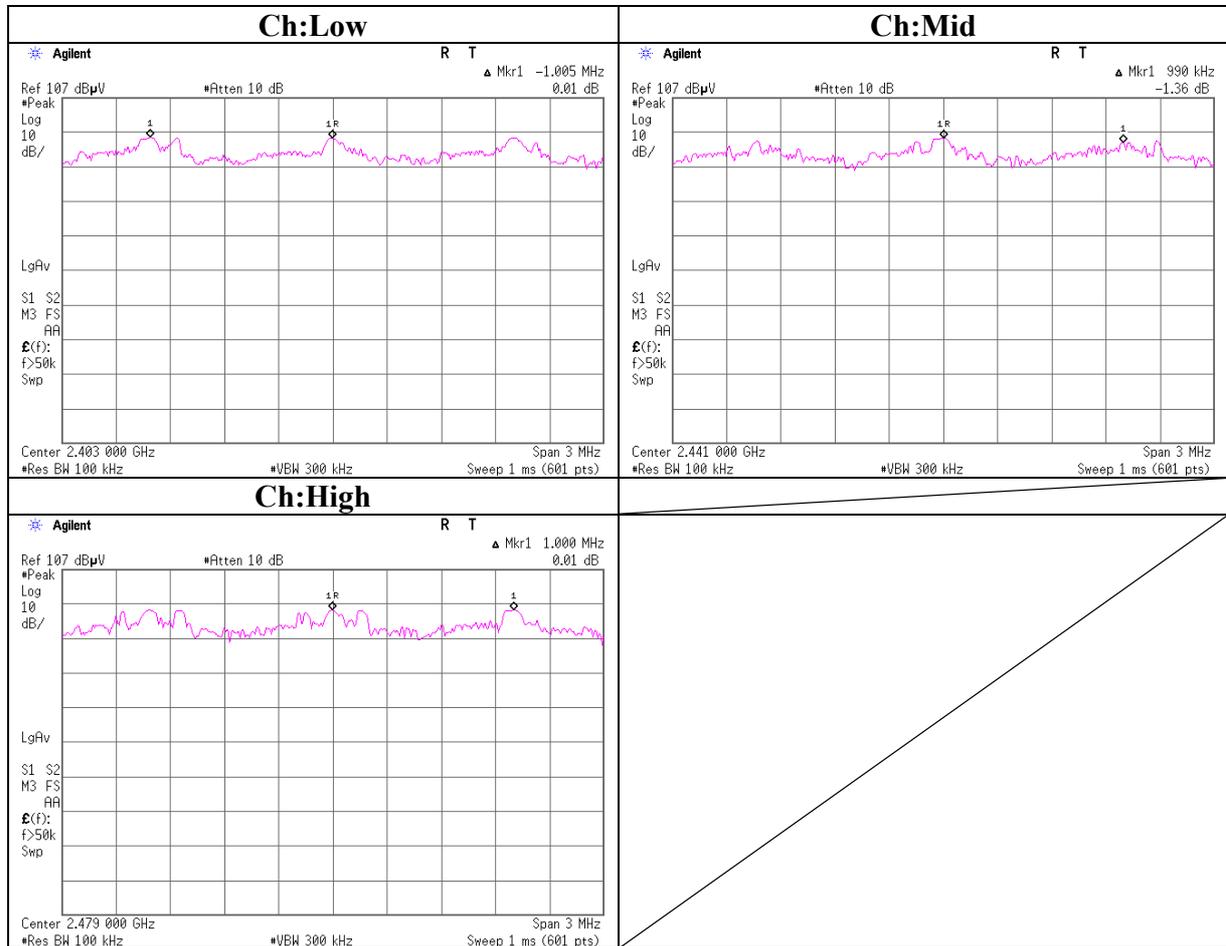

20dB Bandwidth

Company	Sony Computer Entertainment Inc.	UL Japan, Inc	
Equipment	PLAYSTATION®3	Head Office EMC Lab. No.7 shielded room	
Model	CECHL01	Regulation	FCC Part15 Subpart C 15.247(a)(1) / RSS-210 A8.1(a)
S/N	1040132	Test Distance	-
Power	AC 120V / 60Hz	Date	07/01/2008
Mode	Bluetooth Tx Hopping Off / Inquiry	Temperature	24deg.C.
	DH5 / 3-DH5	Humidity	57%
		Engineer	Satofumi Matsuyama


[BDR]

Ch	Freq. [MHz]	20dB Bandwidth [MHz]	Limit [MHz]
Low	2402.0	0.866	-
Mid	2441.0	0.866	-
High	2480.0	0.868	-
Inquiry	2441.0	0.772	-


[EDR]

Ch	Freq. [MHz]	20dB Bandwidth [MHz]	Limit [MHz]
Low	2402.0	1.252	-
Mid	2441.0	1.251	-
High	2480.0	1.250	-

**20dB Bandwidth
BDR**

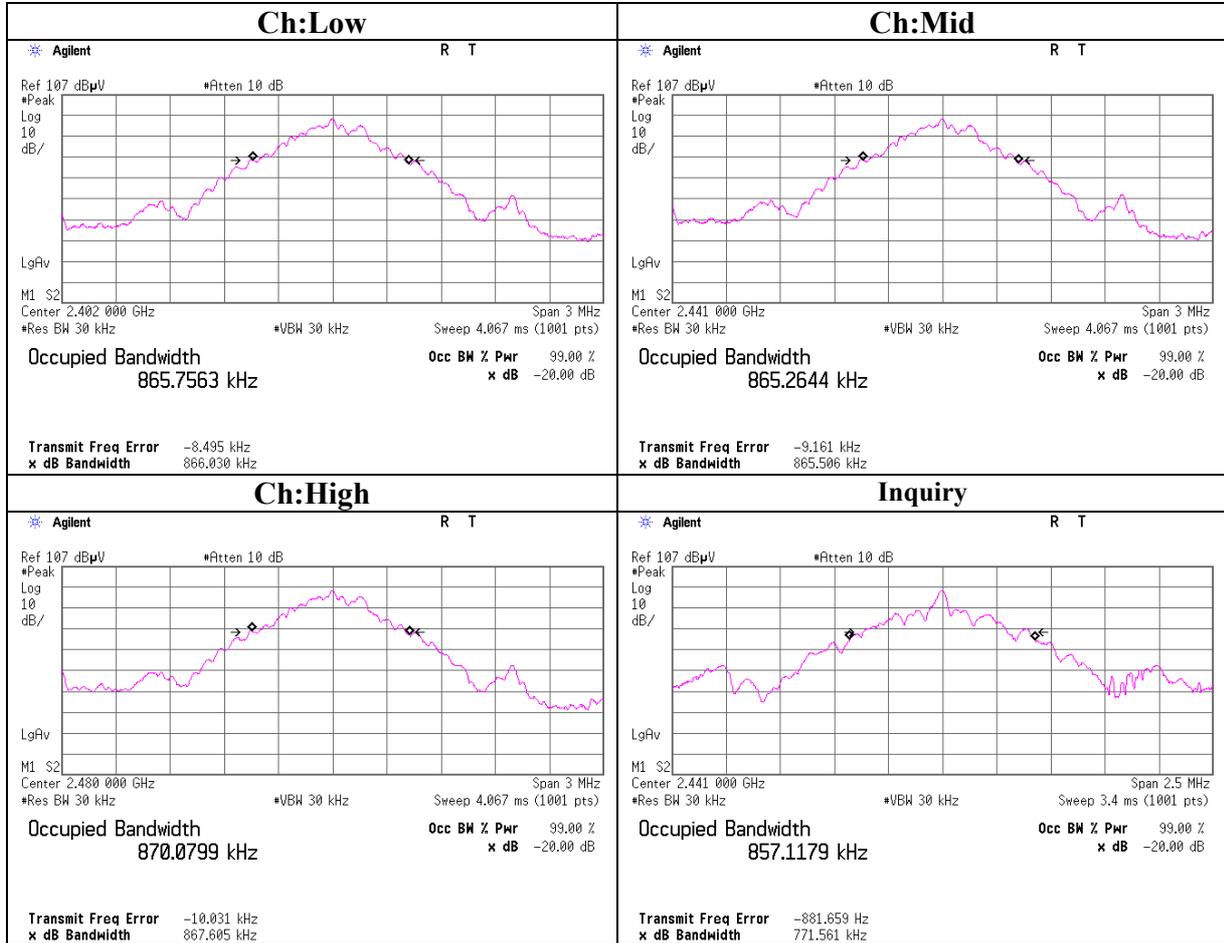

20dB Bandwidth
EDR

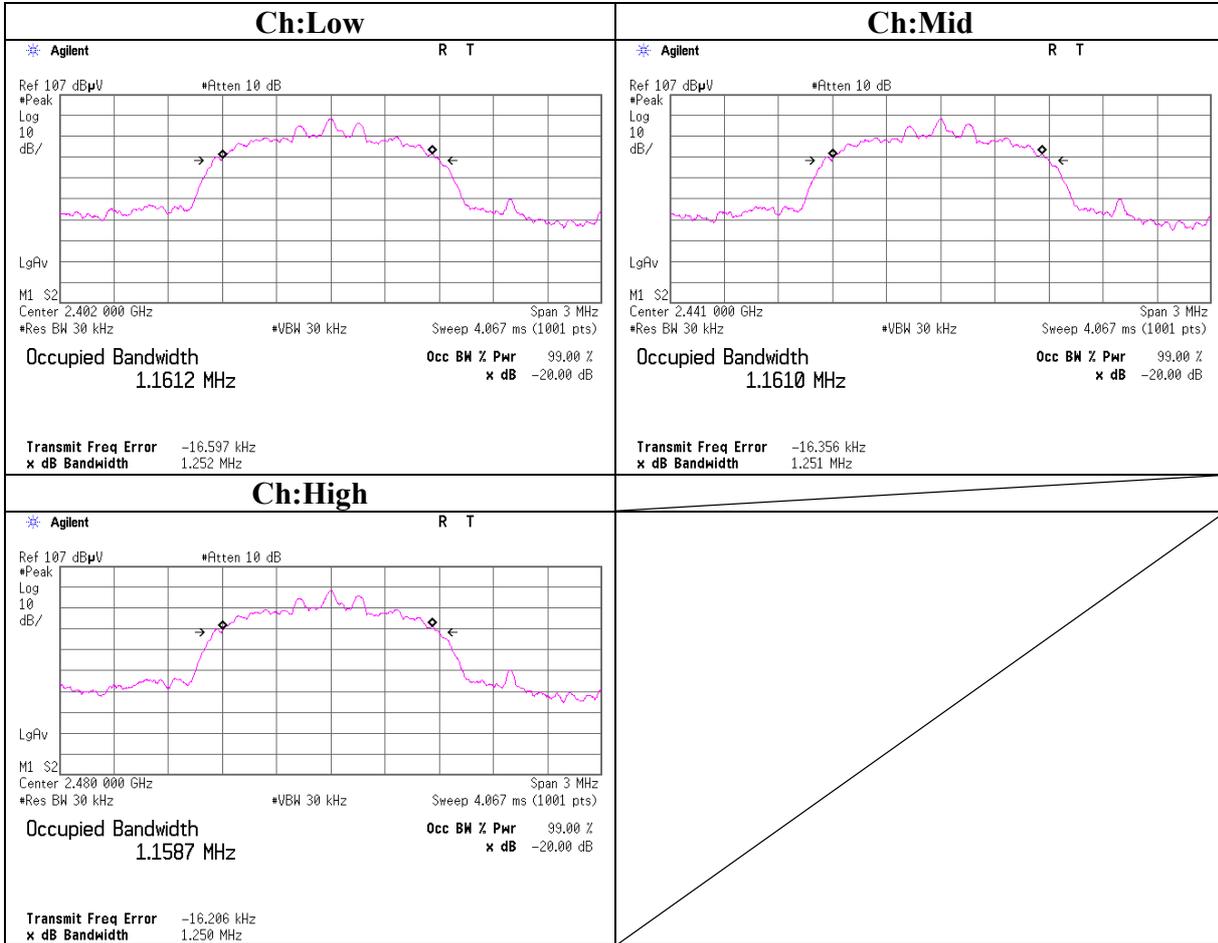

Number of Hopping Frequency

Company Sony Computer Entertainment Inc.
Equipment PLAYSTATION®3
Model CECHL01
S/N 1040132
Power AC 120V / 60Hz
Mode Bluetooth Tx Hopping On / Inquiry
DH5 / 3-DH5

UL Japan, Inc.
Head Office EMC Lab. No.7 Shielded room
Regulation FCC Part15 Subpart C 15.247(a)(1)(iii) / RSS-210 A8.1(d)
Test Distance -
Date 07/01/2008
Temperature 24deg.C.
Humidity 57%
Engineer Satofumi Matsuyama

[BDR]


Mode	Number of channel	Limit
	[times]	[times]
Tx(Hoppng on)	79	≥ 15

[EDR]


Mode	Number of channel	Limit
	[times]	[times]
Tx(Hoppng on)	79	≥ 15

Mode	Number of channel	Limit
	[times]	[times]
Inquiry	32	≥ 15

Number of Hopping Frequency
BDR

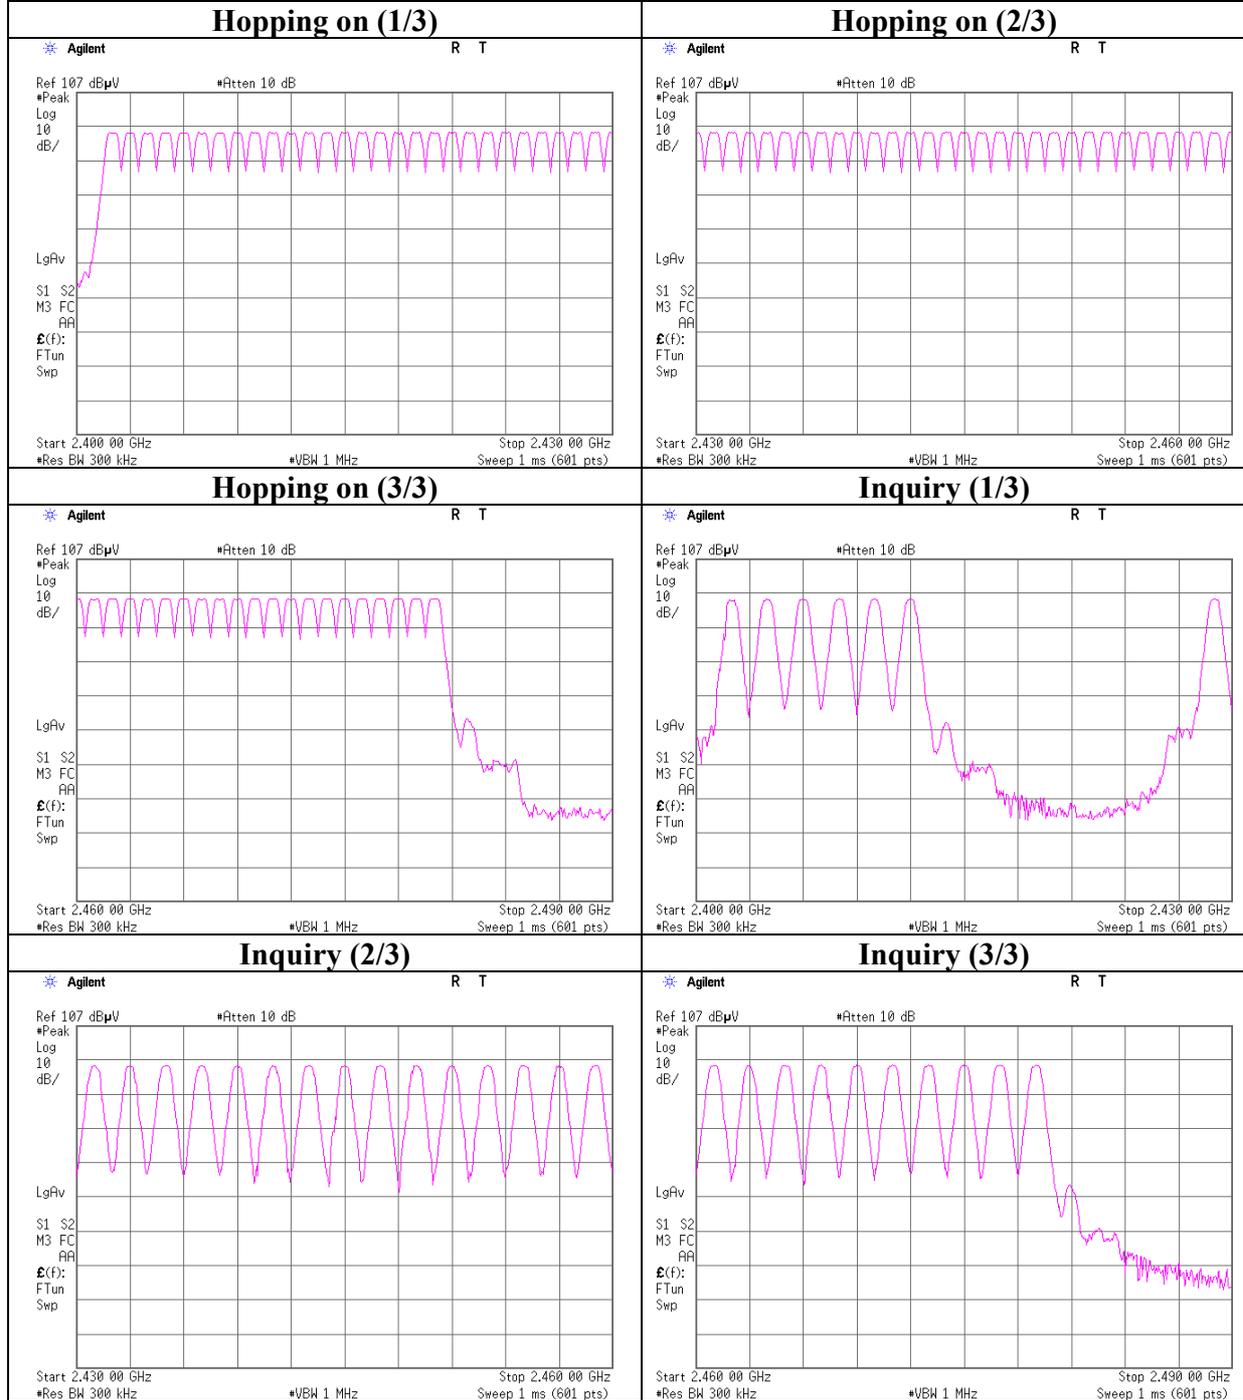

Number of Hopping Frequency
EDR

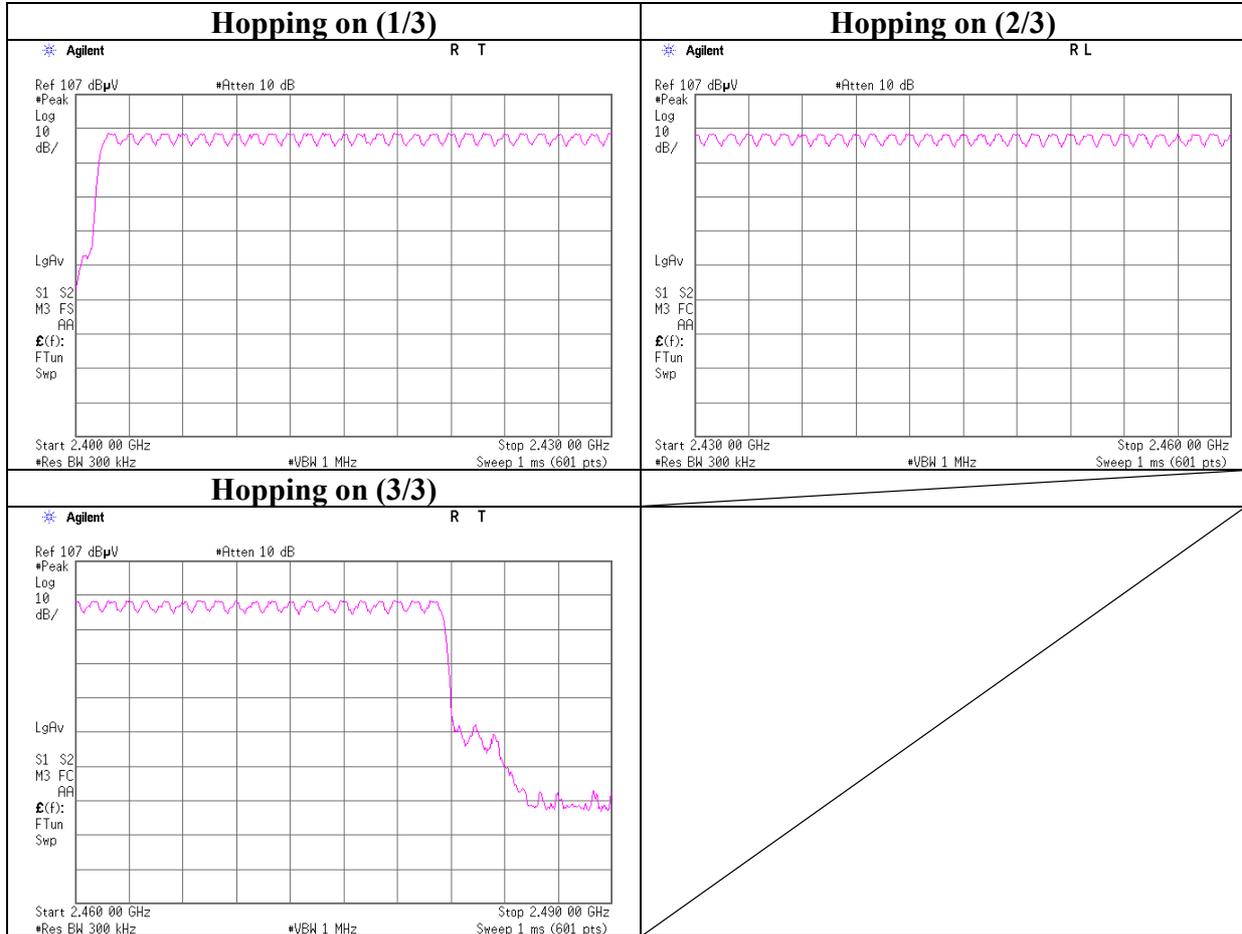

Dwell time

UL Japan, Inc.

Head Office EMC Lab. No.7 Shielded room

Company	Sony Computer Entertainment Inc.	Regulation	FCC Part15 Subpart C 15.247(a)(1)(iii) / RSS-210 A8.1(d)
Equipment	PLAYSTATION®3	Test Distance	-
Model	CECHL01	Date	07/01/2008
S/N	1040132	Temperature	24deg.C.
Power	AC 120V / 60Hz	Humidity	57%
Mode	Bluetooth Tx Hopping On / Inquiry	Engineer	Satofumi Matsuyama
	DH1/DH3/DH5/ 3-DH1 / 3-DH3 / 3-DH5		

[BDR]

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8(32 Hopping x 0.4)second period	Length of transmission time [msec]	Result [msec]	Limit [msec]
DH1	50 times / 5 sec. x 31.6 sec. = 316 times	0.540	171	400
DH3	25 times / 5 sec. x 31.6 sec. = 158 times	1.800	284	400
DH5	17 times / 5 sec. x 31.6 sec. = 108 times	3.042	329	400
Inquiry	100 times / 1 sec. x 12.8 sec. = 1280 times	0.241	308	400

[EDR]

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8(32 Hopping x 0.4)second period	Length of transmission time [msec]	Result [msec]	Limit [msec]
3-DH1	50 times / 5 sec. x 31.6 sec. = 316 times	0.558	176	400
3-DH3	26 times / 5 sec. x 31.6 sec. = 165 times	1.810	299	400
3-DH5	17 times / 5 sec. x 31.6 sec. = 108 times	3.067	331	400

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124


Dwell time
BDR

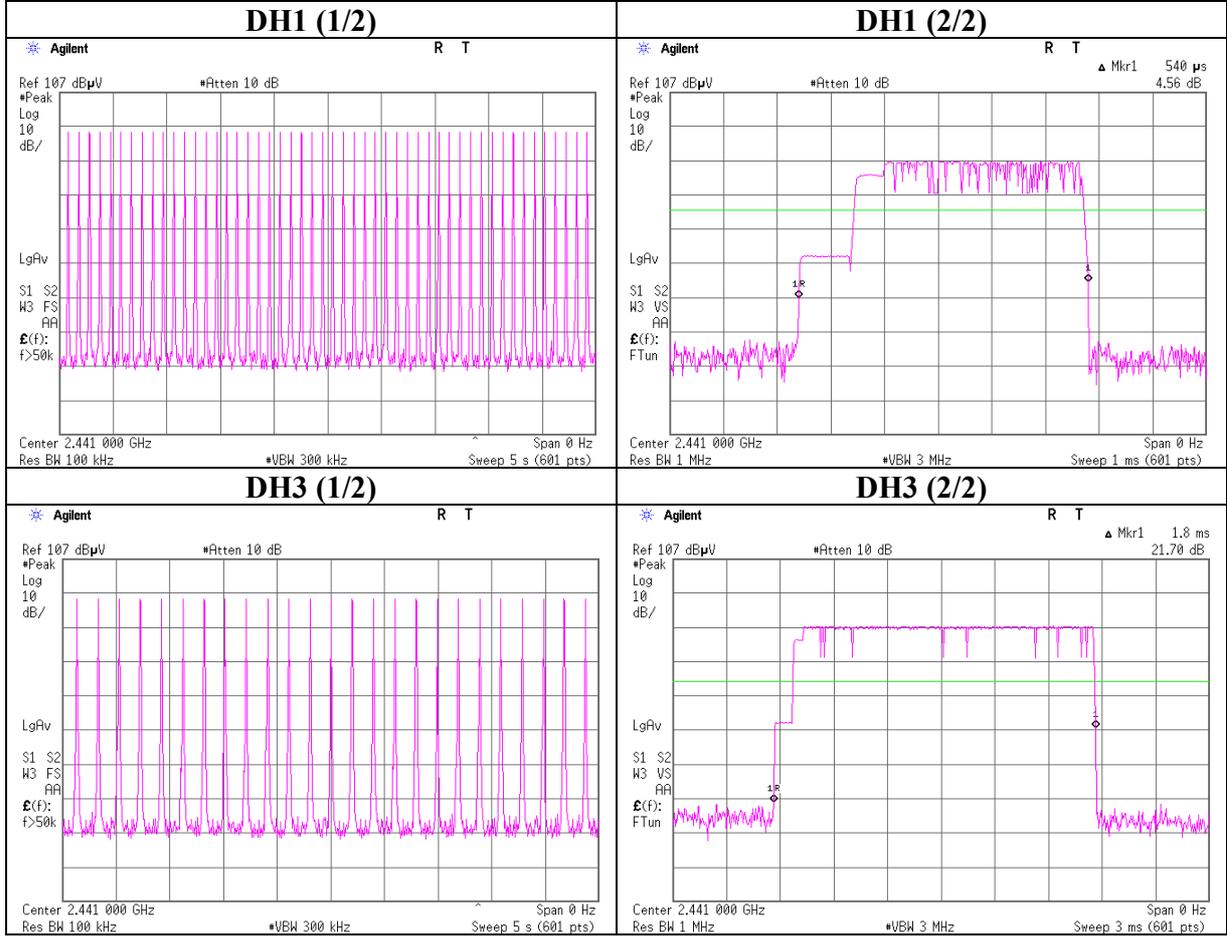


**Dwell time
BDR**

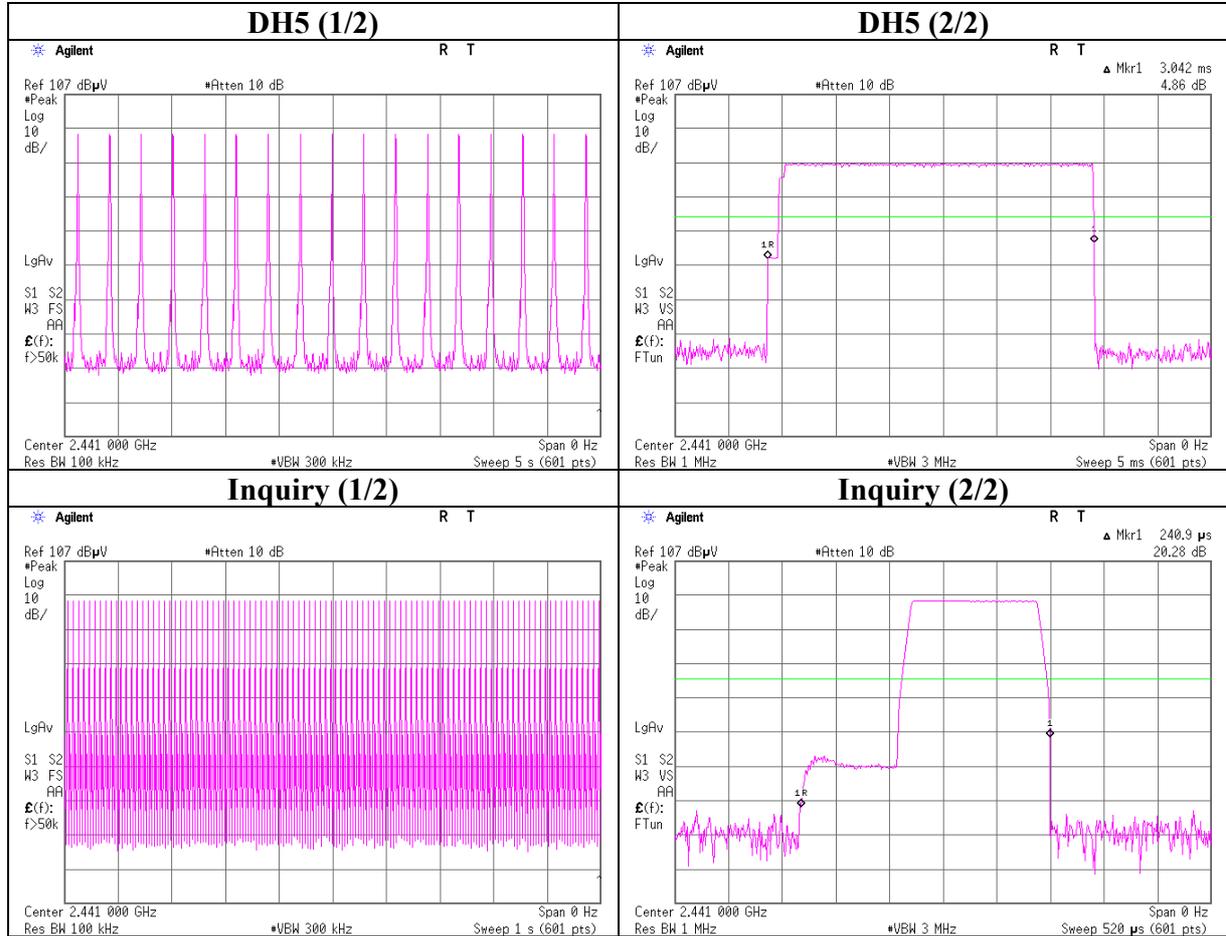

Dwell time
EDR

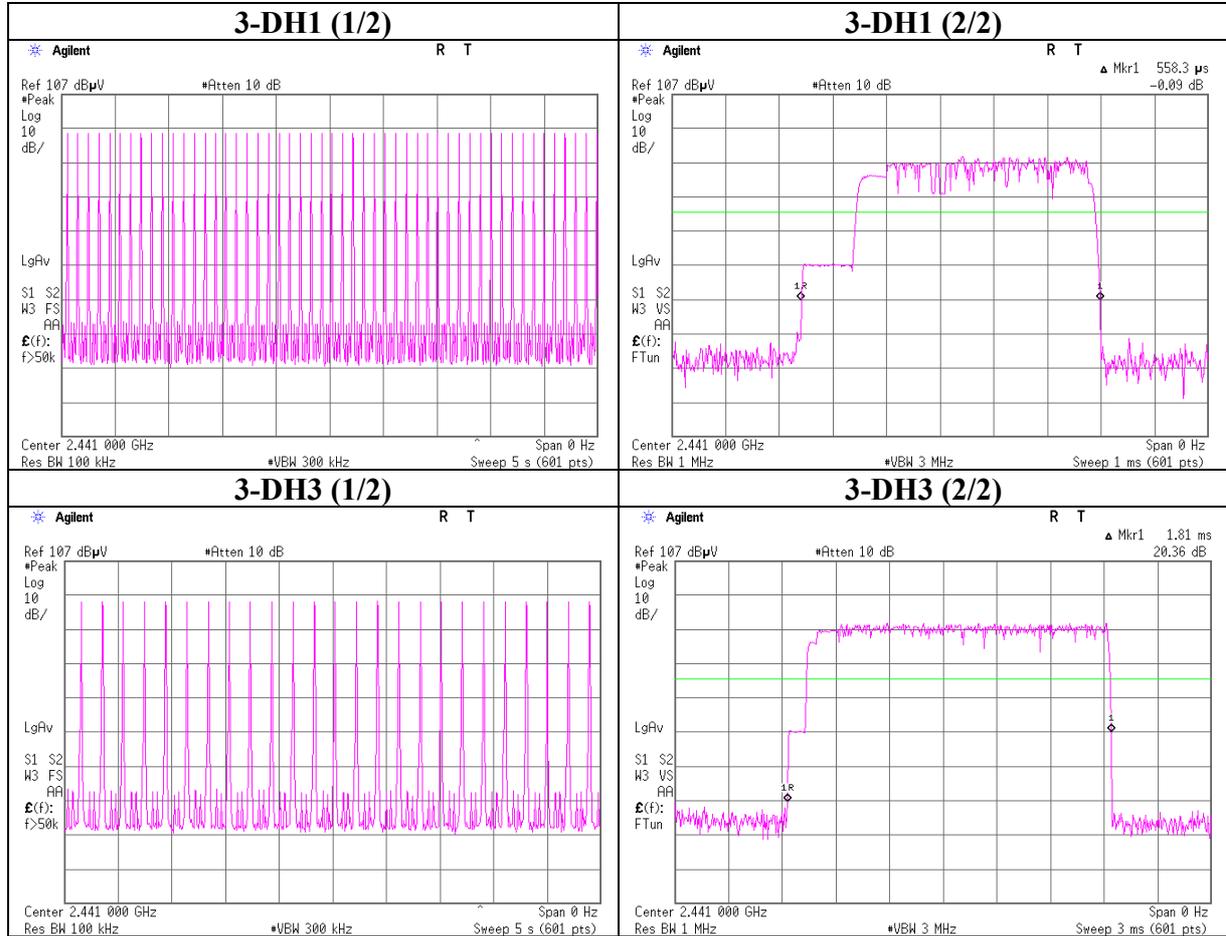

Dwell time
EDR

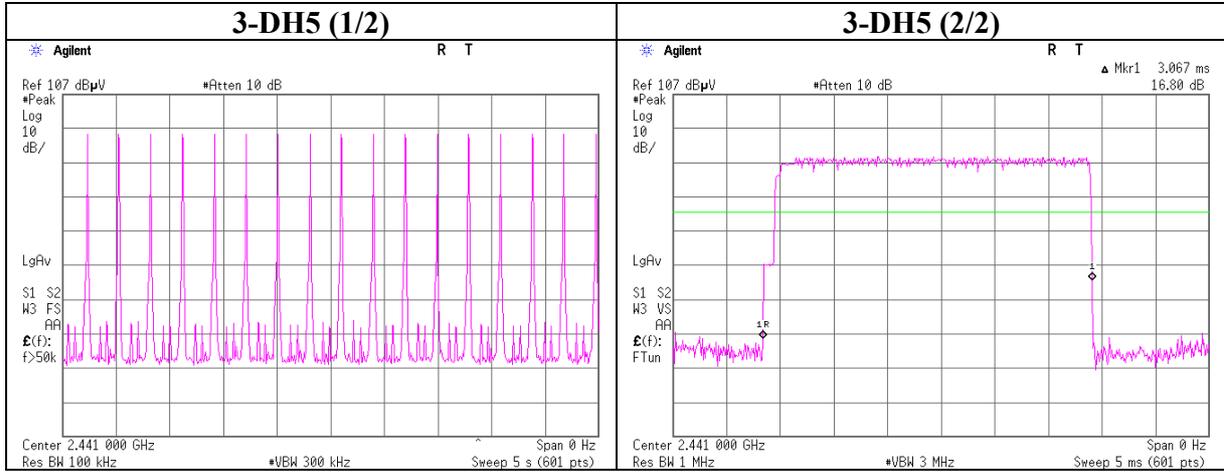

Maximum Peak Output Power

		UL Japan, Inc.	
Company	Sony Computer Entertainment Inc.	Head Office EMC Lab. No.2 Measurement room	
Equipment	PLAYSTATION®3	Regulation	FCC15.247(b)(1) / RSS-210 A8.4(2)
Model	CECHL01	Test Distance	-
S/N	1040132	Date	06/17/2008
Power	AC 120V / 60Hz	Temperature	25 deg.C.
Mode	Bluetooth Tx Hopping Off	Humidity	54 %
	DH5 / 2-DH5 / 3-DH5 / Inquiry	Engineer	Takayuki Shimada

DH5

Ch	Freq. [MHz]	P/M (PK) Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
Low	2402.0	-10.24	0.60	10.04	0.40	1.10	20.97	125	20.57
Mid	2441.0	-10.15	0.60	10.04	0.49	1.12	20.97	125	20.48
High	2480.0	-10.12	0.60	10.04	0.52	1.13	20.97	125	20.45
Inquiry	2441.0	-10.13	0.60	10.04	0.51	1.12	20.97	125	20.46

2-DH5

Ch	Freq. [MHz]	P/M (PK) Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
Low	2402.0	-9.27	0.60	10.04	1.37	1.37	20.97	125	19.60
Mid	2441.0	-9.45	0.60	10.04	1.19	1.32	20.97	125	19.78
High	2480.0	-9.56	0.60	10.04	1.08	1.28	20.97	125	19.89

3-DH5

Ch	Freq. [MHz]	P/M (PK) Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
Low	2402.0	-9.23	0.60	10.04	1.41	1.38	20.97	125	19.56
Mid	2441.0	-9.39	0.60	10.04	1.25	1.33	20.97	125	19.72
High	2480.0	-9.52	0.60	10.04	1.12	1.29	20.97	125	19.85

Sample Calculation:

Result = Reading + Cable Loss (supplied by customer) + Attenuator

*The test result is round off to one or two decimal places, so some differences might be observed.

*Compared to UL Japan, Test Report No. 28KE0107-HO-01-B for the original model, difference in Maximum Peak Output Power is within +/- 0.5dB.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Radiated Spurious Emission (below 1GHz)
BDR, Tx, Ch: Low
(Power Supply: SONY)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/06/30

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION=3 Power : AC120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 22deg. C. / 72%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks : BT, Tx 2402MHz, DH5, Max-axis(Hor:X-axis, Ver:Y-axis), Power Supply(SONY)

LIMIT : FCC15.247(d) 3m, below 1GHz:QP
All other spurious emissions were less than 20dB for the limit.

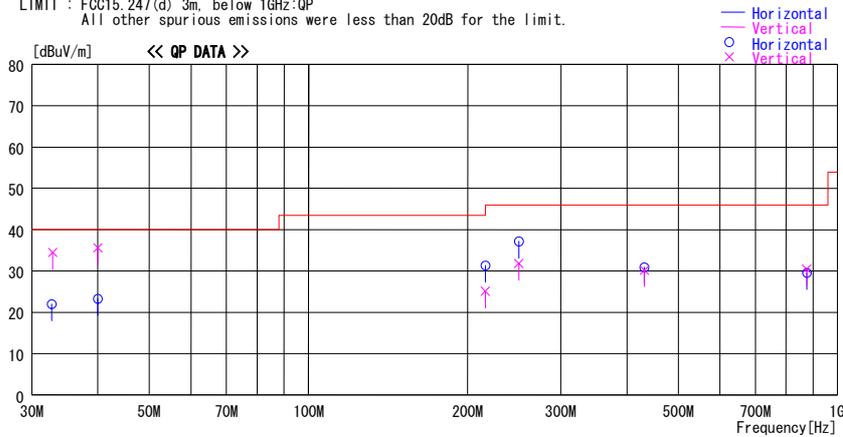

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
32.687	26.4	QP	17.5	-21.9	22.0	178	291	Hori.	40.0	18.0	
32.847	38.9	QP	17.5	-21.9	34.5	120	100	Vert.	40.0	5.6	
39.994	31.8	QP	13.4	-21.9	23.3	292	291	Hori.	40.0	16.7	
40.008	44.0	QP	13.4	-21.8	35.6	0	100	Vert.	40.0	4.4	
215.999	34.2	QP	16.8	-19.7	31.3	43	100	Hori.	43.5	12.2	
215.999	28.0	QP	16.8	-19.7	25.1	0	100	Vert.	43.5	18.4	
250.003	39.3	QP	17.1	-19.2	37.2	142	140	Hori.	46.0	8.8	
250.001	33.9	QP	17.1	-19.2	31.8	203	100	Vert.	46.0	14.2	
431.999	32.6	QP	17.4	-19.2	30.8	154	100	Hori.	46.0	15.2	
431.998	32.0	QP	17.4	-19.2	30.2	320	144	Vert.	46.0	15.8	
875.028	24.6	QP	21.8	-16.8	29.6	243	100	Hori.	46.0	16.4	
875.016	25.5	QP	21.8	-16.8	30.5	299	130	Vert.	46.0	15.5	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)
BDR, Tx, Ch: Mid
(Power Supply: SONY)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/06/30

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION=3 Power : AC120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 22deg. C. / 72%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks : BT, Tx 2441MHz, DH5, Max-axis(Hor:X-axis, Ver:Y-axis), Power Supply(SONY)

LIMIT : FCC15.247(d) 3m, below 1GHz:QP
All other spurious emissions were less than 20dB for the limit.

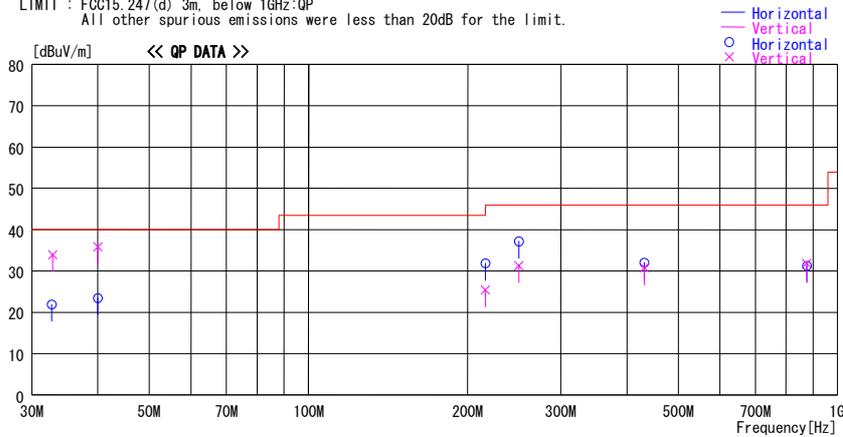

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
32.687	26.3	QP	17.5	-21.9	21.9	197	277	Hori.	40.0	18.1	
32.858	38.3	QP	17.5	-21.9	33.9	157	100	Vert.	40.0	6.1	
40.001	31.9	QP	13.4	-21.8	23.5	288	290	Hori.	40.0	16.6	
40.001	44.2	QP	13.4	-21.8	35.8	0	100	Vert.	40.0	4.2	
215.999	34.8	QP	16.8	-19.7	31.9	45	100	Hori.	43.5	11.7	
215.999	28.3	QP	16.8	-19.7	25.4	23	100	Vert.	43.5	18.1	
250.001	39.3	QP	17.1	-19.2	37.2	135	142	Hori.	46.0	8.8	
250.001	33.4	QP	17.1	-19.2	31.3	215	100	Vert.	46.0	14.7	
431.999	33.8	QP	17.4	-19.2	32.0	146	100	Hori.	46.0	14.0	
432.000	32.6	QP	17.4	-19.2	30.8	330	140	Vert.	46.0	15.3	
875.006	26.3	QP	21.8	-16.8	31.3	134	100	Hori.	46.0	14.7	
875.017	26.8	QP	21.8	-16.8	31.8	308	137	Vert.	46.0	14.2	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)
BDR, Tx, Ch: High
(Power Supply: SONY)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/06/30

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION=3 Power : AC120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 22deg. C. / 72%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks : BT, Tx 2480MHz, DH5, Max-axis(Hor:X-axis, Ver:Y-axis), Power Supply(SONY)

LIMIT : FCC15.247(d) 3m, below 1GHz:QP
All other spurious emissions were less than 20dB for the limit.

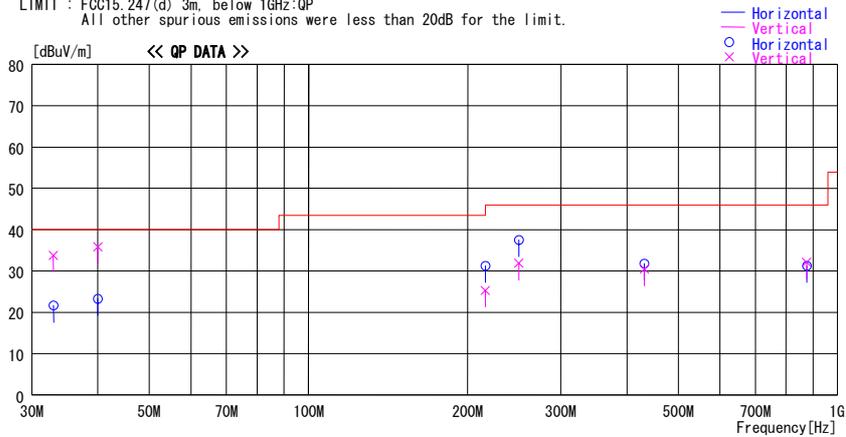

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
32.979	26.2	QP	17.4	-21.9	21.7	169	270	Hori.	40.0	18.4	
32.938	38.3	QP	17.4	-21.9	33.8	95	100	Vert.	40.0	6.2	
39.998	31.8	QP	13.4	-21.9	23.3	294	296	Hori.	40.0	16.7	
40.001	44.3	QP	13.4	-21.8	35.9	0	100	Vert.	40.0	4.1	
215.995	34.2	QP	16.8	-19.7	31.3	76	100	Hori.	43.5	12.2	
215.999	28.2	QP	16.8	-19.7	25.3	15	100	Vert.	43.5	18.2	
250.001	39.6	QP	17.1	-19.2	37.5	134	144	Hori.	46.0	8.5	
250.000	34.0	QP	17.1	-19.2	31.9	200	100	Vert.	46.0	14.1	
432.001	33.6	QP	17.4	-19.2	31.8	151	100	Hori.	46.0	14.3	
432.009	32.3	QP	17.4	-19.2	30.5	333	130	Vert.	46.0	15.5	
875.009	26.3	QP	21.8	-16.8	31.3	130	100	Hori.	46.0	14.7	
875.029	27.1	QP	21.8	-16.8	32.1	316	132	Vert.	46.0	13.9	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)
EDR, Tx, Ch: Low
(Power Supply: SONY)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/06/30

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION=3 Power : AC120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 22deg. C. / 72%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks : BT, Tx 2402MHz, 3-DH5, Max-axis(Hor:X-axis, Ver:Y-axis), Power Supply(SONY)

LIMIT : FCC15.247(d) 3m, below 1GHz:QP
All other spurious emissions were less than 20dB for the limit.

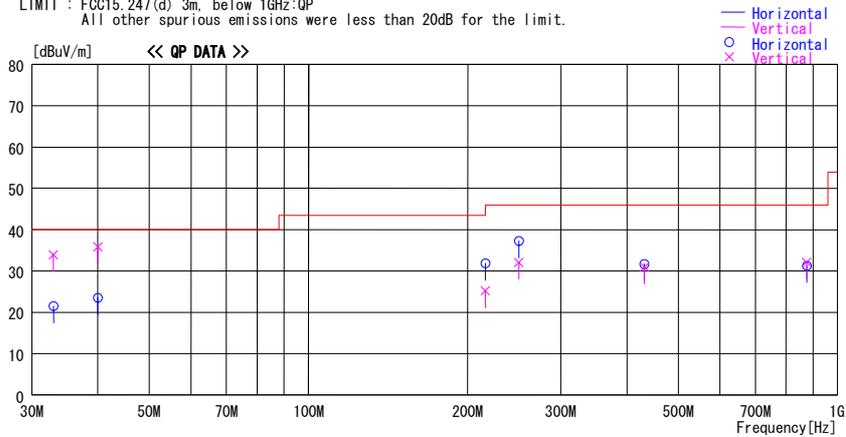

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
32.981	26.0	QP	17.4	-21.9	21.5	163	284	Hori.	40.0	18.5	
32.934	38.4	QP	17.4	-21.9	33.9	122	100	Vert.	40.0	6.1	
40.002	31.9	QP	13.4	-21.8	23.5	289	293	Hori.	40.0	16.5	
40.002	44.2	QP	13.4	-21.8	35.8	0	100	Vert.	40.0	4.2	
215.999	34.7	QP	16.8	-19.7	31.8	65	100	Hori.	43.5	11.7	
215.999	28.1	QP	16.8	-19.7	25.2	13	100	Vert.	43.5	18.3	
250.001	39.4	QP	17.1	-19.2	37.3	140	147	Hori.	46.0	8.7	
250.000	34.2	QP	17.1	-19.2	32.1	205	100	Vert.	46.0	13.9	
432.001	33.5	QP	17.4	-19.2	31.7	148	100	Hori.	46.0	14.4	
432.000	32.7	QP	17.4	-19.2	30.9	335	130	Vert.	46.0	15.1	
875.001	26.3	QP	21.8	-16.8	31.3	134	100	Hori.	46.0	14.7	
875.013	27.1	QP	21.8	-16.8	32.1	308	130	Vert.	46.0	13.9	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)
EDR, Tx, Ch: Mid
(Power Supply: SONY)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/06/30

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION=3 Power : AC120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 22deg. C. / 72%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks : BT, Tx 2441MHz, 3-DH5, Max-axis(Hor:X-axis, Ver:Y-axis), Power Supply(SONY)

LIMIT : FCC15.247(d) 3m, below 1GHz:QP
All other spurious emissions were less than 20dB for the limit.

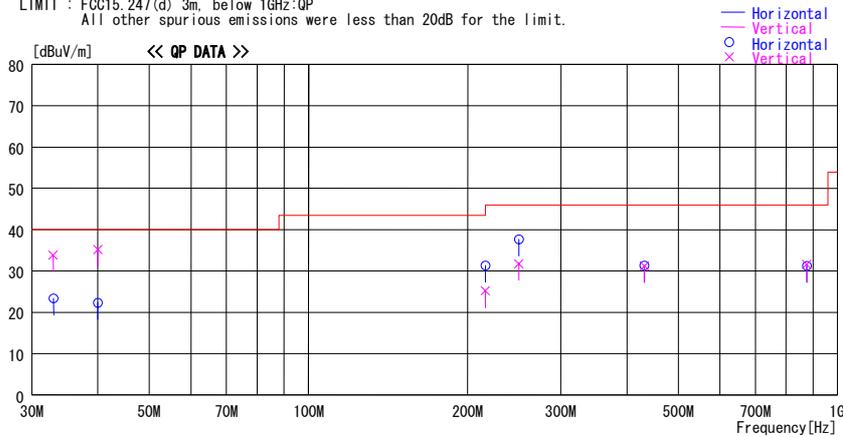

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
32.979	27.9	QP	17.4	-21.9	23.4	186	243	Hori.	40.0	16.6	
32.929	38.3	QP	17.4	-21.9	33.8	124	100	Vert.	40.0	6.2	
39.992	30.8	QP	13.4	-21.9	22.3	289	295	Hori.	40.0	17.7	
40.002	43.6	QP	13.4	-21.8	35.2	0	100	Vert.	40.0	4.8	
215.999	34.2	QP	16.8	-19.7	31.3	59	100	Hori.	43.5	12.2	
215.999	28.1	QP	16.8	-19.7	25.2	21	100	Vert.	43.5	18.4	
250.001	39.8	QP	17.1	-19.2	37.7	138	144	Hori.	46.0	8.3	
250.000	33.9	QP	17.1	-19.2	31.8	197	100	Vert.	46.0	14.2	
432.002	33.2	QP	17.4	-19.2	31.4	140	100	Hori.	46.0	14.6	
432.000	33.0	QP	17.4	-19.2	31.2	332	131	Vert.	46.0	14.8	
875.001	26.3	QP	21.8	-16.8	31.3	135	100	Hori.	46.0	14.7	
875.011	26.6	QP	21.8	-16.8	31.6	316	128	Vert.	46.0	14.4	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)
EDR, Tx, Ch: High
(Power Supply: SONY)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/07/01

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION=3 Power : AC120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 22deg. C. / 72%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks : BT, Tx 2480MHz, 3-DH5, Max-axis(Hor:X-axis, Ver:Y-axis), Power Supply(SONY)

LIMIT : FCC15.247(d) 3m, below 1GHz:QP
All other spurious emissions were less than 20dB for the limit.

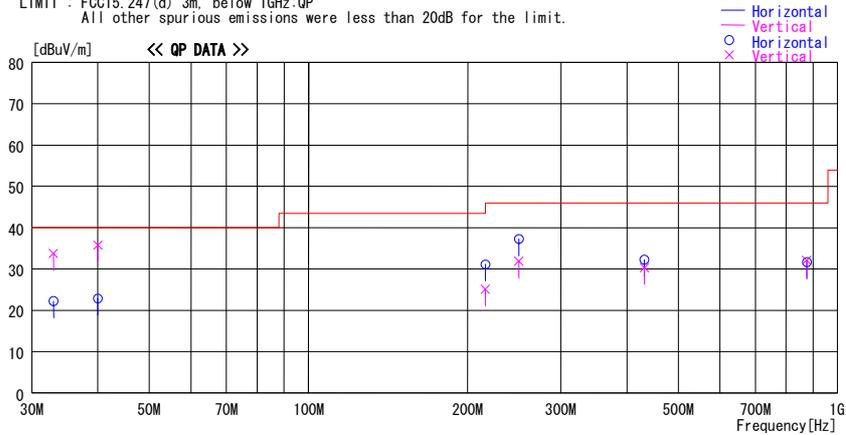

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
32.982	26.7	QP	17.4	-21.9	22.2	168	240	Hori.	40.0	17.8	
32.978	38.2	QP	17.4	-21.9	33.7	120	100	Vert.	40.0	6.3	
39.998	31.4	QP	13.4	-21.9	22.9	291	305	Hori.	40.0	17.1	
40.000	44.2	QP	13.4	-21.8	35.8	0	100	Vert.	40.0	4.2	
215.999	34.0	QP	16.8	-19.7	31.1	71	100	Hori.	43.5	12.4	
215.999	28.0	QP	16.8	-19.7	25.1	26	100	Vert.	43.5	18.4	
250.018	39.4	QP	17.1	-19.2	37.3	146	140	Hori.	46.0	8.7	
250.000	34.0	QP	17.1	-19.2	31.9	190	100	Vert.	46.0	14.1	
432.001	34.0	QP	17.4	-19.2	32.2	140	100	Hori.	46.0	13.8	
432.000	32.2	QP	17.4	-19.2	30.4	330	149	Vert.	46.0	15.6	
875.003	26.7	QP	21.8	-16.8	31.7	130	100	Hori.	46.0	14.3	
875.021	27.1	QP	21.8	-16.8	32.1	309	128	Vert.	46.0	13.9	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)
Rx, Ch: Mid
(Power Supply: SONY)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/07/01

Company : Sony Computer Entertainment Inc. Report No. : 28KE0107-HO-01
Kind of EUT : PLAYSTATION=3 Power : AC120V / 60Hz
Model No. : CECHL01 Temp./Humi. : 22deg. C. / 72%
Serial No. : 1040133 Engineer : Takumi Shimada

Mode / Remarks : BT, Rx 2441MHz, Max-axis(Hor:X-axis, Ver:Y-axis), Power Supply(SONY)

LIMIT : FCC15.247(d) 3m, below 1GHz:QP
All other spurious emissions were less than 20dB for the limit.

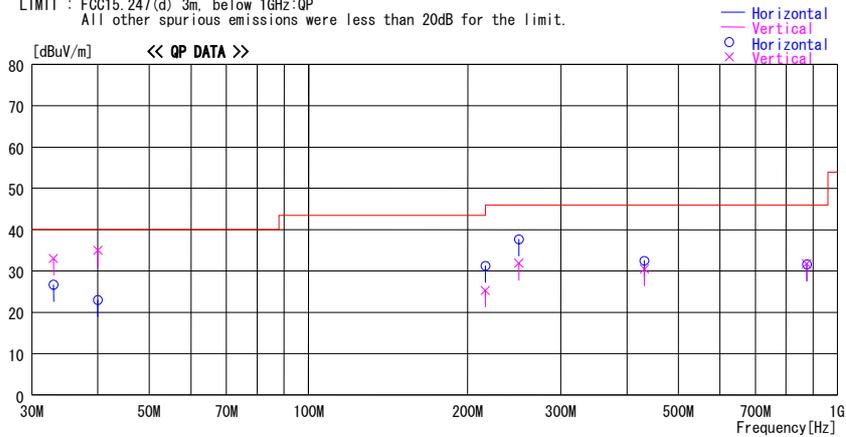

Frequency [MHz]	Reading [dBUV]	DET	Antenna		Level [dBUV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBUV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
32.980	31.2	QP	17.4	-21.9	26.7	167	309	Hori.	40.0	13.3	
32.977	37.5	QP	17.4	-21.9	33.0	127	100	Vert.	40.0	7.0	
39.984	31.5	QP	13.4	-21.9	23.0	290	310	Hori.	40.0	17.0	
40.002	43.4	QP	13.4	-21.8	35.0	0	100	Vert.	40.0	5.0	
215.999	34.2	QP	16.8	-19.7	31.3	74	100	Hori.	43.5	12.2	
215.999	28.2	QP	16.8	-19.7	25.3	20	100	Vert.	43.5	18.2	
250.002	39.7	QP	17.1	-19.2	37.6	140	138	Hori.	46.0	8.4	
250.000	34.0	QP	17.1	-19.2	31.9	197	100	Vert.	46.0	14.2	
432.001	34.3	QP	17.4	-19.2	32.5	138	100	Hori.	46.0	13.5	
432.000	32.3	QP	17.4	-19.2	30.5	340	124	Vert.	46.0	15.5	
875.003	26.6	QP	21.8	-16.8	31.6	143	100	Hori.	46.0	14.4	
875.010	26.8	QP	21.8	-16.8	31.8	317	128	Vert.	46.0	14.2	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (above 1GHz)

**BDR, Tx, Ch: Low
(Power Supply: SONY)**

Company Sony Computer Entertainment Inc.
Equipmen PLAYSTATION®3
Model CECHL01
S/N 1040133
Power AC 120V / 60Hz
Mode Bluetooth Tx 2402MHz, Hopping off, DH5
Position H: X-axis, V: Y-axis

UL Japan, Inc.
Head Office EMC Lab. No.2 Semi Anechoic Chamber
Regulation FCC15.247(d) / RSS-210 A8.5
Test Distance 3m (1G-10GHz) / 1m (above10GHz)
Date June 26, 2008
Temperature 22 deg.C.
Humidity 72 %
Engineer Satofumi Matsuyama

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1945.00	61.2	63.5	25.8	32.4	2.4	0.0	57.0	59.3	73.9	16.9	14.6
2	2390.00	49.2	48.4	26.8	32.5	2.6	0.0	46.1	45.3	73.9	27.8	28.6
3 **	2400.00	68.1	65.2	26.8	32.5	2.6	0.0	65.0	62.1	73.9	-	-
4	3192.10	56.4	55.9	28.3	32.0	3.0	0.0	55.7	55.2	73.9	18.2	18.7
5	4804.00	44.4	46.1	31.2	31.4	4.1	0.7	49.0	50.7	73.9	24.9	23.2
6	6383.60	48.9	52.7	33.6	31.1	4.5	0.8	56.7	60.5	73.9	17.2	13.4
7	7206.00	44.2	43.2	35.5	31.0	4.4	0.6	53.7	52.7	73.9	20.2	21.2
8	9608.00	43.8	42.7	38.6	31.4	5.1	0.9	57.0	55.9	73.9	16.9	18.0
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
9	12010.00	NS	NS	-	-	-	-	-	-	73.9	-	-
10	14412.00	NS	NS	-	-	-	-	-	-	73.9	-	-
11	16814.00	NS	NS	-	-	-	-	-	-	73.9	-	-
12	19216.00	NS	NS	-	-	-	-	-	-	73.9	-	-
13	21618.00	NS	NS	-	-	-	-	-	-	73.9	-	-
14	24020.00	48.7	48.5	39.8	29.9	7.7	0.0	56.8	56.6	73.9	17.1	17.3

** Reference data (Refer to next page(20dBc data sheet))

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1945.00	31.7	32.5	25.8	32.4	2.4	0.0	27.5	28.3	53.9	26.4	25.6
2	2390.00	34.5	33.6	26.8	32.5	2.6	0.0	31.4	30.5	53.9	22.5	23.4
3 **	2400.00	54.9	52.2	26.8	32.5	2.6	0.0	51.8	49.1	53.9	-	-
4	3192.10	34.3	34.3	28.3	32.0	3.0	0.0	33.6	33.6	53.9	20.3	20.3
5	4804.00	32.5	35.2	31.2	31.4	4.1	0.7	37.1	39.8	53.9	16.8	14.1
6	6383.60	30.2	31.2	33.6	31.1	4.5	0.8	38.0	39.0	53.9	15.9	14.9
7	7206.00	30.5	30.6	35.5	31.0	4.4	0.6	40.0	40.1	53.9	13.9	13.8
8	9608.00	30.1	30.1	38.6	31.4	5.1	0.9	43.3	43.3	53.9	10.6	10.6
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
9	12010.00	NS	NS	-	-	-	-	-	-	53.9	-	-
10	14412.00	NS	NS	-	-	-	-	-	-	53.9	-	-
11	16814.00	NS	NS	-	-	-	-	-	-	53.9	-	-
12	19216.00	NS	NS	-	-	-	-	-	-	53.9	-	-
13	21618.00	NS	NS	-	-	-	-	-	-	53.9	-	-
14	24020.00	35.0	35.0	39.8	29.9	7.7	0.0	43.1	43.1	53.9	10.8	10.8

** Reference data (Refer to next page(20dBc data sheet))

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.

*In the frequency over the fifth harmonic, the noise from the EUT was not seen.The data above is its base noise.

*The test result is round off to one or two decimal places, so some differences might be observed.

*NS: No detect Signal.

Radiated Spurious Emission (above 1GHz)
BDR, Tx, Ch: Low
(Power Supply: SONY)
(20dBc data sheet)

Company	Sony Computer Entertainment Inc.	UL Japan, Inc.
Equipmen	PLAYSTATION®3	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Model	CECHL01	Regulation FCC15.247(d) / RSS-210 A8.5
S/N	1040133	Test Distance 3m
Power	AC 120V / 60Hz	Date June 26, 2008
Mode	Bluetooth Tx 2402MHz, Hopping off, DH5	Temperature 22 deg.C.
Position	H: X-axis, V: Y-axis	Humidity 72 %
		Engineer Satofumi Matsuyama

20dBc (Fundamental 2402.0 MHz) (RBW: 100kHz, VBW: 300kHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit 20dBc [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
0	2402.00	103.2	100.5	26.8	32.5	2.6	0.0	100.1	97.4	-	-	-
3	2400.00	62.8	59.6	26.8	32.5	2.6	0.0	59.7	56.5	Funda-20dB	20.4	20.9

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.
*The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (above 1GHz)
BDR, Tx, Ch: Mid
(Power Supply: SONY)

Company Sony Computer Entertainment Inc.
Equipment PLAYSTATION®3
Model CECHL01
S/N 1040133
Power AC 120V / 60Hz
Mode Bluetooth Tx 2441MHz, Hopping off, DH5
Position H: X-axis, V: Y-axis

UL Japan, Inc.
Head Office EMC Lab. No.2 Semi Anechoic Chamber
Regulation FCC15.247(d) / RSS-210 A8.5
Test Distance 3m (1G-10GHz) / 1m (above10GHz)
Date June 26, 2008
Temperature 22 deg.C.
Humidity 72 %
Engineer Satofumi Matsuyama

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1944.90	63.6	62.8	25.8	32.4	2.4	0.0	59.4	58.6	73.9	14.5	15.3
2	3192.10	56.5	56.7	28.3	32.0	3.0	0.0	55.8	56.0	73.9	18.1	17.9
3	4882.00	46.0	46.2	31.4	31.4	4.1	0.7	50.8	51.0	73.9	23.1	22.9
4	6375.63	51.5	50.4	33.6	31.1	4.5	0.8	59.3	58.2	73.9	14.6	15.7
5	7323.00	44.4	44.3	35.7	31.0	4.5	0.6	54.2	54.1	73.9	19.7	19.8
6	9764.00	43.4	44.1	38.7	31.4	5.2	0.9	56.8	57.5	73.9	17.1	16.4
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
7	12205.00	NS	NS	-	-	-	-	-	-	73.9	-	-
8	14646.00	NS	NS	-	-	-	-	-	-	73.9	-	-
9	17087.00	NS	NS	-	-	-	-	-	-	73.9	-	-
10	19528.00	NS	NS	-	-	-	-	-	-	73.9	-	-
11	21969.00	NS	NS	-	-	-	-	-	-	73.9	-	-
12	24410.00	48.9	48.4	40.1	30.0	7.9	0.0	57.4	56.9	73.9	16.5	17.0

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1944.90	32.0	32.2	25.8	32.4	2.4	0.0	27.8	28.0	53.9	26.1	25.9
2	3192.10	33.7	33.5	28.3	32.0	3.0	0.0	33.0	32.8	53.9	20.9	21.1
3	4882.00	36.6	36.5	31.4	31.4	4.1	0.7	41.4	41.3	53.9	12.5	12.6
4	6375.63	30.6	30.4	33.6	31.1	4.5	0.8	38.4	38.2	53.9	15.5	15.7
5	7323.00	30.7	30.5	35.7	31.0	4.5	0.6	40.5	40.3	53.9	13.4	13.6
6	9764.00	30.0	30.0	38.7	31.4	5.2	0.9	43.4	43.4	53.9	10.5	10.5
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
7	12205.00	NS	NS	-	-	-	-	-	-	53.9	-	-
8	14646.00	NS	NS	-	-	-	-	-	-	53.9	-	-
9	17087.00	NS	NS	-	-	-	-	-	-	53.9	-	-
10	19528.00	NS	NS	-	-	-	-	-	-	53.9	-	-
11	21969.00	NS	NS	-	-	-	-	-	-	53.9	-	-
12	24410.00	34.4	34.4	40.1	30.0	7.9	0.0	42.9	42.9	53.9	11.0	11.0

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.

*In the frequency over the second harmonic, the noise from the EUT was not seen.The data above is its base noise.

*The test result is round off to one or two decimal places, so some differences might be observed.

*NS: No detect Signal.

Radiated Spurious Emission (above 1GHz)
BDR, Tx, Ch: High
(Power Supply: SONY)

Company	Sony Computer Entertainment Inc.	UL Japan, Inc.
Equipmen	PLAYSTATION®3	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Model	CECHL01	Regulation FCC15.247(d) / RSS-210 A8.5
S/N	1040133	Test Distance 3m (1G-10GHz) / 1m (above10GHz)
Power	AC 120V / 60Hz	Date June 26, 2008
Mode	Bluetooth Tx 2480MHz, Hopping off, DH5	Temperature 22 deg.C.
Position	H: X-axis, V: Y-axis	Humidity 72 %
		Engineer Satofumi Matsuyama

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1944.67	63.8	60.3	25.8	32.4	2.4	0.0	59.6	56.1	73.9	14.3	17.8
2	2483.50	61.5	58.2	27.0	32.5	2.6	0.0	58.6	55.3	73.9	15.3	18.6
3	3186.43	55.7	55.7	28.3	32.0	3.0	0.0	55.0	55.0	73.9	18.9	18.9
4	4960.00	49.7	47.8	31.5	31.4	4.2	0.7	54.7	52.8	73.9	19.2	21.1
5	6391.80	47.8	49.3	33.6	31.1	4.5	0.8	55.6	57.1	73.9	18.3	16.8
6	7440.00	43.1	43.1	36.0	31.0	4.6	0.6	53.3	53.3	73.9	20.6	20.6
7	9920.00	43.3	43.8	38.9	31.4	5.2	0.9	56.9	57.4	73.9	17.0	16.5
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
8	12400.00	NS	NS	-	-	-	-	-	-	73.9	-	-
9	14880.00	NS	NS	-	-	-	-	-	-	73.9	-	-
10	17360.00	NS	NS	-	-	-	-	-	-	73.9	-	-
11	19840.00	NS	NS	-	-	-	-	-	-	73.9	-	-
12	22320.00	NS	NS	-	-	-	-	-	-	73.9	-	-
13	24800.00	48.9	48.5	40.4	30.1	8.0	0.0	57.7	57.3	73.9	16.2	16.6

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1944.67	31.9	32.1	25.8	32.4	2.4	0.0	27.7	27.9	53.9	26.2	26.0
2	2483.50	47.0	44.2	27.0	32.5	2.6	0.0	44.1	41.3	53.9	9.8	12.6
3	3186.43	33.2	32.9	28.3	32.0	3.0	0.0	32.5	32.2	53.9	21.4	21.7
4	4960.00	41.4	39.9	31.5	31.4	4.2	0.7	46.4	44.9	53.9	7.5	9.0
5	6391.80	29.9	30.3	33.6	31.1	4.5	0.8	37.7	38.1	53.9	16.2	15.8
6	7440.00	30.1	30.2	36.0	31.0	4.6	0.6	40.3	40.4	53.9	13.6	13.5
7	9920.00	29.9	29.9	38.9	31.4	5.2	0.9	43.5	43.5	53.9	10.4	10.4
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
8	12400.00	NS	NS	-	-	-	-	-	-	53.9	-	-
9	14880.00	NS	NS	-	-	-	-	-	-	53.9	-	-
10	17360.00	NS	NS	-	-	-	-	-	-	53.9	-	-
11	19840.00	NS	NS	-	-	-	-	-	-	53.9	-	-
12	22320.00	NS	NS	-	-	-	-	-	-	53.9	-	-
13	24800.00	35.0	35.0	40.4	30.1	8.0	0.0	43.8	43.8	53.9	10.1	10.1

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB
*Except for the above table : All other spurious emissions were less than 20dB for the limit.
*Hi-Pass Fiter was not used for factor 0.0dB of the above table.
*In the frequency over the fifth harmonic, the noise from the EUT was not seen.The data above is its base noise.
*The test result is round off to one or two decimal places, so some differences might be observed.
*NS: No detect Signal.

Radiated Spurious Emission (above 1GHz)
EDR, Tx, Ch: Low
(Power Supply: SONY)

Company Sony Computer Entertainment Inc.
Equipmen PLAYSTATION®3
Model CECHL01
S/N 1040133
Power AC 120V / 60Hz
Mode Bluetooth Tx 2402MHz, Hopping off, 3-DH5
Position H: X-axis, V: Y-axis

UL Japan, Inc.
Head Office EMC Lab. No.2 Semi Anechoic Chamber
Regulation FCC15.247(d) / RSS-210 A8.5
Test Distance 3m (1G-10GHz) / 1m (above10GHz)
Date June 26, 2008
Temperature 22 deg.C.
Humidity 72 %
Engineer Satofumi Matsuyama

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1947.95	62.4	61.4	25.8	32.4	2.4	0.0	58.2	57.2	73.9	15.7	16.7
2	2390.00	51.4	49.3	26.8	32.5	2.6	0.0	48.3	46.2	73.9	25.6	27.7
3 **	2400.00	71.8	70.8	26.8	32.5	2.6	0.0	68.7	67.7	73.9	-	-
4	3194.50	55.8	57.1	28.3	32.0	3.0	0.0	55.1	56.4	73.9	18.8	17.5
5	4804.00	42.5	42.2	31.2	31.4	4.1	0.7	47.1	46.8	73.9	26.8	27.1
6	6377.20	48.9	50.8	33.6	31.1	4.5	0.8	56.7	58.6	73.9	17.2	15.3
7	7206.00	42.8	43.9	35.5	31.0	4.4	0.6	52.3	53.4	73.9	21.6	20.5
8	9608.00	43.5	44.0	38.6	31.4	5.1	0.9	56.7	57.2	73.9	17.2	16.7
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
9	12010.00	NS	NS	-	-	-	-	-	-	73.9	-	-
10	14412.00	NS	NS	-	-	-	-	-	-	73.9	-	-
11	16814.00	NS	NS	-	-	-	-	-	-	73.9	-	-
12	19216.00	NS	NS	-	-	-	-	-	-	73.9	-	-
13	21618.00	NS	NS	-	-	-	-	-	-	73.9	-	-
14	24020.00	49.1	48.9	39.8	29.9	7.7	0.0	57.2	57.0	73.9	16.7	16.9

** Reference data (Refer to next page(20dBc data sheet))

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1947.95	32.0	32.1	25.8	32.4	2.4	0.0	27.8	27.9	53.9	26.1	26.0
2	2390.00	44.5	34.7	26.8	32.5	2.6	0.0	41.4	31.6	53.9	12.5	22.3
3 **	2400.00	54.1	53.3	26.8	32.5	2.6	0.0	51.0	50.2	53.9	-	-
4	3194.50	34.0	34.5	28.3	32.0	3.0	0.0	33.3	33.8	53.9	20.6	20.1
5	4804.00	28.9	29.3	31.2	31.4	4.1	0.7	33.5	33.9	53.9	20.4	20.0
6	6377.20	30.2	30.6	33.6	31.1	4.5	0.8	38.0	38.4	53.9	15.9	15.5
7	7206.00	30.3	30.2	35.5	31.0	4.4	0.6	39.8	39.7	53.9	14.1	14.2
8	9608.00	30.4	30.4	38.6	31.4	5.1	0.9	43.6	43.6	53.9	10.3	10.3
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
9	12010.00	NS	NS	-	-	-	-	-	-	53.9	-	-
10	14412.00	NS	NS	-	-	-	-	-	-	53.9	-	-
11	16814.00	NS	NS	-	-	-	-	-	-	53.9	-	-
12	19216.00	NS	NS	-	-	-	-	-	-	53.9	-	-
13	21618.00	NS	NS	-	-	-	-	-	-	53.9	-	-
14	24020.00	35.2	35.2	39.8	29.9	7.7	0.0	43.3	43.3	53.9	10.6	10.6

** Reference data (Refer to next page(20dBc data sheet))

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.

*In the frequency over the fifth harmonic, the noise from the EUT was not seen.The data above is its base noise.

*The test result is round off to one or two decimal places, so some differences might be observed.

*NS: No detect Signal.

Radiated Spurious Emission (above 1GHz)

**EDR, Tx, Ch: Low
(Power Supply: SONY)
(20dBc data sheet)**

Company	Sony Computer Entertainment Inc.	UL Japan, Inc.
Equipmen	PLAYSTATION®3	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Model	CECHL01	Regulation FCC15.247(d) / RSS-210 A8.5
S/N	1040133	Test Distance 3m
Power	AC 120V / 60Hz	Date June 26, 2008
Mode	Bluetooth Tx 2402MHz, Hopping off, 3-DH5	Temperature 22 deg.C.
Position	H: X-axis, V: Y-axis	Humidity 72 %
		Engineer Satofumi Matsuyama

20dBc (Fundamental 2402.0 MHz) (RBW: 100kHz, VBW: 300kHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit 20dBc [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
0	2402.00	102.4	101.4	26.8	32.5	2.6	0.0	99.3	98.3	-	-	-
3	2400.00	55.6	55.0	26.8	32.5	2.6	0.0	52.5	51.9	Funda-20dB	26.8	26.4

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.
*The test result is round off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (above 1GHz)
EDR, Tx, Ch: Mid
(Power Supply: SONY)

Company	Sony Computer Entertainment Inc.	UL Japan, Inc.
Equipment	PLAYSTATION®3	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Model	CECHL01	Regulation FCC15.247(d) / RSS-210 A8.5
S/N	1040133	Test Distance 3m (1G-10GHz) / 1m (above10GHz)
Power	AC 120V / 60Hz	Date June 26, 2008
Mode	Bluetooth Tx 2441MHz, Hopping off, 3-DH5	Temperature 22 deg.C.
Position	H: X-axis, V: Y-axis	Humidity 72 %
		Engineer Satofumi Matsuyama

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1946.23	63.6	62.9	25.8	32.4	2.4	0.0	59.4	58.7	73.9	14.5	15.2
2	3190.47	57.4	56.3	28.3	32.0	3.0	0.0	56.7	55.6	73.9	17.2	18.3
3	4882.00	42.2	41.8	31.4	31.4	4.1	0.7	47.0	46.6	73.9	26.9	27.3
4	6377.53	49.3	51.4	33.6	31.1	4.5	0.8	57.1	59.2	73.9	16.8	14.7
5	7323.00	43.7	44.1	35.7	31.0	4.5	0.6	53.5	53.9	73.9	20.4	20.0
6	9764.00	43.1	42.9	38.7	31.4	5.2	0.9	56.5	56.3	73.9	17.4	17.6
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
7	12205.00	NS	NS	-	-	-	-	-	-	73.9	-	-
8	14646.00	NS	NS	-	-	-	-	-	-	73.9	-	-
9	17087.00	NS	NS	-	-	-	-	-	-	73.9	-	-
10	19528.00	NS	NS	-	-	-	-	-	-	73.9	-	-
11	21969.00	NS	NS	-	-	-	-	-	-	73.9	-	-
12	24410.00	48.4	48.4	40.1	30.0	7.9	0.0	56.9	56.9	73.9	17.0	17.0

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1946.23	32.0	32.3	25.8	32.4	2.4	0.0	27.8	28.1	53.9	26.1	25.8
2	3190.47	34.1	34.2	28.3	32.0	3.0	0.0	33.4	33.5	53.9	20.5	20.4
3	4882.00	29.0	29.2	31.4	31.4	4.1	0.7	33.8	34.0	53.9	20.1	19.9
4	6377.53	30.4	30.7	33.6	31.1	4.5	0.8	38.2	38.5	53.9	15.7	15.4
5	7323.00	30.3	30.3	35.7	31.0	4.5	0.6	40.1	40.1	53.9	13.8	13.8
6	9764.00	30.0	29.6	38.7	31.4	5.2	0.9	43.4	43.0	53.9	10.5	10.9
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
7	12205.00	NS	NS	-	-	-	-	-	-	53.9	-	-
8	14646.00	NS	NS	-	-	-	-	-	-	53.9	-	-
9	17087.00	NS	NS	-	-	-	-	-	-	53.9	-	-
10	19528.00	NS	NS	-	-	-	-	-	-	53.9	-	-
11	21969.00	NS	NS	-	-	-	-	-	-	53.9	-	-
12	24410.00	34.5	34.4	40.1	30.0	7.9	0.0	43.0	42.9	53.9	10.9	11.0

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.

*In the frequency over the second harmonic, the noise from the EUT was not seen.The data above is its base noise.

*The test result is round off to one or two decimal places, so some differences might be observed.

*NS: No detect Signal.

UL Japan, Inc.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

Radiated Spurious Emission (above 1GHz)
EDR, Tx, Ch: High
(Power Supply: SONY)

Company Sony Computer Entertainment Inc.
Equipmen PLAYSTATION®3
Model CECHL01
S/N 1040133
Power AC 120V / 60Hz
Mode Bluetooth Tx 2480MHz, Hopping off, 3-DH5
Position H: X-axis, V: Y-axis

UL Japan, Inc.
Head Office EMC Lab. No.2 Semi Anechoic Chamber
Regulation FCC15.247(d) / RSS-210 A8.5
Test Distance 3m (1G-10GHz) / 1m (above10GHz)
Date June 26, 2008
Temperature 22 deg.C.
Humidity 72 %
Engineer Satofumi Matsuyama

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1946.95	59.4	63.4	25.8	32.4	2.4	0.0	55.2	59.2	73.9	18.7	14.7
2	2483.50	68.1	64.0	27.0	32.5	2.6	0.0	65.2	61.1	73.9	8.7	12.8
3	3186.33	53.8	55.3	28.3	32.0	3.0	0.0	53.1	54.6	73.9	20.8	19.3
4	4960.00	40.9	40.8	31.5	31.4	4.2	0.7	45.9	45.8	73.9	28.0	28.1
5	6379.76	46.3	52.8	33.6	31.1	4.5	0.8	54.1	60.6	73.9	19.8	13.3
6	7440.00	41.8	41.6	36.0	31.0	4.6	0.6	52.0	51.8	73.9	21.9	22.1
7	9920.00	42.3	41.6	38.9	31.4	5.2	0.9	55.9	55.2	73.9	18.0	18.7
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
8	12400.00	NS	NS	-	-	-	-	-	-	73.9	-	-
9	14880.00	NS	NS	-	-	-	-	-	-	73.9	-	-
10	17360.00	NS	NS	-	-	-	-	-	-	73.9	-	-
11	19840.00	NS	NS	-	-	-	-	-	-	73.9	-	-
12	22320.00	NS	NS	-	-	-	-	-	-	73.9	-	-
13	24800.00	47.6	47.9	40.4	30.1	8.0	0.0	56.4	56.7	73.9	17.5	17.2

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	1946.95	30.2	30.5	25.8	32.4	2.4	0.0	26.0	26.3	53.9	27.9	27.6
2	2483.50	49.5	47.1	27.0	32.5	2.6	0.0	46.6	44.2	53.9	7.3	9.7
3	3186.33	30.9	32.2	28.3	32.0	3.0	0.0	30.2	31.5	53.9	23.7	22.4
4	4960.00	27.5	27.5	31.5	31.4	4.2	0.7	32.5	32.5	53.9	21.4	21.4
5	6379.76	28.3	29.3	33.6	31.1	4.5	0.8	36.1	37.1	53.9	17.8	16.8
6	7440.00	28.3	28.3	36.0	31.0	4.6	0.6	38.5	38.5	53.9	15.4	15.4
7	9920.00	28.3	28.3	38.9	31.4	5.2	0.9	41.9	41.9	53.9	12.0	12.0
Test distance 1meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac												
8	12400.00	NS	NS	-	-	-	-	-	-	53.9	-	-
9	14880.00	NS	NS	-	-	-	-	-	-	53.9	-	-
10	17360.00	NS	NS	-	-	-	-	-	-	53.9	-	-
11	19840.00	NS	NS	-	-	-	-	-	-	53.9	-	-
12	22320.00	NS	NS	-	-	-	-	-	-	53.9	-	-
13	24800.00	33.7	33.7	40.4	30.1	8.0	0.0	42.5	42.5	53.9	11.4	11.4

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB
*Except for the above table : All other spurious emissions were less than 20dB for the limit.
*Hi-Pass Fiter was not used for factor 0.0dB of the above table.
*In the frequency over the fifth harmonic, the noise from the EUT was not seen.The data above is its base noise.
*The test result is round off to one or two decimal places, so some differences might be observed.
*NS: No detect Signal.

Radiated Spurious Emission (above 1GHz)

**Rx, Ch: Mid
(Power Supply: SONY)**

Company Sony Computer Entertainment Inc.
Equipmen PLAYSTATION®3
Model CECHL01
S/N 1040133
Power AC 120V / 60Hz
Mode Bluetooth Rx 2441MHz
Position H: X-axis, V: Y-axis

UL Japan, Inc.
Head Office EMC Lab. No.2 Semi Anechoic Chamber
Regulation FCC 15.109 / RSS-Gen 7.2.1 and 7.2.3
Test Distance 3m
Date June 26, 2008
Temperature 22 deg.C.
Humidity 72 %
Engineer Satofumi Matsuyama

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER				HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss											
1	1944.43	60.7	63.3	25.8	32.4	2.4	56.5	59.1	73.9	17.4	14.8
2	2441.00	43.5	45.1	26.9	32.5	2.6	40.5	42.1	73.9	33.4	31.8
3	3191.57	56.0	56.8	28.3	32.0	3.0	55.3	56.1	73.9	18.6	17.8
4	4882.00	42.2	41.8	31.4	31.4	3.6	45.8	45.4	73.9	28.1	28.5
5	6378.80	50.7	51.1	33.6	31.1	4.0	57.2	57.6	73.9	16.7	16.3
6	7323.00	43.2	43.0	35.7	31.0	3.9	51.8	51.6	73.9	22.1	22.3
7	9764.00	42.3	43.2	38.7	31.4	4.6	54.2	55.1	73.9	19.7	18.8


AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER				HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss											
1	1944.43	33.2	32.4	25.8	32.4	2.4	29.0	28.2	53.9	24.9	25.7
2	2441.00	32.2	32.2	26.9	32.5	2.6	29.2	29.2	53.9	24.7	24.7
3	3191.57	34.1	34.1	28.3	32.0	3.0	33.4	33.4	53.9	20.5	20.5
4	4882.00	28.8	28.8	31.4	31.4	3.6	32.4	32.4	53.9	21.5	21.5
5	6378.80	30.5	30.7	33.6	31.1	4.0	37.0	37.2	53.9	16.9	16.7
6	7323.00	30.3	30.3	35.7	31.0	3.9	38.9	38.9	53.9	15.0	15.0
7	9764.00	29.9	29.9	38.7	31.4	4.6	41.8	41.8	53.9	12.1	12.1


*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*The test result is round off to one or two decimal places, so some differences might be observed.


Conducted Spurious Emission
BDR, Tx, Ch: Low

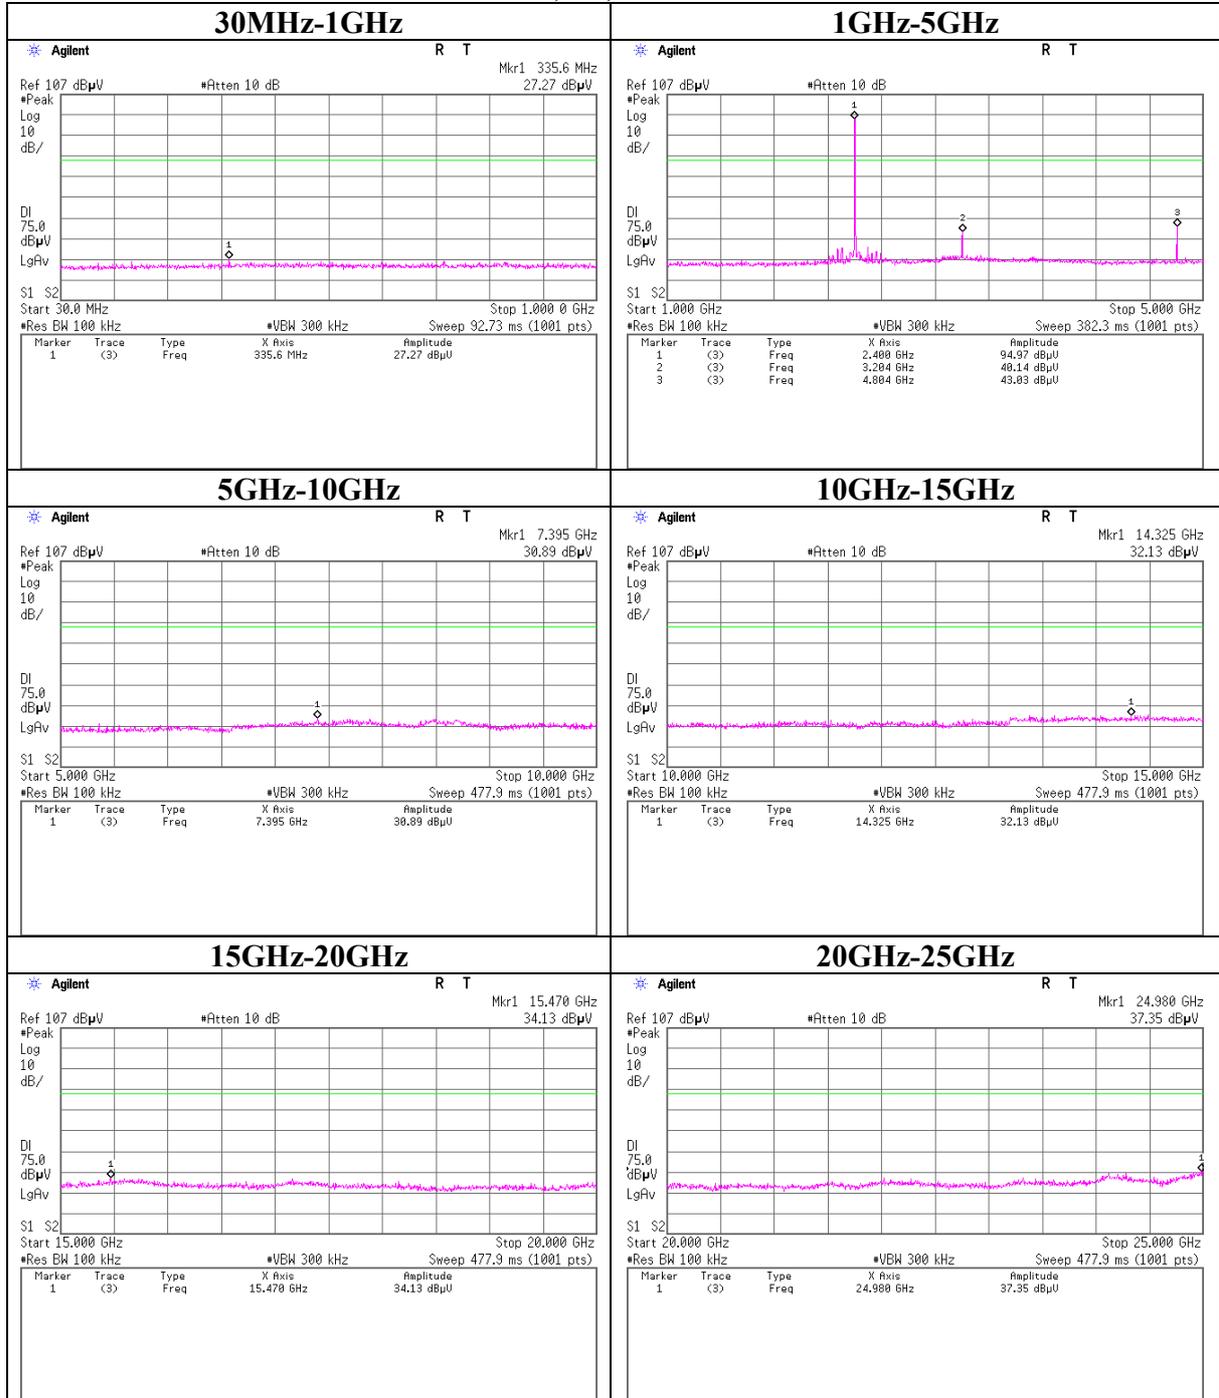


Conducted Spurious Emission
BDR, Tx, Ch: Mid

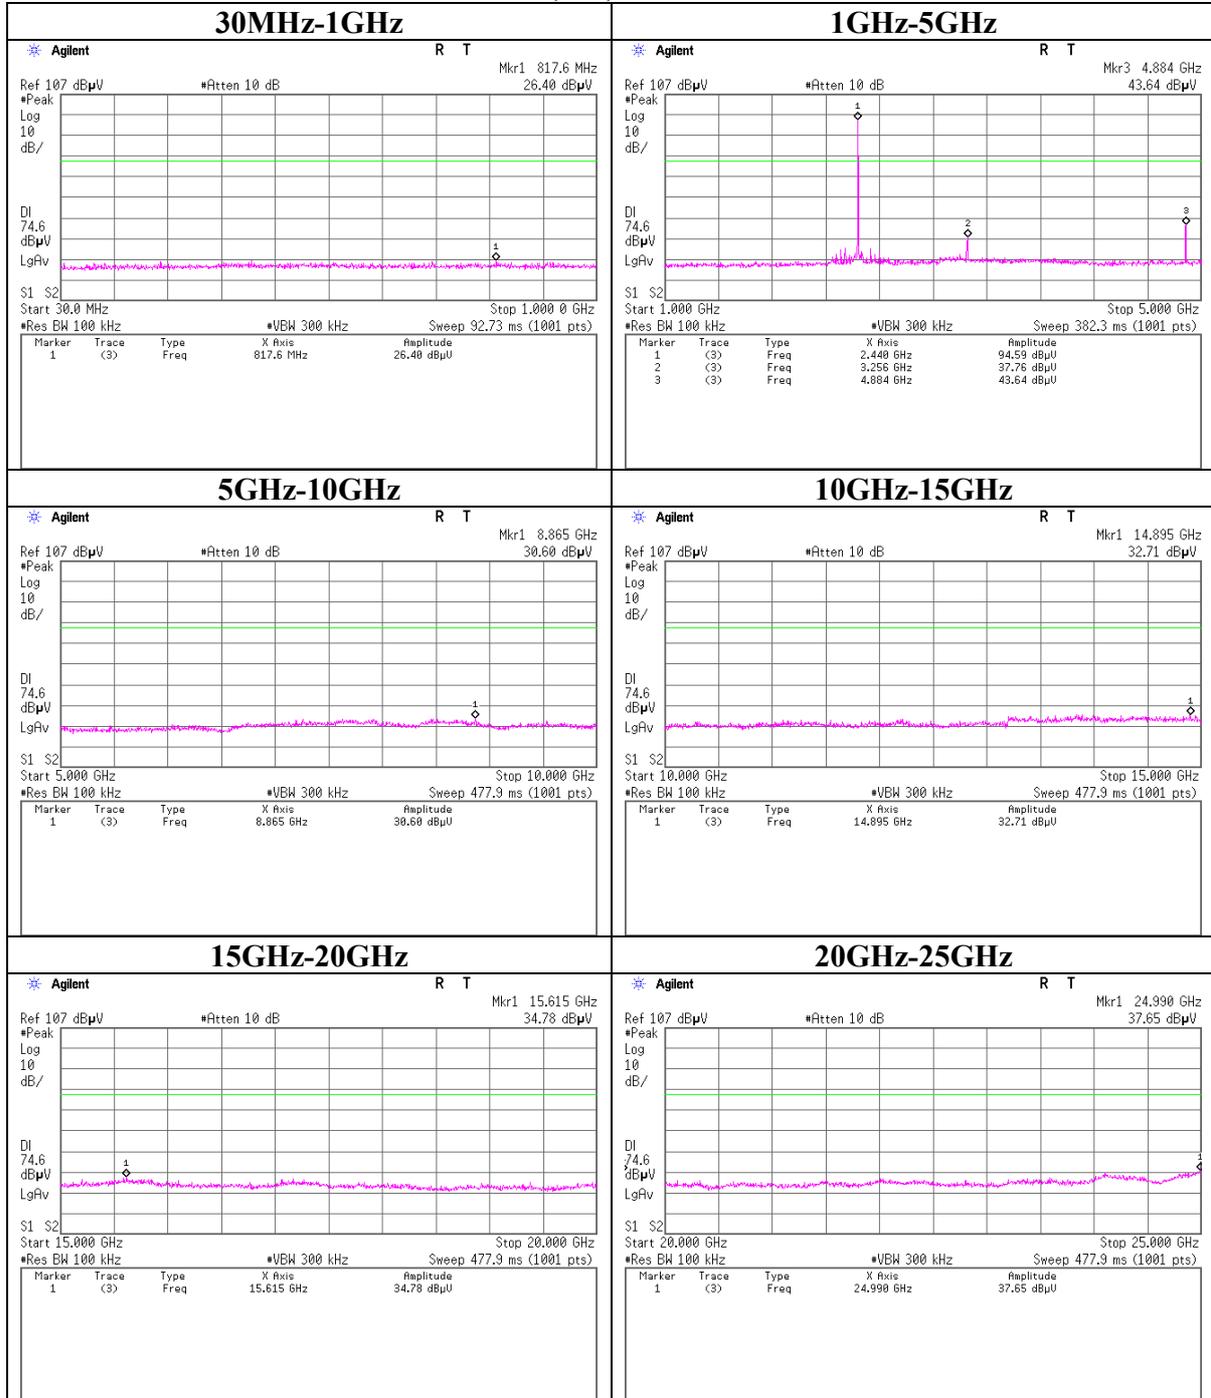


Conducted Spurious Emission
BDR, Tx, Ch: High

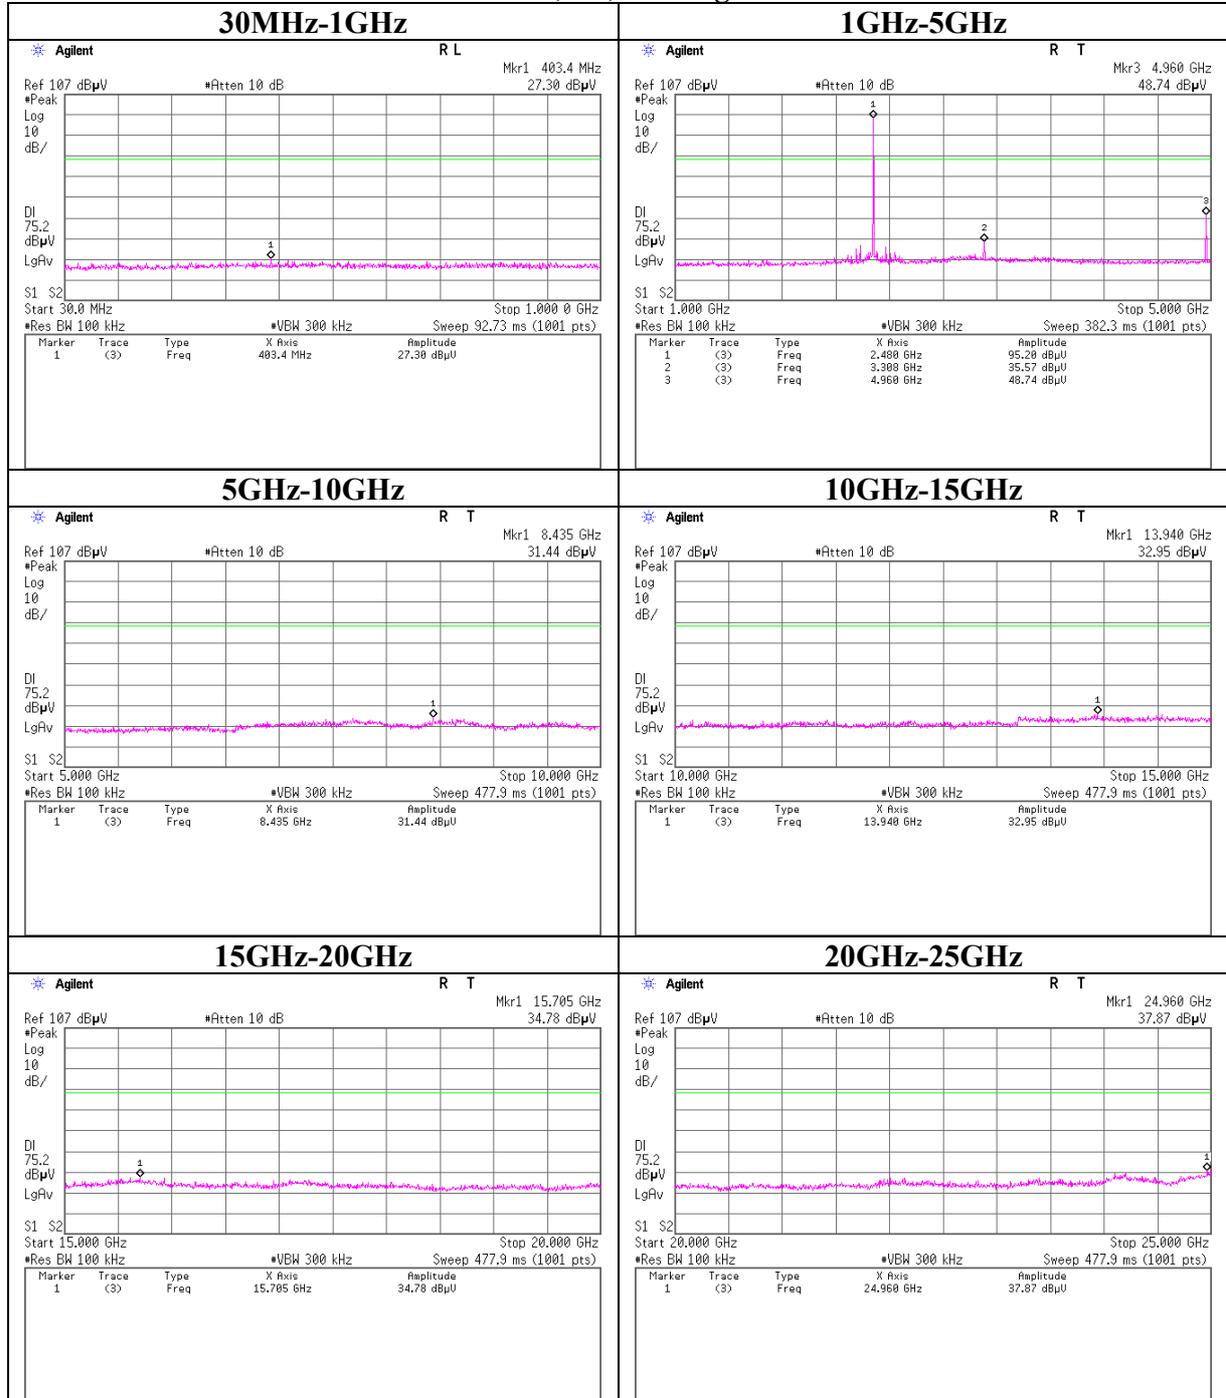


Conducted Spurious Emission
EDR, Tx, Ch: Low

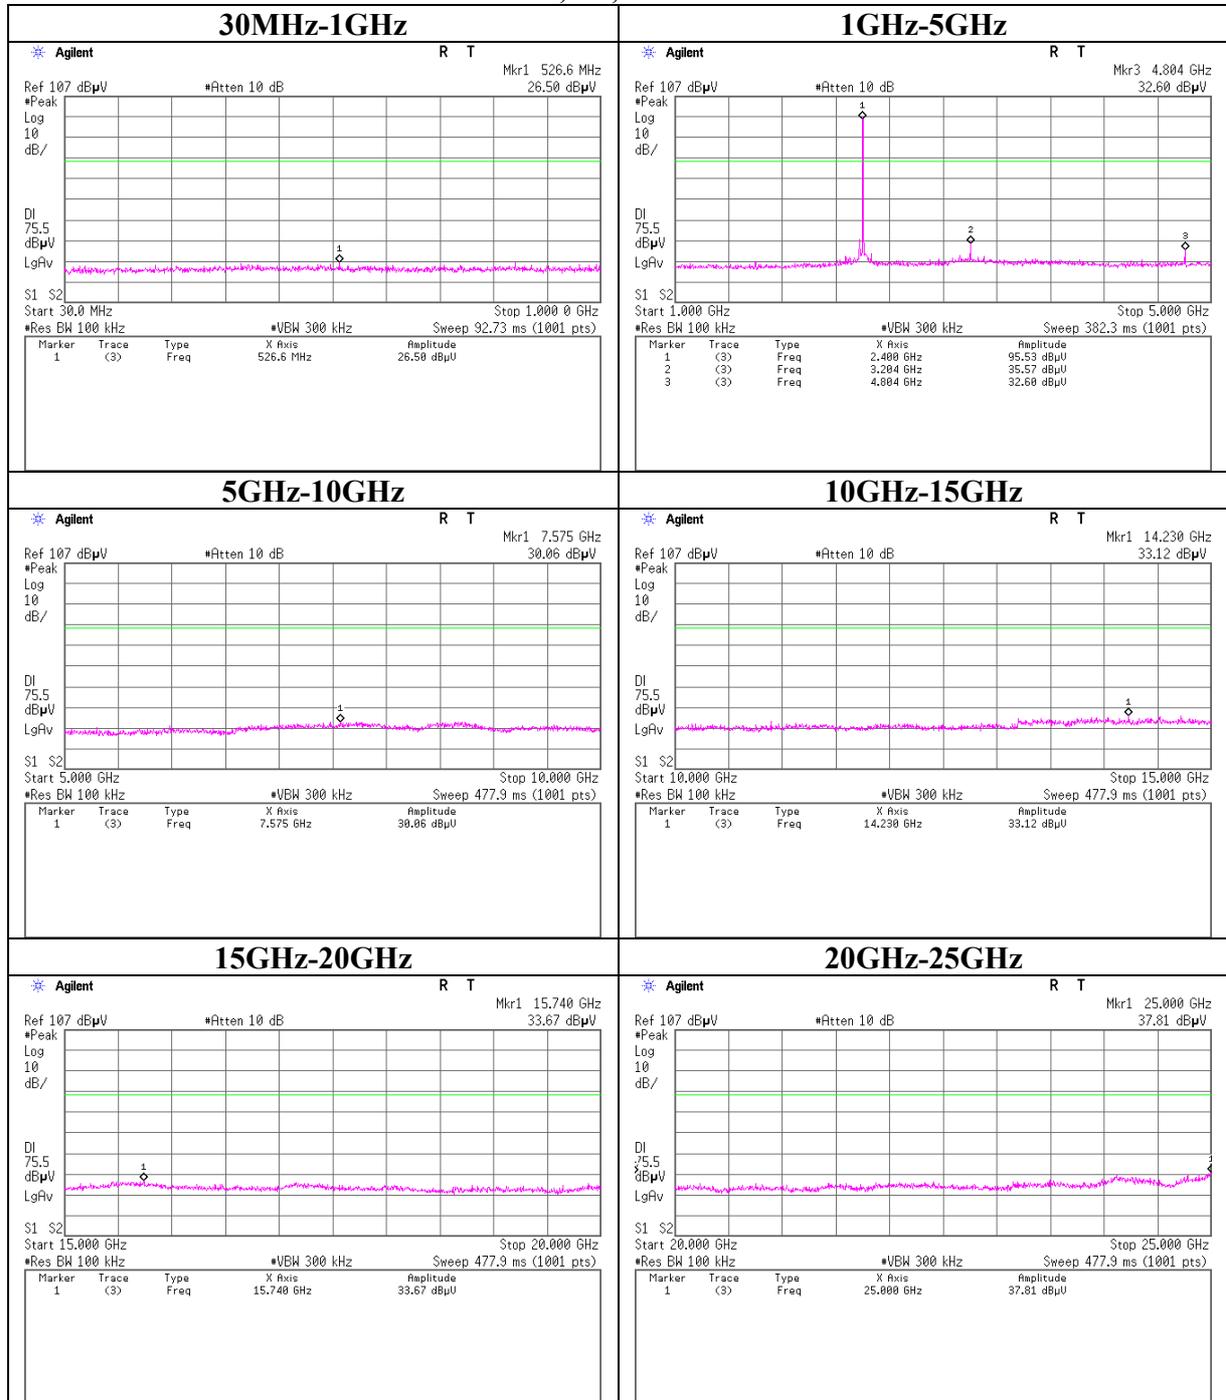


Conducted Spurious Emission
EDR, Tx, Ch: Mid

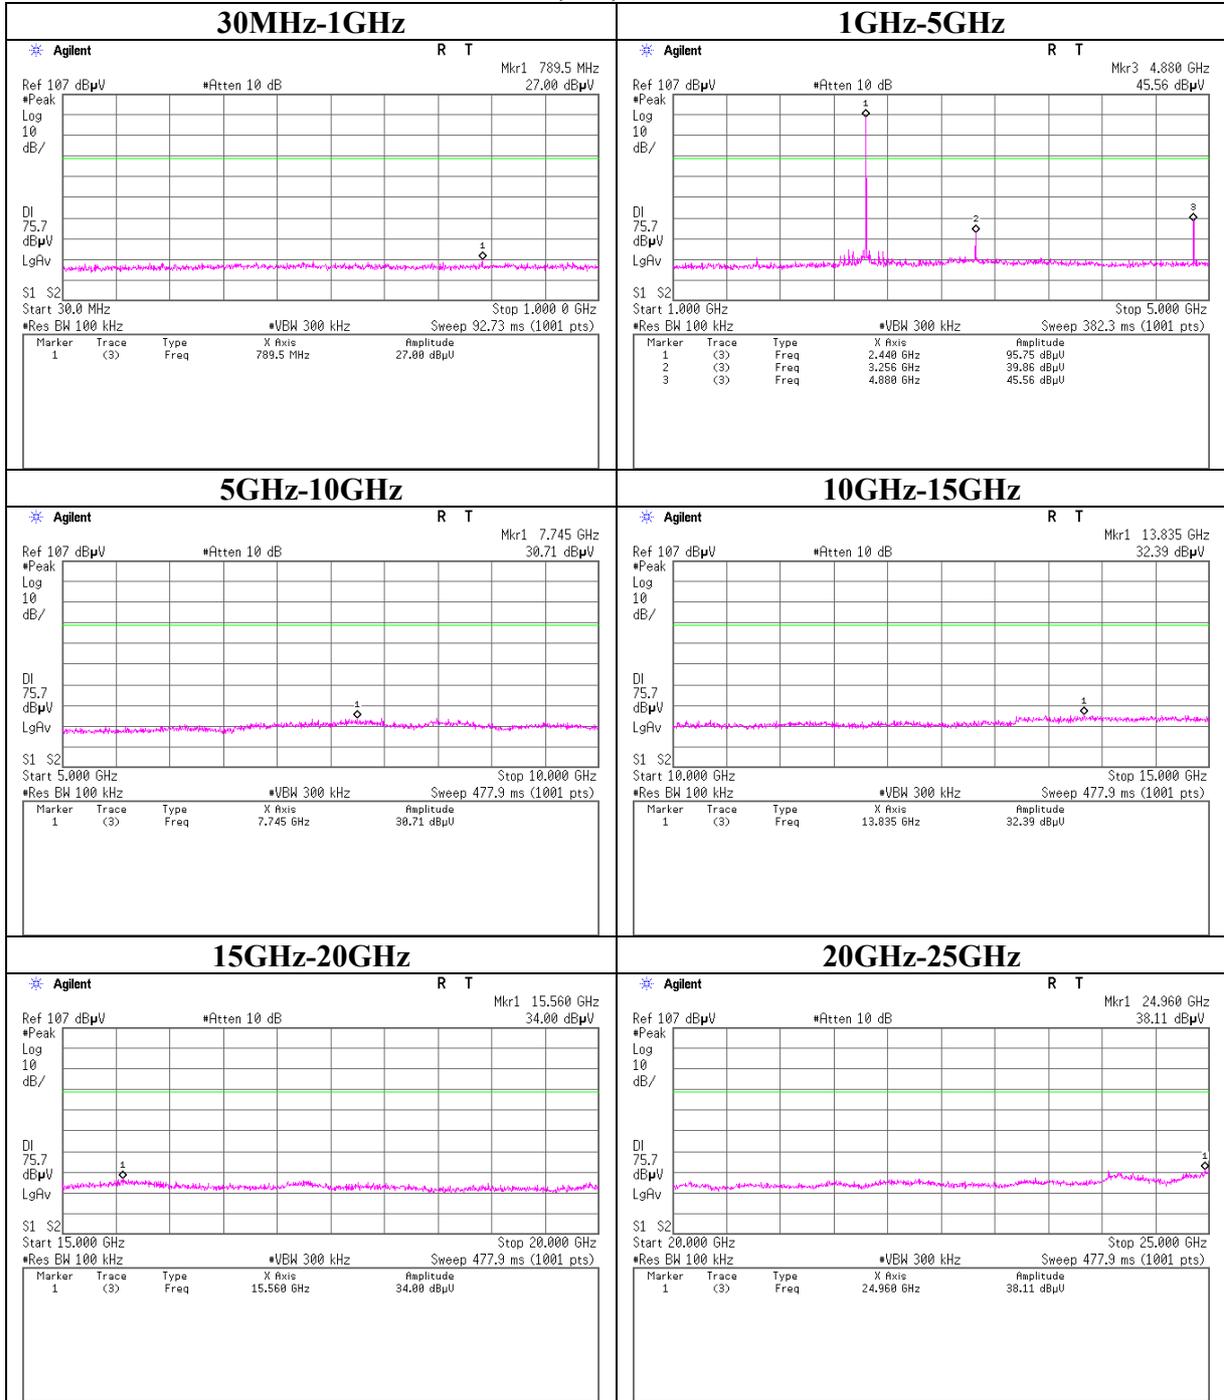


Conducted Spurious Emission
EDR, Tx, Ch: High

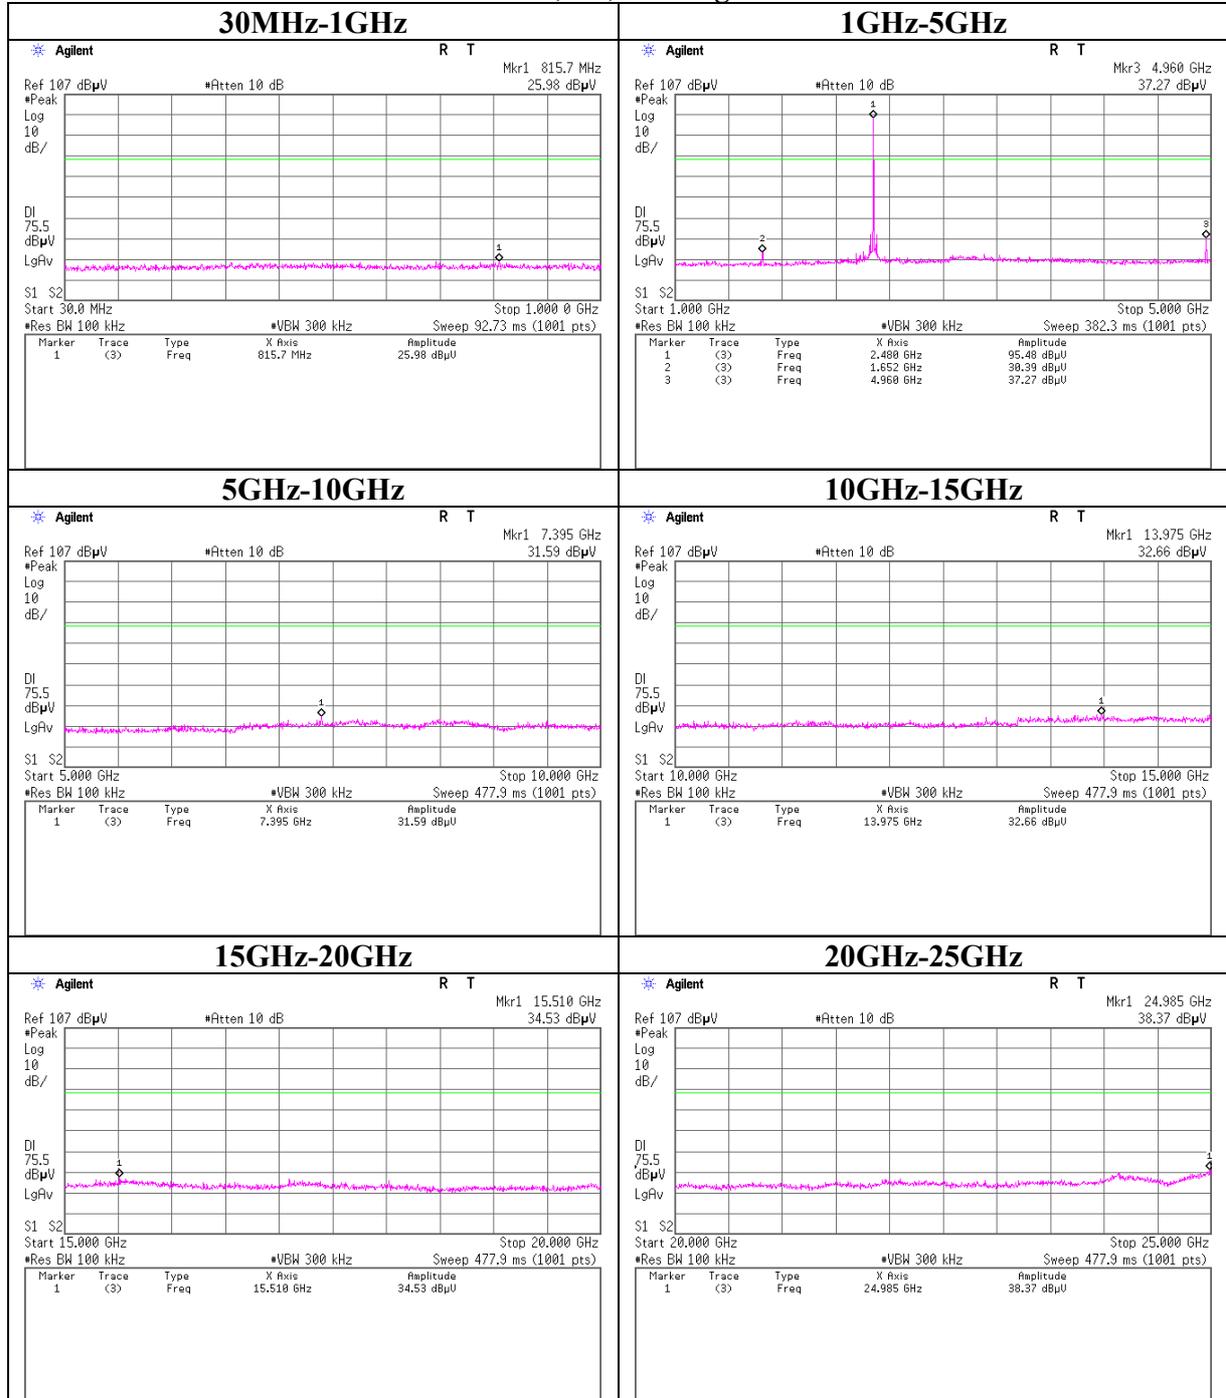


Conducted Spurious Emission
Rx, Ch: Mid

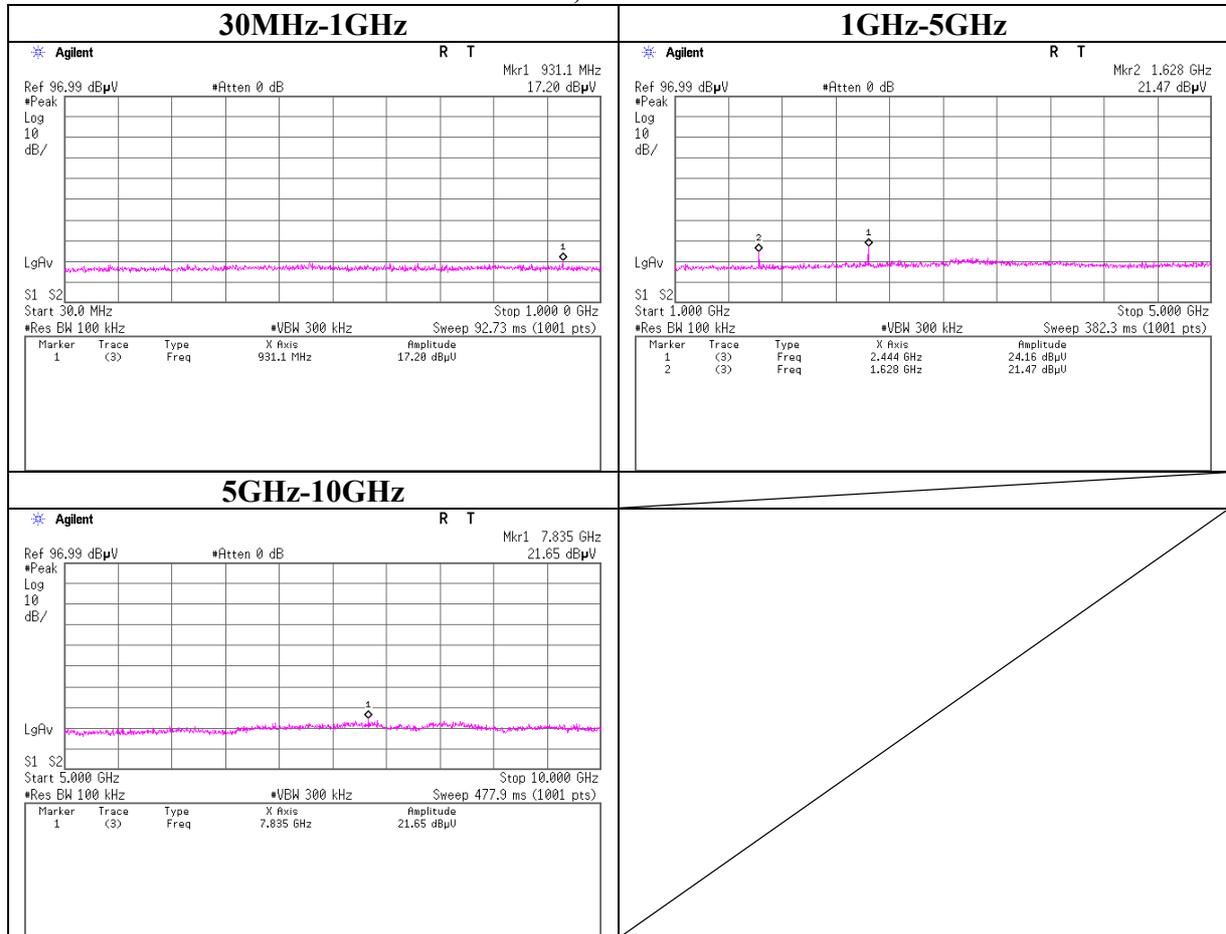


Conducted Spurious Emission
Band Edge compliance
BDR

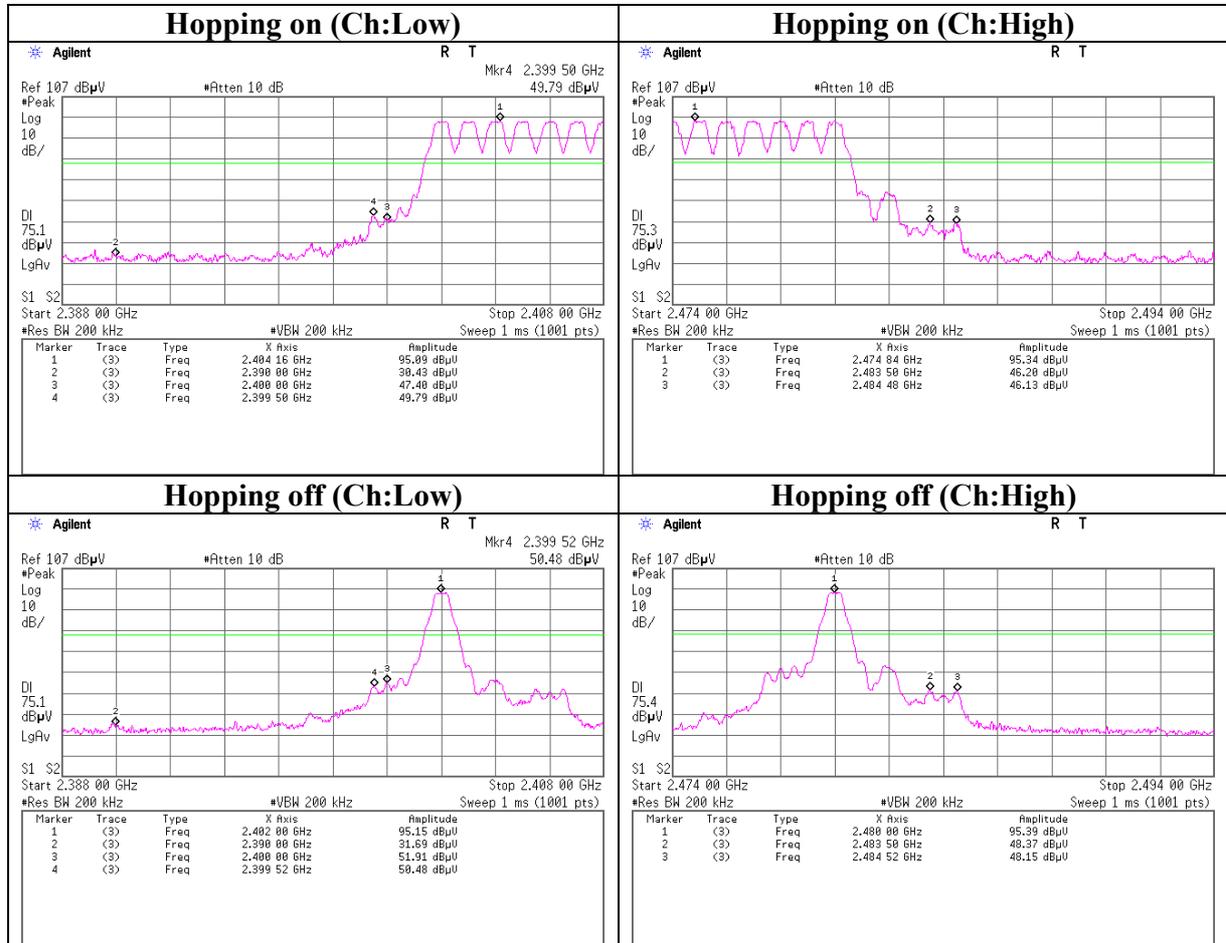

Conducted Spurious Emission
Band Edge compliance
EDR

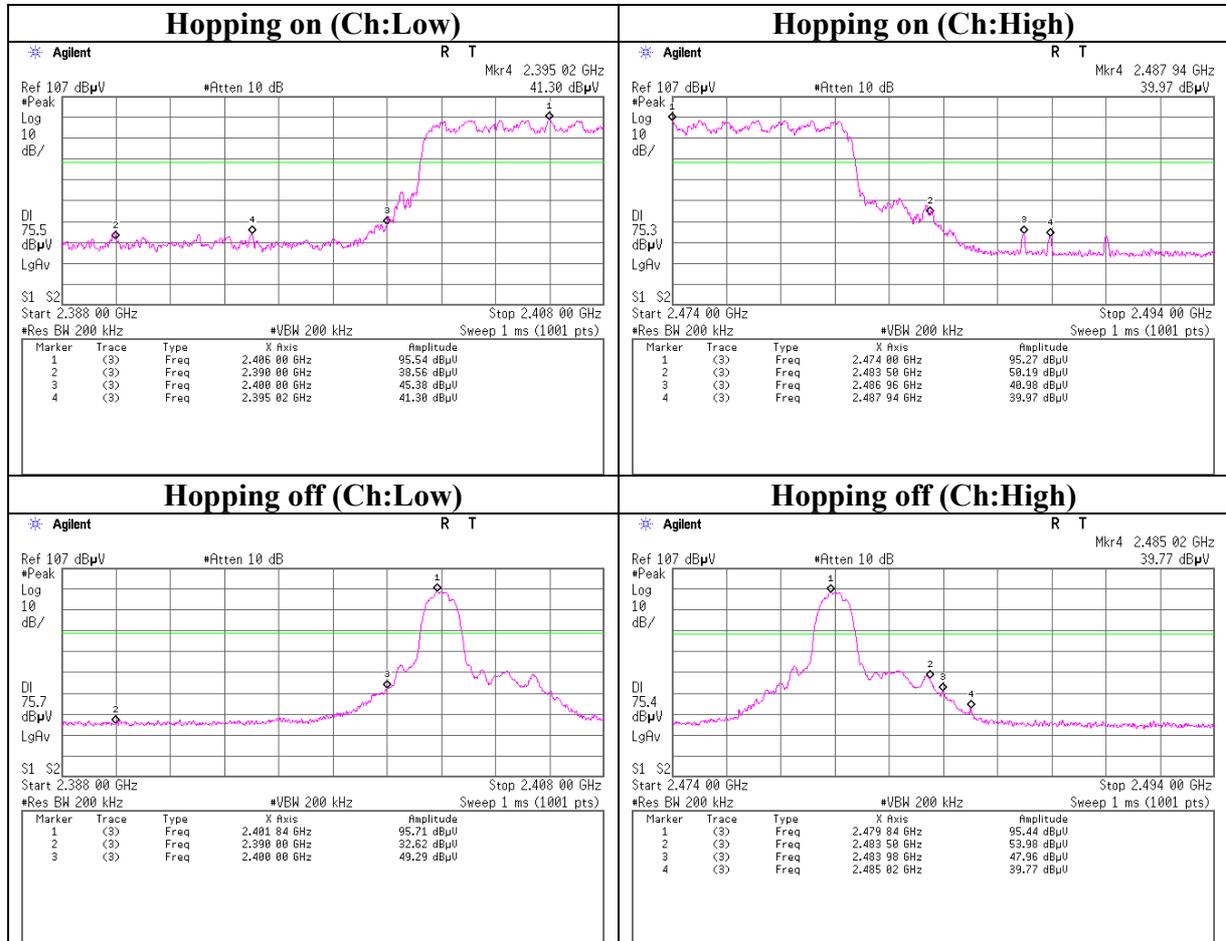


99% Occupied Bandwidth
BDR

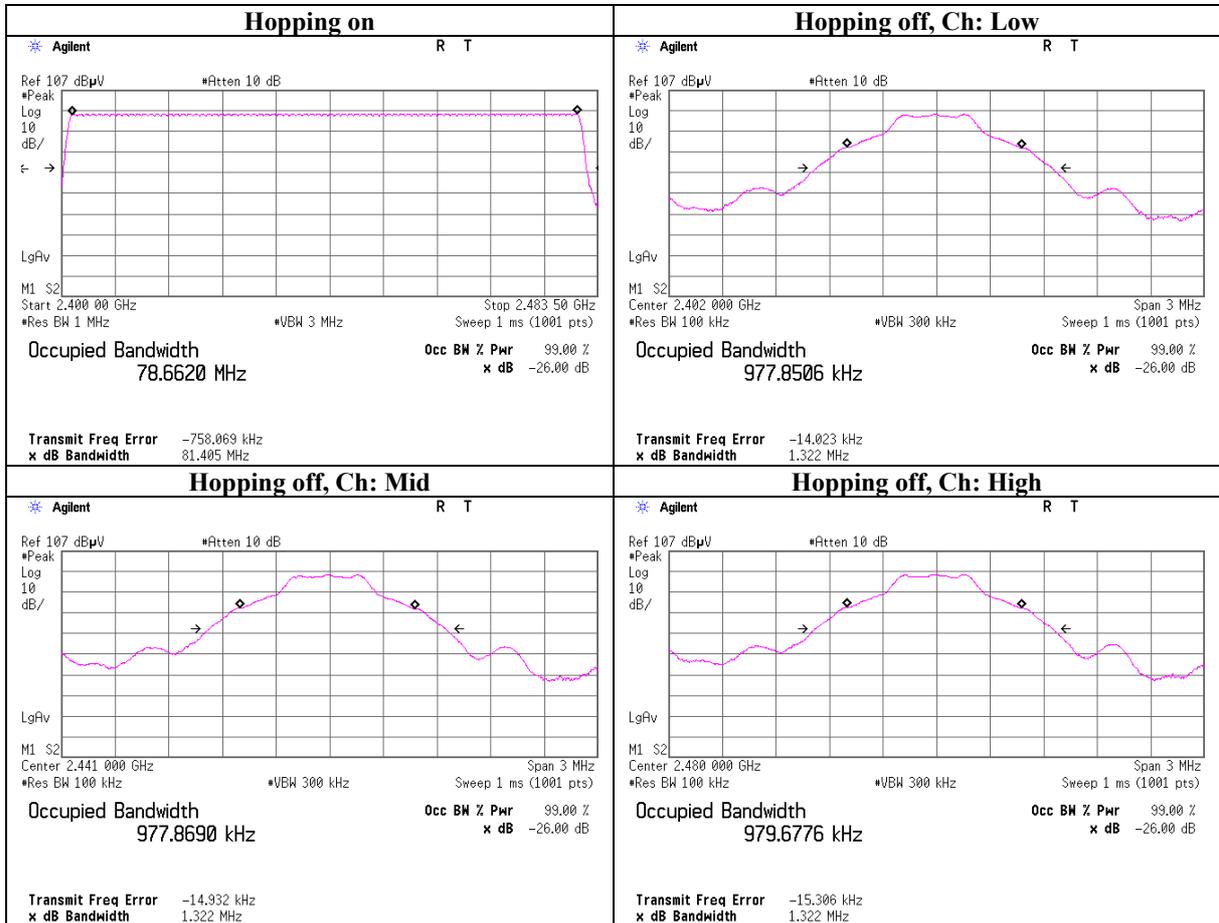

*Refer to 20dB Bandwidth for 99% Occupied Bandwidth, inquiry mode

99% Occupied Bandwidth
EDR

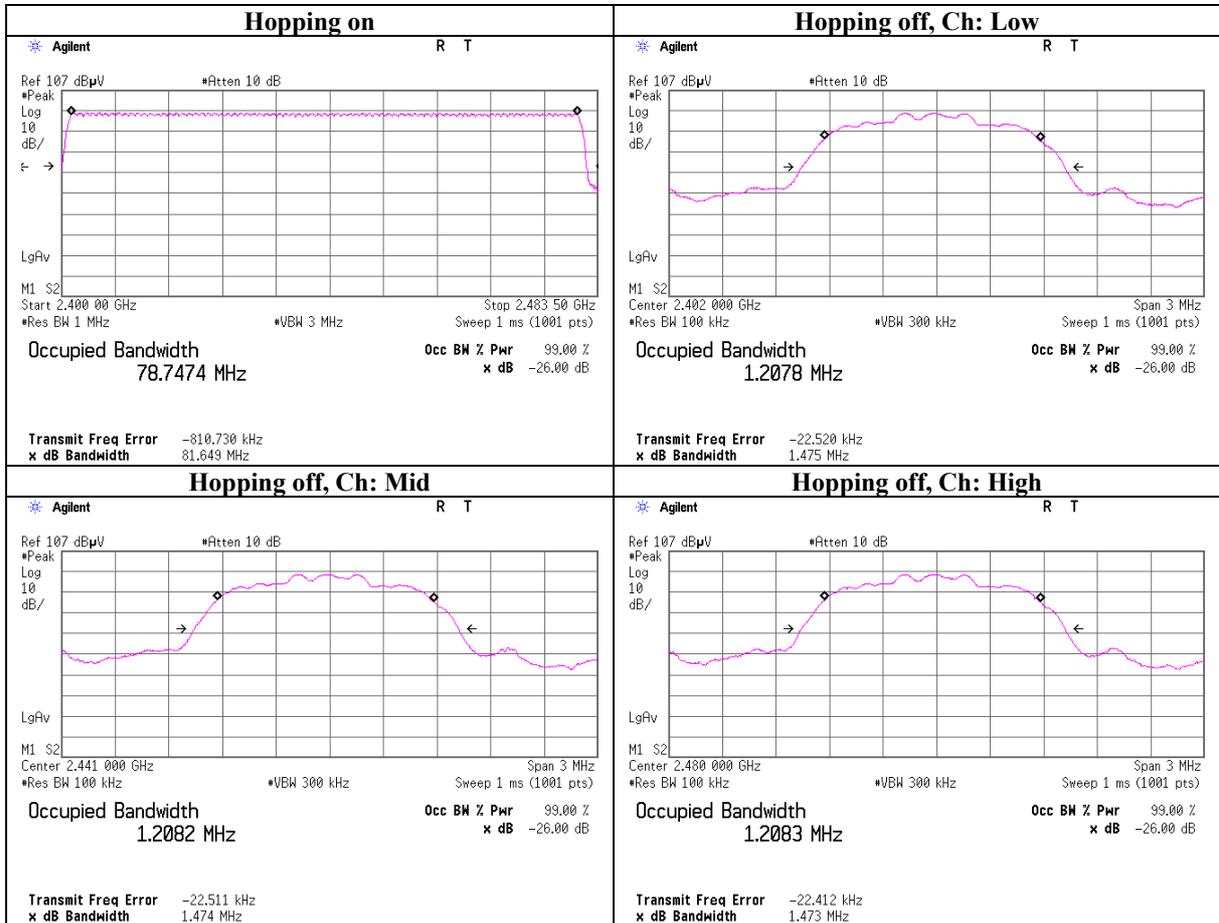

*Refer to 20dB Bandwidth for 99% Occupied Bandwidth, inquiry mode

APPENDIX 3:Test instruments

EMI test equipment(1/2)

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MAEC-02	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE	2008/04/17 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	RE / AT	2007/12/27 * 12
MJM-05	Measure	PROMART	SEN1955	RE	-
MSTW-14	EMI measurement program	TSJ	TEPTO-DV	RE / CE	-
MRENT-62	Spectrum Analyzer	Agilent	E4448A	RE	2007/11/27 * 12
MHA-06	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2008/01/19 * 12
MHA-02	Horn Antenna	EMCO	3160-09	RE	2008/01/19 * 12
MCC-47	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2008/05/12 * 12
MPA-10	Pre Amplifier	Agilent	8449B	RE	2007/09/27 * 12
MHF-18	High Pass Filter 3.5-18.0GHz	TOKIMEC	TF323DCA	RE	2007/12/10 * 12
MCC-77	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2007/12/26 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	RE	2008/04/02 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	RE	2007/10/21 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2007/10/21 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	RE	2008/02/15 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	RE	2007/11/13 * 12
MPA-09	Pre Amplifier	Agilent	8447D	RE	2007/09/13 * 12
MAEC-04	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	CE	2008/03/27 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	CE	2008/01/10 * 12
MJM-07	Measure	PROMART	SEN1955	CE	-
MSA-05	Spectrum Analyzer	Advantest	R3273	CE	2008/06/25 * 12
MTR-07	Test Receiver	Rohde & Schwarz	ESCI	CE	2007/09/14 * 12
MLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	CE(EUT)	2008/02/19 * 12
MLS-07	LISN(AMN)	Schwarzbeck	NSLK8127	CE(AE)	2008/02/20 * 12
MTA-07	Terminator	MCL	BTRM-50	CE	2008/02/04 * 12
MCC-50	Coaxial cable	UL Japan	-	CE	2008/03/17 * 12

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

EMI test equipment(2/2)

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MSA-04	Spectrum Analyzer	Agilent	E4448A	AT	2008/06/26 * 12
MCC-67	Microwave Cable 1G-40GHz	Schner	SUCOFLEX102	AT	2008/04/04 * 12
MAT-22	Attenuator(10dB) DC-18GHz	Orient Microwave	BX10-0476-00	AT	2008/03/04 * 12
MOS-04	Digital Humidity Indicator	N.T	NT-1800	AT	2007/11/12 * 12
MAT-24	Attenuator(10dB) (above1GHz)	Agilent	8493C	AT	2007/06/28 * 12
MPM-09	Power Meter	Anritsu	ML2495A	AT	2007/09/22 * 12
MPSE-12	Power sensor	Anritsu	MA2411B	AT	2007/09/22 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

**Test Item: CE: Conducted Emission
RE: Radiated Emission
AT: Antenna Terminal Conducted test**