

**APPENDIX 1: Photographs of test setup**

**Spurious Emission (Radiated)**

**Front**



**Rear**



**Worst Case Position (Horizontal: X-axis / Vertical: Z-axis)**

**X-axis**




**Y-axis**



**Z-axis**



**Configuration and peripherals**

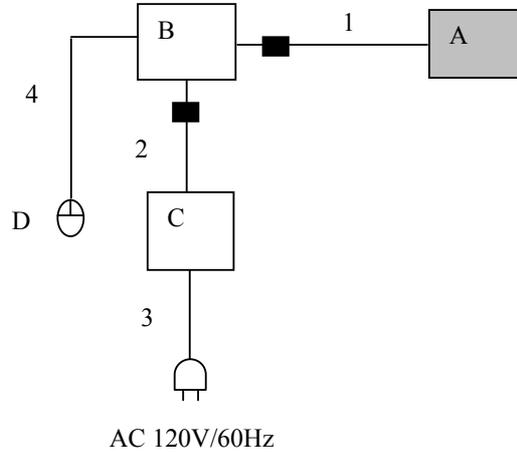

■ : Ferrite Core (Standard Attachment)

\* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

**Description of EUT and Support equipment**

No.	Item	Model number	Serial number	Manufacturer	Remark
A	WIRELESS CONTROLLER	CECHZC2U	1 *1) 3 *2)	Sony Computer Entertainment	EUT
B	Note PC	2371A3J	KV-FCR41 04/12	IBM	-
C	AC Adapter	02K6808	11S02K6808Z1Z89H 4BJ6YS	IBM	-
D	Mouse	M-UB48	LZE02650788	Logitech	-

\*1) Used for Antenna Terminal Conducted test

\*2) Used for Radiated Emission test

**List of cables used**

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	USB Cable	1.4	Shielded	Shielded	-
2	DC Cable	1.8	Unshielded	Unshielded	-
3	AC Cable	1.0	Unshielded	Unshielded	-
4	USB Cable	0.8	Shielded	Shielded	-

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124