


APPENDIX 1: Photographs of test setup

Spurious Emission (Radiated)

Front



Rear

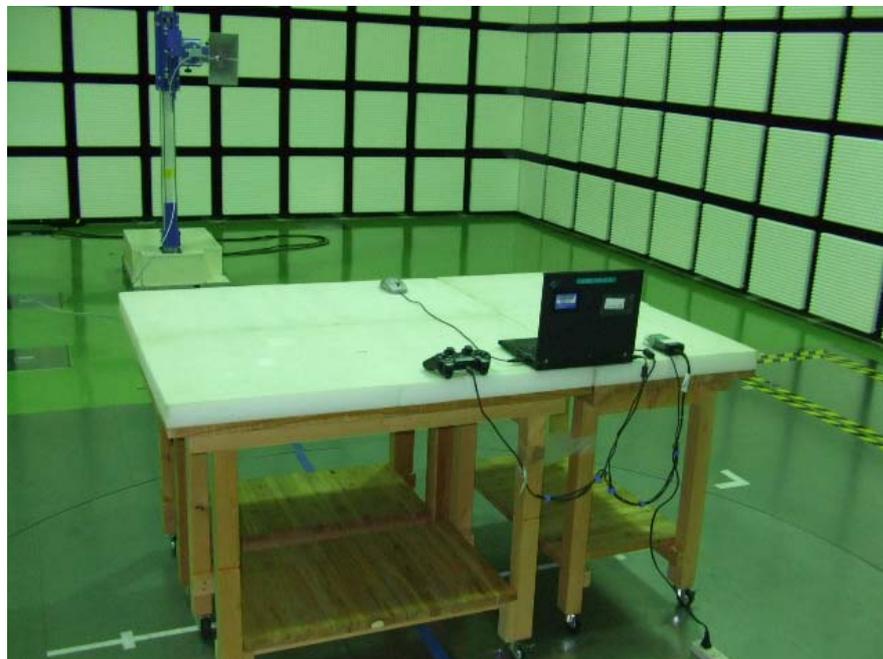

Worst Case Position (Horizontal: X-axis / Vertical: Y-axis)

X-axis




Y-axis



Z-axis



Configuration and peripherals

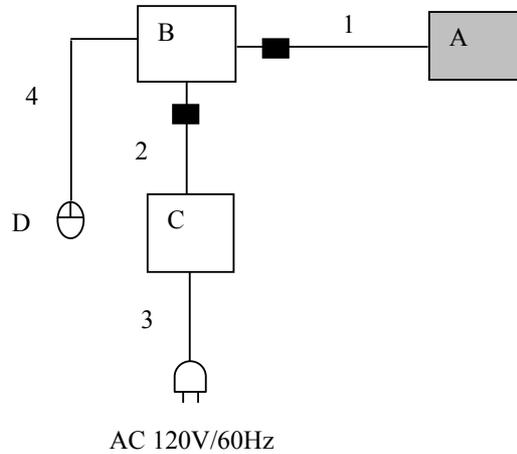

■ : Ferrite Core (Standard Attachment)

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

| No. | Item | Model number | Serial number | Manufacturer | Remark |
|-----|---------------------|--------------|----------------------------|-----------------------------|--------|
| A | WIRELESS CONTROLLER | CECHZC2U | 1 *1) 4 *2) | Sony Computer Entertainment | EUT |
| B | Note PC | 2371A3J | KV-FCR41 04/12 | IBM | - |
| C | AC Adapter | 02K6808 | 11S02K6808Z1Z89H 4BJ6YS | IBM | - |
| D | Mouse | M-UB48 | LZE02650788 | Logitech | - |

*1) Used for Antenna Terminal Conducted test

*2) Used for Radiated Emission test

List of cables used

| No. | Name | Length (m) | Shield | | Remark |
|-----|-----------|------------|------------|------------|--------|
| | | | Cable | Connector | |
| 1 | USB Cable | 1.4 | Shielded | Shielded | - |
| 2 | DC Cable | 1.8 | Unshielded | Unshielded | - |
| 3 | AC Cable | 1.0 | Unshielded | Unshielded | - |
| 4 | USB Cable | 0.8 | Shielded | Shielded | - |

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124