



RADIO TEST REPORT

Test Report No. : 29DE0085-HO-01-B

Applicant : **Sony Computer Entertainment Inc.**
Type of Equipment : **Reference Tool for PLAYSTATION®3**
Model No. : **DECR-1400A**
FCC ID : **AK8DECR1400A**
Test regulation : **FCC Part 15 Subpart C 2008
Section 15.207, Section 15.247**
Test Result : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: December 12 to 18, 2008

Tested by:

T. Shimada
Takumi Shimada
EMC Services


Takayuki S.
Takayuki Shimada
EMC Services

T. Hatakeda
Takahiro Hatakeda
EMC Services

K. Okai
Katsunori Okai
EMC Services

Approved by :

M. Fujimura
Mitsuru Fujimura
Assistant Manager of EMC Services

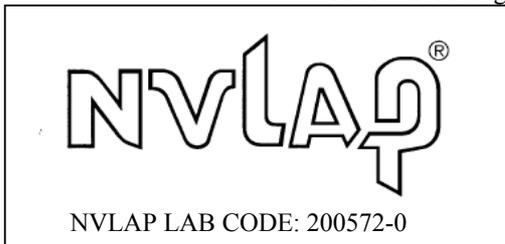

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://uljapan.co.jp/emc/nvlap.html>

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing.....	9
SECTION 5: Conducted Emission	12
SECTION 6: Spurious Emission.....	13
SECTION 7: Bandwidth.....	14
SECTION 8: Maximum Peak Output Power	15
SECTION 9: Peak Power Density	15
APPENDIX 1: Photographs of test setup.....	16
Conducted Emission	16
Spurious Emission (Radiated)	17
Worst Case Position.....	18
APPENDIX 2: Data of EMI test	21
Conducted Emission	21
6dB Bandwidth.....	35
Maximum Peak Output Power	38
Radiated Spurious Emission (below 1GHz)	42
Radiated Spurious Emission (above 1GHz)	49
Conducted Spurious Emission	60
Conducted emission Band Edge compliance	67
Power Density	68
99% Occupied Bandwidth	71
APPENDIX 3: Test instruments	73

SECTION 1: Customer information

Company Name	Sony Computer Entertainment Inc.
Brand Name	SONY
Address	2-6-21 Minamiaoyama, Minato-ku, Tokyo, 107-0062, Japan
Telephone Number	+81-3-6438-8023
Facsimile Number	+81-3-6438-8642
Contact Person	Akiko Tsukada

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	Reference Tool for PLAYSTATION®3
Model No	DECR-1400A
Serial No	1000077: Used for Antenna Terminal Conducted tests 1010010: Used for Conducted emission test and Radiated spurious emission test
Rating	AC 100-240V, 50/60Hz
Country of Mass-production	JAPAN
Receipt Date of Sample	December 11, 2008
Condition of EUT	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	No modification by the test lab.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

2.2 Product description

Model: DECR-1400A, referred to as the EUT in this report, is a Reference Tool for PLAYSTATION®3 to make software for game.

It contains Bluetooth (Ver. 2.0+EDR) module and IEEE802.11b/g WLAN module. Those modules do not transmit simultaneously.

Bluetooth (Ver. 2.0+EDR)

Equipment Type	Transceiver	
Frequency of Operation	2402-2480MHz	
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)	
Bandwidth & Channel spacing	1MHz & 1MHz	
Power Supply (inner)	DC3.3V	
Antenna Type	Ant: 1: BT PIFA	Ant: 2: Dipole Antenna
Antenna Connector Type	Ant: 1: N/A	Ant: 2: N/A
Antenna Gain	Ant: 1: 2.57dBi max	Ant: 2: 1.90dBi max

For Bluetooth (Ver. 2.0+EDR) part, please see the test report number 29DE0085-HO-01-A.

IEEE802.11b/g WLAN

Equipment Type	Transceiver	
Frequency of Operation	2412-2462MHz	
Type of Modulation	DSSS/OFDM	
Bandwidth & Channel spacing	20MHz & 5MHz	
Power Supply (inner)	DC 3.3V/DC1.3V	
Antenna Type	Ant: 0: WLAN PIFA	Ant: 1: WLAN PIFA
Antenna Connector Type	Ant: 0: U.FL	Ant: 1: N/A
Antenna Gain	Ant: 0: 2.03dBi max	Ant: 1: 2.83dBi max

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C: 2008, final revised on May 19, 2008

Title : FCC 47CFR Part15 Radio Frequency Devices Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

FCC 15.31 (e)

This EUT provides stable voltage(DC 3.3V/DC1.3V) constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.2 Procedures and results

[DSSS and other forms of modulation]

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements ----- IC: RSS-Gen 7.2.2	FCC: Section 15.207 ----- IC: RSS-Gen 7.2.2	Conducted	N/A	[QP] 15.2dB 0.62663MHz, N Ant: 1, 11g, Tx, Ch: Mid 0.62645MHz, N Ant: 1, 11b/g, Rx, Ch: Mid [AV] 10.4dB 0.37291MHz, L Ant: 1, 11b, Tx, Ch: Mid 0.37432MHz, N Ant: 1, 11g, Tx, Ch: Mid	Complied
2	6dB Bandwidth	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.6.2	FCC: Section 15.247(a)(2) ----- IC: RSS-210 A8.2(a)	Conducted	N/A	See data.	Complied
3	Maximum Peak Output Power	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.8	FCC: Section 15.247(b)(3) ----- IC: RSS-210 A8.4(4)	Conducted	N/A		Complied
4	Restricted Band Edges	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: -	FCC: Section 15.247 (d) ----- IC: RSS-210 A8.5	Conducted/ Radiated	N/A		Complied
5	Power Density	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: -	FCC: Section 15.247 (e) ----- IC: RSS-210 A8.2(b)	Conducted	N/A		Complied
6	Spurious Emission	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.9 RSS-Gen 4.10	FCC: Section15.247(d) ----- IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3	Conducted/ Radiated	N/A	[Tx] 4.3dB 84.039MHz, Hori., QP, Ant: 1, 11b, Tx, Ch: High [Rx] 3.7dB 84.040MHz, Hori., QP, Ant: 1, 11b/g, Rx, Ch: Mid	Complied

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.

*These tests were performed without any deviations from test procedure except for addition or exclusion.

* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	Conducted	N/A	N/A	N/A

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room	Conducted emission	Radiated emission (10m*)				Radiated emission (3m*)			Radiated emission (3m*)	
	150kHz-30MHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	1GHz-18GHz	18GHz-40GHz	
No.1 semi-anechoic chamber (±)	3.7dB	3.1dB	4.4dB	4.2dB	3.2dB	3.8dB	3.9dB	5.9dB	6.1dB	
No.2 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.4dB	4.0dB	5.9dB	6.1dB	
No.3 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.6dB	4.0dB	5.9dB	6.1dB	
No.4 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	3.9dB	3.9dB	5.9dB	6.1dB	

*10m/3m = Measurement distance

Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

[Tx] The data listed in this test report has enough margin, more than the site margin.

[Rx] The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty for this test is 3.0dB.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, and Test instruments

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

The mode used for test : [IEEE 802.11b / IEEE 802.11g : DSSS / OFDM]

Test	Mode	Tested frequency	Tested antenna
Conducted Emission	IEEE802.11b Transmitting (Tx), 11Mbps *1) IEEE802.11g Transmitting (Tx), 54Mbps *1)	2412MHz(L) 2437MHz(M) 2462MHz(H)	Ant: 0 Ant: 1
	----- IEEE802.11b/g Receiving (Rx)	2437MHz(M)	Ant: 0 Ant: 1
6dB Bandwidth Power Density 99% Occupied Bandwidth	IEEE802.11b Transmitting (Tx), 11Mbps *1) IEEE802.11g Transmitting (Tx), 54Mbps *1)	2412MHz(L) 2437MHz(M) 2462MHz(H)	Ant: 1
Maximum Peak Output Power	IEEE802.11b Transmitting (Tx), 11Mbps *1) IEEE802.11g Transmitting (Tx), 54Mbps *1)	2412MHz(L) 2437MHz(M) 2462MHz(H)	Ant: 0 Ant: 1
Spurious Emission (Conducted/Radiated)	IEEE802.11b Transmitting (Tx), 11Mbps *1) IEEE802.11g Transmitting (Tx), 54Mbps *1)	2412MHz(L) 2437MHz(M) 2462MHz(H)	Ant: 1
	----- IEEE802.11b/g Receiving (Rx)	2437MHz(M)	Ant: 1
Restricted Band Edge (Conducted/Radiated)	IEEE802.11b Transmitting (Tx), 11Mbps *1) IEEE802.11g Transmitting (Tx), 54Mbps *1)	2412MHz(L) 2462MHz(H)	Ant: 1

*Transmitting duty was 100% on all tests.

*As a result of preliminary check for two antennas (Ant: 0 and Ant: 1), the formal test was performed as above-mentioned table.

*1) The transmitting data shall be scrambled with the following scramblers and it was transmitted continuously.

[11b]

11Mbps: IEEE Std 802.11b(1999) Section 18.2.4

[11g]

54Mbps: IEEE Std 802.11a(1999) Section 17.3.5.4

Preliminary check result (Worst antenna & Data rate):

Conducted Emission

11b: Ant: 0 / Ant: 1, 11Mbps
11g: Ant: 0 / Ant: 1, 54Mbps

Radiated Emission &Antenna Terminal Conducted test

11b: Ant: 1
11g: Ant: 1

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

This page has been submitted for a separate exhibit.

This page has been submitted for a separate exhibit.

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT itself (as a stand alone equipment)

Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/(AMN) to the input power source. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector : quasi-peak and average detector (IF BW 9 kHz)
Measurement range : 0.15-30MHz
Test data : APPENDIX 2
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port. It was measured based on "1. RF antenna conducted test" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

The following spectrum analyzer setting was used:

- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2

Test result : Pass

[Radiated]

Test Procedure

It was measured based on "2. Radiated emission test" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane.

The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The radiated emission measurements were made with the following detector function of the test receiver and the Spectrum analyzer.

In any 100kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 / Table 2 of RSS-210 2.7 (IC) and outside the restricted band of FCC15.205 / Table 1 of RSS-210 2.7 (IC).

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver / Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz(T/R)	PK: RBW: 1MHz/VBW: 1MHz
IF Bandwidth	20dBc : RBW: 100kHz VBW: 300kHz (S/A)	AV *1): RBW: 1MHz/VBW: 10Hz 20dBc: RBW: 100kHz/VBW: 300kHz

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

- The carrier level and noise levels were confirmed at each position of X and Y axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 2

Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 7: Bandwidth

6dB Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.
It was measured based on "Guidance on Measurement of Digital Transmission Systems Operating under Section 15.247".
The following spectrum analyzer setting was used:

- Span: 50MHz
- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

99% Occupied Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: Enough width to display 20dB Bandwidth
- RBW: as close to 1% of the Span as is possible without being below 1%
- VBW: Three times of RBW
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.

It was measured based on "Power Output Option 1" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

Test data : APPENDIX 2
Test result : Pass

SECTION 9: Peak Power Density

[Conducted]

Test Procedure

The Peak Power Density was measured with a spectrum analyzer connected to the antenna port.

It was measured based on "PSD Option 1" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

- Span: 1.5MHz
- RBW: 3kHz
- VBW: 100kHz
- Sweep: 500sec
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124